

APPLICATION FOR CERTIFICATION

On Behalf of
FUTABA Corporation
Radio Control
Model No. : FHSS2-24G
FCC ID : AZPFHSS2-24G
Brand: Futaba

Prepared for : FUTABA Corporation
1080 Yabutsuka Chosei-son Chosei-gun
Chiba, 299-4395 Japan.

Prepared by : AUDIX Technology Corporation
EMC Department
No. 53-11, Tin-Fu Tsun, Lin-Kou Hsiang,
Taipei Hsien, Taiwan

Tel : (02) 2609-9301, 2609-2133
Fax: (02) 2609-9303

File Number : C1M1009154
Report Number : EM-F991031
Date of Test : Oct. 07 ~ 20, 2010
Date of Report : Oct. 21, 2010

TABLE OF CONTENTS

Description	Page
TEST REPORT CERTIFICATION	4
1. GENERAL INFORMATION	5
1.1. Description of Device (EUT).....	5
1.2. Description of Test Facility	6
1.3. Measurement Uncertainty.....	6
2. CONDUCTED EMISSION MEASUREMENT.....	7
3. RADIATED EMISSION MEASUREMENT	8
3.1. Test Equipment.....	8
3.2. Test Setup	8
3.3. Radiated Emission Limits (§15.209)	10
3.4. Operating Condition of EUT	10
3.5. Test Procedure	10
3.6. Radiated Emission Measurement Results.....	11
4. 20dB BANDWIDTH MEASUREMENT	31
4.1. Test Equipment.....	31
4.2. Block Diagram of Test Setup.....	31
4.3. Specification Limits (§15.247(a)(1))	31
4.4. Operating Condition of EUT	31
4.5. Test Procedure (DA 00-705).....	31
4.6. Test Results.....	32
5. CARRIER FREQUENCY SEPARATION MEASUREMENT	34
5.1. Test Equipment.....	34
5.2. Block Diagram of Test Setup.....	34
5.3. Specification Limits (§15.247(a)(1))	34
5.4. Operating Condition of EUT	34
5.5. Test Procedure (DA 00-705).....	34
5.6. Test Results.....	34
6. TIME OF OCCUPANCY MEASUREMENT	37
6.1. Test Equipment.....	37
6.2. Block Diagram of Test Setup.....	37
6.3. Specification Limits (§15.247(a)(1)(iii))	37
6.4. Operating Condition of EUT	37
6.5. Test Procedure (DA 00-705).....	37
6.6. Test Results.....	38
7. NUMBER OF HOPPING CHANNELS MEASUREMENT	40
7.1. Test Equipment.....	40
7.2. Block Diagram of Test Setup.....	40
7.3. Specification Limits (§15.247(a)(1)(iii))	40
7.4. Operating Condition of EUT	40
7.5. Test Procedure (DA 00-705).....	40
7.6. Test Results.....	40
8. MAXIMUM PEAK OUTPUT POWER MEASUREMENT	42
8.1. Test Equipment.....	42
8.2. Block Diagram of Test Setup.....	42
8.3. Specification Limits (§15.247(b)-(1)).....	42
8.4. Operating Condition of EUT	42
8.5. Test Procedure (DA 00-705).....	42
8.6. Test Results.....	42

9. EMISSION LIMITATIONS MEASUREMENT43

9.1. Test Equipment 43

9.2. Block Diagram of Test Setup..... 43

9.3. Specification Limits (§15.247(c))..... 43

9.4. Operating Condition of EUT 43

9.5. Test Procedure (DA 00-705)..... 43

9.6. Test Results..... 43

10. BAND EDGES MEASUREMENT.....46

10.1. Test Equipment..... 46

10.2. Block Diagram of Test Setup 46

10.3. Specification Limits (§15.247(c)) 46

10.4. Operating Condition of EUT 46

10.5. Test Procedure (DA 00-705) 46

10.6. Test Results 46

11. DEVIATION TO TEST SPECIFICATIONS49

12. PHOTOGRAPHS50

12.1. Photos of Radiated Measurement at Semi-Anechoic Chamber..... 50

12.2. Photo of 20dB Bandwidth Measurement 53

12.3. Photo of Carrier Frequency Separation Measurement 53

12.4. Photo of Time of Occupancy Measurement 54

12.5. Photo of Number of Hopping Channel Measurement 54

12.6. Photo of Maximum Peak Output Power Measurement 55

12.7. Photo of Emission Limitation Measurement 55

12.8. Photo of Band Edges Measurement 56

TEST REPORT CERTIFICATION

Applicant : FUTABA Corporation
 Manufacturer : FUTABA Corporation
 EUT Description : Radio Control
 FCC ID : AZPFHSS2-24G
 (A) Model No. : FHSS2-24G
 (B) Serial No. : N/A
 (C) Brand : Futaba
 (D) Power Supply : DC 6V
 (E) Test Voltage : DC 6V (Via Batteries)

Measurement Procedure Used:

FCC RULES AND REGULATIONS PART 15 SUBPART C, Oct. 2009
AND ANSI C63.4/2003

(FCC CFR 47 Part 15C, §15.207 and §15.209 and §15.247)

The device described above was tested by AUDIX Technology Corporation to determine the maximum emission levels emanating from the device. The maximum emission levels were compared to the FCC Part 15 subpart B & C limits.

The measurement results are contained in this test report and AUDIX Technology Corporation is assumed full responsibility for the accuracy and completeness of these measurements. Also, this report shows that the EUT to be technically compliant with the FCC official limits.

This report applies to above tested sample only. This report shall not be reproduced in part without written approval of AUDIX Technology Corporation.

Date of Test : Oct. 07 ~ 20, 2010 Date of Report : Oct. 21, 2010

Producer : Annie Yu
 (Annie Yu/Assistant Administrator)

Reviewer : Henning Chang
 (Henning Chang/Supervisor)

Signatory : Ben Cheng
 (Ben Cheng/Manager)

1. GENERAL INFORMATION

1.1. Description of Device (EUT)

Description	:	Radio Control (Transmitter Unit)
Model Number	:	FHSS2-24G
Serial Number	:	N/A
FCC ID	:	AZPFHSS2-24G
Applicant	:	FUTABA Corporation 1080 Yabutsuka Chosei-son Chosei-gun Chiba, 299-4395 Japan.
Manufacturer	:	FUTABA Corporation 1080 Yabutsuka Chosei-son Chosei-gun Chiba, 299-4395 Japan.
Radio Technology	:	FSK Modulation
Frequency Band	:	2404.000MHz ~ 2447.500MHz
Tested Frequency	:	2404.000MHz (Channel 01) 2426.500MHz (Channel 16) 2447.500MHz (Channel 30)
Frequency Channel	:	30 channels
Antenna (Pencil Antenna)	:	Antenna Gain: 2.14dBi
Date of Receipt of Sample	:	Sep. 10, 2010
Date of Test	:	Oct. 07 ~ 20, 2010

Remark: The EUT is tested with T4PL-2.4G Radio Control.

1.2. Description of Test Facility

Name of Firm	:	AUDIX Technology Corporation EMC Department No. 53-11, Tin-Fu Tsun, Lin-Kou Hsiang, Taipei Hsien, Taiwan
Test Location & Facility (AC)	:	Semi-Anechoic Chamber No. 53-11, Tin-Fu Tsun, Lin-Kou Hsiang, Taipei Hsien, Taiwan. May 14, 2009 Renewal on Federal Communication Commission Registration Number: 90993
NVLAP Lab. Code	:	200077-0
TAF Accreditation No	:	1724

1.3. Measurement Uncertainty

Test Item	Frequency Range	Uncertainty (dB)
Radiation Test (Distance: 3m)	30MHz~300MHz	±2.91dB
	300MHz~1000MHz	±2.94dB
	Above 1GHz	± 5.02dB

Remark : Uncertainty = $ku_c(y)$

Test Item	Uncertainty
20dB Bandwidth	± 0.2kHz
Carrier Frequency Separation	± 0.2kHz
Time Of Occupancy	± 0.03sec
Maximum peak Output power	± 0.52dBm
Emission Limitations	± 0.13dB
Band Edges	± 0.13dB

2. CONDUCTED EMISSION MEASUREMENT

【The EUT only employs battery power for operation, no conductive emission limits are required according to FCC Part 15 Section §15.207】

3. RADIATED EMISSION MEASUREMENT

3.1. Test Equipment

The following test equipment was used during the radiated emission measurement:

3.1.1. For Frequency Range 30MHz~1000MHz (at Semi-Anechoic Chamber)

Item	Type	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
1.	Spectrum Analyzer	HP	8564EC	3946A00249	Oct. 27, 09'	Oct. 26, 10'
2.	Test Receiver	R & S	ESCS30	100265	Sep. 01, 10'	Aug. 31, 11'
3.	Pre-Amplifier	HP	8447D	2944A06305	Feb. 03, 10'	Feb. 02, 11'
4.	Biconical Antenna	CHASE	VBA6106A	1264	Mar. 13, 10'	Mar. 12, 11'
5.	Log Periodic Antenna	Schwarzbeck	UHALP91 08-A	0810	Mar. 13, 10'	Mar. 12, 11'

3.1.2. For Frequency Above 1GHz (at Semi-Anechoic Chamber)


Item	Type	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
1.	Spectrum Analyzer	HP	8564EC	3946A00249	Oct. 27, 09'	Oct. 26, 10'
2.	Pre-Amplifier	HP	8449B	3008A00529	Dec. 15, 09'	Dec. 14, 10'
3.	Horn Antenna	EMCO	3115	9112-3775	May 10, 10'	May 09, 11'
4.	Horn Antenna	EMCO	3116	2653	Oct. 04, 10'	Oct. 03, 11'

3.2. Test Setup


3.2.1. Block Diagram of connection between EUT and simulators

RADIO CONTROL (EUT)

3.2.2. Semi-Anechoic Chamber (3m) Setup Diagram for 30-1000MHz

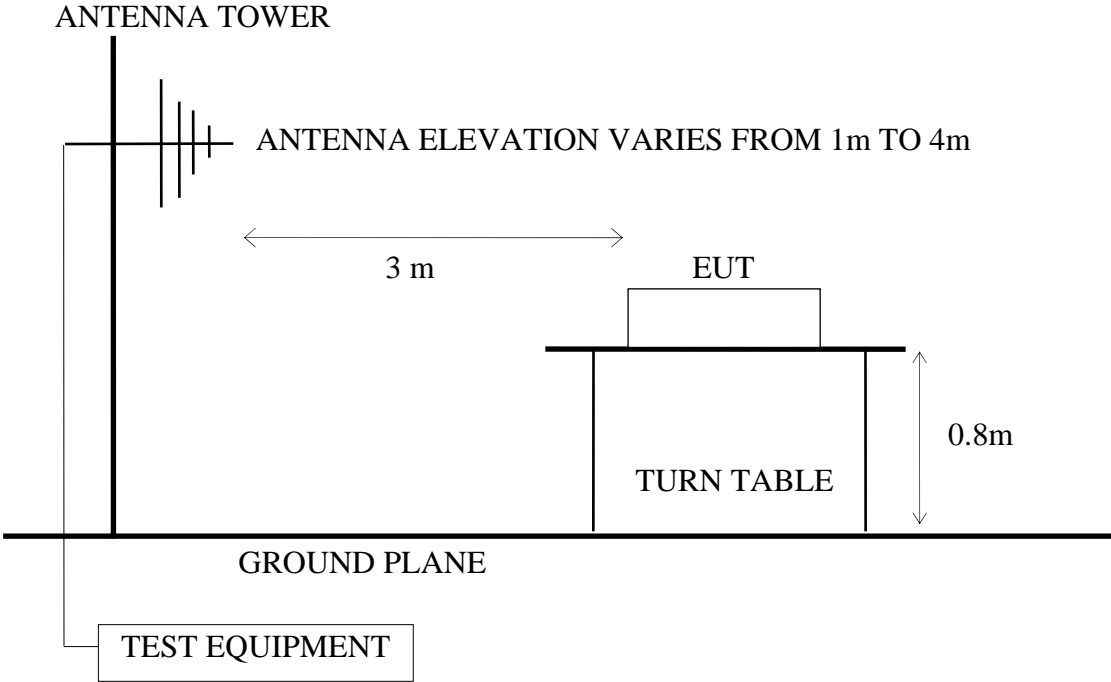

3.2.3. Semi-Anechoic Chamber (3m) Setup Diagram for above 1GHz

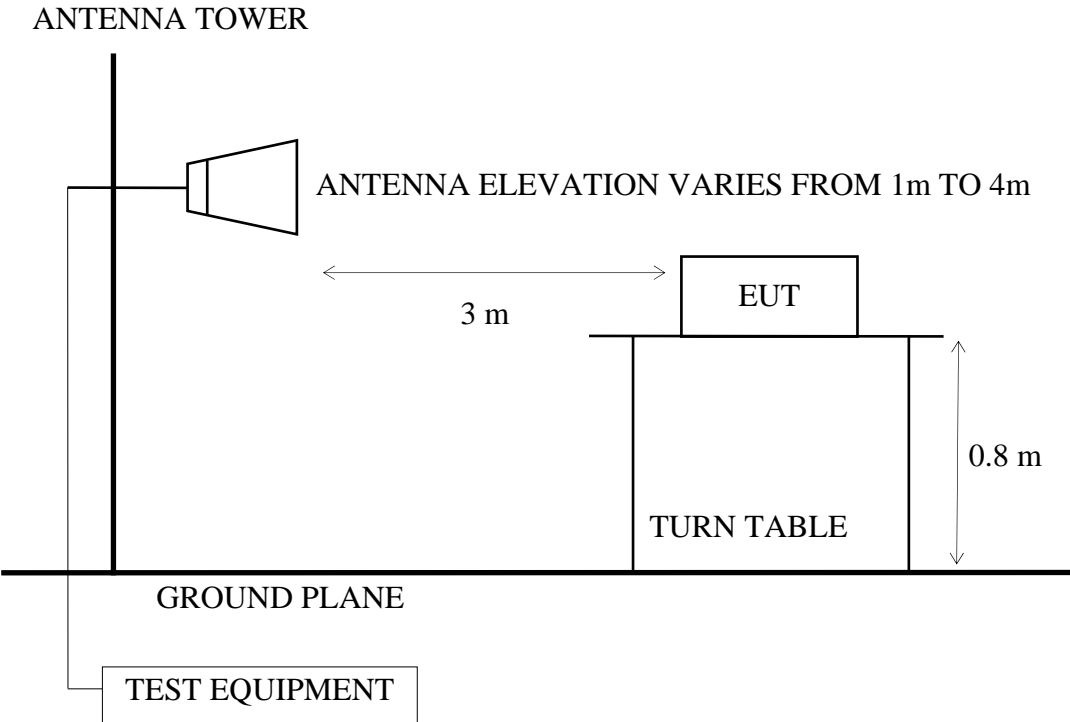

3.3. Radiated Emission Limits (§15.209)

FREQUENCY MHz	DISTANCE Meters	FIELD STRENGTHS LIMITS	
		$\mu\text{V/m}$	$\text{dB}\mu\text{V/m}$
30 ~ 88	3	100	40.0
88 ~ 216	3	150	43.5
216 ~ 960	3	200	46.0
Above 960	3	500	54.0
Above 1000	3	74.0 $\text{dB}\mu\text{V/m}$ (Peak) 54.0 $\text{dB}\mu\text{V/m}$ (Average)	

- Remark :
- (1) Emission level ($\text{dB}\mu\text{V/m}$) = 20 log Emission level ($\mu\text{V/m}$)
 - (2) The tighter limit applies at the edge between two frequency bands.
 - (3) Distance refers to the distance in meters between the measuring instrument antenna and the closed point of any part of the device or system.
 - (4) The limits in this table are based on CFR 47 Part 15.205(a)(b) and Part 15.209 (a).
 - (5) The over 1GHz limit, FCC limit is used based on CFR 47 Part 15.35 (b) and Part 15.205(b) & Part 15.209(e) and Part 15.207(c).

3.4. Operating Condition of EUT

- 3.4.1. Set up the EUT (Radio Control) as shown on 3.2.
- 3.4.2. To turn on the power of all equipment.
- 3.4.3. The EUT was set the PC system using test program “Futaba Term”.
- 3.4.4. Transmit Mode: The EUT was set to continuously transmit signals at 2404.000MHz、 2426.500MHz and 2447.500MHz during testing.
- 3.4.5. Receive Mode: The EUT was set to continuously receive signals at 2425.000MHz during testing.

3.5. Test Procedure

The EUT and its simulators were placed on a turn table which was 0.8 meter above the ground. The turn table rotated 360 degrees to determine the position of the maximum emission level. EUT was set 3 meters away from the receiving antenna which was mounted on an antenna tower. The antenna could be moved up and down between 1 to 4 meters to find out the maximum emission level. Broadband antenna such as calibrated biconical and log-periodical antenna or horn antenna were used as a receiving antenna. Both horizontal and vertical polarization of the antenna were set on measurement. In order to find the maximum emission, all of the interface cables were manipulated according to FCC ANSI C63.4-2003 regulation.

The bandwidth of the R&S Test Receiver ESCS30 was set at 120kHz. (For 30MHz to 1000MHz)

The resolution bandwidth and video bandwidth of test spectrum analyzer is 1MHz for peak detection (PK) at frequency above 1GHz.

The resolution bandwidth of test spectrum analyzer is 1MHz and the video bandwidth is 10Hz for average detection (AV) at frequency above 1GHz.

The frequency range from 30MHz to 25GHz (Up to 10th harmonics from fundamental frequency) was checked.

3.6. Radiated Emission Measurement Results

PASSED.

(All emissions not reported below are too low against the prescribed limits.)

EUT : Radio Control M/N : FHSS2-24G

Test Date : Oct. 07, 2010 Temperature : 27 Humidity : 49%

For Frequency Range 30MHz~1000MHz:

The EUT emitted the fundamental frequency with data code at the stand, side and lying conditions.

The EUT select **worst position “stand”** and with following test modes was performed during this section testing and all the test results are listed in section 3.6.1.

Mode	Channel	Frequency	Test Mode	Position	Reference Test Data	
					Horizontal	Vertical
1.	01	2404.000MHz	Transmit	Stand	# 9	# 10
2.	16	2426.500MHz		Stand	# 10	# 9
3.	30	2447.500MHz		Stand	# 9	# 10
4.	16	2426.500MHz	Receive	Stand	# 8	# 7

* Above all final readings were measured with Quasi-Peak detector.

For Frequency above 1GHz:

The EUT with following test modes was performed during this section testing and all the test results are listed in section 3.6.2.

Mode	Chnnel	Frequency	Test Mode	Position	Test Frequency Range
1.	01	2404.000MHz	Transmit	Stand	1000-2680MHz*
2.					2680-4400MHz
3.					4400-5500MHz
4.					5500-18000MHz
5.	16	2426.500MHz	Transmit	Stand	1000-2680MHz*
6.					2680-4400MHz
7.					4400-5500MHz
8.					5500-18000MHz
9.	30	2447.500MHz	Transmit	Stand	1000-2680MHz*
10.					2680-4400MHz
11.					4400-5500MHz
12.					5500-18000MHz
13.	16	2426.500MHz	Receive	Stand	1000-2680MHz
14.					2680-5500MHz
15.					5500-18000MHz

Remark 1 : The emissions level were too low against the official limit and not report.

Remark 2 : "*" means there is spurious emission falling the frequency band and be measures.

For Restricted Bands:


The EUT was tested in restricted bands and all the test results are listed in section 3.6.3. (The restricted bands defined in part 15.205(a))

Mode	Channel	Frequency	Test Mode	Reference Test Data	
				Horizontal	Vertical
1.	01	2404.000MHz	Transmit	# 1, #4	#2, #3
2.	30	2447.500MHz	Transmit	#5, #8	#6, #7

3.6.1. Frequency Range 30-1000MHz



AUDIX TECHNOLOGY Corp. EMC Laboratory
 No.53-11, Tin-fu Tsun, Lin-kou Hsiang, Taipei
 County, Taiwan R.O.C. Post Code:24443
 Tel:+886-2-26092133 Fax:+886-2-26099303
 Email:ttemc@ttemc.com.tw

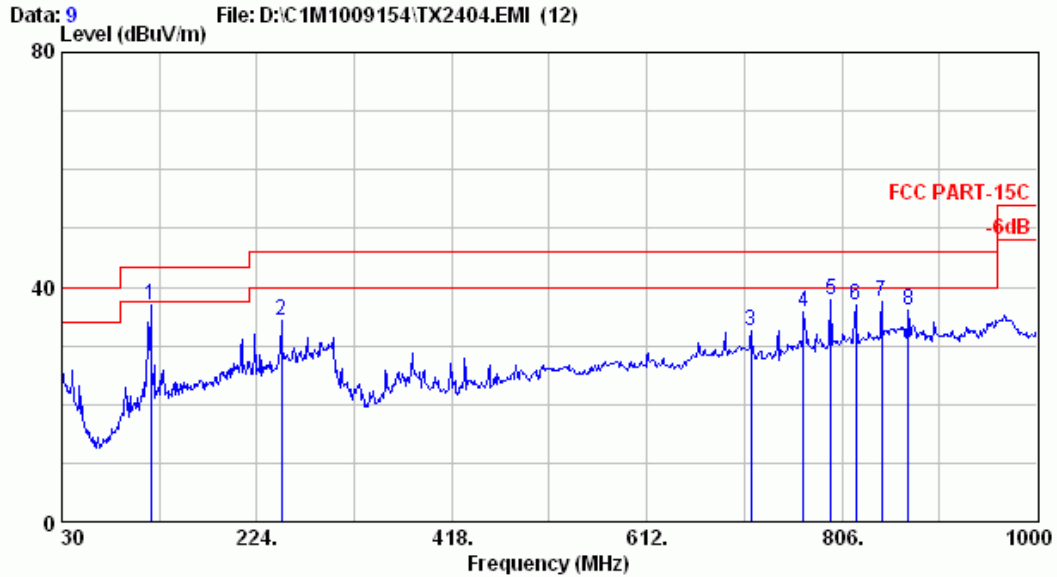


Site no. : A/C Chamber Data no. : 9
 Dis. / Ant. : 3m VBA6106A/UHALP9108A Ant. pol. : HORIZONTAL
 Limit : FCC PART-15C
 Env. / Ins. : 8564EC 27°C/59%
 EUT : FHSS2-24G
 Power Rating : DC 6V
 Test Mode : TX2404

	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBµV)	Emission Level (dBµV/m)	Limits (dBµV/m)	Margin (dB)	Remark
1	18.94	2.30	15.66	36.90	43.50	6.60	
2	23.66	3.50	7.05	34.22	46.00	11.78	
3	22.74	6.55	3.26	32.56	46.00	13.44	
4	23.87	6.80	5.05	35.72	46.00	10.28	
5	24.03	6.90	6.84	37.76	46.00	8.24	
6	23.66	7.00	6.22	36.88	46.00	9.12	
7	25.35	7.10	4.98	37.43	46.00	8.57	
8	25.52	7.20	3.20	35.92	46.00	10.08	

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.



AUDIX TECHNOLOGY Corp. EMC Laboratory
 No.53-11, Tin-fu Tsun, Lin-kou Hsiang, Taipei
 County, Taiwan R.O.C. Post Code:24443
 Tel:+886-2-26092133 Fax:+886-2-26099303
 Email:ttemc@ttemc.com.tw

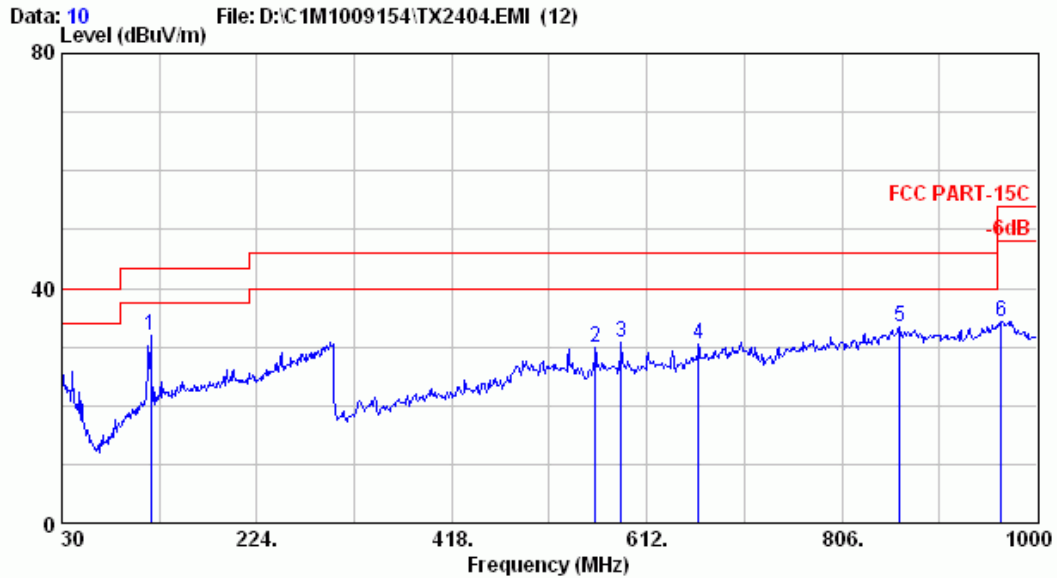

Site no. : A/C Chamber Data no. : 10
 Dis. / Ant. : 3m VBA6106A/UHALP9108A Ant. pol. : VERTICAL
 Limit : FCC PART-15C
 Env. / Ins. : 8564EC 27°C/59%
 EUT : FHSS2-24G
 Power Rating : DC 6V
 Test Mode : TX2404


	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBµV)	Emission Level (dBµV/m)	Limits (dBµV/m)	Margin (dB)	Remark
1	118.270	18.94	2.30	10.82	32.06	43.50	11.44	
2	560.590	20.03	6.70	3.26	29.99	46.00	16.01	
3	586.780	21.01	6.30	3.51	30.81	46.00	15.19	
4	663.410	22.52	6.32	1.65	30.48	46.00	15.52	
5	863.230	26.09	7.20	0.20	33.49	46.00	12.51	
6	964.110	26.80	7.60	0.02	34.42	54.00	19.58	

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.



AUDIX TECHNOLOGY Corp. EMC Laboratory
 No.53-11, Tin-fu Tsun, Lin-kou Hsiang, Taipei
 County, Taiwan R.O.C. Post Code:24443
 Tel:+886-2-26092133 Fax:+886-2-26099303
 Email:ttemc@ttemc.com.tw

Data: 10 File: D:\C1M1009154\TX2425.EMI (12)

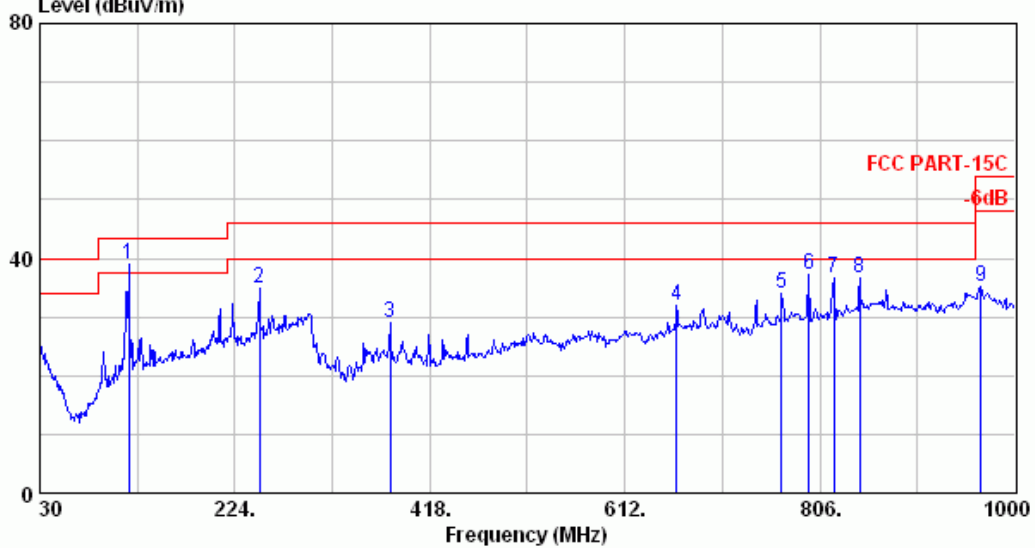

Site no. : A/C Chamber Data no. : 10
 Dis. / Ant. : 3m VBA6106A/UHALP9108A Ant. pol. : HORIZONTAL
 Limit : FCC PART-15C
 Env. / Ins. : 8564EC 27°C/59%
 EUT : FHSS2-24G
 Power Rating : DC 6V
 Test Mode : TX2426


	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	118.270	18.94	2.30	17.60	38.84	43.50	4.66	
2	248.250	23.66	3.50	7.83	35.00	46.00	11.00	
3	378.230	17.19	4.60	7.16	28.95	46.00	17.05	
4	663.410	22.52	6.32	3.20	32.03	46.00	13.97	
5	768.170	23.87	6.80	3.43	34.10	46.00	11.90	
6	795.330	24.03	6.90	6.15	37.07	46.00	8.93	
7	819.580	23.66	7.00	5.99	36.65	46.00	9.35	
8	845.770	25.35	7.10	4.29	36.74	46.00	9.26	
9	966.050	26.89	7.70	0.70	35.29	54.00	18.71	

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.



AUDIX TECHNOLOGY Corp. EMC Laboratory
 No.53-11, Tin-fu Tsun, Lin-kou Hsiang, Taipei
 County, Taiwan R.O.C. Post Code:24443
 Tel:+886-2-26092133 Fax:+886-2-26099303
 Email:ttemc@ttemc.com.tw

Data: 9 File: D:\C1M1009154\TX2425.EMI (12)

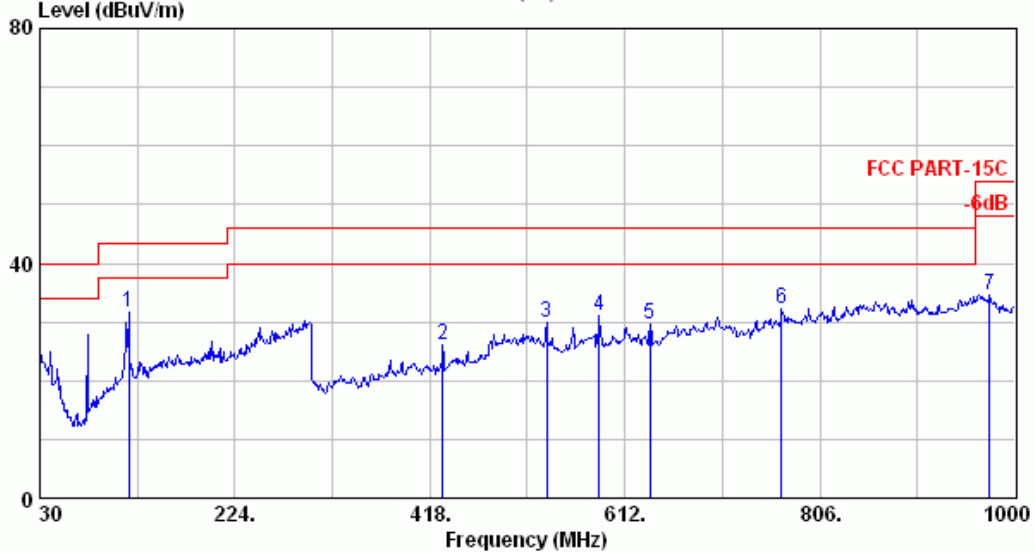


Site no. : A/C Chamber Data no. : 9
 Dis. / Ant. : 3m VBA6106A/UHALP9108A Ant. pol. : VERTICAL
 Limit : FCC PART-15C
 Env. / Ins. : 8564EC 27°C/59%
 EUT : FHSS2-24G
 Power Rating : DC 6V
 Test Mode : TX2426

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBµV)	Emission Level (dBµV/m)	Limits (dBµV/m)	Margin (dB)	Remark
1	118.270	18.94	2.30	10.49	31.73	43.50	11.77	
2	430.610	17.26	5.20	3.55	26.01	46.00	19.99	
3	534.400	19.57	7.00	3.28	29.85	46.00	16.15	
4	586.780	21.01	6.30	3.79	31.09	46.00	14.91	
5	637.220	20.92	6.20	2.59	29.70	46.00	16.30	
6	768.170	23.87	6.80	1.65	32.32	46.00	13.68	
7	974.780	26.52	7.70	0.33	34.55	54.00	19.45	

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.



AUDIX TECHNOLOGY Corp. EMC Laboratory
 No.53-11, Tin-fu Tsun, Lin-kou Hsiang, Taipei
 County, Taiwan R.O.C. Post Code:24443
 Tel:+886-2-26092133 Fax:+886-2-26099303
 Email:ttmc@ttmc.com.tw

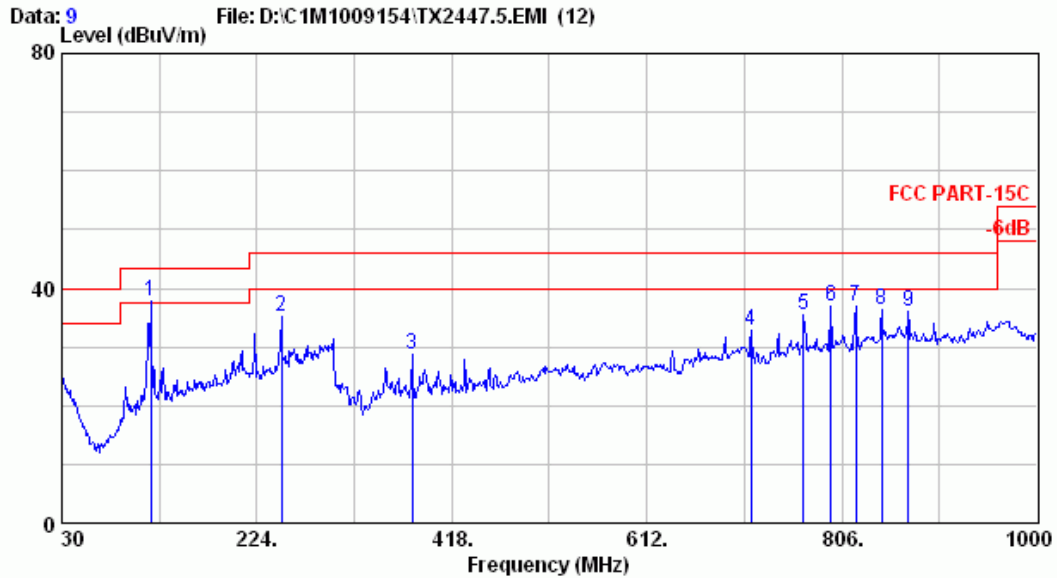


Site no. : A/C Chamber Data no. : 9
 Dis. / Ant. : 3m VBA6106A/UHALP9108A Ant. pol. : HORIZONTAL
 Limit : FCC PART-15C
 Env. / Ins. : 8564EC 27°C/59%
 EUT : FHSS2-24G
 Power Rating : DC 6V
 Test Mode : TX2447

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBµV)	Emission Level (dBµV/m)	Limits (dBµV/m)	Margin (dB)	Remark
1	118.270	18.94	2.30	16.70	37.94	43.50	5.56	
2	248.250	23.66	3.50	7.94	35.11	46.00	10.89	
3	378.230	17.19	4.60	6.84	28.63	46.00	17.37	
4	715.790	22.74	6.55	3.59	32.89	46.00	13.11	
5	768.170	23.87	6.80	4.70	35.37	46.00	10.63	
6	795.330	24.03	6.90	6.06	36.98	46.00	9.02	
7	819.580	23.66	7.00	6.40	37.06	46.00	8.94	
8	845.770	25.35	7.10	4.03	36.48	46.00	9.52	
9	871.960	25.52	7.20	3.31	36.03	46.00	9.97	

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.



AUDIX TECHNOLOGY Corp. EMC Laboratory
 No.53-11, Tin-fu Tsun, Lin-kou Hsiang, Taipei
 County, Taiwan R.O.C. Post Code:24443
 Tel:+886-2-26092133 Fax:+886-2-26099303
 Email:ttemc@ttemc.com.tw

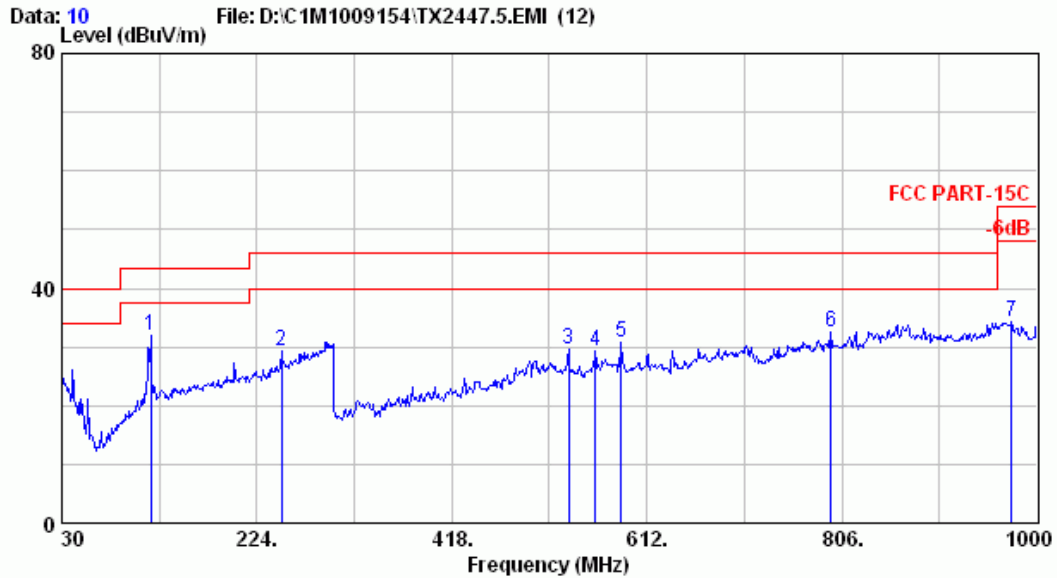


Site no. : A/C Chamber Data no. : 10
 Dis. / Ant. : 3m VBA6106A/UHALP9108A Ant. pol. : VERTICAL
 Limit : FCC PART-15C
 Env. / Ins. : 8564EC 27°C/59%
 EUT : FHSS2-24G
 Power Rating : DC 6V
 Test Mode : TX2447

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBµV)	Emission Level (dBµV/m)	Limits (dBµV/m)	Margin (dB)	Remark
1	118.270	18.94	2.30	10.61	31.85	43.50	11.65	
2	248.250	23.66	3.50	2.25	29.42	46.00	16.58	
3	534.400	19.57	7.00	3.06	29.63	46.00	16.37	
4	560.590	20.03	6.70	2.60	29.33	46.00	16.67	
5	586.780	21.01	6.30	3.61	30.91	46.00	15.09	
6	795.330	24.03	6.90	1.63	32.55	46.00	13.45	
7	974.780	26.52	7.70	0.01	34.23	54.00	19.77	

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.



AUDIX TECHNOLOGY Corp. EMC Laboratory
 No.53-11, Tin-fu Tsun, Lin-kou Hsiang, Taipei
 County, Taiwan R.O.C. Post Code:24443
 Tel:+886-2-26092133 Fax:+886-2-26099303
 Email:ttemc@ttemc.com.tw

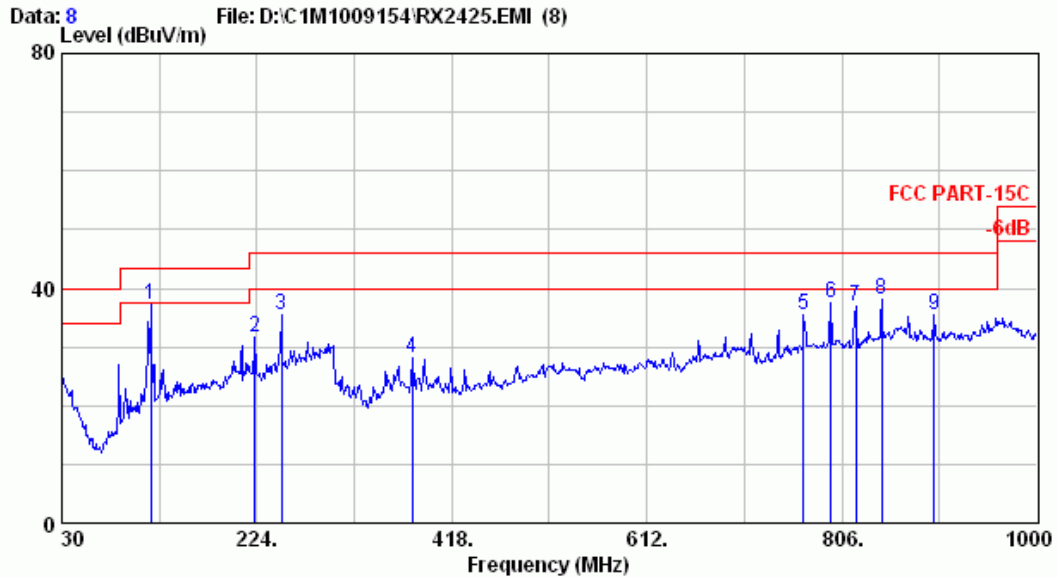

Site no. : A/C Chamber Data no. : 8
 Dis. / Ant. : 3m VBA6106A/UHALP9108A Ant. pol. : HORIZONTAL
 Limit : FCC PART-15C
 Env. / Ins. : 8564EC 27°C/59%
 EUT : FHSS2-24G
 Power Rating : DC 6V
 Test Mode : RX2426


	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBµV)	Emission Level (dBµV/m)	Limits (dBµV/m)	Margin (dB)	Remark
1	118.270	18.94	2.30	16.03	37.27	43.50	6.23	
2	222.060	21.90	3.30	6.44	31.64	46.00	14.36	
3	248.250	23.66	3.50	8.18	35.35	46.00	10.65	
4	378.230	17.19	4.60	6.22	28.01	46.00	17.99	
5	768.170	23.87	6.80	4.70	35.37	46.00	10.63	
6	795.330	24.03	6.90	6.56	37.48	46.00	8.52	
7	819.580	23.66	7.00	6.36	37.02	46.00	8.98	
8	845.770	25.35	7.10	5.56	38.01	46.00	7.99	
9	898.150	24.98	7.30	3.21	35.49	46.00	10.51	

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.



AUDIX TECHNOLOGY Corp. EMC Laboratory
 No.53-11, Tin-fu Tsun, Lin-kou Hsiang, Taipei
 County, Taiwan R.O.C. Post Code:24443
 Tel:+886-2-26092133 Fax:+886-2-26099303
 Email:ttemc@ttemc.com.tw

Data: 7 File: D:\C1M1009154\RX2425.EMI (8)

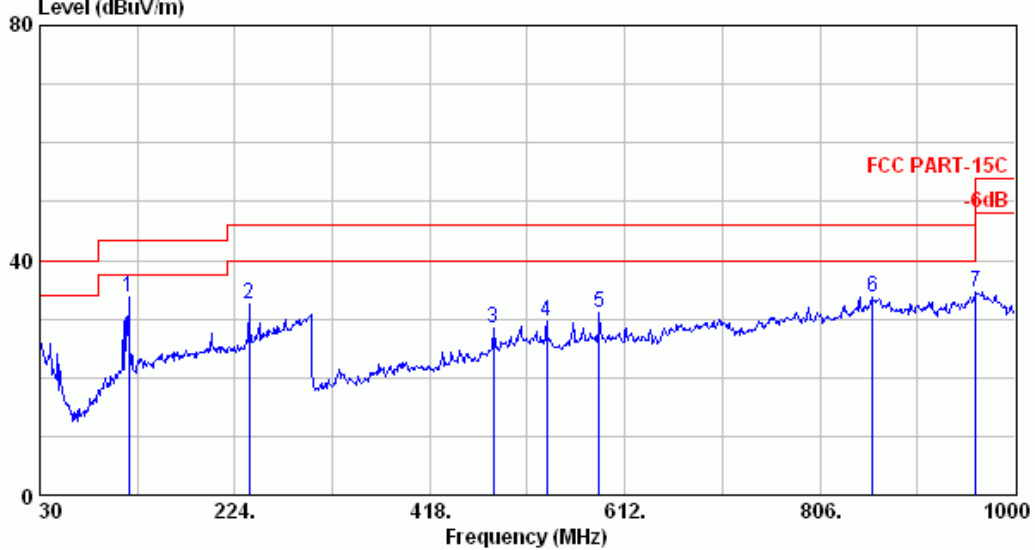

Site no. : A/C Chamber Data no. : 7
 Dis. / Ant. : 3m VBA6106A/UHALP9108A Ant. pol. : VERTICAL
 Limit : FCC PART-15C
 Env. / Ins. : 8564EC 27°C/59%
 EUT : FHSS2-24G
 Power Rating : DC 6V
 Test Mode : RX2426

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBµV)	Emission Level (dBµV/m)	Limits (dBµV/m)	Margin (dB)	Remark
1	118.270	18.94	2.30	12.51	33.75	43.50	9.75	
2	238.550	22.94	3.40	6.28	32.62	46.00	13.38	
3	481.050	18.74	6.10	3.52	28.36	46.00	17.64	
4	534.400	19.57	7.00	2.94	29.51	46.00	16.49	
5	586.780	21.01	6.30	3.63	30.93	46.00	15.07	
6	858.380	25.98	7.20	0.43	33.61	46.00	12.39	
7	961.200	26.50	7.60	0.55	34.65	54.00	19.35	

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

3.6.2. Above 1GHz Frequency Range Measurement Results

Date of Test : Oct. 07, 2010 Temperature : 27

EUT : Radio Control Humidity : 59%

Test Mode : Transmitting Mode,
Frequency: 2404MHz
Position: Stand

Emission Frequency MHz	Antenna Factor dB/m	Cable Loss dB μ V	Meter Reading Horizontal dB μ V/m	Emission Level Horizontal dB μ V/m	Limits dB	Margin
2330.560	28.03	6.26	18.60	52.89	74.00	21.11

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
2. The emission levels that are 20dB below the official limit are not reported.

3. All final readings of measurement were with Peak values.

Emission Frequency MHz	Antenna Factor dB/m	Cable Loss dB μ V	Meter Reading Horizontal dB μ V/m	Emission Level Horizontal dB μ V/m	Limits dB	Margin
2330.560	28.03	6.26	15.10	49.39	54.00	4.61

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
2. The emission levels that are 20dB below the official limit are not reported.

3. All final readings of measurement were with Average values.

Date of Test : Oct. 07, 2010 Temperature : 27

EUT : Radio Control Humidity : 59%

Test Mode : Transmitting Mode,
Frequency: 2404MHz
Position: Stand

Emission Frequency MHz	Antenna Factor dB/m	Cable Loss dB μ V	Meter Reading Vertical dB μ V/m	Emission Level Vertical dB μ V/m	Limits dB	Margin
2330.560	28.03	6.26	15.85	50.14	74.00	23.86

- Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.
 3. All final readings of measurement were with Peak values.

Emission Frequency MHz	Antenna Factor dB/m	Cable Loss dB μ V	Meter Reading Vertical dB μ V/m	Emission Level Vertical dB μ V/m	Limits dB	Margin
2330.560	28.03	6.26	12.14	46.43	54.00	7.57

- Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.
 3. All final readings of measurement were with Average values.

Date of Test : Oct. 07, 2010 Temperature : 27

EUT : Radio Control Humidity : 59%

Test Mode : Transmitting Mode,
Frequency: 2426MHz
Position: Stand

Emission Frequency MHz	Antenna Factor dB/m	Cable Loss dB μ V	Meter Reading Horizontal dB μ V/m	Emission Level Horizontal dB μ V/m	Limits dB	Margin
2342.320	28.04	6.28	16.09	50.42	74.00	23.58

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
2. The emission levels that are 20dB below the official limit are not reported.

3. All final readings of measurement were with Peak values.

Emission Frequency MHz	Antenna Factor dB/m	Cable Loss dB μ V	Meter Reading Horizontal dB μ V/m	Emission Level Horizontal dB μ V/m	Limits dB	Margin
2342.320	28.04	6.28	12.20	46.53	54.00	7.47

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
2. The emission levels that are 20dB below the official limit are not reported.

3. All final readings of measurement were with Average values.

Date of Test : Oct. 07, 2010 Temperature : 27

EUT : Radio Control Humidity : 59%

Test Mode : Transmitting Mode,
Frequency: 2426MHz
Position: Stand

Emission Frequency MHz	Antenna Factor dB/m	Cable Loss dB μ V	Meter Reading Vertical dB μ V/m	Emission Level Vertical dB μ V/m	Limits dB	Margin
2338.960	28.04	6.28	12.24	46.56	74.00	27.44

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
2. The emission levels that are 20dB below the official limit are not reported.

3. All final readings of measurement were with Peak values.

Emission Frequency MHz	Antenna Factor dB/m	Cable Loss dB μ V	Meter Reading Vertical dB μ V/m	Emission Level Vertical dB μ V/m	Limits dB	Margin
2338.960	28.04	6.28	8.02	42.35	54.00	11.65

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
2. The emission levels that are 20dB below the official limit are not reported.

3. All final readings of measurement were with Average values.

Date of Test : Oct. 07, 2010 Temperature : 27

EUT : Radio Control Humidity : 59%

Test Mode : Transmitting Mode,
Frequency: 2447MHz
Position: Stand

Emission Frequency MHz	Antenna Factor dB/m	Cable Loss dB μ V	Meter Reading Horizontal dB μ V/m	Emission Level Horizontal dB μ V/m	Limits dB	Margin
2296.960	27.99	6.23	15.17	49.40	74.00	24.60
2372.560	28.08	6.31	14.61	49.00	74.00	25.00

- Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.
 3. All final readings of measurement were with Peak values.

Emission Frequency MHz	Antenna Factor dB/m	Cable Loss dB μ V	Meter Reading Horizontal dB μ V/m	Emission Level Horizontal dB μ V/m	Limits dB	Margin
2296.960	27.99	6.23	11.53	45.76	54.00	8.24
2372.560	28.08	6.31	9.94	44.33	54.00	9.67

- Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.
 3. All final readings of measurement were with Average values.

Date of Test : Oct. 07, 2010 Temperature : 27

EUT : Radio Control Humidity : 59%

Test Mode : Transmitting Mode,
Frequency: 2447MHz
Position: Stand

Emission Frequency MHz	Antenna Factor dB/m	Cable Loss dB μ V	Meter Reading Vertical dB μ V/m	Emission Level Vertical dB μ V/m	Limits dB	Margin
2296.960	27.99	6.23	11.86	46.09	74.00	27.91
2372.560	28.08	6.31	10.87	45.26	74.00	28.74

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
2. The emission levels that are 20dB below the official limit are not reported.

3. All final readings of measurement were with Peak values.

Emission Frequency MHz	Antenna Factor dB/m	Cable Loss dB μ V	Meter Reading Vertical dB μ V/m	Emission Level Vertical dB μ V/m	Limits dB	Margin
2296.960	27.99	6.23	8.72	42.94	54.00	11.06
2372.560	28.08	6.31	7.89	42.28	54.00	11.72

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
2. The emission levels that are 20dB below the official limit are not reported.

3. All final readings of measurement were with Average values.

3.6.3. Restricted Bands Measurement Results

Date of Test : Oct. 07, 2010 Temperature : 27

EUT : Radio Control Humidity : 59%


Test Mode : Transmit, Channel: 01, Frequency: 2404.000MHz

	Emission Frequency MHz	Antenna Factor dB/m	Cable Loss dB	Meter Reading Horizontal dBμV	Emission Level Horizontal dBμV/m	Limits dBμV/m	Margin dB
Peak *	2326.170	28.03	6.26	25.85	60.14	74.00	13.86
Average *	2325.840	28.03	6.26	10.12	44.41	54.00	9.59

- Remark : 1. Emission Level = Antenna Factor + Cable Loss + Meter Reading.
 2. Low frequency section (spurious in the restricted band 2310-2420MHz).
 3. '*' The field strength of emission appearing within Part 15.205(a) shall not exceed the limits shown in section 15.209.



AUDIX TECHNOLOGY Corp. EMC Laboratory
 No.33-11, Tin-Fu Tsun, Lin-Kou Hsiang, Taipei
 County, Taiwan R.O.C. Post Code:24443
 Tel:+886-2-26092133 Fax:+886-2-26099303
 Email:ttmc@ttmc.com.tw

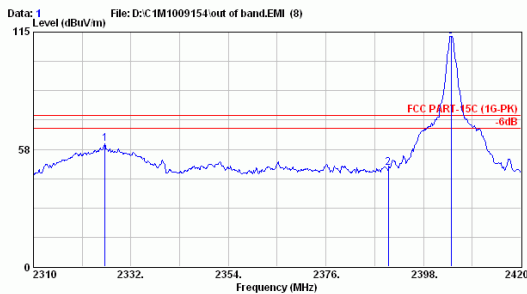


Site no. : A/C Chamber Data no. : 1
 Dis. / Ant. : 3m 3115 (3775) Ant. pol. : HORIZONTAL
 Limit : FCC PART-15C (1G-PK)
 Env. / Ins. : 8564EC 27°C/59% Jarwei Wang
 EUT : FHSS2-24G
 Power Rating : DC 6V
 Test Mode : TX2404

1	2326.170	28.03	6.26	25.85	60.14	74.00	13.86	Peak
2	2390.080	28.10	6.34	13.80	48.24	74.00	25.76	Peak
3	2404.270	28.11	6.36	78.44	112.92	74.00	-38.92	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.



AUDIX TECHNOLOGY Corp. EMC Laboratory
 No.33-11, Tin-Fu Tsun, Lin-Kou Hsiang, Taipei
 County, Taiwan R.O.C. Post Code:24443
 Tel:+886-2-26092133 Fax:+886-2-26099303
 Email:ttmc@ttmc.com.tw

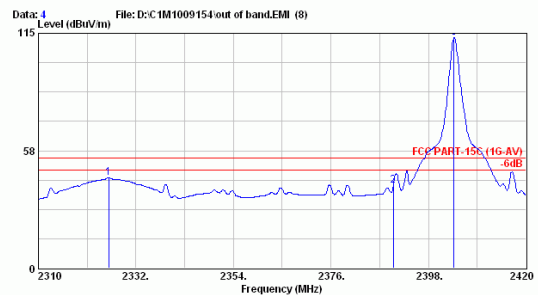

Site no. : A/C Chamber Data no. : 4
 Dis. / Ant. : 3m 3115 (3775) Ant. pol. : HORIZONTAL
 Limit : FCC PART-15C (1G-AV)
 Env. / Ins. : 8564EC 27°C/59% Jarwei Wang
 EUT : FHSS2-24G
 Power Rating : DC 6V
 Test Mode : TX2404

1	2325.840	28.03	6.26	10.12	44.41	54.00	9.59	Average
2	2390.080	28.10	6.34	5.92	40.36	54.00	13.64	Average
3	2403.720	28.11	6.36	78.37	112.84	54.00	-58.84	Average

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

Date of Test : Oct. 07, 2010 Temperature : 27

EUT : Radio Control Humidity : 59%


Test Mode : Transmit, Channel: 01, Frequency: 2404.000MHz

	Emission Frequency MHz	Antenna Factor dB/m	Cable Loss dB	Meter Reading Vertical dBμV	Emission Level Vertical dBμV/m	Limits dBμV/m	Margin dB
Peak *	2326.170	28.03	6.26	20.74	55.03	74.00	18.97
Average *	2325.840	28.03	6.26	8.90	43.19	54.00	10.81

- Remark : 1. Emission Level = Antenna Factor + Cable Loss + Meter Reading.
 2. Low frequency section (spurious in the restricted band 2310-2420MHz).
 3. '*' The field strength of emission appearing within Part 15.205(a) shall not exceed the limits shown in section 15.209.



AUDIX TECHNOLOGY Corp. EMC Laboratory
 No.53-11, Tin-Fu Tsun, Lin-Kou Hsiang, Taipei
 County, Taiwan.R.O.C. Post Code:24443
 Tel:+886-2-26092133 Fax:+886-2-26099303
 Email:temc@ttmc.com.tw

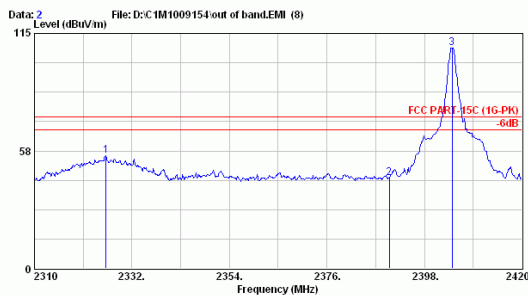


Site no. : A/C Chamber Data no. : 2
 Dis. / Ant. : 3m 3115 (3775) Ant. pol. : VERTICAL
 Limit : FCC PART-15C (1G-PK)
 Env. / Ins. : 8564EC 27°C/59% □Jarwei Wang
 EUT : FH882-24G
 Power Rating : DC 6V
 Test Mode : TX2404

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Remark
1	2326.170	28.03	6.26	20.74	55.03	74.00	18.97	Peak
2	2390.080	28.10	6.34	10.00	44.44	74.00	-29.56	Peak
3	2404.270	28.11	6.36	73.55	108.03	74.00	-34.03	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.



AUDIX TECHNOLOGY Corp. EMC Laboratory
 No.53-11, Tin-Fu Tsun, Lin-Kou Hsiang, Taipei
 County, Taiwan.R.O.C. Post Code:24443
 Tel:+886-2-26092133 Fax:+886-2-26099303
 Email:temc@ttmc.com.tw

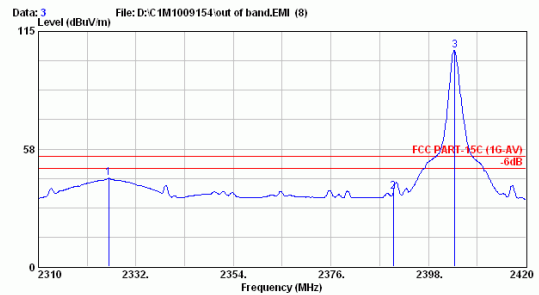

Site no. : A/C Chamber Data no. : 3
 Dis. / Ant. : 3m 3115 (3775) Ant. pol. : VERTICAL
 Limit : FCC PART-15C (1G-AV)
 Env. / Ins. : 8564EC 27°C/59% □Jarwei Wang
 EUT : FH882-24G
 Power Rating : DC 6V
 Test Mode : TX2404

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Remark
1	2325.840	28.03	6.26	8.90	43.19	54.00	10.81	Average
2	2390.080	28.10	6.34	2.02	36.46	54.00	17.54	Average
3	2403.940	28.11	6.36	71.16	105.63	54.00	-51.63	Average

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

Date of Test : Oct. 07, 2010 Temperature : 27

EUT : Radio Control Humidity : 59%


Test Mode : Transmit, Channel: 30, Frequency: 2447.500MHz

	Emission Frequency MHz	Antenna Factor dB/m	Cable Loss dB	Meter Reading Horizontal dBμV	Emission Level Horizontal dBμV/m	Limits dBμV/m	Margin dB
Peak *	2483.600	28.18	6.45	8.88	43.51	74.00	30.49
Average *	2486.400	28.18	6.45	3.30	37.93	54.00	16.07

- Remark : 1. Emission Level = Antenna Factor + Cable Loss + Meter Reading.
 2. High frequency section (spurious in the restricted band 2430-2530MHz).
 3. '*' The field strength of emission appearing within Part 15.205(a) shall not exceed the limits shown in section 15.209.



AUDIX TECHNOLOGY Corp. EMC Laboratory
 No.53-11, Tin-Fu Tsun, Lin-Kou Hsiang, Taipei County, Taiwan R.O.C. Post Code 24443
 Tel:+886-2-26092133 Fax:+886-2-26099303
 Email:ttmc@ttmc.com.tw

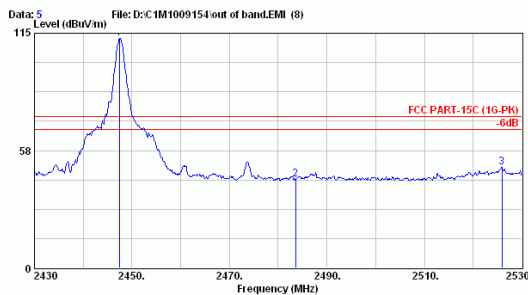


Site no. : A/C Chamber Data no. : 5
 Dis. / Ant. : 3m 3115 (3775) Ant. pol. : HORIZONTAL
 Limit : FCC PART-15C (1G-PK)
 Env. / Ins. : 8564EC 27°C/59% □Jarwei Wang
 EUT : FHSS2-24G
 Power Rating : DC 6V
 Test Mode : TX2447.5

Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Remark
1 2447.400	28.15	6.41	78.07	112.63	74.00	-38.63	Peak
2 2483.600	28.18	6.45	8.88	43.52	74.00	30.48	Peak
3 2525.900	28.33	6.50	14.67	49.50	74.00	24.50	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.



AUDIX TECHNOLOGY Corp. EMC Laboratory
 No.53-11, Tin-Fu Tsun, Lin-Kou Hsiang, Taipei County, Taiwan R.O.C. Post Code 24443
 Tel:+886-2-26092133 Fax:+886-2-26099303
 Email:ttmc@ttmc.com.tw

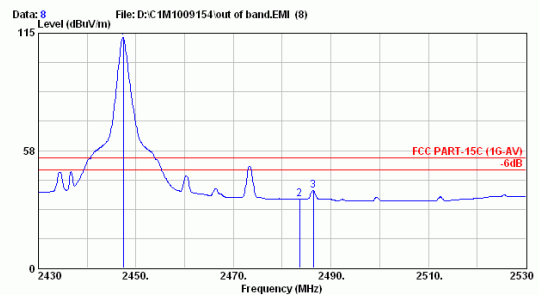

Site no. : A/C Chamber Data no. : 8
 Dis. / Ant. : 3m 3115 (3775) Ant. pol. : HORIZONTAL
 Limit : FCC PART-15C (1G-AV)
 Env. / Ins. : 8564EC 27°C/59% □Jarwei Wang
 EUT : FHSS2-24G
 Power Rating : DC 6V
 Test Mode : TX2447.5

Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Remark
1 2447.400	28.15	6.41	78.19	112.75	54.00	-58.75	Average
2 2483.600	28.18	6.45	-0.82	33.81	54.00	20.19	Average
3 2486.400	28.18	6.45	3.30	37.94	54.00	16.06	Average

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

Date of Test : Oct. 07, 2010 Temperature : 27

EUT : Radio Control Humidity : 59%


Test Mode : Transmit, Channel: 30, Frequency: 2447.500MHz

	Emission Frequency MHz	Antenna Factor dB/m	Cable Loss dB	Meter Reading Vertical dBμV	Emission Level Vertical dBμV/m	Limits dBμV/m	Margin dB
Peak *	2483.600	28.18	6.45	9.42	44.05	74.00	29.95
Average *	2486.400	28.18	6.45	7.70	42.33	54.00	11.67

- Remark : 1. Emission Level = Antenna Factor + Cable Loss + Meter Reading.
 2. High frequency section (spurious in the restricted band 2430-2830MHz).
 3. '*' The field strength of emission appearing within Part 15.205(a) shall not exceed the limits shown in section 15.209.



AUDIX TECHNOLOGY Corp. EMC Laboratory
 No.53-11, Tin-fu Tsun, Lin-kou Hsiang, Taipei County, Taiwan R.O.C. Post Code 24443
 Tel:+886-2-26092133 Fax:+886-2-26099303
 Email:ttmc@ttmc.com.tw

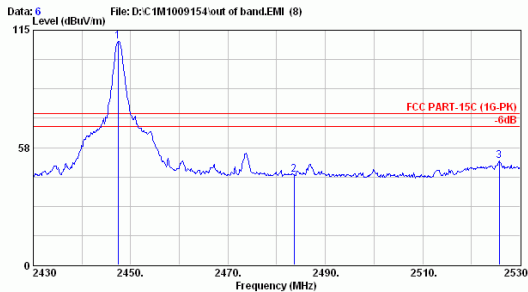


Site no. : A/C Chamber Data no. : 6
 Dis. / Ant. : 3m 3115 (3775) Ant. pol. : VERTICAL
 Limit : FCC PART-15C (1G-PK)
 Env. / Ins. : 8564EC 27°C/59% □Jarwei Wang
 EUT : FHSS2-24G
 Power Rating : DC 6V
 Test Mode : TX2447.5

Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Remark
1 2447.400	28.15	6.41	75.16	109.72	74.00	-35.72	Peak
2 2483.600	28.18	6.45	9.42	44.05	74.00	29.95	Peak
3 2525.700	28.33	6.50	16.27	51.10	74.00	22.90	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.



AUDIX TECHNOLOGY Corp. EMC Laboratory
 No.53-11, Tin-fu Tsun, Lin-kou Hsiang, Taipei County, Taiwan R.O.C. Post Code 24443
 Tel:+886-2-26092133 Fax:+886-2-26099303
 Email:ttmc@ttmc.com.tw

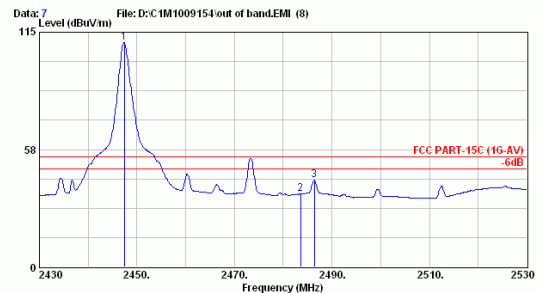

Site no. : A/C Chamber Data no. : 7
 Dis. / Ant. : 3m 3115 (3775) Ant. pol. : VERTICAL
 Limit : FCC PART-15C (1G-AV)
 Env. / Ins. : 8564EC 27°C/59% □Jarwei Wang
 EUT : FHSS2-24G
 Power Rating : DC 6V
 Test Mode : TX2447.5

Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Remark
1 2447.400	28.15	6.41	75.26	109.82	54.00	-55.82	Average
2 2483.600	28.18	6.45	1.05	35.69	54.00	18.31	Average
3 2486.400	28.18	6.45	7.70	42.34	54.00	11.66	Average

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.


4. 20dB BANDWIDTH MEASUREMENT

4.1. Test Equipment

The following test equipment was used during the 20dB bandwidth measurement:

Item	Type	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
1.	Spectrum Analyzer	Agilent	E4446A	US44300366	Aug. 04, 10'	Aug. 03, 11'

4.2. Block Diagram of Test Setup

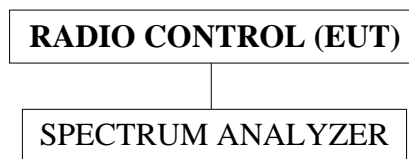

4.3. Specification Limits (§15.247(a)(1))

Alternatively, frequency hopping systems operating in the 2400-2483.5MHz band may have hopping channel carrier frequencies that are separated by 25kHz or two-thirds of the 20dB bandwidth of the hopping channel, whichever is greater.

4.4. Operating Condition of EUT

- 4.4.1. Set up the EUT and simulator as shown on 4.2.
- 4.4.2. To turn on the power of all equipment.
- 4.4.3. EUT (Radio Control) was on transmitting frequency function during the testing.

4.5. Test Procedure (DA 00-705)

The transmitter output was connected to the spectrum analyzer. The bandwidth of the fundamental frequency was measure by spectrum analyzer with 2.7kHz RBW and 2.7kHz VBW. The 20dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 20dB.

RBW=1% of the 20dB bandwidth

VBW=RBW

4.6. Test Results


PASSED. All the test results are attached in next pages.

Test Date : Oct. 08, 2010 Temperature :23 Humidity : 51%


No.	Channel	Test Frequency	20dB Bandwidth	2/3 (20dB Bandwidth)
1.	01	2404.000MHz	280kHz	186.67kHz
2.	16	2426.500MHz	280kHz	186.67kHz
3.	30	2447.500MHz	285kHz	190.00kHz

The maximum two-thirds of the 20dB bandwidth shall be at maximum 190.00kHz.


4.6.1. Channel 01, Frequency: 2404.000MHz

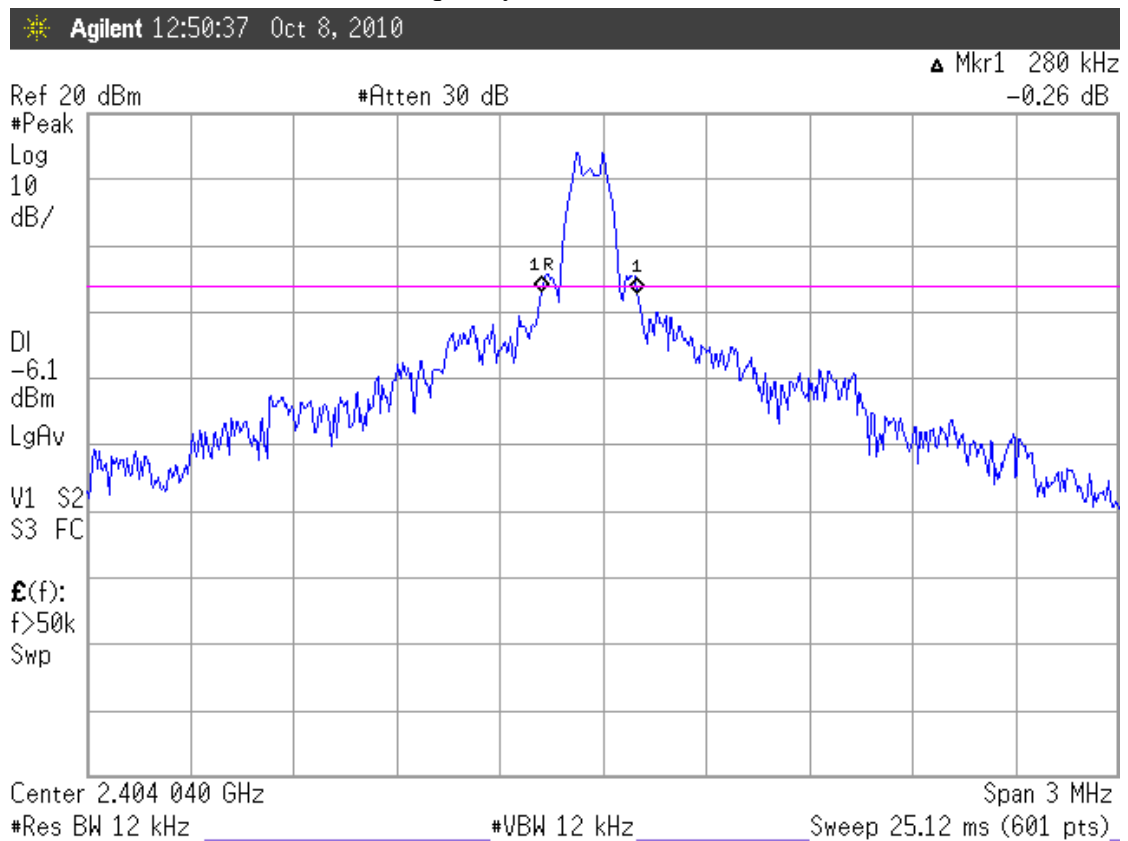

4.6.2. Channel 16, Frequency: 2426.500MHz

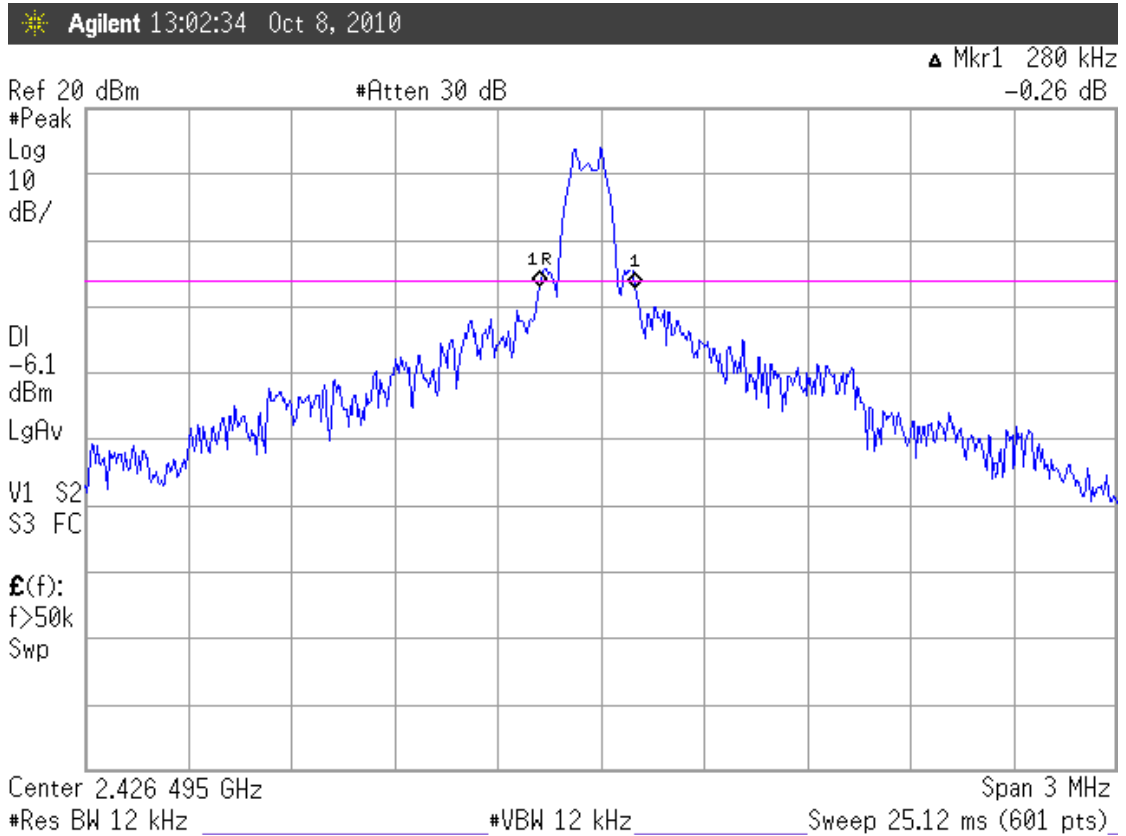

4.6.3. Channel 30, Frequency: 2447.500MHz

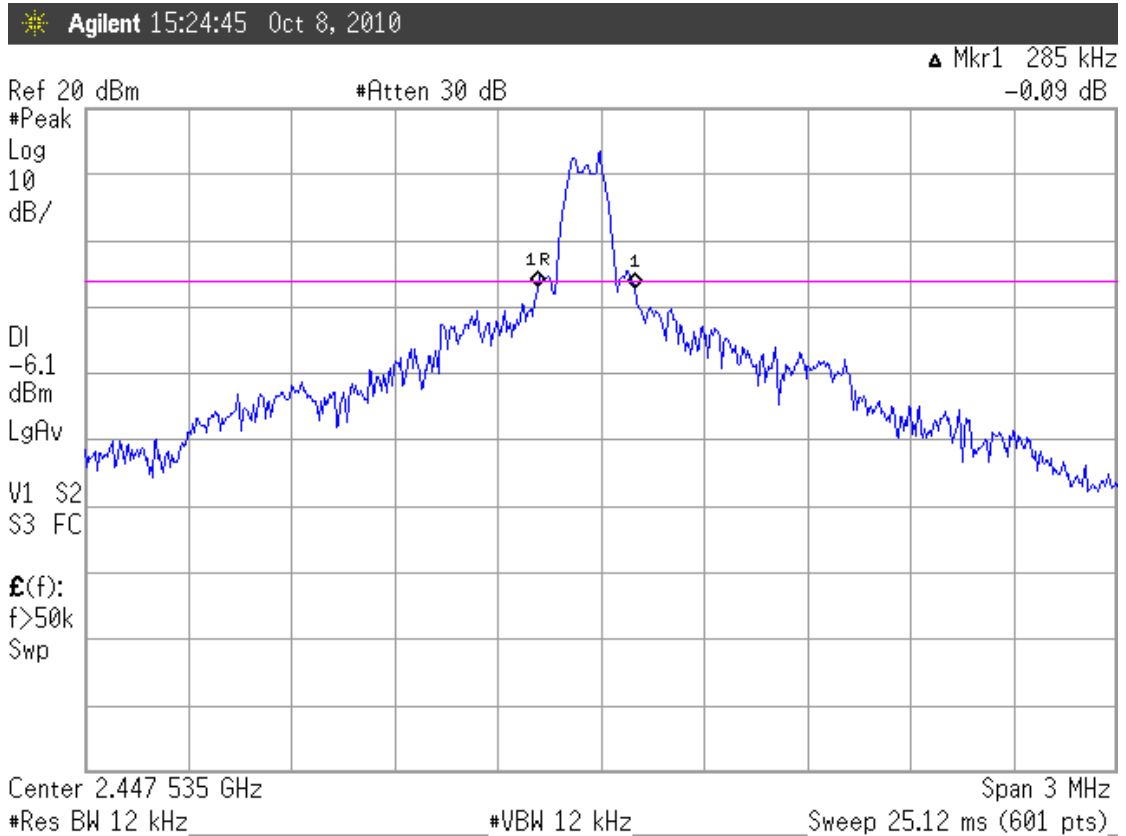

5. CARRIER FREQUENCY SEPARATION MEASUREMENT

5.1. Test Equipment

The following test equipment was used during the carrier frequency separation measurement:

Item	Type	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
1.	Spectrum Analyzer	Agilent	E4446A	US44300366	Aug. 04, 10'	Aug. 03, 11'

5.2. Block Diagram of Test Setup

The same as section.4.2.

5.3. Specification Limits (§15.247(a)(1))

Alternatively, frequency hopping systems operating in the 2400-2483.5MHz band may have hopping channel carrier frequencies that are separated by 25kHz or two-thirds of the 20dB bandwidth of the hopping channel, whichever is greater.

5.4. Operating Condition of EUT

Same as carrier frequency separation measurement which was listed in section 4.4.

5.5. Test Procedure (DA 00-705)

The transmitter output was connected to the spectrum analyzer. The channel separation was measure by spectrum analyzer with 39kHz RBW and 39kHz VBW. The video bandwidth not to be smaller than resolution bandwidth, the peak was mark on adjacent bandwidth, the between of peak is carrier frequency separation.

RBW=1% Span

VBW=RBW

5.6. Test Results


PASSED. All the test results are attached in next pages.

Test Date : Oct. 08, 2010 Temperature :23 Humidity : 51%


The minimum adjacent channel carrier frequency separation: 1.508MHz.


[Above values have met the requirement as specified in section 4.3: frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater.]

5.6.1. Channel 01, Test Frequency: 2404.000MHz

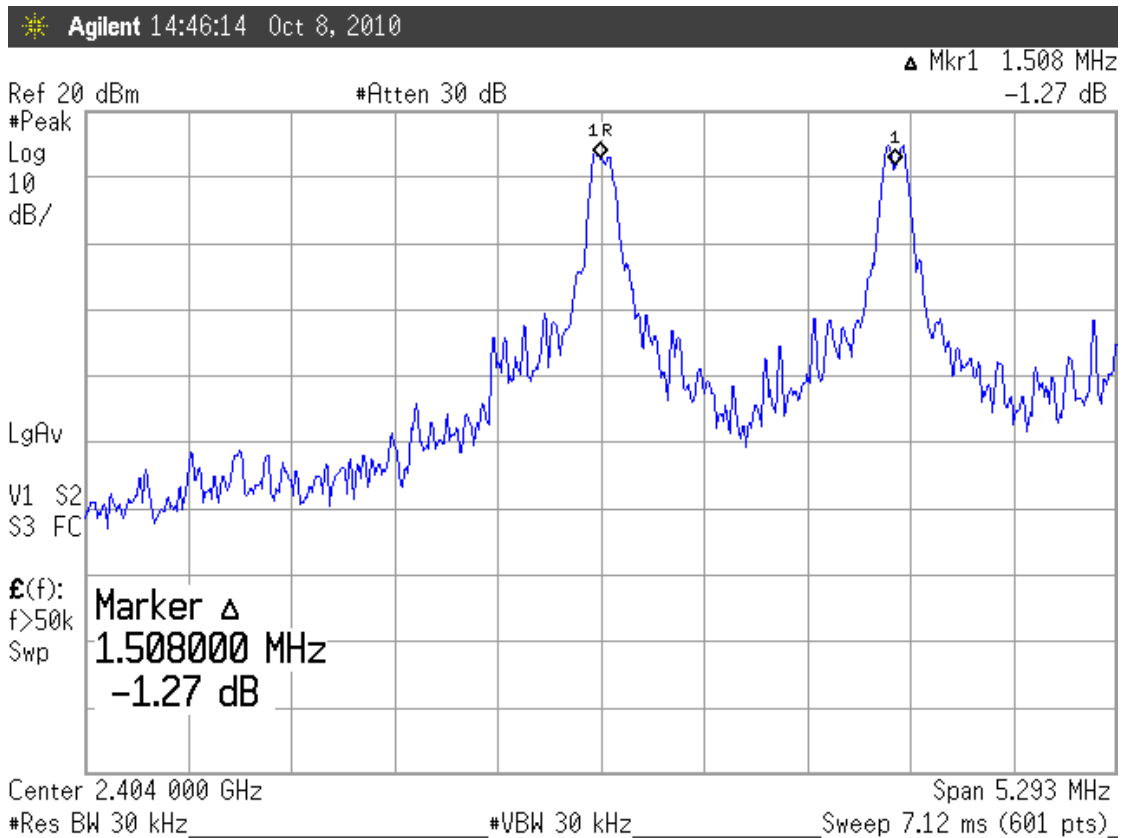


5.6.2. Channel 16, Test Frequency: 2426.500MHz

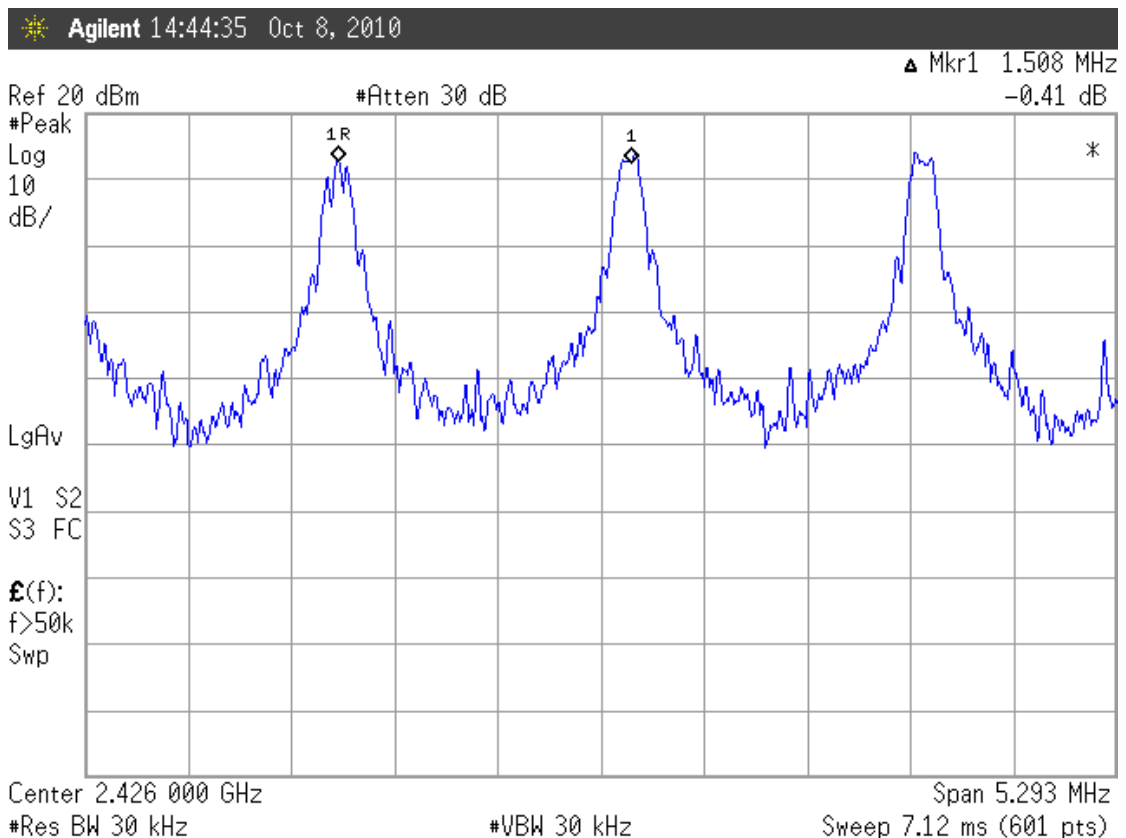

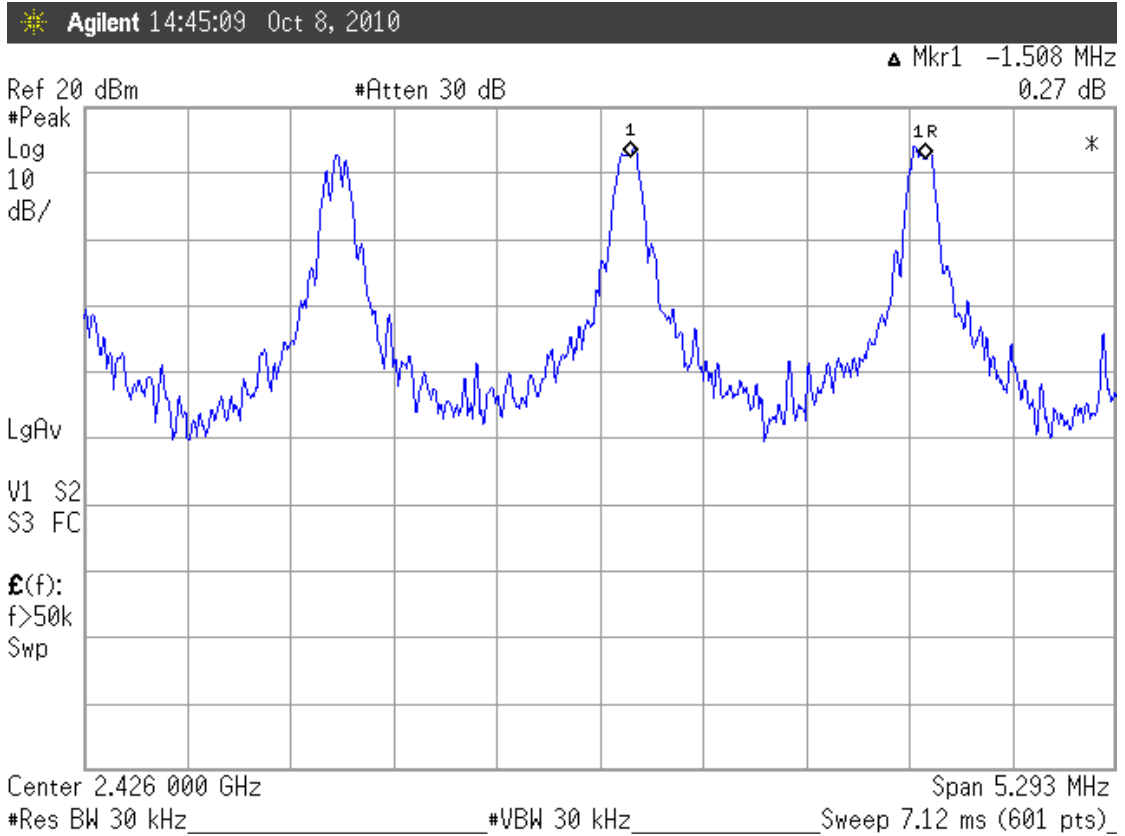

5.6.3. Channel 30, Test Frequency: 2447.500MHz

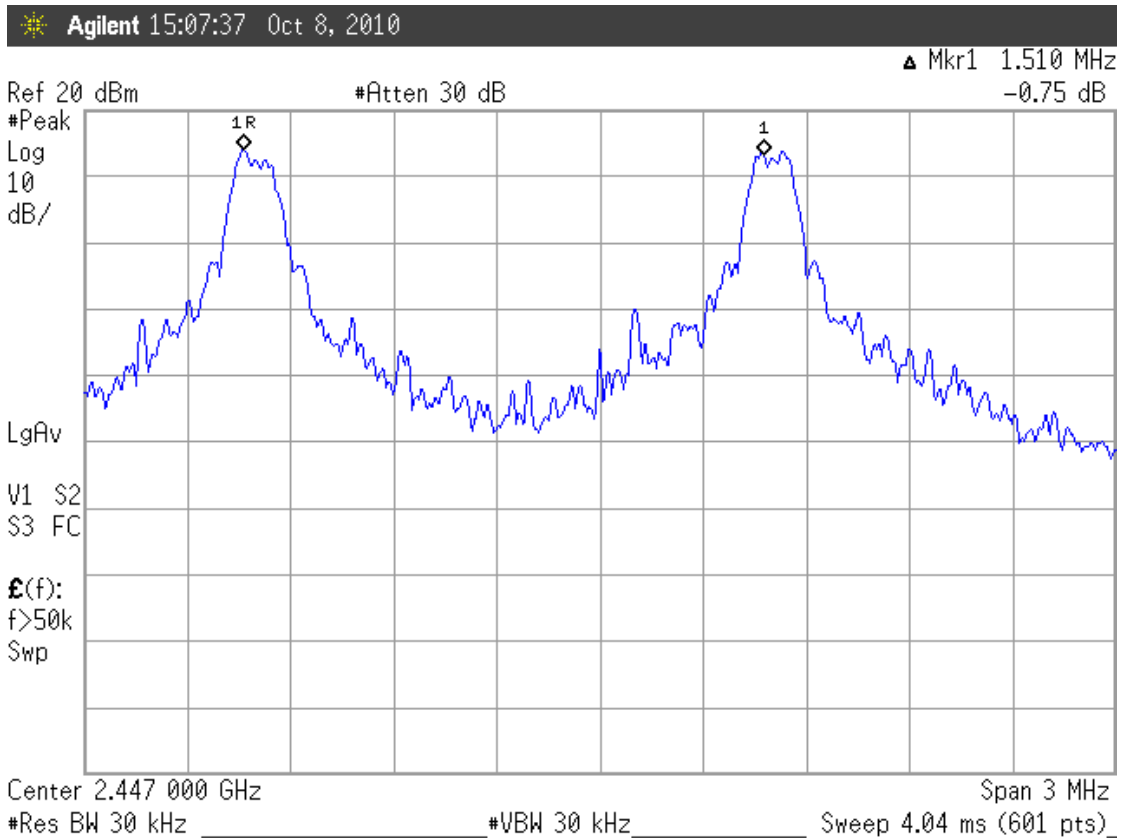

6. TIME OF OCCUPANCY MEASUREMENT

6.1. Test Equipment

The following test equipment was used during the time of occupancy measurement:

Item	Type	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
1.	Spectrum Analyzer	Agilent	E4446A	US44300366	Aug. 04, 10'	Aug. 03, 11'

6.2. Block Diagram of Test Setup

The same as section.4.2.

6.3. Specification Limits (§15.247(a)(1)(iii))

Frequency hopping systems in the 2400-2483.5MHz shall use at least 15 non-overlapping channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by number of hopping channels employed.

6.4. Operating Condition of EUT

Same as carrier frequency separation measurement which was listed in section 4.4.

6.5. Test Procedure (DA 00-705)

The transmitter output was connected to the spectrum analyzer. The bandwidth of the fundamental frequency was measure by spectrum analyzer with 1MHz RBW and 1MHz VBW. $VBW \geq RBW$; Span=zero span.

Centered on a hopping channel sweep=as necessary to capture the entire dwell time per hopping channel ; Detector function=peak ; Trace=Max hold

6.6. Test Results

PASSED. All the test results are attached in next pages.

Test Date : Oct. 08, 2010 Temperature :23 Humidity : 51%



Duty cycle: 30 channels*0.4 seconds = 12 seconds

Test Frequency: 2404.000MHz

For per second of 5 channels appearance, the longest time of occupancy for each of 12 seconds is:

5 channels*12 seconds* 5.967ms = 358.02ms (<400ms)

6.6.1. Channel 01, Test Frequency: 2404.000MHz

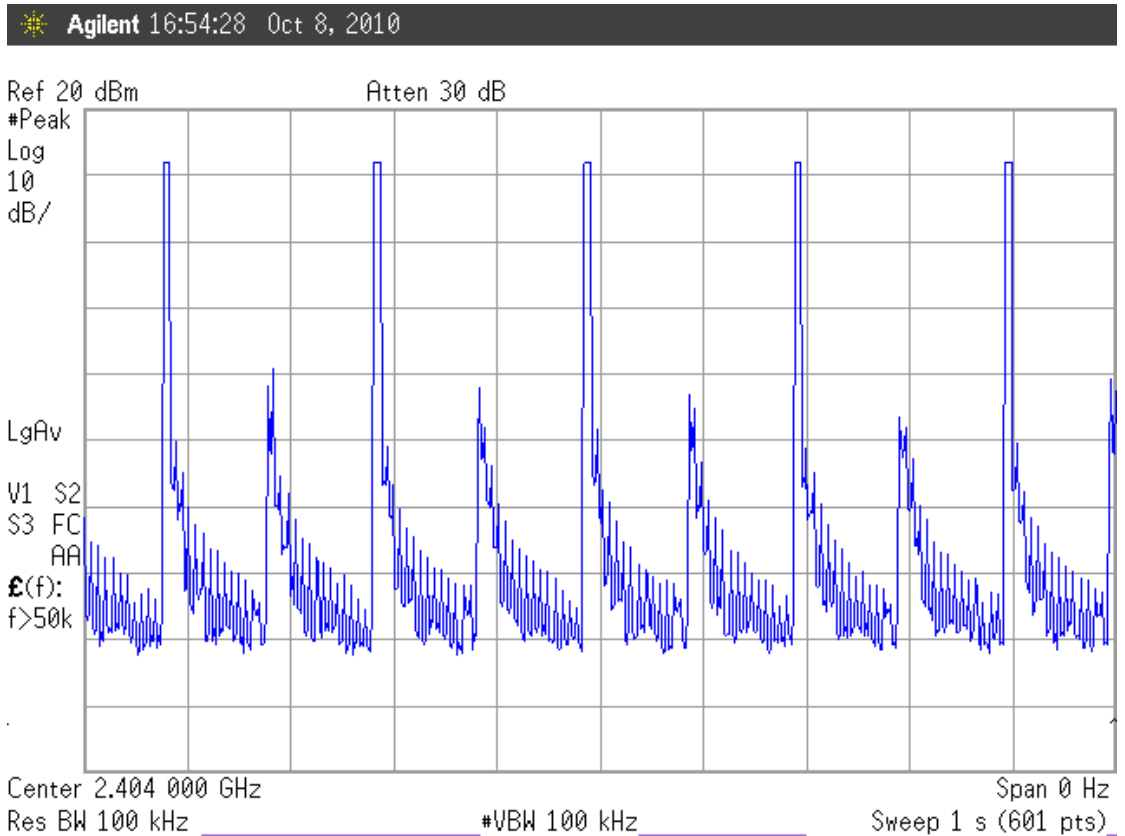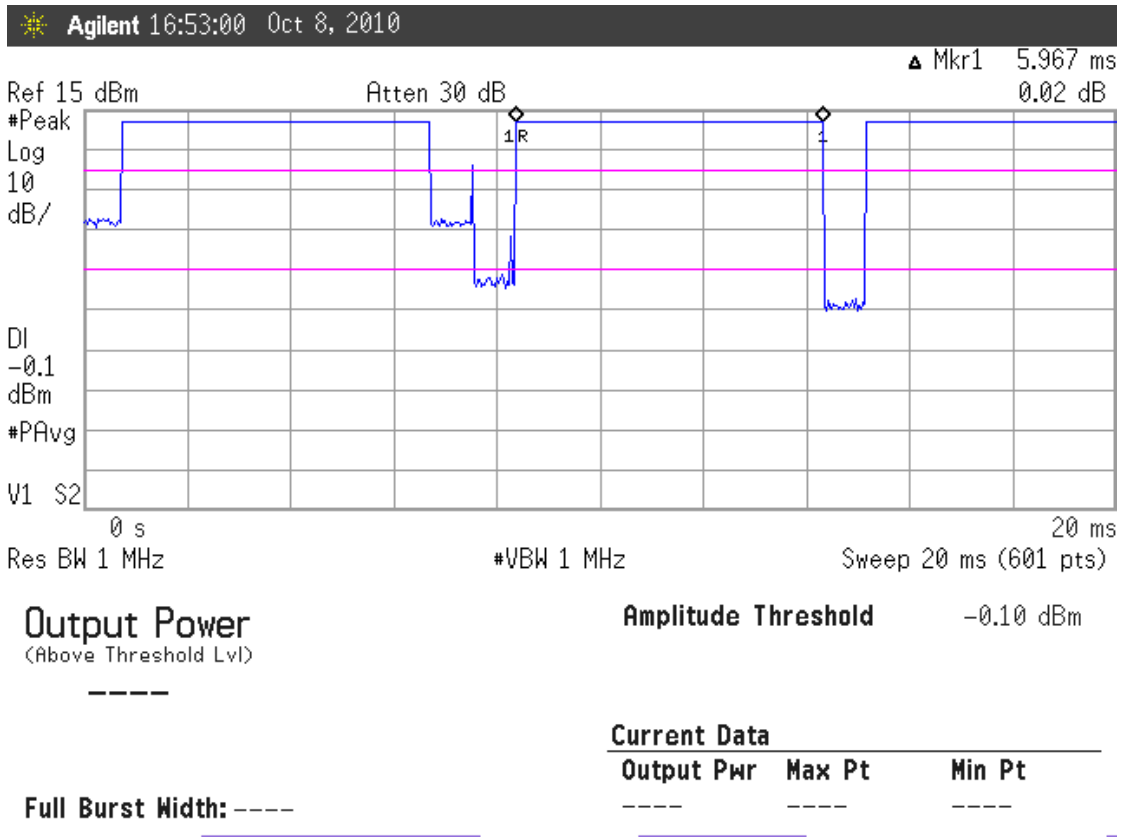

7. NUMBER OF HOPPING CHANNELS MEASUREMENT

7.1. Test Equipment

The following test equipment was used during the number of hopping channels measurement:

Item	Type	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
1.	Spectrum Analyzer	Agilent	E4446A	US44300366	Aug. 04, 10'	Aug. 03, 11'

7.2. Block Diagram of Test Setup

The same as section.4.2.

7.3. Specification Limits (§15.247(a)(1)(iii))

Frequency hopping systems which use fewer than 20 hopping frequencies may employ intelligent hopping techniques to avoid interference to other transmissions. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 non-overlapping channels.

7.4. Operating Condition of EUT

Same as carrier frequency separation measurement which was listed in section 4.4.

7.5. Test Procedure (DA 00-705)


The transmitter output was connected to the spectrum analyzer. The bandwidth of the fundamental frequency was measure by spectrum analyzer with 100kHz RBW and 100kHz VBW. Sweep=Auto ; Detector function=peak ; Trace=Max hold

7.6. Test Results

PASSED. All the test results are attached in next page.

Test Date : Oct. 08, 2010 Temperature :23 Humidity : 51%

The number hopping channel is 30.

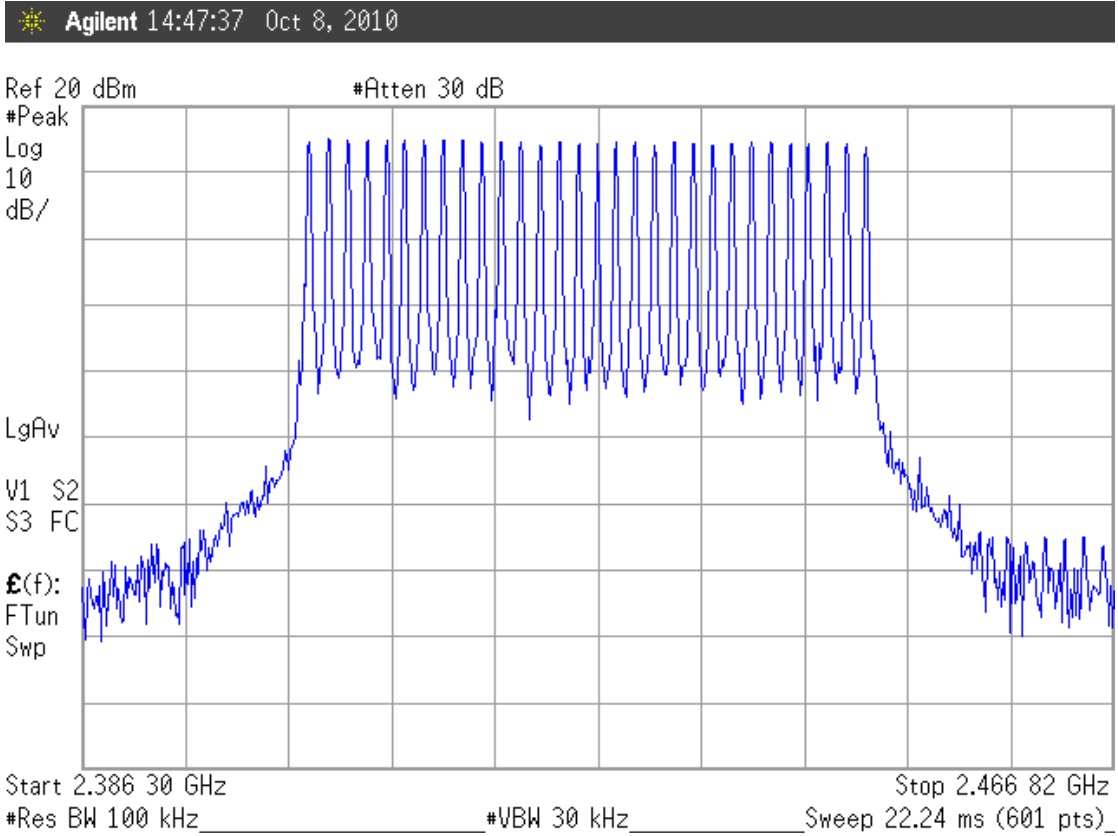


8. MAXIMUM PEAK OUTPUT POWER MEASUREMENT

8.1. Test Equipment

The following test equipment was used during the maximum peak output power measurement:

Item	Type	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
1.	Power Meter	Anritsu	ML2487A	6K00005406	Feb. 11, 10'	Feb. 10, 11'
2.	Power Sensor	Anritsu	MA2491A	030873	Feb. 11, 10'	Feb. 10, 11'

8.2. Block Diagram of Test Setup

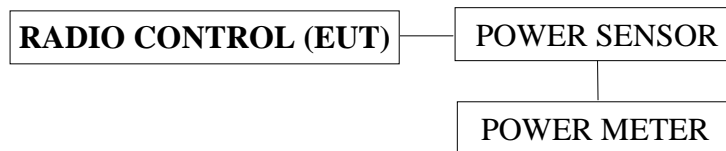

8.3. Specification Limits (§15.247(b)-(1))

The Limits of maximum Peak Output Power for frequency hopping systems in 2400-2483.5MHz is: 0.125Watt. (21dBm)

8.4. Operating Condition of EUT

Same as carrier frequency separation measurement which was listed in 4.4 except the test set up replaced by section 8.2.

8.5. Test Procedure (DA 00-705)

The transmitter output was connected to the power sensor and record the reading of power meter.

8.6. Test Results

PASSED. All the test results are listed below.

Test Date : Oct. 07, 2010 Temperature :27 Humidity : 66%

No.	Channel	Test Frequency	Peak Output Power	Limit
1.	01	2404.000MHz	15.25dBm	21dBm
2.	16	2426.500MHz	14.92dBm	21dBm
3.	30	2447.500MHz	14.72dBm	21dBm

9. EMISSION LIMITATIONS MEASUREMENT

9.1. Test Equipment

The following test equipment was used during the emission limitations measurement:

Item	Type	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
1.	Spectrum Analyzer	Agilent	E4446A	US44300366	Aug. 04, 10'	Aug. 03, 11'

9.2. Block Diagram of Test Setup

The same as section.4.2.

9.3. Specification Limits (§15.247(c))

In any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (See Section 15.205(c)).(This test result attaching to §3.6.3)

9.4. Operating Condition of EUT

Same as carrier frequency separation measurement which was listed in section 4.4.

9.5. Test Procedure (DA 00-705)

The transmitter output was connected to the spectrum analyzer. Set both RBW and VBW of spectrum analyzer to 100kHz with frequency range from 30MHz to 25GHz.

9.6. Test Results


PASSED. All the test results are attached in next pages.

Test Date : Oct. 07, 2010 Temperature :27 Humidity : 66%


1. 2404.000MHz: During 30MHz~25GHz bandwidth. In the 650MHz, the -55.04dBm is max value that is lower than 20dB of primary channel.
2. 2426.500MHz: During 30MHz~25GHz bandwidth. In the 650MHz, the -55.16dBm is max value that is lower than 20dB of primary channel.
3. 2447.500MHz: During 30MHz~25GHz bandwidth. In the 150MHz, the -52.56dBm is max value that is lower than 20dB of primary channel.

Note: The peak above the limit line is the carrier frequency.


9.6.1. Channel 01, Frequency: 2404.000MHz

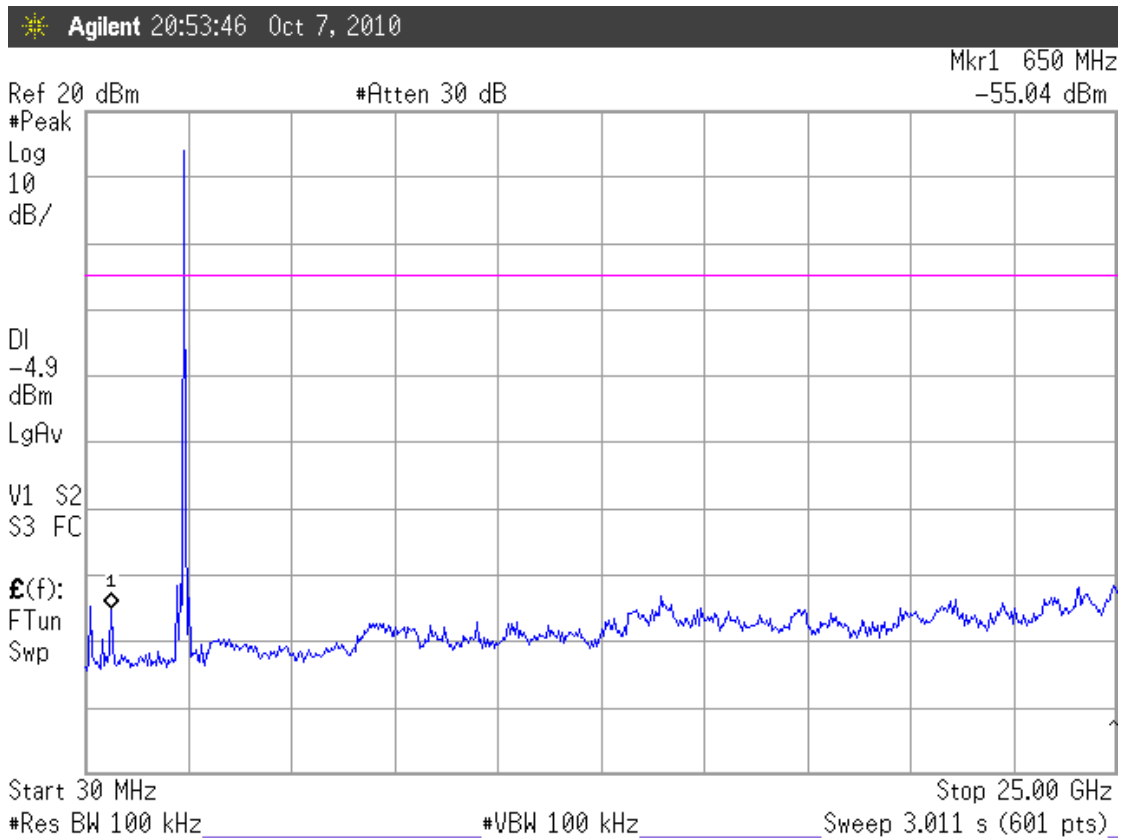

9.6.2. Channel 16, Frequency: 2426.500MHz

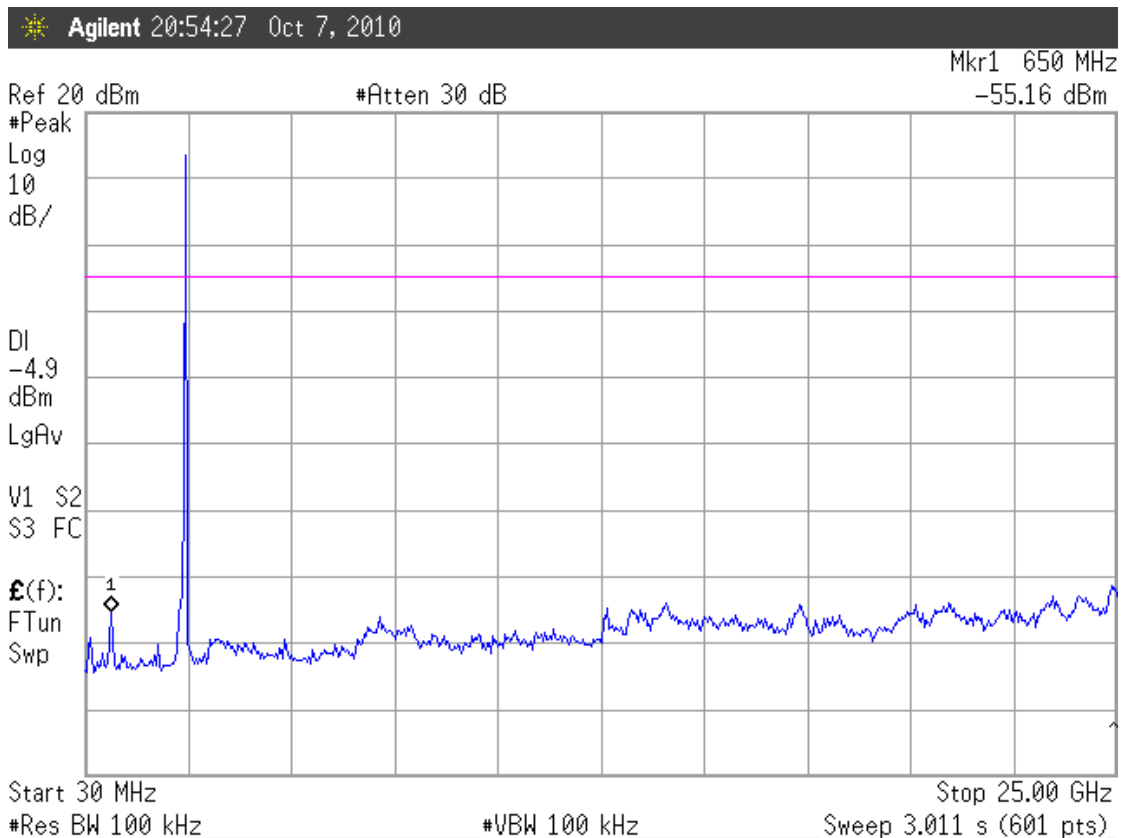

9.6.3. Channel 30, Frequency: 2447.500MHz

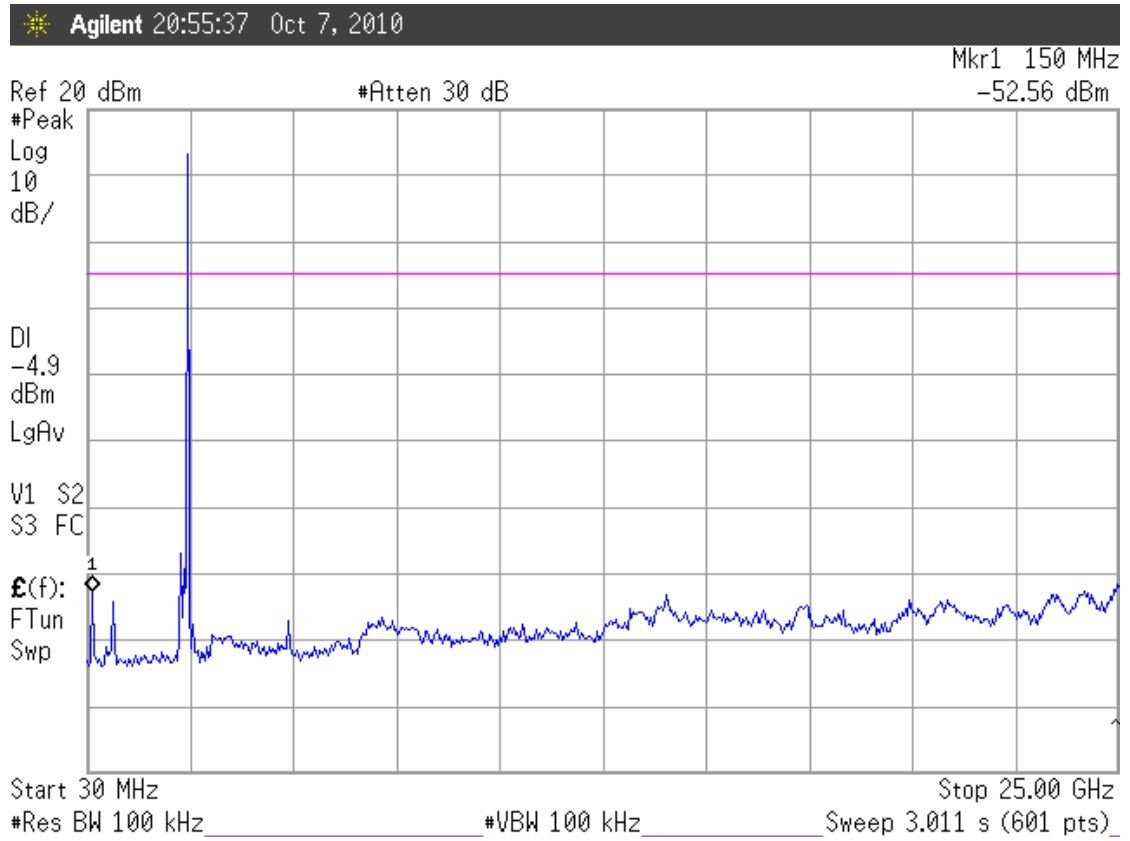

10. BAND EDGES MEASUREMENT

10.1. Test Equipment

The following test equipment was used during the band edges measurement:

Item	Type	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
1.	Spectrum Analyzer	Agilent	E4446A	US44300366	Aug. 04, 10'	Aug. 03, 11'

10.2. Block Diagram of Test Setup

The same as section.4.2.

10.3. Specification Limits (§15.247(c))

In any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (See Section 15.205(c)). (This test result attaching to §3.6.3)

10.4. Operating Condition of EUT

Same as carrier frequency separation measurement which was listed in section 4.4.

10.5. Test Procedure (DA 00-705)

The transmitter output was connected to the spectrum analyzer. Set both RBW and VBW of spectrum analyzer to 100kHz with suitable frequency span including 100kHz bandwidth from band edge.

10.6. Test Results

PASSED. The testing data was attached in the next pages.

Hopping Off

Test Date : Oct. 08, 2010 Temperature :23 Humidity : 51%

1. Below Band edge : The highest emission level is -35.98dBm on 2.400001GHz.
2. Upper Band edge: The highest emission level is -59.38dBm on 2.48359GHz.


Hopping On

Test Date : Oct. 20, 2010 Temperature :24 Humidity : 50%


3. Below Band edge: The highest emission level is -44.40dBm on 2.38988GHz.
4. Upper Band edge: The highest emission level is -50.79dBm on 2.48364GHz.

Hopping Off

10.6.1. Below Band edge

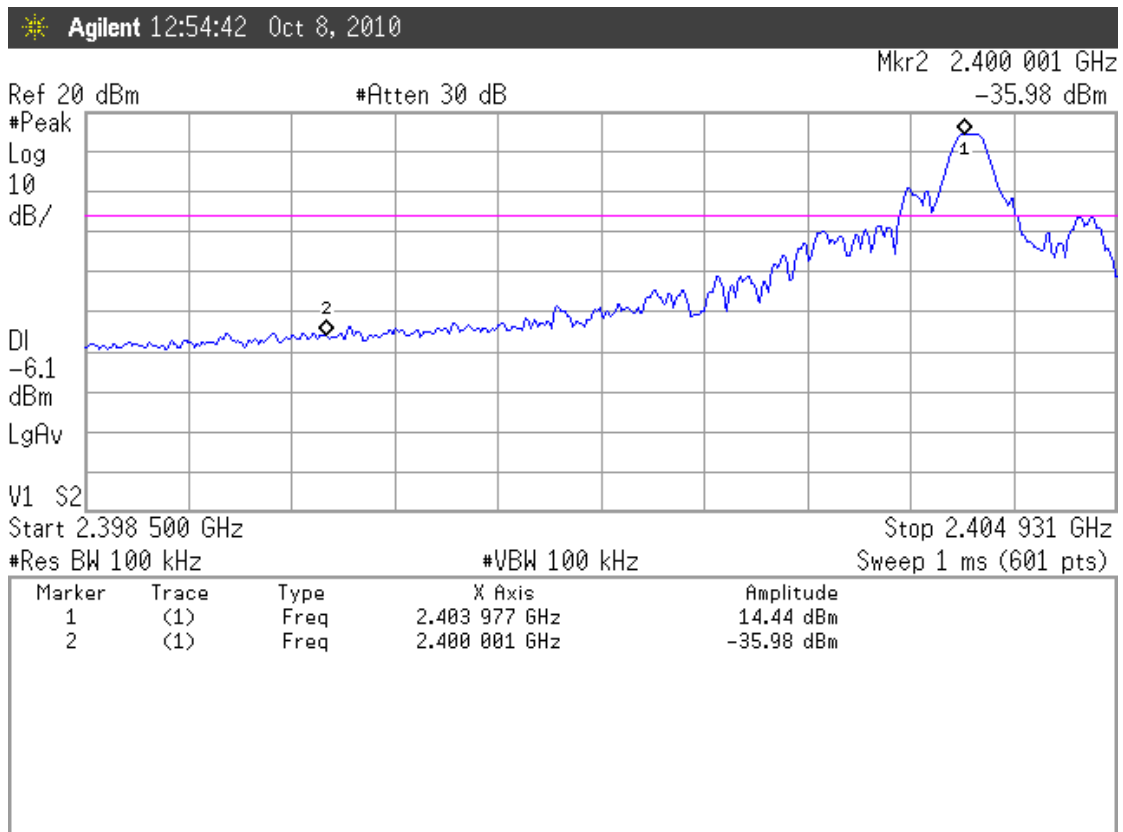


10.6.2. Upper Band edge

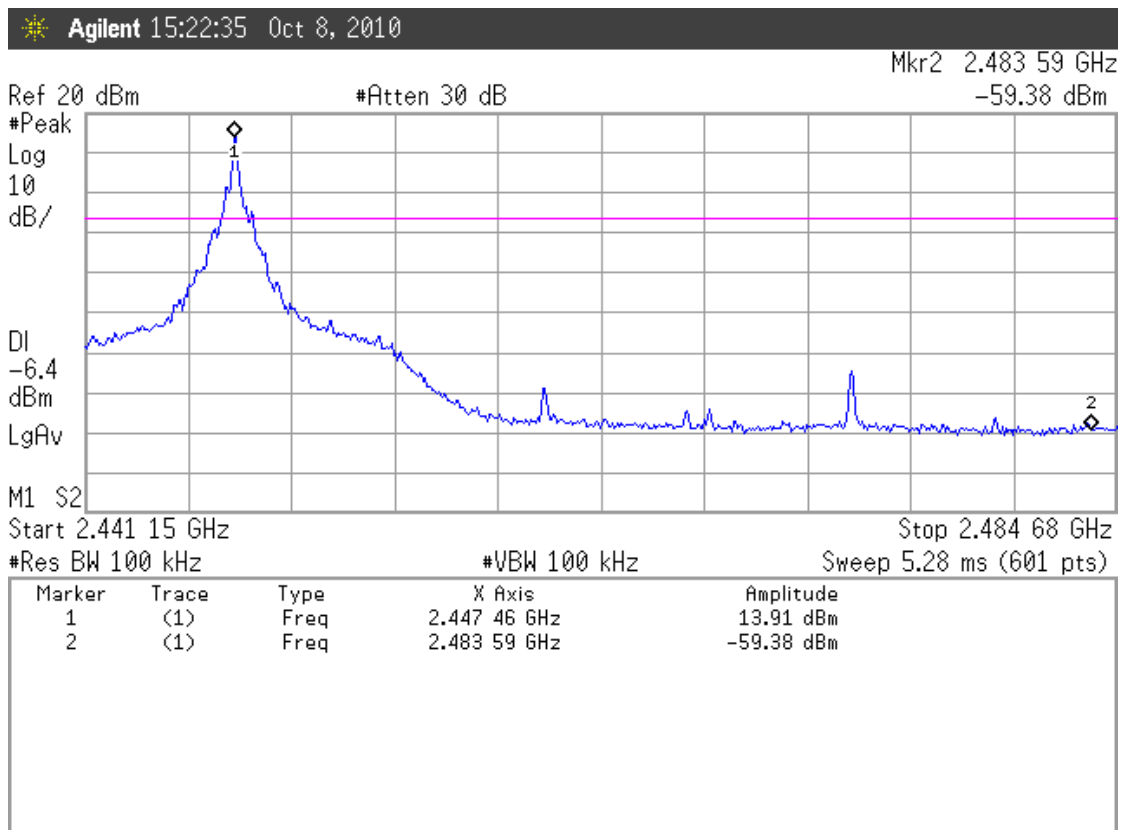


Hopping On

10.6.3. Below Band edge

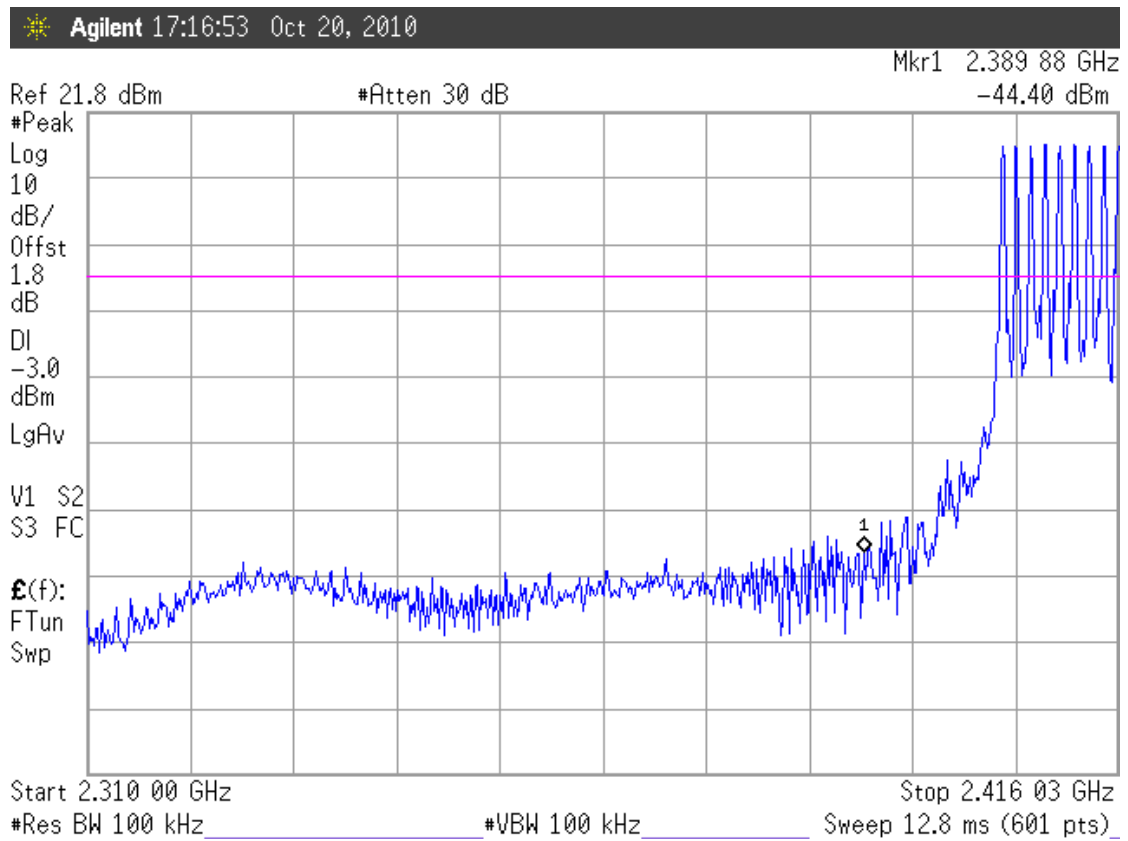

10.6.4. Upper Band edge

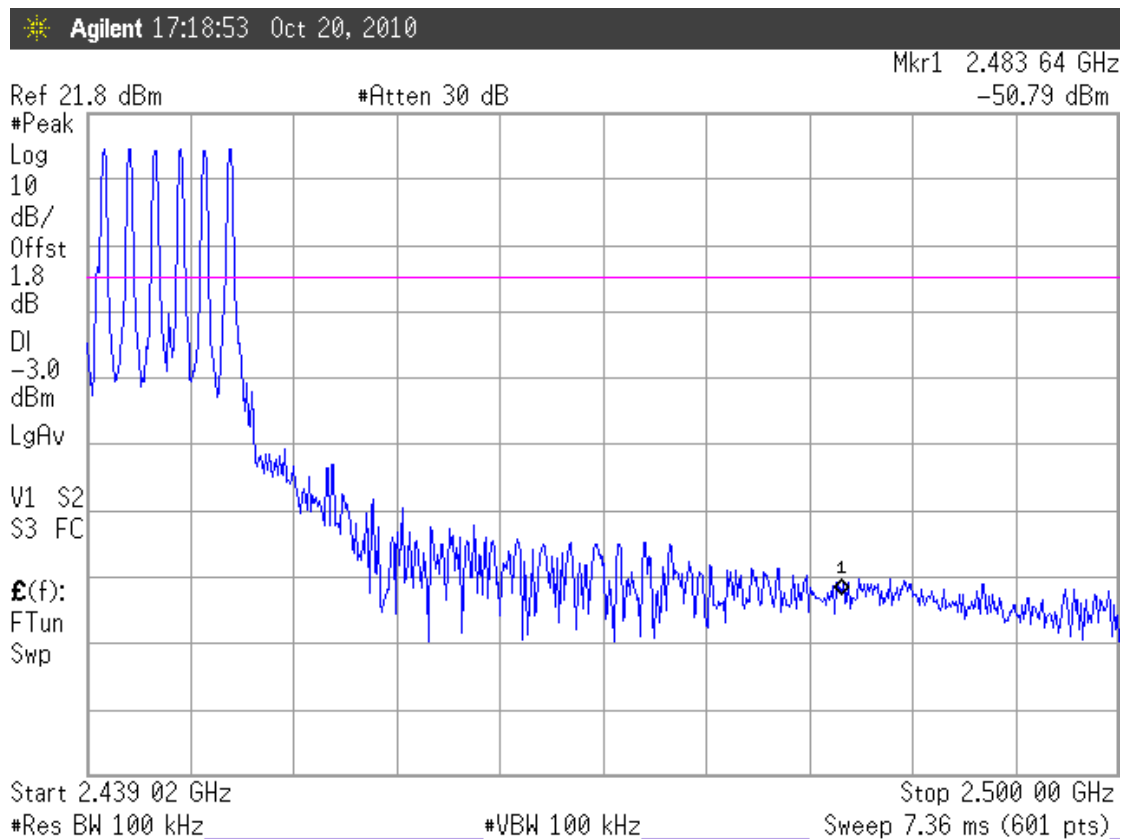

11.DEVIATION TO TEST SPECIFICATIONS

【NONE】

12. PHOTOGRAPHS

12.1. Photos of Radiated Measurement at Semi-Anechoic Chamber

12.1.1. Frequency Range 30MHz~1GHz, Stand



12.1.2. Frequency Range 30MHz~1GHz, Side



12.1.3.Frequency Range 30MHz~1GHz, Lie



12.1.4.Frequency Range Above 1GHz, Stand




12.1.5.Frequency Range Above 1GHz, Side



12.1.6.Frequency Range Above 1GHz, Lie



12.2. Photo of 20dB Bandwidth Measurement

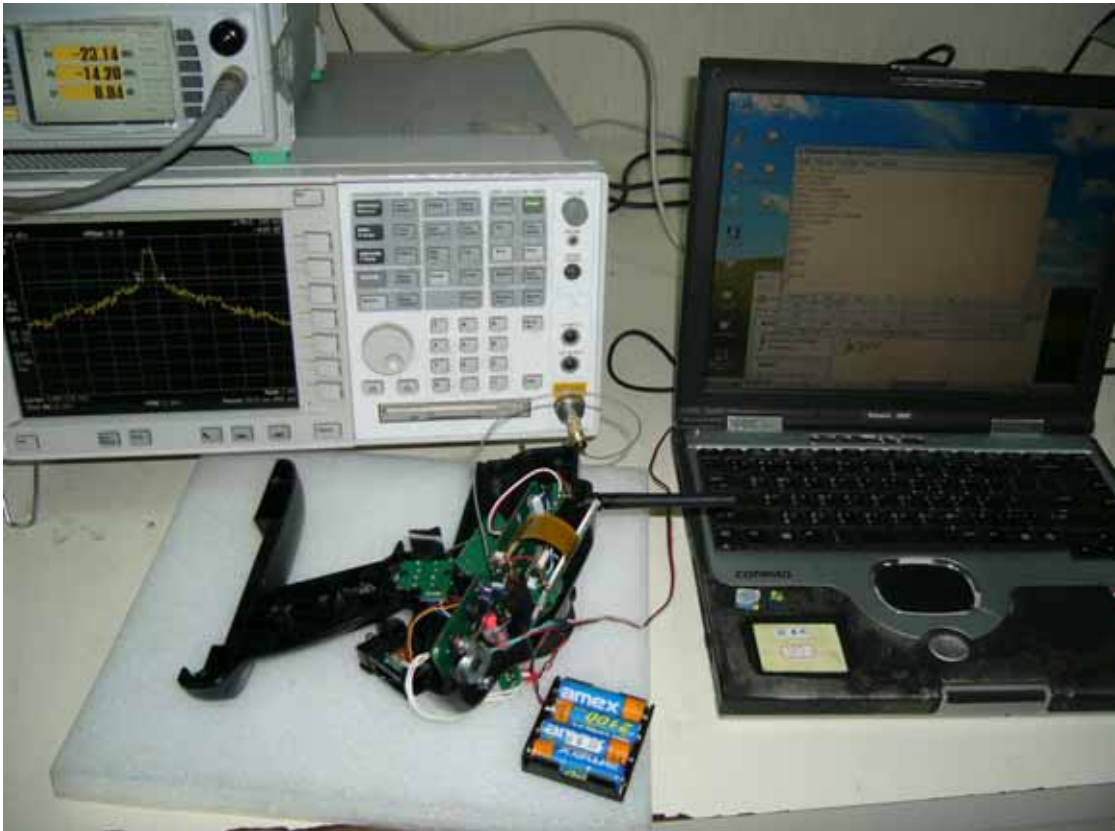

12.3. Photo of Carrier Frequency Separation Measurement



12.4. Photo of Time of Occupancy Measurement



12.5. Photo of Number of Hopping Channel Measurement



12.6. Photo of Maximum Peak Output Power Measurement



12.7. Photo of Emission Limitation Measurement



12.8. Photo of Band Edges Measurement

