

APPLICATION FOR CERTIFICATION

On Behalf of

FUTABA Corporation

Radio Control

Model No. : R304SB

FCC ID : AZPR304SB-24G

Brand: Futaba

Prepared for : FUTABA Corporation
1080 Yabutsuka Chosei-son Chosei-gun
Chiba, 299-4395 Japan.

Prepared by : AUDIX Technology Corporation
EMC Department
No. 53-11, Dingfu, Linkou Dist.,
New Taipei City 244, Taiwan

Tel : (02) 2609-9301, 2609-2133
Fax: (02) 2609-9303

File Number : C1M1302135
Report Number : EM-F1020194
Date of Test : Feb. 27 ~ Mar. 07, 2013
Date of Report : Mar. 15, 2013

TABLE OF CONTENTS

Description	Page
TEST REPORT CERTIFICATION	3
1. GENERAL INFORMATION	4
1.1. Description of Device (EUT).....	4
1.2. Tested Supporting System Details	5
1.3. Description of Test Facility	6
1.4. Measurement Uncertainty	6
2. CONDUCTED EMISSION MEASUREMENT	7
3. RADIATED EMISSION MEASUREMENT	8
3.1. Test Equipment	8
3.2. Block Diagram of Test Setup.....	8
3.3. Radiated Emission Limits (§15.209)	10
3.4. Fundamental Frequency Limits [§15.249(a)]	10
3.5. Operating Condition of EUT	10
3.6. Test Procedure	11
3.7. Radiated Emission Measurement Test Results	12
4. DUTY CYCLE CORRECTION FACTOR.....	29
4.1. Test Equipment	29
4.2. Block Diagram of Test Setup.....	29
4.3. Test Results.....	30
5. DEVIATION TO TEST SPECIFICATIONS.....	31
6. PHOTOGRAPHS.....	32
6.1. Photos of Radiated Emission Measurement at Semi-Anechoic Chamber	32

TEST REPORT CERTIFICATION

Applicant : FUTABA Corporation
Manufacturer : FUTABA Corporation
EUT Description : Radio Control
FCC ID : AZPR304SB-24G
(A) Model No. : R304SB
(B) Serial No. : N/A
(C) Brand : Futaba
(D) Power Supply : DC 6V
(E) Test Voltage : DC 6V (Via Batteries)

Measurement Procedure Used:

FCC RULES AND REGULATIONS PART 15 SUBPART C, October 2012
(FCC CFR 47 Part 15C, §15.207, §15.249, §15.209)
AND ANSI C63.4/2003

The device described above was tested by AUDIX Technology Corporation to determine the maximum emission levels emanating from the device. The maximum emission levels were compared to the FCC Part 15 subpart C limits.

The measurement results are contained in this test report and AUDIX Technology Corporation is assumed full responsibility for the accuracy and completeness of these measurements. Also, this report shows that the EUT to be technically compliant with the requirements of FCC standards.

This report applies to above tested sample only. This report shall not be reproduced in part without written approval of AUDIX Technology Corporation.

Date of Test : Feb. 27 ~ Mar. 07, 2013 Date of Report : Mar. 15, 2013

Producer : 
(Tina Huang/Administrator)

Signatory: 
(Leon Liu/Deputy General Manager)

1. GENERAL INFORMATION

1.1. Description of Device (EUT)

Description	:	Radio Control
Model Number	:	R304SB
Serial Number	:	N/A
FCC ID	:	AZPR304SB-24G
Applicant	:	FUTABA Corporation 1080 Yabutsuka Chosei-son Chosei-gun Chiba, 299-4395 Japan.
Manufacturer	:	FUTABA Corporation 1080 Yabutsuka Chosei-son Chosei-gun Chiba, 299-4395 Japan.
Modulation	:	FHSS
Frequency Band	:	2407.500MHz ~ 2467.500MHz
Tested Frequency	:	2407.500MHz (Channel 1) 2435.500MHz (Channel 15) 2467.500MHz (Channel 31)
Frequency Channel	:	31 channels
Antenna (mono-pole type)	:	Antenna Gain: -5.16dBi
Date of Receipt of Sample	:	Feb. 25, 2013
Date of Test	:	Feb. 27 ~ Mar. 07, 2013

1.2. Tested Supporting System Details

1.2.1. NOTEBOOK PC

Model Number : N20
Serial Number : N/A
FCC ID : By DoC
Brand : ASUS
AC Adapter : ASUS, M/N SADP-65NB BB
DC Cord: Non-Shielded, Undetachable, 1.8m
USB to Bus Cable : Non-Shielded, Detachable, 0.8m
Power Cord : Non-Shielded, Detachable, 1.8m

1.2.2. DIGITAL SERVO #1 (LINK TO EUT)

Part Number : S3003
Serial Number : N/A
Manufacturer : Futaba
Data Cable : Non-Shielded, Detachable, 0.15m

1.2.3. DIGITAL SERVO #2 (LINK TO EUT)

Part Number : S3003
Serial Number : N/A
Manufacturer : Futaba
Data Cable : Non-Shielded, Detachable, 0.15m

1.2.4. DIGITAL SERVO #3 (LINK TO EUT)

Part Number : S3003
Serial Number : N/A
Manufacturer : Futaba
Data Cable : Non-Shielded, Detachable, 0.15m

1.2.5. DIGITAL SERVO #4 (LINK TO EUT)

Part Number : S3003
Serial Number : N/A
Manufacturer : Futaba
Data Cable : Non-Shielded, Detachable, 0.15m

1.2.6. SWITCH (LINK TO EUT)

Model Number : N/A
Serial Number : N/A
Manufacturer : N/A
DC Power Cable : Non-Shielded, Detachable, 0.15m

1.2.7. Battery (1.5VDC*4)

Model Number : N/A
Serial Number : N/A
Manufacturer : N/A
DC Power Cable : Non-Shielded, Detachable, 0.15m

1.3. Description of Test Facility

Name of Firm : AUDIX Technology Corporation
EMC Department
No. 53-11, Dingfu, Linkou Dist.,
New Taipei City 244, Taiwan

Test Facility & Location (AC) : Semi-Anechoic Chamber
No. 53-11, Dingfu, Linkou Dist.,
New Taipei City 244, Taiwan
Renewal on May 11, 2012
Federal Communication Commission
Registration Number: 90993

NVLAP Lab. Code : 200077-0

TAF Accreditation No : 1724

1.4. Measurement Uncertainty

Test Item	Frequency Range	Uncertainty (dB)
Radiation Test (Distance: 3m)	30MHz~300MHz	± 2.91dB
	300MHz~1000MHz	± 2.74dB
	Above 1GHz	± 5.02dB

Remark : Uncertainty = $ku_c(y)$

2. CONDUCTED EMISSION MEASUREMENT

【The EUT only employs battery power for operation, no conductive emission limits are required according to FCC Part 15 Section §15.207】

3. RADIATED EMISSION MEASUREMENT

3.1. Test Equipment

The following test equipment was used during the radiated emission measurement:

3.1.1. For Frequency Range 30MHz~1000MHz (at Semi-Anechoic Chamber)


Item	Type	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
1.	Spectrum Analyzer	HP	8593EM	3826A00272	Jun. 18, 12'	Jun. 17, 13'
2.	Test Receiver	R&S	ESCS30	100338	Jul. 04, 12'	Jul. 03, 13'
3.	Amplifier	HP	8447D	2944A06305	Feb. 19, 13'	Feb. 18, 14'
4.	Biconical Antenna	CHASE	VBA6106A	1264	Mar. 03, 13'	Mar. 02, 14'
5.	Log Periodic Antenna	Schwarzbeck	UHALP910 8-A	0810	Mar. 03, 13'	Mar. 02, 14'

3.1.2. For Frequency Above 1GHz (at Semi-Anechoic Chamber)


Item	Type	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
1.	Spectrum Analyzer	Agilent	E4446A	US44300366	Aug. 07, 12'	Aug. 06, 13'
2.	Amplifier	HP	8449B	3008A00529	Jan. 31, 13'	Jan. 30, 14'
3.	Horn Antenna	EMCO	3115	9112-3775	May. 09, 12'	May. 08, 13'

3.2. Block Diagram of Test Setup


3.2.1. Block Diagram of connection between EUT and simulators

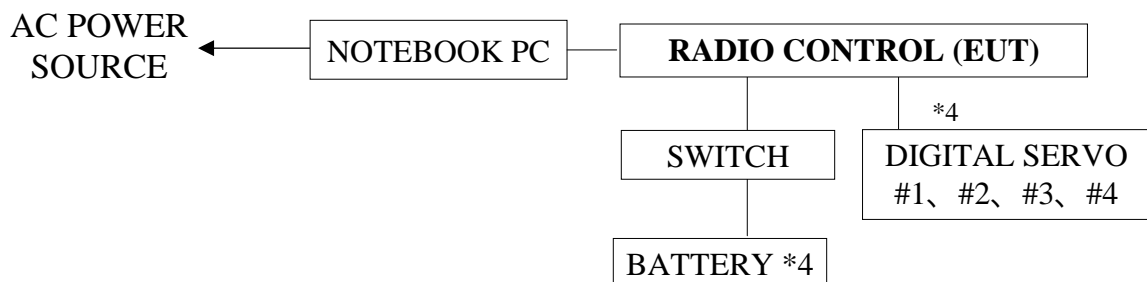

3.2.2. Semi-Anechoic Chamber (3m) Setup Diagram for 30-1000MHz

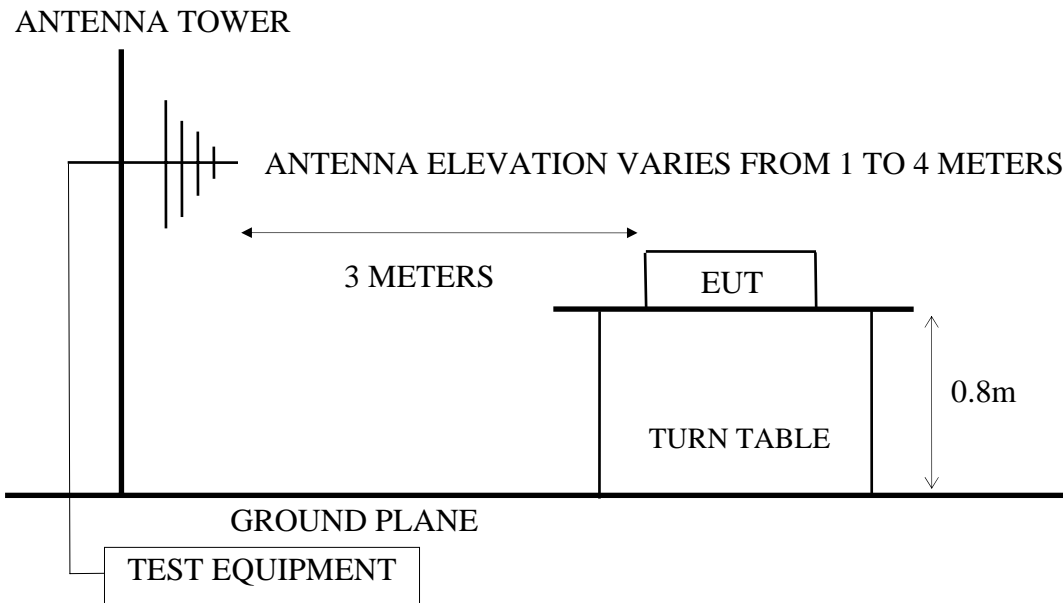

3.2.3. Semi-Anechoic Chamber (3m) Setup Diagram for above 1GHz

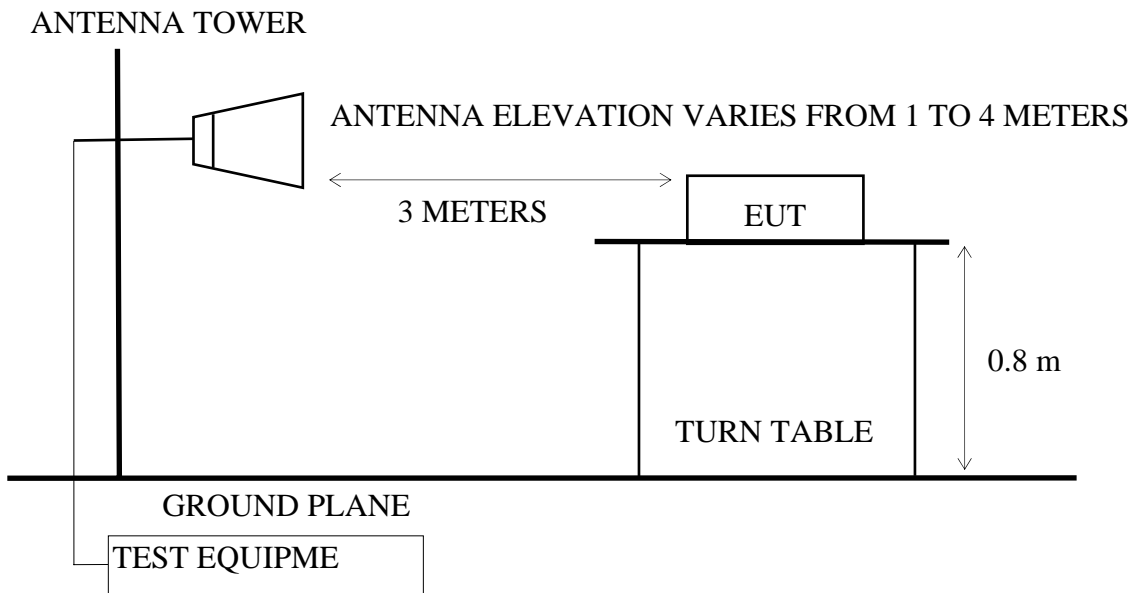

3.3. Radiated Emission Limits (§15.209)

FREQUENCY MHz	DISTANCE Meters	FIELD STRENGTHS LIMITS	
		$\mu\text{V/m}$	$\text{dB}\mu\text{V/m}$
30 ~ 88	3	100	40.0
88 ~ 216	3	150	43.5
216 ~ 960	3	200	46.0
Above 960	3	500	54.0
Above 1000	3	74.0 $\text{dB}\mu\text{V/m}$ (Peak) 54.0 $\text{dB}\mu\text{V/m}$ (Average)	

Remark : (1) Emission level ($\text{dB}\mu\text{V/m}$) = $20 \log$ Emission level ($\mu\text{V/m}$)

(2) The tighter limit applies at the edge between two frequency bands.

(3) Distance refers to the distance in meters between the measuring instrument antenna and the closed point of any part of the device or system.

(4) The limits in this table are based on CFR 47 Part 15.205(a)(b) and Part 15.209 (a).

(5) The over 1GHz limit, FCC limit is used based on CFR 47 Part 15.35 (b) and Part 15.205(b) & Part 15.209(e) and Part 15.207(c).

3.4. Fundamental Frequency Limits [§15.249(a)]

FUNDAMENTAL FREQUENCY MHZ	LIMITS
2400-2485	114 $\text{dB}\mu\text{V/m}$ (Peak)
	94 $\text{dB}\mu\text{V/m}$ (Average)

3.5. Operating Condition of EUT

3.5.1. Set up the EUT (Radio Control) as shown on 3.2.

3.5.2. To turn on the power of all equipment.

3.5.3. The EUT was set the notebook PC using test program “Futaba Term”.

3.5.4. The EUT was set to continuously transmit signals at 2407.500MHz, 2435.500MHz and 2467.500MHz during testing.

3.6. Test Procedure

The EUT and its simulators were placed on a turn table which was 0.8 meter above the ground. The turn table rotated 360 degrees to determine the position of the maximum emission level. EUT was set to 3 meters away from the receiving antenna which was mounted on an antenna tower. The antenna moved up and down between 1 to 4 meters to find out the maximum emission level. Broadband antenna such as calibrated biconical and log-periodical antenna or horn antenna were used as a receiving antenna. Both horizontal and vertical polarization of the antenna were set on measurement. In order to find the maximum emission, all of the interface cables were manipulated according to FCC ANSI C63.4-2003 regulation.

The bandwidth of the R & S Test Receiver ESCS 30 was set at 120kHz.
(For 30MHz to 1000MHz)

The resolution bandwidth and video bandwidth of test spectrum analyzer is 1MHz for peak detection (PK) at frequency above 1GHz.

The frequency range from 30MHz to 25GHz (Up to 10th harmonics from fundamental frequency) was checked.

Above 1GHz was measured with peak and average detector. For frequency from 2.68GHz to 25GHz, we checked it in 1 meter distance and with a shorter cable 2 meter instead of original's. There is no signal exist

3.7. Radiated Emission Measurement Test Results

PASSED. All emissions not reported below are too low against the prescribed limits.

EUT : Radio Control Model No. : R304SB

Test Date : Mar. 07, 2013 Temperature : 22 Humidity : 66%

For Frequency Range 30MHz~1000MHz:

The EUT was measured during this section testing and all the test results are listed in section 3.7.1.

Mode	Channel	Frequency	Test Mode	Reference Test Data	
				Horizontal	Vertical
1.	01	2407.5MHz	Transmit	# 16	# 15
2.	15	2435.5MHz		# 14	# 13
3.	31	2467.5MHz		# 16	# 15

* Above all final readings were measured with Quasi-Peak detector.

For Frequency above 1GHz:

There is no emission be found from 1GHz to up to 10th harmonics.

For Restricted Bands:

The EUT was tested in restricted bands and all the test results are listed in section 3.7.2. (The restricted bands defined in part 15.205(a))

Mode	Channel	Frequency	Test Mode	Reference Test Data	
				Horizontal	Vertical
1.	01	2407.5MHz	Transmit	# 4	# 3
2.	31	2467.5MHz		# 3	# 4

For Fundamental Frequency:


The EUT was measured during this section testing and all the test results are listed in section 3.7.3.

Mode	Channel	Frequency	Test Mode	Reference Test Data	
				Horizontal	Vertical
1.	01	2407.5MHz	Transmit	# 2	# 1
2.	15	2435.5MHz		# 2	# 1
3.	31	2467.5MHz		# 2	# 1

3.7.1. Frequency Range 30-1000MHz



AUDIX TECHNOLOGY Corp. EMC Laboratory
 No.53-11, Tin-fu Tsun, Lin-kou Hsiang, Taipei
 County, Taiwan R.O.C. Post Code:24443
 Tel:+886-2-26092133 Fax:+886-2-26099303
 Email:ttemc@ttemc.com.tw

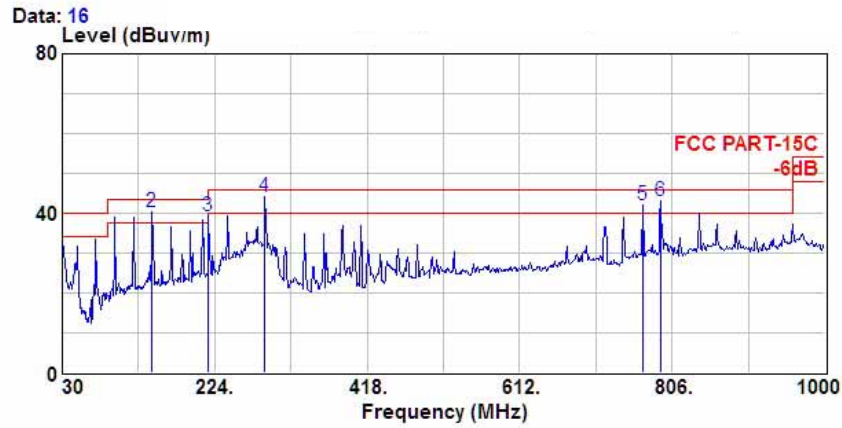


Site no. : A/C Chamber Data no. : 16
 Dis. / Ant. : 3m VBA6106A/UHALP9108A Ant. pol. : HORIZONTAL
 Limit : FCC PART-15C
 Env. / Ins. : E4446A 22*C/66% Engineer : Johnny_Hsueh
 EUT : R304SB
 Power Rating : DC 6V
 Test Mode : Tx2407.5MHz

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBµV)	Emission Level (dBµV/m)	Limits (dBµV/m)	Margin (dB)	Remark
1	30.000	24.86	1.10	6.57	32.53	40.00	7.47	
2	144.460	20.31	2.60	17.37	40.28	43.50	3.22	
3	216.240	21.86	3.20	14.40	39.46	46.00	6.54	
4	288.020	25.85	3.80	14.65	44.30	46.00	1.70	
5	768.170	23.87	6.80	11.30	41.97	46.00	4.03	
6	791.450	23.94	6.90	12.24	43.08	46.00	2.92	

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.



AUDIX TECHNOLOGY Corp. EMC Laboratory
 No.53-11, Tin-fu Tsun, Lin-kou Hsiang, Taipei
 County, Taiwan R.O.C. Post Code:24443
 Tel:+886-2-26092133 Fax:+886-2-26099303
 Email:ttemc@ttemc.com.tw

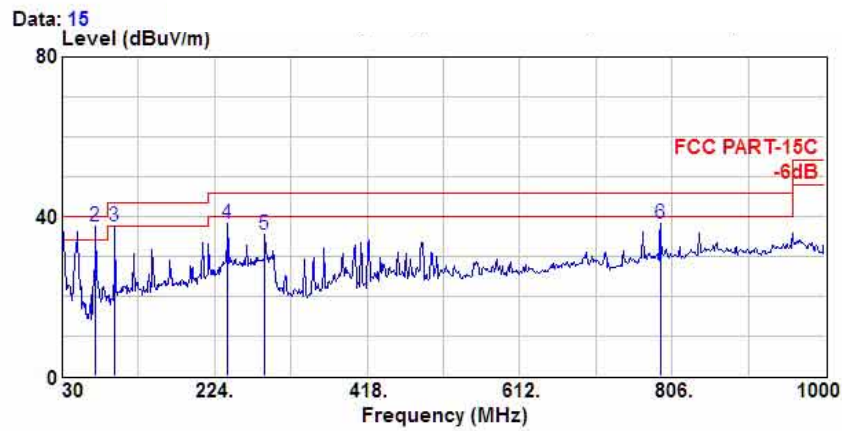


Site no. : A/C Chamber Data no. : 15
 Dis. / Ant. : 3m VBA6106A/UHALP9108A Ant. pol. : VERTICAL
 Limit : FCC PART-15C
 Env. / Ins. : E4446A 22*C/66% Engineer : Johnny_Hsueh
 EUT : R304SB
 Power Rating : DC 6V
 Test Mode : Tx2407.5MHz

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	30.000	24.86	1.10	10.43	36.39	40.00	3.61	
2	72.680	12.42	1.80	23.54	37.76	40.00	2.24	
3	96.930	16.75	2.05	18.90	37.70	43.50	5.80	
4	240.490	23.10	3.40	11.74	38.24	46.00	7.76	
5	288.020	25.85	3.80	5.99	35.64	46.00	10.36	
6	791.450	23.94	6.90	7.41	38.25	46.00	7.75	

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.



AUDIX TECHNOLOGY Corp. EMC Laboratory
 No.53-11, Tin-fu Tsun, Lin-kou Hsiang, Taipei
 County, Taiwan R.O.C. Post Code:24443
 Tel:+886-2-26092133 Fax:+886-2-26099303
 Email:ttemc@ttemc.com.tw

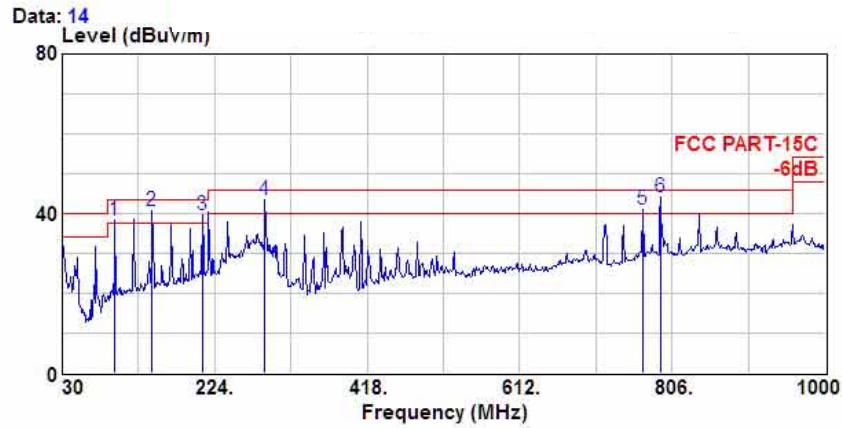


Site no. : A/C Chamber Data no. : 14
 Dis. / Ant. : 3m VBA6106A/UHALP9108A Ant. pol. : HORIZONTAL
 Limit : FCC PART-15C
 Env. / Ins. : E4446A 22°C/66% Engineer : Johnny_Hsueh
 EUT : R304SB
 Power Rating : DC 6V
 Test Mode : Tx2435.5MHz

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	96.930	16.75	2.05	19.55	38.35	43.50	5.15	
2	144.460	20.31	2.60	17.63	40.54	43.50	2.96	
3	208.480	21.85	3.12	14.74	39.70	43.50	3.80	
4	288.020	25.85	3.80	13.87	43.52	46.00	2.48	
5	768.170	23.87	6.80	10.31	40.98	46.00	5.02	
6	791.450	23.94	6.90	13.18	44.02	46.00	1.98	

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.



AUDIX TECHNOLOGY Corp. EMC Laboratory
 No.53-11, Tin-fu Tsun, Lin-kou Hsiang, Taipei
 County, Taiwan R.O.C. Post Code:24443
 Tel:+886-2-26092133 Fax:+886-2-26099303
 Email:ttemc@ttemc.com.tw

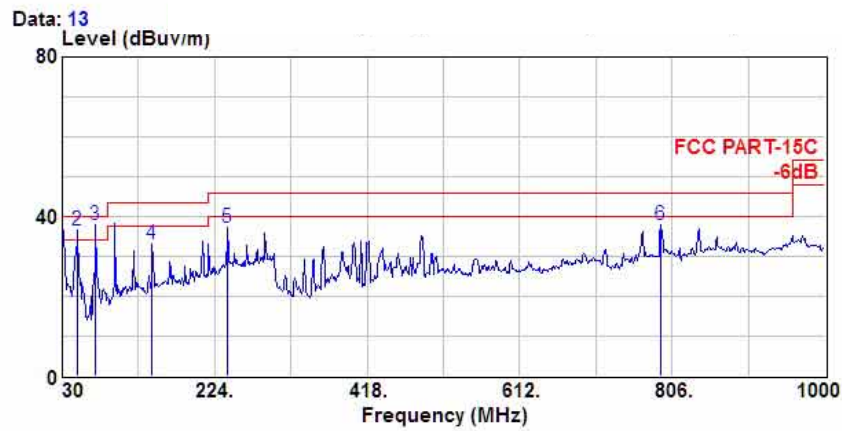


Site no. : A/C Chamber Data no. : 13
 Dis. / Ant. : 3m VBA6106A/UHALP9108A Ant. pol. : VERTICAL
 Limit : FCC PART-15C
 Env. / Ins. : E4446A 22°C/66% Engineer : Johnny_Hsueh
 EUT : R304SB
 Power Rating : DC 6V
 Test Mode : Tx2435.5MHz

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	30.000	24.86	1.10	10.53	36.49	40.00	3.51	
2	49.400	16.83	1.50	18.36	36.69	40.00	3.31	
3	72.680	12.42	1.80	23.59	37.81	40.00	2.19	
4	144.460	20.31	2.60	10.20	33.11	43.50	10.39	
5	240.490	23.10	3.40	10.78	37.28	46.00	8.72	
6	791.450	23.94	6.90	7.09	37.93	46.00	8.07	

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.



AUDIX TECHNOLOGY Corp. EMC Laboratory
 No.53-11, Tin-fu Tsun, Lin-kou Hsiang, Taipei
 County, Taiwan R.O.C. Post Code:24443
 Tel:+886-2-26092133 Fax:+886-2-26099303
 Email:ttemc@ttemc.com.tw

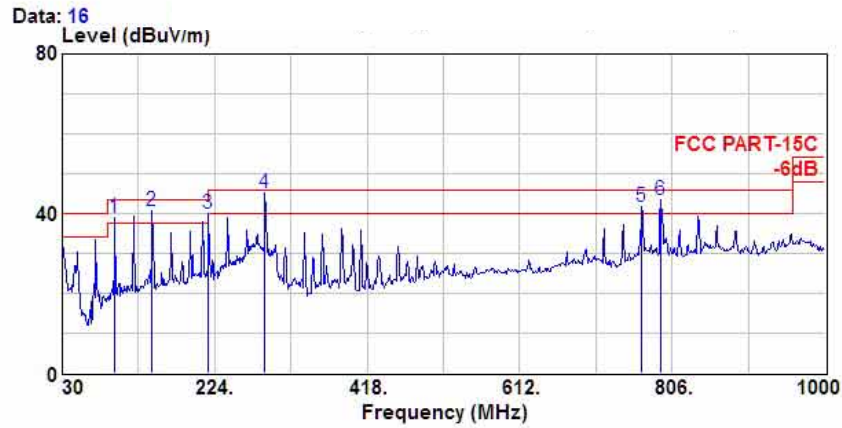


Site no. : A/C Chamber Data no. : 16
 Dis. / Ant. : 3m VBA6106A/UHALP9108A Ant. pol. : HORIZONTAL
 Limit : FCC PART-15C
 Env. / Ins. : E4446A 22°C/66% Engineer : Johnny_Hsueh
 EUT : R304SB
 Power Rating : DC 6V
 Test Mode : Tx2467.5MHz

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	96.930	16.75	2.05	20.04	38.84	43.50	4.66	
2	144.460	20.31	2.60	17.91	40.82	43.50	2.68	
3	216.240	21.86	3.20	15.06	40.12	46.00	5.88	
4	288.020	25.85	3.80	15.54	45.19	46.00	0.81	
5	767.200	23.86	6.80	11.20	41.86	46.00	4.14	
6	791.450	23.94	6.90	12.77	43.61	46.00	2.39	

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.



AUDIX TECHNOLOGY Corp. EMC Laboratory
 No.53-11, Tin-fu Tsun, Lin-kou Hsiang, Taipei
 County, Taiwan R.O.C. Post Code:24443
 Tel:+886-2-26092133 Fax:+886-2-26099303
 Email:ttemc@ttemc.com.tw

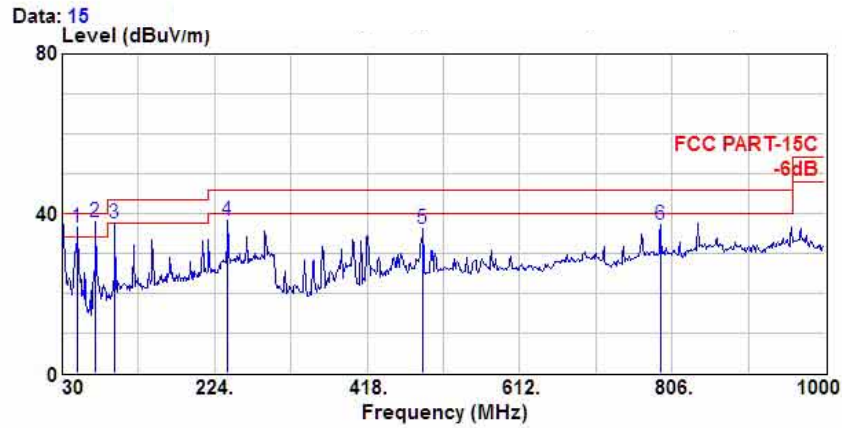

Site no. : A/C Chamber Data no. : 15
 Dis. / Ant. : 3m VBA6106A/UHALP9108A Ant. pol. : VERTICAL
 Limit : FCC PART-15C
 Env. / Ins. : E4446A 22°C/66% Engineer : Johnny_Hsueh
 EUT : R304SB
 Power Rating : DC 6V
 Test Mode : Tx2467.5MHz

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBµV)	Emission Level (dBµV/m)	Limits (dBµV/m)	Margin (dB)	Remark
1	49.400	16.83	1.50	18.10	36.43	40.00	3.57	
2	72.680	12.42	1.80	23.81	38.03	40.00	1.97	
3	96.930	16.75	2.05	18.69	37.49	43.50	6.01	
4	240.490	23.10	3.40	11.67	38.17	46.00	7.83	
5	488.810	18.59	6.24	11.45	36.27	46.00	9.73	
6	791.450	23.94	6.90	6.36	37.20	46.00	8.80	

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

3.7.2. Restricted Bands Measurement Results

Date of Test : Mar. 07, 2013 Temperature : 22

EUT : Radio Control Humidity : 66%


Test Mode : Transmit, Channel: 01, Frequency: 2407.5MHz

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading Horizontal (dBμV)	Emission Level Horizontal (dBμV/m)	Limits (dBμV/m)	Margin (dB)
Peak*	2389.800	28.47	6.34	14.18	49.00	74.00	25.00

- Remark: 1. Emission Level = Antenna Factor + Cable Loss + Meter Reading.
 2. Low frequency section (spurious in the restricted band 2310-2450MHz).
 3. '*' The field strength of emission appearing within Part 15.205(a) shall not exceed the limits shown in section 15.209.

	Emission Frequency (MHz)	Peak Value (dB/m)	Duty Cycle Correction Factor (dB)	Average Value Horizontal (dBμV/m)	Limit (dBμV/m)	Margin (dB)
Average*	2389.800	49.00	-16.70	32.30	54.00	21.70

- Remarks: 1. Duty Cycle Correction Factor = $20\log(\text{cumulative on}/T) = 20\log(0.4595\text{ms}/3.149\text{ms}) = -16.7$
 "T" means the period of the pulse train or 100ms if the pulse train length is greater than 100ms
 2. Average value = Peak value + Duty Cycle Correction Factor
 3. Low frequency section (spurious in the restricted band 2310-2450MHz).
 4. '*' The field strength of emission appearing within Part 15.205(a) shall not exceed the limits shown in section 15.209.

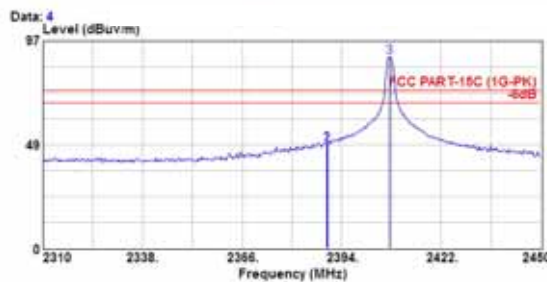

Site no. : A/C Chamber Data no. : 4
 Dis. / Ant. : 3m 3115(4927) Ant. pol. : HORIZONTAL
 Limit : FCC PART-15C (1G-PK)
 Env. / Ins. : E4446A 22°C/66% Engineer : Johnny_Hsueh
 EUT : R3045B
 Power Rating : DC 6V
 Test Mode : Tx2407.5MHz

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2389.800	28.47	6.34	14.18	49.00	74.00	25.00	Peak
2	2390.000	28.47	6.34	13.90	48.72	74.00	25.28	Peak
3	2407.980	28.51	6.36	54.58	89.45	74.00	-15.45	Peak

- Remarks: 1. Emission Level = Antenna Factor + Cable Loss + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.


Date of Test : Mar. 07, 2013 Temperature : 22
 EUT : Radio Control Humidity : 66%
 Test Mode : Transmit, Channel: 01, Frequency: 2407.5MHz

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading Vertical (dBμV)	Emission Level Vertical (dBμV/m)	Limits (dBμV/m)	Margin (dB)
Peak*	2390.000	28.47	6.34	11.51	46.32	74.00	27.68

- Remark: 1. Emission Level = Antenna Factor + Cable Loss + Meter Reading.
 2. Low frequency section (spurious in the restricted band 2310-2450MHz).
 3. '*' The field strength of emission appearing within Part 15.205(a) shall not exceed the limits shown in section 15.209.

	Emission Frequency (MHz)	Peak Value (dB/m)	Duty Cycle Correction Factor (dB)	Average Value Vertical (dBμV/m)	Limit (dBμV/m)	Margin (dB)
Average*	2390.000	46.32	-16.70	29.62	54.00	24.38

- Remarks: 1. Duty Cycle Correction Factor = $20\log(\text{cumulative on}/T) = 20\log(0.4595\text{ms}/3.149\text{ms}) = -16.7$
 "T" means the period of the pulse train or 100ms if the pulse train length is greater than 100ms
 2. Average value = Peak value + Duty Cycle Correction Factor
 3. Low frequency section (spurious in the restricted band 2310-2450MHz).
 4. '*' The field strength of emission appearing within Part 15.205(a) shall not exceed the limits shown in section 15.209.

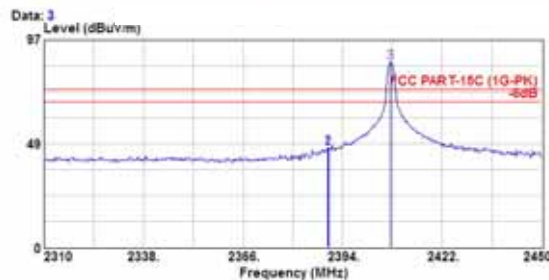

Site no. : A/C Chamber Data no. : 3
 Dis. / Ant. : 3m 3115(4927) Ant. pol. : VERTICAL
 Limit : FCC PART-15C (1G-PK)
 Env. / Ins. : E4446A 22°C/66% Engineer : Johnny_Hsueh
 EUT : R3043B
 Power Rating : DC 6V
 Test Mode : Tx2407.5MHz

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Remark
1	2389.800	28.47	6.34	11.49	46.30	74.00	27.70	Peak
2	2390.000	28.47	6.34	11.51	46.32	74.00	27.68	Peak
3	2407.980	28.51	6.36	51.66	86.53	74.00	-12.53	Peak

- Remarks: 1. Emission Level = Antenna Factor + Cable Loss + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.


Date of Test : Mar. 07, 2013 Temperature : 22
 EUT : Radio Control Humidity : 66%
 Test Mode : Transmit, Channel: 31, Frequency: 2467.5MHz

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading Horizontal (dBμV)	Emission Level Horizontal (dBμV/m)	Limits (dBμV/m)	Margin (dB)
Peak*	2483.500	28.66	6.45	16.47	51.58	74.00	22.42

Remark: 1. Emission Level = Antenna Factor + Cable Loss + Meter Reading.
 2. Low frequency section (spurious in the restricted band 2440-2530MHz).
 3. '*' The field strength of emission appearing within Part 15.205(a) shall not exceed the limits shown in section 15.209.

	Emission Frequency (MHz)	Peak Value (dB/m)	Duty Cycle Correction Factor (dB)	Average Value Horizontal (dBμV/m)	Limit (dBμV/m)	Margin (dB)
Average*	2483.500	51.58	-16.70	34.88	54.00	19.12

Remarks: 1. Duty Cycle Correction Factor = $20\log(\text{cumulative on}/T) = 20\log(0.4595\text{ms}/3.149\text{ms}) = -16.7$
 "T" means the period of the pulse train or 100ms if the pulse train length is greater than 100ms
 2. Average value = Peak value + Duty Cycle Correction Factor
 3. Low frequency section (spurious in the restricted band 2440-2530MHz).
 4. '*' The field strength of emission appearing within Part 15.205(a) shall not exceed the limits shown in section 15.209.

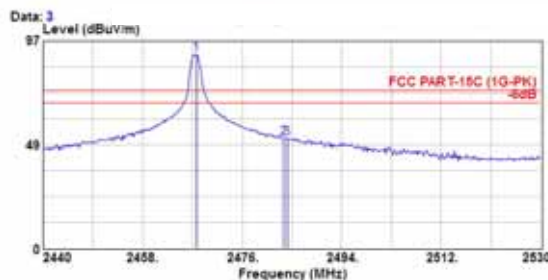

Site no. : A/C Chamber Data no. : 3
 Dis. / Ant. : 3m 3115(4927) Ant. pol. : HORIZONTAL
 Limit : FCC PART-15C (1G-PK)
 Env. / Ins. : E4446A 22°C/66% Engineer : Johnny_Hsueh
 EUT : R304SB
 Power Rating : DC 6V
 Test Mode : Tx2467.5MHz

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2467.810	28.62	6.43	55.56	90.62	74.00	-16.62	Peak
2	2483.900	28.66	6.45	16.47	51.58	74.00	22.42	Peak
3	2484.190	28.66	6.45	16.22	51.33	74.00	22.67	Peak

Remarks: 1. Emission Level = Antenna Factor + Cable Loss + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.


Date of Test : Mar. 07, 2013 Temperature : 22
 EUT : Radio Control Humidity : 66%
 Test Mode : Transmit, Channel: 31, Frequency: 2467.5MHz

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading Vertical (dBμV)	Emission Level Vertical (dBμV/m)	Limits (dBμV/m)	Margin (dB)
Peak*	2483.500	28.66	6.45	17.48	52.59	74.00	21.41

Remark: 1. Emission Level = Antenna Factor + Cable Loss + Meter Reading.
 2. Low frequency section (spurious in the restricted band 2440-2530MHz).
 3. '*' The field strength of emission appearing within Part 15.205(a) shall not exceed the limits shown in section 15.209.

	Emission Frequency (MHz)	Peak Value (dB/m)	Duty Cycle Correction Factor (dB)	Average Value Vertical (dBμV/m)	Limit (dBμV/m)	Margin (dB)
Average*	2483.500	52.59	-16.70	35.89	54.00	18.11

Remarks: 1. Duty Cycle Correction Factor = $20\log(\text{cumulative on}/T) = 20\log(0.4595\text{ms}/3.149\text{ms}) = -16.7$
 "T" means the period of the pulse train or 100ms if the pulse train length is greater than 100ms
 2. Average value = Peak value + Duty Cycle Correction Factor
 3. Low frequency section (spurious in the restricted band 2440-2530MHz).
 4. '*' The field strength of emission appearing within Part 15.205(a) shall not exceed the limits shown in section 15.209.

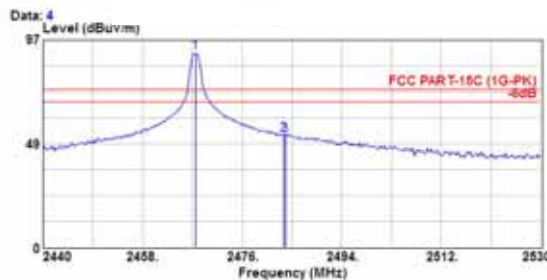

Site no. : A/C Chamber Data no. : 4
 Dis. / Ant. : 3m 3113(4927) Ant. pol. : VERTICAL
 Limit : FCC PART-15C (1G-PK)
 Env. / Ins. : E4446A 22°C/66% Engineer : Johnny_Hsueh
 EUT : R304SB
 Power Rating : DC 6V
 Test Mode : Tx2467.5MHz


	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Remark
1	2467.630	28.62	6.43	55.87	90.93	74.00	-16.93	Peak
2	2483.500	28.66	6.45	17.48	52.59	74.00	21.41	Peak
3	2483.920	28.66	6.45	17.26	52.38	74.00	21.62	Peak

Remarks: 1. Emission Level = Antenna Factor + Cable Loss + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

3.7.3. Fundamental Frequency



AUDIX TECHNOLOGY Corp. EMC Laboratory
 No.53-11, Tin-fu Tsun, Lin-kou Hsiang, Taipei
 County, Taiwan R.O.C. Post Code:24443
 Tel:+886-2-26092133 Fax:+886-2-26099303
 Email:ttemc@ttemc.com.tw

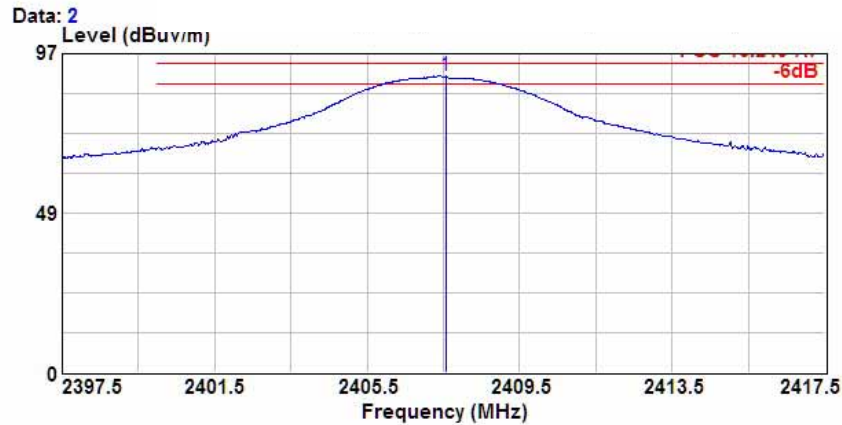


Site no. : A/C Chamber Data no. : 2
 Dis. / Ant. : 3m 3115(4927) Ant. pol. : HORIZONTAL
 Limit : FCC 15.249-AV
 Env. / Ins. : E4446A 22*C/66% Engineer : Johnny_Hsueh
 EUT : R304SB
 Power Rating : DC 6V
 Test Mode : Tx2407.5MHz

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBµV)	Emission Level (dBµV/m)	Limits (dBµV/m)	Margin (dB)	Remark
1	2407.580	28.51	6.36	55.25	90.12	94.00	3.88	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.
 3. **Fundament frequency peak value has complied with average limit, thus average value is not required.**



AUDIX TECHNOLOGY Corp. EMC Laboratory
 No.53-11, Tin-fu Tsun, Lin-kou Hsiang, Taipei
 County, Taiwan R.O.C. Post Code:24443
 Tel:+886-2-26092133 Fax:+886-2-26099303
 Email:ttemc@ttemc.com.tw

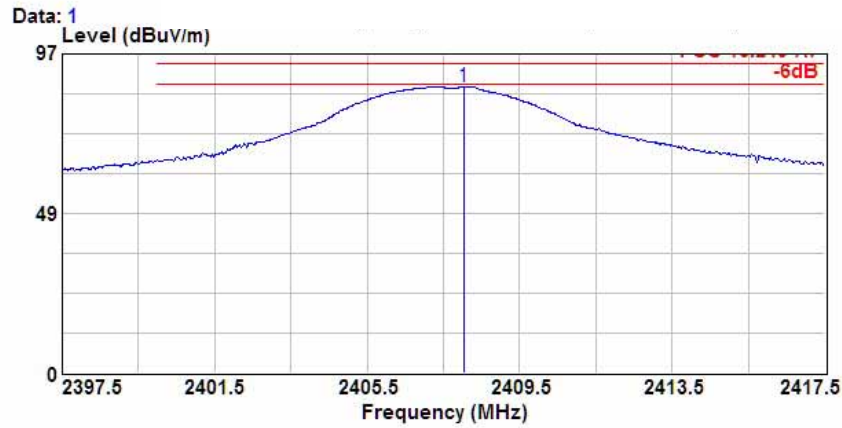

Site no. : A/C Chamber Data no. : 1
 Dis. / Ant. : 3m 3115(4927) Ant. pol. : VERTICAL
 Limit : FCC 15.249-AV
 Env. / Ins. : E4446A 22*C/66% Engineer : Johnny_Hsueh
 EUT : R304SB
 Power Rating : DC 6V
 Test Mode : Tx2407.5MHz


	Freq.	Ant. Factor	Cable Loss	Reading	Emission Level	Limits	Margin	Remark
	(MHz)	(dB/m)	(dB)	(dBuV)	(dBuV/m)	(dBuV/m)	(dB)	
1	2408.040	28.51	6.36	52.26	87.13	94.00	6.87	Peak

- Remarks:
1. Emission Level= Antenna Factor + Cable Loss + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.
 3. **Fundament frequency peak value has complied with average limit, thus average value is not required.**



AUDIX TECHNOLOGY Corp. EMC Laboratory
 No.53-11, Tin-fu Tsun, Lin-kou Hsiang, Taipei
 County, Taiwan R.O.C. Post Code:24443
 Tel:+886-2-26092133 Fax:+886-2-26099303
 Email:ttemc@ttemc.com.tw

Data: 2 File: D:\share DOC\johnny-e3\C1M1302134(futaba FCC CE)\TX2435.5.E
 Level (dBuV/m)

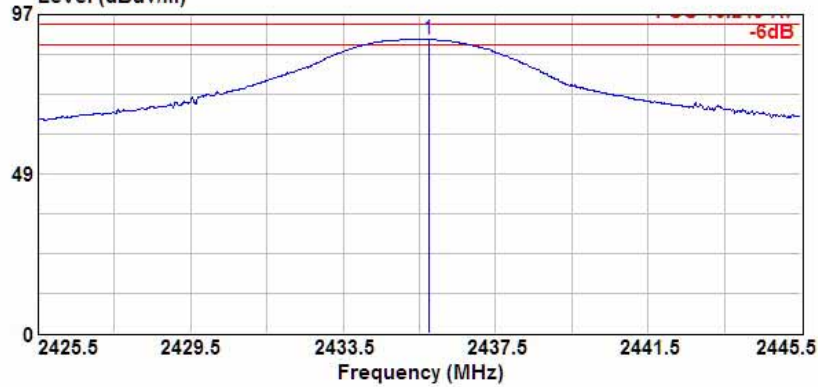

Site no.	: A/C Chamber	Data no.	: 2
Dis. / Ant.	: 3m 3115(4927)	Ant. pol.	: HORIZONTAL
Limit	: FCC 15.249-AV	Engineer	: Johnny_Hsueh
Env. / Ins.	: E4446A 22*C/66%		
EUT	: R304SB		
Power Rating	: DC 6V		
Test Mode	: Tx2435.5MHz		


	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2435.740	28.55	6.39	54.43	89.37	94.00	4.63	Peak @

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.
 3. **Fundament frequency peak value has complied with average limit, thus average value is not required.**



AUDIX TECHNOLOGY Corp. EMC Laboratory
 No.53-11, Tin-fu Tsun, Lin-kou Hsiang, Taipei
 County, Taiwan R.O.C. Post Code:24443
 Tel:+886-2-26092133 Fax:+886-2-26099303
 Email:ttemc@ttemc.com.tw

Data: 1 File: D:\share DOC\johnny-e3\C1M1302134(futaba FCC CE)\TX2435.5.E
 Level (dBuV/m)

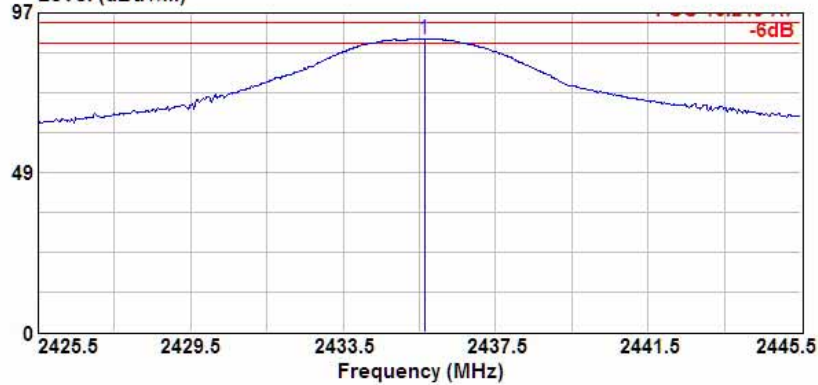

Site no. : A/C Chamber Data no. : 1
 Dis. / Ant. : 3m 3115(4927) Ant. pol. : VERTICAL
 Limit : FCC 15.249-AV
 Env. / Ins. : E4446A 22*C/66% Engineer : Johnny_Hsueh
 EUT : R304SB
 Power Rating : DC 6V
 Test Mode : Tx2435.5MHz


	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2435.640	28.55	6.39	54.12	89.06	94.00	4.94	Peak @

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.
 3. **Fundament frequency peak value has complied with average limit, thus average value is not required.**



AUDIX TECHNOLOGY Corp. EMC Laboratory
 No.53-11, Tin-fu Tsun, Lin-kou Hsiang, Taipei
 County, Taiwan R.O.C. Post Code:24443
 Tel:+886-2-26092133 Fax:+886-2-26099303
 Email:ttemc@ttemc.com.tw

Data: 2 File: D:\share DOC\johnny-e3\C1M1302134(futaba FCC CE)\TX2467.5.E
 Level (dBuV/m)

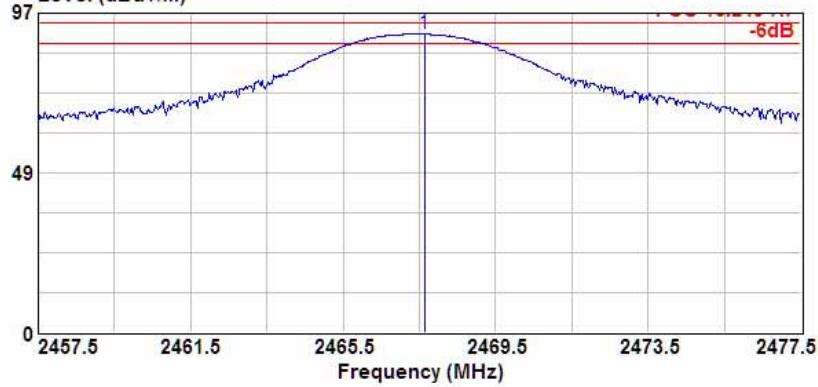

Site no.	: A/C Chamber	Data no.	: 2
Dis. / Ant.	: 3m 3115(4927)	Ant. pol.	: HORIZONTAL
Limit	: FCC 15.249-AV		
Env. / Ins.	: E4446A 22°C/66%	Engineer	: Johnny_Hsueh
EUT	: R304SB		
Power Rating	: DC 6V		
Test Mode	: Tx2467.5MHz		


	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2467.640	28.62	6.43	55.56	90.61	94.00	3.39	Peak @

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.
 3. **Fundament frequency peak value has complied with average limit, thus average value is not required.**



AUDIX TECHNOLOGY Corp. EMC Laboratory
 No.53-11, Tin-fu Tsun, Lin-kou Hsiang, Taipei
 County, Taiwan R.O.C. Post Code:24443
 Tel:+886-2-26092133 Fax:+886-2-26099303
 Email:ttemc@ttemc.com.tw

Data: 1 File: D:\share DOC\johnny-e3\C1M1302134(futaba FCC CE)\TX2467.5.E
 Level (dBuV/m)

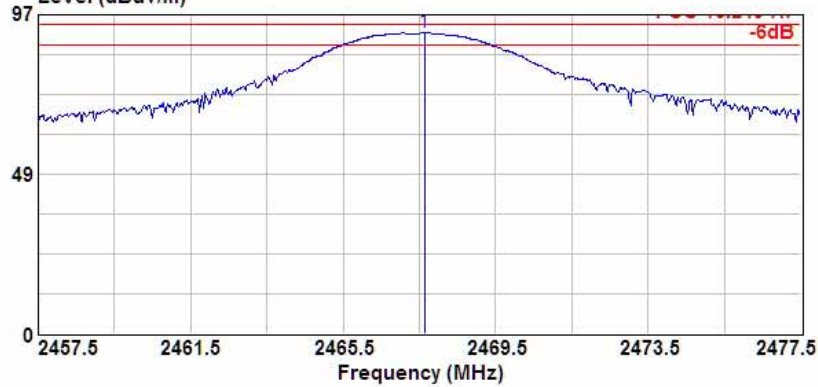

Site no. : A/C Chamber Data no. : 1
 Dis. / Ant. : 3m 3115(4927) Ant. pol. : VERTICAL
 Limit : FCC 15.249-AV
 Env. / Ins. : E4446A 22*C/66% Engineer : Johnny_Hsueh
 EUT : R304SB
 Power Rating : DC 6V
 Test Mode : Tx2467.5MHz

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2467.640	28.62	6.43	56.43	91.48	94.00	2.52	Peak @

- Remarks:
1. Emission Level= Antenna Factor + Cable Loss + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.
 3. **Fundament frequency peak value has complied with average limit, thus average value is not required.**


4. DUTY CYCLE CORRECTION FACTOR

4.1. Test Equipment

The following test equipment was used during the occupied bandwidth 99% power measurement:

Item	Type	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
1.	Spectrum Analyzer	Agilent	N9010A-507	MY49061167	Mar. 11, 13'	Mar. 10, 14'



4.2. Block Diagram of Test Setup

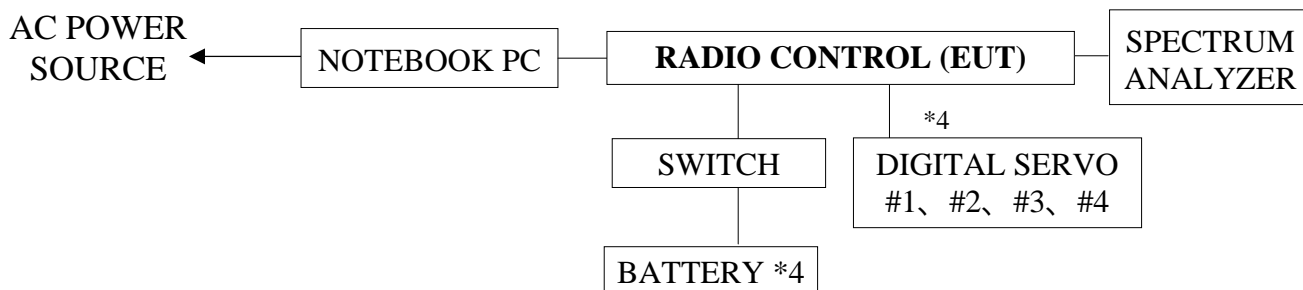

4.3. Test Results

PASSED. All the test results are attached in next pages.

Test Date: Feb. 27, 2013 Temperature : 20 Humidity : 60 %

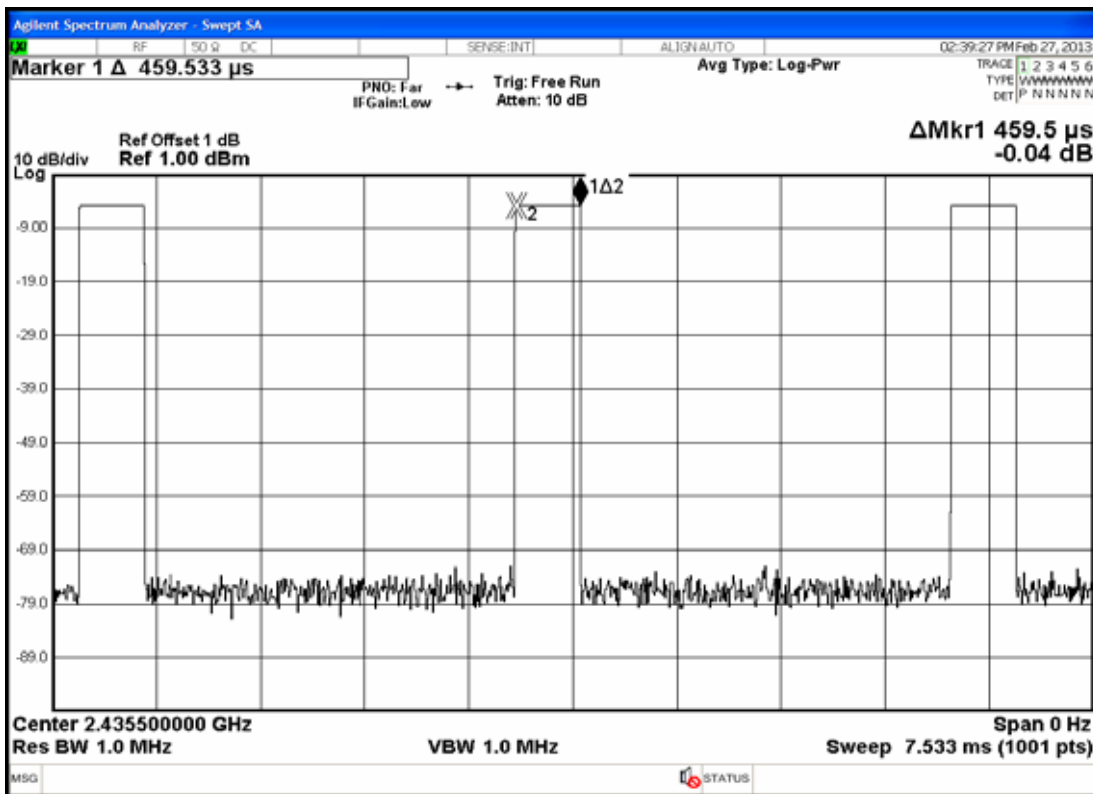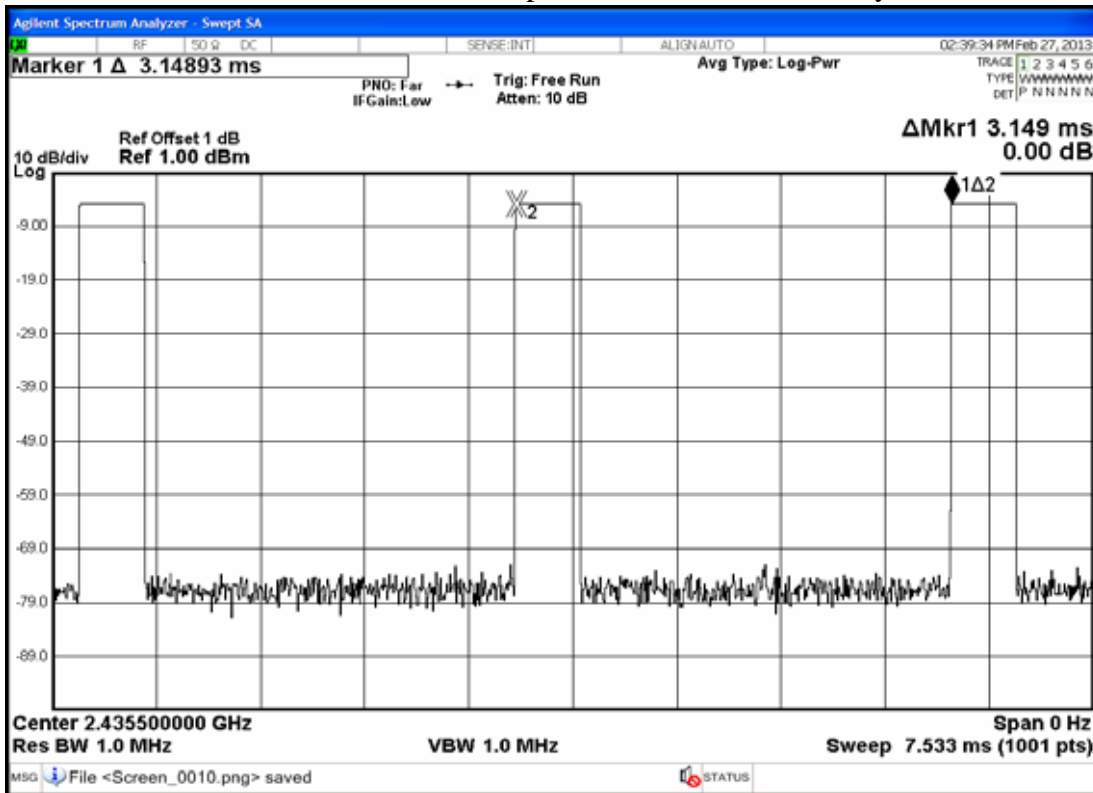

$$\begin{aligned} \text{Duty Cycle Correction Factor} &= 20\log(\text{dwell time}/3.149\text{ms}) \\ &= 20\log(0.4595\text{ms}/3.149\text{ms}) = -16.7 \end{aligned}$$


5. DEVIATION TO TEST SPECIFICATIONS

【NONE】

6. PHOTOGRAPHS

6.1. Photos of Radiated Emission Measurement at Semi-Anechoic Chamber

6.1.1. For Frequency Range 30MHz~1GHz

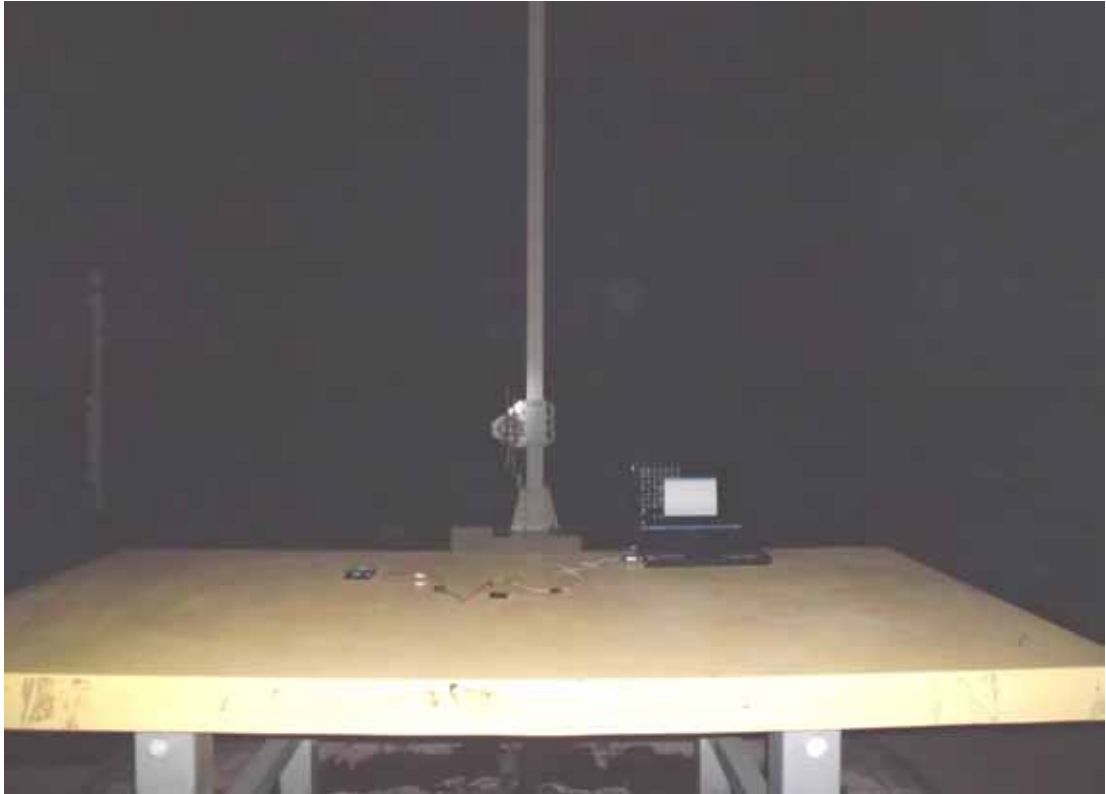

FRONT VIEW OF RADIATED MEASUREMENT



BACK VIEW OF RADIATED MEASUREMENT

6.1.2. For Frequency Above 1GHz



FRONT VIEW OF RADIATED MEASUREMENT



BACK VIEW OF RADIATED MEASUREMENT