

APPLICATION FOR CERTIFICATION

On Behalf of
FUTABA Corporation
Radio Control
Model No. : T10J
FCC ID : AZPT10J-24G
Brand: Futaba

Prepared for : FUTABA Corporation
1080 Yabutsuka Chosei-son Chosei-gun
Chiba, 299-4395 Japan.

Prepared by : AUDIX Technology Corporation
EMC Department
No. 53-11, Dingfu, Linkou Dist.,
New Taipei City 244, Taiwan, R.O.C.

Tel : (02) 2609-9301, 2609-2133
Fax: (02) 2609-9303

File Number : C1M1312186
Report Number : EM-F140040
Date of Test : Jan. 08 ~ 16, 2014
Date of Report : Jan. 20, 2014

TABLE OF CONTENTS

| Description | Page |
|--|-----------|
| TEST REPORT CERTIFICATION | 4 |
| 1. DESCRIPTION OF VERSION | 5 |
| 2. GENERAL INFORMATION | 6 |
| 2.1. Description of Device (EUT)..... | 6 |
| 2.2. Description of Test Facility | 7 |
| 2.3. Measurement Uncertainty | 8 |
| 3. CONDUCTED EMISSION MEASUREMENT..... | 9 |
| 4. RADIATED EMISSION MEASUREMENT | 10 |
| 4.1. Test Equipment..... | 10 |
| 4.2. Test Setup | 10 |
| 4.3. Radiated Emission Limits (§15.209) | 12 |
| 4.4. Operating Condition of EUT | 12 |
| 4.5. Test Procedure | 12 |
| 4.6. Radiated Emission Measurement Results | 13 |
| 5. 20dB BANDWIDTH MEASUREMENT | 38 |
| 5.1. Test Equipment..... | 38 |
| 5.2. Block Diagram of Test Setup..... | 38 |
| 5.3. Specification Limits (§15.247(a)(1)) | 38 |
| 5.4. Operating Condition of EUT | 38 |
| 5.5. Test Procedure | 38 |
| 5.6. Test Results..... | 39 |
| 6. CARRIER FREQUENCY SEPARATION MEASUREMENT | 43 |
| 6.1. Test Equipment..... | 43 |
| 6.2. Block Diagram of Test Setup..... | 43 |
| 6.3. Specification Limits (§15.247(a)(1)) | 43 |
| 6.4. Operating Condition of EUT | 43 |
| 6.5. Test Procedure | 43 |
| 6.6. Test Results..... | 44 |
| 7. TIME OF OCCUPANCY MEASUREMENT | 50 |
| 7.1. Test Equipment..... | 50 |
| 7.2. Block Diagram of Test Setup..... | 50 |
| 7.3. Specification Limits (§15.247(a)(1)(iii)) | 50 |
| 7.4. Operating Condition of EUT | 50 |
| 7.5. Test Procedure | 50 |
| 7.6. Test Results..... | 51 |
| 8. NUMBER OF HOPPING CHANNELS MEASUREMENT | 59 |
| 8.1. Test Equipment..... | 59 |
| 8.2. Block Diagram of Test Setup..... | 59 |
| 8.3. Specification Limits (§15.247(a)(1)(iii)) | 59 |
| 8.4. Operating Condition of EUT | 59 |
| 8.5. Test Procedure | 59 |
| 8.6. Test Results..... | 59 |
| 9. MAXIMUM PEAK OUTPUT POWER MEASUREMENT | 61 |
| 9.1. Test Equipment..... | 61 |
| 9.2. Block Diagram of Test Setup..... | 61 |
| 9.3. Specification Limits (§15.247(b)-(1))..... | 61 |
| 9.4. Operating Condition of EUT | 61 |

9.5. Test Procedure 61

9.6. Test Results..... 62

10. EMISSION LIMITATIONS MEASUREMENT.....70

10.1. Test Equipment..... 70

10.2. Block Diagram of Test Setup 70

10.3. Specification Limits (§15.247(c)) 70

10.4. Operating Condition of EUT 70

10.5. Test Procedure 70

10.6. Test Results 70

11. BAND EDGES MEASUREMENT.....89

11.1. Test Equipment..... 89

11.2. Block Diagram of Test Setup 89

11.3. Specification Limits (§15.247(c)) 89

11.4. Operating Condition of EUT 89

11.5. Test Procedure 89

11.6. Test Results 90

12. DEVIATION TO TEST SPECIFICATIONS92

13. PHOTOGRAPHS93

13.1. Photos of Radiated Measurement at Semi-Anechoic Chamber..... 93

13.2. Photo of RF Conducted Measurement 96

TEST REPORT CERTIFICATION

Applicant : FUTABA Corporation
 Manufacturer : FUTABA Corporation
 EUT Description : Radio Control
 FCC ID : AZPT10J-24G
 (A) Model No. : T10J
 (B) Serial No. : N/A
 (C) Brand : Futaba
 (D) Power Supply : DC 6V
 (E) Test Voltage : DC 6V (Via Battery)

Measurement Procedure Used:

FCC RULES AND REGULATIONS PART 15 SUBPART C, Oct. 2013
AND ANSI C63.4/2003

(FCC CFR 47 Part 15C, §15.207 and §15.209 and §15.247)


The device described above was tested by AUDIX Technology Corporation to determine the maximum emission levels emanating from the device. The maximum emission levels were compared to the FCC Part 15 subpart C limits.


The measurement results are contained in this test report and AUDIX Technology Corporation is assumed full responsibility for the accuracy and completeness of these measurements. Also, this report shows that the EUT to be technically compliant with the FCC official limits.

This report applies to above tested sample only. This report shall not be reproduced in part without written approval of AUDIX Technology Corporation.

Date of Test : Jan. 08 ~ 16, 2014

Date of Report : Jan. 20, 2014

Producer : 
 (Annie Yu/Administrator)

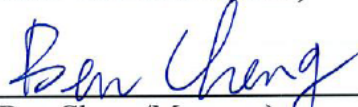Signatory : 
 (Ben Cheng/Manager)

1. DESCRIPTION OF VERSION

| Edition No. | Date of Rev. | Revision Summary | Report No. |
|-------------|---------------|------------------|------------|
| 0 | Jan. 20, 2014 | Original Report. | EM-F140040 |

2. GENERAL INFORMATION

2.1. Description of Device (EUT)

| | |
|---------------------------|---|
| Product | Radio Control |
| Model Number | T10J |
| Serial Number | N/A |
| Brand Name | Futaba |
| Applicant | FUTABA Corporation 1080 Yabutsuka Chosei-son Chosei-gun Chiba, 299-4395 Japan. |
| Manufacturer | FUTABA Corporation 1080 Yabutsuka Chosei-son Chosei-gun Chiba, 299-4395 Japan. |
| FCC ID | AZPT10J-24G |
| Fundamental Range | S-FHSS: 2403.250MHz ~ 2447.500MHz T-FHSS: 2407.500MHz ~ 2467.500MHz |
| Frequency Channel | S-FHSS: 60 channels T-FHSS: 31 channels |
| Radio Technology | FHSS and T-FHSS Modulation |
| Data Transfer Rate | S-FHSS: 2.0MHz T-FHSS: 0.75MHz |
| Date of Receipt of Sample | Dec. 20, 2013 |
| Date of Test | Jan. 08 ~ 16, 2014 |

2.2. Antenna Information

| Antenna Part Number | Manufacture | Antenna Type | Peak Gain |
|---------------------|-------------|--------------|-----------|
| ANTB24-073A0 | SANSeI | PCN | 2.14dBi |

2.3. Tested Supporting System Details

2.3.1. Support Peripheral Unit

| No. | Product | Brand | Model No. | Serial No. | FCC ID |
|-----|-------------|-------|-----------|------------|------------------|
| 1. | Notebook PC | IBM | TYPE 2652 | N/A | FCC DoC Approved |

2.3.2. Cable Lists

| No. | Cable Description Of The Above Support Units |
|-----|--|
| 1. | USB JIG Cable: Non-Shielded, Detachable, 0.8m Adapter: IBM, M/N 02K6747 DC Cord: Non-Shielded, Undetachable, 1.8m AC Power Cord: Non-Shielded, Detachable, 1.8m |

2.4. Description of Test Facility

Name of Firm : **AUDIX Technology Corporation**
EMC Department
 No. 53-11, Dingfu, Linkou Dist.,
 New Taipei City 244, Taiwan, R.O.C.

Test Location & Facility (AC) : **Semi-Anechoic Chamber**
 No. 53-11, Dingfu, Linkou Dist.,
 New Taipei City 244, Taiwan, R.O.C.
 May 11, 2012 Renewal on
 Federal Communication Commission
 Registration Number: 90993

NVLAP Lab. Code : 200077-0

TAF Accreditation No : 1724

2.5. Measurement Uncertainty

| Test Item | Frequency Range | Uncertainty (dB) |
|----------------------------------|-----------------|------------------|
| Radiation Test (Distance: 3m) | 30MHz~300MHz | ±2.91dB |
| | 300MHz~1000MHz | ±2.94dB |
| | Above 1GHz | ± 5.02dB |

Remark : Uncertainty = $ku_c(y)$

| Test Item | Uncertainty |
|------------------------------|-------------|
| 20dB Bandwidth | ± 0.2kHz |
| Carrier Frequency Separation | ± 0.2kHz |
| Time Of Occupancy | ± 0.03sec |
| Maximum peak Output power | ± 0.52dBm |
| Emission Limitations | ± 0.13dB |
| Band Edges | ± 0.13dB |

3. CONDUCTED EMISSION MEASUREMENT

【The EUT only employs DC power for operation, no conductive emission limits are required according to FCC Part 15 Section §15.207】

4. RADIATED EMISSION MEASUREMENT

4.1. Test Equipment

The following test equipment was used during the radiated emission measurement:

4.1.1. For Frequency Range 30MHz~1000MHz (at Semi-Anechoic Chamber)

| Item | Type | Manufacturer | Model No. | Serial No. | Last Cal. | Next Cal. |
|------|-------------------|--------------|------------|------------|--------------|--------------|
| 1. | Spectrum Analyzer | Agilent | N9030A-544 | US51350140 | Jul. 30, 13' | Jul. 29, 14' |
| 2. | Test Receiver | R & S | ESCS30 | 100338 | Jul. 01, 13' | Jun. 30, 14' |
| 3. | Amplifier | HP | 8447D | 2944A06305 | Feb. 19, 13' | Feb. 18, 14' |
| 4. | Bilog Antenna | TESEQ | CBL6112D | 33821 | Aug. 08, 13' | Aug. 07, 14' |

4.1.2. For Frequency Above 1GHz (at Semi-Anechoic Chamber)


| Item | Type | Manufacturer | Model No. | Serial No. | Last Cal. | Next Cal. |
|------|---------------------|--------------------|--------------------------------|------------|--------------|--------------|
| 1. | Spectrum Analyzer | Agilent | N9030A-544 | US51350140 | Jul. 30, 13' | Jul. 29, 14' |
| 2. | Test Receiver | R & S | ESCS30 | 100338 | Jul. 01, 13' | Jun. 30, 14' |
| 3. | Pre-Amplifier | HP | 8449B | 3008A02676 | Mar. 01, 13' | Feb. 28, 14' |
| 4. | 2.4GHz Notch Filter | K&L | 7NSL10-244 1.5E130.5-0 0 | 1 | Jun. 13, 13' | Jun. 12, 14' |
| 5. | 3G High Pass Filter | Microware Circuits | H3G018G1 | 484796 | Jun. 13, 13' | Jun. 12, 14' |
| 6. | Horn Antenna | EMCO | 3115 | 9609-4927 | Jun. 17, 13' | Jun. 16, 14' |
| 7. | Horn Antenna | EMCO | 3116 | 2653 | Oct. 11, 13' | Oct. 10, 14' |

4.2. Test Setup


4.2.1. Block Diagram of connection between EUT and simulators

| |
|--------------------------------|
| RADIO CONTROL (EUT) |
|--------------------------------|

4.2.2. Semi-Anechoic Chamber (3m) Setup Diagram for 30-1000MHz

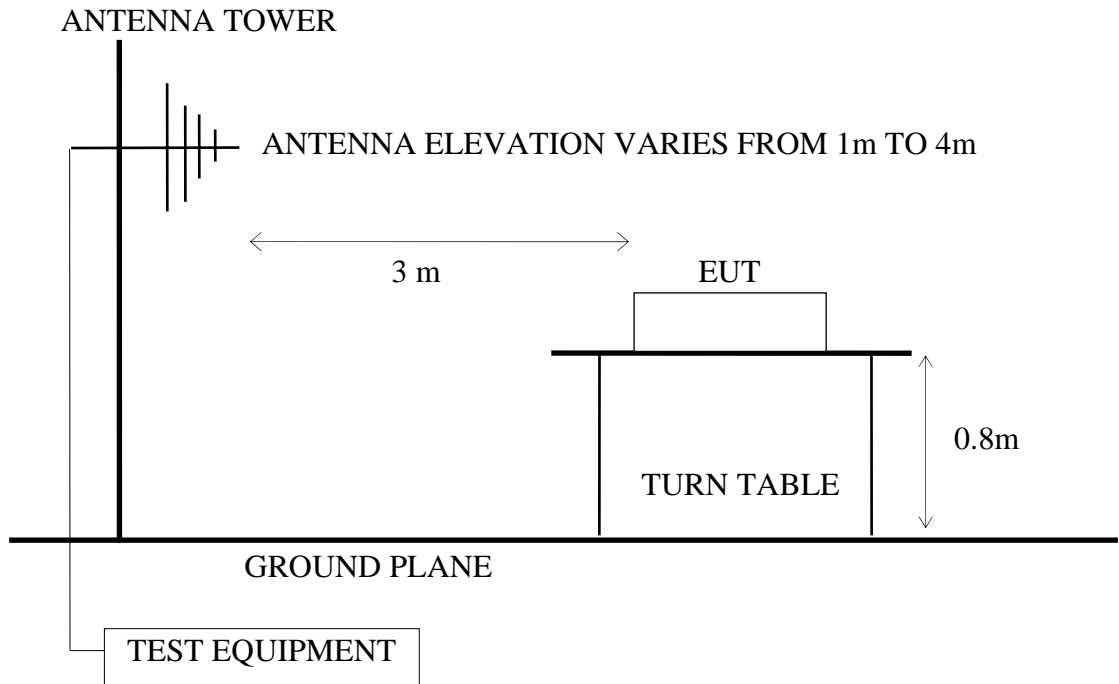

4.2.3. Semi-Anechoic Chamber (3m) Setup Diagram for above 1GHz

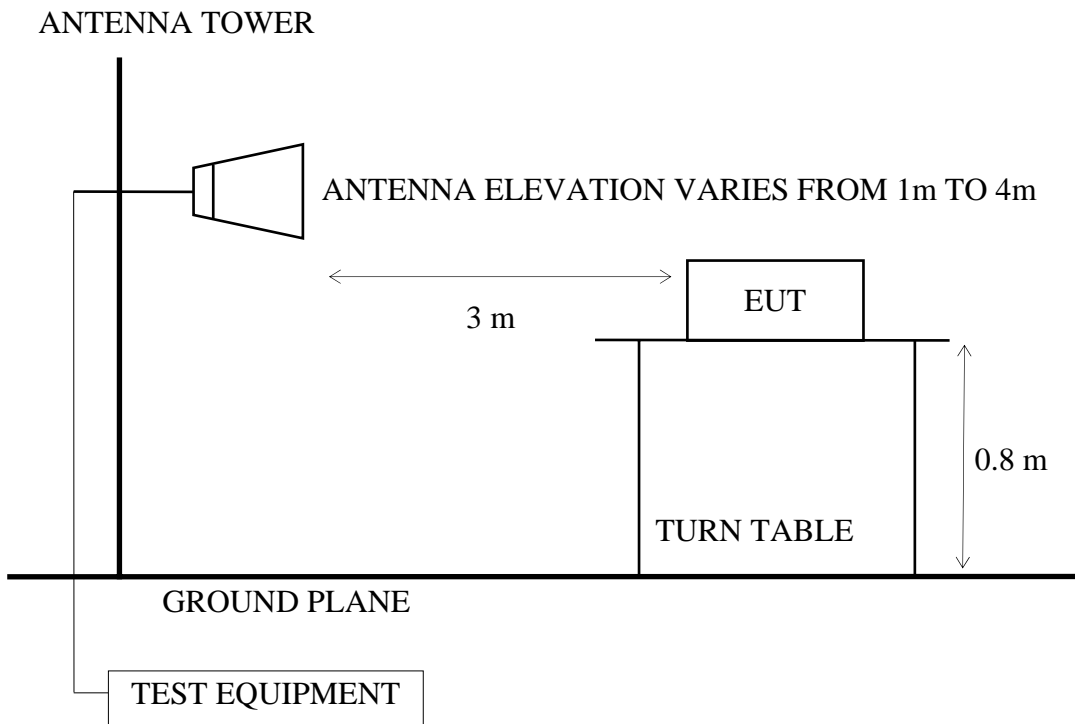

4.3. Radiated Emission Limits (§15.209)

| FREQUENCY MHz | DISTANCE Meters | FIELD STRENGTHS LIMITS | |
|------------------|--------------------|---|--------------------------|
| | | $\mu\text{V/m}$ | $\text{dB}\mu\text{V/m}$ |
| 30 ~ 88 | 3 | 100 | 40.0 |
| 88 ~ 216 | 3 | 150 | 43.5 |
| 216 ~ 960 | 3 | 200 | 46.0 |
| Above 960 | 3 | 500 | 54.0 |
| Above 1000 | 3 | 74.0 $\text{dB}\mu\text{V/m}$ (Peak) 54.0 $\text{dB}\mu\text{V/m}$ (Average) | |

- Remark :
- (1) Emission level ($\text{dB}\mu\text{V/m}$) = 20 log Emission level ($\mu\text{V/m}$)
 - (2) The tighter limit applies at the edge between two frequency bands.
 - (3) Distance refers to the distance in meters between the measuring instrument antenna and the closed point of any part of the device or system.
 - (4) The limits in this table are based on CFR 47 Part 15.205(a)(b) and Part 15.209 (a).
 - (5) The over 1GHz limit, FCC limit is used based on CFR 47 Part 15.35 (b) and Part 15.205(b) & Part 15.209(e) and Part 15.207(c).

4.4. Operating Condition of EUT

- 4.4.1. Set up the EUT (Radio Control) as shown on 4.2.
- 4.4.2. To turn on the power of all equipment.
- 4.4.3. The EUT was set the PC system using test program “Futaba Term”.
(Note: The PC system is not EUT’s accessory, It’s only used to setup EUT.)
- 4.4.4. The EUT was set to continuously transmit signals at 2403.250MHz, 2425.000MHz and 2447.500MHz at FHSS modulation during testing.
- 4.4.5. The EUT was set to continuously transmit signals at 2407.500MHz, 2435.500MHz and 2467.500MHz at T-FHSS modulation during testing.

4.5. Test Procedure

The EUT and its simulators were placed on a turn table which was 0.8 meter above the ground. The turn table rotated 360 degrees to determine the position of the maximum emission level. EUT was set 3 meters away from the receiving antenna which was mounted on an antenna tower. The antenna could be moved up and down between 1 to 4 meters to find out the maximum emission level. Broadband antennas such as calibrated biconical and log-periodical antenna or horn antenna were used as a receiving antenna. Both horizontal and vertical polarization of the antenna were set on measurement. In order to find the maximum emission, all of the interface cables were manipulated according to FCC ANSI C63.4-2003 regulation.

The bandwidth of the R&S Test Receiver ESCS30 was set at 120kHz. (For 30MHz to 1000MHz)

The resolution bandwidth and video bandwidth of test spectrum analyzer is 1MHz for peak detection (PK) at frequency above 1GHz.

The resolution bandwidth of test spectrum analyzer is 1MHz and the video bandwidth is 10Hz for average detection (AV) at frequency above 1GHz.

The frequency range from 30MHz to 25GHz (Up to 10th harmonics from fundamental frequency) was checked. 30MHz to 1000MHz was measured with Quasi-Peak detector. Pursuant to ANSI 4.2.2, peak detector is an alternate option for frequency from 30MHz to 1000MHz.

Above 1GHz was measured with peak and average detector. For frequency from 5.5GHz to 25GHz, we checked it in 1 meter distance and with a shorter cable 2 meter instead of original's. There is no signal exist.

4.6. Radiated Emission Measurement Results

PASSED.

(All emissions not reported below are too low against the prescribed limits.)

EUT : Radio Control M/N : T10J

Test Date : Jan. 16, 2014 Temperature : 23 Humidity : 42%

For Frequency Range 30MHz~1000MHz:

The EUT emitted the fundamental frequency with data code at the stand, side and lying conditions.

The EUT select **worst position "stand"** and with following test modes was performed during this section testing and all the test results are listed in section 4.6.1.

Radio Technology: S-FHSS Modulation

| Mode | Channel | Frequency | Test Mode | Position | Reference Test Data | |
|------|---------|-------------|-----------|----------|---------------------|----------|
| | | | | | Horizontal | Vertical |
| 1. | 01 | 2403.250MHz | Transmit | Stand | # 2 | # 1 |
| 2. | 30 | 2425.000MHz | | Stand | # 1 | # 2 |
| 3. | 60 | 2447.500MHz | | Stand | # 1 | # 2 |

Note 1: Above all final readings were measured with Peak detector.

Radio Technology: T-FHSS Modulation

| Mode | Channel | Frequency | Test Mode | Position | Reference Test Data | |
|------|---------|-------------|-----------|----------|---------------------|----------|
| | | | | | Horizontal | Vertical |
| 1. | 01 | 2407.500MHz | Transmit | Stand | # 2 | # 1 |
| 2. | 15 | 2435.500MHz | | Stand | # 1 | # 2 |
| 3. | 31 | 2467.500MHz | | Stand | # 1 | # 2 |

Note 1: Above all final readings were measured with Peak detector.

For Frequency above 1GHz:

The EUT select **worst position “stand ”** and with following test modes was performed during this section testing and all the test results are listed in section 4.6.2.

Radio Technology: S-FHSS Modulation

| Mode | Chnnel | Frequency | Test Mode | Position | Test Frequency Range |
|------|--------|-------------|-----------|----------|-----------------------|
| 1. | 01 | 2403.250MHz | Transmit | Stand | 1000-2680MHz* |
| 2. | | | | | 2680-4000MHz |
| 3. | | | | | 4000-5500MHz* |
| 4. | | | | | 5500-75000MHz |
| 5. | | | | | 7500-18000MHz |
| 6. | | | | | 18000-25000MHz |
| 7. | 30 | 2425.000MHz | Transmit | Stand | 1000-2680MHz |
| 8. | | | | | 2680-4000MHz |
| 9. | | | | | 4000-5500MHz* |
| 10. | | | | | 5500-75000MHz |
| 11. | | | | | 7500-18000MHz |
| 12. | | | | | 18000-25000MHz |
| 13. | 60 | 2447.500MHz | Transmit | Stand | 1000-2680MHz |
| 14. | | | | | 2680-4000MHz |
| 15. | | | | | 4000-5500MHz* |
| 16. | | | | | 5500-75000MHz* |
| 17. | | | | | 7500-18000MHz |
| 18. | | | | | 18000-25000MHz |

- Note: 1. Above all final readings were measured with Peak and Average detector.
 2. The emissions (up to 25GHz) not reported are too low to be measured.
 3.”*” means there is spurious emission falling the frequency band and be measures.

Radio Technology: T-FHSS Modulation

| Mode | Chnnel | Frequency | Test Mode | Position | Test Frequency Range |
|------|--------|-------------|-----------|----------|----------------------|
| 1. | 01 | 2407.500MH | Transmit | Stand | 1000-2680MHz* |
| 2. | | | | | 2680-4000MHz |
| 3. | | | | | 4000-5500MHz* |
| 4. | | | | | 5500-75000MHz |
| 5. | | | | | 7500-18000MHz |
| 6. | | | | | 18000-25000MHz |
| 7. | 15 | 2435.500MHz | Transmit | Stand | 1000-2680MHz |
| 8. | | | | | 2680-4000MHz |
| 9. | | | | | 4000-5500MHz* |
| 10. | | | | | 5500-75000MHz |
| 11. | | | | | 7500-18000MHz |
| 12. | | | | | 18000-25000MHz |
| 13. | 31 | 2467.500MHz | Transmit | Stand | 1000-2680MHz |
| 14. | | | | | 2680-4000MHz |
| 15. | | | | | 4000-5500MHz* |
| 16. | | | | | 5500-75000MHz |
| 17. | | | | | 7500-18000MHz |
| 18. | | | | | 18000-25000MHz |

Note: 1. Above all final readings were measured with Peak and Average detector.
 2. The emissions (up to 25GHz) not reported are too low to be measured.
 3. "*" means there is spurious emission falling the frequency band and be measures.

For Restricted Bands:

The EUT was tested in restricted bands and all the test results are listed in section 4.6.3. (The restricted bands defined in part 15.205(a))

Radio Technology: S-FHSS Modulation

| Mode | Channel | Frequency | Test Mode | Reference Test Data | |
|------|---------|-------------|-----------|---------------------|----------|
| | | | | Horizontal | Vertical |
| 1. | 01 | 2403.250MHz | Transmit | # 10 | # 9 |
| 2. | 60 | 2447.500MHz | Transmit | # 11 | # 12 |

Radio Technology: T-FHSS Modulation

| Mode | Channel | Frequency | Test Mode | Reference Test Data | |
|------|---------|-------------|-----------|---------------------|----------|
| | | | | Horizontal | Vertical |
| 1. | 01 | 2407.500MHz | Transmit | # 6 | #5 |
| 2. | 31 | 2467.500MHz | Transmit | # 7 | # 8 |

4.6.1. Frequency Range 30-1000MHz

Radio Technology: S-FHSS Modulation

Frequency: 2403.250MHz

Site no. : Audix NO.1 Chamber
 Dis. / Ant. : 3m CBL6112D 33821
 Limit : 30M-1G
 Env. / Ins. : 23°C/42% N9030A(140)
 EUT : T10J
 Power Rating : DC 6V
 Test Mode : Tx2403.25(S-FHSS)

Data no. : 2
 Ant. pol. : HORIZONTAL
 Engineer : Ken_chen

| | Freq. (MHz) | Ant. Factor (dB/m) | Cable Loss (dB) | Reading (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Remark |
|---|----------------|--------------------------|-----------------------|-------------------|-------------------------------|--------------------|----------------|--------|
| 1 | 57.16 | 7.69 | 1.60 | 11.65 | 20.94 | 40.00 | 19.06 | Peak |
| 2 | 143.49 | 11.52 | 2.50 | 12.41 | 26.43 | 43.50 | 17.07 | Peak |
| 3 | 273.47 | 13.50 | 3.70 | 6.40 | 23.60 | 46.00 | 22.40 | Peak |
| 4 | 580.96 | 18.81 | 6.30 | 3.62 | 28.73 | 46.00 | 17.27 | Peak |

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

Site no. : Audix NO.1 Chamber
 Dis. / Ant. : 3m CBL6112D 33821
 Limit : 30M-1G
 Env. / Ins. : 23°C/42% N9030A(140)
 EUT : T10J
 Power Rating : DC 6V
 Test Mode : Tx2403.25(S-FHSS)

Data no. : 1
 Ant. pol. : VERTICAL
 Engineer : Ken_chen

| | Freq. (MHz) | Ant. Factor (dB/m) | Cable Loss (dB) | Reading (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Remark |
|---|----------------|--------------------------|-----------------------|-------------------|-------------------------------|--------------------|----------------|--------|
| 1 | 110.51 | 12.22 | 2.20 | 11.23 | 25.65 | 43.50 | 17.85 | Peak |
| 2 | 137.67 | 11.80 | 2.43 | 13.35 | 27.58 | 43.50 | 15.92 | Peak |
| 3 | 580.96 | 18.81 | 6.30 | 4.11 | 29.22 | 46.00 | 16.78 | Peak |

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

Frequency: 2425.000MHz

Site no. : Audix NO.1 Chamber Data no. : 1
 Dis. / Ant. : 3m CBL6112D 33821 Ant. pol. : HORIZONTAL
 Limit : 30M-1G
 Env. / Ins. : 23*C/42% N9030A(140) Engineer : Ken_chen
 EUT : T10J
 Power Rating : DC 6V
 Test Mode : Tx2425(S-FHSS)

| | Freq. (MHz) | Ant. Factor (dB/m) | Cable Loss (dB) | Reading (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Remark |
|---|----------------|--------------------------|-----------------------|-------------------|-------------------------------|--------------------|----------------|--------|
| 1 | 58.13 | 7.46 | 1.60 | 13.52 | 22.58 | 40.00 | 17.42 | Peak |
| 2 | 143.49 | 11.52 | 2.50 | 13.01 | 27.03 | 43.50 | 16.47 | Peak |
| 3 | 273.47 | 13.50 | 3.70 | 6.55 | 23.75 | 46.00 | 22.25 | Peak |
| 4 | 580.96 | 18.81 | 6.30 | 5.92 | 31.03 | 46.00 | 14.97 | Peak |

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

Site no. : Audix NO.1 Chamber Data no. : 2
 Dis. / Ant. : 3m CBL6112D 33821 Ant. pol. : VERTICAL
 Limit : 30M-1G
 Env. / Ins. : 23*C/42% N9030A(140) Engineer : Ken_chen
 EUT : T10J
 Power Rating : DC 6V
 Test Mode : Tx2425(S-FHSS)

| | Freq. (MHz) | Ant. Factor (dB/m) | Cable Loss (dB) | Reading (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Remark |
|---|----------------|--------------------------|-----------------------|-------------------|-------------------------------|--------------------|----------------|--------|
| 1 | 128.94 | 12.22 | 2.40 | 8.70 | 23.32 | 43.50 | 20.18 | Peak |
| 2 | 210.42 | 10.60 | 3.20 | 10.18 | 23.98 | 43.50 | 19.52 | Peak |
| 3 | 580.96 | 18.81 | 6.30 | 5.67 | 30.78 | 46.00 | 15.22 | Peak |

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

Frequency: 2447.500MHz

Site no. : Audix NO.1 Chamber
 Dis. / Ant. : 3m CBL6112D 33821
 Limit : 30M-1G
 Env. / Ins. : 23°C/42% N9030A(140)
 EUT : T10J
 Power Rating : DC 6V
 Test Mode : T×2447.5(S-FHSS)

Data no. : 1
 Ant. pol. : HORIZONTAL
 Engineer : Ken_chen

| | Freq. (MHz) | Ant. Factor (dB/m) | Cable Loss (dB) | Reading (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Remark |
|---|----------------|--------------------------|-----------------------|-------------------|-------------------------------|--------------------|----------------|--------|
| 1 | 60.07 | 7.00 | 1.60 | 10.64 | 19.24 | 40.00 | 20.76 | Peak |
| 2 | 143.49 | 11.52 | 2.50 | 12.00 | 26.02 | 43.50 | 17.48 | Peak |
| 3 | 273.47 | 13.50 | 3.70 | 6.40 | 23.60 | 46.00 | 22.40 | Peak |
| 4 | 580.96 | 18.81 | 6.30 | 4.11 | 29.22 | 46.00 | 16.78 | Peak |

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

Site no. : Audix NO.1 Chamber
 Dis. / Ant. : 3m CBL6112D 33821
 Limit : 30M-1G
 Env. / Ins. : 23°C/42% N9030A(140)
 EUT : T10J
 Power Rating : DC 6V
 Test Mode : T×2447.5(S-FHSS)

Data no. : 2
 Ant. pol. : VERTICAL
 Engineer : Ken_chen

| | Freq. (MHz) | Ant. Factor (dB/m) | Cable Loss (dB) | Reading (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Remark |
|---|----------------|--------------------------|-----------------------|-------------------|-------------------------------|--------------------|----------------|--------|
| 1 | 53.28 | 8.61 | 1.50 | 19.13 | 29.24 | 40.00 | 10.76 | Peak |
| 2 | 182.29 | 9.76 | 2.90 | 5.97 | 18.63 | 43.50 | 24.87 | Peak |
| 3 | 580.96 | 18.81 | 6.30 | 4.23 | 29.39 | 46.00 | 16.61 | Peak |

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

Radio Technology: T-FHSS Modulation

Frequency: 2407.500MHz

Site no. : Audix NO.1 Chamber Data no. : 2
 Dis. / Ant. : 3m CBL6112D 33821 Ant. pol. : HORIZONTAL
 Limit : 30M-1G
 Env. / Ins. : 23*C/42% N9030A(140) Engineer : Ken_chen
 EUT : T10J
 Power Rating : DC 6V
 Test Mode : T×2407.5(T-FHSS)

| | Freq. (MHz) | Ant. Factor (dB/m) | Cable Loss (dB) | Reading (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Remark |
|---|----------------|--------------------------|-----------------------|-------------------|-------------------------------|--------------------|----------------|--------|
| 1 | 52.31 | 8.84 | 1.50 | 10.85 | 20.99 | 40.00 | 19.01 | Peak |
| 2 | 143.49 | 11.52 | 2.50 | 12.73 | 26.75 | 43.50 | 16.75 | Peak |
| 3 | 168.71 | 10.05 | 2.80 | 9.38 | 22.23 | 43.50 | 21.27 | Peak |
| 4 | 580.96 | 18.81 | 6.30 | 4.38 | 29.49 | 46.00 | 16.51 | Peak |

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

Site no. : Audix NO.1 Chamber Data no. : 1
 Dis. / Ant. : 3m CBL6112D 33821 Ant. pol. : VERTICAL
 Limit : 30M-1G
 Env. / Ins. : 23*C/42% N9030A(140) Engineer : Ken_chen
 EUT : T10J
 Power Rating : DC 6V
 Test Mode : T×2407.5(T-FHSS)

| | Freq. (MHz) | Ant. Factor (dB/m) | Cable Loss (dB) | Reading (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Remark |
|---|----------------|--------------------------|-----------------------|-------------------|-------------------------------|--------------------|----------------|--------|
| 1 | 123.12 | 12.34 | 2.30 | 12.91 | 27.55 | 43.50 | 15.95 | Peak |
| 2 | 580.96 | 18.81 | 6.30 | 5.45 | 30.56 | 46.00 | 15.44 | Peak |

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

Frequency: 2435.500MHz

Site no. : Audix NO.1 Chamber
 Dis. / Ant. : 3m CBL6112D 33821
 Limit : 30M-1G
 Env. / Ins. : 23*C/42% N9030A(140)
 EUT : T10J
 Power Rating : DC 6V
 Test Mode : Tx2435.5(T-FHSS)

Data no. : 1
 Ant. pol. : HORIZONTAL
 Engineer : Ken_chen

| | Freq. (MHz) | Ant. Factor (dB/m) | Cable Loss (dB) | Reading (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Remark |
|---|----------------|--------------------------|-----------------------|-------------------|-------------------------------|--------------------|----------------|--------|
| 1 | 101.78 | 11.48 | 2.10 | 12.03 | 25.61 | 43.50 | 17.89 | Peak |
| 2 | 143.49 | 11.52 | 2.50 | 12.40 | 26.42 | 43.50 | 17.08 | Peak |
| 3 | 194.90 | 9.90 | 3.00 | 11.04 | 23.94 | 43.50 | 19.56 | Peak |
| 4 | 282.20 | 13.52 | 3.80 | 12.36 | 29.68 | 46.00 | 16.32 | Peak |
| 5 | 580.96 | 18.81 | 6.30 | 6.66 | 31.77 | 46.00 | 14.23 | Peak |

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

Site no. : Audix NO.1 Chamber
 Dis. / Ant. : 3m CBL6112D 33821
 Limit : 30M-1G
 Env. / Ins. : 23*C/42% N9030A(140)
 EUT : T10J
 Power Rating : DC 6V
 Test Mode : Tx2435.5(T-FHSS)

Data no. : 2
 Ant. pol. : VERTICAL
 Engineer : Ken_chen

| | Freq. (MHz) | Ant. Factor (dB/m) | Cable Loss (dB) | Reading (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Remark |
|---|----------------|--------------------------|-----------------------|-------------------|-------------------------------|--------------------|----------------|--------|
| 1 | 112.45 | 12.25 | 2.20 | 9.40 | 23.85 | 43.50 | 19.65 | Peak |
| 2 | 203.63 | 10.35 | 3.10 | 10.40 | 23.85 | 43.50 | 19.65 | Peak |
| 3 | 580.96 | 18.81 | 6.30 | 6.57 | 31.68 | 46.00 | 14.32 | Peak |

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

Frequency: 2467.500MHz

Site no. : Audix NO.1 Chamber Data no. : 1
 Dis. / Ant. : 3m CBL6112D 33821 Ant. pol. : HORIZONTAL
 Limit : 30M-1G
 Env. / Ins. : 23*C/42% N9030A(140) Engineer : Ken_chen
 EUT : T10J
 Power Rating : DC 6V
 Test Mode : Tx2467.5(T-FHSS)

| | Freq. (MHz) | Ant. Factor (dB/m) | Cable Loss (dB) | Reading (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Remark |
|---|----------------|--------------------------|-----------------------|-------------------|-------------------------------|--------------------|----------------|--------|
| 1 | 105.66 | 11.84 | 2.20 | 40.89 | 28.67 | 43.50 | 14.83 | Peak |
| 2 | 143.49 | 11.52 | 2.50 | 38.97 | 26.95 | 43.50 | 16.55 | Peak |
| 3 | 273.47 | 13.50 | 3.70 | 32.39 | 23.87 | 46.00 | 22.13 | Peak |
| 4 | 580.96 | 18.81 | 6.30 | 31.99 | 29.98 | 46.00 | 16.02 | Peak |

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

Site no. : Audix NO.1 Chamber Data no. : 2
 Dis. / Ant. : 3m CBL6112D 33821 Ant. pol. : VERTICAL
 Limit : 30M-1G
 Env. / Ins. : 23*C/42% N9030A(140) Engineer : Ken_chen
 EUT : T10J
 Power Rating : DC 6V
 Test Mode : Tx2467.5(T-FHSS)

| | Freq. (MHz) | Ant. Factor (dB/m) | Cable Loss (dB) | Reading (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Remark |
|---|----------------|--------------------------|-----------------------|-------------------|-------------------------------|--------------------|----------------|--------|
| 1 | 97.90 | 10.92 | 2.10 | 39.01 | 25.73 | 43.50 | 17.77 | Peak |
| 2 | 580.96 | 18.81 | 6.30 | 31.78 | 29.77 | 46.00 | 16.23 | Peak |

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

4.6.2. Above 1GHz Frequency Range Measurement Results

Radio Technology: S-FHSS Modulation

Date of Test : Jan. 16, 2014 Temperature : 23
 EUT : Radio Control Humidity : 42%
 Test Mode : Transmit, Channel: 01, Frequency: 2403.250MHz

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Meter Reading Horizontal (dBμV) | Emission Level Horizontal (dBμV/m) | Limits (dBμV/m) | Margin (dB) |
|--------------------------|-----------------------|-----------------|---------------------------------|------------------------------------|-----------------|-------------|
| * 2248.24 | 28.13 | 6.16 | 19.58 | 53.87 | 74.00 | 20.13 |
| * 2559.04 | 28.93 | 6.57 | 15.66 | 51.16 | 74.00 | 22.84 |
| * 4807.00 | 33.06 | 9.14 | 10.30 | 52.50 | 74.00 | 21.50 |

Remarks: 1. Emission level=Antenna Factor + Cable Loss + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.
 3. "*" means peak value complies with the average limit, we didn't perform measurement in average detector.

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Meter Reading Vertical (dBμV) | Emission Level Vertical (dBμV/m) | Limits (dBμV/m) | Margin (dB) |
|--------------------------|-----------------------|-----------------|-------------------------------|----------------------------------|-----------------|-------------|
| * 2248.24 | 28.13 | 6.16 | 17.04 | 51.33 | 74.00 | 22.67 |
| * 2559.04 | 28.93 | 6.57 | 17.90 | 53.40 | 74.00 | 20.60 |
| * 4807.00 | 33.06 | 9.14 | 10.84 | 53.04 | 74.00 | 20.96 |

Remarks: 1. Emission level=Antenna Factor + Cable Loss + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.
 3. "*" means peak value complies with the average limit (54.00 dBμV/m), we didn't perform measurement in average detector.

Date of Test : Jan. 16, 2014 Temperature : 23
 EUT : Radio Control Humidity : 42%
 Test Mode : Transmit, Channel: 30, Frequency: 2425.000MHz

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Meter Reading Horizontal (dBμV) | Emission Level Horizontal (dBμV/m) | Limits (dBμV/m) | Margin (dB) |
|--------------------------|-----------------------|-----------------|---------------------------------|------------------------------------|-----------------|-------------|
| * 4850.50 | 33.12 | 9.15 | 11.48 | 53.75 | 74.00 | 20.25 |

Remarks: 1. Emission level=Antenna Factor + Cable Loss + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.
 3. "*" means peak value complies with the average limit (54.00 dBμV/m), we didn't perform measurement in average detector.

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Meter Reading Vertical (dBμV) | Emission Level Vertical (dBμV/m) | Limits (dBμV/m) | Margin (dB) |
|--------------------------|-----------------------|-----------------|-------------------------------|----------------------------------|-----------------|-------------|
| 4850.50 | 33.12 | 9.15 | 13.90 | 56.17 | 74.00 | 17.83 |

Remarks: 1. Emission level=Antenna Factor + Cable Loss + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

| Emission Frequency (MHz) | Peak Value (dB/m) | Duty Cycle Correction Factor (dB) | Average Value Vertical (dBμV/m) | Limit (dBμV/m) | Margin (dB) |
|--------------------------|-------------------|-----------------------------------|---------------------------------|----------------|-------------|
| 4850.50 | 56.17 | -30.38 | 25.79 | 54.00 | 28.21 |

Remarks: 1. Duty Cycle Correction Factor = $20\log(\text{Dwell time}/100\text{ms}) = 20\log(3.026\text{ms}/100\text{ms}) = -30.38$
 2. Average value=Peak value+ Duty Cycle Correction Factor

Date of Test : Jan. 16, 2014 Temperature : 23

EUT : Radio Control Humidity : 42%

Test Mode : Transmit, Channel: 60, Frequency: 2447.500MHz

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Meter Reading Horizontal (dBμV) | Emission Level Horizontal (dBμV/m) | Limits (dBμV/m) | Margin (dB) |
|-----------------------------|--------------------------|--------------------|---------------------------------------|--|--------------------|----------------|
| 4895.50 | 33.21 | 9.16 | 16.60 | 58.97 | 74.00 | 15.03 |
| 7342.00 | 36.20 | 11.44 | 20.08 | 67.72 | 74.00 | 6.28 |

Remarks: 1. Emission level=Antenna Factor + Cable Loss + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

| Emission Frequency (MHz) | Peak Value (dB/m) | Duty Cycle Correction Factor (dB) | Average Value Horizontal (dBμV/m) | Limit (dBμV/m) | Margin (dB) |
|-----------------------------|----------------------|--|---|-------------------|----------------|
| 4895.50 | 58.97 | -30.38 | 28.59 | 54.00 | 25.41 |
| 7342.00 | 67.72 | -30.38 | 37.34 | 54.00 | 16.66 |

Remarks: 1. Duty Cycle Correction Factor = $20\log(\text{Dwell time}/100\text{ms}) = 20\log(3.026\text{ms}/100\text{ms}) = -30.38$
 2. Average value=Peak value+ Duty Cycle Correction Factor

Date of Test : Jan. 16, 2014 Temperature : 23

EUT : Radio Control Humidity : 42%

Test Mode : Transmit, Channel: 60, Frequency: 2447.500MHz

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Meter Reading Vertical (dBμV) | Emission Level Vertical (dBμV/m) | Limits (dBμV/m) | Margin (dB) |
|-----------------------------|--------------------------|--------------------|----------------------------------|-------------------------------------|--------------------|----------------|
| 4895.50 | 33.21 | 9.16 | 18.47 | 60.84 | 74.00 | 13.16 |
| 7342.00 | 36.20 | 11.44 | 23.02 | 70.66 | 74.00 | 3.34 |

Remarks: 1. Emission level=Antenna Factor + Cable Loss + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

| Emission Frequency (MHz) | Peak Value (dB/m) | Duty Cycle Correction Factor (dB) | Average Value Vertical (dBμV/m) | Limit (dBμV/m) | Margin (dB) |
|-----------------------------|----------------------|--------------------------------------|------------------------------------|-------------------|----------------|
| 4895.50 | 60.84 | -30.38 | 30.46 | 54.00 | 23.54 |
| 7342.00 | 70.66 | -30.38 | 40.28 | 54.00 | 13.72 |

Remarks: 1. Duty Cycle Correction Factor = $20\log(\text{Dwell time}/100\text{ms}) = 20\log(3.026\text{ms}/100\text{ms}) = -30.38$
 2. Average value=Peak value+ Duty Cycle Correction Factor

Radio Technology: T-FHSS Modulation

Date of Test : Jan. 16, 2014 Temperature : 23

EUT : Radio Control Humidity : 42%

Test Mode : Transmit, Channel: 01, Frequency: 2407.500MHz

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Meter Reading Horizontal (dBμV) | Emission Level Horizontal (dBμV/m) | Limits (dBμV/m) | Margin (dB) |
|-----------------------------|--------------------------|--------------------|---------------------------------------|--|--------------------|----------------|
| * 1327.60 | 25.22 | 4.93 | 14.77 | 44.92 | 74.00 | 29.08 |
| 2251.60 | 28.17 | 6.17 | 20.60 | 54.94 | 74.00 | 19.06 |
| * 4814.50 | 33.06 | 9.14 | 10.99 | 53.19 | 74.00 | 20.81 |

Remarks: 1. Emission level=Antenna Factor + Cable Loss + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.
 3. "*" means peak value complies with the average limit (54.00 dBμV/m), we didn't perform measurement in average detector.

| Emission Frequency (MHz) | Peak Value (dB/m) | Duty Cycle Correction Factor (dB) | Average Value Horizontal (dBμV/m) | Limit (dBμV/m) | Margin (dB) |
|-----------------------------|----------------------|--------------------------------------|---|-------------------|----------------|
| 2251.60 | 54.94 | -36.87 | 18.07 | 54.00 | 35.93 |

Remarks: 1. Duty Cycle Correction Factor = $20\log(\text{Dwell time}/100\text{ms}) = 20\log(1.433\text{ms}/100\text{ms}) = -36.87$
 2. Average value=Peak value+ Duty Cycle Correction Factor

Date of Test : Jan. 16, 2014 Temperature : 23

EUT : Radio Control Humidity : 42%

Test Mode : Transmit, Channel: 01, Frequency: 2407.500MHz

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Meter Reading Vertical (dBμV) | Emission Level Vertical (dBμV/m) | Limits (dBμV/m) | Margin (dB) |
|-----------------------------|--------------------------|--------------------|----------------------------------|-------------------------------------|--------------------|----------------|
| * 1330.96 | 25.22 | 4.93 | 20.31 | 50.46 | 74.00 | 23.54 |
| * 2251.60 | 28.17 | 6.17 | 16.20 | 50.54 | 74.00 | 23.46 |
| 4816.00 | 33.06 | 9.14 | 13.70 | 55.90 | 74.00 | 18.10 |

- Remarks: 1. Emission level=Antenna Factor + Cable Loss + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.
 3. "*" means peak value complies with the average limit (54.00 dBμV/m), we didn't perform measurement in average detector.

| Emission Frequency (MHz) | Peak Value (dB/m) | Duty Cycle Correction Factor (dB) | Average Value Vertical (dBμV/m) | Limit (dBμV/m) | Margin (dB) |
|-----------------------------|----------------------|--------------------------------------|------------------------------------|-------------------|----------------|
| 4816.00 | 55.90 | -36.87 | 19.03 | 54.00 | 34.97 |

- Remarks: 1. Duty Cycle Correction Factor = $20\log(\text{Dwell time}/100\text{ms}) = 20\log(1.433\text{ms}/100\text{ms}) = -36.87$
 2. Average value=Peak value+ Duty Cycle Correction Factor

Date of Test : Jan. 16, 2014 Temperature : 23

EUT : Radio Control Humidity : 42%

Test Mode : Transmit, Channel: 15, Frequency: 2435.500MHz

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Meter Reading Horizontal (dBμV) | Emission Level Horizontal (dBμV/m) | Limits (dBμV/m) | Margin (dB) |
|-----------------------------|--------------------------|--------------------|---------------------------------------|--|--------------------|----------------|
| 4871.50 | 33.18 | 9.15 | 14.55 | 56.88 | 74.00 | 17.12 |

Remarks: 1. Emission level=Antenna Factor + Cable Loss + Reading.
2. The emission levels that are 20dB below the official limit are not reported.

| Emission Frequency (MHz) | Peak Value (dB/m) | Duty Cycle Correction Factor (dB) | Average Value Horizontal (dBμV/m) | Limit (dBμV/m) | Margin (dB) |
|-----------------------------|----------------------|--|---|-------------------|----------------|
| 4871.50 | 56.88 | -36.87 | 20.01 | 54.00 | 33.99 |

Remarks: 1. Duty Cycle Correction Factor = $20\log(\text{Dwell time}/100\text{ms}) = 20\log(1.433\text{ms}/100\text{ms}) = -36.87$
2. Average value=Peak value+ Duty Cycle Correction Factor

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Meter Reading Vertical (dBμV) | Emission Level Vertical (dBμV/m) | Limits (dBμV/m) | Margin (dB) |
|-----------------------------|--------------------------|--------------------|-------------------------------------|--|--------------------|----------------|
| 4871.50 | 33.18 | 9.15 | 18.42 | 60.75 | 74.00 | 13.25 |

Remarks: 1. Emission level=Antenna Factor + Cable Loss + Reading.
2. The emission levels that are 20dB below the official limit are not reported.

| Emission Frequency (MHz) | Peak Value (dB/m) | Duty Cycle Correction Factor (dB) | Average Value Vertical (dBμV/m) | Limit (dBμV/m) | Margin (dB) |
|-----------------------------|----------------------|--|---------------------------------------|-------------------|----------------|
| 4871.50 | 60.75 | -36.87 | 23.88 | 54.00 | 30.12 |

Remarks: 1. Duty Cycle Correction Factor = $20\log(\text{Dwell time}/100\text{ms}) = 20\log(1.433\text{ms}/100\text{ms}) = -36.87$
2. Average value=Peak value+ Duty Cycle Correction Factor

Date of Test : Jan. 16, 2014 Temperature : 23

EUT : Radio Control Humidity : 42%

Test Mode : Transmit, Channel: 31, Frequency: 2467.500MHz

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Meter Reading Horizontal (dBμV) | Emission Level Horizontal (dBμV/m) | Limits (dBμV/m) | Margin (dB) |
|-----------------------------|--------------------------|--------------------|---------------------------------------|--|--------------------|----------------|
| 4934.50 | 33.28 | 9.11 | 49.58 | 57.38 | 74.00 | 16.62 |

Remarks: 1. Emission level=Antenna Factor + Cable Loss + Reading.
2. The emission levels that are 20dB below the official limit are not reported.

| Emission Frequency (MHz) | Peak Value (dB/m) | Duty Cycle Correction Factor (dB) | Average Value Horizontal (dBμV/m) | Limit (dBμV/m) | Margin (dB) |
|-----------------------------|----------------------|--|---|-------------------|----------------|
| 4934.50 | 57.38 | -36.87 | 20.51 | 54.00 | 33.49 |

Remarks: 1. Duty Cycle Correction Factor = $20\log(\text{Dwell time}/100\text{ms}) = 20\log(1.433\text{ms}/100\text{ms}) = -36.87$
2. Average value=Peak value+ Duty Cycle Correction Factor

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Meter Reading Vertical (dBμV) | Emission Level Vertical (dBμV/m) | Limits (dBμV/m) | Margin (dB) |
|-----------------------------|--------------------------|--------------------|-------------------------------------|--|--------------------|----------------|
| 4934.50 | 33.28 | 9.11 | 54.10 | 61.90 | 74.00 | 12.10 |

Remarks: 1. Emission level=Antenna Factor + Cable Loss + Reading.
2. The emission levels that are 20dB below the official limit are not reported.

| Emission Frequency (MHz) | Peak Value (dB/m) | Duty Cycle Correction Factor (dB) | Average Value Vertical (dBμV/m) | Limit (dBμV/m) | Margin (dB) |
|-----------------------------|----------------------|--|---------------------------------------|-------------------|----------------|
| 4934.50 | 61.90 | -36.87 | 25.03 | 54.00 | 28.97 |

Remarks: 1. Duty Cycle Correction Factor = $20\log(\text{Dwell time}/100\text{ms}) = 20\log(1.433\text{ms}/100\text{ms}) = -36.87$
2. Average value=Peak value+ Duty Cycle Correction Factor

4.6.3. Restricted Bands Measurement Results


Radio Technology: S-FHSS Modulation

Date of Test : Jan. 16, 2014 Temperature : 23
 EUT : Radio Control Humidity : 42%
 Test Mode : Transmit, Channel: 01, Frequency: 2403.250MHz



AUDIX Technology Corporation
 EMC Department
 No.53-11, Dingfu, Linkou Dist., New Taipei City,
 Taiwan R.O.C. Post Code:24443
 Tel:+886-2-26092133 Fax:+886-2-26099303
 Email:ttmc@ttmc.com

Data: 10 File: C:\Users\audix\Desktop\未完成\C1M1312188複製 -C1M1312188(Futaba)\ofb-t.EM6

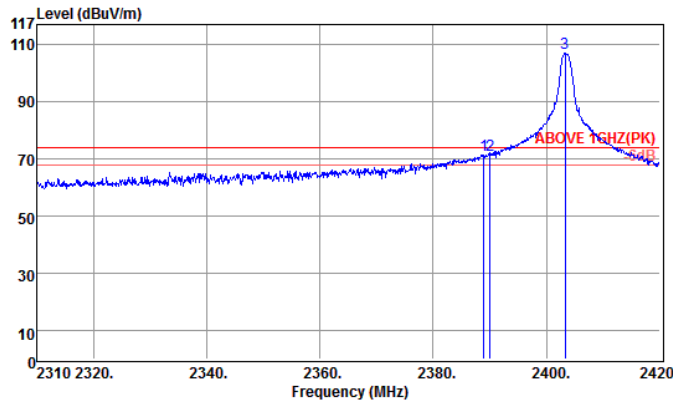

Site no. : Audix NO.1 Chamber Data no. : 10
 Dis. / Ant. : 3m 3115(4927) Ant. pol. : HORIZONTAL
 Limit : ABOVE 1GHZ(PK)
 Env. / Ins. : 23°C/42% N9030A(140) Engineer : Ken_chen
 EUT : T10J
 Power Rating : DC 6V
 Test Mode : 1x2403.25(S-FHSS)

| | Freq. (MHz) | Ant. Factor (dB/m) | Cable Loss (dB) | Reading (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Remark |
|-----|-------------|--------------------|-----------------|----------------|-------------------------|-----------------|-------------|--------|
| 1 | 2388.98 | 28.47 | 6.34 | 36.49 | 71.30 | 74.00 | 2.70 | Peak |
| 2 | 2390.08 | 28.47 | 6.34 | 36.49 | 71.30 | 74.00 | 2.70 | Peak |
| @ 3 | 2403.28 | 28.51 | 6.36 | 71.93 | 106.80 | 74.00 | -32.80 | Peak |

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.
 3. "@" The field strength of emission appearing within Part 15.205(a) shall not exceed the limits shown in section 15.209.

| Emission Frequency (MHz) | Peak Value (dB/m) | Duty Cycle Correction Factor (dB) | Average Value Horizontal (dBμV/m) | Limit (dBμV/m) | Margin (dB) |
|--------------------------|-------------------|-----------------------------------|-----------------------------------|----------------|-------------|
| 2388.98 | 71.30 | -30.38 | 40.92 | 54.00 | 13.08 |
| 2390.08 | 71.30 | -30.38 | 40.92 | 54.00 | 13.08 |


Remarks: 1. Duty Cycle Correction Factor=20log (dwell time/100ms)=
 20log (3.026ms/100ms) = -30.38
 2. Average value=Peak value+ Duty Cycle Correction Factor
 3. Low frequency section (spurious in the restricted band 2310-2420MHz).

Date of Test : Jan. 16, 2014 Temperature : 23
 EUT : Radio Control Humidity : 42%
 Test Mode : Transmit, Channel: 01, Frequency: 2403.250MHz



AUDIX Technology Corporation
 EMC Department
 No.53-11, Dingfu, Linkou Dist., New Taipei City,
 Taiwan R.O.C. Post Code:24443
 Tel:+886-2-26092133 Fax:+886-2-26099303
 Email:ttenc@ttenc.com.

Data: 9 File: C:\Users\audix\Desktop\未完成\C1M1312188複製-C1M1312188(Futaba)\ofb-t.EM6

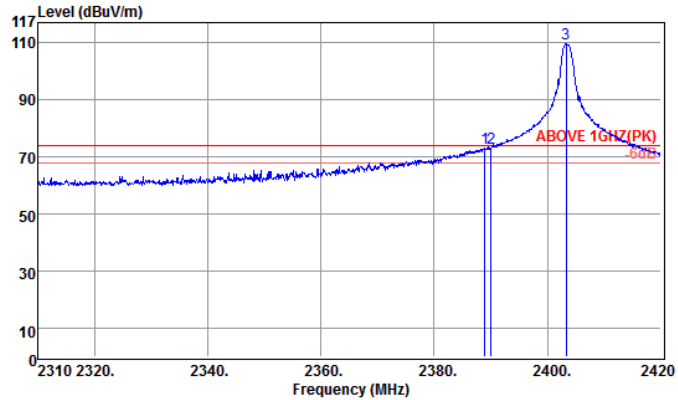

Site no. : Audix NO.1 Chamber Data no. : 9
 Dis. / Ant. : 3m 3115(4927) Ant. pol. : VERTICAL
 Limit : ABOVE 1GHZ(PK)
 Env. / Ins. : 23°C/42% N9030A(140) Engineer : Ken_chen
 EUT : T10J
 Power Rating : DC 6W
 Test Mode : Tx2403.25(S-FHSS)

| | Freq. (MHz) | Ant. Factor (dB/m) | Cable Loss (dB) | Reading (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Remark |
|-----|-------------|--------------------|-----------------|----------------|-------------------------|-----------------|-------------|--------|
| 1 | 2388.98 | 28.47 | 6.34 | 38.28 | 73.09 | 74.00 | 0.91 | Peak |
| 2 | 2390.08 | 28.47 | 6.34 | 38.18 | 72.99 | 74.00 | 1.01 | Peak |
| @ 3 | 2403.28 | 28.51 | 6.36 | 74.55 | 109.42 | 74.00 | -35.42 | Peak |

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.
 3. '@' The field strength of emission appearing within Part 15.205(a) shall not exceed the limits shown in section 15.209.

| Emission Frequency (MHz) | Peak Value (dB/m) | Duty Cycle Correction Factor (dB) | Average Value Vertical (dBμV/m) | Limit (dBμV/m) | Margin (dB) |
|--------------------------|-------------------|-----------------------------------|---------------------------------|----------------|-------------|
| 2388.98 | 73.09 | -30.38 | 42.71 | 54.00 | 11.29 |
| 2390.08 | 72.99 | -30.38 | 42.61 | 54.00 | 11.39 |


Remarks: 1. Duty Cycle Correction Factor=20log (dwell time/100ms)=
 20log (3.026ms/100ms) = -30.38
 2. Average value=Peak value+ Duty Cycle Correction Factor
 3. Low frequency section (spurious in the restricted band 2310-2420MHz).

Date of Test : Jan. 16, 2014 Temperature : 23
 EUT : Radio Control Humidity : 42%
 Test Mode : Transmit, Channel: 60, Frequency: 2447.500MHz



AUDIX Technology Corporation
 EMC Department
 No.53-11, Dingfu, Linkou Dist., New Taipei City,
 Taiwan R.O.C. Post Code:24443
 Tel:+886-2-26092133 Fax:+886-2-26099303
 Email:temc@temc.com.

Data: 11 File: C:\Users\audix\Desktop\未完成\C1M1312188複製_C1M1312188(Futaba)\ofb-t.EM6

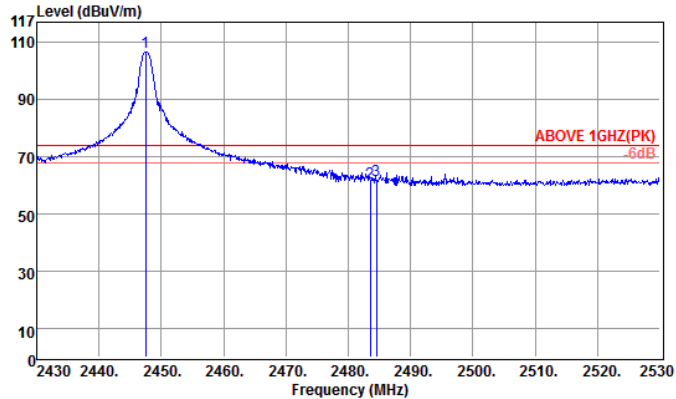

Site no. : Audix NO.1 Chamber Data no. : 11
 Dis. / Ant. : 3m 3115(4927) Ant. pol. : HORIZONTAL
 Limit : ABOVE 1GHZ(PK)
 Env. / Ins. : 23°C/42% N9030A(140) Engineer : Ken_chen
 EUT : T10J
 Power Rating : DC 6W
 Test Mode : Tx2447.5(S-FHSS)

| | Freq. (MHz) | Ant. Factor (dB/m) | Cable Loss (dB) | Reading (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Remark |
|-----|-------------|--------------------|-----------------|----------------|-------------------------|-----------------|-------------|--------|
| @ 1 | 2447.50 | 28.59 | 6.41 | 71.57 | 108.57 | 74.00 | -32.57 | Peak |
| 2 | 2483.50 | 28.66 | 6.45 | 25.85 | 60.96 | 74.00 | 13.04 | Peak |
| 3 | 2484.50 | 28.66 | 6.45 | 26.71 | 61.82 | 74.00 | 12.18 | Peak |

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.
 3. '@' The field strength of emission appearing within Part 15.205(a) shall not exceed the limits shown in section 15.209.

| Emission Frequency (MHz) | Peak Value (dB/m) | Duty Cycle Correction Factor (dB) | Average Value Horizontal (dBμV/m) | Limit (dBμV/m) | Margin (dB) |
|--------------------------|-------------------|-----------------------------------|-----------------------------------|----------------|-------------|
| 2483.50 | 60.96 | -30.38 | 30.58 | 54.00 | 23.42 |
| 2484.50 | 61.82 | -30.38 | 31.44 | 54.00 | 22.56 |


Remarks: 1. Duty Cycle Correction Factor=20log (dwell time/100ms)=
 20log (3.062ms/100ms) = -30.38
 2. Average value=Peak value+ Duty Cycle Correction Factor
 3. Low frequency section (spurious in the restricted band 2430-2530MHz).

Date of Test : Jan. 16, 2014 Temperature : 23
 EUT : Radio Control Humidity : 42%
 Test Mode : Transmit, Channel: 60, Frequency: 2447.500MHz



AUDIX Technology Corporation
 EMC Department
 No.53-11, Dingfu, Linkou Dist., New Taipei City,
 Taiwan R.O.C. Post Code:24443
 Tel:+886-2-26092133 Fax:+886-2-26099303
 Email:ttenc@ttenc.com.

Data: 12 File: C:\Users\audix\Desktop\未完成\C1M1312188複製_C1M1312188(Futaba)\ofb-t.EM6

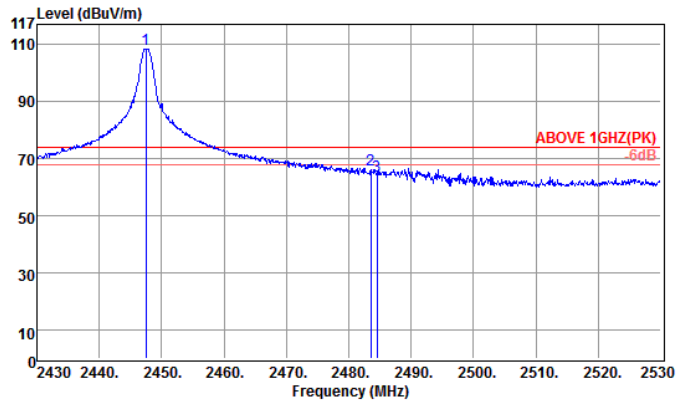

Site no. : Audix NO.1 Chamber Data no. : 12
 Dis. / Ant. : 3m 3115(4927) Ant. pol. : VERTICAL
 Limit : ABOVE 1GHZ(PK)
 Env. / Ins. : 23°C/42% N9030A(140) Engineer : Ken_chen
 EUT : T10J
 Power Rating : DC 6V
 Test Mode : Tx2447.5(S-FHSS)

| | Freq. (MHz) | Ant. Factor (dB/m) | Cable Loss (dB) | Reading (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Remark |
|-----|-------------|--------------------|-----------------|----------------|-------------------------|-----------------|-------------|--------|
| @ 1 | 2447.50 | 28.58 | 6.41 | 73.52 | 108.52 | 74.00 | -34.52 | Peak |
| 2 | 2483.50 | 28.68 | 6.45 | 31.06 | 66.17 | 74.00 | 7.83 | Peak |
| 3 | 2484.50 | 28.68 | 6.45 | 28.73 | 63.84 | 74.00 | 10.16 | Peak |

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.
 3. '@' The field strength of emission appearing within Part 15.205(a) shall not exceed the limits shown in section 15.209.

| Emission Frequency (MHz) | Peak Value (dB/m) | Duty Cycle Correction Factor (dB) | Average Value Vertical (dBμV/m) | Limit (dBμV/m) | Margin (dB) |
|--------------------------|-------------------|-----------------------------------|---------------------------------|----------------|-------------|
| 2483.50 | 66.17 | -30.38 | 35.79 | 54.00 | 18.21 |
| 2484.50 | 63.84 | -30.38 | 33.46 | 54.00 | 20.54 |

Remarks: 1. Duty Cycle Correction Factor=20log (dwell time/100ms)=
 20log (3.026ms/100ms) = -30.38
 2. Average value=Peak value+ Duty Cycle Correction Factor
 3. Low frequency section (spurious in the restricted band 2430-2530MHz).


Radio Technology: T-FHSS Modulation

Date of Test : Jan. 16, 2014 Temperature : 23
 EUT : Radio Control Humidity : 42%
 Test Mode : Transmit, Channel: 01, Frequency: 2407.500MHz



AUDIX Technology Corporation
 EMC Department
 No.53-11, Dingfu, Linkou Dist., New Taipei City,
 Taiwan R.O.C. Post Code:24443
 Tel:+886-2-26092133 Fax:+886-2-26099303
 Email:ttmc@ttmc.com

Data: 6 File: C:\Users\audix\Desktop\未完成\C1M1312188複製 -C1M1312188(Futaba)\ofb-L.EM6

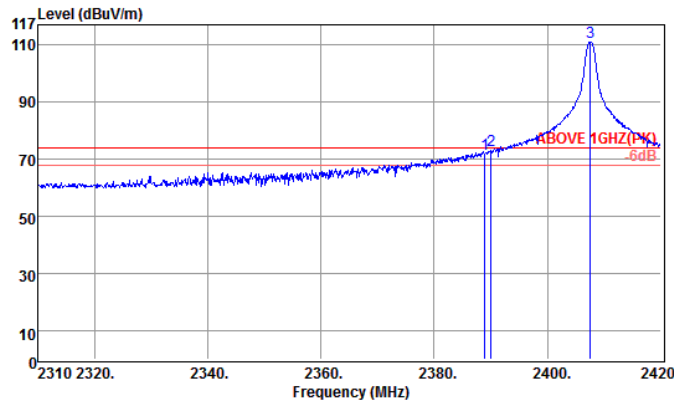

Site no. : Audix NO.1 Chamber Data no. : 6
 Dis. / Ant. : 3m 3115(4927) Ant. pol. : HORIZONTAL
 Limit : ABOVE 1GHZ(PK)
 Env. / Ins. : 23°C/42% N9030A(140) Engineer : Ken_chen
 EUT : T10J
 Power Rating : DC 6V
 Test Mode : Tx2407.5(T-FHSS)

| | Freq. (MHz) | Ant. Factor (dB/m) | Cable Loss (dB) | Reading (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Remark |
|-----|-------------|--------------------|-----------------|----------------|-------------------------|-----------------|-------------|--------|
| 1 | 2388.98 | 28.47 | 6.34 | 37.15 | 71.96 | 74.00 | 2.04 | Peak |
| 2 | 2390.08 | 28.47 | 6.34 | 38.25 | 73.06 | 74.00 | 0.94 | Peak |
| @ 3 | 2407.57 | 28.51 | 6.36 | 76.18 | 111.05 | 74.00 | -37.05 | Peak |

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.
 3. '@' The field strength of emission appearing within Part 15.205(a) shall not exceed the limits shown in section 15.209.

| Emission Frequency (MHz) | Peak Value (dB/m) | Duty Cycle Correction Factor (dB) | Average Value Horizontal (dBμV/m) | Limit (dBμV/m) | Margin (dB) |
|--------------------------|-------------------|-----------------------------------|-----------------------------------|----------------|-------------|
| 2388.98 | 71.96 | -36.87 | 35.09 | 54.00 | 18.91 |
| 2390.08 | 73.06 | -36.87 | 36.19 | 54.00 | 17.81 |


Remarks: 1. Duty Cycle Correction Factor=20log (dwell time/100ms)=
 20log (1.433ms/100ms) = -36.87
 2. Average value=Peak value+ Duty Cycle Correction Factor
 3. Low frequency section (spurious in the restricted band 2310-2420MHz).

Date of Test : Jan. 16, 2014 Temperature : 23
 EUT : Radio Control Humidity : 42%
 Test Mode : Transmit, Channel: 31, Frequency: 2407.500MHz



AUDIX Technology Corporation
 EMC Department
 No.53-11, Dingfu, Linkou Dist., New Taipei City,
 Taiwan, R.O.C. Post Code:24443
 Tel:+886-2-26092133 Fax:+886-2-26099303
 Email:ttenc@ttenc.com.

Data: 5 File: C:\Users\audix\Desktop\未完成\C1M1312188複製 -C1M1312188(Futaba)\ofb-LEM6

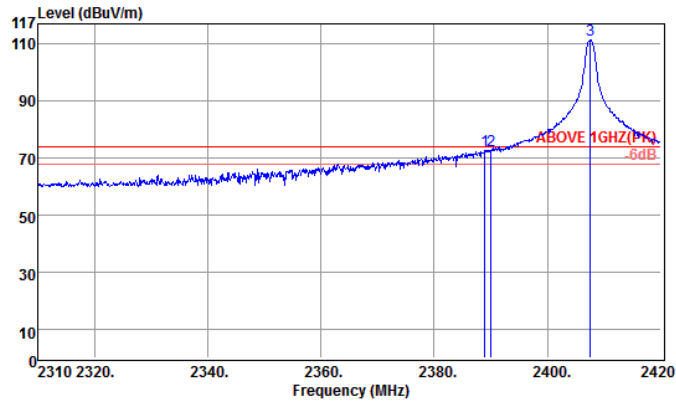

Site no. : Audix NO.1 Chamber Data no. : 5
 Dis. / Ant. : 3m 3115(4927) Ant. pol. : VERTICAL
 Limit : ABOVE 1GHZ(PK)
 Env. / Ins. : 23°C/42% N9030A(140) Engineer : Ken_chen
 EUT : T10J
 Power Rating : DC 6V
 Test Mode : T×2407.5(T-FHSS)

| | Freq. (MHz) | Ant. Factor (dB/m) | Cable Loss (dB) | Reading (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Remark |
|-----|-------------|--------------------|-----------------|----------------|-------------------------|-----------------|-------------|--------|
| 1 | 2388.98 | 28.47 | 6.34 | 37.74 | 72.55 | 74.00 | 1.45 | Peak |
| 2 | 2390.08 | 28.47 | 6.34 | 37.71 | 72.52 | 74.00 | 1.48 | Peak |
| @ 3 | 2407.57 | 28.51 | 6.36 | 76.33 | 111.20 | 74.00 | -37.20 | Peak |

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.
 3. '@' The field strength of emission appearing within Part 15.205(a) shall not exceed the limits shown in section 15.209.

| Emission Frequency (MHz) | Peak Value (dB/m) | Duty Cycle Correction Factor (dB) | Average Value Vertical (dBμV/m) | Limit (dBμV/m) | Margin (dB) |
|--------------------------|-------------------|-----------------------------------|---------------------------------|----------------|-------------|
| 2388.98 | 72.55 | -36.87 | 35.68 | 54.00 | 18.32 |
| 2390.08 | 72.52 | -36.87 | 35.65 | 54.00 | 18.35 |


Remarks: 1. Duty Cycle Correction Factor=20log (dwell time/100ms)=
 20log (1.433ms/100ms) = -36.87
 2. Average value=Peak value+ Duty Cycle Correction Factor
 3. Low frequency section (spurious in the restricted band 2310-2420MHz).

Date of Test : Jan. 16, 2014 Temperature : 23
 EUT : Radio Control Humidity : 42%
 Test Mode : Transmit, Channel: 31, Frequency: 2467.500MHz



AUDIX Technology Corporation
 EMC Department
 No.53-11, Dingfu, Linkou Dist., New Taipei City,
 Taiwan R.O.C. Post Code:24443
 Tel:+886-2-26092133 Fax:+886-2-26099303
 Email:ttenc@ttenc.com.

Data: 7 File: C:\Users\audix\Desktop\未完成\C1M1312188複製_C1M1312188(Futaba)\ofb-t.EM6

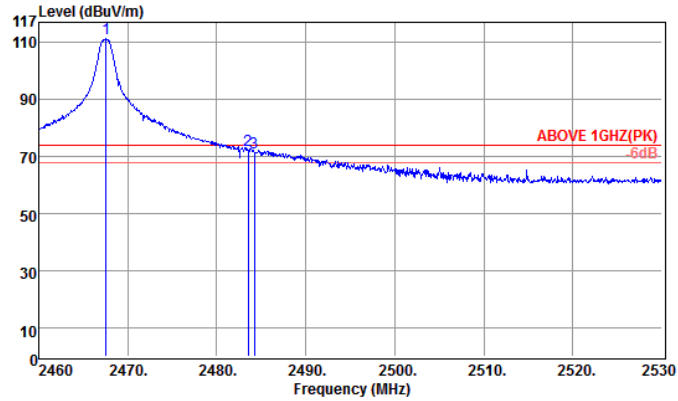

Site no. : Audix NO.1 Chamber Data no. : 7
 Dis. / Ant. : 3m 3115(4927) Ant. pol. : HORIZONTAL
 Limit : ABOVE 1GHZ(PK)
 Env. / Ins. : 23°C/42% M9030A(140) Engineer : Ken_chen
 EUT : T10J
 Power Rating : DC 6V
 Test Mode : Tx2467.5(I-FHSS)

| | Freq. (MHz) | Ant. Factor (dB/m) | Cable Loss (dB) | Reading (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Remark |
|-----|-------------|--------------------|-----------------|----------------|-------------------------|-----------------|-------------|--------|
| @ 1 | 2467.56 | 28.82 | 6.43 | 76.08 | 111.13 | 74.00 | -37.13 | Peak |
| 2 | 2483.52 | 28.86 | 6.45 | 37.28 | 72.39 | 74.00 | 1.61 | Peak |
| 3 | 2484.22 | 28.86 | 6.45 | 36.33 | 71.44 | 74.00 | 2.56 | Peak |

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.
 3. '@' The field strength of emission appearing within Part 15.205(a) shall not exceed the limits shown in section 15.209.

| Emission Frequency (MHz) | Peak Value (dB/m) | Duty Cycle Correction Factor (dB) | Average Value Horizontal (dBμV/m) | Limit (dBμV/m) | Margin (dB) |
|--------------------------|-------------------|-----------------------------------|-----------------------------------|----------------|-------------|
| 2483.52 | 72.39 | -36.87 | 35.52 | 54.00 | 18.48 |
| 2484.22 | 71.44 | -36.87 | 34.57 | 54.00 | 19.43 |


Remarks: 1. Duty Cycle Correction Factor=20log (dwell time/100ms)=
 20log (1.433ms/100ms) = -36.87
 2. Average value=Peak value+ Duty Cycle Correction Factor
 3. Low frequency section (spurious in the restricted band 2460-2530MHz).

Date of Test : Jan. 16, 2014 Temperature : 23
 EUT : Radio Control Humidity : 42%
 Test Mode : Transmit, Channel: 15, Frequency: 2467.500MHz



AUDIX Technology Corporation
 EMC Department
 No.53-11, Dingfu, Linkou Dist., New Taipei City,
 Taiwan R.O.C. Post Code:24443
 Tel:+886-2-26092133 Fax:+886-2-26099303
 Email:temc@temc.com

Data: 8 File: C:\Users\audix\Desktop\未完成\C1M1312188複製 -C1M1312188(Futaba)\ofb-t.EM6

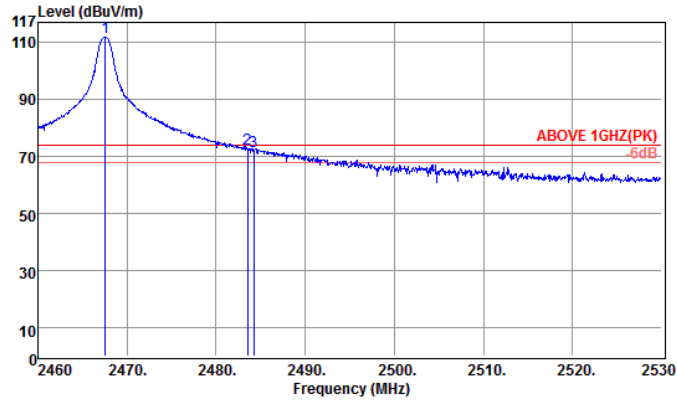

Site no. : Audix NO.1 Chamber Data no. : 8
 Dis. / Ant. : 3m 3115(4927) Ant. pol. : VERTICAL
 Limit : ABOVE 1GHZ(PK)
 Env. / Ins. : 23°C/42% N9030A(140) Engineer : Ken_chen
 EUT : T10J
 Power Rating : DC 6V
 Test Mode : Tx2467.5(I-FHSS)

| | Freq. (MHz) | Ant. Factor (dB/m) | Cable Loss (dB) | Reading (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Remark |
|-----|-------------|--------------------|-----------------|----------------|-------------------------|-----------------|-------------|--------|
| @ 1 | 2467.56 | 28.62 | 6.43 | 76.69 | 111.74 | 74.00 | -37.74 | Peak |
| 2 | 2483.52 | 28.66 | 6.45 | 37.49 | 72.60 | 74.00 | 1.40 | Peak |
| 3 | 2484.22 | 28.66 | 6.45 | 36.80 | 71.91 | 74.00 | 2.09 | Peak |

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.
 3. '@' The field strength of emission appearing within Part 15.205(a) shall not exceed the limits shown in section 15.209.

| Emission Frequency (MHz) | Peak Value (dB/m) | Duty Cycle Correction Factor (dB) | Average Value Vertical (dBμV/m) | Limit (dBμV/m) | Margin (dB) |
|--------------------------|-------------------|-----------------------------------|---------------------------------|----------------|-------------|
| 2483.52 | 72.60 | -36.87 | 35.73 | 54.00 | 18.27 |
| 2484.22 | 71.91 | -36.87 | 35.04 | 54.00 | 18.96 |

Remarks: 1. Duty Cycle Correction Factor=20log (dwell time/100ms)=
 20log (1.433ms/100ms) = -36.87
 2. Average value=Peak value+ Duty Cycle Correction Factor
 3. Low frequency section (spurious in the restricted band 2460-2530MHz).


5. 20dB BANDWIDTH MEASUREMENT

5.1. Test Equipment

The following test equipment was used during the 20dB bandwidth measurement:

| Item | Type | Manufacturer | Model No. | Serial No. | Last Cal. | Next Cal. |
|------|-------------------|--------------|------------|------------|--------------|--------------|
| 1. | Spectrum Analyzer | Agilent | N9030A-544 | US51350140 | Jul. 30, 13' | Jul. 29, 14' |
| 2. | DC Power Supply | TOP WARD | 3303A | 721773 | N/A | N/A |

5.2. Block Diagram of Test Setup

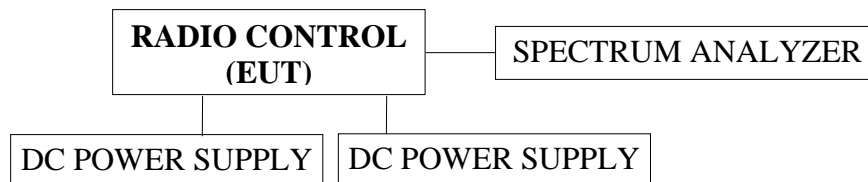

5.3. Specification Limits (§15.247(a)(1))

Alternatively, frequency hopping systems operating in the 2400-2483.5MHz band may have hopping channel carrier frequencies that are separated by 25kHz or two-thirds of the 20dB bandwidth of the hopping channel, whichever is greater.

5.4. Operating Condition of EUT

- 5.4.1. Set up the EUT and simulator as shown on 4.2.
- 5.4.2. To turn on the power of all equipment.
- 5.4.3. EUT (Radio Control) was on transmitting frequency function during the testing.

5.5. Test Procedure

The transmitter output was connected to the spectrum analyzer. The RBW of the fundamental frequency was measure by spectrum analyzer 1% of the 20dB bandwidth and the setting equal to RBW and VBW is equal to RBW. The 20dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 20dB.

The measurement guideline was according to FCC Public Notice DA 00-705.

5.6. Test Results

PASSED. All the test results are attached in next pages.
(ANT B was measured for having worst performance.)


Test Date : Jan. 08, 2013 Temperature : 24 Humidity : 50%

5.6.1. Radio Technology: S-FHSS Modulation


| No. | Channel | Test Frequency | 20dB Bandwidth | 2/3 (20dB Bandwidth) |
|-----|---------|----------------|----------------|-------------------------|
| 1. | 01 | 2403.250MHz | 267kHz | 178kHz |
| 2. | 30 | 2425.000MHz | 267kHz | 178kHz |
| 3. | 60 | 2447.500MHz | 267kHz | 178kHz |

The maximum two-thirds of the 20dB bandwidth shall be at maximum 178kHz.


Channel 01, Frequency: 2403.250MHz

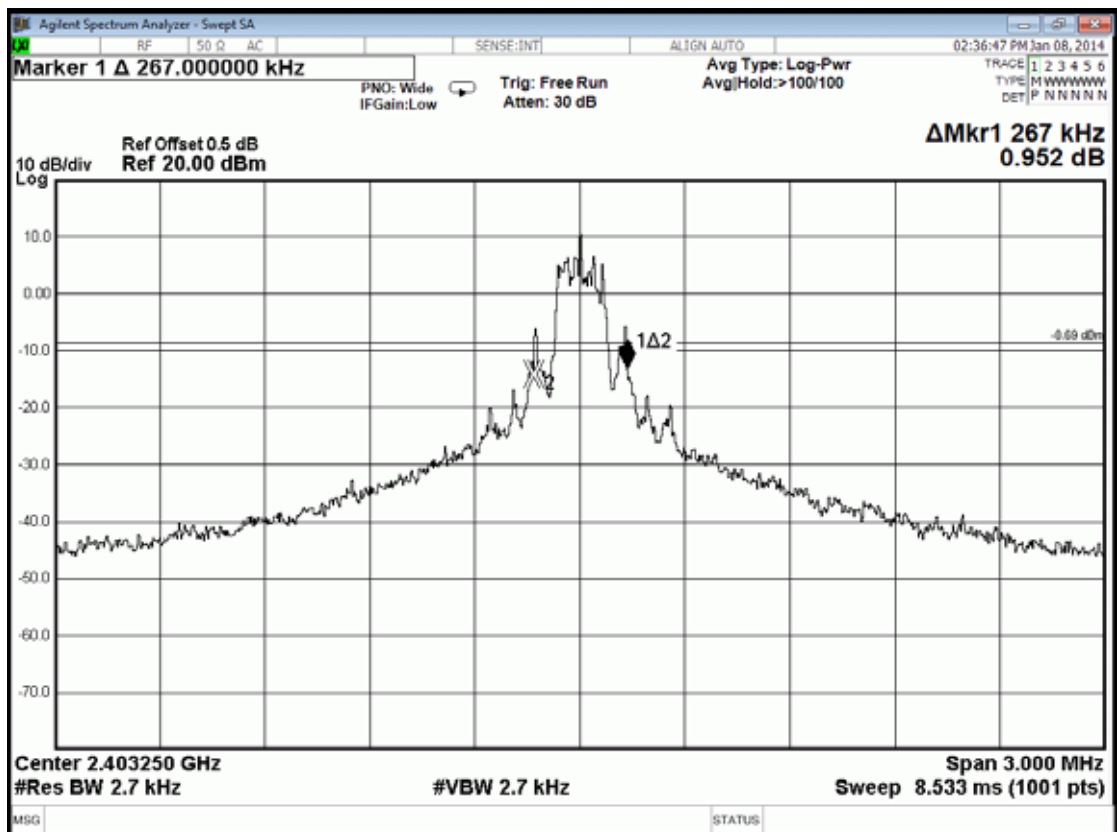

Channel 30, Frequency: 2425.000MHz

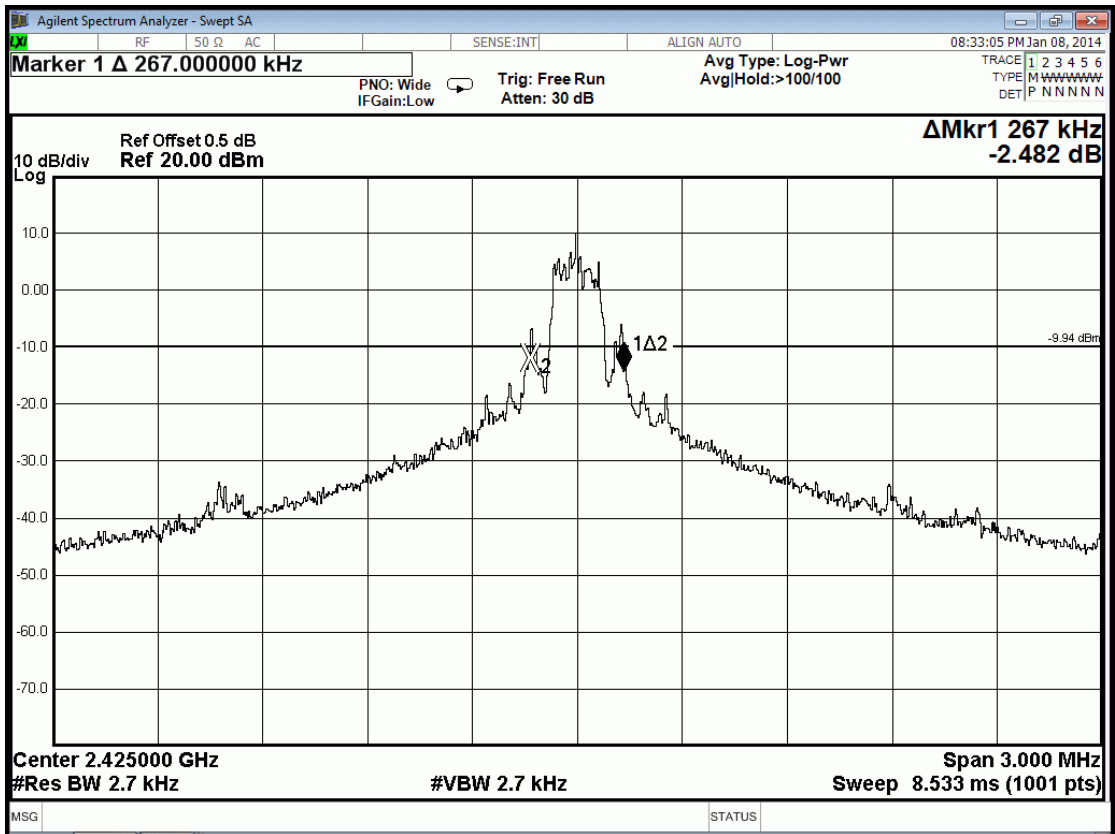

Channel 60, Frequency: 2447.500MHz

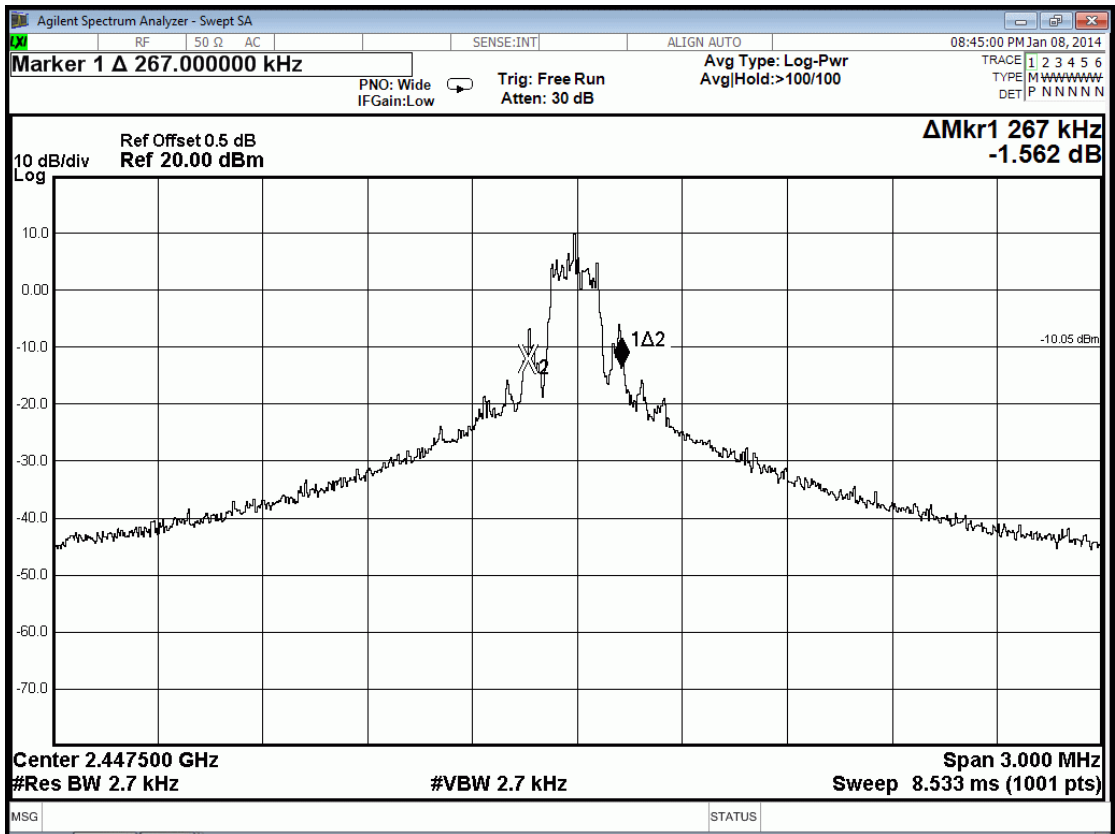


5.6.2. Radio Technology: FHSS Modulation


| No. | Channel | Test Frequency | 20dB Bandwidth | 2/3 (20dB Bandwidth) |
|-----|---------|----------------|----------------|-------------------------|
| 1. | 01 | 2407.500MHz | 267kHz | 178kHz |
| 2. | 15 | 2435.500MHz | 267kHz | 178kHz |
| 3. | 31 | 2467.500MHz | 267kHz | 178kHz |

The maximum two-thirds of the 20dB bandwidth shall be at maximum 178kHz.


Channel 01, Frequency: 2407.500MHz

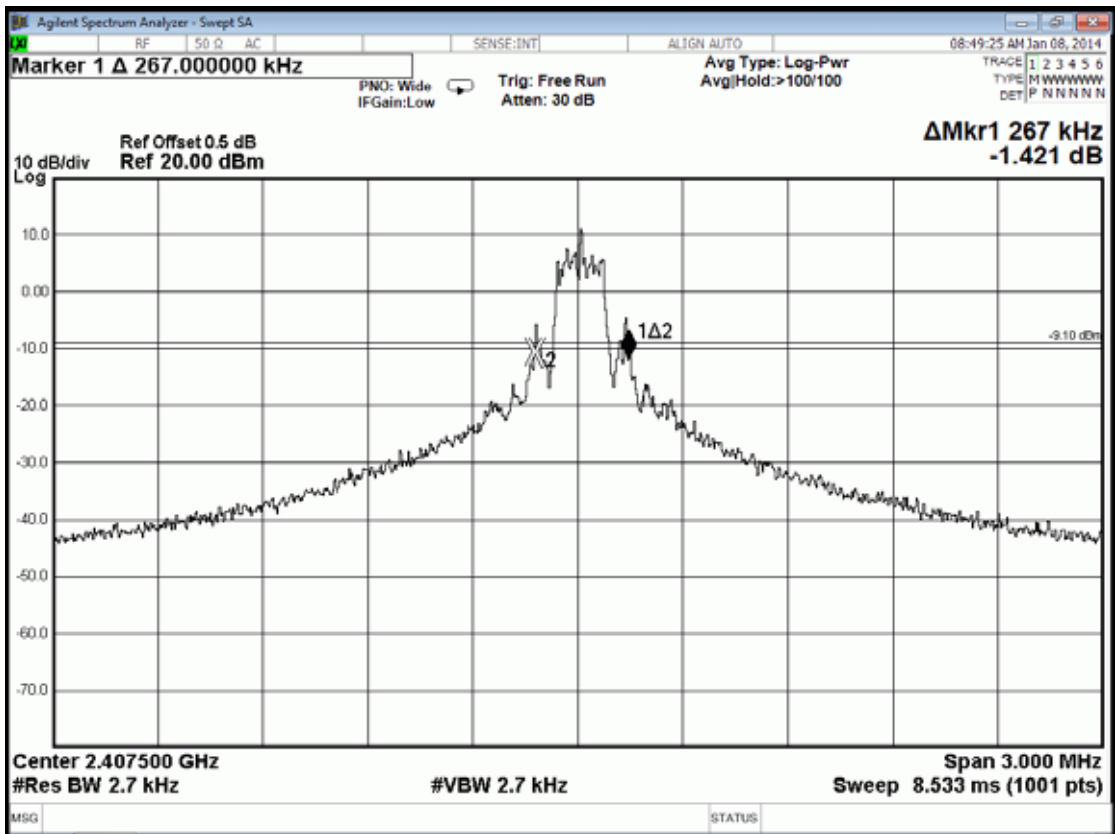

Channel 30, Frequency: 2435.500MHz

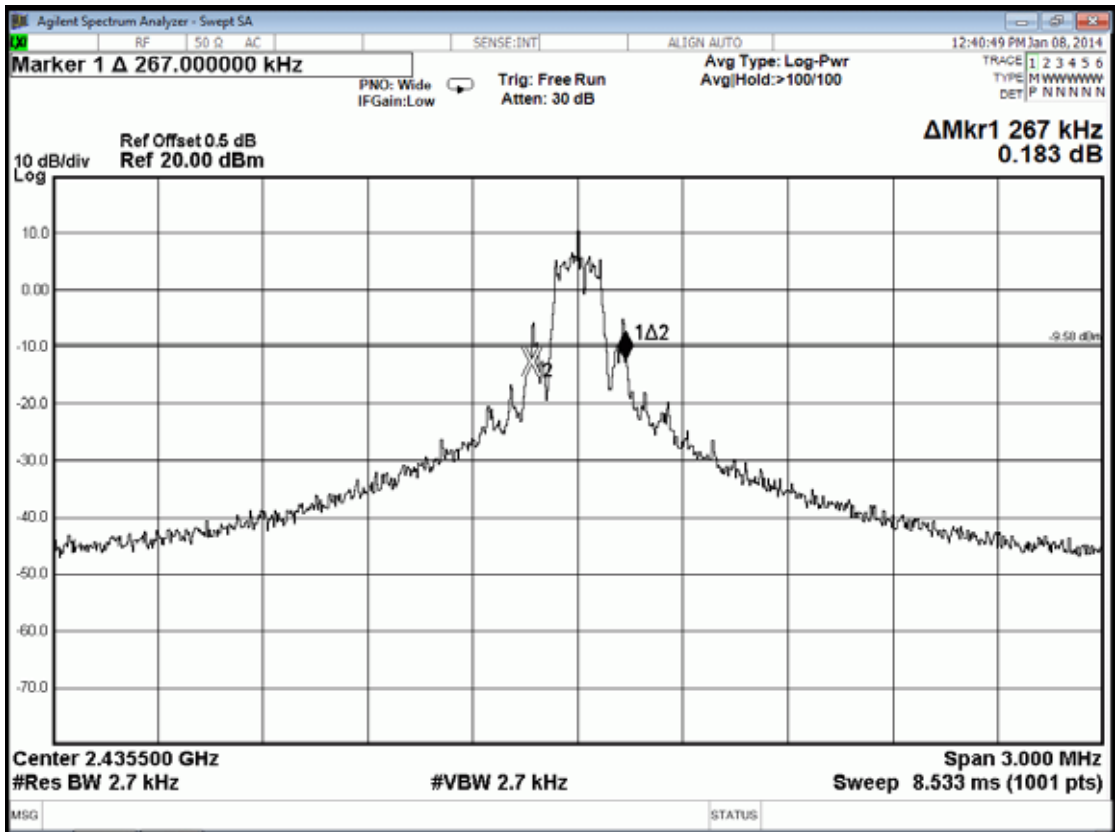

Channel 60, Frequency: 2467.500MHz

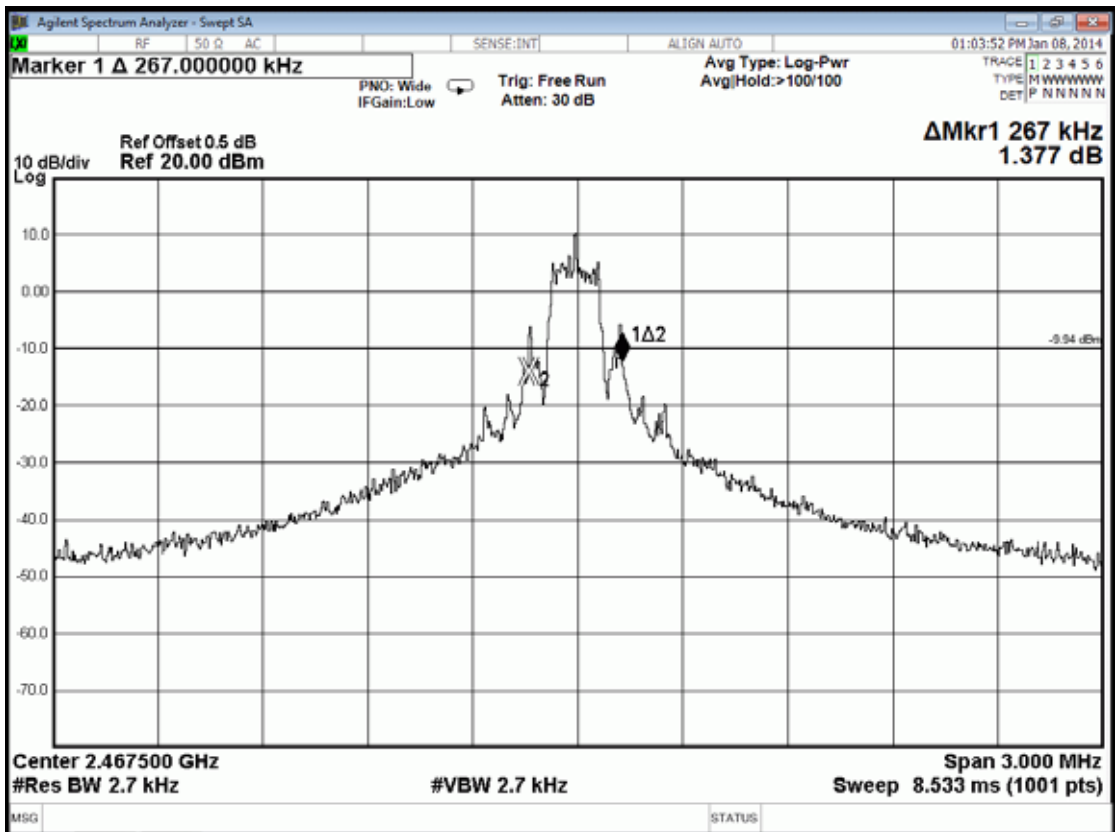

6. CARRIER FREQUENCY SEPARATION MEASUREMENT

6.1. Test Equipment

The following test equipment was used during the carrier frequency separation measurement:

| Item | Type | Manufacturer | Model No. | Serial No. | Last Cal. | Next Cal. |
|------|-------------------|--------------|------------|------------|--------------|--------------|
| 1. | Spectrum Analyzer | Agilent | N9030A-544 | US51350140 | Jul. 30, 13' | Jul. 29, 14' |
| 2. | DC Power Supply | TOP WARD | 3303A | 721773 | N/A | N/A |

6.2. Block Diagram of Test Setup

The same as section.4.2.

6.3. Specification Limits (§15.247(a)(1))

Alternatively, frequency hopping systems operating in the 2400-2483.5MHz band may have hopping channel carrier frequencies that are separated by 25kHz or two-thirds of the 20dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output no greater than 125mW.

6.4. Operating Condition of EUT

Same as 20dB bandwidth measurement which was listed in section 4.4.

6.5. Test Procedure

The transmitter output was connected to the spectrum analyzer. The channel separation was measure by spectrum analyzer with RBW equal to 1% of the span. The video bandwidth not to be smaller than resolution bandwidth, the peak was mark on adjacent bandwidth, the between of peak is carrier frequency separation. The measurement guideline was according to FCC Public Notice DA 00-705.

6.6. Test Results

PASSED. All the test results are attached in next pages.
(ANT B was measured for having worst performance.)


Test Date : Jan. 08, 2014 Temperature :25 Humidity : 60%

6.6.1. Radio Technology: S-FHSS Modulation


1. 2403.25MHz adjacent channel of carrier frequency separation: 748kHz_o
2. 2425.00MHz adjacent channel of right carrier frequency separation:
750kHz_o
3. 2425.00MHz adjacent channel of left carrier frequency separation:
750kHz_o
4. 2447.50MHz adjacent channel of carrier frequency separation:
750MHz_o


[Above values have met the requirement as specified in section 4.3: frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater.]

Channel 01, Test Frequency: 2403.250MHz

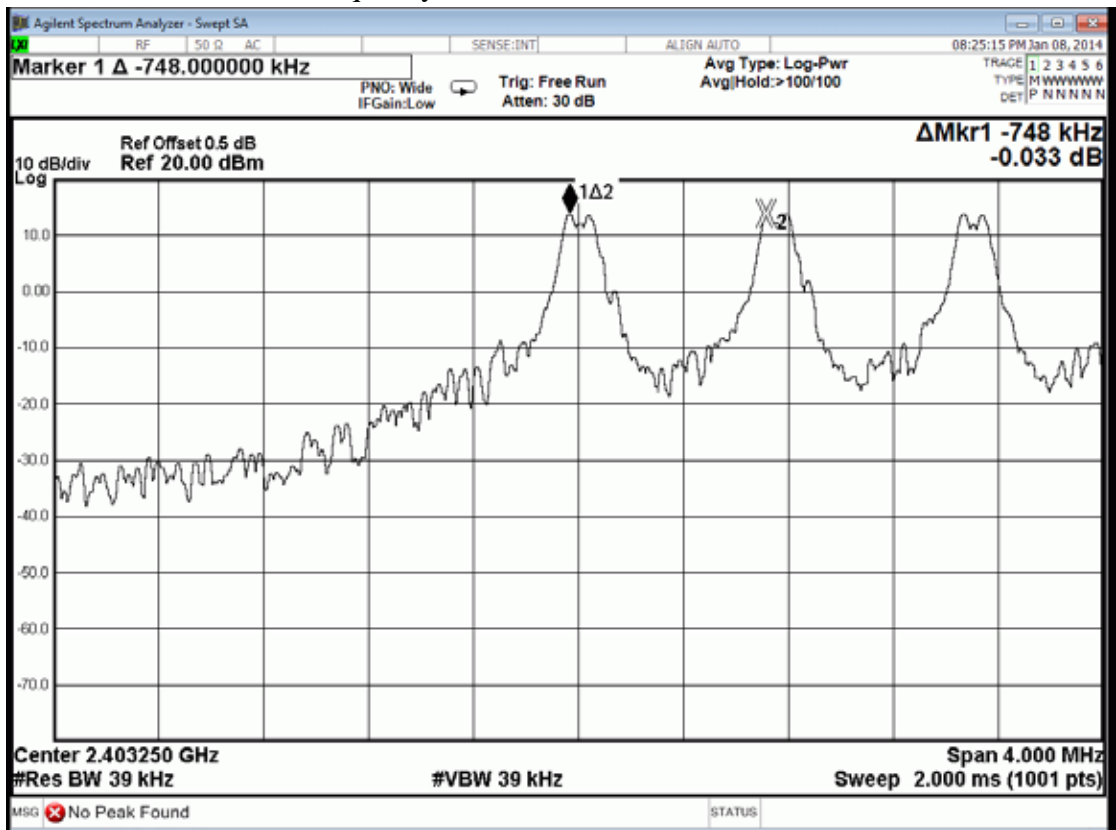


Channel 30, Test Frequency: 2425.000MHz

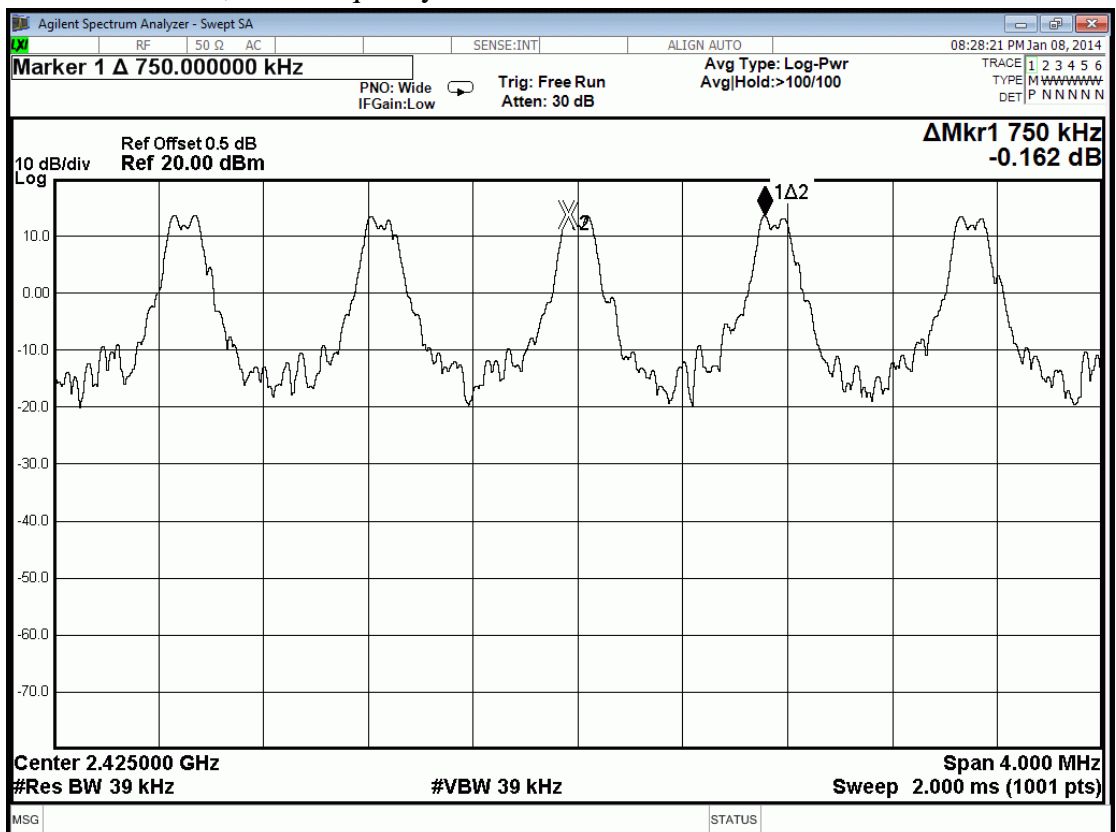

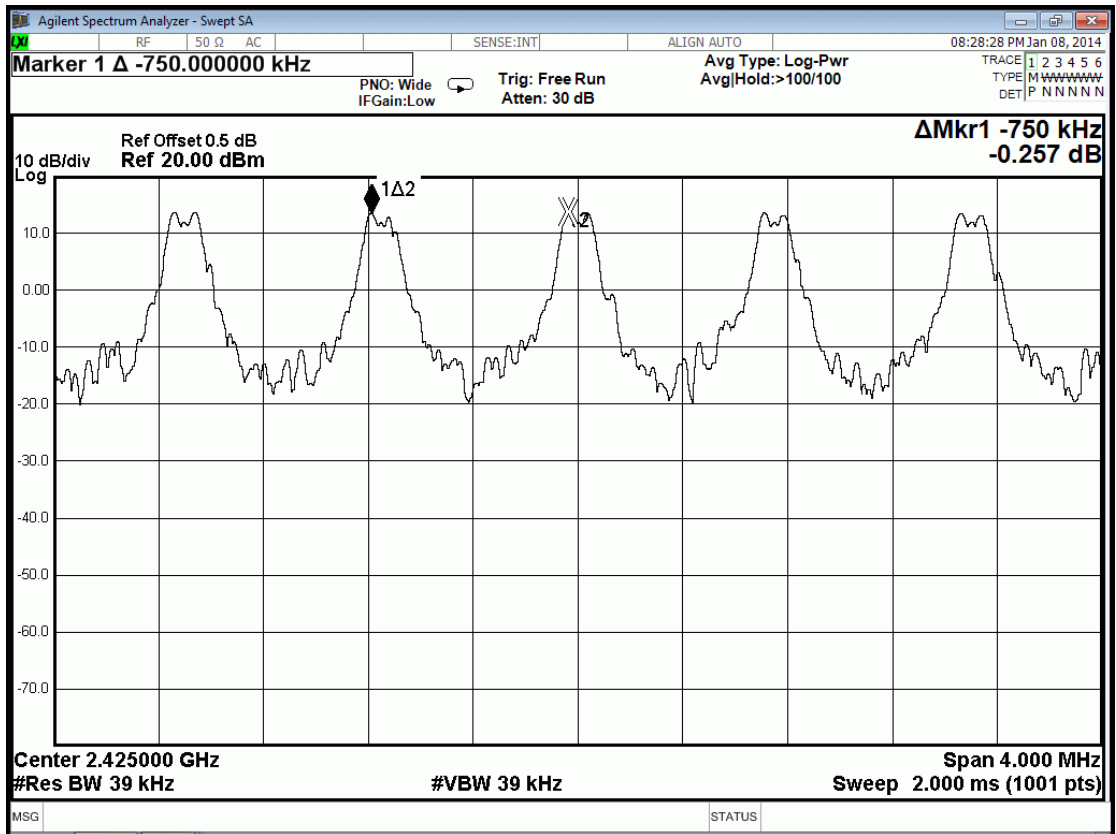

Channel 60, Test Frequency: 2447.500MHz

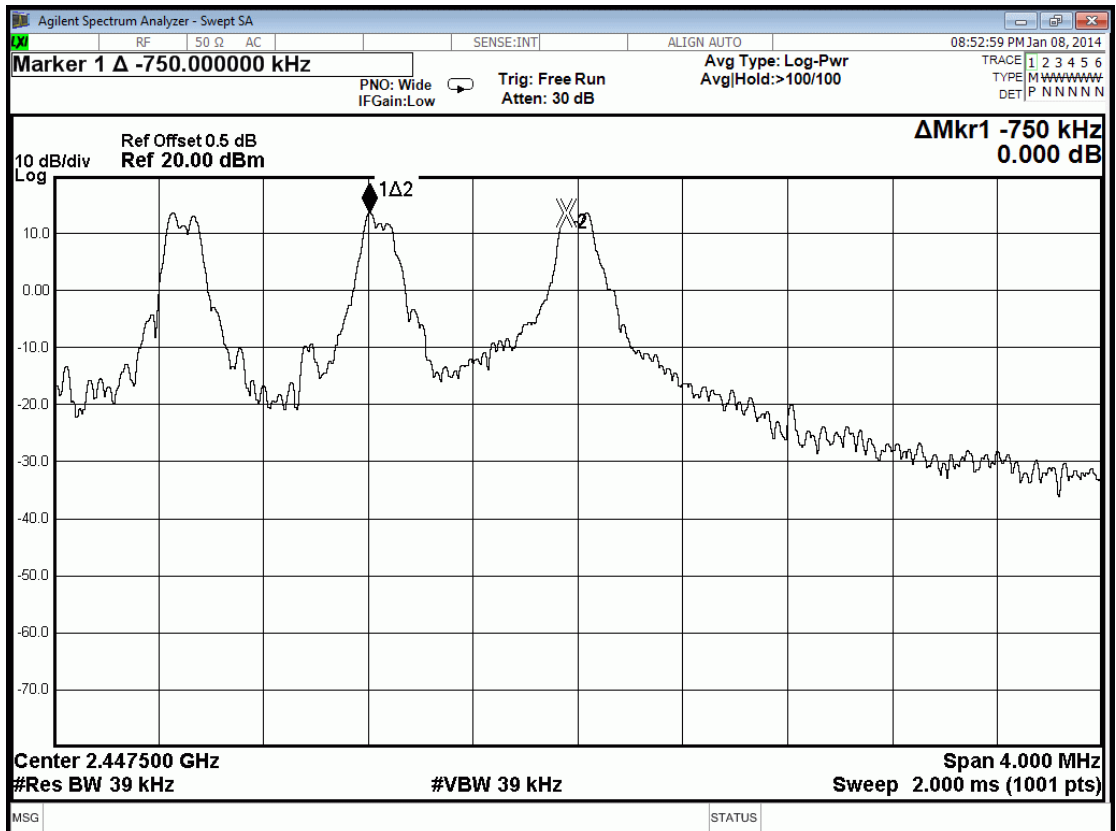


6.6.2. Radio Technology: T-FHSS Modulation


1. 2407.500MHz adjacent channel of carrier frequency separation: 2MHz.
2. 2435.500MHz adjacent channel of right carrier frequency separation: 2MHz.
3. 2435.500MHz adjacent channel of left carrier frequency separation: 2MHz.
4. 2467.500MHz adjacent channel of carrier frequency separation: 2MHz.


[Above values have met the requirement as specified in section 4.3: frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater.]

Channel 01, Test Frequency: 2407.500MHz

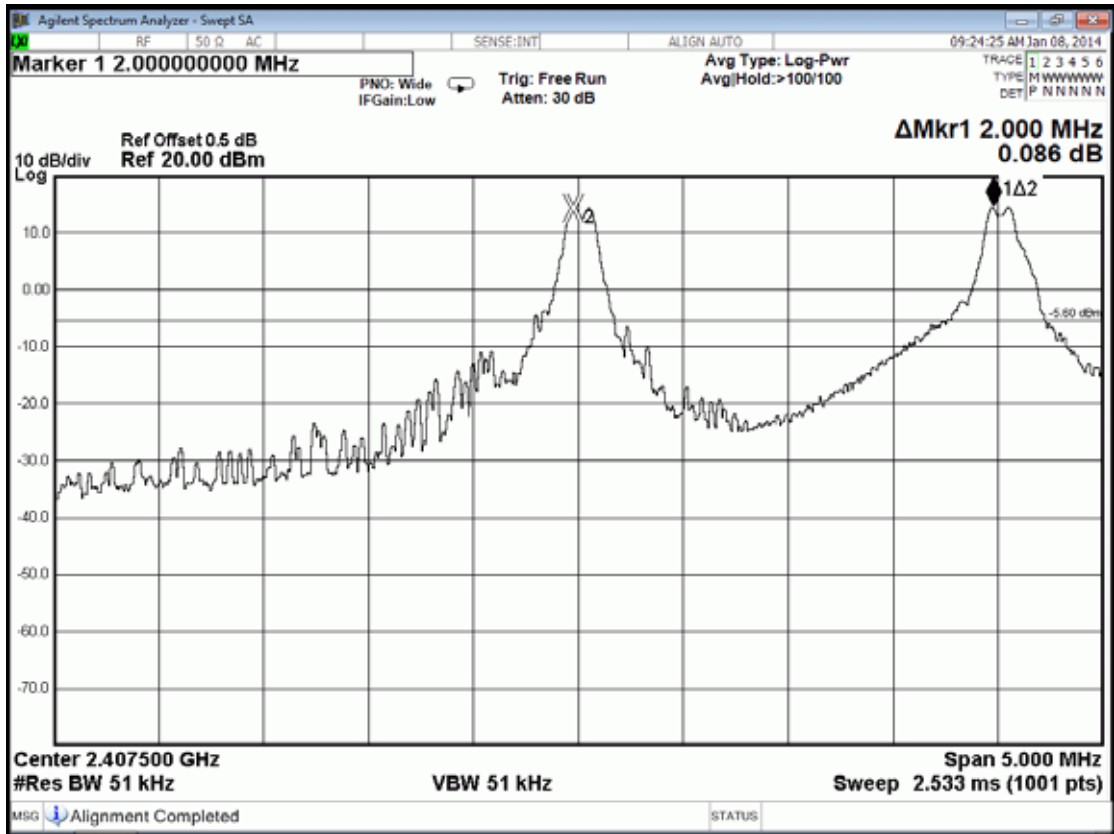


Channel 15, Test Frequency: 2435.500MHz

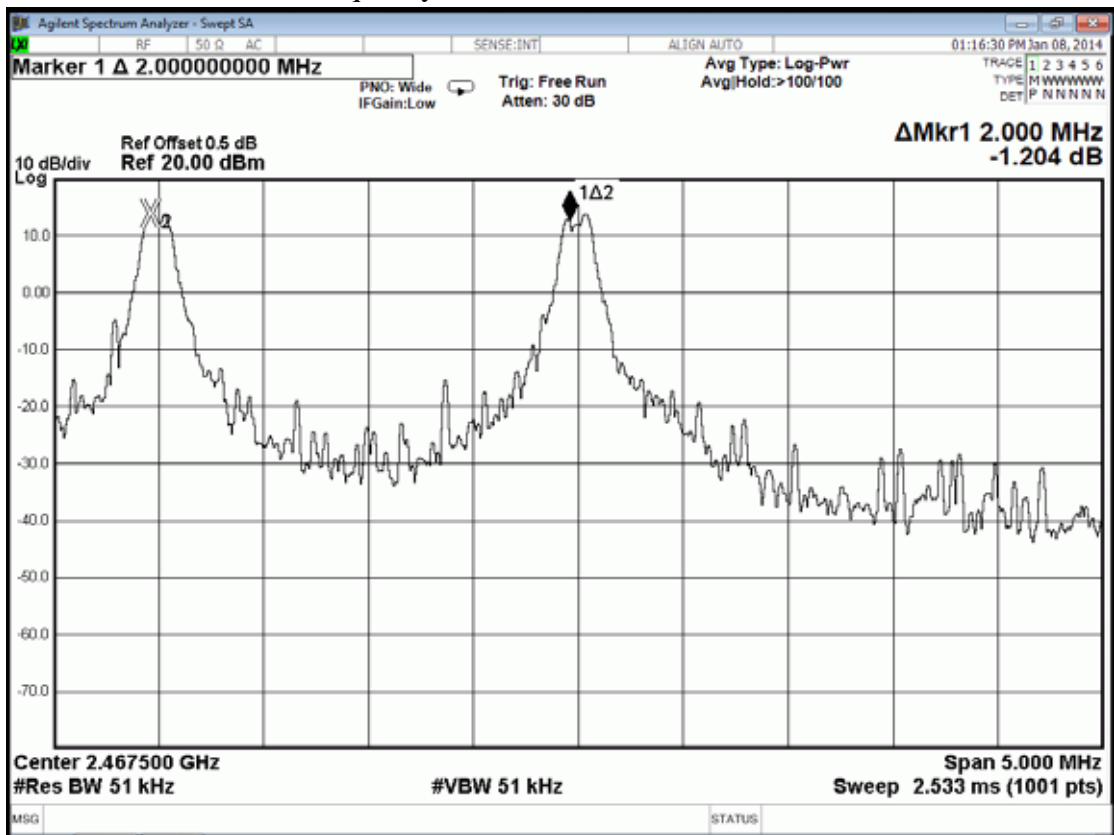

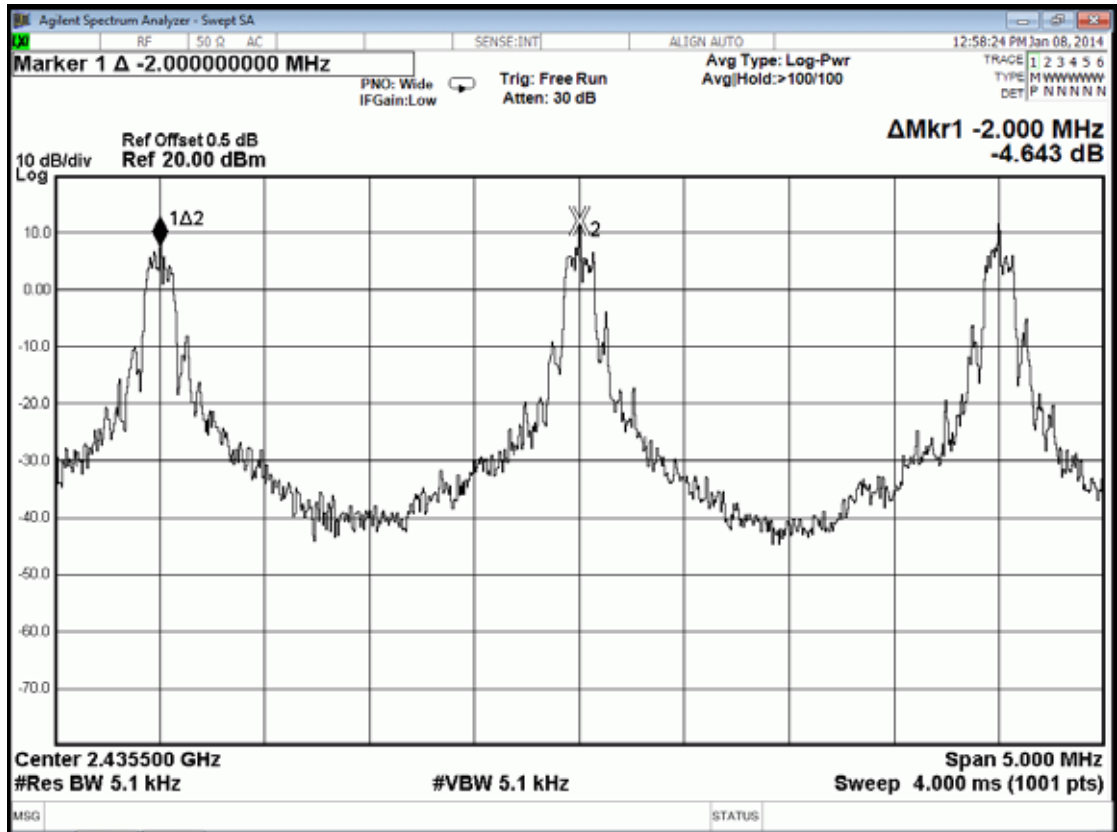

Channel 31, Test Frequency: 2467.500MHz

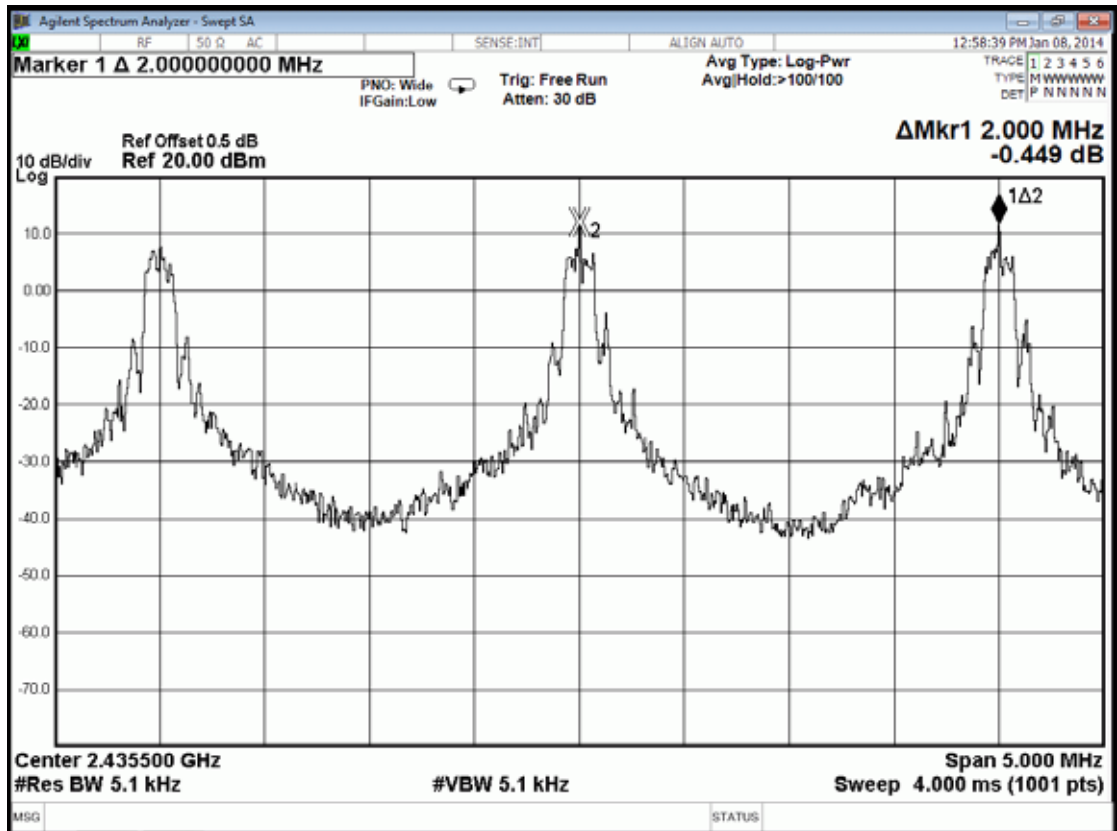

7. TIME OF OCCUPANCY MEASUREMENT

7.1. Test Equipment

The following test equipment was used during the time of occupancy measurement:

| Item | Type | Manufacturer | Model No. | Serial No. | Last Cal. | Next Cal. |
|------|-------------------|--------------|------------|------------|--------------|--------------|
| 1. | Spectrum Analyzer | Agilent | N9030A-544 | US51350140 | Jul. 30, 13' | Jul. 29, 14' |
| 2. | DC Power Supply | TOP WARD | 3303A | 721773 | N/A | N/A |

7.2. Block Diagram of Test Setup

The same as section.4.2.

7.3. Specification Limits (§15.247(a)(1)(iii))

Frequency hopping systems in the 2400-2483.5MHz shall use at least 15 non-overlapping channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by number of hopping channels employed.

7.4. Operating Condition of EUT

Same as 20dB bandwidth measurement which was listed in section 4.4.

7.5. Test Procedure

The transmitter output was connected to the spectrum analyzer. The bandwidth of the fundamental frequency was measure by spectrum analyzer with 1MHz RBW and 1MHz VBW. $VBW \geq RBW$; Span=zero span.

Centred on a hopping channel sweep=as necessary to capture the entire dwell time per hopping channel ; Detector function=peak ; Trace=Max hold

The measurement guideline was according to FCC Public Notice DA 00-705.

7.6. Test Results

PASSED. All the test results are attached in next pages.
(ANT B was measured for having worst performance.)

Test Date : Jan. 08, 2014 Temperature : 24 Humidity : 50%

Test Date : Jan. 16, 2014 Temperature : 25 Humidity : 52%

7.6.1. Radio Technology: S-FHSS Modulation

Duty cycle: 60 channels*0.4 seconds = 24 seconds

Test Frequency: 2403.250MHz

For each 5 second of 24 channels appearance, the longest time of occupancy for each of 24 seconds is:

$24 \text{ channels} * 24 \text{ seconds} / 5 * 2.98\text{ms} = 343.296\text{ms} (<400\text{ms})$

Test Frequency: 2425.000MHz

For each 5 second of 24 channels appearance, the longest time of occupancy for each of 24 seconds is:



$24 \text{ channels} * 24 \text{ seconds} / 5 * 2.98\text{ms} = 343.296\text{ms} (<400\text{ms})$

Test Frequency: 2447.500MHz



For each 5 second of 24 channels appearance, the longest time of occupancy for each of 24 seconds is:

$24 \text{ channels} * 24 \text{ seconds} / 5 * 2.98\text{ms} = 343.296\text{ms} (<400\text{ms})$



Channel 01, Test Frequency: 2403.250MHz

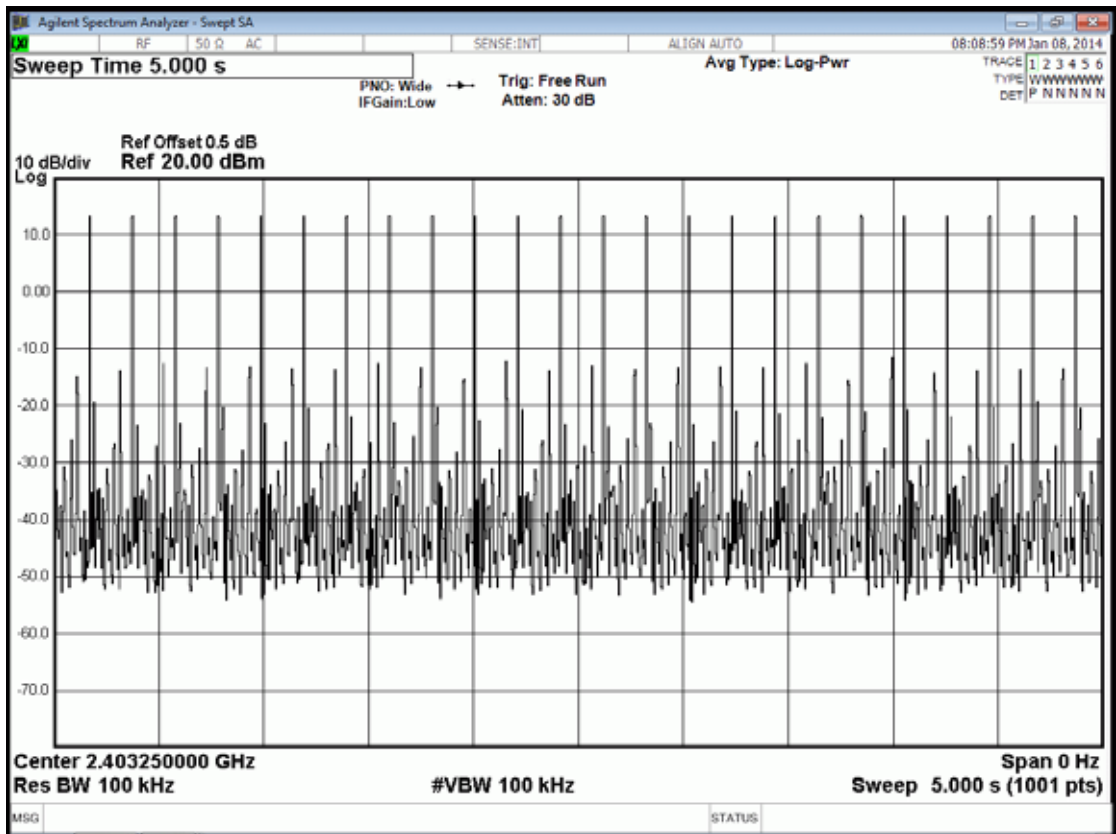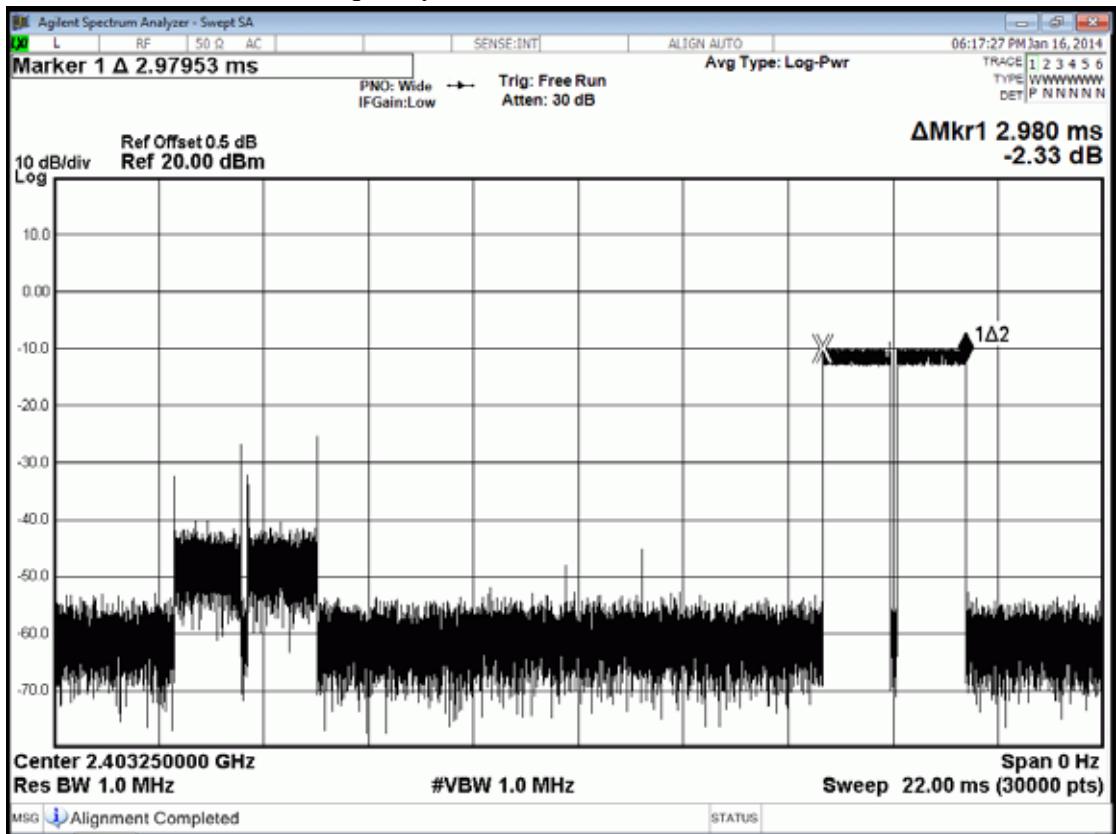

Channel 30, Test Frequency: 2425.000MHz

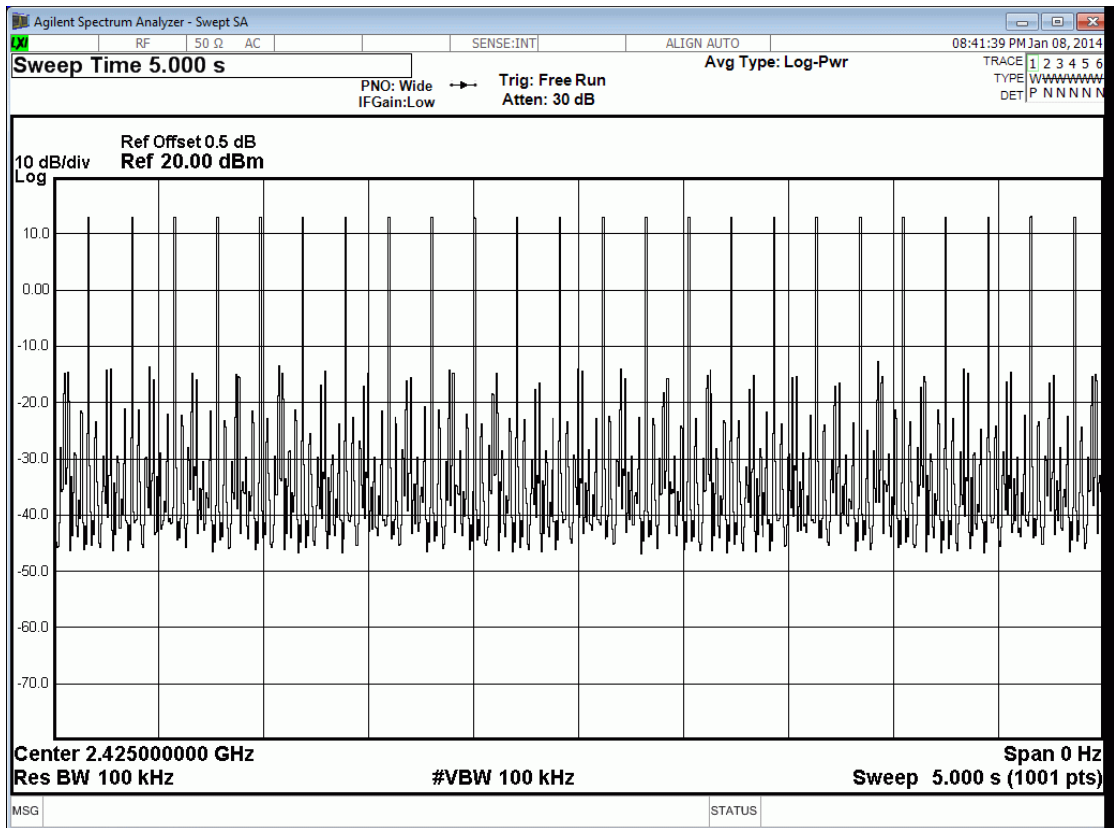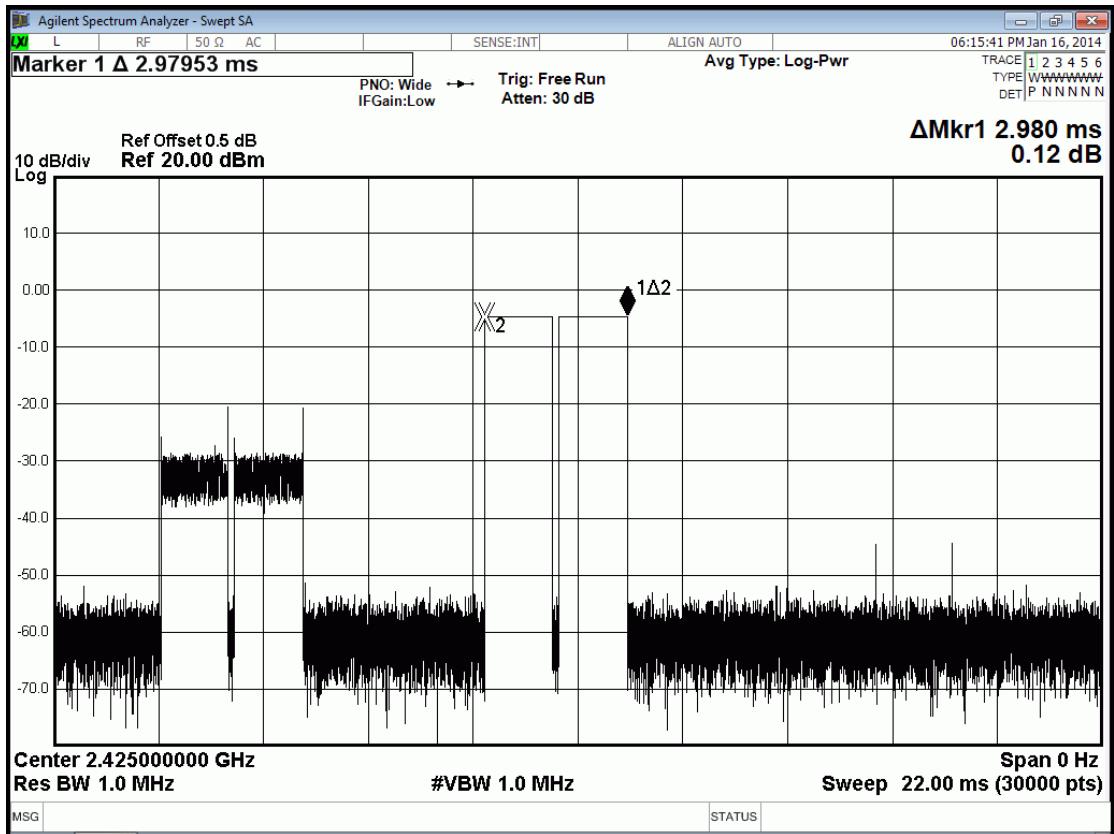

Channel 60, Test Frequency: 2447.500MHz

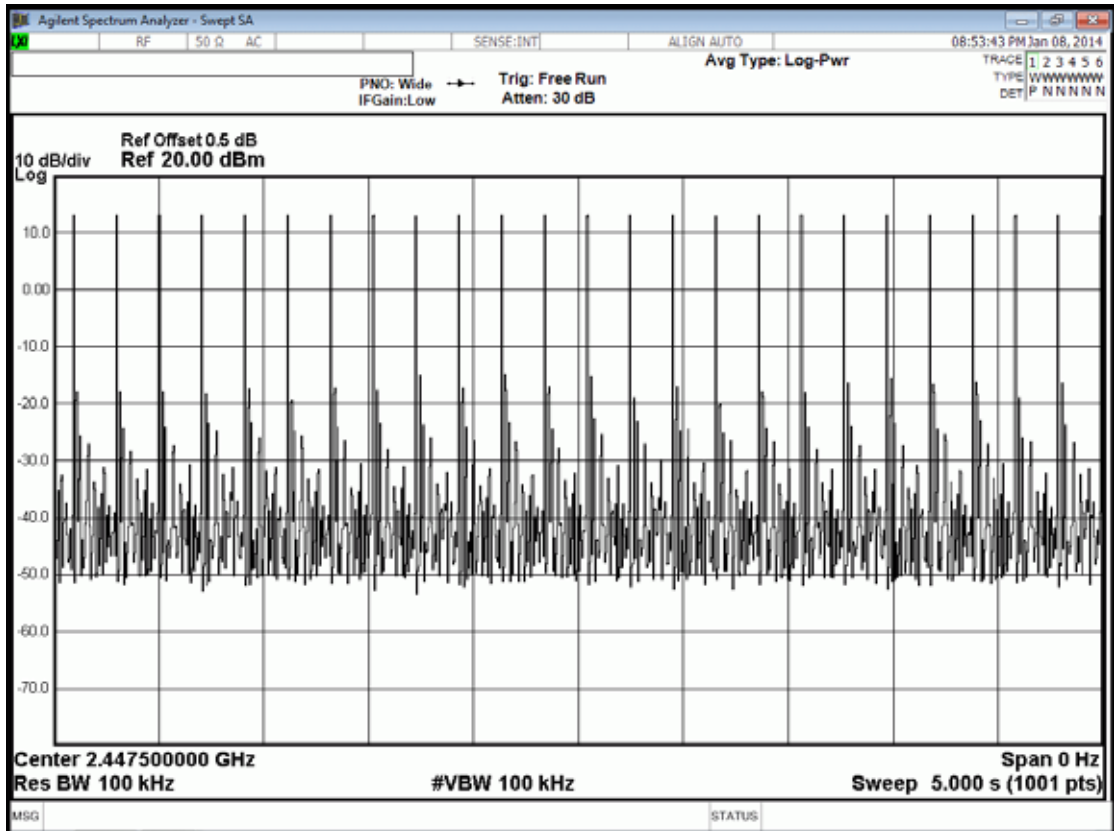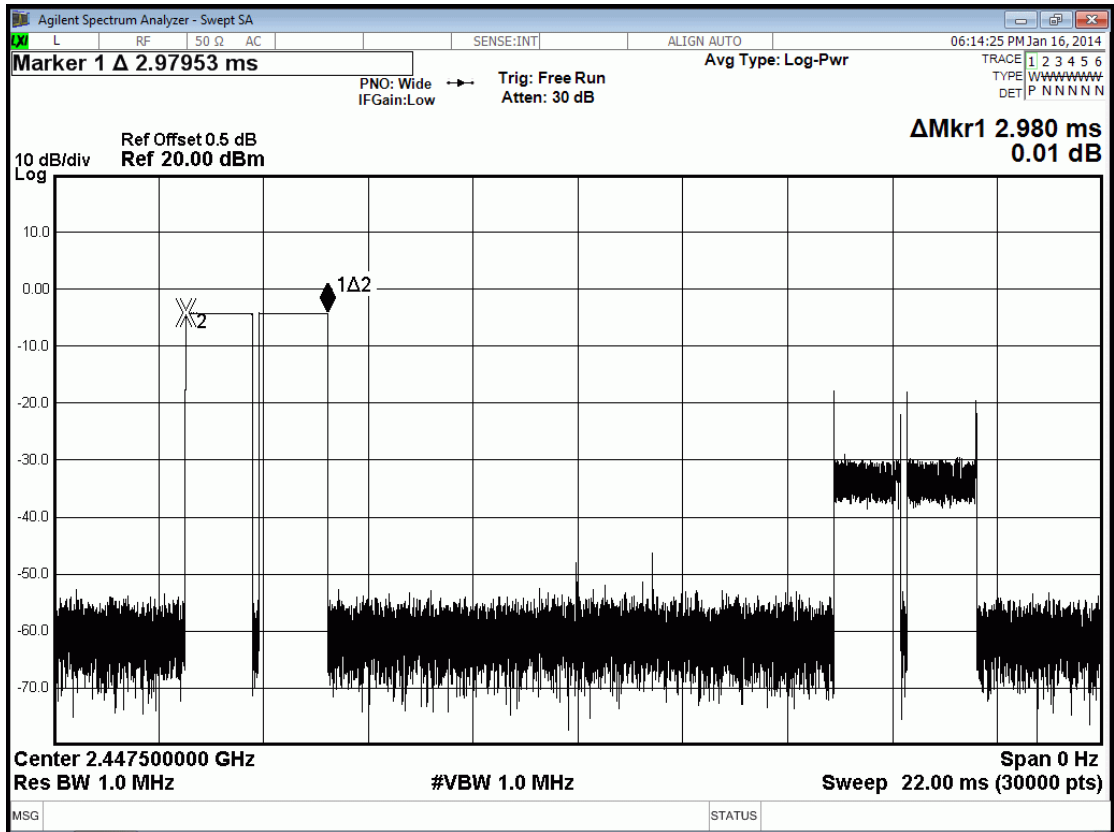

7.6.2. Radio Technology: T-FHSS Modulation

Duty cycle: $31 \text{ channels} * 0.4 \text{ seconds} = 12.4 \text{ seconds}$

Test Frequency: 2407.500MHz

For each 5 second of 10 channels appearance, the longest time of occupancy for each of 12.4 seconds is:

$10 \text{ channels} * 12.4 \text{ seconds} / 5 * 1.43\text{ms} = 35.464\text{ms} (<400\text{ms})$

Test Frequency: 2435.500MHz

For each 5 second of 10 channels appearance, the longest time of occupancy for each of 12.4 seconds is:



$10 \text{ channels} * 12.4 \text{ seconds} / 5 * 1.43\text{ms} = 35.464\text{ms} (<400\text{ms})$

Test Frequency: 2467.500MHz



For each 5 second of 10 channels appearance, the longest time of occupancy for each of 12.4 seconds is:

$10 \text{ channels} * 12.4 \text{ seconds} / 5 * 1.43\text{ms} = 35.464\text{ms} (<400\text{ms})$



Channel 01, Test Frequency: 2407.500MHz

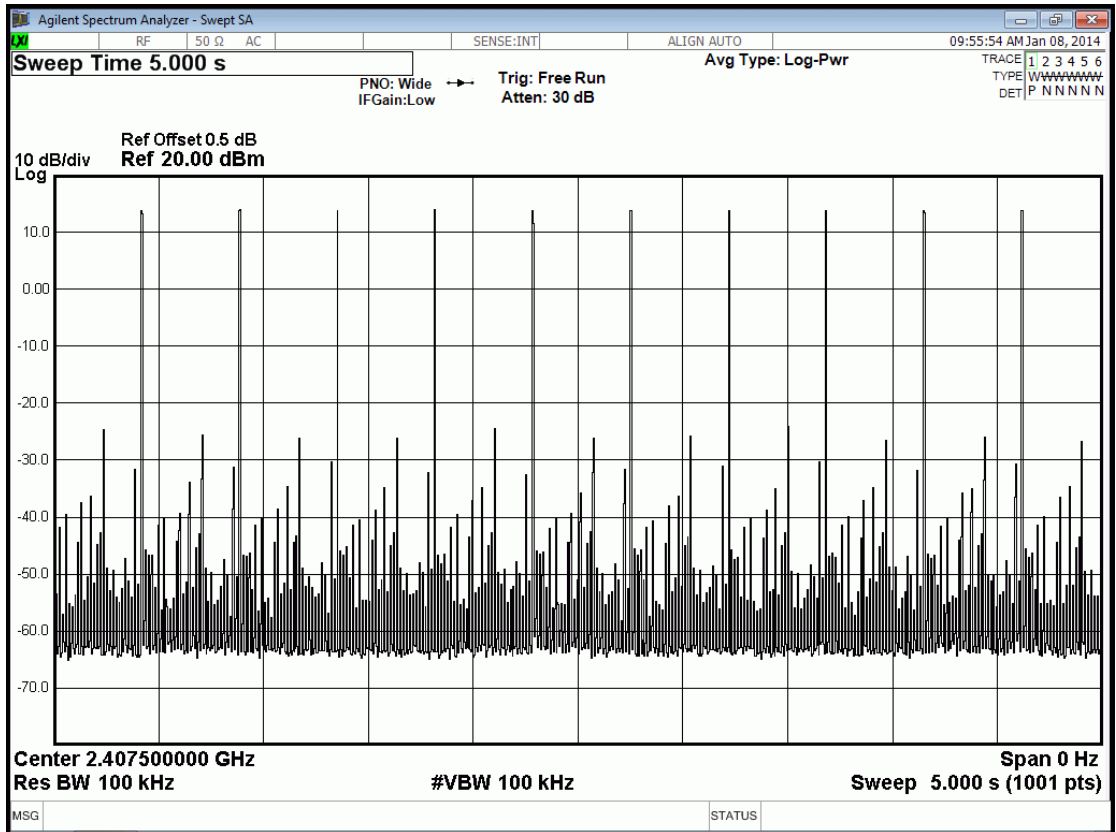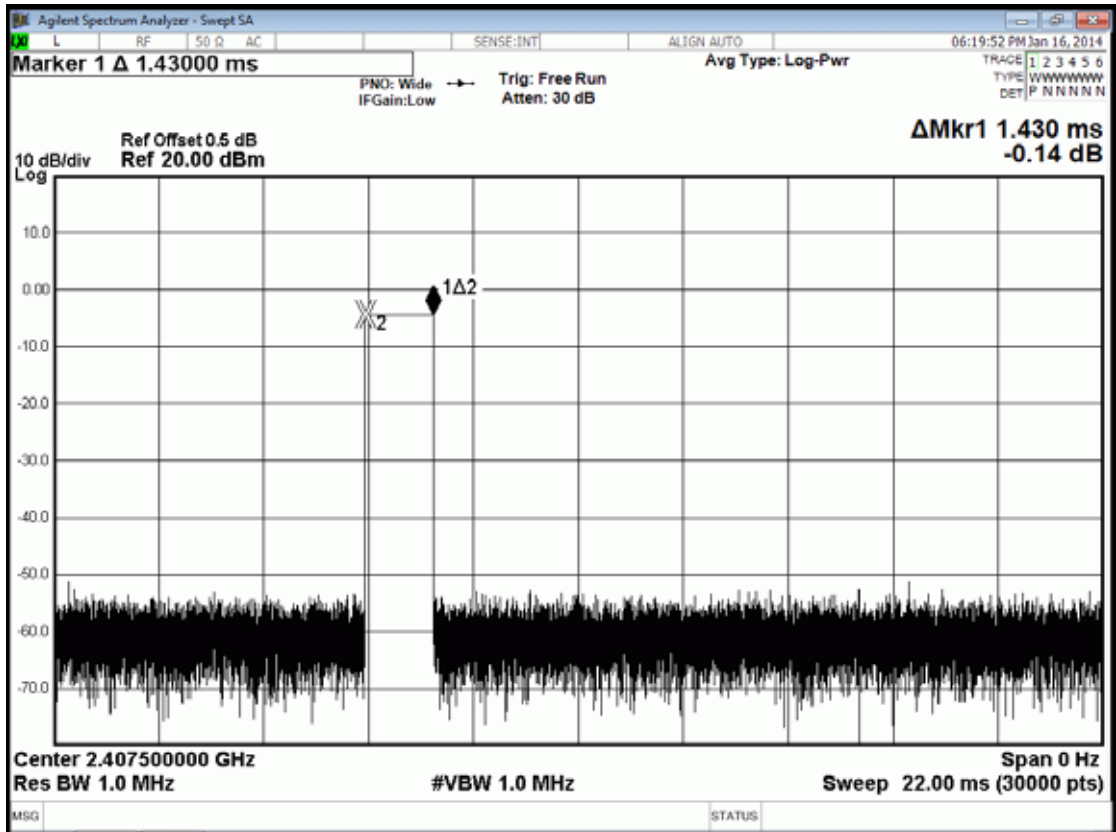

Channel 15, Test Frequency: 2435.500MHz

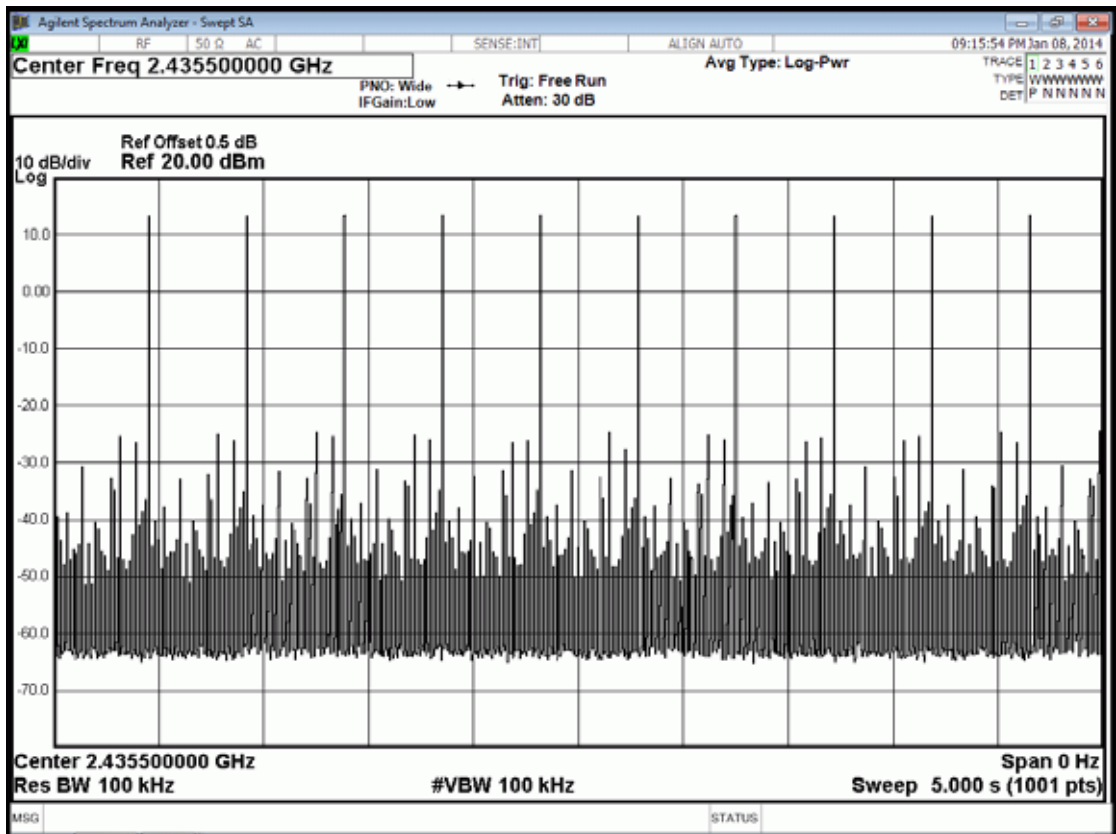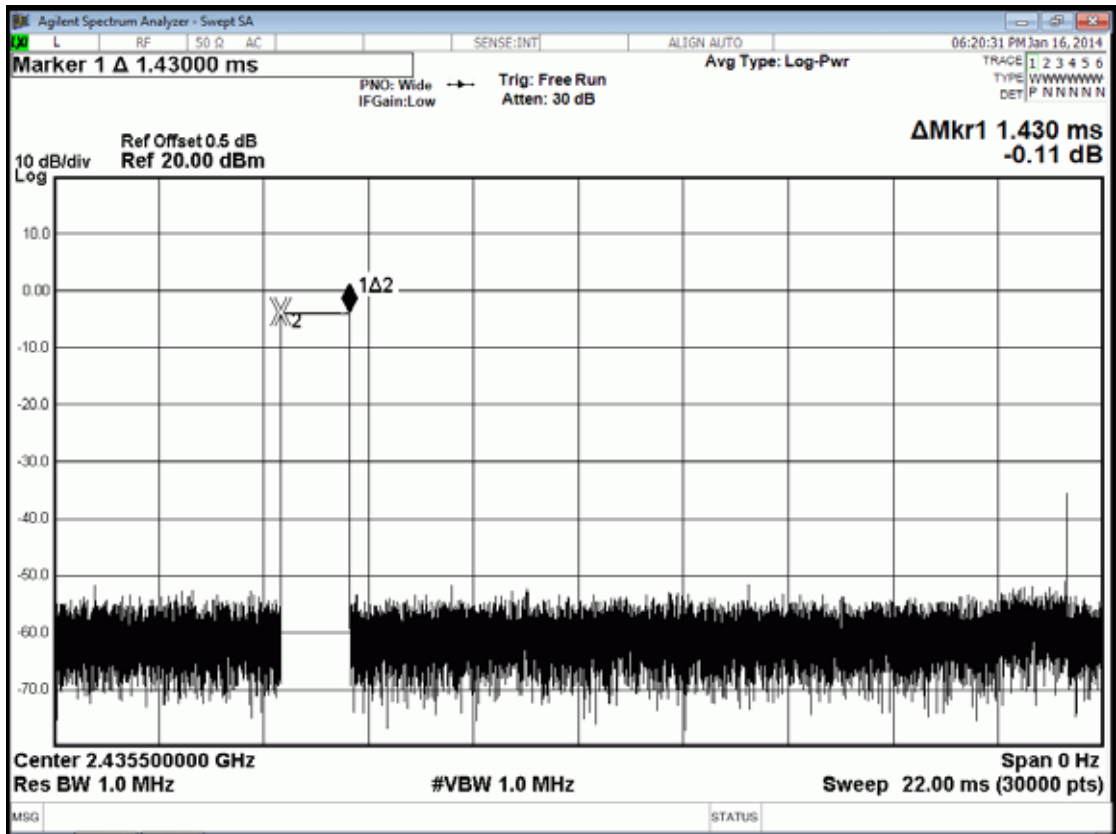

Channel 60, Test Frequency: 2467.500MHz

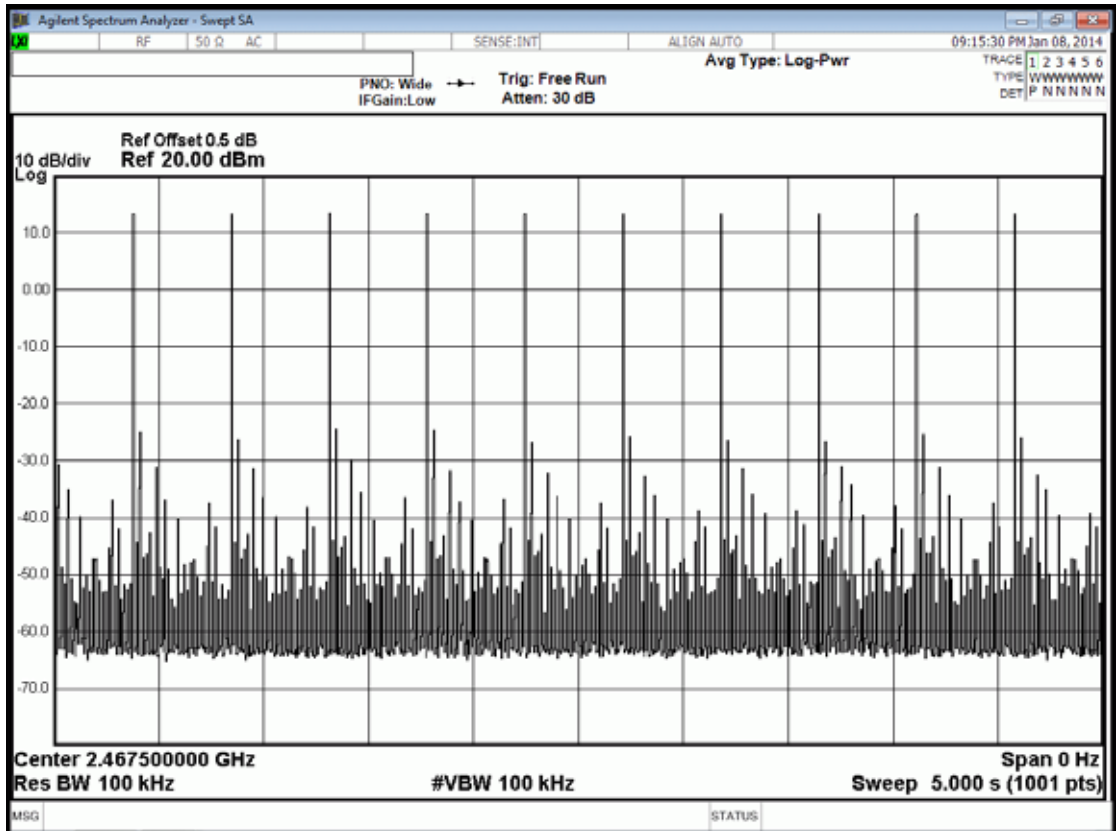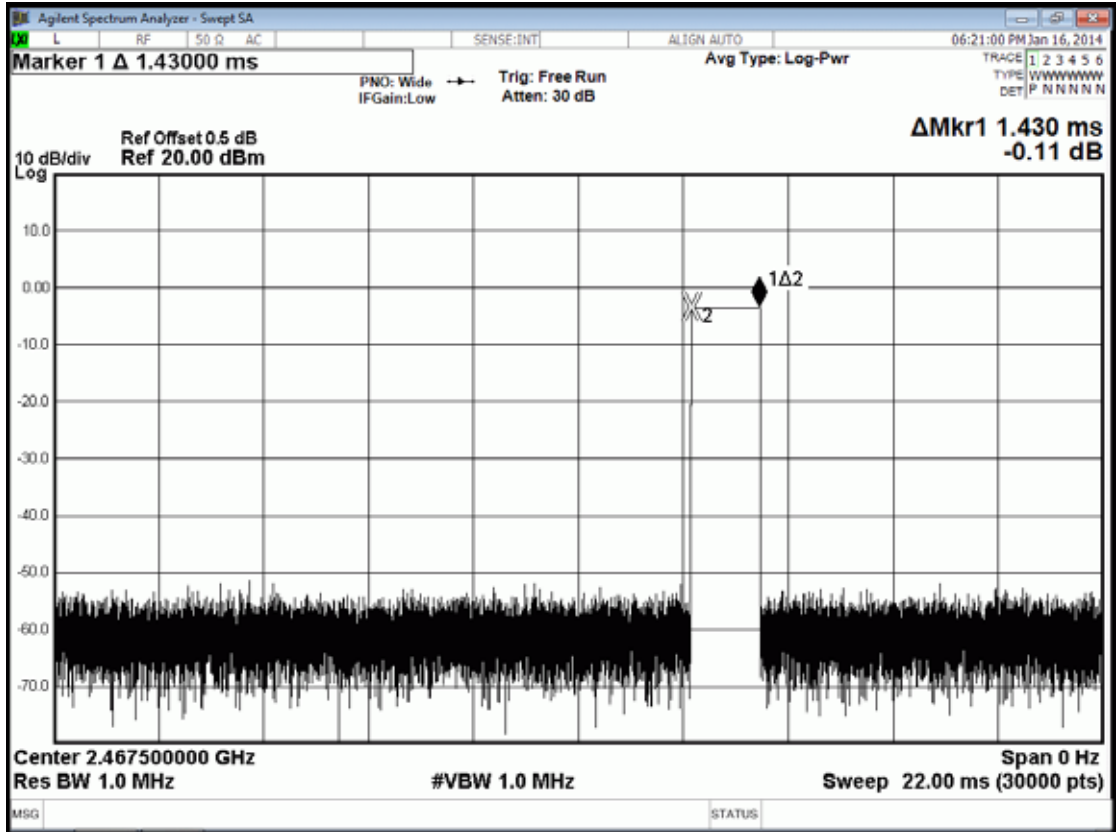

8. NUMBER OF HOPPING CHANNELS MEASUREMENT

8.1. Test Equipment

The following test equipment was used during the number of hopping channels measurement:

| Item | Type | Manufacturer | Model No. | Serial No. | Last Cal. | Next Cal. |
|------|-------------------|--------------|------------|------------|--------------|--------------|
| 1. | Spectrum Analyzer | Agilent | N9030A-544 | US51350140 | Jul. 30, 13' | Jul. 29, 14' |
| 2. | DC Power Supply | TOP WARD | 3303A | 721773 | N/A | N/A |

8.2. Block Diagram of Test Setup

The same as section.4.2.

8.3. Specification Limits (§15.247(a)(1)(iii))

Frequency hopping systems which use fewer than 20 hopping frequencies may employ intelligent hopping techniques to avoid interference to other transmissions. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 non-overlapping channels.

8.4. Operating Condition of EUT

Same as 20dB bandwidth measurement which was listed in section 4.4.

8.5. Test Procedure

The transmitter output was connected to the spectrum analyzer. The bandwidth of the fundamental frequency was measure by spectrum analyzer with 100kHz RBW and 100kHz VBW. Sweep=Auto ; Detector function=peak ; Trace=Max hold
The measurement guideline was according to FCC Public Notice DA 00-705.


8.6. Test Results

PASSED. All the test results are attached in next page.
(ANT B was measured for having worst performance.)

Test Date : Jan. 08, 2014 Temperature :24 Humidity : 50%


8.6.1. Radio Technology: S-FHSS Modulation

The number hopping channel is 60.

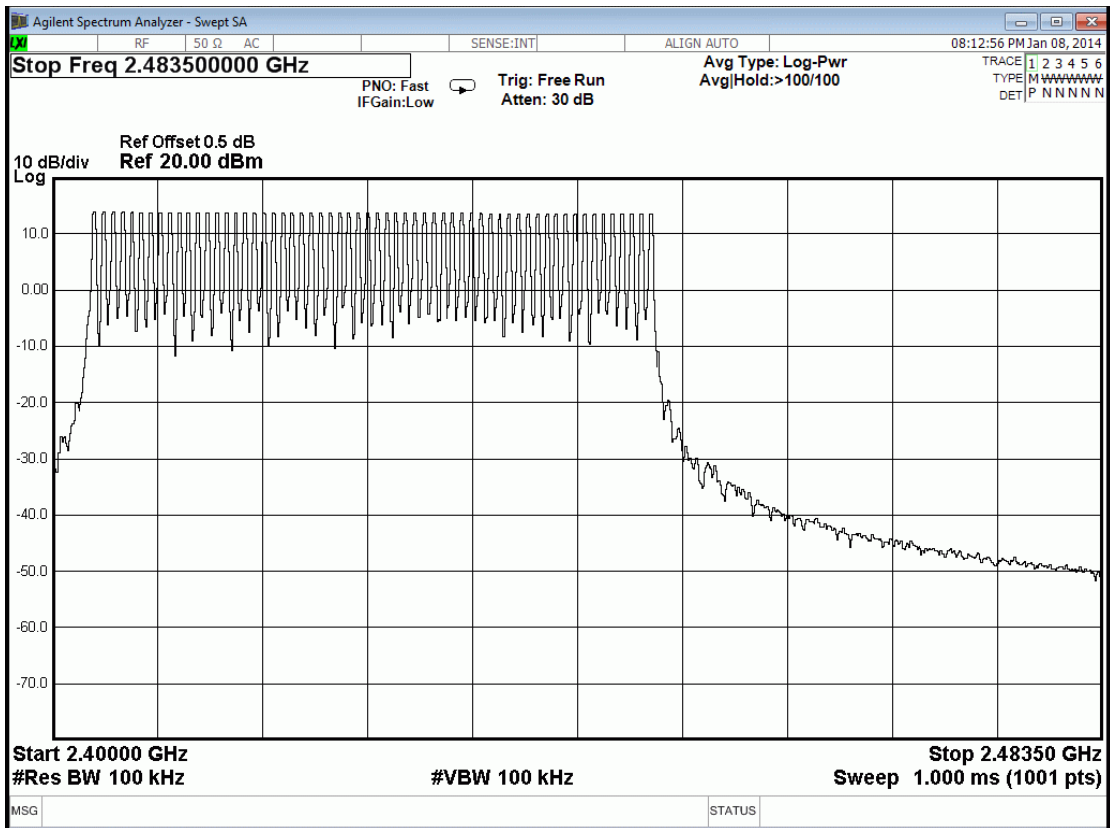

8.6.2. Radio Technology: T-FHSS Modulation

The number hopping channel is 31.

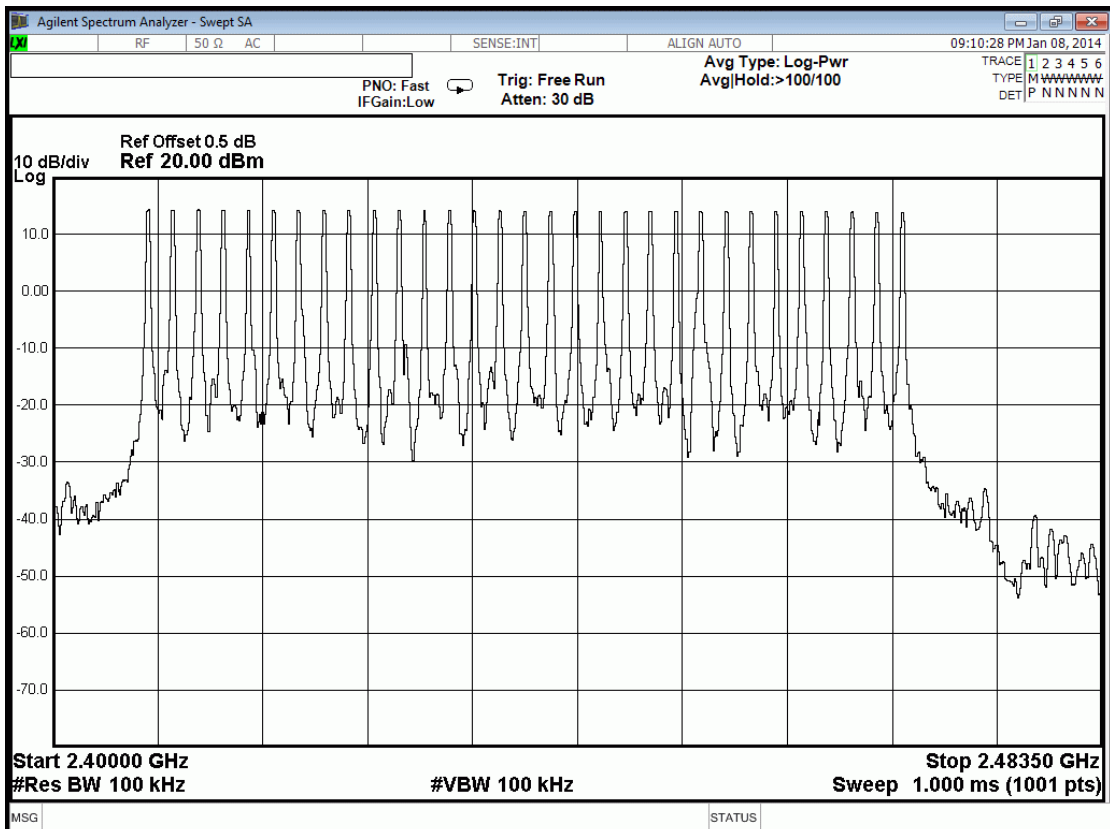

9. MAXIMUM PEAK OUTPUT POWER MEASUREMENT

9.1. Test Equipment

The following test equipment was used during the maximum peak output power measurement:

| Item | Type | Manufacturer | Model No. | Serial No. | Last Cal. | Next Cal. |
|------|-------------------|--------------|------------|------------|--------------|--------------|
| 1. | Spectrum Analyzer | Agilent | N9030A-544 | US51350140 | Jul. 30, 13' | Jul. 29, 14' |
| 2. | DC Power Supply | TOP WARD | 3303A | 721773 | N/A | N/A |

9.2. Block Diagram of Test Setup

The same as section.4.2.

9.3. Specification Limits (§15.247(b)-(1))

The Limits of maximum Peak Output Power for frequency hopping systems in 2400-2483.5MHz is: 0.125Watt. (21dBm)

9.4. Operating Condition of EUT

Same as 20dB bandwidth measurement which was listed in section 4.4.

9.5. Test Procedure

The transmitter output was connected to the spectrum analyzer.

Span can encompass the waveform

RBW>EBW

VBW RBW

Sweep=5MHz

The measurement guideline was according to FCC Public Notice DA 00-705.

9.6. Test Results

PASSED. All the test results are listed below.

Test Date : Jan. 08, 2014 Temperature :24 Humidity : 50%


9.6.1. Radio Technology: S-FHSS Modulation

| No. | Channel | Test Frequency | Peak Output Power | | Limit |
|-----|---------|----------------|-------------------|------------------|-------|
| | | | ANT A | ANT B | |
| 1. | 01 | 2403.250MHz | 13.898dBm | 14.022dBm | 21dBm |
| 2. | 30 | 2425.000MHz | 13.684dBm | 13.728dBm | 21dBm |
| 3. | 60 | 2447.500MHz | 13.499dBm | 13.593dBm | 21dBm |


Remark: This device has two antennas for diversity, not supporting simultaneously transmit.

ANT A


Channel 01, Frequency: 2403.250MHz

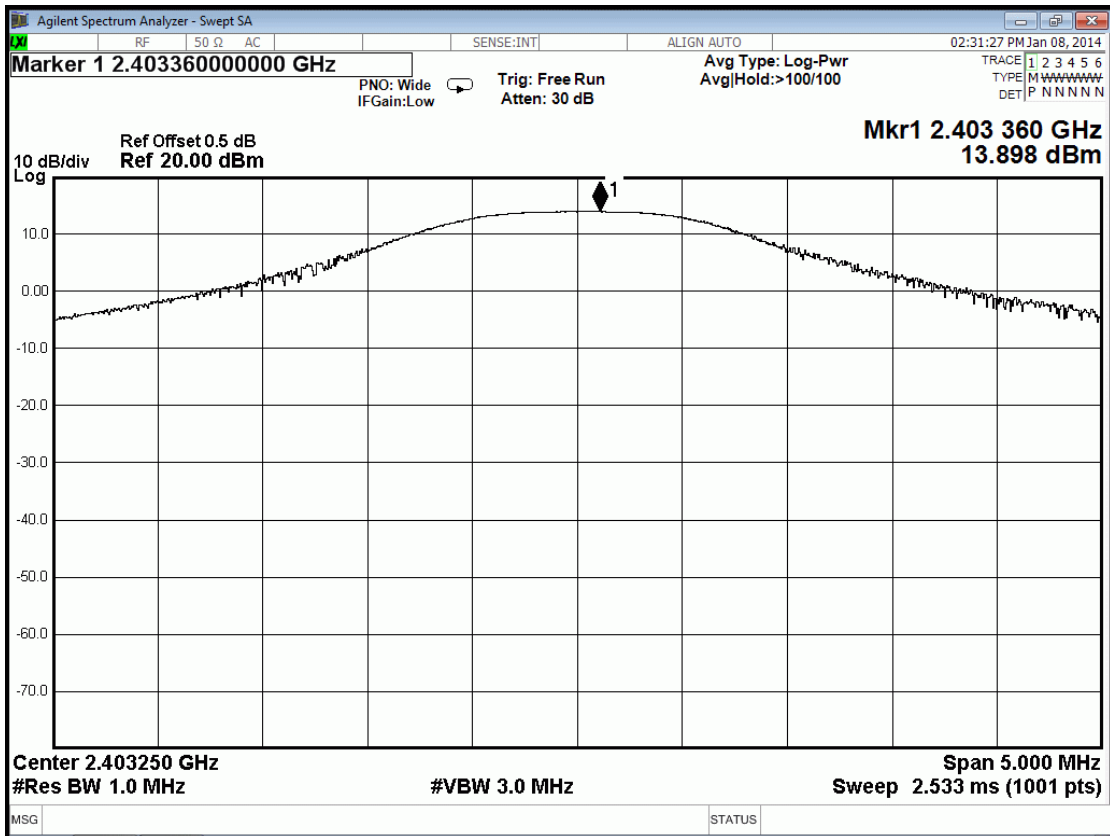

Channel 30, Frequency: 2425.000MHz

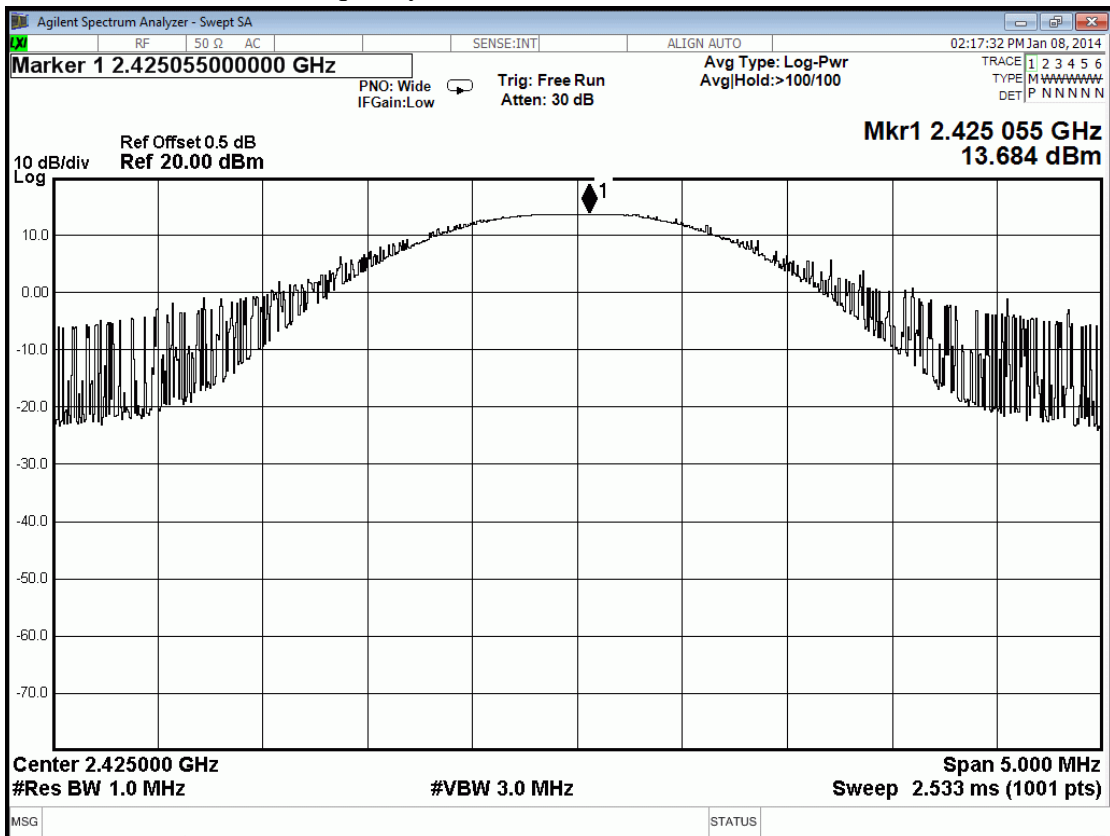


Channel 60, Frequency: 2447.500MHz

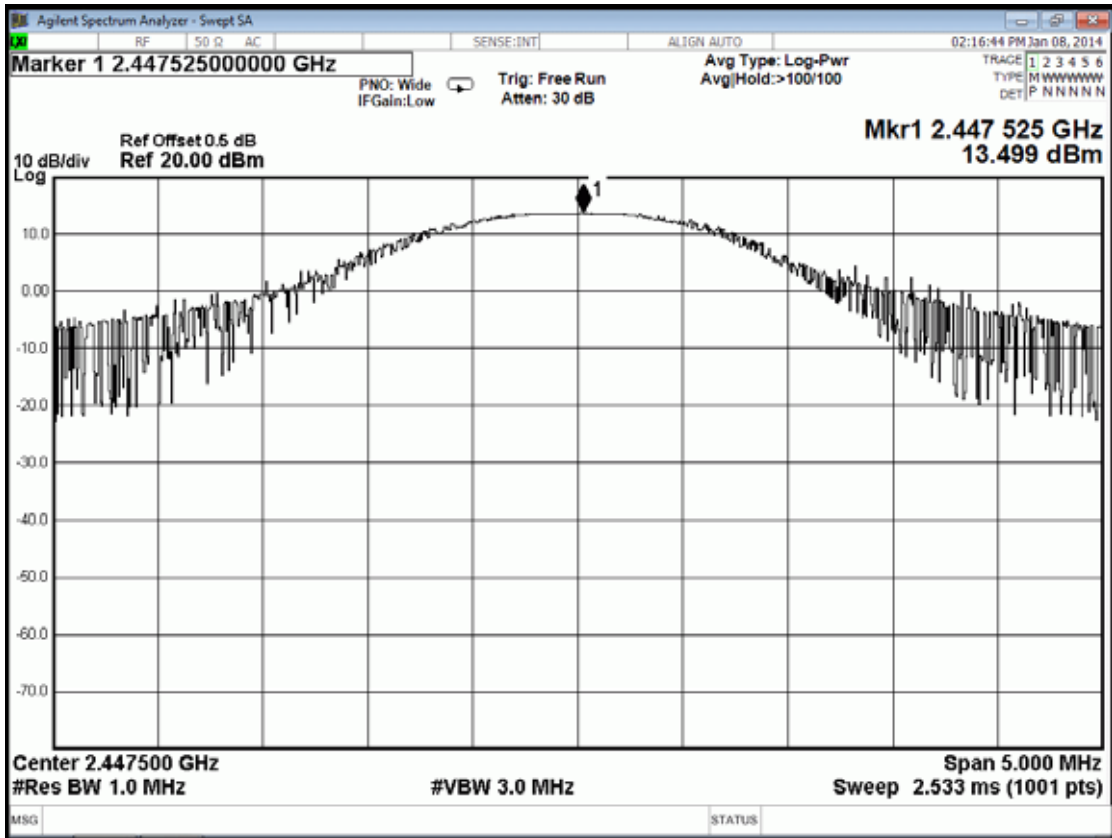


ANT B


Channel 01, Frequency: 2403.250MHz

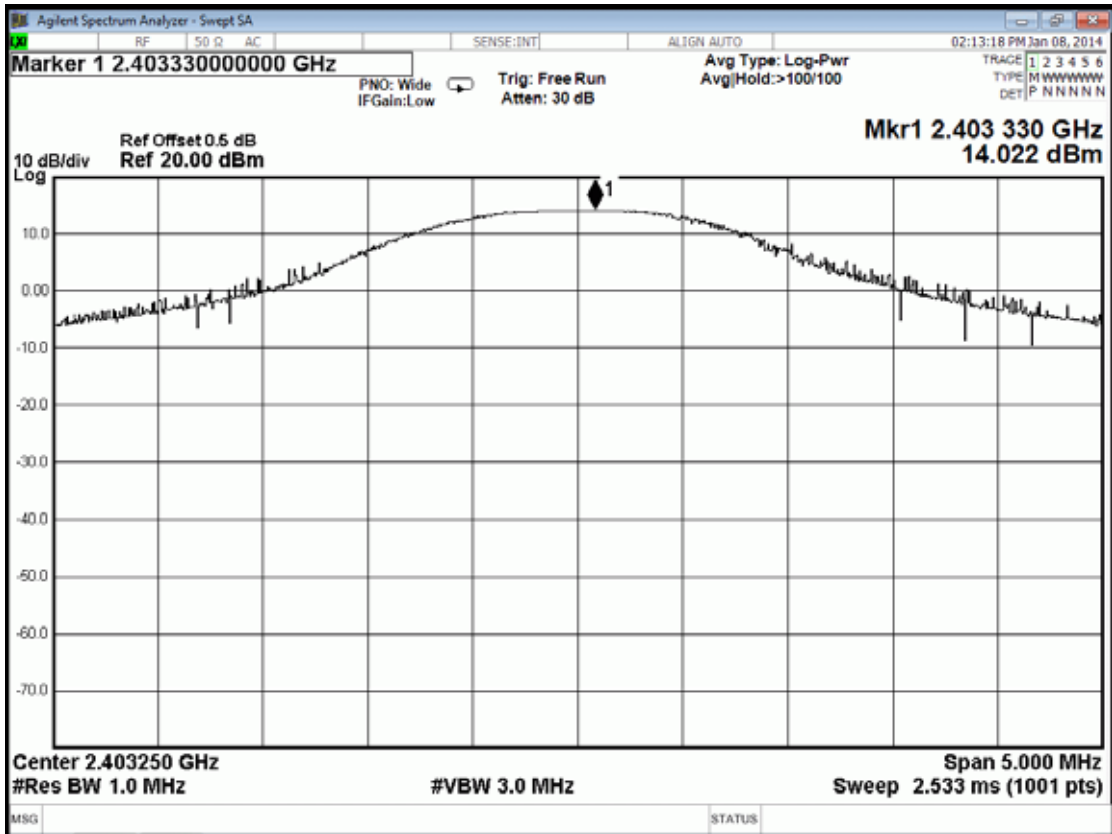

Channel 30, Frequency: 2425.000MHz

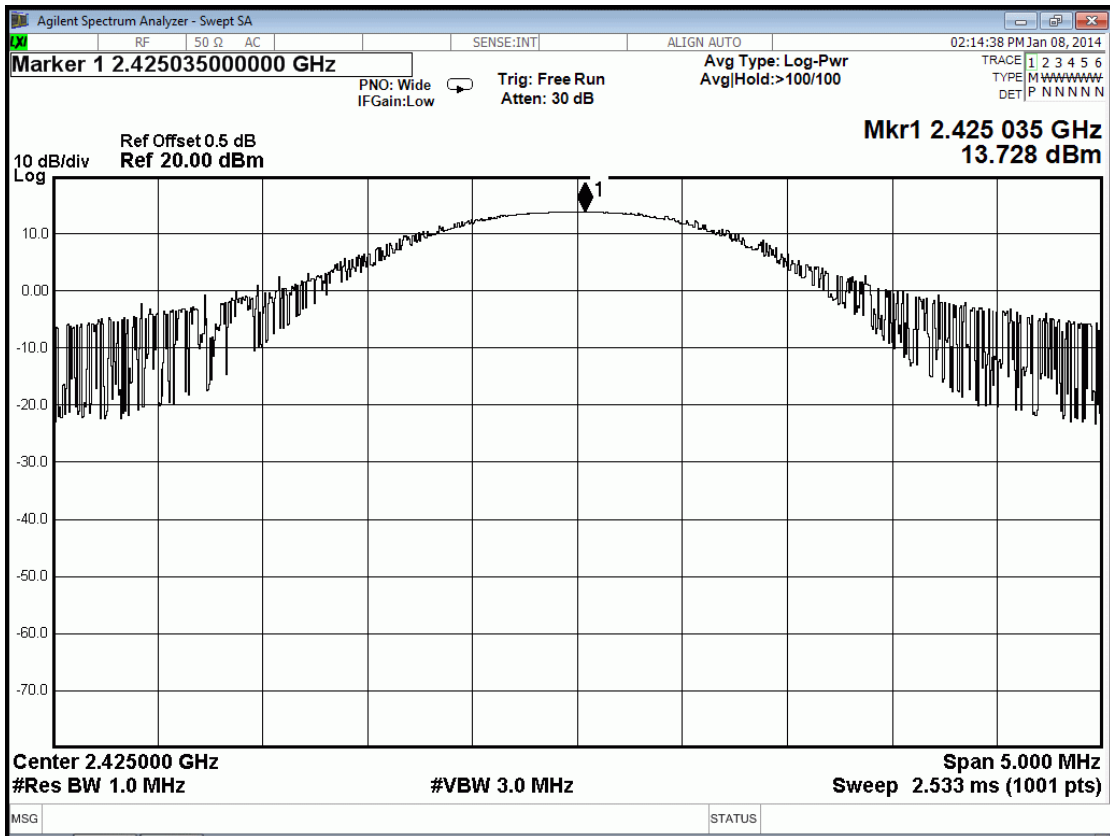

Channel 60, Frequency: 2447.500MHz

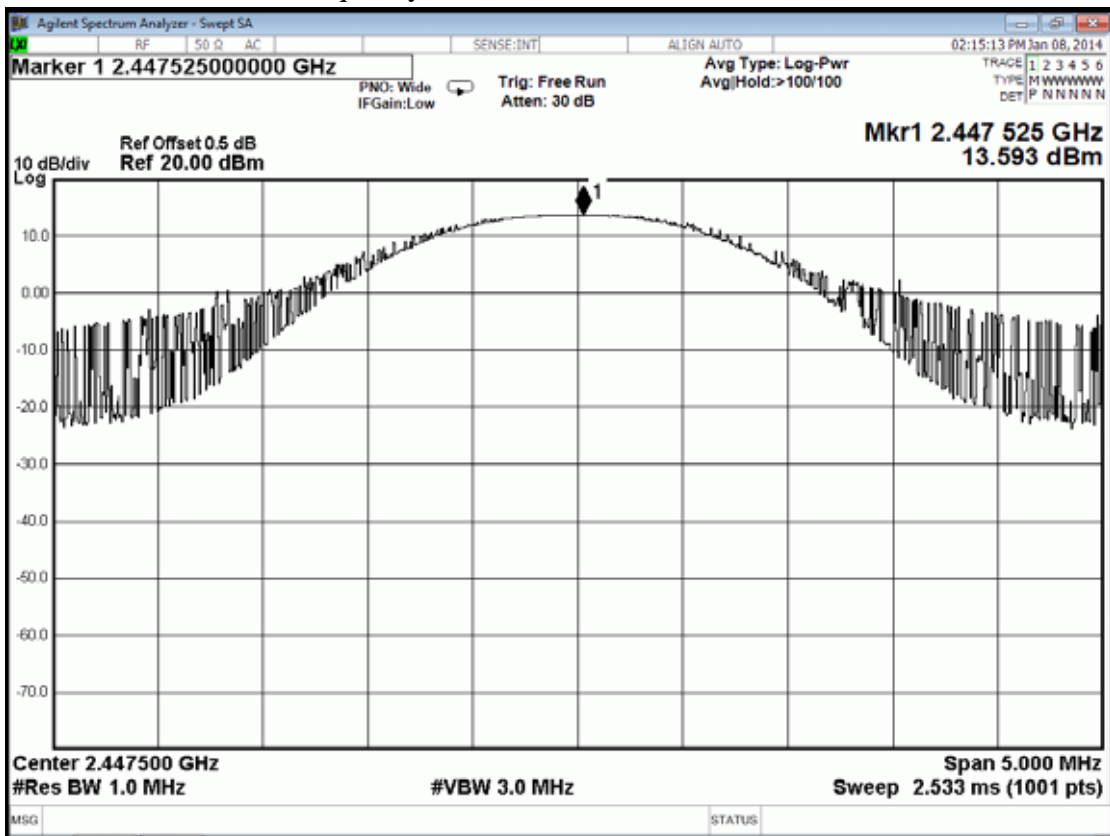


9.6.2. Radio Technology: T-FHSS Modulation

| No. | Channel | Test Frequency | Peak Output Power | | Limit |
|-----|---------|----------------|-------------------|------------------|-------|
| | | | ANT A | ANT B | |
| 1. | 01 | 2407.500MHz | 14.606dBm | 14.388dBm | 21dBm |
| 2. | 15 | 2435.500MHz | 14.182dBm | 14.143dBm | 21dBm |
| 3. | 31 | 2467.500MHz | 13.892dBm | 13.868dBm | 21dBm |


Remark: This device has two antennas for diversity, not supporting simultaneously transmit.

ANT A


Channel 01, Frequency: 2407.500MHz

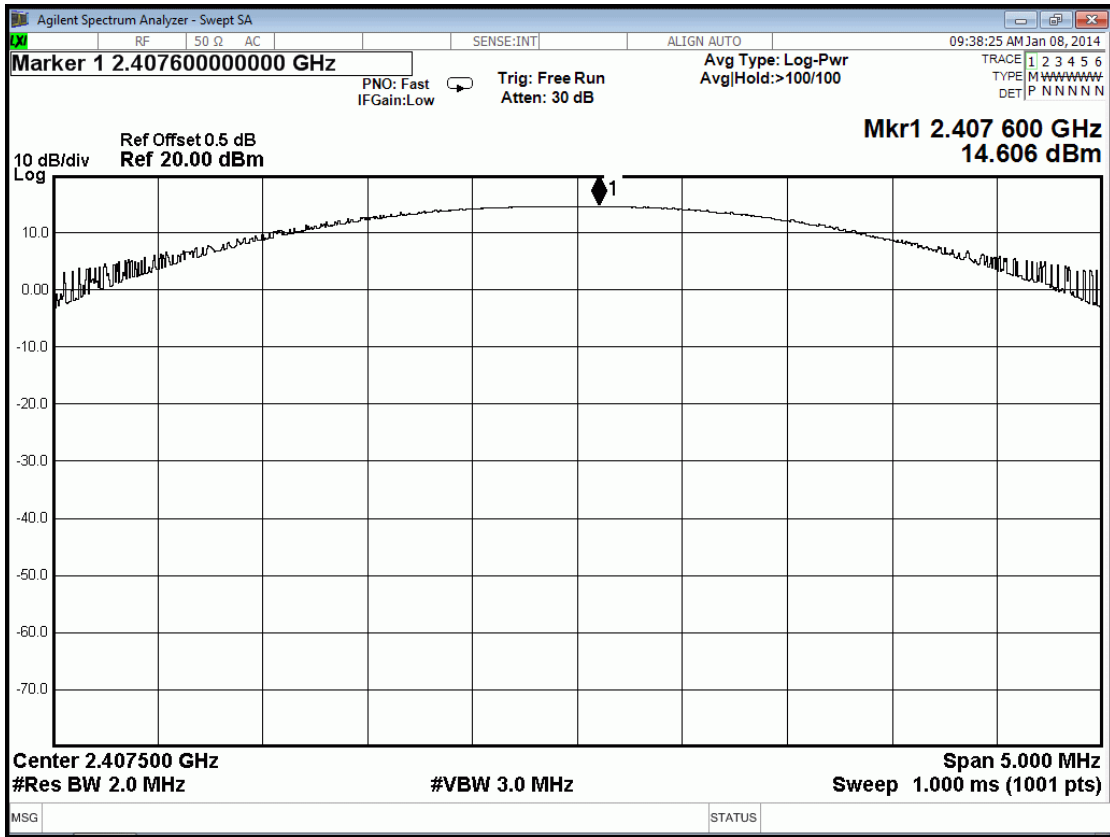

Channel 15, Frequency: 2435.500MHz

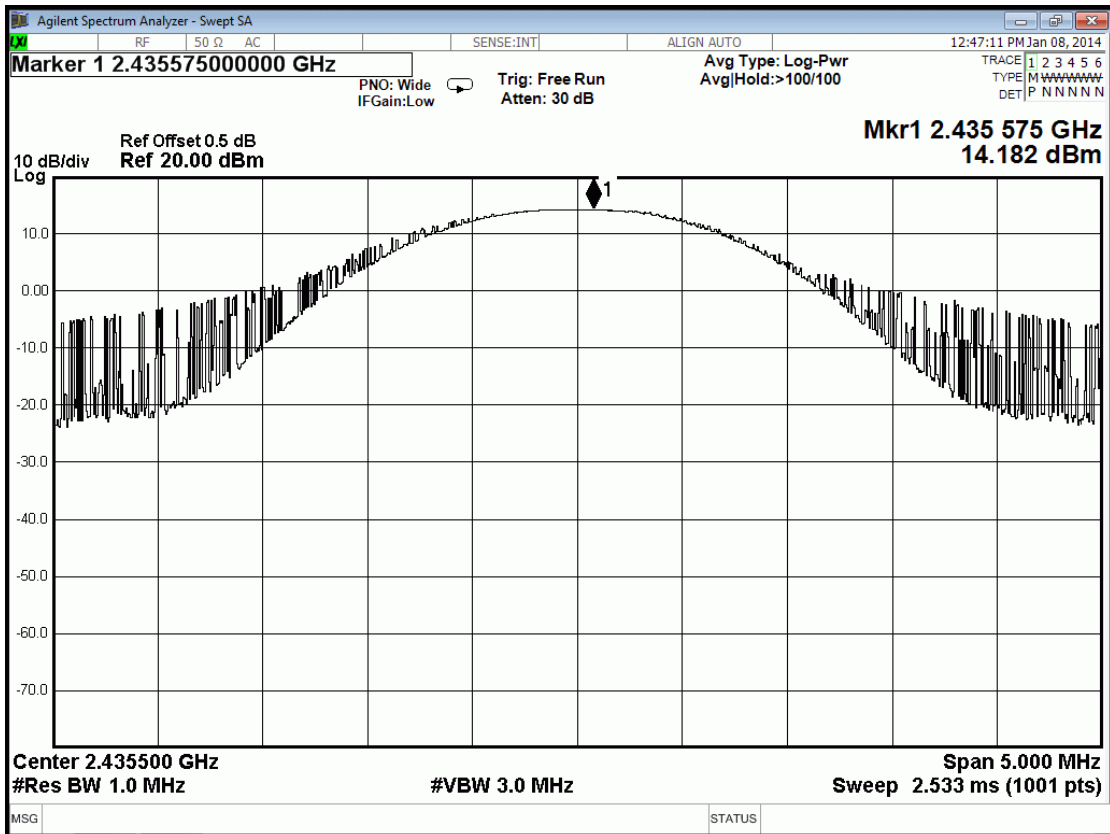


Channel 31, Frequency: 2467.500MHz

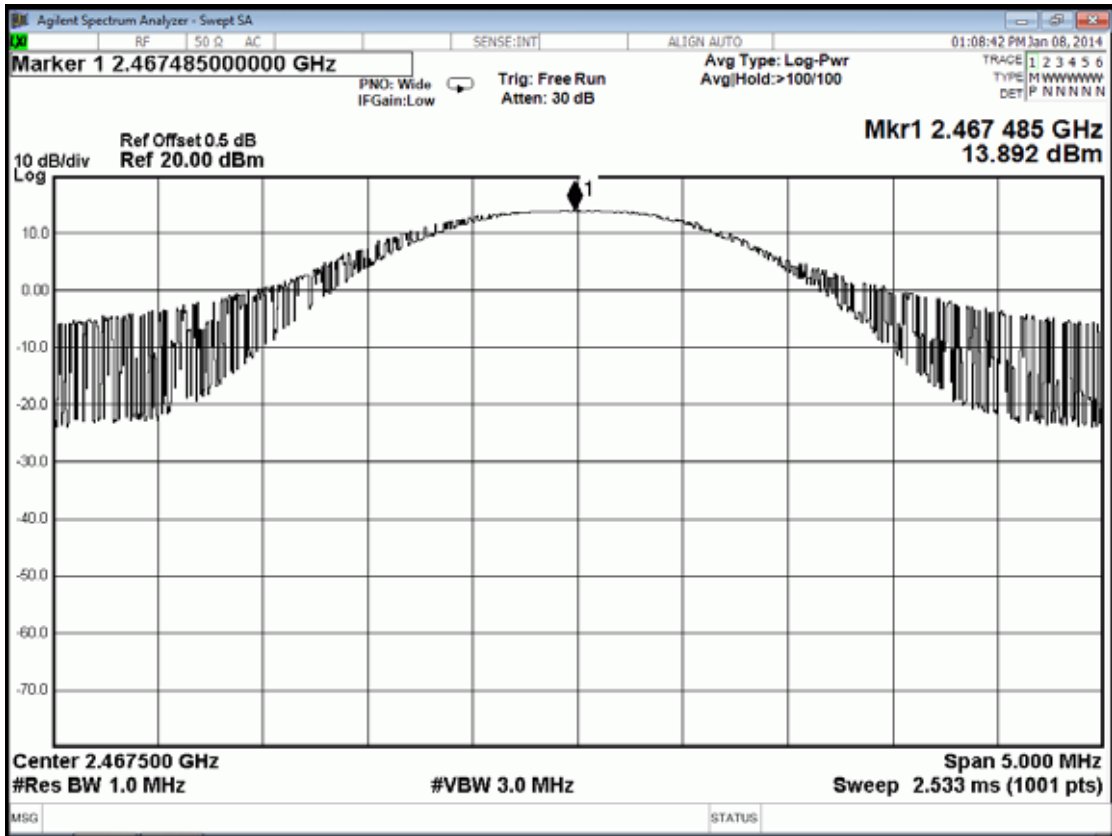


ANT B


Channel 01, Frequency: 2407.500MHz

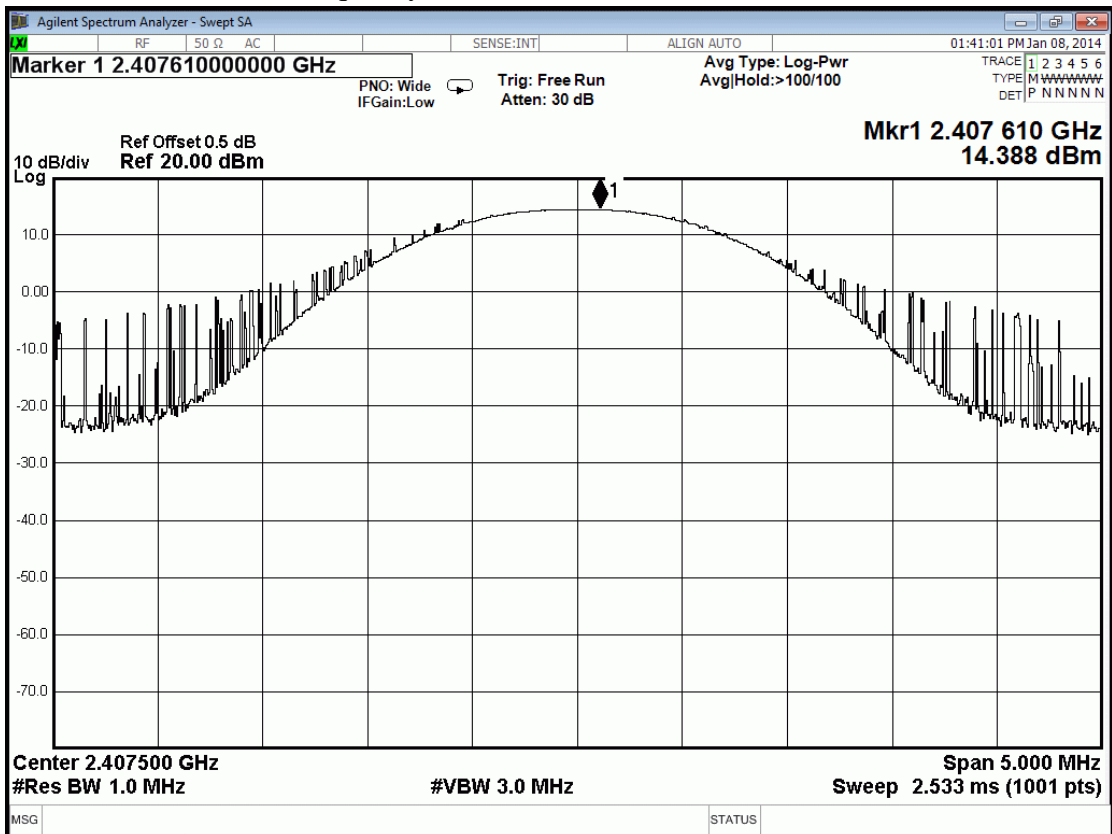

Channel 15, Frequency: 2435.500MHz

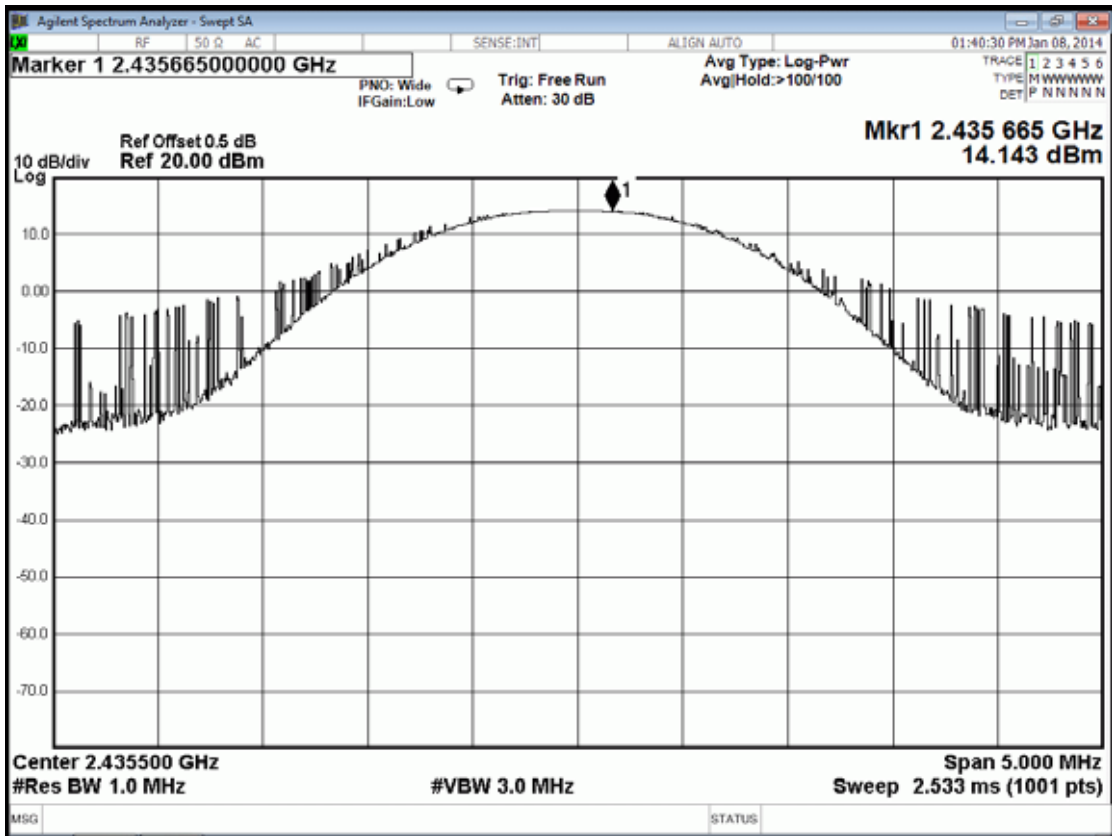

Channel 31, Frequency: 2467.500MHz

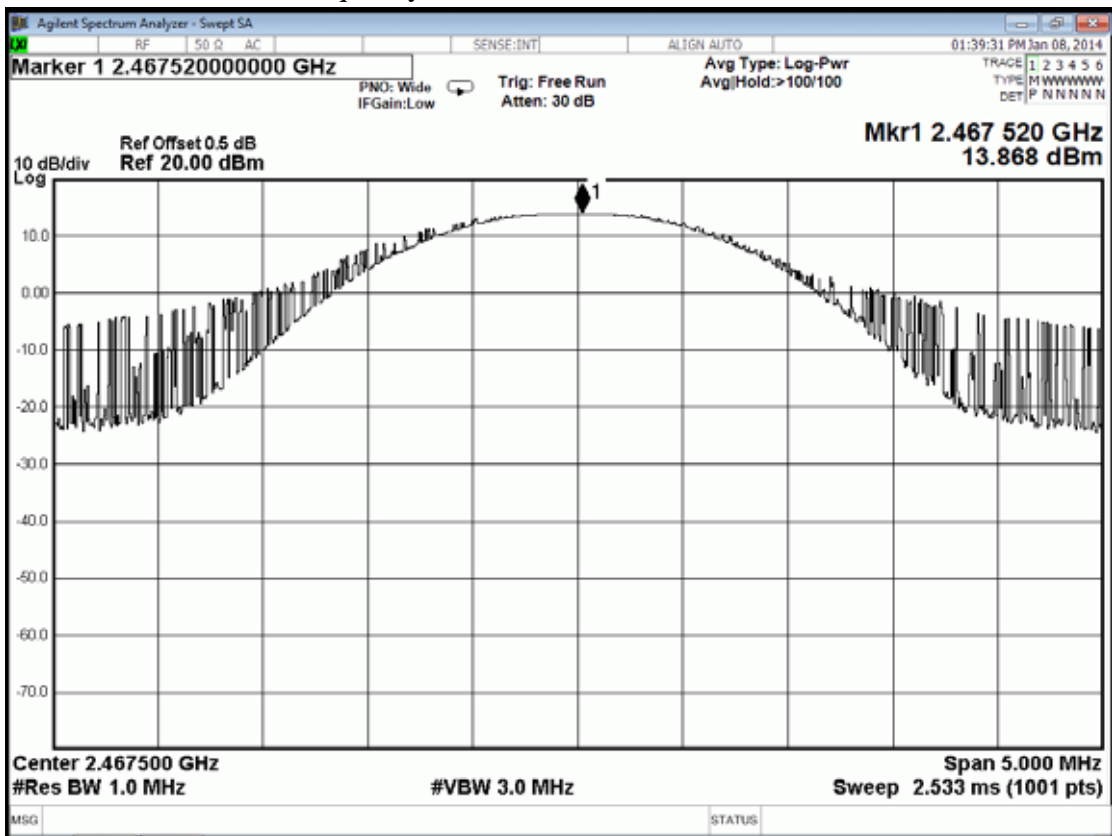

10.EMISSION LIMITATIONS MEASUREMENT

10.1.Test Equipment

The following test equipment was used during the emission limitations test:

| Item | Type | Manufacturer | Model No. | Serial No. | Last Cal. | Next Cal. |
|------|-------------------|--------------|------------|------------|--------------|--------------|
| 1. | Spectrum Analyzer | Agilent | N9030A-544 | US51350140 | Jul. 30, 13' | Jul. 29, 14' |
| 2. | DC Power Supply | TOP WARD | 3303A | 721773 | N/A | N/A |

10.2.Block Diagram of Test Setup

The same as section.4.2.

10.3.Specification Limits (§15.247(c))

10.3.1.In any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (See Section 15.205(c)).(This test result attaching to §3.6.3)

10.3.2.The reference level for determining limit of emission limitations is according to the value measured indicated in plots at section 8.6.

10.4.Operating Condition of EUT

Same as 20dB bandwidth measurement which was listed in section 4.4.

10.5.Test Procedure

The transmitter output was connected to the spectrum analyzer. Set both RBW and VBW of spectrum analyzer to 100kHz with frequency range from 30MHz to 25GHz.



The measurement guideline was according to FCC Public Notice DA 00-705.



10.6.Test Results



PASSED. The testing data was attached in the next pages.
(ANT B was measured for having worst performance.)

Test Date: Jan. 08, 2014 Temperature : 24 Humidity : 50%



10.6.1. Radio Technology: S-FHSS Modulation Channel 01, Frequency: 2403.250MHz

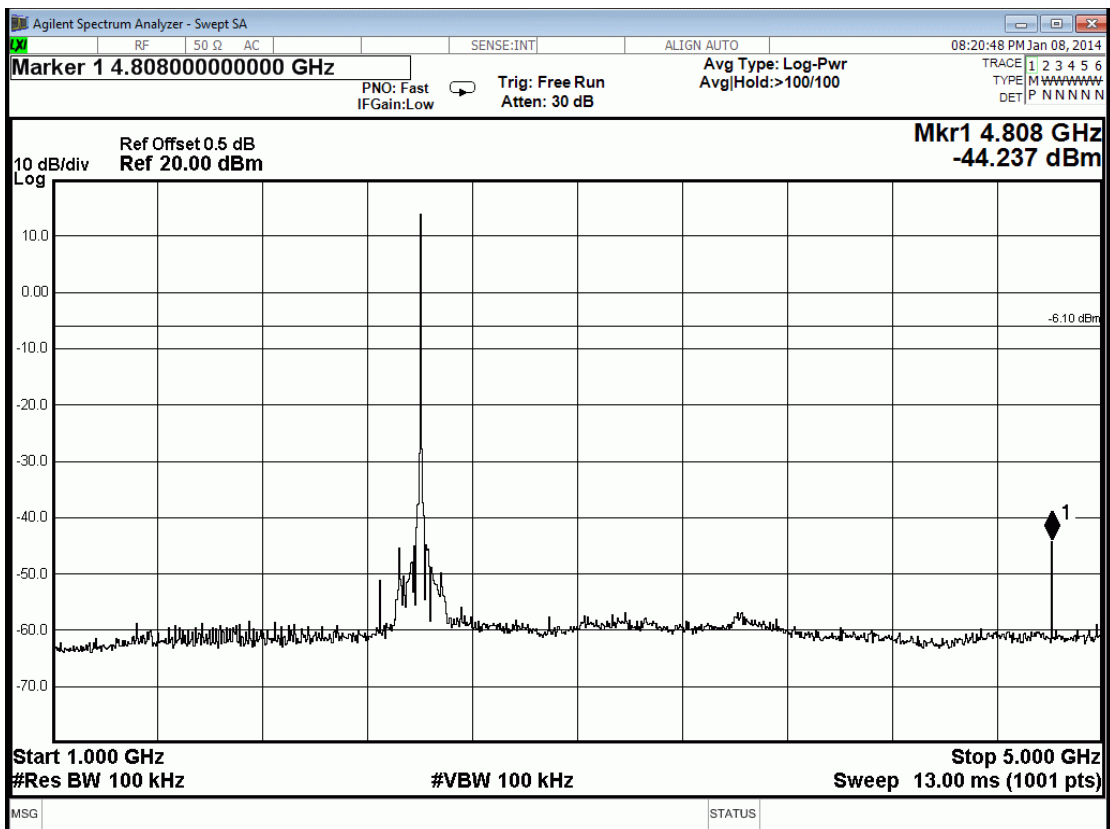
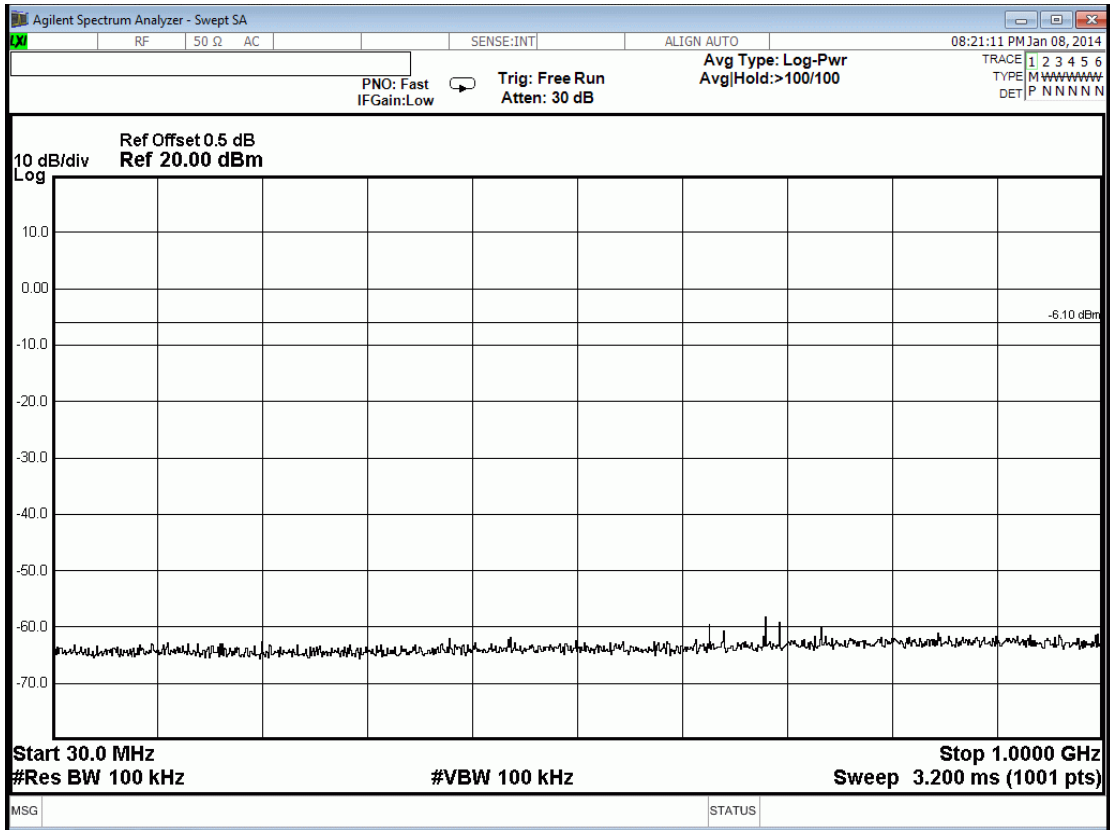


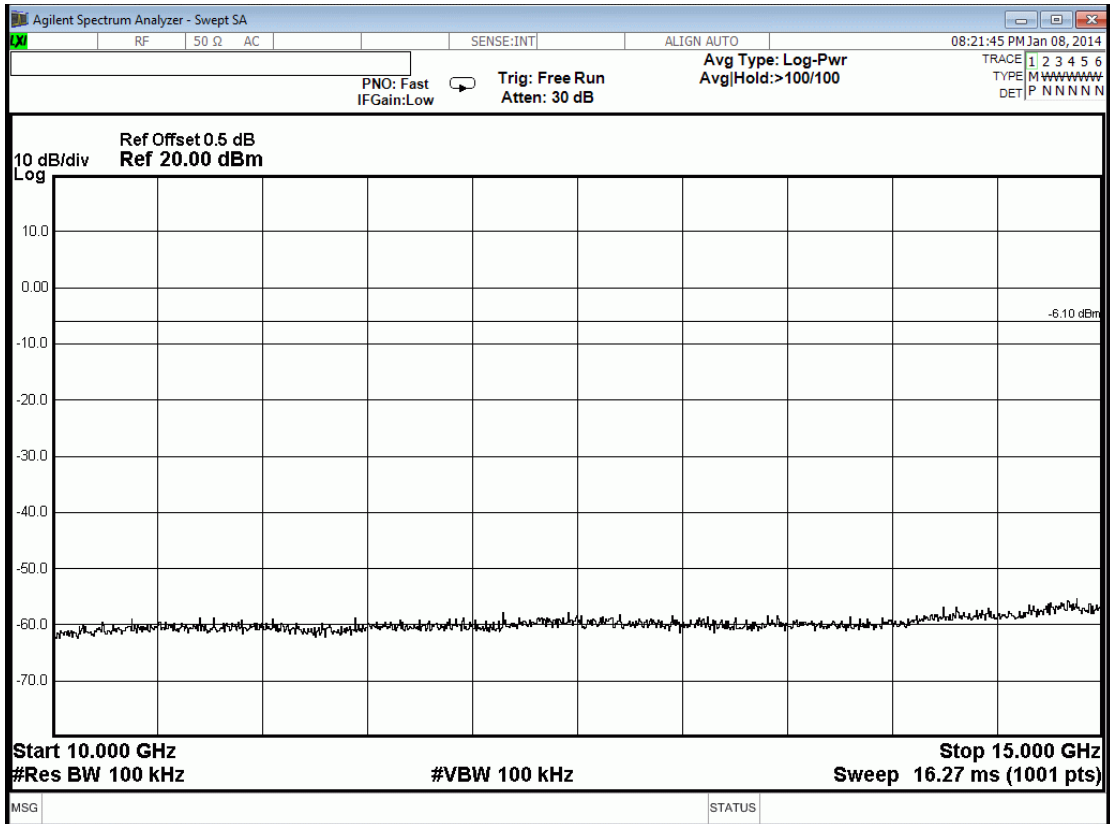
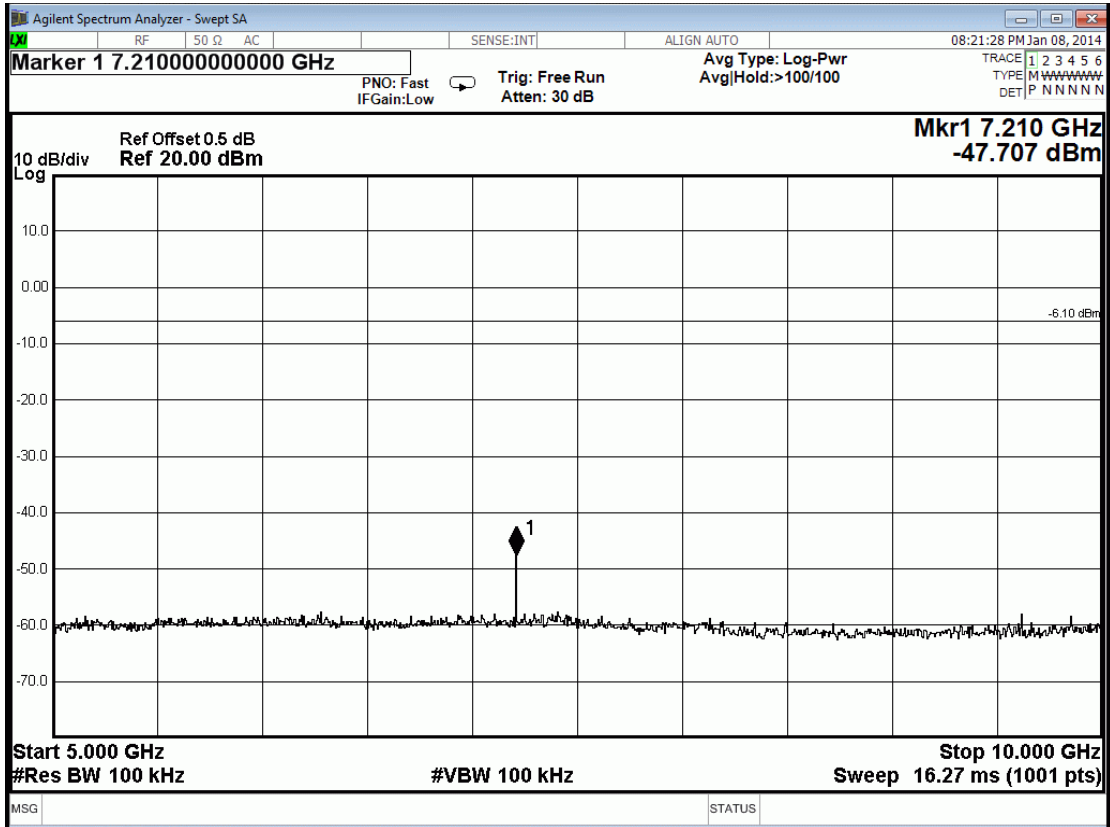


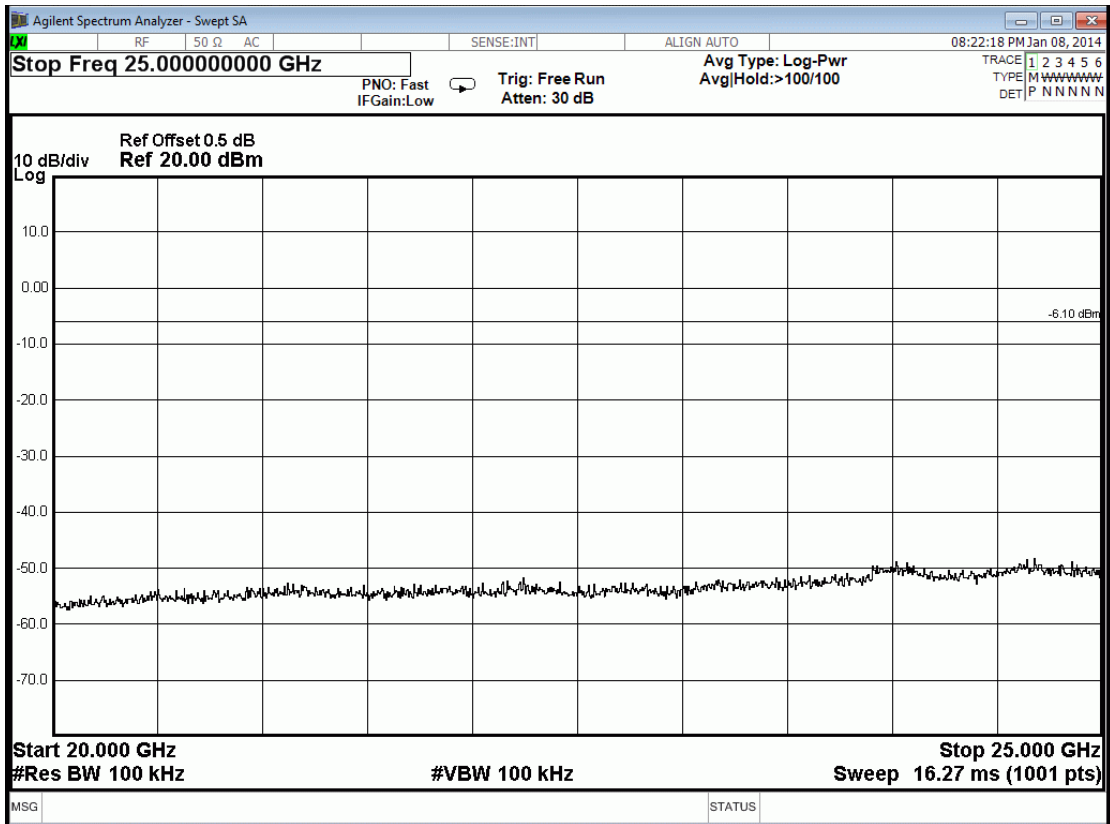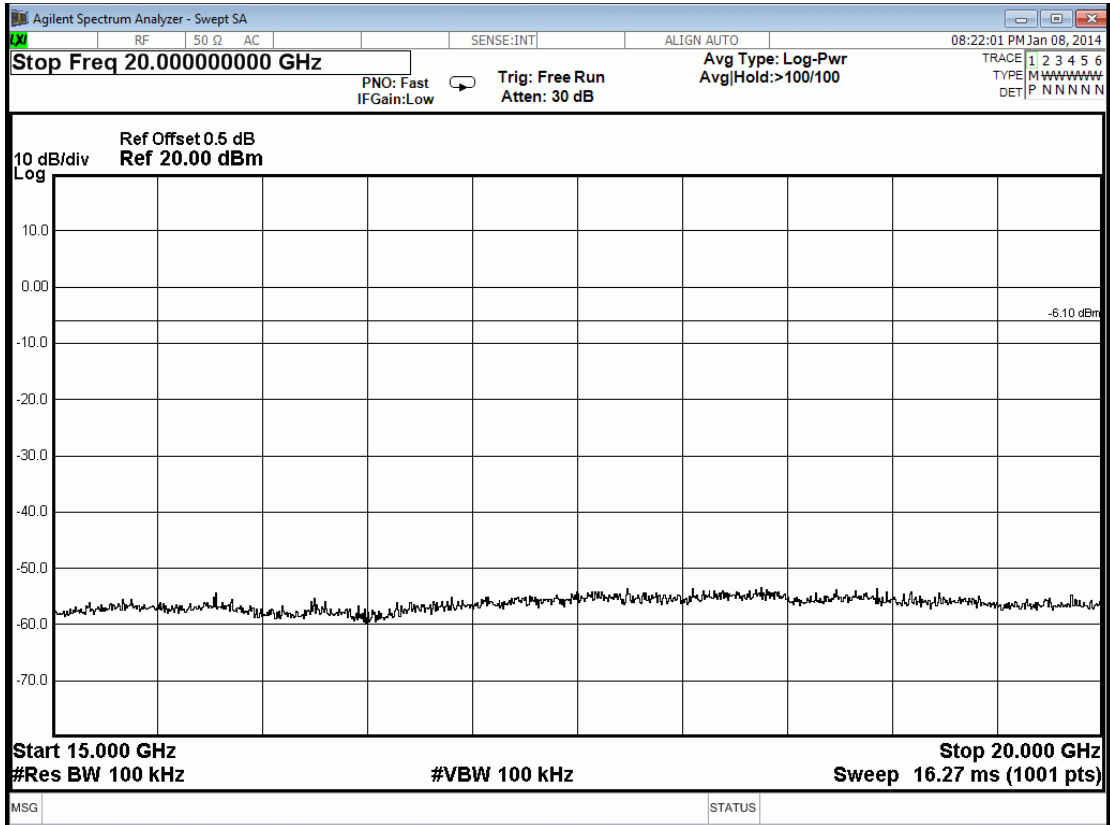



Channel 30, Frequency: 2425.00MHz

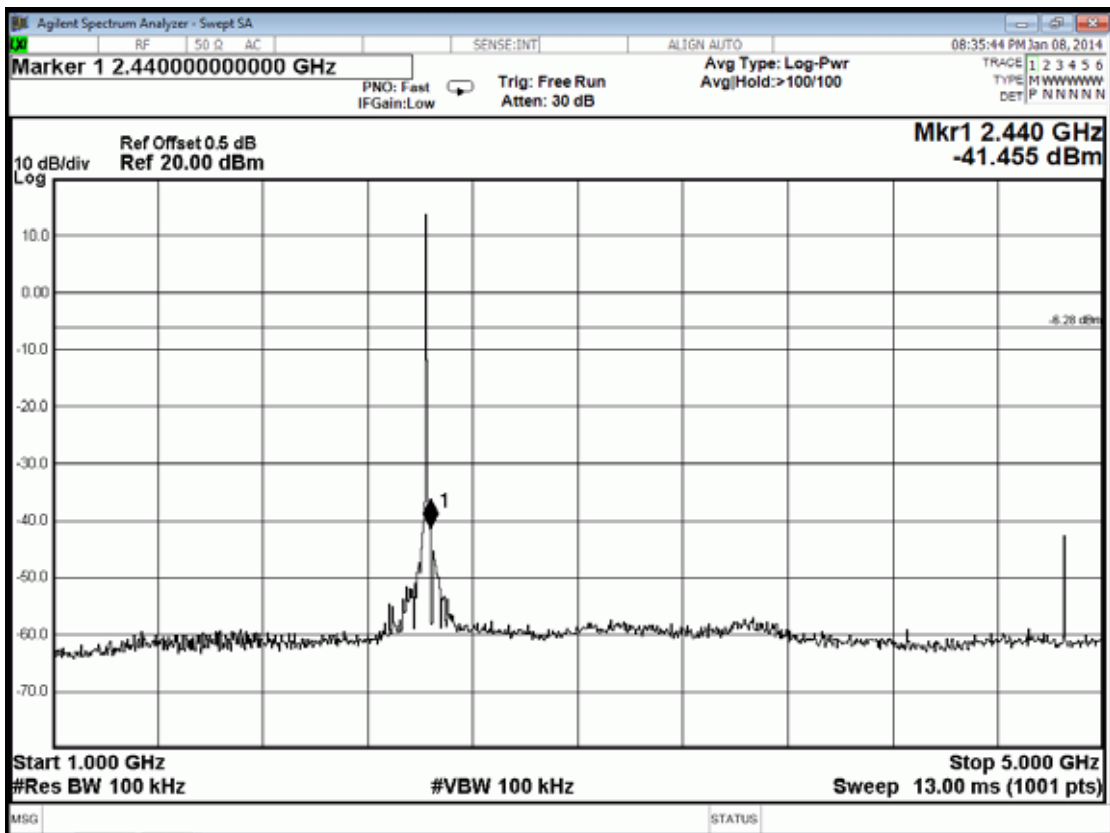
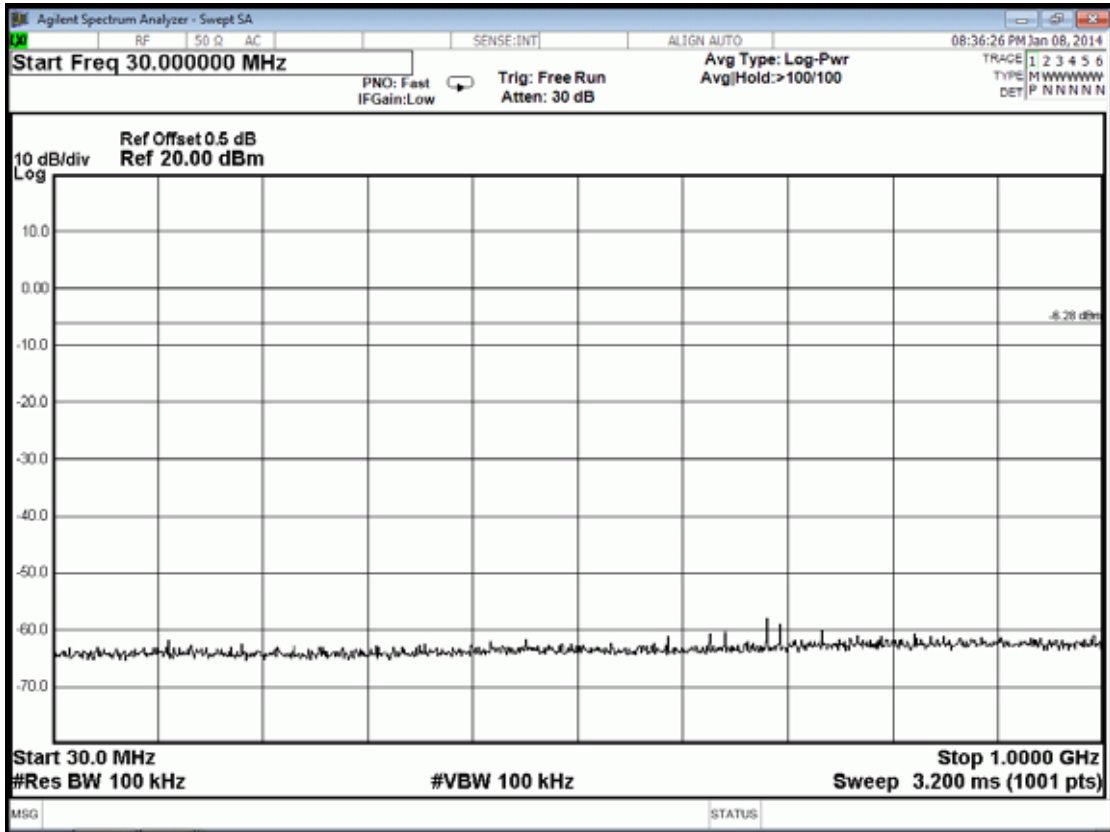


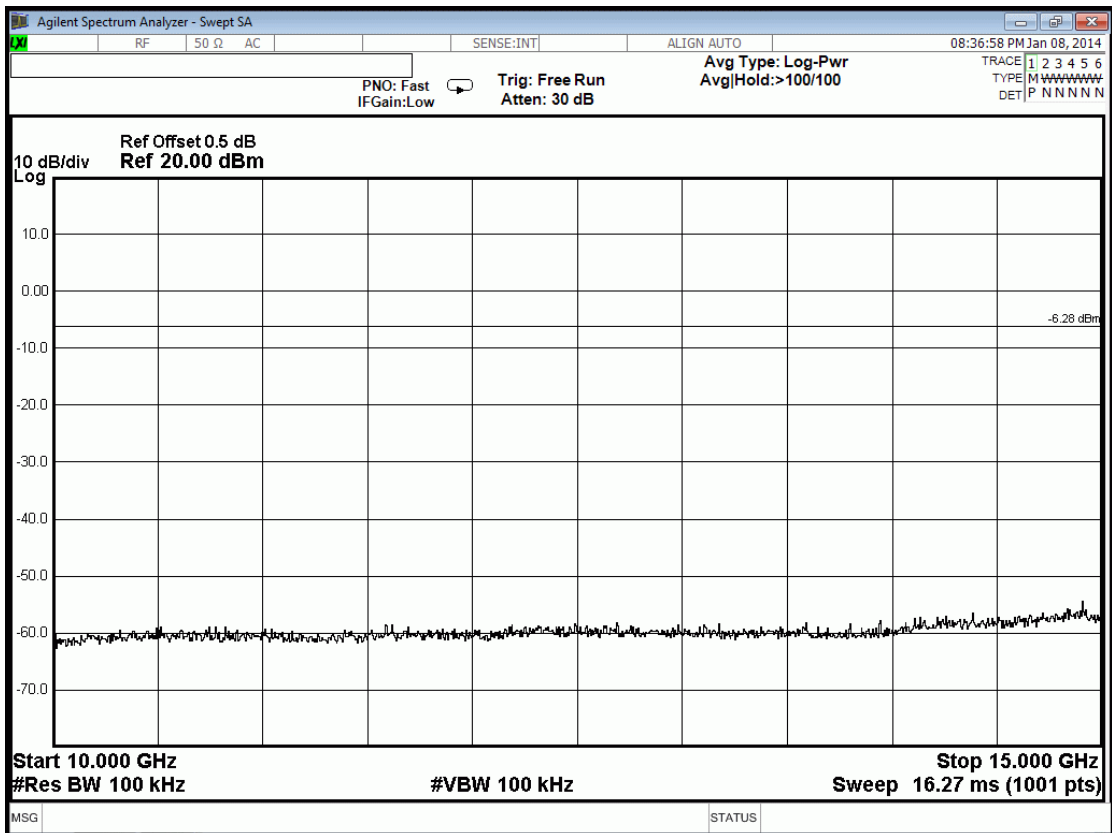
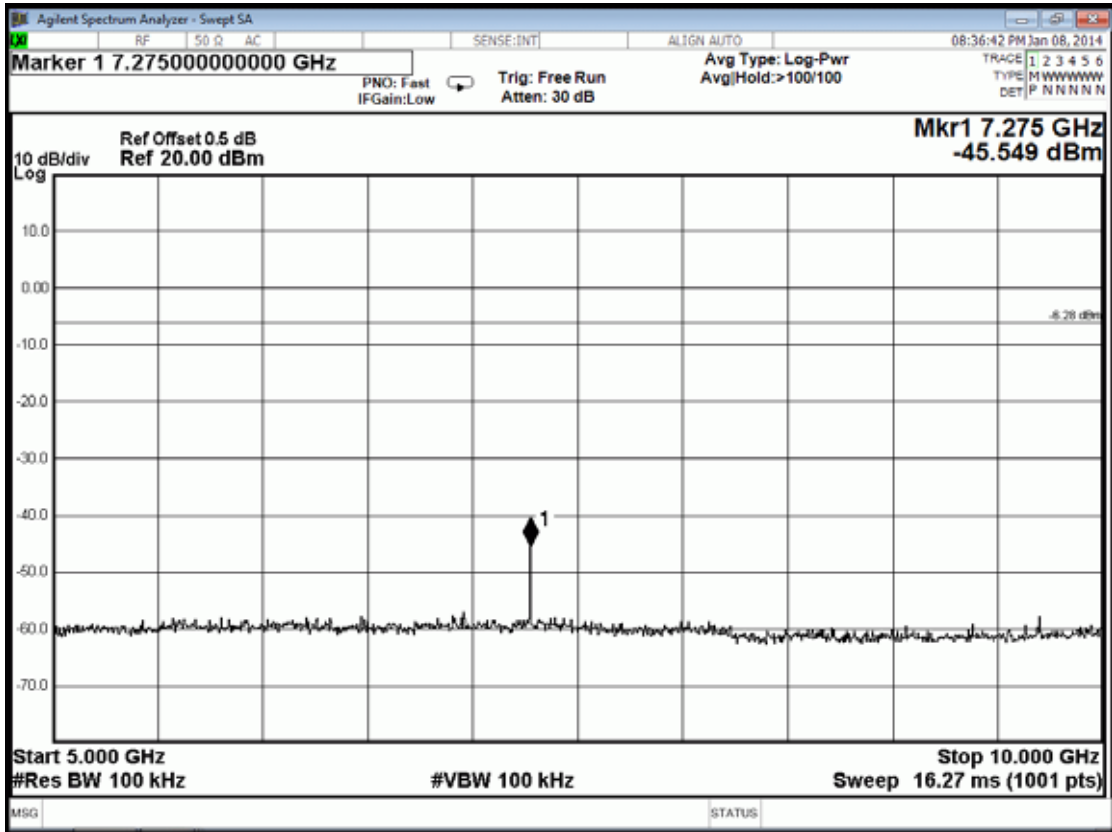


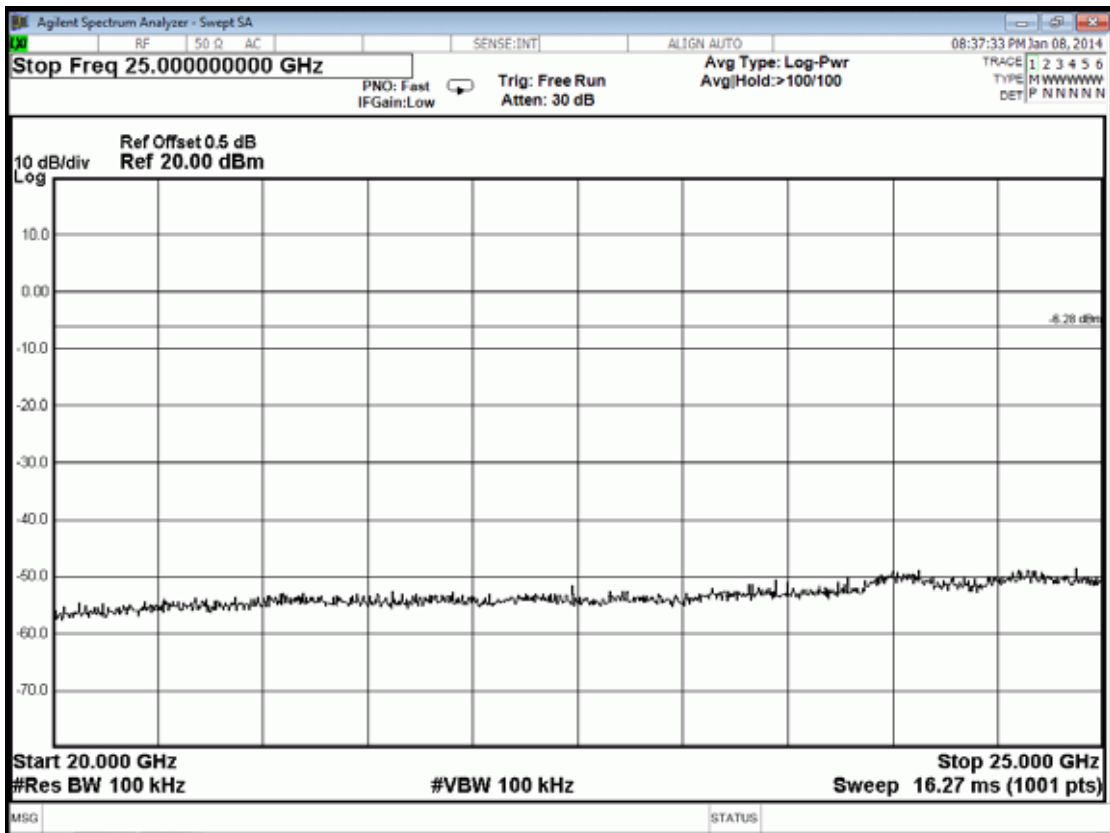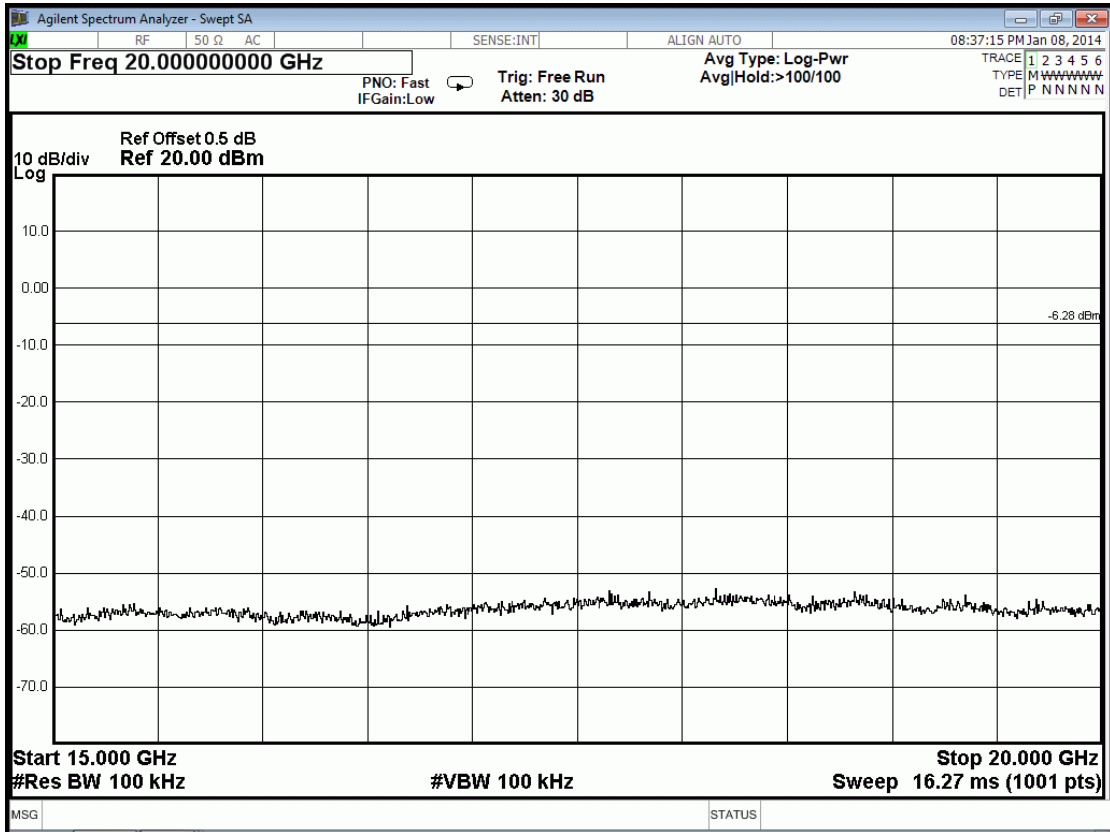



Channel 60, Frequency: 2447.5MHz

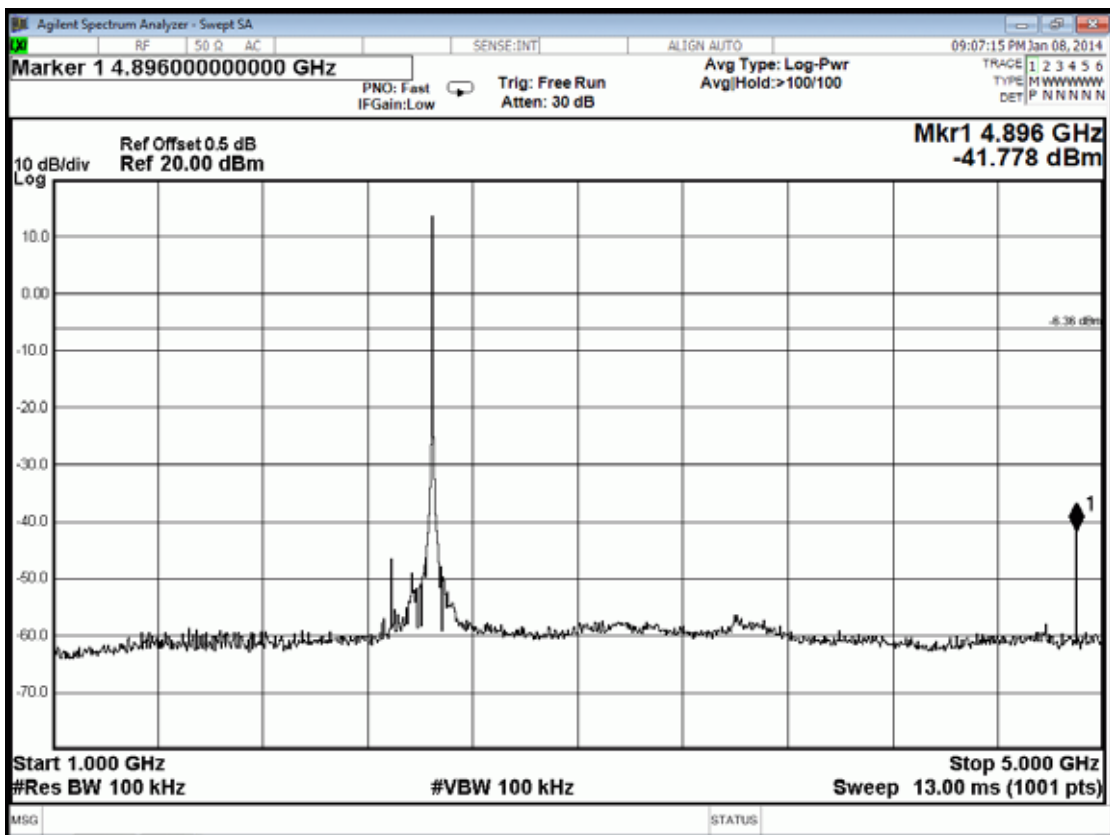
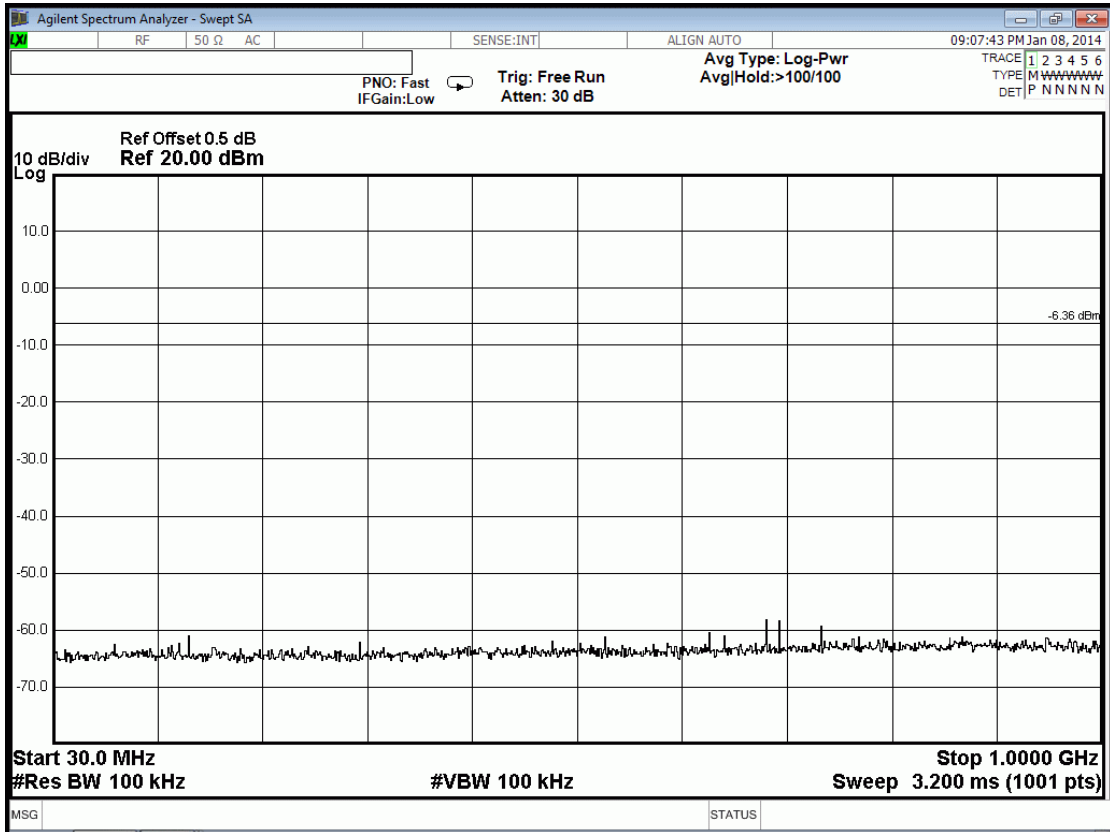


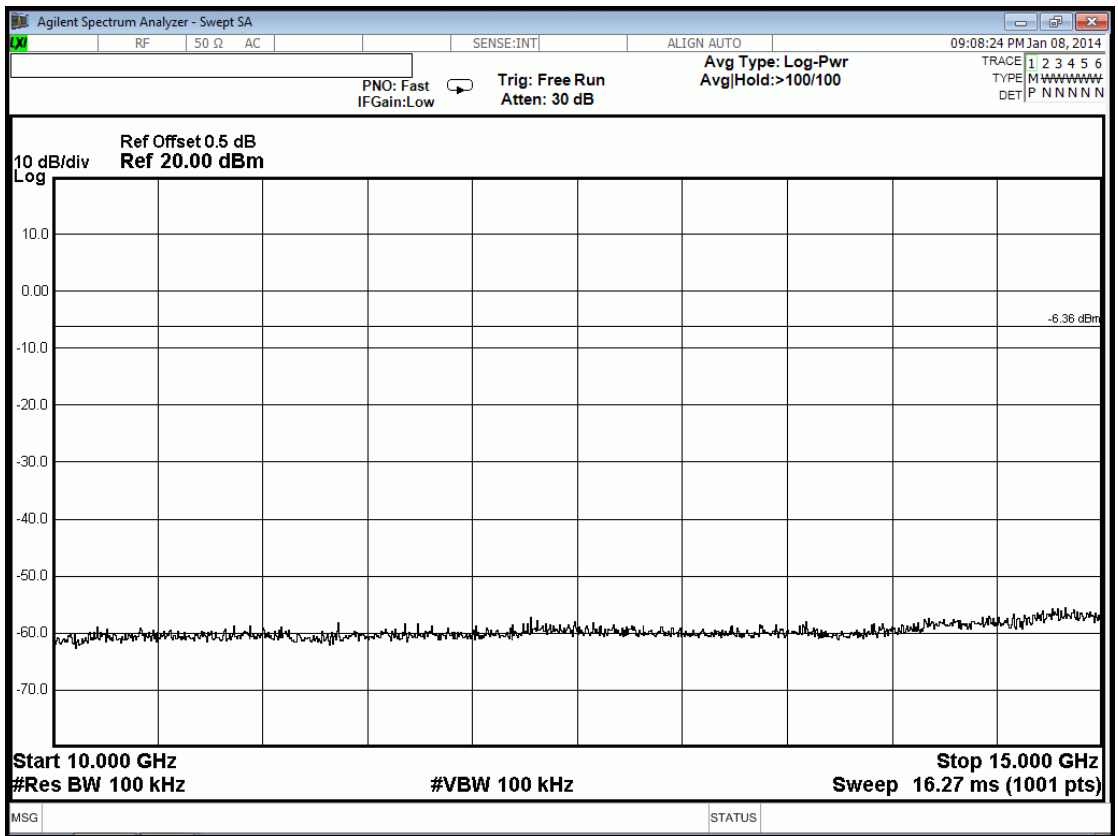
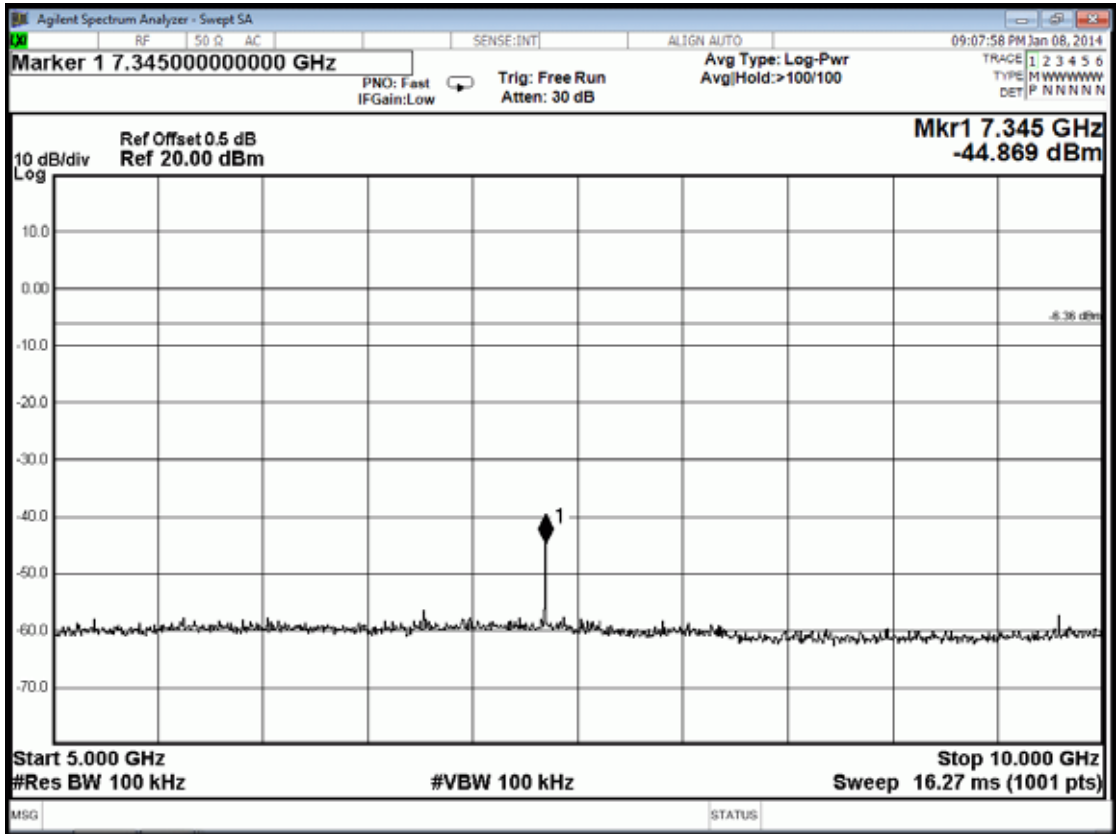


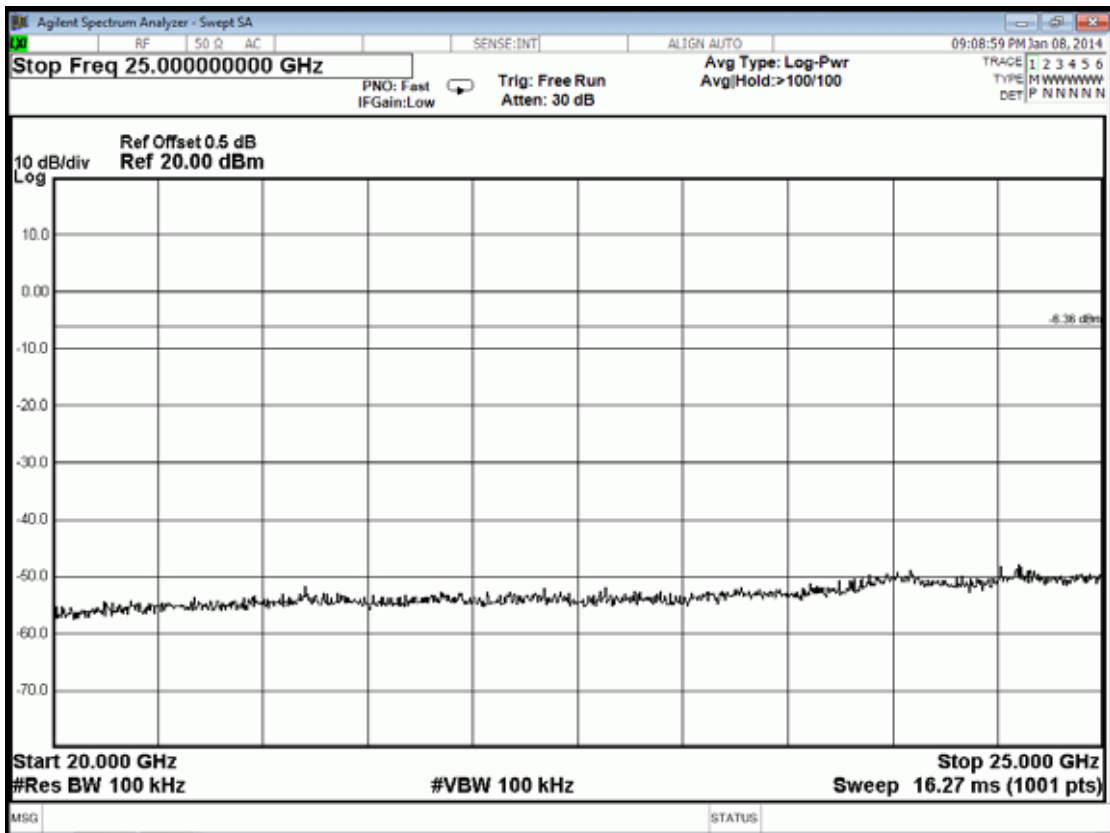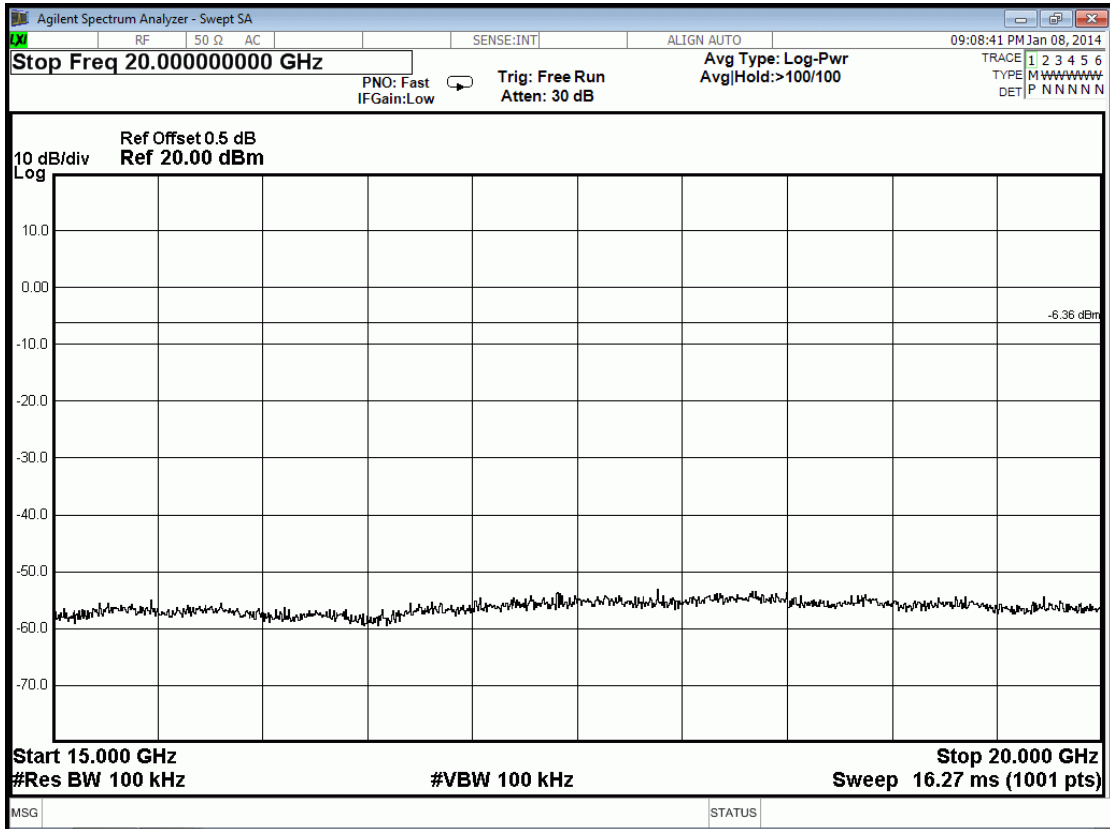



10.6.2. Radio Technology: T-FHSS Modulation Channel 01, Frequency: 2407.500MHz

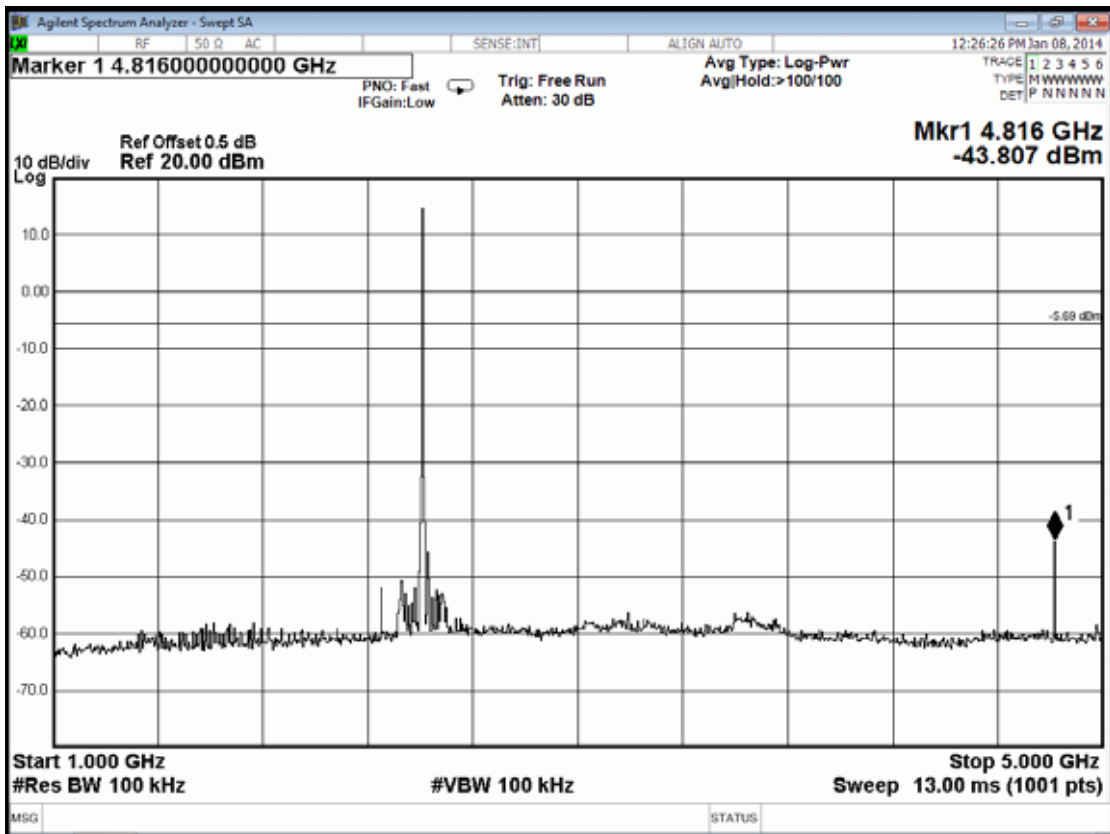
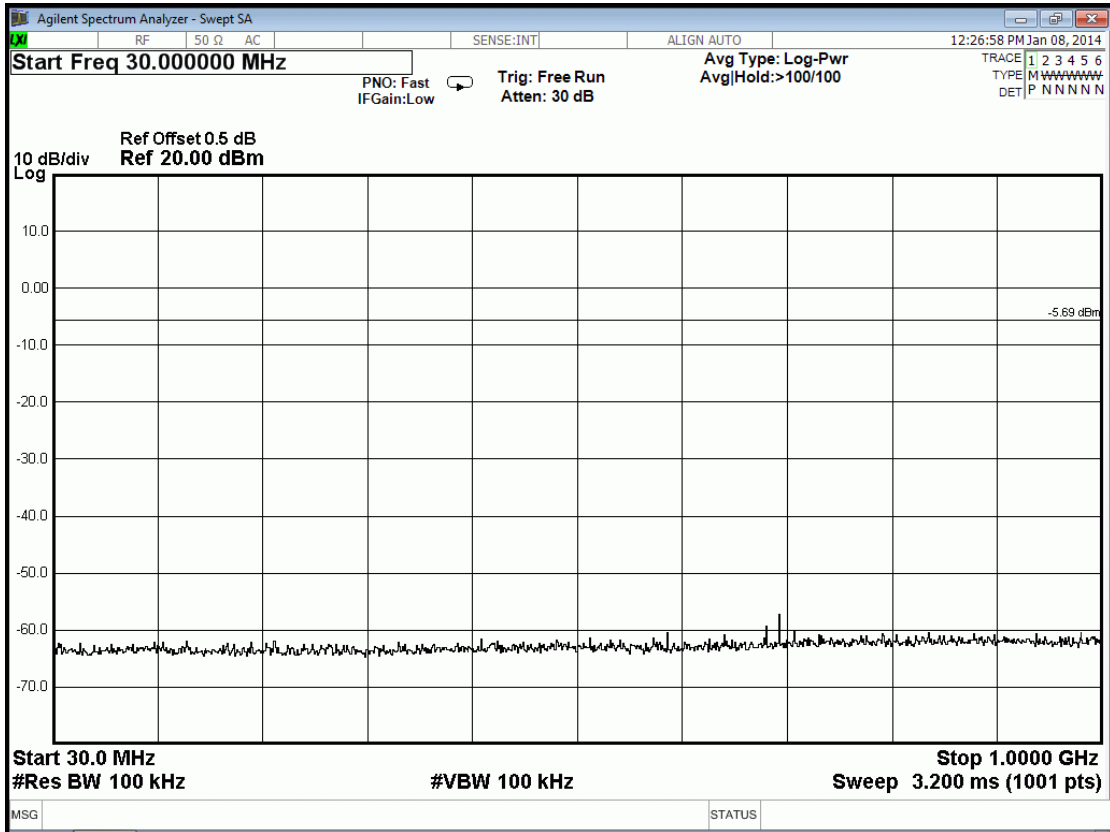


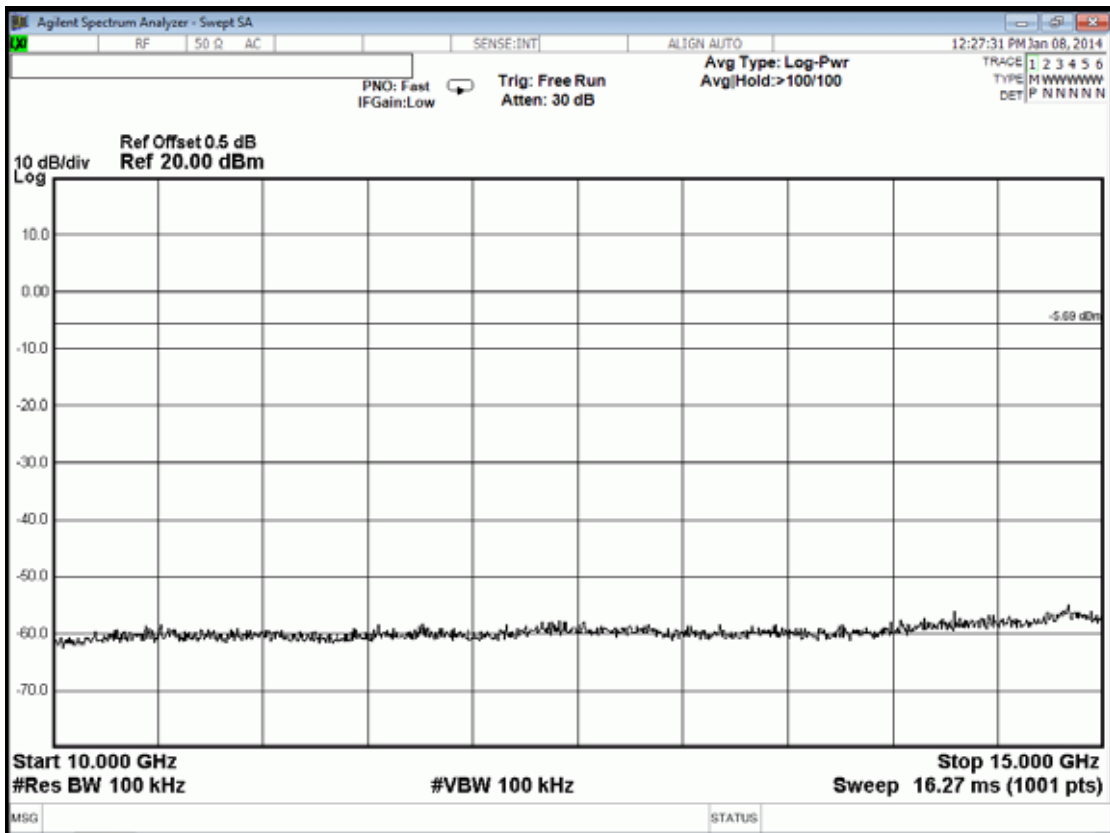
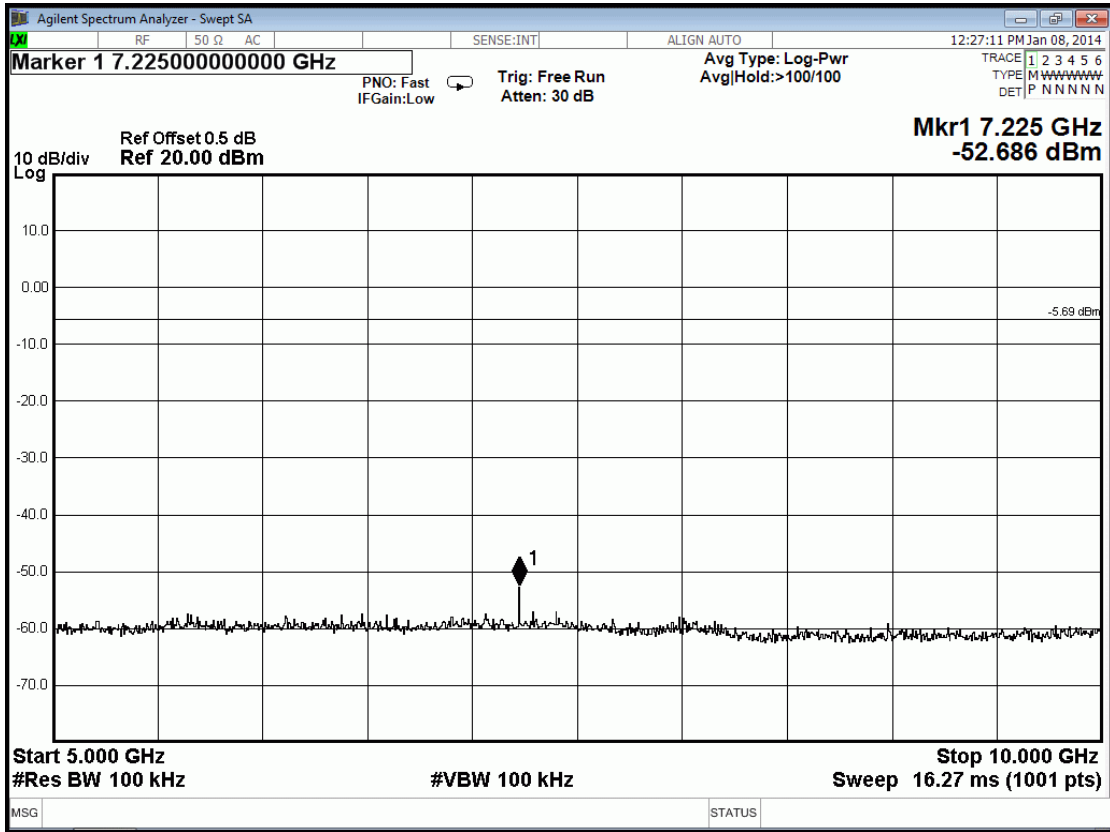


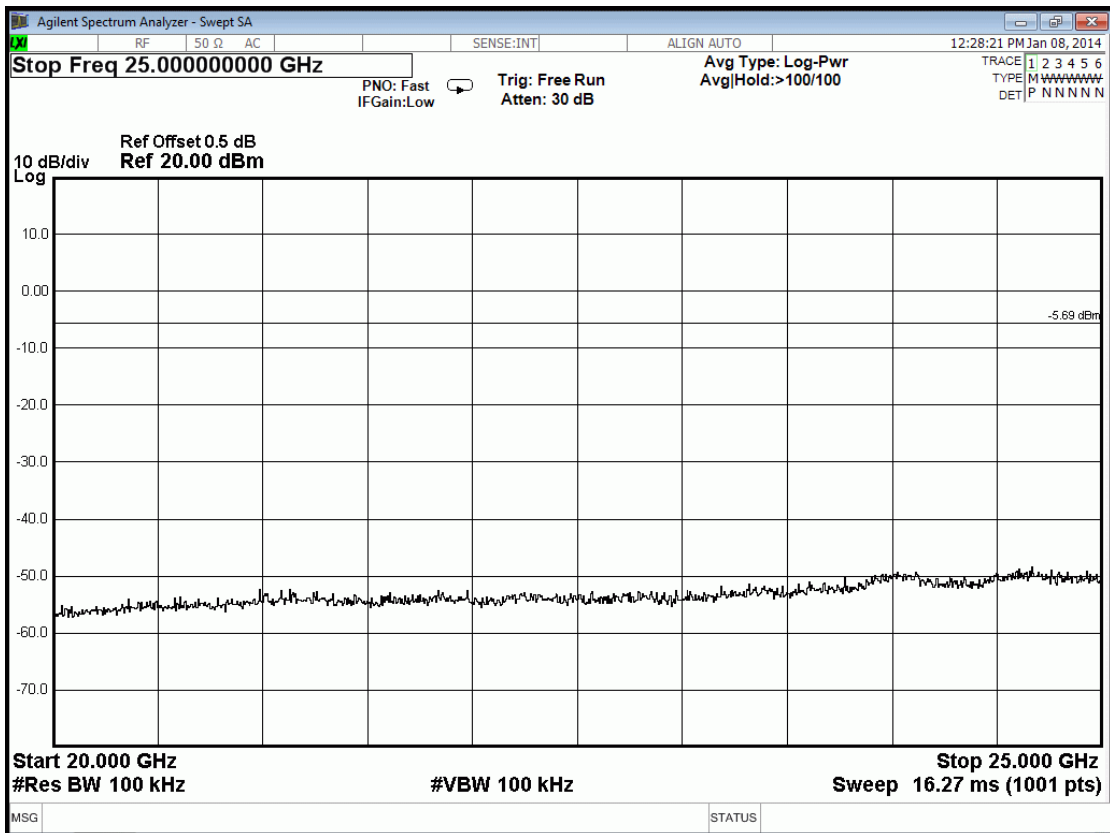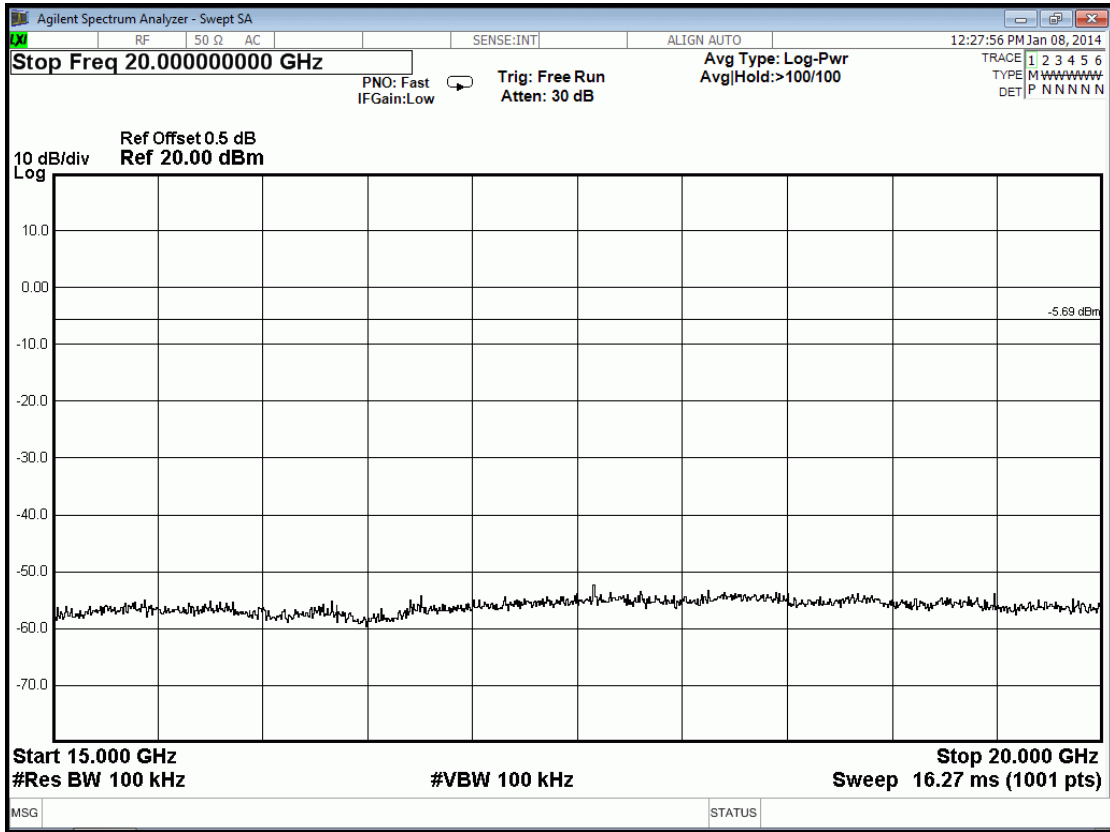



Channel 15, Frequency: 2435.500MHz

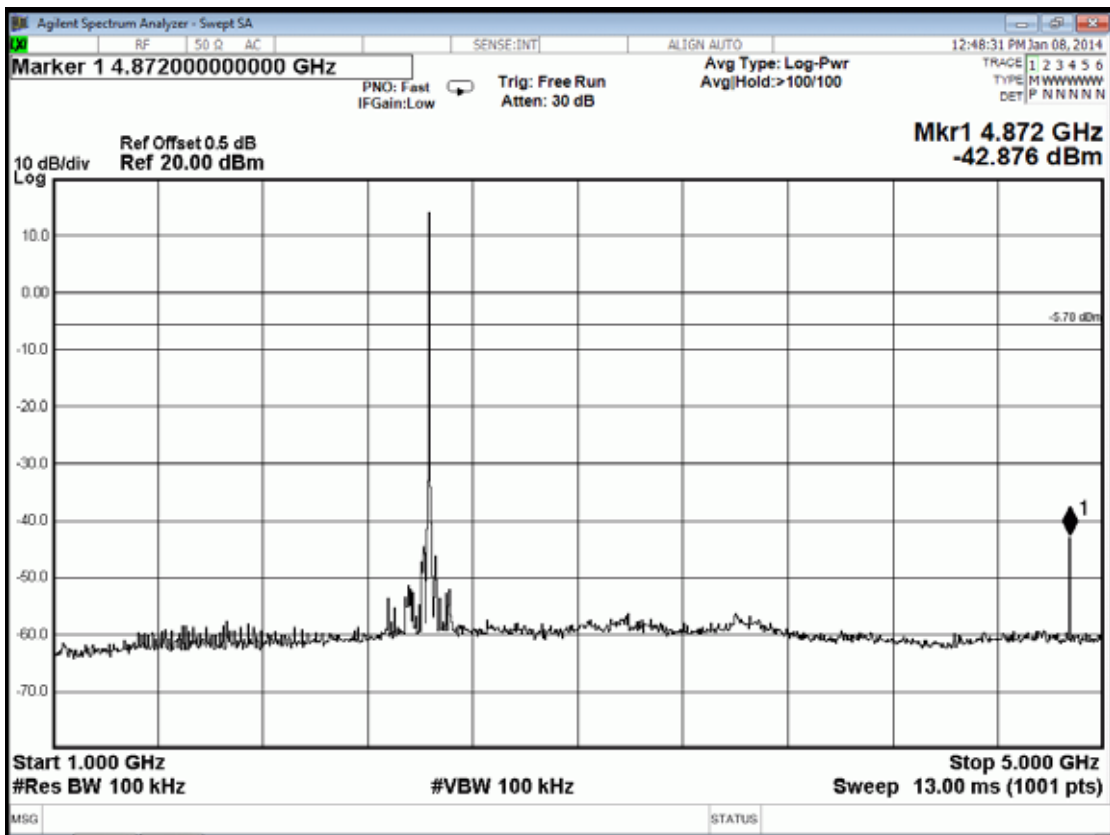
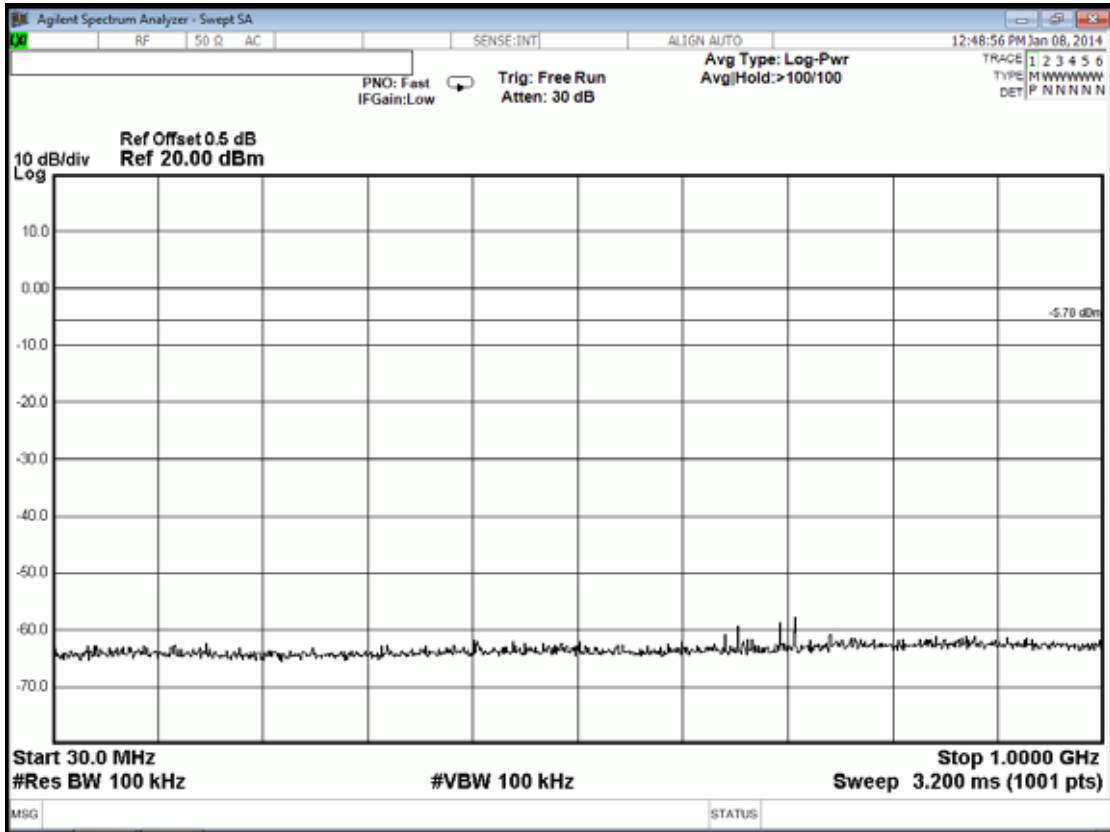


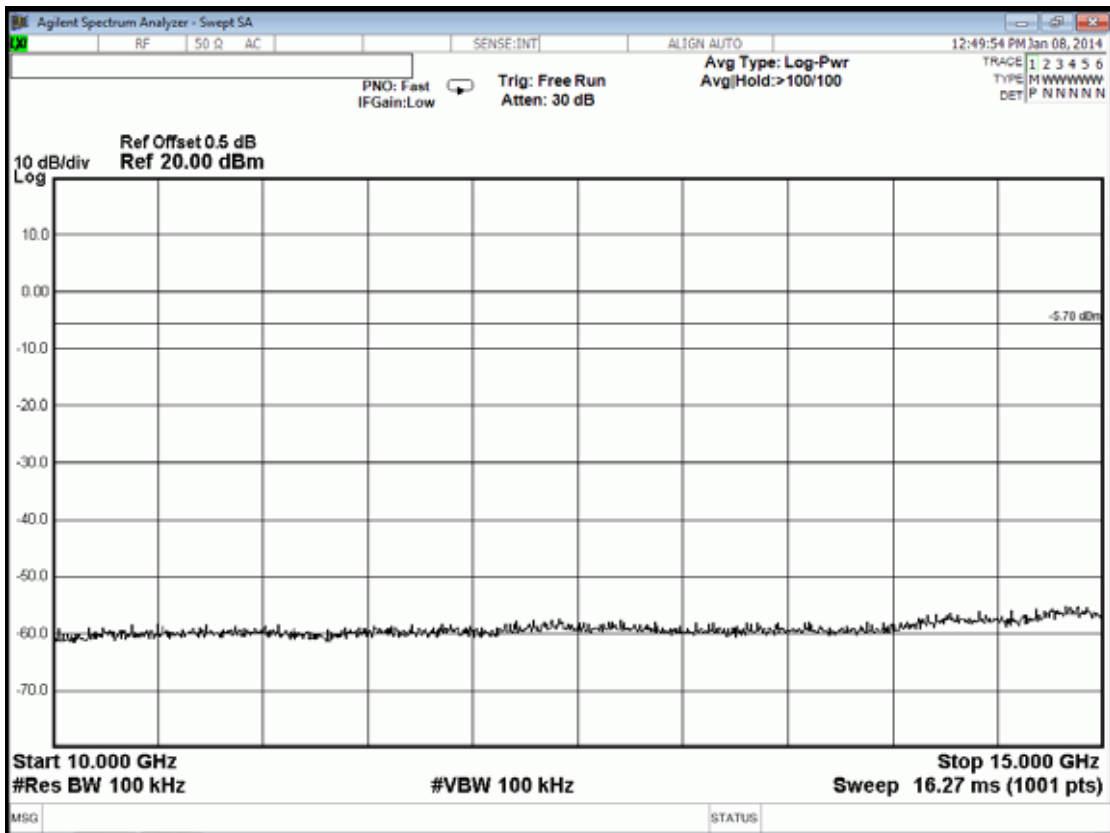
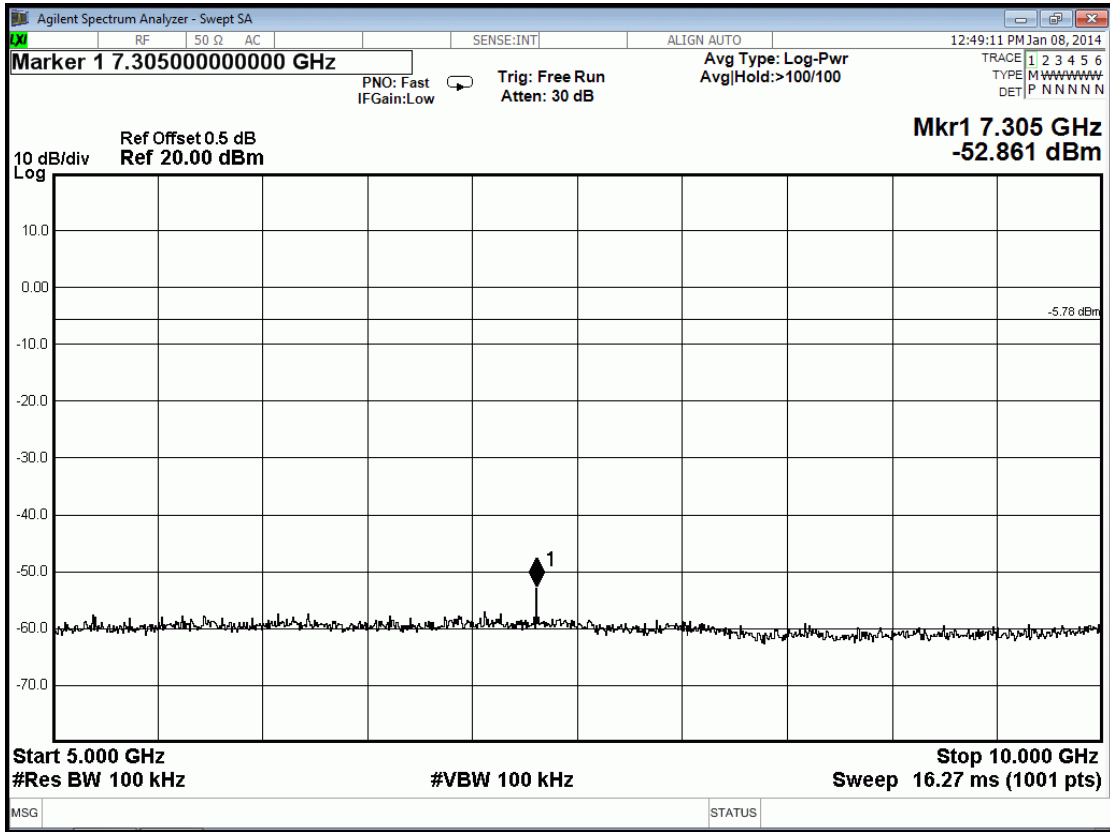


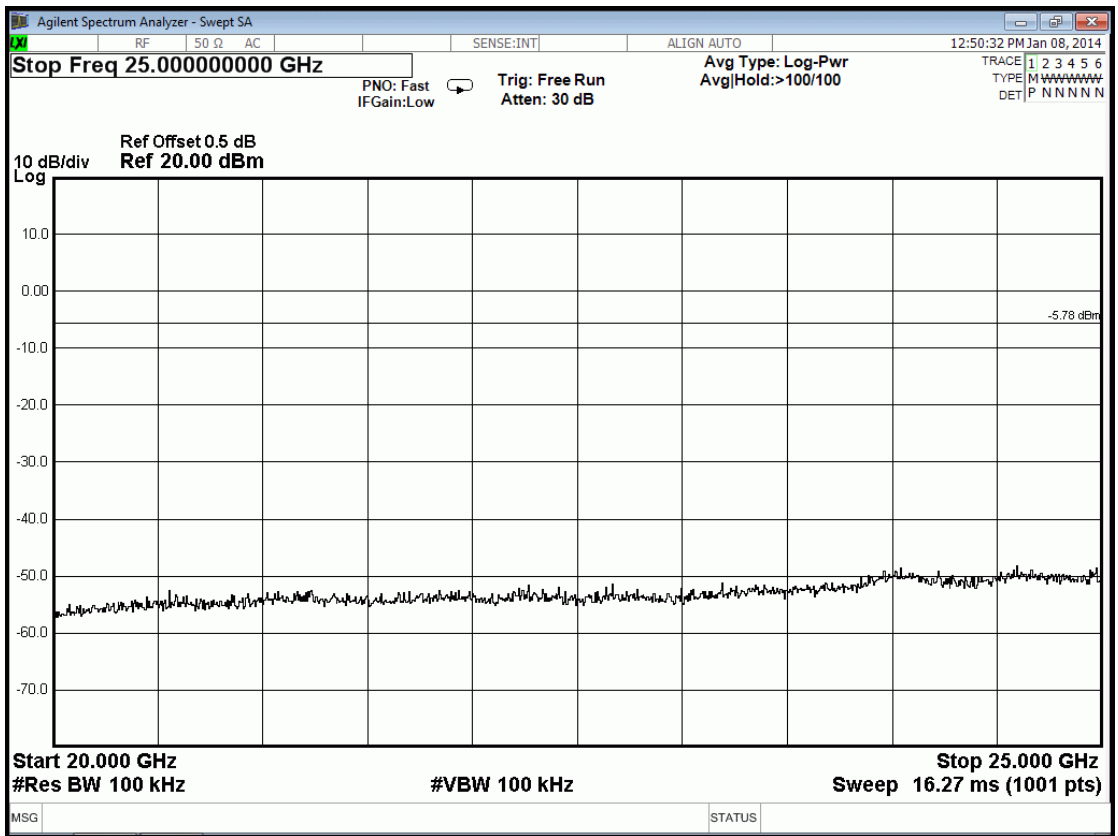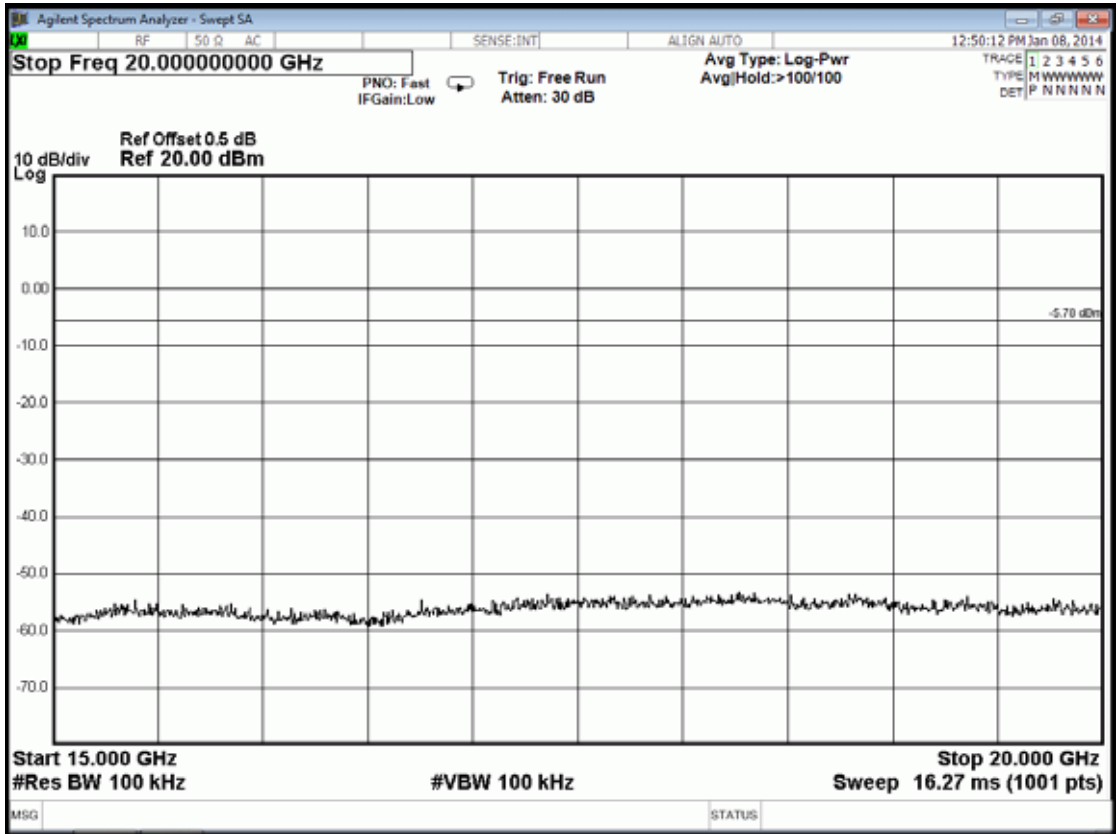

Channel 31, Frequency: 2467.500MHz

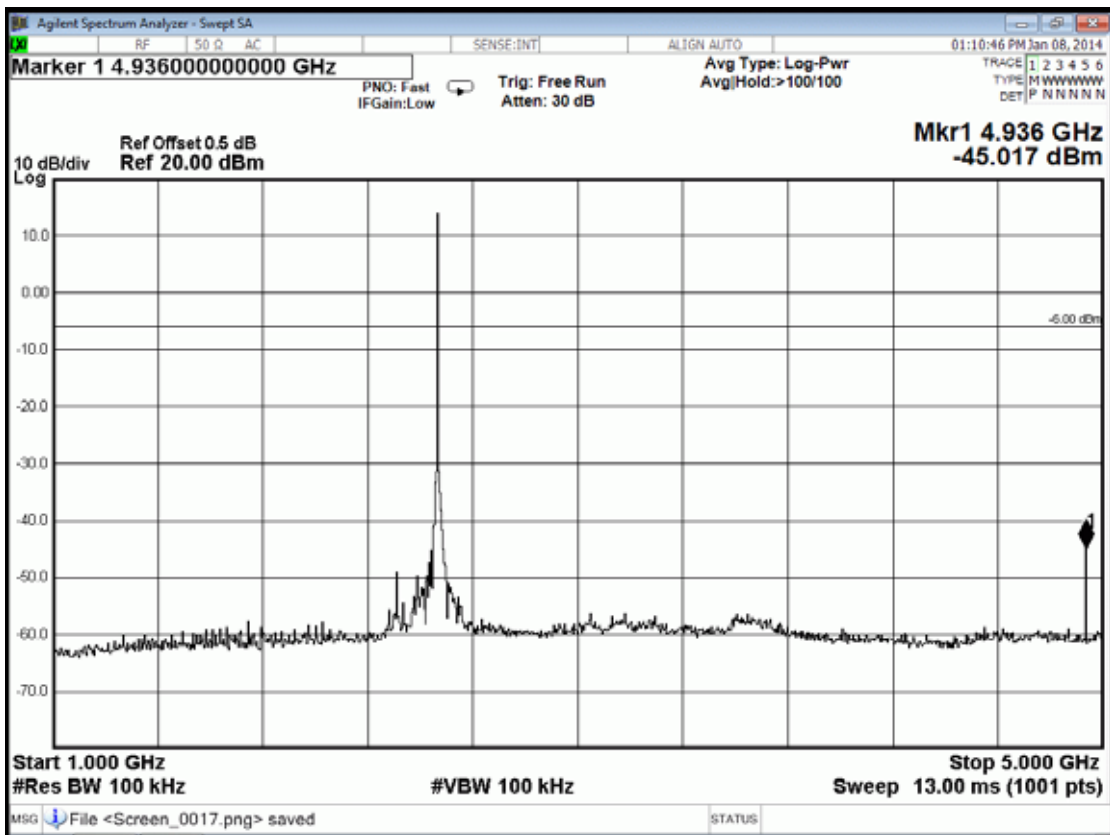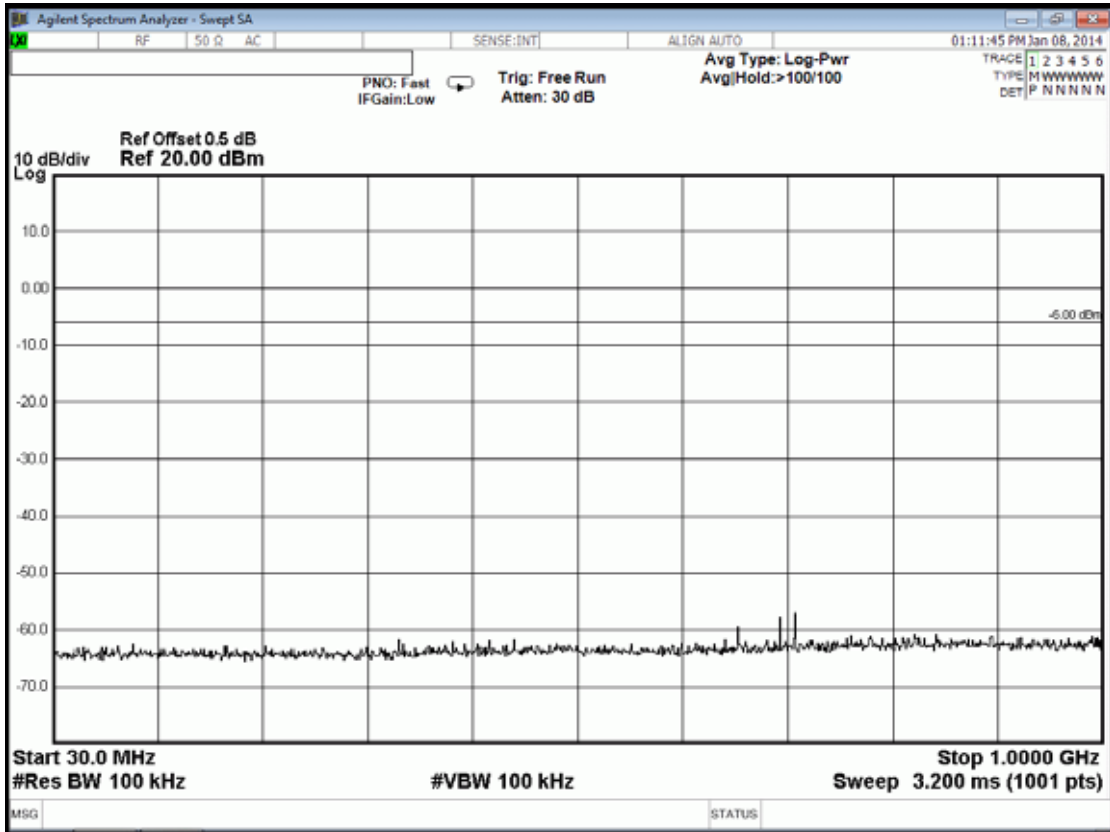

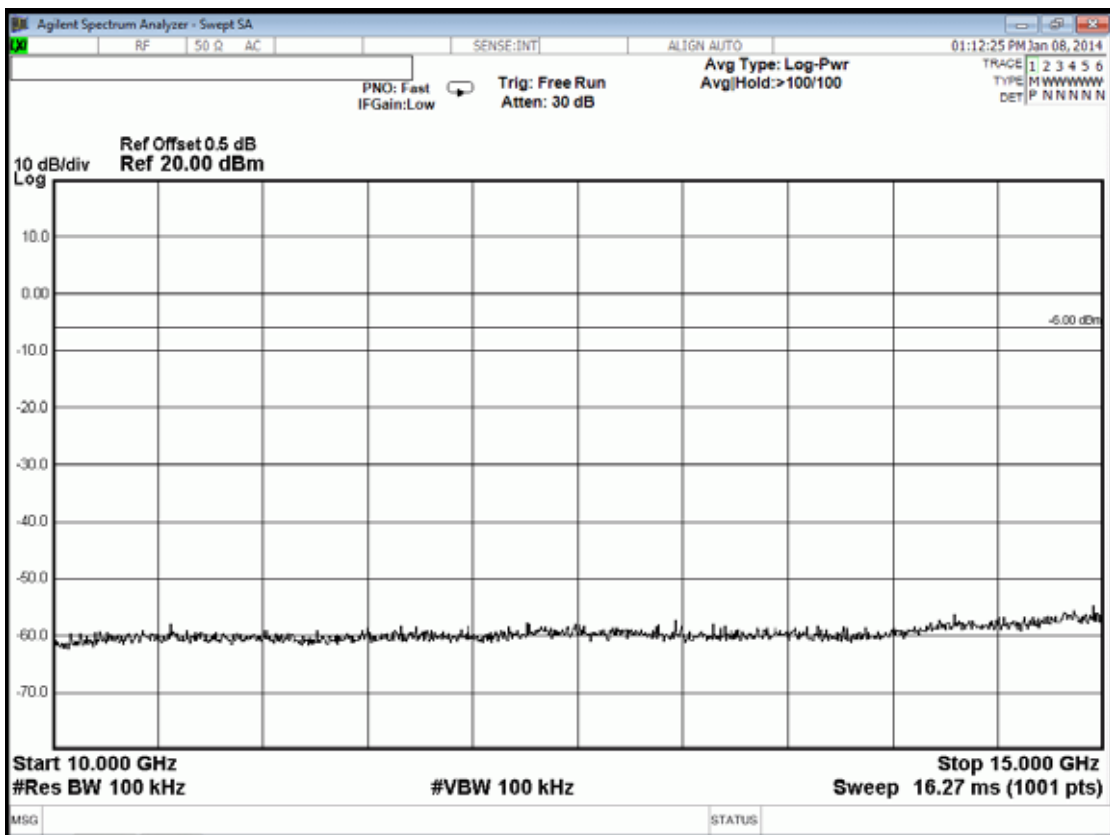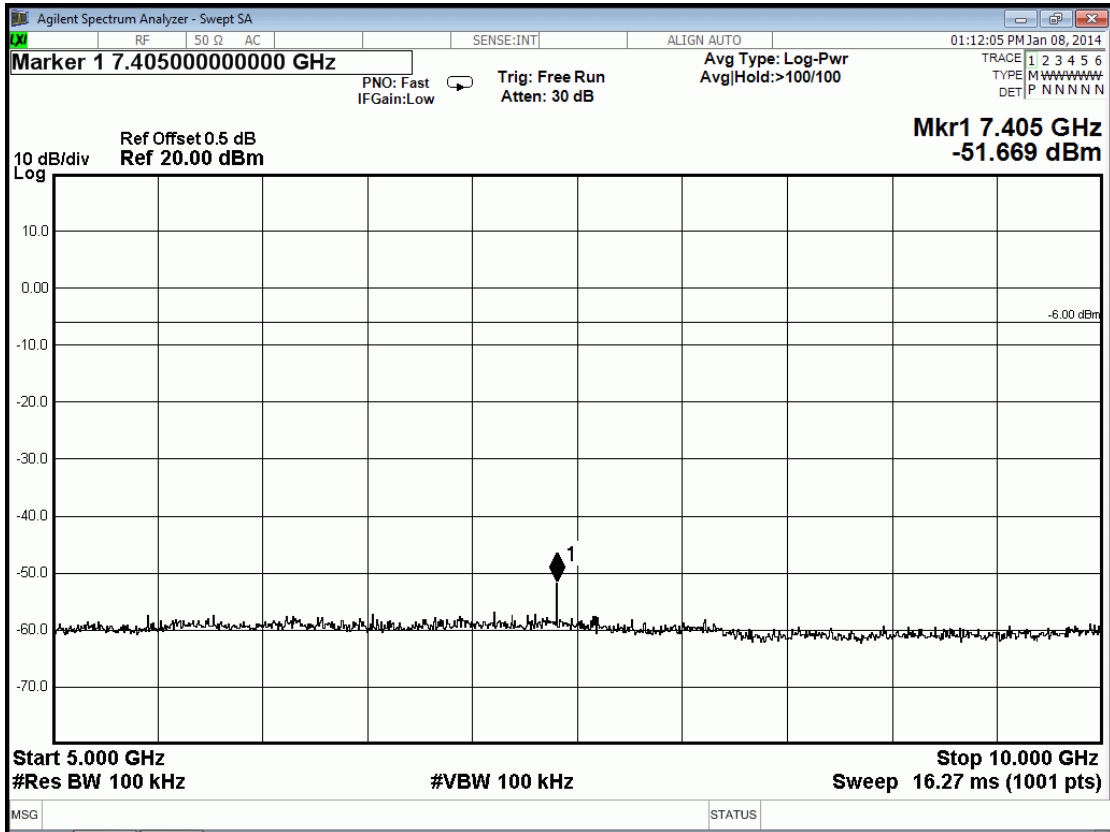

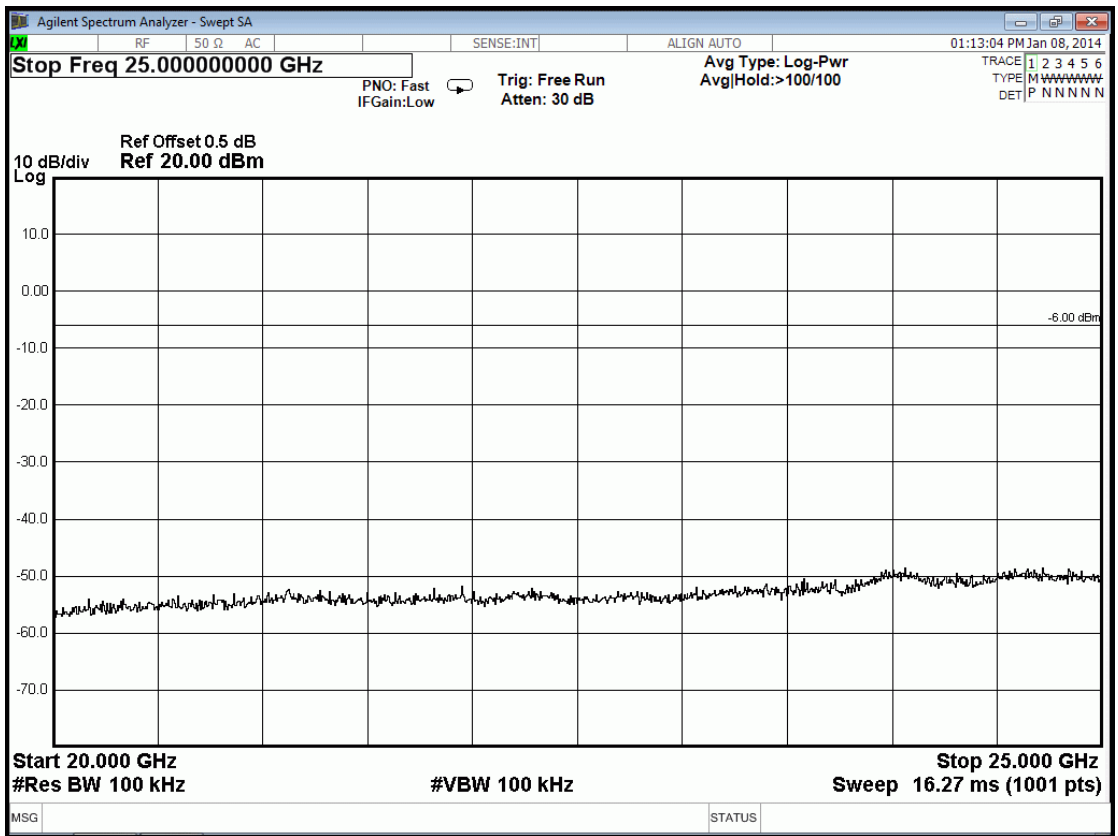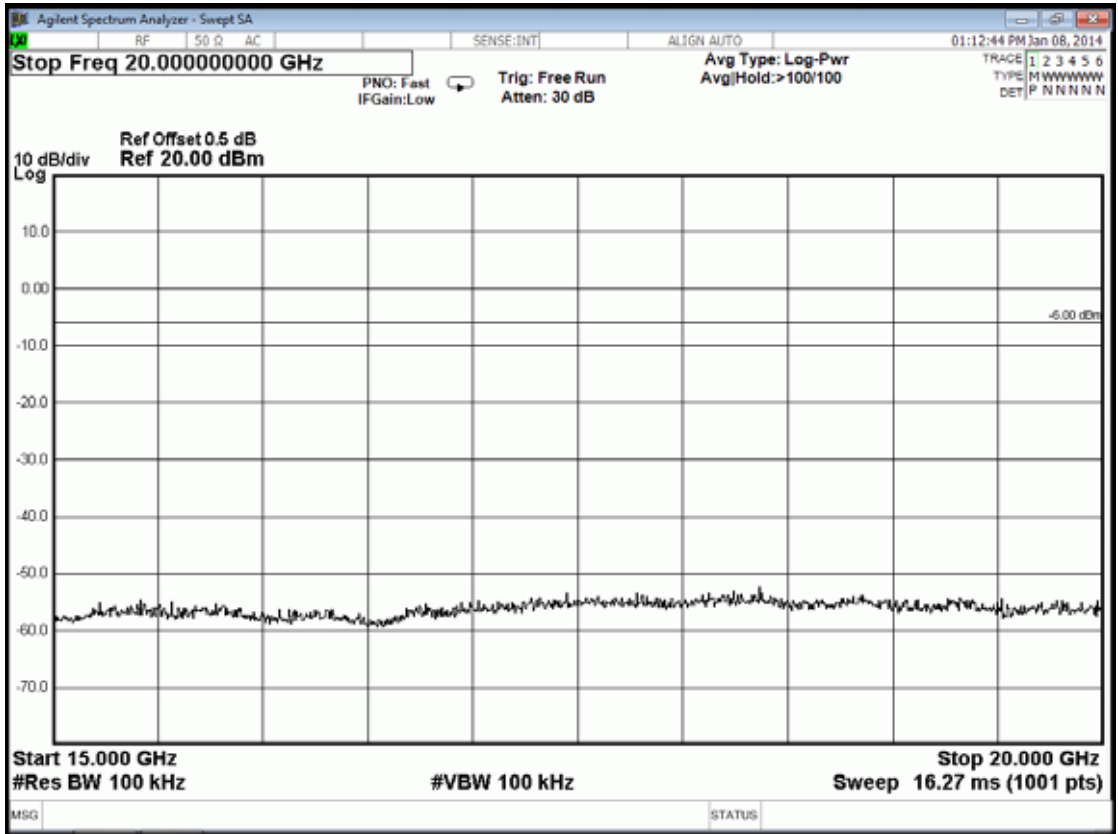

11. BAND EDGES MEASUREMENT

11.1. Test Equipment

The following test equipment was used during the band edges measurement:

| Item | Type | Manufacturer | Model No. | Serial No. | Last Cal. | Next Cal. |
|------|-------------------|--------------|------------|------------|--------------|--------------|
| 1. | Spectrum Analyzer | Agilent | N9030A-544 | US51350140 | Jul. 30, 13' | Jul. 29, 14' |
| 2. | DC Power Supply | TOP WARD | 3303A | 721773 | N/A | N/A |

11.2. Block Diagram of Test Setup

The same as section.4.2.

11.3. Specification Limits (§15.247(c))

In any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (See Section 15.205(c)). (This test result attaching to §3.6.3)

11.4. Operating Condition of EUT

Same as 20dB bandwidth measurement which was listed in section 4.4.

11.5. Test Procedure

The transmitter output was connected to the spectrum analyzer. Set both RBW and VBW of spectrum analyzer to 100kHz with suitable frequency span including 100kHz bandwidth from band edge.

The measurement guideline was according to FCC Public Notice DA 00-705.


11.6. Test Results

PASSED. The testing data was attached in the next pages.
(ANT B was measured for having worst performance.)


Test Date : Jan. 08, 2014 Temperature :24 Humidity : 50%

11.6.1. Radio Technology: S-FHSS Modulation

Below Band edge

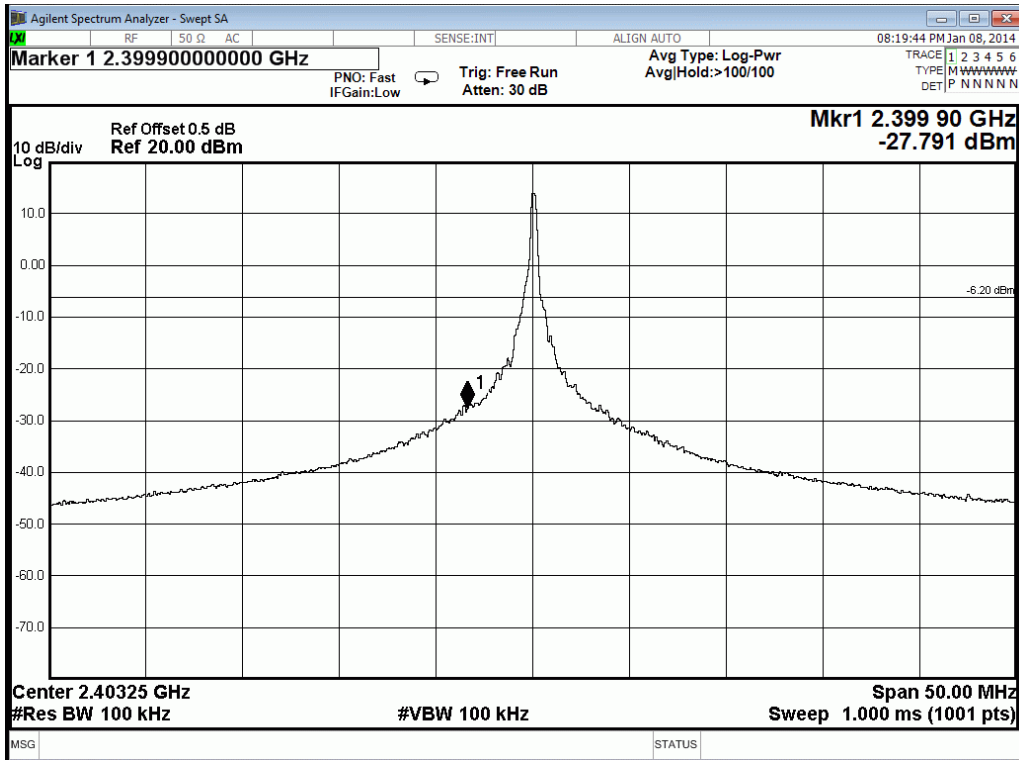


Upper Band edge

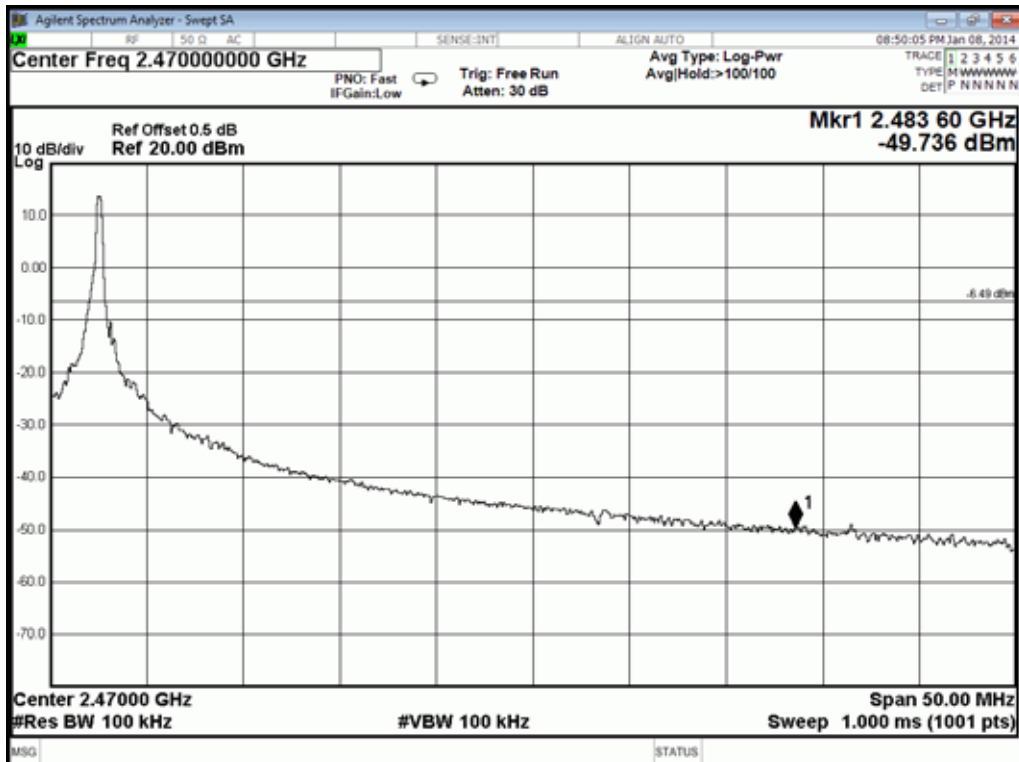


11.6.2. Radio Technology: T-FHSS Modulation

Below Band edge

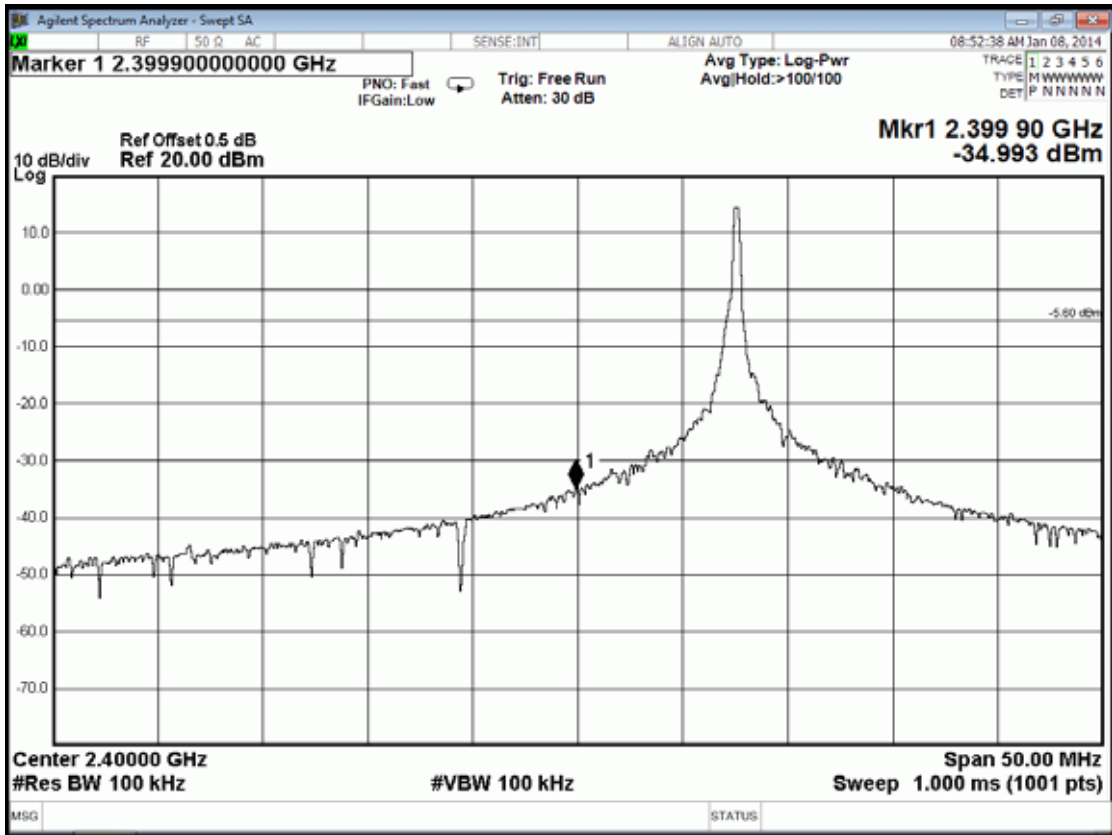

Upper Band edge

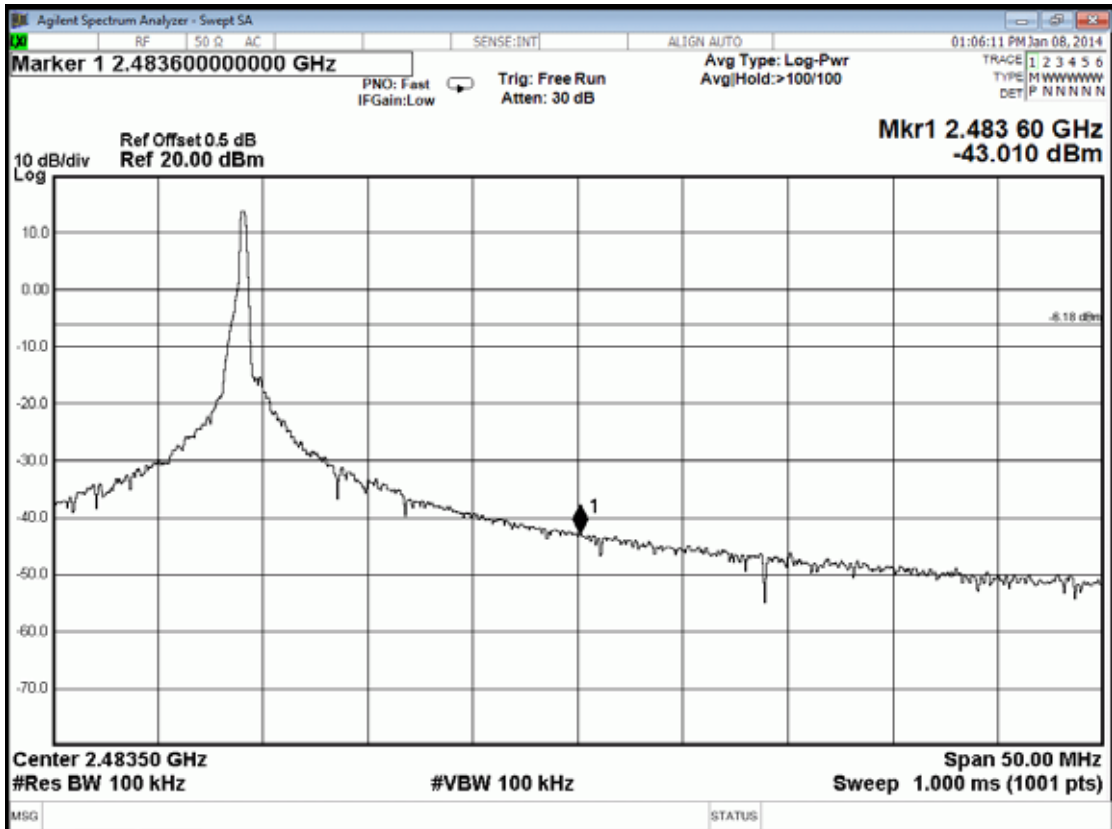

12.DEVIATION TO TEST SPECIFICATIONS

【NONE】


13. PHOTOGRAPHS

13.1. Photos of Radiated Measurement at Semi-Anechoic Chamber


13.1.1. Frequency Range 30MHz~1GHz, Stand



13.1.2. Frequency Range 30MHz~1GHz, Side

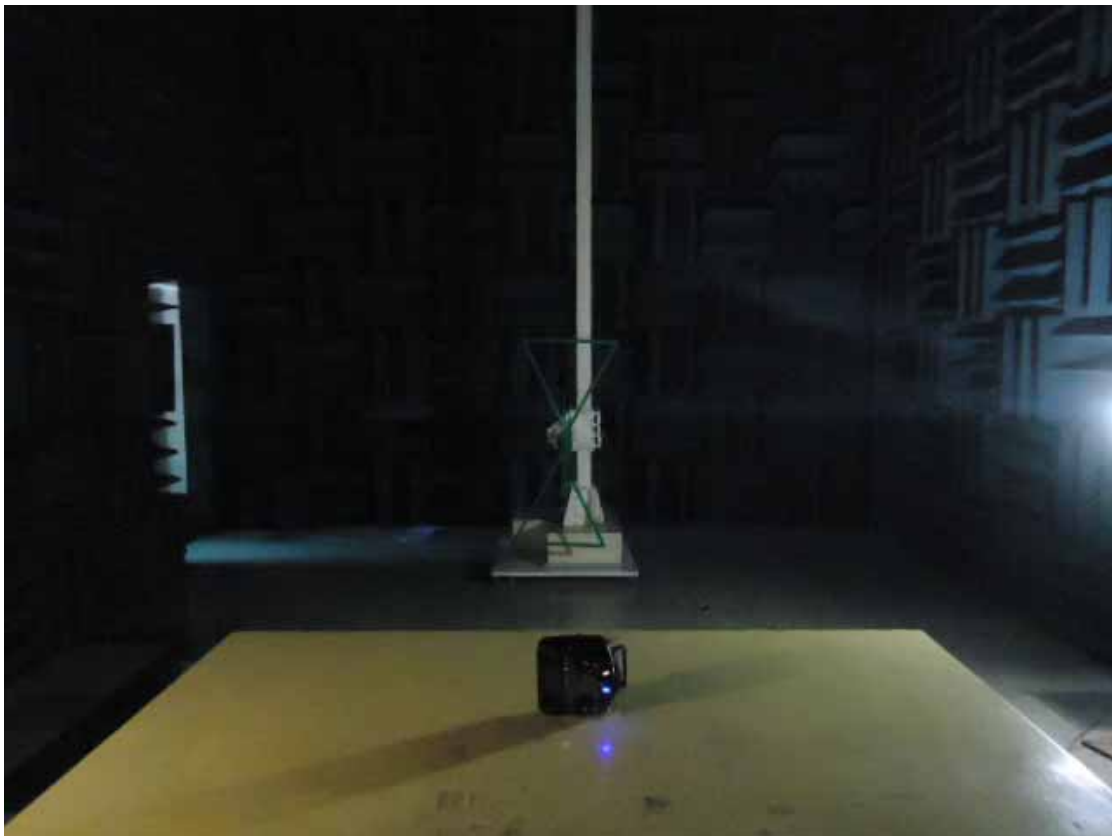

13.1.3.Frequency Range 30MHz~1GHz, Lie

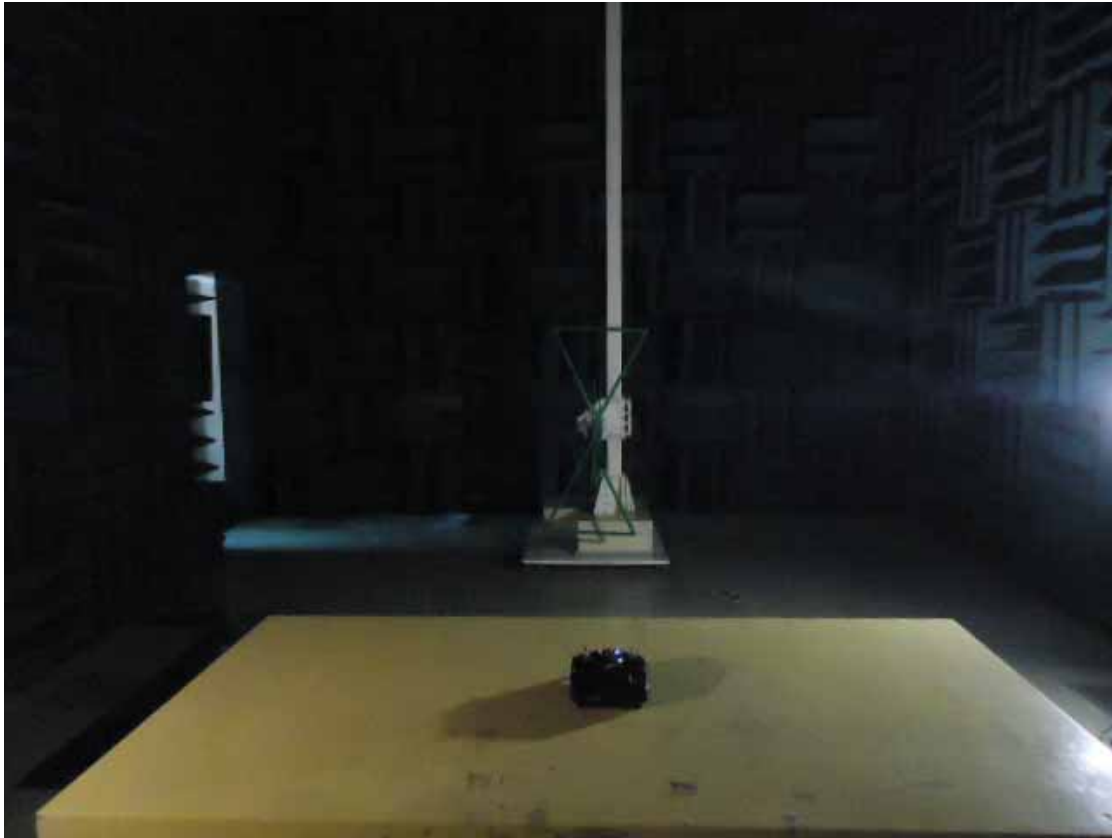

13.1.4.Frequency Range Above 1GHz, Stand



13.1.5.Frequency Range Above 1GHz, Side



13.1.6.Frequency Range Above 1GHz, Lie



13.2. Photo of RF Conducted Measurement

