

APPLICATION FOR CERTIFICATION

On Behalf of

FUTABA Corporation

Radio Control

Model No. : T2PSK1-2.4G

FCC ID : AZPT2PSK1-24G

Brand: Futaba

Prepared for : FUTABA Corporation
1080 Yabutsuka Chosei-son Chosei-gun
Chiba, 299-4395 Japan.

Prepared by : AUDIX Technology Corporation
EMC Department
No. 53-11, Dingfu, Linkou Dist.,
New Taipei City 244, Taiwan, R.O.C.

Tel : (02) 2609-9301, 2609-2133
Fax: (02) 2609-9303

File Number : C1M1210318
Report Number : EM-F1010875
Date of Test : Oct. 31 ~ Nov. 12, 2012
Date of Report : Nov. 12, 2012

TABLE OF CONTENTS

Description	Page
TEST REPORT CERTIFICATION	4
1. GENERAL INFORMATION	5
1.1. Description of Device (EUT).....	5
1.2. Description of Test Facility	6
1.3. Measurement Uncertainty.....	6
2. CONDUCTED EMISSION MEASUREMENT.....	7
3. RADIATED EMISSION MEASUREMENT	8
3.1. Test Equipment.....	8
3.2. Test Setup	8
3.3. Radiated Emission Limits (§15.209)	10
3.4. Operating Condition of EUT	10
3.5. Test Procedure	10
3.6. Radiated Emission Measurement Results.....	11
4. 20dB BANDWIDTH MEASUREMENT	26
4.1. Test Equipment.....	26
4.2. Block Diagram of Test Setup.....	26
4.3. Specification Limits (§15.247(a)(1))	26
4.4. Operating Condition of EUT	26
4.5. Test Procedure	26
4.6. Test Results.....	27
5. CARRIER FREQUENCY SEPARATION MEASUREMENT	30
5.1. Test Equipment.....	30
5.2. Block Diagram of Test Setup.....	30
5.3. Specification Limits (§15.247(a)(1))	30
5.4. Operating Condition of EUT	30
5.5. Test Procedure	30
5.6. Test Results.....	30
6. TIME OF OCCUPANCY MEASUREMENT	32
6.1. Test Equipment.....	32
6.2. Block Diagram of Test Setup.....	32
6.3. Specification Limits (§15.247(a)(1)(iii))	32
6.4. Operating Condition of EUT	32
6.5. Test Procedure	32
6.6. Test Results.....	32
7. NUMBER OF HOPPING CHANNELS MEASUREMENT	34
7.1. Test Equipment.....	34
7.2. Block Diagram of Test Setup.....	34
7.3. Specification Limits (§15.247(a)(1)(iii))	34
7.4. Operating Condition of EUT	34
7.5. Test Procedure	34
7.6. Test Results.....	34
8. MAXIMUM PEAK OUTPUT POWER MEASUREMENT	36
8.1. Test Equipment.....	36
8.2. Block Diagram of Test Setup.....	36
8.3. Specification Limits (§15.247(b)-(1)).....	36
8.4. Operating Condition of EUT	36
8.5. Test Procedure	36
8.6. Test Results.....	36

9. EMISSION LIMITATIONS MEASUREMENT39

9.1. Test Equipment 39

9.2. Block Diagram of Test Setup..... 39

9.3. Specification Limits (§15.247(c))..... 39

9.4. Operating Condition of EUT 39

9.5. Test Procedure 39

9.6. Test Results..... 39

10. BAND EDGES MEASUREMENT.....46

10.1. Test Equipment..... 46

10.2. Block Diagram of Test Setup 46

10.3. Specification Limits (§15.247(c)) 46

10.4. Operating Condition of EUT 46

10.5. Test Procedure 46

10.6. Test Results 46

11. DEVIATION TO TEST SPECIFICATIONS48

12. PHOTOGRAPHS49

12.1. Photos of Radiated Measurement at Semi-Anechoic Chamber..... 49

12.2. Photo of RF Conducted Measurement 52

TEST REPORT CERTIFICATION

Applicant : FUTABA Corporation
 Manufacturer : FUTABA Corporation
 EUT Description : Radio Control
 FCC ID : AZPT2PSK1-24G
 (A) Model No. : T2PSK1-2.4G
 (B) Serial No. : N/A
 (C) Brand : Futaba
 (D) Power Supply : DC 6V
 (E) Test Voltage : DC 6V (Via Battery)

Measurement Procedure Used:

FCC RULES AND REGULATIONS PART 15 SUBPART C, Oct. 2011
AND ANSI C63.4/2003

(FCC CFR 47 Part 15C, §15.207 and §15.209 and §15.247)


The device described above was tested by AUDIX Technology Corporation to determine the maximum emission levels emanating from the device. The maximum emission levels were compared to the FCC Part 15 subpart C limits.


The measurement results are contained in this test report and AUDIX Technology Corporation is assumed full responsibility for the accuracy and completeness of these measurements. Also, this report shows that the EUT to be technically compliant with the FCC official limits.

This report applies to above tested sample only. This report shall not be reproduced in part without written approval of AUDIX Technology Corporation.

Date of Test : Oct. 31 ~ Nov. 12, 2012

Date of Report : Nov. 12, 2012

Producer : 
 (Tina Huang/Administrator)

Signatory : 
 (Ben Cheng/Manager)

1. GENERAL INFORMATION

1.1. Description of Device (EUT)

Description	:	Radio Control
Model Number	:	T2PSK1-2.4G
Serial Number	:	N/A
FCC ID	:	AZPT2PSK1-24G
Applicant	:	FUTABA Corporation 1080 Yabutsuka Chosei-son Chosei-gun Chiba, 299-4395 Japan.
Manufacturer	:	FUTABA Corporation 1080 Yabutsuka Chosei-son Chosei-gun Chiba, 299-4395 Japan.
Modulation System	:	FHSS
Frequency Band	:	2403.250MHz ~ 2447.500MHz
Tested Frequency	:	2403.250MHz (Channel 01) 2425.00MHz (Channel 30) 2447.500MHz (Channel 60)
Frequency Channel	:	60 channels
Antenna (Print Pattern)	:	Antenna Gain: 1.3dBi
Date of Receipt of Sample	:	Sep. 13, 2012
Date of Test	:	Oct. 31 ~ Nov. 12, 2012

1.2. Description of Test Facility

Name of Firm	:	AUDIX Technology Corporation EMC Department No. 53-11, Dingfu, Linkou Dist., New Taipei City 244, Taiwan, R.O.C.
Test Location & Facility (AC)	:	Semi-Anechoic Chamber No. 53-11, Dingfu, Linkou Dist., New Taipei City 244, Taiwan, R.O.C. May 11, 2012 Renewal on Federal Communication Commission Registration Number: 90993
NVLAP Lab. Code	:	200077-0
TAF Accreditation No	:	1724

1.3. Measurement Uncertainty

Test Item	Frequency Range	Uncertainty (dB)
Radiation Test (Distance: 3m)	30MHz~300MHz	±2.91dB
	300MHz~1000MHz	±2.94dB
	Above 1GHz	± 5.02dB

Remark : Uncertainty = $ku_c(y)$

Test Item	Uncertainty
20dB Bandwidth	± 0.2kHz
Carrier Frequency Separation	± 0.2kHz
Time Of Occupancy	± 0.03sec
Maximum peak Output power	± 0.52dBm
Emission Limitations	± 0.13dB
Band Edges	± 0.13dB

2. CONDUCTED EMISSION MEASUREMENT

【The EUT only employs DC power for operation, no conductive emission limits are required according to FCC Part 15 Section §15.207】

3. RADIATED EMISSION MEASUREMENT

3.1. Test Equipment

The following test equipment was used during the radiated emission measurement:

3.1.1. For Frequency Range 30MHz~1000MHz (at Semi-Anechoic Chamber)

Item	Type	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
1.	Spectrum Analyzer	Agilent	E4446A	US44300366	Aug. 07, 12'	Aug. 06, 13'
2.	Test Receiver	R & S	ESCS30	100339	Mar. 08, 12'	Mar. 07, 13'
3.	Amplifier	HP	8447D	2944A06305	Feb. 13, 12'	Feb. 12, 13'
4.	Log Periodic Antenna	Schwarzbeck	UHALP 9108-A	0810	Mar. 03, 12'	Mar. 02, 13'
5.	Biconical Antenna	CHASE	VBA6106A	1264	Mar. 03, 12'	Mar. 02, 13'

3.1.2. For Frequency Above 1GHz (at Semi-Anechoic Chamber)


Item	Type	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
1.	Spectrum Analyzer	Agilent	E4446A	US44300366	Aug. 07, 12'	Aug. 06, 13'
2.	Test Receiver	R & S	ESCS30	100339	Mar. 08, 12'	Mar. 07, 13'
3.	Amplifier	HP	8449B	3008A00529	Dec. 09, 11'	Dec. 08, 12'
4.	Horn Antenna	EMCO	3115	9112-3775	May 09, 12'	May 08, 13'
5.	Horn Antenna	EMCO	3116	2653	Oct. 15, 12'	Oct. 14, 13'
6.	2.4GHz Notch Filter	EWT	EWT-14-007 0-R1	G2	Dec. 05, 11'	Dec. 04, 12'
7.	3.5GHz High Pass Filter	HP	84300-80038	005	Jan. 04, 12'	Jan. 03, 13'

3.2. Test Setup


3.2.1. Block Diagram of connection between EUT and simulators

RADIO CONTROL (EUT)

3.2.2. Semi-Anechoic Chamber (3m) Setup Diagram for 30-1000MHz

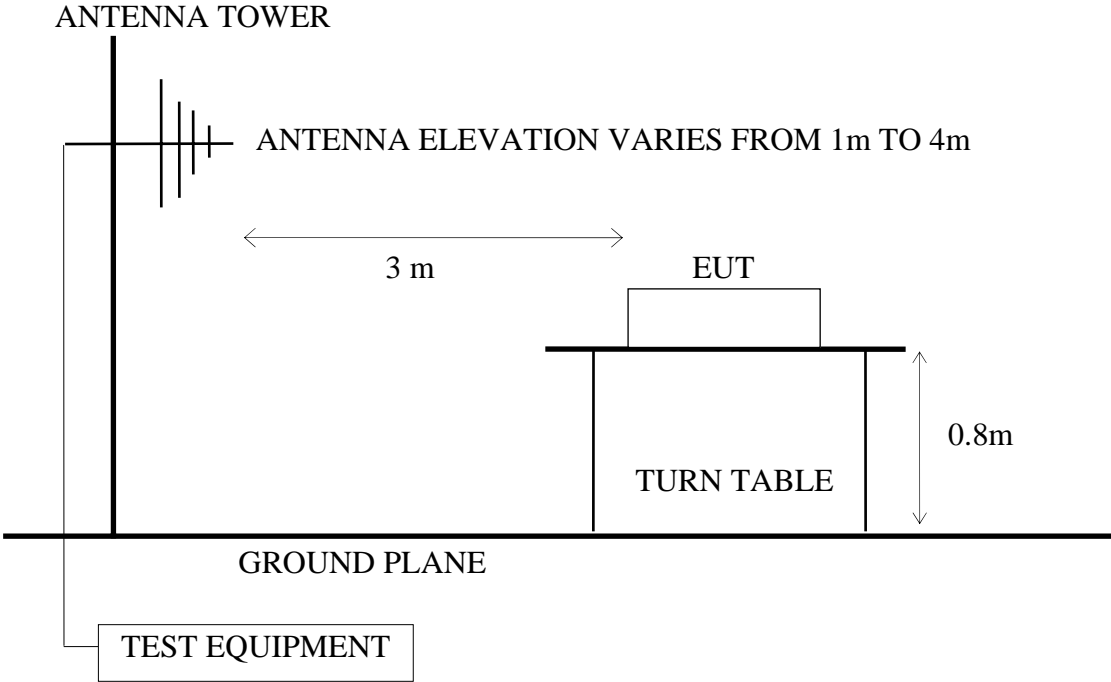

3.2.3. Semi-Anechoic Chamber (3m) Setup Diagram for above 1GHz

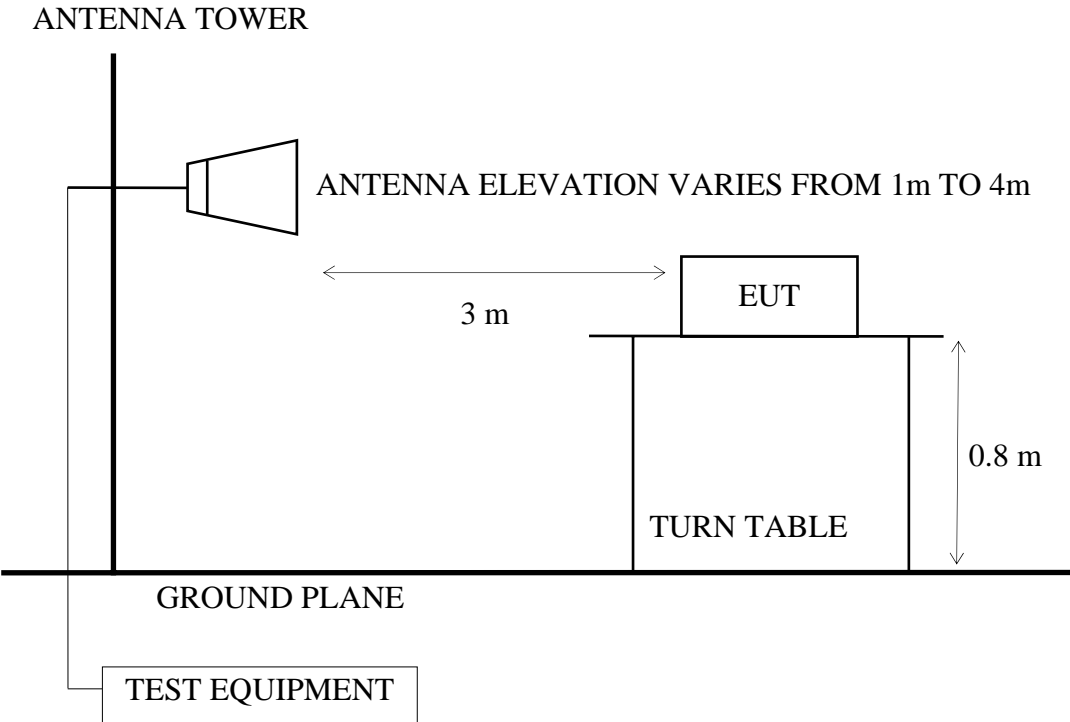

3.3. Radiated Emission Limits (§15.209)

FREQUENCY MHz	DISTANCE Meters	FIELD STRENGTHS LIMITS	
		$\mu\text{V/m}$	$\text{dB}\mu\text{V/m}$
30 ~ 88	3	100	40.0
88 ~ 216	3	150	43.5
216 ~ 960	3	200	46.0
Above 960	3	500	54.0
Above 1000	3	74.0 $\text{dB}\mu\text{V/m}$ (Peak) 54.0 $\text{dB}\mu\text{V/m}$ (Average)	

- Remark :
- (1) Emission level ($\text{dB}\mu\text{V/m}$) = 20 log Emission level ($\mu\text{V/m}$)
 - (2) The tighter limit applies at the edge between two frequency bands.
 - (3) Distance refers to the distance in meters between the measuring instrument antenna and the closed point of any part of the device or system.
 - (4) The limits in this table are based on CFR 47 Part 15.205(a)(b) and Part 15.209 (a).
 - (5) The over 1GHz limit, FCC limit is used based on CFR 47 Part 15.35 (b) and Part 15.205(b) & Part 15.209(e) and Part 15.207(c).

3.4. Operating Condition of EUT

- 3.4.1. Set up the EUT (Radio Control) as shown on 3.2.
- 3.4.2. To turn on the power of all equipment.
- 3.4.3. The EUT was set the PC system using test program “Futaba Term”.
(Note: The PC system is not EUT’s accessory, It’s only test EUT on test.)
- 3.4.4. The EUT was set to continuously transmit signals at 2403.250MHz, 2425.000MHz and 2447.500MHz during testing.

3.5. Test Procedure

The EUT and its simulators were placed on a turn table which was 0.8 meter above the ground. The turn table rotated 360 degrees to determine the position of the maximum emission level. EUT was set 3 meters away from the receiving antenna which was mounted on an antenna tower. The antenna could be moved up and down between 1 to 4 meters to find out the maximum emission level. Broadband antennas such as calibrated biconical and log-periodical antenna or horn antenna were used as a receiving antenna. Both horizontal and vertical polarization of the antenna were set on measurement. In order to find the maximum emission, all of the interface cables were manipulated according to FCC ANSI C63.4-2003 regulation.

The bandwidth of the R&S Test Receiver ESCS30 was set at 120kHz. (For 30MHz to 1000MHz)

The resolution bandwidth and video bandwidth of test spectrum analyzer is 1MHz for peak detection (PK) at frequency above 1GHz.

The resolution bandwidth of test spectrum analyzer is 1MHz and the video bandwidth is 10Hz for average detection (AV) at frequency above 1GHz.

The frequency range from 30MHz to 25GHz (Up to 10th harmonics from fundamental frequency) was checked. 30MHz to 1000MHz was measured with Quasi-Peak detector. Pursuant to ANSI 4.2.2, peak detector is an alternate option for frequency from 30MHz to 1000MHz.

Above 1GHz was measured with peak and average detector. For frequency from 10GHz to 25GHz, we checked it in 1 meter distance and with a shorter cable 2 meter instead of original's. There is no signal exist.

3.6. Radiated Emission Measurement Results

PASSED.

(All emissions not reported below are too low against the prescribed limits.)

EUT : Radio Control M/N : T2PSK1-2.4G

Test Date : Nov. 01, 2012 Temperature : 26°C Humidity : 61%

For Frequency Range 30MHz~1000MHz:

The EUT emitted the fundamental frequency with data code at the stand, side and lying conditions.

The EUT select **worst position "stand"** and with following test modes was performed during this section testing and all the test results are listed in section 3.6.1.

Mode	Channel	Frequency	Test Mode	Position	Reference Test Data	
					Horizontal	Vertical
1.	01	2403.250MHz	Transmit	Stand	# 2	# 1
2.	30	2425.000MHz		Stand	# 2	# 1
3.	60	2447.500MHz		Stand	# 1	# 2

Note 1: * Above all final readings were measured with Quasi-Peak detector.

For Frequency above 1GHz:

The EUT select **worst position “stand ”** and with following test modes was performed during this section testing and all the test results are listed in section 3.6.2.

Mode	Chnnel	Frequency	Test Mode	Position	Test Frequency Range
1.	01	2403.250MHz	Transmit	Stand	1000-2680MHz*
2.					2680-4000MHz
3.					4000-5500MHz*
4.					5500-11000MHz
5.					11000-18000MHz
6.					18000-25000MHz
7.	30	2425.000MHz	Transmit	Stand	1000-2680MHz*
8.					2680-4000MHz
9.					4000-5500MHz*
10.					5500-11000MHz
11.					11000-18000MHz
12.					18000-25000MHz
13.	60	2447.500MHz	Transmit	Stand	1000-2680MHz*
14.					2680-4000MHz
15.					4000-5500MHz*
16.					5500-11000MHz
17.					11000-18000MHz
18.					18000-25000MHz

- Note: 1. Above all final readings were measured with Peak and Average detector.
- 2. The emissions (up to 25GHz) not reported are too low to be measured.
- 3. "*" means there is spurious emission falling the frequency band and be measures.

For Restricted Bands:

The EUT was tested in restricted bands and all the test results are listed in section 3.6.3. (The restricted bands defined in part 15.205(a))

Mode	Channel	Frequency	Test Mode	Reference Test Data	
				Horizontal	Vertical
1.	01	2403.250MHz	Transmit	# 3, # 4	#1, # 2
2.	60	2447.500MHz	Transmit	# 7, # 8	# 5, # 6

3.6.1. Frequency Range 30-1000MHz

Frequency: 2403.250MHz

Site no. : A/C Chamber Data no. : 2
 Dis. / Ant. : 3m VBA6106A/UHALP9108A Ant. pol. : HORIZONTAL
 Limit : FCC PART-15C
 Env. / Ins. : E4446A 26°C/61% Vic Fong
 EUT : T2PSK1-2.4G
 Power Rating : DC6V
 Test Mode : TX2403.25

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBµV)	Emission Level (dBµV/m)	Limits (dBµV/m)	Margin (dB)	Remark
1	192.960	21.66	3.00	10.50	35.15	43.50	8.35	QP
2	360.770	16.24	4.43	17.72	38.39	46.00	7.61	QP

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

Site no. : A/C Chamber Data no. : 1
 Dis. / Ant. : 3m VBA6106A/UHALP9108A Ant. pol. : VERTICAL
 Limit : FCC PART-15C
 Env. / Ins. : E4446A 26°C/61% Vic Fong
 EUT : T2PSK1-2.4G
 Power Rating : DC6V
 Test Mode : TX2403.25

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBµV)	Emission Level (dBµV/m)	Limits (dBµV/m)	Margin (dB)	Remark
1	78.500	13.43	1.80	19.63	34.87	40.00	5.13	QP
2	360.770	16.24	4.43	15.10	35.77	46.00	10.23	QP

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

Frequency: 2425.000MHz

Site no. : A/C Chamber Data no. : 2
 Dis. / Ant. : 3m VBA6106A/UHALP9108A Ant. pol. : HORIZONTAL
 Limit : FCC PART-15C
 Env. / Ins. : E4446A 26°C/61% Vic Fong
 EUT : T2PSK1-2.4G
 Power Rating : DC6V
 Test Mode : TX2425

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBµV)	Emission Level (dBµV/m)	Limits (dBµV/m)	Margin (dB)	Remark
1	144.460	20.31	2.60	11.11	34.02	43.50	9.48	QP
2	360.770	16.24	4.43	16.59	37.26	46.00	8.74	QP

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

Site no. : A/C Chamber Data no. : 1
 Dis. / Ant. : 3m VBA6106A/UHALP9108A Ant. pol. : VERTICAL
 Limit : FCC PART-15C
 Env. / Ins. : E4446A 26°C/61% Vic Fong
 EUT : T2PSK1-2.4G
 Power Rating : DC6V
 Test Mode : TX2425

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBµV)	Emission Level (dBµV/m)	Limits (dBµV/m)	Margin (dB)	Remark
1	275.410	25.25	3.70	3.16	32.10	46.00	13.90	QP
2	360.770	16.24	4.43	17.75	38.42	46.00	7.58	QP

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

Frequency: 2447.500MHz

Site no. : A/C Chamber Data no. : 1
 Dis. / Ant. : 3m VBA6106A/UHALP9108A Ant. pol. : HORIZONTAL
 Limit : FCC PART-15C
 Env. / Ins. : E4446A 26°C/61% Vic Fong
 EUT : T2PSK1-2.4G
 Power Rating : DC6V
 Test Mode : TX2447.5

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBµV)	Emission Level (dBµV/m)	Limits (dBµV/m)	Margin (dB)	Remark
1	125.060	19.38	2.30	10.25	31.93	43.50	11.57	QP
2	360.770	16.24	4.43	14.29	34.96	46.00	11.04	QP

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

Site no. : A/C Chamber Data no. : 2
 Dis. / Ant. : 3m VBA6106A/UHALP9108A Ant. pol. : VERTICAL
 Limit : FCC PART-15C
 Env. / Ins. : E4446A 26°C/61% Vic Fong
 EUT : T2PSK1-2.4G
 Power Rating : DC6V
 Test Mode : TX2447.5

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBµV)	Emission Level (dBµV/m)	Limits (dBµV/m)	Margin (dB)	Remark
1	192.960	21.66	3.00	10.46	35.11	43.50	8.39	QP
2	360.770	16.24	4.43	14.31	34.98	46.00	11.02	QP

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

3.6.2. Above 1GHz Frequency Range Measurement Results

Date of Test : Nov. 01, 2012 Temperature : 26°C

EUT : Radio Control Humidity : 61%

Test Mode : Transmitting Mode, Frequency: 2403.250MHz

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading Horizontal (dBμV)	Emission Level Horizontal (dBμV/m)	Limits (dBμV/m)	Margin (dB)
1645.120	26.27	6.45	20.51	53.23	74.00	20.77
4808.500	33.06	9.14	21.48	63.68	74.00	10.32

Remarks: 1. Emission level=Antenna Factor + Cable Loss + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

Emission Frequency (MHz)	Peak Value (dB/m)	Duty Cycle Correction Factor (dB)	Average Value Horizontal (dBμV/m)	Limit (dBμV/m)	Margin (dB)
1645.120	53.23	-30.37	22.86	54.00	31.14
4808.500	63.68	-30.37	33.31	54.00	20.69

Remarks: 1. Duty Cycle Correction Factor = $20\log(\text{Dwell time}/100\text{ms}) = 20\log(3.030\text{ms}/100\text{ms}) = -30.37$
 2. Average value=Peak value+ Duty Cycle Correction Factor

Date of Test : Nov. 01, 2012 Temperature : 26°C

EUT : Radio Control Humidity : 61%

Test Mode : Transmitting Mode, Frequency: 2403.250MHz

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading Vertical (dBμV)	Emission Level Vertical (dBμV/m)	Limits (dBμV/m)	Margin (dB)
1599.760	26.08	6.14	15.34	47.55	74.00	26.45

Remarks: 1. Emission level=Antenna Factor + Cable Loss + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

Emission Frequency (MHz)	Peak Value (dB/m)	Duty Cycle Correction Factor (dB)	Average Value Vertical (dBμV/m)	Limit (dBμV/m)	Margin (dB)
1599.760	47.55	-30.37	17.18	54.00	36.82

Remarks: 1. Duty Cycle Correction Factor = $20\log(\text{Dwell time}/100\text{ms}) = 20\log(3.030\text{ms}/100\text{ms}) = -30.37$
 2. Average value=Peak value+ Duty Cycle Correction Factor

Date of Test : Nov. 01, 2012 Temperature : 26°C
 EUT : Radio Control Humidity : 61%
 Test Mode : Transmitting Mode, Frequency: 2425.000MHz

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading Horizontal (dBμV)	Emission Level Horizontal (dBμV/m)	Limits (dBμV/m)	Margin (dB)
1678.720	26.40	6.69	33.49	66.58	74.00	7.42
4853.500	33.15	9.15	18.57	60.87	74.00	13.13

Remarks: 1. Emission level=Antenna Factor + Cable Loss + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

Emission Frequency (MHz)	Peak Value (dB/m)	Duty Cycle Correction Factor (dB)	Average Value Horizontal (dBμV/m)	Limit (dBμV/m)	Margin (dB)
1678.720	66.58	-30.37	36.21	54.00	17.79
4853.500	60.87	-30.37	30.50	54.00	23.50

Remarks: 1. Duty Cycle Correction Factor = $20\log(\text{Dwell time}/100\text{ms}) = 20\log(3.030\text{ms}/100\text{ms}) = -30.37$
 2. Average value=Peak value+ Duty Cycle Correction Factor

Date of Test : Nov. 01, 2012 Temperature : 26°C
 EUT : Radio Control Humidity : 61%
 Test Mode : Transmitting Mode, Frequency: 2425.000MHz

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading Vertical (dBμV)	Emission Level Vertical (dBμV/m)	Limits (dBμV/m)	Margin (dB)
1594.720	26.08	6.12	20.95	53.16	74.00	20.84

Remarks: 1. Emission level=Antenna Factor + Cable Loss + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

Emission Frequency (MHz)	Peak Value (dB/m)	Duty Cycle Correction Factor (dB)	Average Value Vertical (dBμV/m)	Limit (dBμV/m)	Margin (dB)
1594.720	53.16	-30.37	22.79	54.00	31.21

Remarks: 1. Duty Cycle Correction Factor = $20\log(\text{Dwell time}/100\text{ms}) = 20\log(3.030\text{ms}/100\text{ms}) = -30.37$
 2. Average value=Peak value+ Duty Cycle Correction Factor

Date of Test : Nov. 01, 2012 Temperature : 26°C
 EUT : Radio Control Humidity : 61%
 Test Mode : Transmitting Mode, Frequency: 2447.500MHz

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading Horizontal (dBμV)	Emission Level Horizontal (dBμV/m)	Limits (dBμV/m)	Margin (dB)
1712.320	26.52	6.92	28.54	61.99	74.00	12.01
4898.500	33.21	9.16	17.19	59.57	74.00	14.43

Remarks: 1. Emission level=Antenna Factor + Cable Loss + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

Emission Frequency (MHz)	Peak Value (dB/m)	Duty Cycle Correction Factor (dB)	Average Value Horizontal (dBμV/m)	Limit (dBμV/m)	Margin (dB)
1712.320	61.99	-30.37	31.62	54.00	22.38
4898.500	59.57	-30.37	29.20	54.00	24.80

Remarks: 1. Duty Cycle Correction Factor = $20\log(\text{Dwell time}/100\text{ms}) = 20\log(3.030\text{ms}/100\text{ms}) = -30.37$
 2. Average value=Peak value+ Duty Cycle Correction Factor

Date of Test : Nov. 01, 2012 Temperature : 26°C

EUT : Radio Control Humidity : 61%

Test Mode : Transmitting Mode, Frequency: 2447.500MHz

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading Vertical (dBμV)	Emission Level Vertical (dBμV/m)	Limits (dBμV/m)	Margin (dB)
1594.720	26.08	6.12	16.40	48.61	74.00	25.39

Remarks: 1. Emission level=Antenna Factor + Cable Loss + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

Emission Frequency (MHz)	Peak Value (dB/m)	Duty Cycle Correction Factor (dB)	Average Value Vertical (dBμV/m)	Limit (dBμV/m)	Margin (dB)
1594.720	48.61	-30.37	18.24	54.00	35.76


Remarks: 1. Duty Cycle Correction Factor = $20\log(\text{Dwell time}/100\text{ms}) = 20\log(3.030\text{ms}/100\text{ms}) = -30.37$
 2. Average value=Peak value+ Duty Cycle Correction Factor

3.6.3. Restricted Bands Measurement Results

Date of Test : Nov. 01, 2012 Temperature : 26°C
 EUT : Radio Control Humidity : 61%
 Test Mode : Transmit, Channel: 01, Frequency: 2403.250MHz



AUDIX TECHNOLOGY Corp. EMC Laboratory
 No.53-11, Tin-fu Tsun, Lin-kou Hsiang, Taipei
 County, Taiwan R.O.C. Post Code:24443
 Tel:+886-2-26092133 Fax:+886-2-26099303
 Email:ttenc@ttenc.com.tw

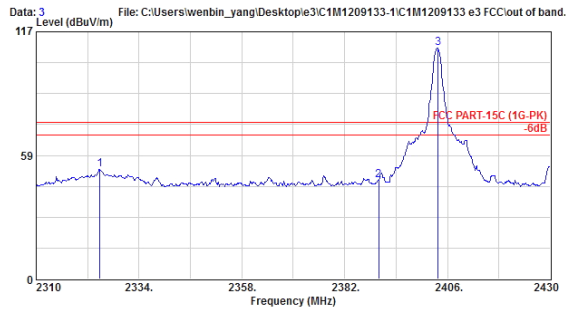


Site no. : A/C Chamber Data no. : 3
 Dis. / Ant. : 3m 3115(4927) Ant. pol. : HORIZONTAL
 Limit : FCC PART-15C (1G-PK)
 Env. / Ins. : E4446A 26°C/61% Vic Fong
 EUT : T2PSK1-2.4G
 Power Rating : DC6V
 Test Mode : TX2403.25

Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1 2324.880	28.32	6.26	17.32	51.90	74.00	22.10	Peak
2 2390.000	28.47	6.34	12.03	46.85	74.00	27.15	Peak
3 2403.840	28.51	6.36	74.38	109.25	74.00	-35.25	Peak X

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.



AUDIX TECHNOLOGY Corp. EMC Lab ry
 No.53-11, Tin-fu Tsun, Lin-kou Hsiang, Taipei
 County, Taiwan R.O.C. Post Code:24443
 Tel:+886-2-26092133 Fax:+886-2-26099303
 Email:ttenc@ttenc.com.tw

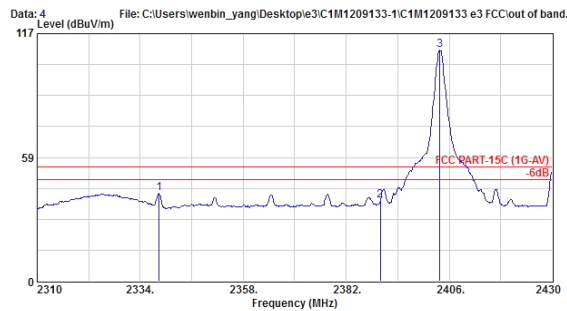

Site no. : A/C Chamber Data no. : 4
 Dis. / Ant. : 3m 3115(4927) Ant. pol. : HORIZONTAL
 Limit : FCC PART-15C (1G-AV)
 Env. / Ins. : E4446A 26°C/61% Vic Fong
 EUT : T2PSK1-2.4G
 Power Rating : DC6V
 Test Mode : TX2403.25


Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1 2338.440	28.36	6.28	6.93	41.57	54.00	12.43	Average
2 2390.000	28.47	6.34	3.36	38.18	54.00	15.82	Average
3 2403.840	28.51	6.36	74.48	109.35	54.00	-55.35	Average @

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

Date of Test : Nov. 01, 2012 Temperature : 26°C
 EUT : Radio Control Humidity : 61%
 Test Mode : Transmit, Channel: 01, Frequency: 2403.250MHz



AUDIX TECHNOLOGY Corp. EMC Laboratory
 No.53-11, Tin-fu Tsun, Lin-kou Hsiang, Taipei
 County, Taiwan R.O.C. Post Code:24443
 Tel:+886-2-26092133 Fax:+886-2-26099303
 Email:ttenc@ttenc.com.tw

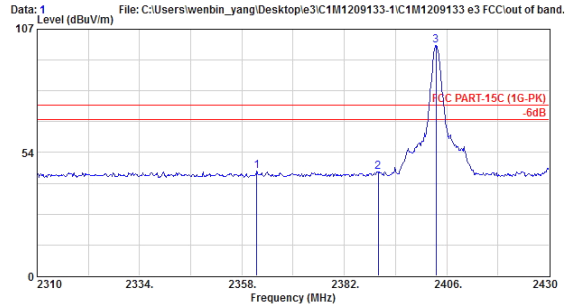


Site no. : A/C Chamber Data no. : 1
 Dis. / Ant. : 3m 3115(4927) Ant. pol. : VERTICAL
 Limit : FCC PART-15C (1G-PK)
 Env. / Ins. : E4446A 26°C/61% Vic Fong
 EUT : T2PSK1-2.4G
 Power Rating : DC6V
 Test Mode : TX2403.25

Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1 2361.480	28.40	6.30	10.80	45.50	74.00	28.50	Peak
2 2390.000	28.47	6.34	10.35	45.17	74.00	28.83	Peak
3 2403.480	28.51	6.36	65.02	99.89	74.00	-25.89	Peak X

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.



AUDIX TECHNOLOGY Corp. EMC Lab
 No.53-11, Tin-fu Tsun, Lin-kou Hsiang, Taipei
 County, Taiwan R.O.C. Post Code:24443
 Tel:+886-2-26092133 Fax:+886-2-26099303
 Email:ttenc@ttenc.com.tw

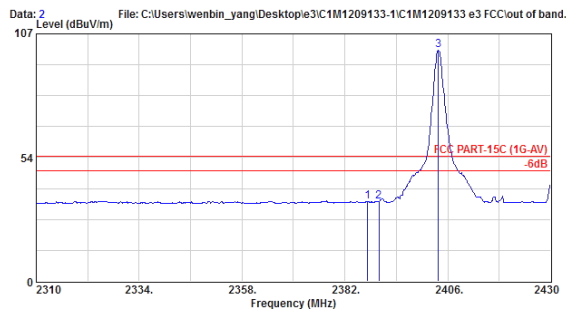

Site no. : A/C Chamber Data no. : 2
 Dis. / Ant. : 3m 3115(4927) Ant. pol. : VERTICAL
 Limit : FCC PART-15C (1G-AV)
 Env. / Ins. : E4446A 26°C/61% Vic Fong
 EUT : T2PSK1-2.4G
 Power Rating : DC6V
 Test Mode : TX2403.25


Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1 2387.280	28.47	6.33	-0.23	34.58	54.00	19.42	Average
2 2390.000	28.47	6.34	-0.41	34.41	54.00	19.59	Average
3 2403.840	28.51	6.36	65.08	99.95	54.00	-45.95	Average X

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

Date of Test : Nov. 01, 2012 Temperature : 26°C
 EUT : Radio Control Humidity : 61%
 Test Mode : Transmit, Channel: 60, Frequency: 2447.500MHz



AUDIX TECHNOLOGY Corp. EMC Laboratory
 No.53-11, Tin-fu Tsun, Lin-kou Hsiang, Taipei
 County, Taiwan R.O.C. Post Code:24443
 Tel:+886-2-26092133 Fax:+886-2-26099303
 Email:ttemc@ttemc.com.tw

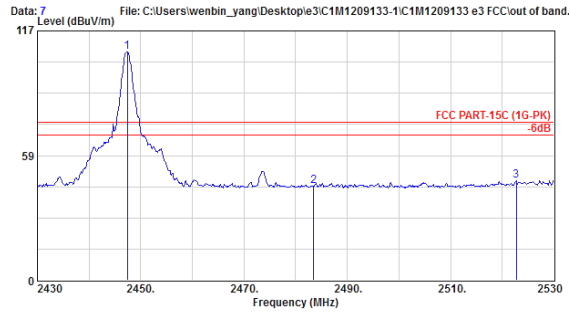


Site no. : A/C Chamber Data no. : 7
 Dis. / Ant. : 3m 3115(4927) Ant. pol. : HORIZONTAL
 Limit : FCC PART-15C (1G-PK)
 Env. / Ins. : E4446A 26°C/61% Vic Fong
 EUT : T2PSK1-2.4G
 Power Rating : DC6V
 Test Mode : TX2447.5

Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1 2447.400	28.59	6.41	72.23	107.22	74.00	-33.22	Peak X
2 2483.500	28.66	6.45	8.86	43.97	74.00	30.03	Peak
3 2522.700	28.81	6.50	11.38	46.70	74.00	27.30	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.



AUDIX TECHNOLOGY Corp. EMC Laboratory
 No.53-11, Tin-fu Tsun, Lin-kou Hsiang, Taipei
 County, Taiwan R.O.C. Post Code:24443
 Tel:+886-2-26092133 Fax:+886-2-26099303
 Email:ttemc@ttemc.com.tw

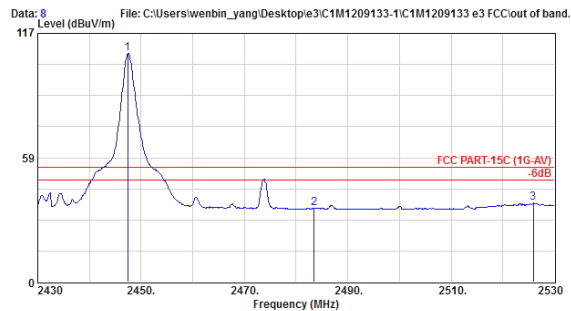

Site no. : A/C Chamber Data no. : 8
 Dis. / Ant. : 3m 3115(4927) Ant. pol. : HORIZONTAL
 Limit : FCC PART-15C (1G-AV)
 Env. / Ins. : E4446A 26°C/61% Vic Fong
 EUT : T2PSK1-2.4G
 Power Rating : DC6V
 Test Mode : TX2447.5


Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1 2447.400	28.59	6.41	72.39	107.38	54.00	-53.38	Average X
2 2483.500	28.66	6.45	-0.31	34.80	54.00	19.20	Average
3 2525.900	28.81	6.50	1.83	37.14	54.00	16.86	Average

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

Date of Test : Nov. 01, 2012 Temperature : 26°C
 EUT : Radio Control Humidity : 61%
 Test Mode : Transmit, Channel: 60, Frequency: 2447.500MHz



AUDIX TECHNOLOGY Corp. EMC Laboratory
 No.33-11, Tin-fu Tsun, Lin-kou Hsiang, Taipei
 County, Taiwan R.O.C. Post Code:24443
 Tel:+886-2-26092133 Fax:+886-2-26099303
 Email:ttenc@ttenc.com.tw

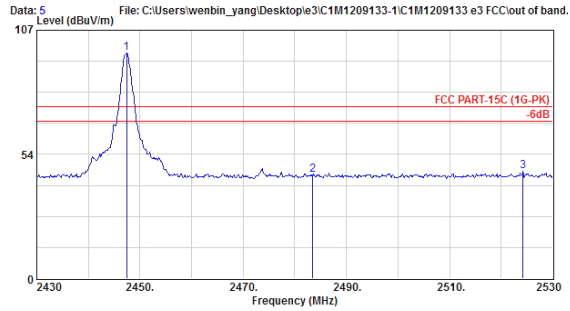


Site no. : A/C Chamber Data no. : 5
 Dis. / Ant. : 3m 3115(4927) Ant. pol. : VERTICAL
 Limit : FCC PART-15C (1G-PK)
 Env. / Ins. : E4446A 26°C/61% Vic Fong
 EUT : T2PSK1-2.4G
 Power Rating : DC6V
 Test Mode : TX2447.5

Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1 2447.400	28.59	6.41	62.04	97.03	74.00	-23.03	Peak X
2 2483.500	28.66	6.45	9.48	44.60	74.00	29.40	Peak
3 2524.200	28.81	6.50	11.06	46.37	74.00	27.63	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.



AUDIX TECHNOLOGY Corp. EMC Laboratory
 No.33-11, Tin-fu Tsun, Lin-kou Hsiang, Taipei
 County, Taiwan R.O.C. Post Code:24443
 Tel:+886-2-26092133 Fax:+886-2-26099303
 Email:ttenc@ttenc.com.tw

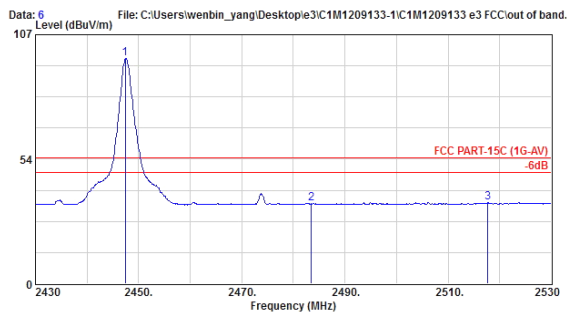

Site no. : A/C Chamber Data no. : 6
 Dis. / Ant. : 3m 3115(4927) Ant. pol. : VERTICAL
 Limit : FCC PART-15C (1G-AV)
 Env. / Ins. : E4446A 26°C/61% Vic Fong
 EUT : T2PSK1-2.4G
 Power Rating : DC6V
 Test Mode : TX2447.5

Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1 2447.400	28.59	6.41	61.85	96.84	54.00	-42.84	Average X
2 2483.500	28.66	6.45	-0.82	34.30	54.00	19.70	Average
3 2517.700	28.76	6.49	-0.32	34.92	54.00	19.08	Average

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.


4. 20dB BANDWIDTH MEASUREMENT

4.1. Test Equipment

The following test equipment was used during the 20dB bandwidth measurement:

Item	Type	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
1.	Spectrum Analyzer	Agilent	N9030A-544	US51350140	Oct. 17 12'	Oct. 16 13'
2.	DC Power Supply	TOP WARD	3303A	721773	N/A	N/A

4.2. Block Diagram of Test Setup

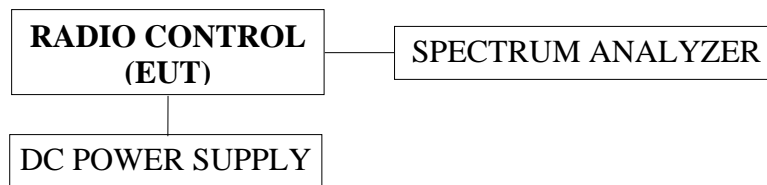

4.3. Specification Limits (§15.247(a)(1))

Alternatively, frequency hopping systems operating in the 2400-2483.5MHz band may have hopping channel carrier frequencies that are separated by 25kHz or two-thirds of the 20dB bandwidth of the hopping channel, whichever is greater.

4.4. Operating Condition of EUT

- 4.4.1. Set up the EUT and simulator as shown on 4.2.
- 4.4.2. To turn on the power of all equipment.
- 4.4.3. EUT (Radio Control) was on transmitting frequency function during the testing.

4.5. Test Procedure

The transmitter output was connected to the spectrum analyzer. The RBW of the fundamental frequency was measure by spectrum analyzer 1% of the 20dB bandwidth and the setting equal to RBW and VBW is equal to RBW. The 20dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 20dB.

The measurement guideline was according to FCC Public Notice DA 00-705.

4.6. Test Results


PASSED. All the test results are attached in next pages.

Test Date : Oct. 31, 2012 Temperature :26°C Humidity : 51%

No.	Channel	Test Frequency	20dB Bandwidth	2/3 (20dB Bandwidth)
1.	01	2403.250MHz	270.0kHz	180.0kHz
2.	30	2425.000MHz	270.0kHz	180.0kHz
3.	60	2447.500MHz	270.0kHz	180.0kHz

The maximum two-thirds of the 20dB bandwidth shall be at maximum 180.0kHz.


4.6.1. Channel 01, Frequency: 2403.250MHz

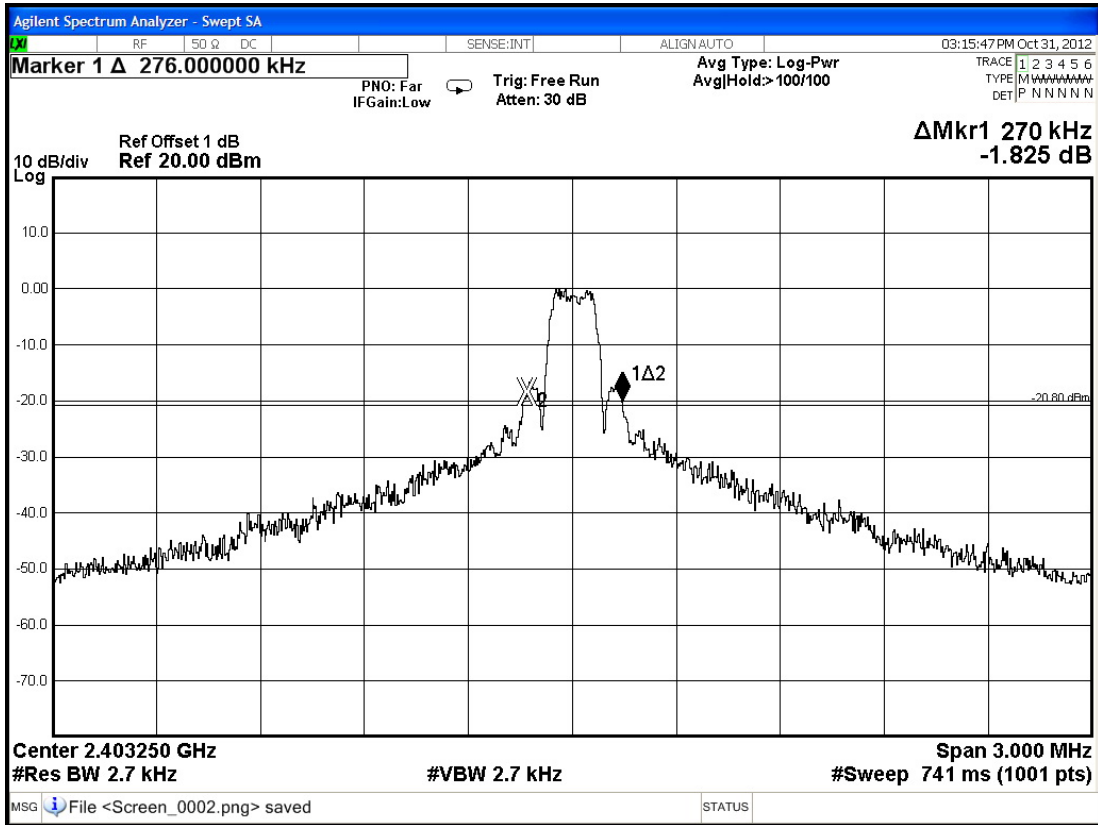

4.6.2. Channel 30, Frequency: 2425.000MHz



4.6.3. Channel 60, Frequency: 2447.500MHz

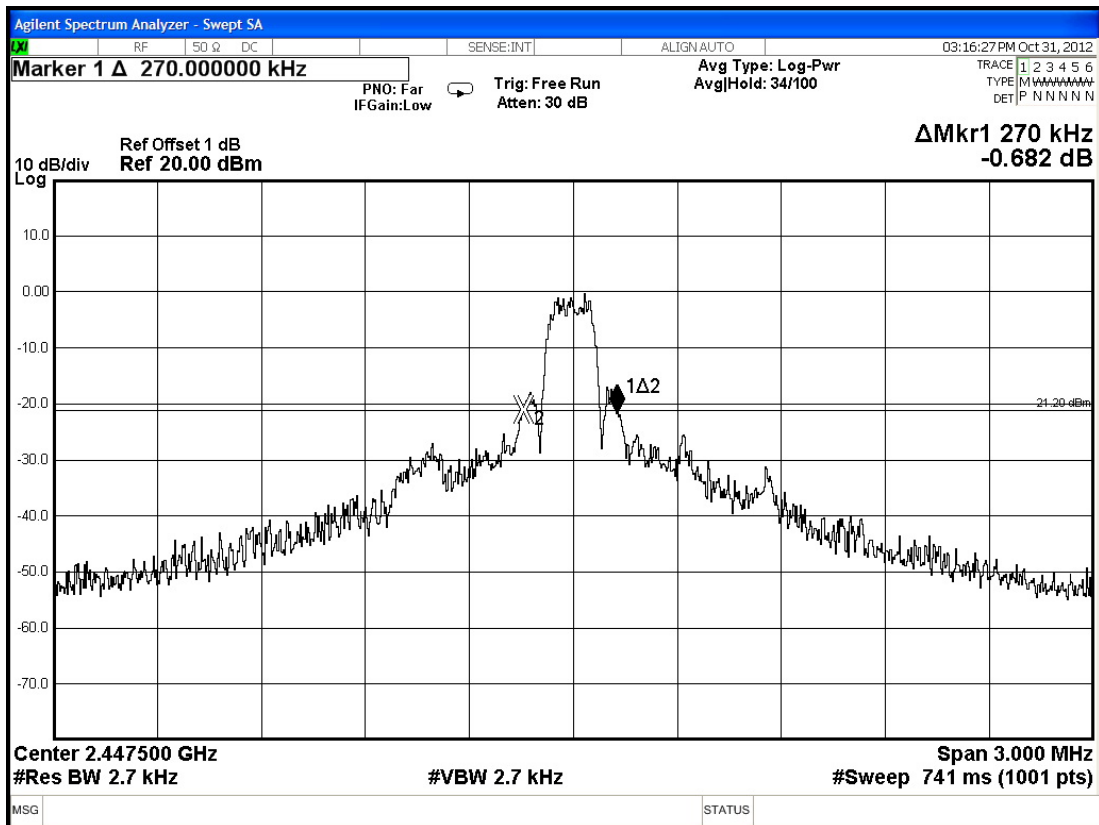

5. CARRIER FREQUENCY SEPARATION MEASUREMENT

5.1. Test Equipment

The following test equipment was used during the carrier frequency separation measurement:

Item	Type	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
1.	Spectrum Analyzer	Agilent	N9030A-544	US51350140	Oct. 17 12'	Oct. 16 13'
2.	DC Power Supply	TOP WARD	3303A	721773	N/A	N/A

5.2. Block Diagram of Test Setup

The same as section.4.2.

5.3. Specification Limits (§15.247(a)(1))

Alternatively, frequency hopping systems operating in the 2400-2483.5MHz band may have hopping channel carrier frequencies that are separated by 25kHz or two-thirds of the 20dB bandwidth of the hopping channel, whichever is greater.

5.4. Operating Condition of EUT

Same as 20dB bandwidth measurement which was listed in section 4.4.

5.5. Test Procedure

The transmitter output was connected to the spectrum analyzer. The channel separation was measure by spectrum analyzer with RBW equal to 1% of the span. The video bandwidth not to be smaller than resolution bandwidth, the peak was mark on adjacent bandwidth, the between of peak is carrier frequency separation. The measurement guideline was according to FCC Public Notice DA 00-705.

5.6. Test Results



PASSED. All the test results are attached in next pages.

Test Date : Nov. 12, 2012 Temperature :26°C Humidity : 51%

The minimum adjacent channel carrier frequency separation: 752kHz ◦

[Above values have met the requirement as specified in section 4.3: frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater.]

5.6.1. Channel 30, Test Frequency: 2425.000MHz

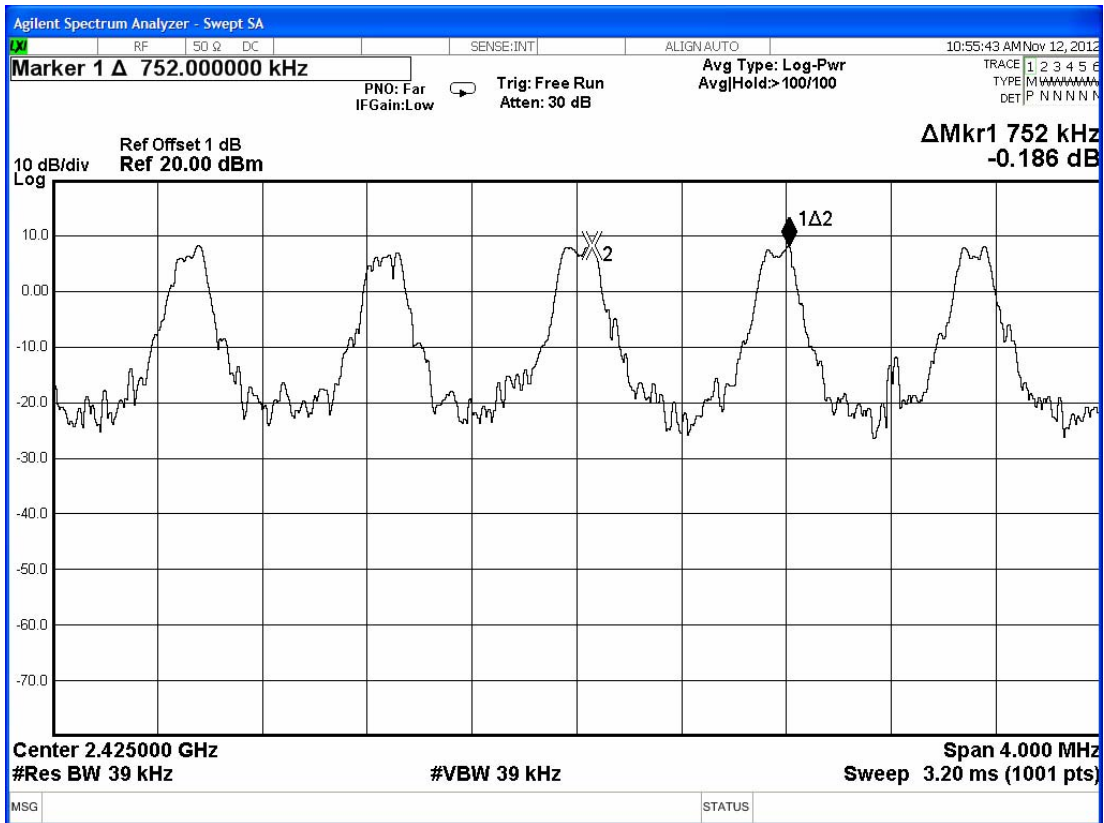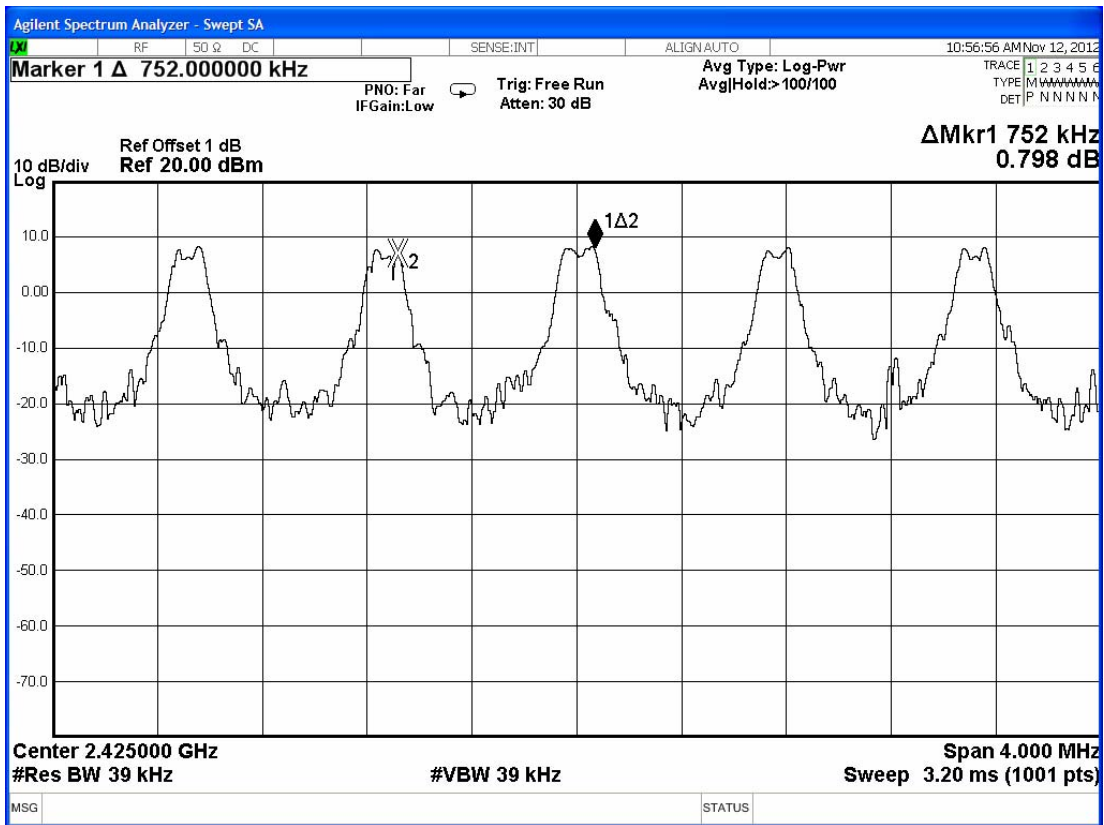

6. TIME OF OCCUPANCY MEASUREMENT

6.1. Test Equipment

The following test equipment was used during the time of occupancy measurement:

Item	Type	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
1.	Spectrum Analyzer	Agilent	N9030A-544	US51350140	Oct. 17, 12'	Oct. 16, 13'
2.	DC Power Supply	TOP WARD	3303A	721773	N/A	N/a

6.2. Block Diagram of Test Setup

The same as section.4.2.

6.3. Specification Limits (§15.247(a)(1)(iii))

Frequency hopping systems in the 2400-2483.5MHz shall use at least 15 non-overlapping channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by number of hopping channels employed.

6.4. Operating Condition of EUT

Same as 20dB bandwidth measurement which was listed in section 4.4.

6.5. Test Procedure

The EUT was connected to the notebook. The bandwidth of the fundamental frequency was measure by spectrum analyzer with 1MHz RBW and 1MHz VBW. $VBW \geq RBW$; Span=zero span.

Centred on a hopping channel sweep=as necessary to capture the entire dwell time per hopping channel ; Detector function=peak ; Trace=Max hold

The measurement guideline was according to FCC Public Notice DA 00-705.

6.6. Test Results

PASSED. All the test results are attached in next pages.

Test Date : Oct. 31, 2012 Temperature :26°C Humidity : 51%



Duty cycle: 60 channels*0.4 seconds = 24 seconds

Test Frequency: 2425.000MHz

For per second of 5 channels appearance, the longest time of occupancy for each of 24 seconds is:

5 channels*24 seconds* 3.03ms = 363.6ms (<400ms)

6.6.1. Channel 30, Test Frequency: 2425.000MHz

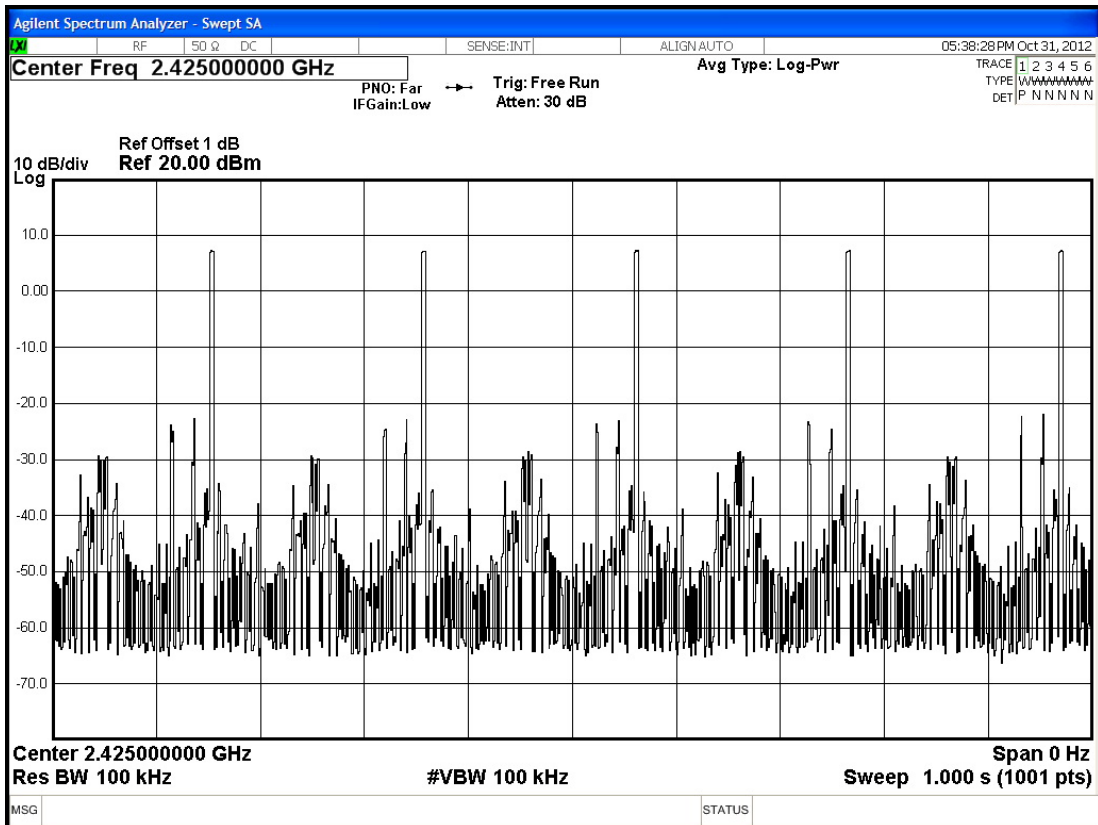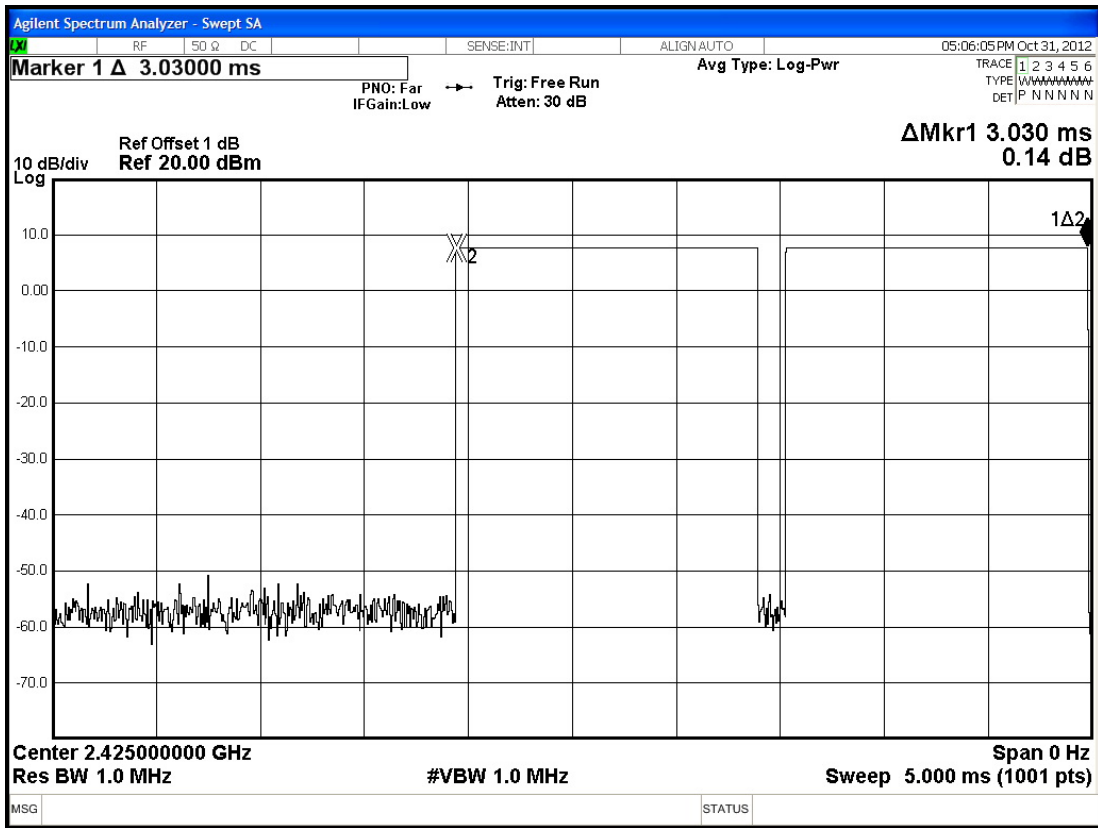

7. NUMBER OF HOPPING CHANNELS MEASUREMENT

7.1. Test Equipment

The following test equipment was used during the number of hopping channels measurement:

Item	Type	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
1.	Spectrum Analyzer	Agilent	N9030A-544	US51350140	Oct. 17, 12'	Oct. 16, 13'
2.	DC Power Supply	TOP WARD	3303A	721773	N/A	N/a

7.2. Block Diagram of Test Setup

The same as section.4.2.

7.3. Specification Limits (§15.247(a)(1)(iii))

Frequency hopping systems which use fewer than 20 hopping frequencies may employ intelligent hopping techniques to avoid interference to other transmissions. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 non-overlapping channels.

7.4. Operating Condition of EUT

Same as 20dB bandwidth measurement which was listed in section 4.4.

7.5. Test Procedure


The transmitter output was connected to the spectrum analyzer. The bandwidth of the fundamental frequency was measure by spectrum analyzer with 100kHz RBW and 100kHz VBW. Sweep=Auto ; Detector function=peak ; Trace=Max hold
The measurement guideline was according to FCC Public Notice DA 00-705.

7.6. Test Results

PASSED. All the test results are attached in next page.

Test Date : Oct. 31, 2012 Temperature :26°C Humidity : 51%

The number hopping channel is 60.

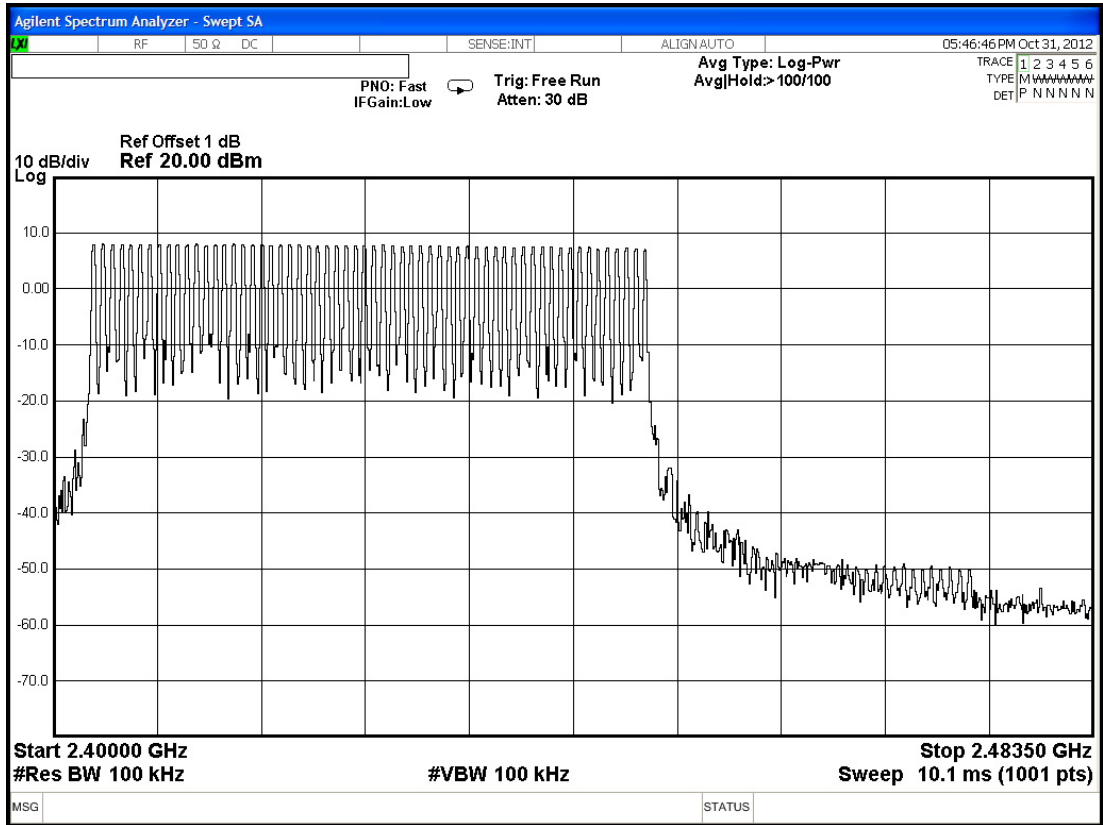

8. MAXIMUM PEAK OUTPUT POWER MEASUREMENT

8.1. Test Equipment

The following test equipment was used during the maximum peak output power measurement:

Item	Type	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
1.	Spectrum Analyzer	Agilent	N9030A-544	US51350140	Oct. 17, 12'	Oct. 16, 13'
2.	DC Power Supply	TOP WARD	3303A	721773	N/A	N/A

8.2. Block Diagram of Test Setup

The same as section.4.2.

8.3. Specification Limits (§15.247(b)-(1))

The Limits of maximum Peak Output Power for frequency hopping systems in 2400-2483.5MHz is: 0.125Watt. (21dBm)

8.4. Operating Condition of EUT

Same as 20dB bandwidth measurement which was listed in section 4.4.

8.5. Test Procedure

The transmitter output was connected to the spectrum analyzer.

Span can encompass the waveform

RBW>EBW

VBW ≥ RBW

Sweep=10MHz

The measurement guideline was according to FCC Public Notice DA 00-705.


8.6. Test Results

PASSED. All the test results are listed below.


Test Date : Oct. 31, 2012 Temperature :26°C Humidity : 51%

No.	Channel	Test Frequency	Peak Output Power	Limit
1.	01	2403.250MHz	7.548dBm	21dBm
2.	30	2425.000MHz	7.354dBm	21dBm
3.	60	2447.500MHz	6.854dBm	21dBm


8.6.1. Channel 01, Frequency: 2403.250MHz

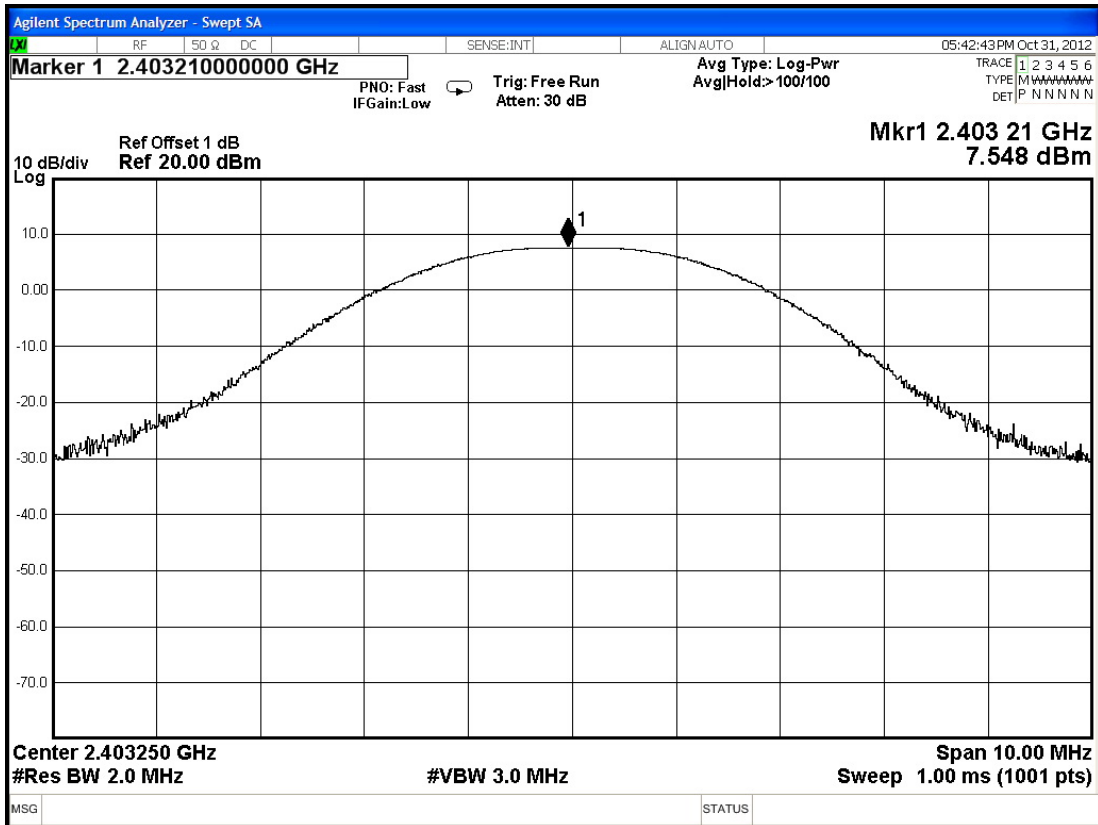

8.6.2. Channel 30, Frequency: 2425.000MHz

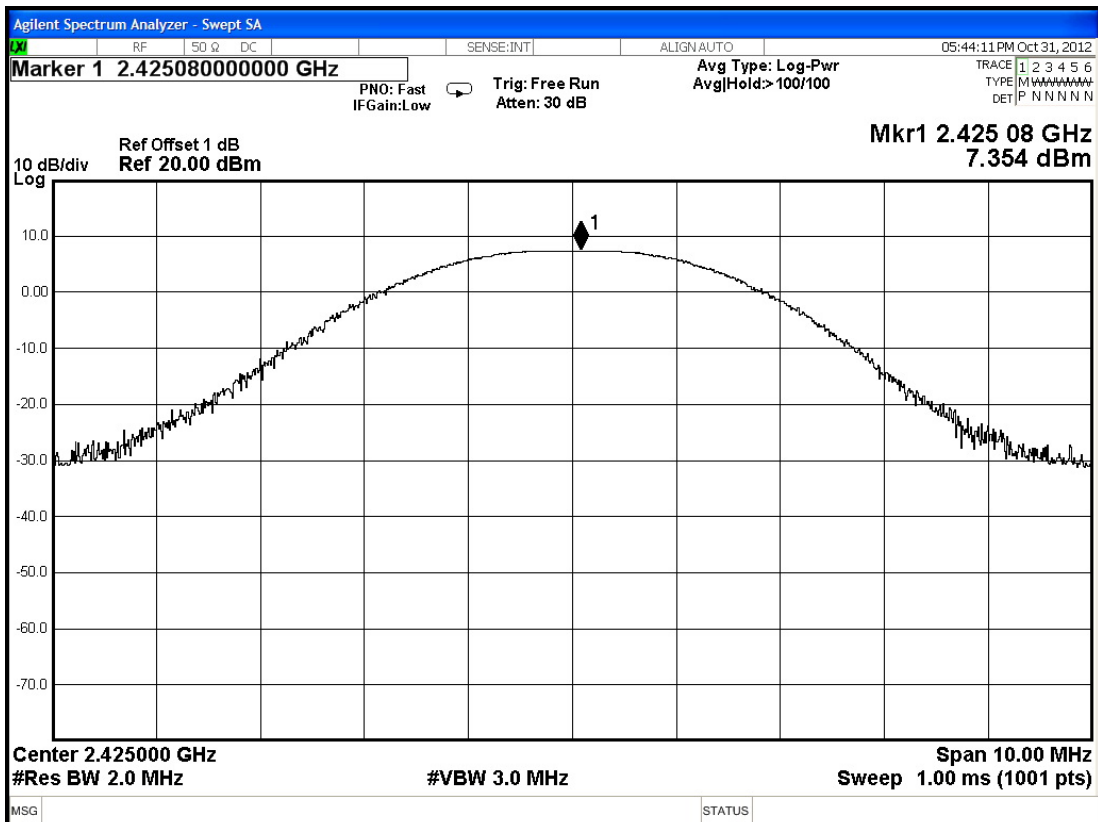

8.6.3. Channel 60, Frequency: 2447.500MHz

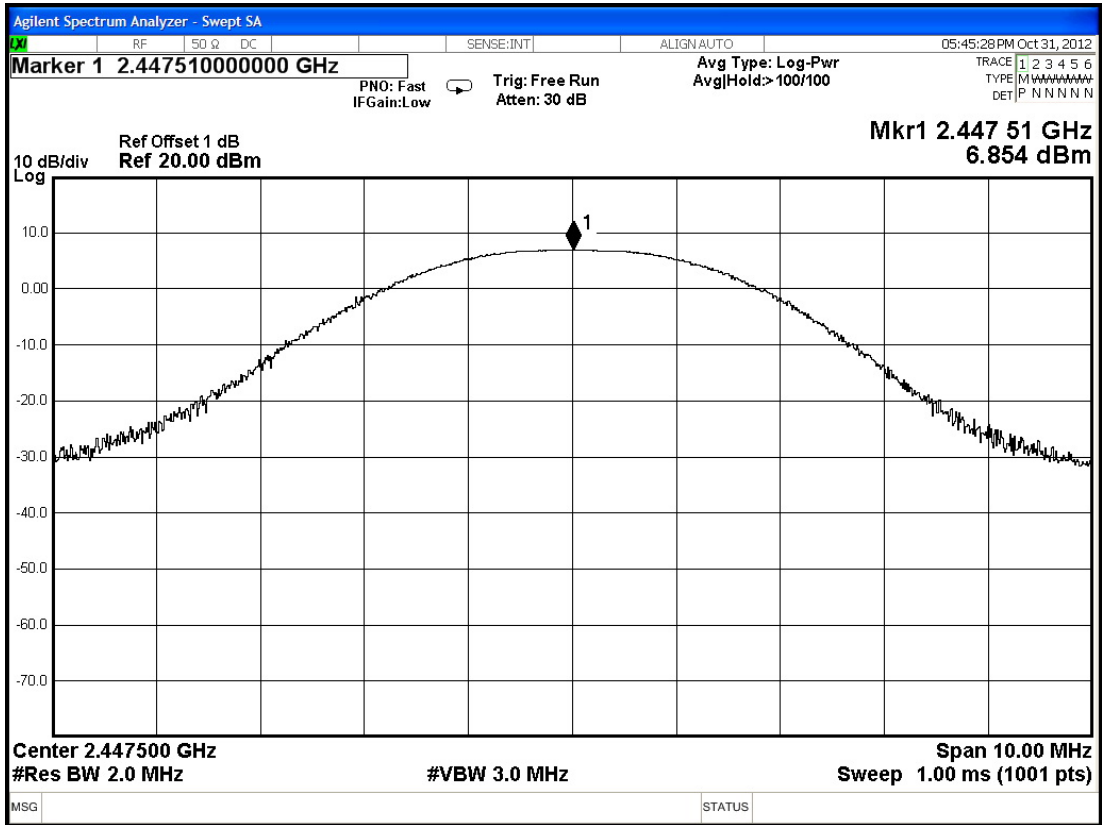

9. EMISSION LIMITATIONS MEASUREMENT

9.1. Test Equipment

The following test equipment was used during the emission limitations test:

Item	Type	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
1.	Spectrum Analyzer	Agilent	N9030A-544	US51350140	Oct. 17, 12'	Oct. 16, 13'
2.	DC Power Supply	TOP WARD	3303A	721773	N/A	N/A

9.2. Block Diagram of Test Setup

The same as section.4.2.

9.3. Specification Limits (§15.247(c))

9.3.1. In any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (See Section 15.205(c)).(※This test result attaching to §3.6.3)

9.3.2. The reference level for determining limit of emission limitations is according to the value measured indicated in plots at section 8.6.

9.4. Operating Condition of EUT

Same as 20dB bandwidth measurement which was listed in section 4.4.

9.5. Test Procedure

The transmitter output was connected to the spectrum analyzer. Set both RBW and VBW of spectrum analyzer to 100kHz with suitable frequency span including 100kHz bandwidth from band edge.




The measurement guideline was according to FCC Public Notice DA 00-705.




9.6. Test Results

PASSED. The testing data was attached in the next pages.




Test Date: Oct. 31, 2012 Temperature : 26°C Humidity : 51%




Channel 01, Frequency: 2403.250MHz

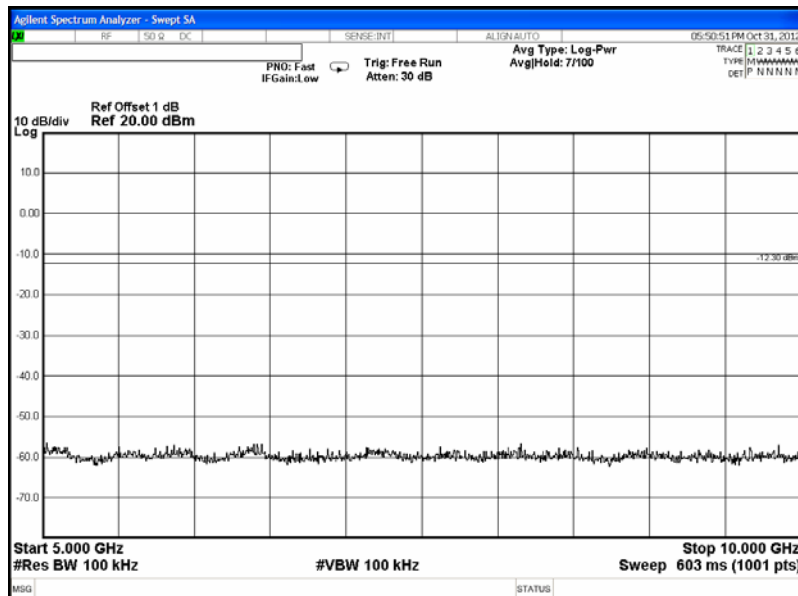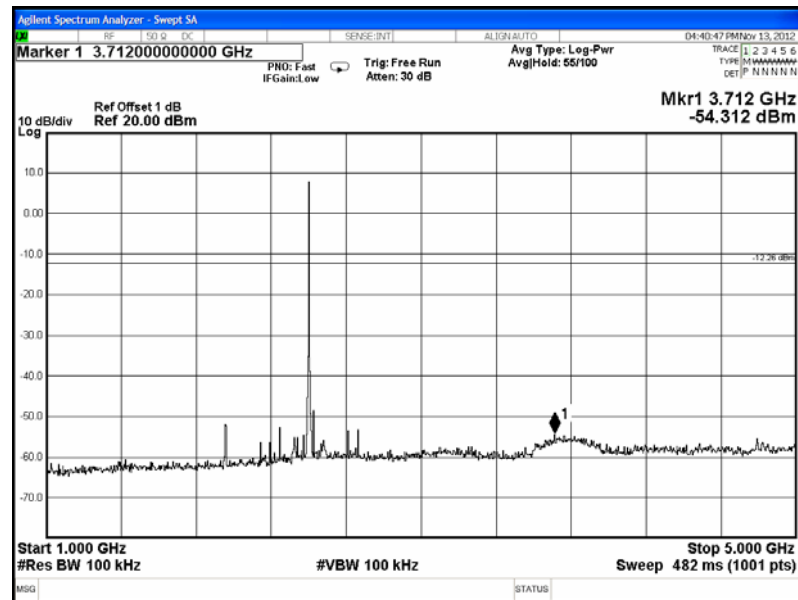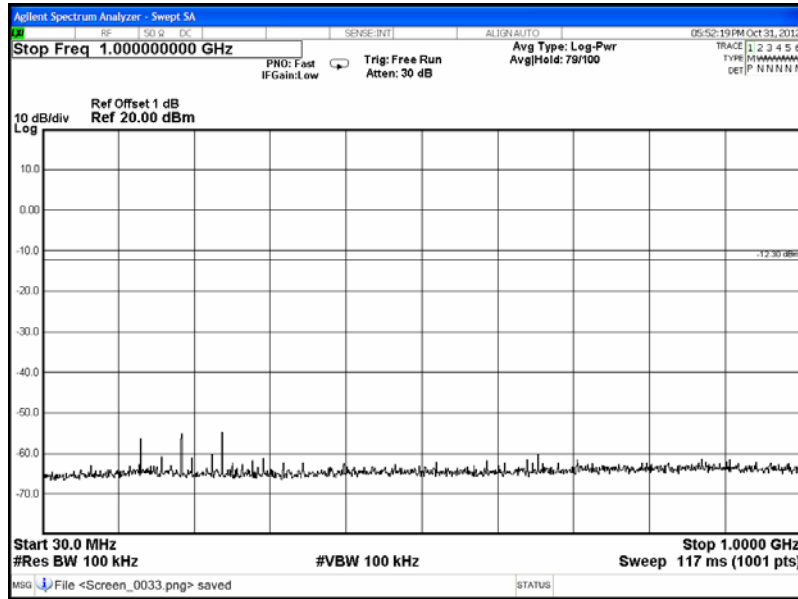

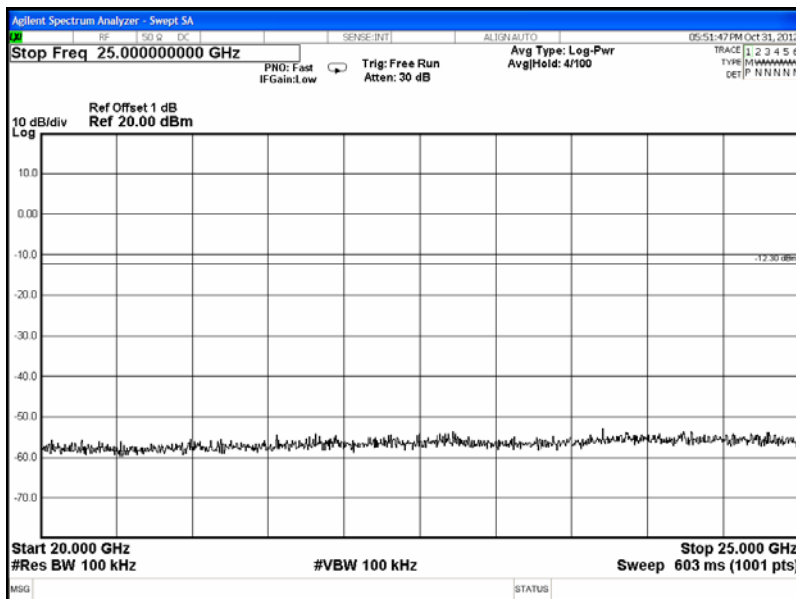
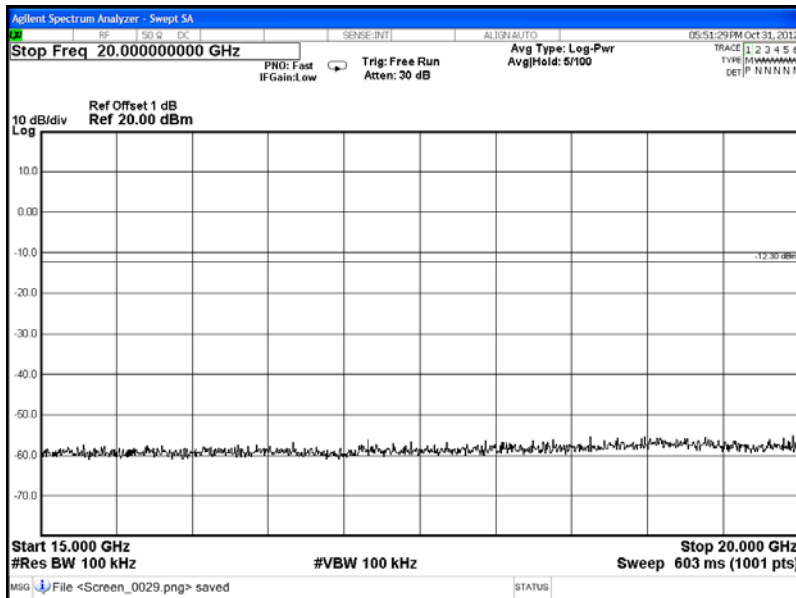
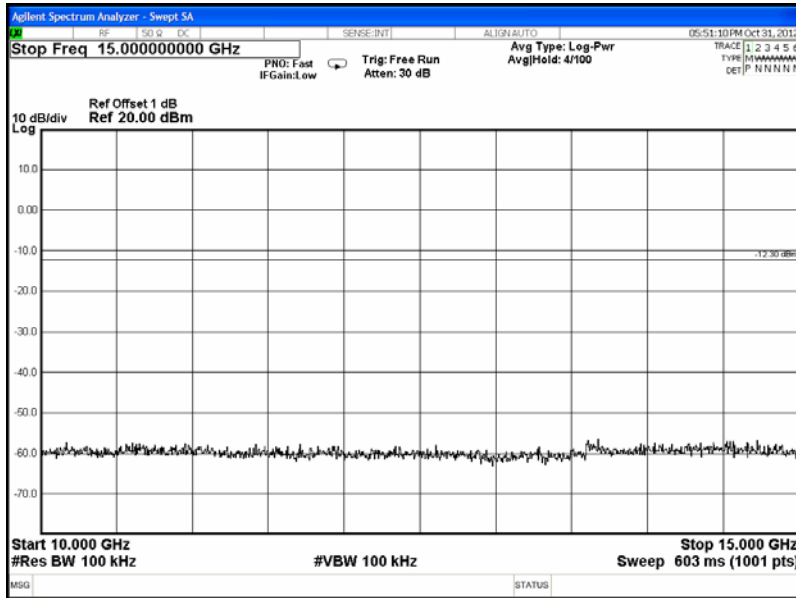





Channel 30, Frequency: 2425.00MHz

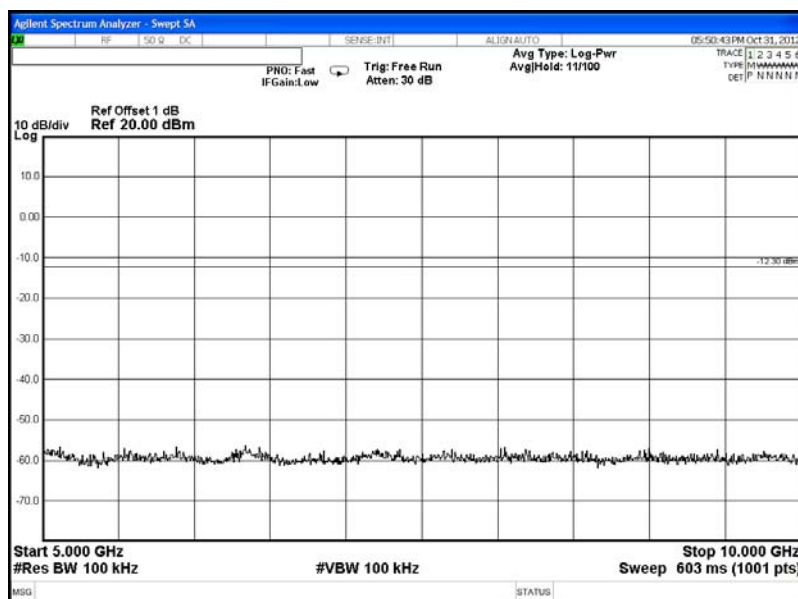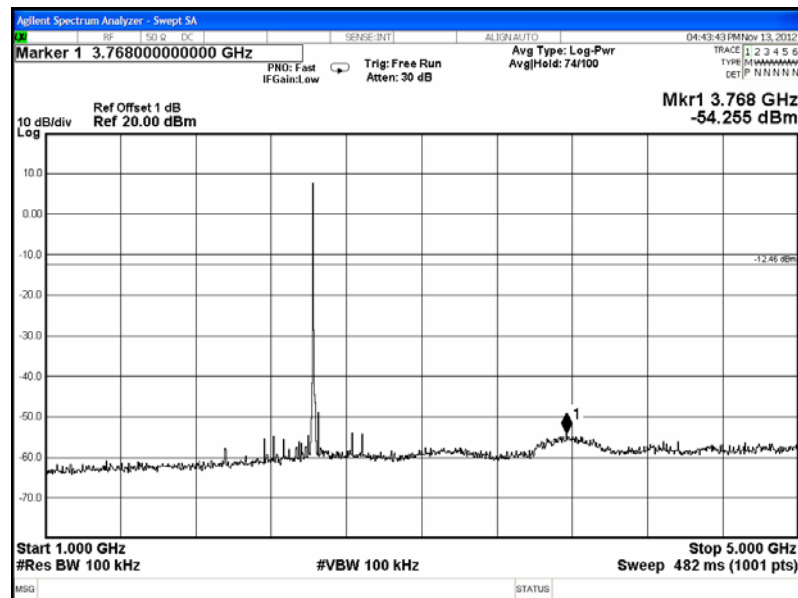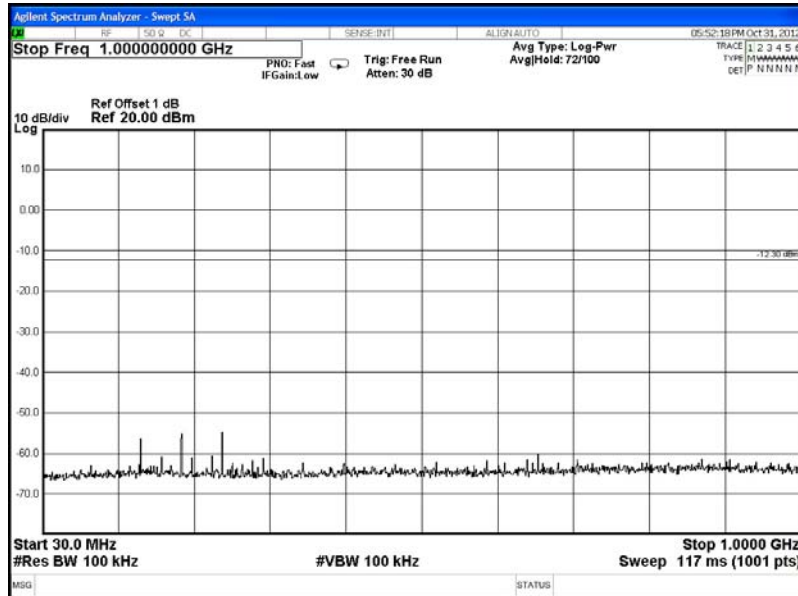

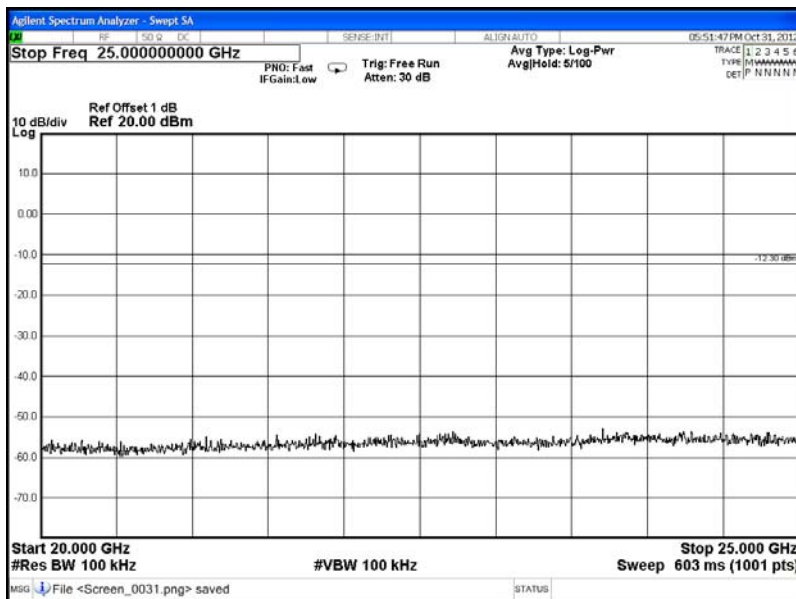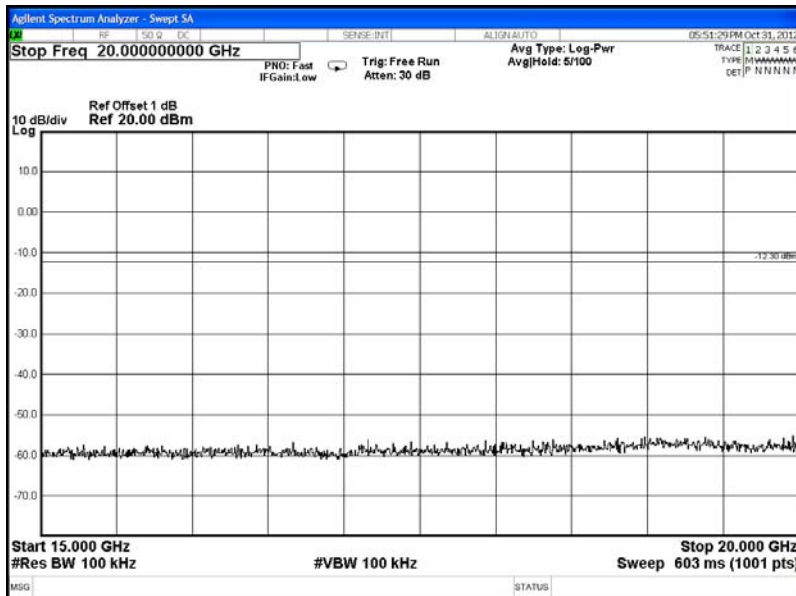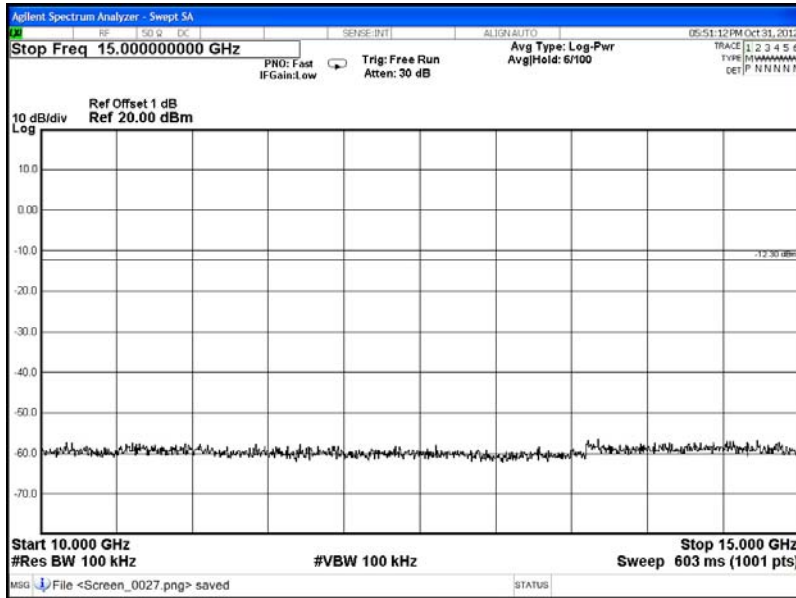

Channel 60, Frequency: 2447.5MHz

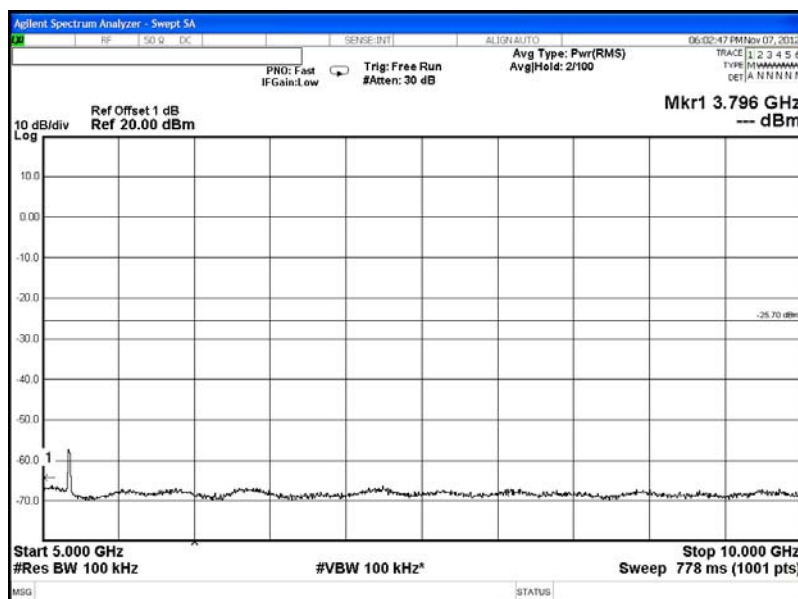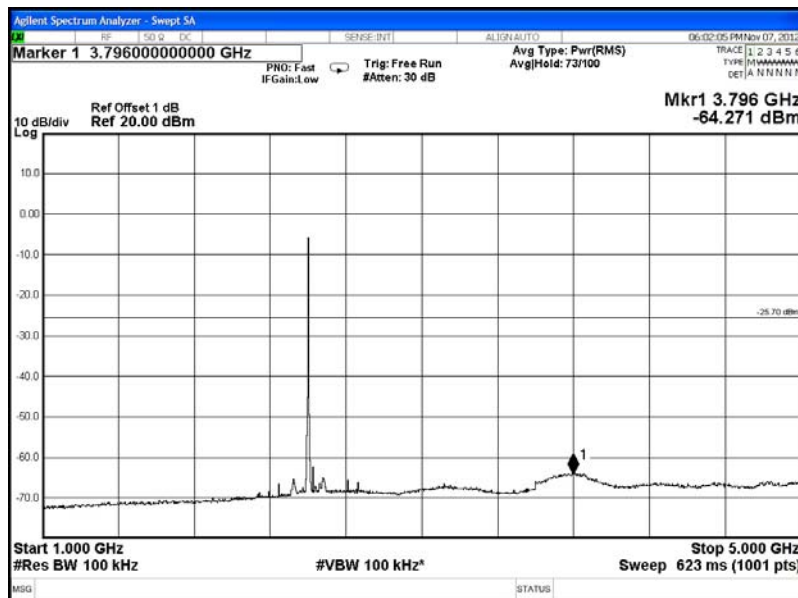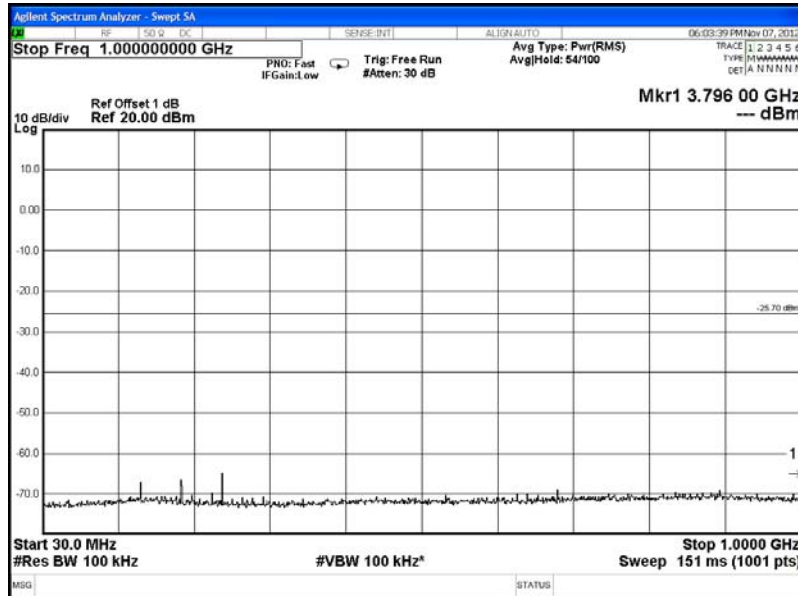

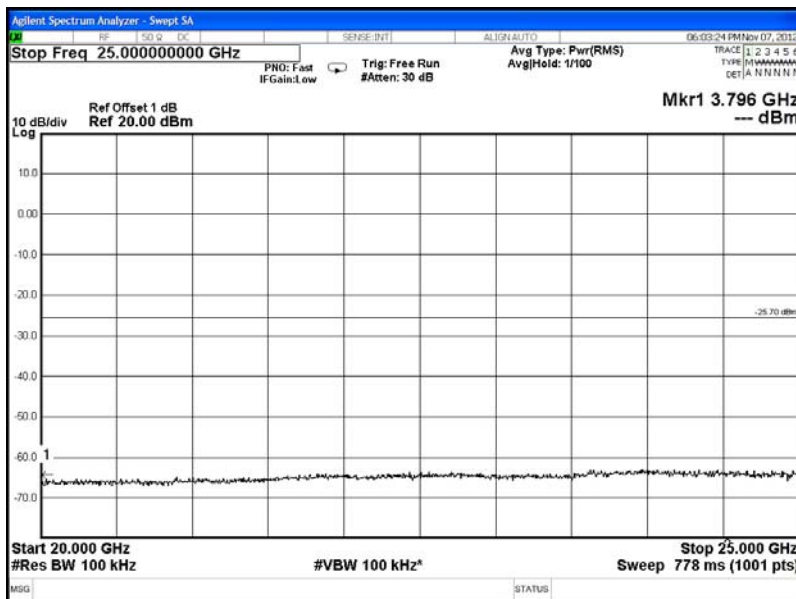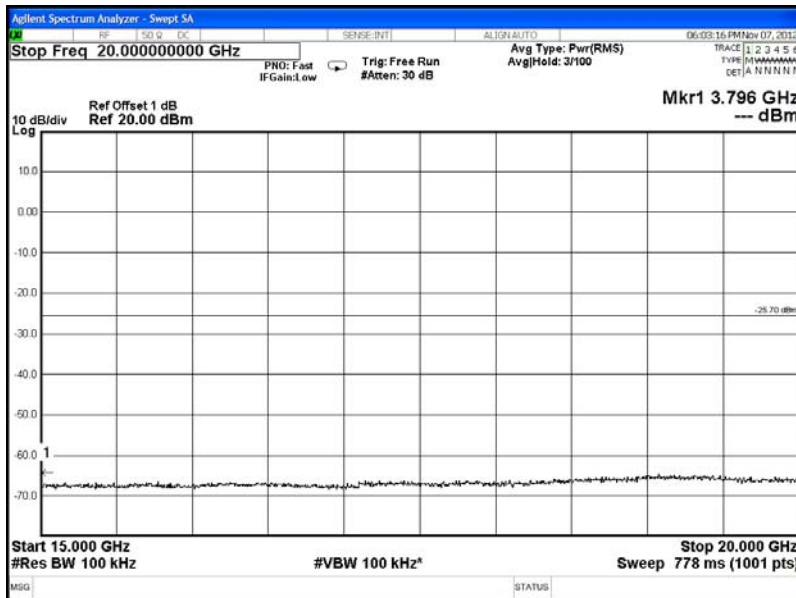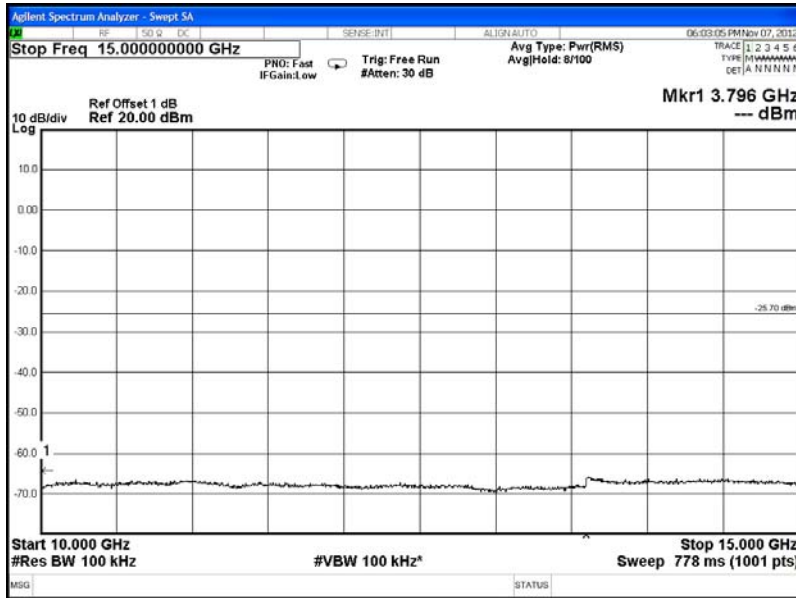

10. BAND EDGES MEASUREMENT

10.1. Test Equipment

The following test equipment was used during the band edges measurement:

Item	Type	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
1.	Spectrum Analyzer	Agilent	N9030A-544	US51350140	Oct. 17, 12'	Oct. 16, 13'
2.	DC Power Supply	TOP WARD	3303A	721773	N/A	N/a

10.2. Block Diagram of Test Setup

The same as section.4.2.

10.3. Specification Limits (§15.247(c))

In any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (See Section 15.205(c)). (※ This test result attaching to §3.6.3)

10.4. Operating Condition of EUT

Same as 20dB bandwidth measurement which was listed in section 4.4.

10.5. Test Procedure

The transmitter output was connected to the spectrum analyzer. Set both RBW and VBW of spectrum analyzer to 100kHz with suitable frequency span including 100kHz bandwidth from band edge.

The measurement guideline was according to FCC Public Notice DA 00-705.


10.6. Test Results

PASSED. The testing data was attached in the next pages.


Test Date : Oct. 31, 2012 Temperature :26°C Humidity : 51%

1. Below Band edge : The highest emission level is -41.480dBm on 2.3999GHz ◦
2. Upper Band edge: The highest emission level is -60.167dBm on 2.4836GHz ◦

10.6.1. Below Band edge

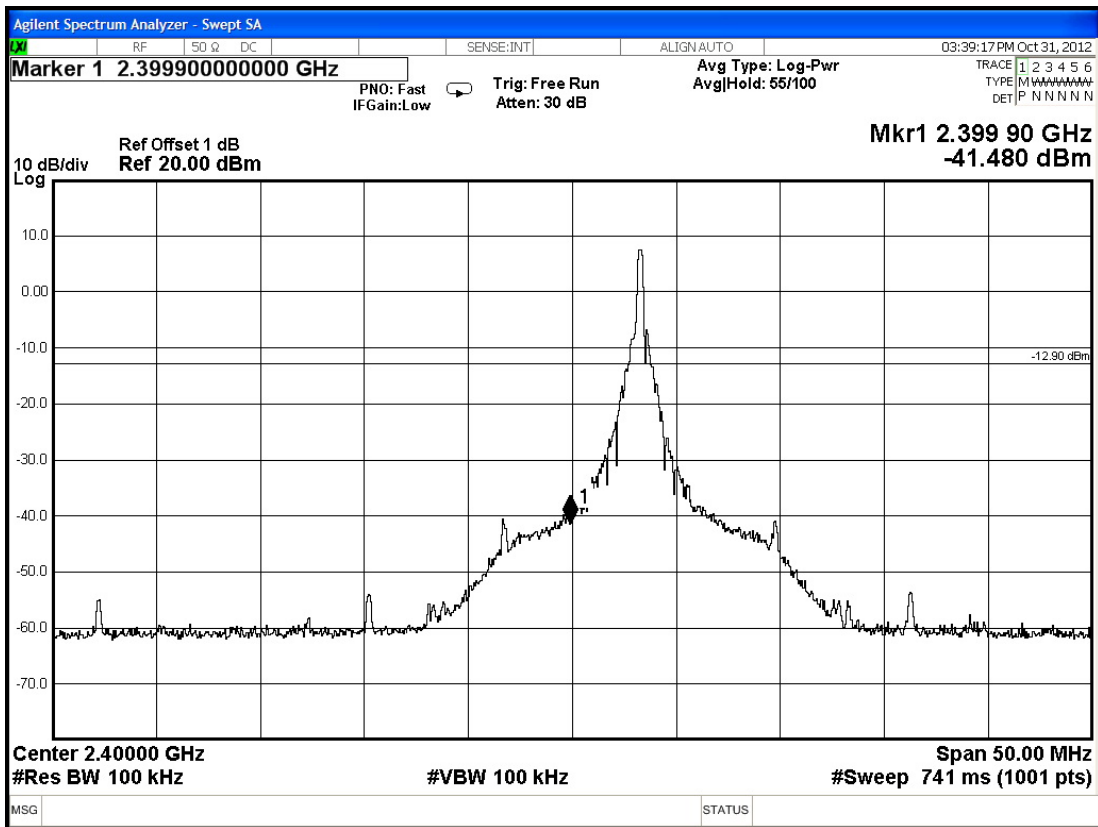

10.6.2. Upper Band edge

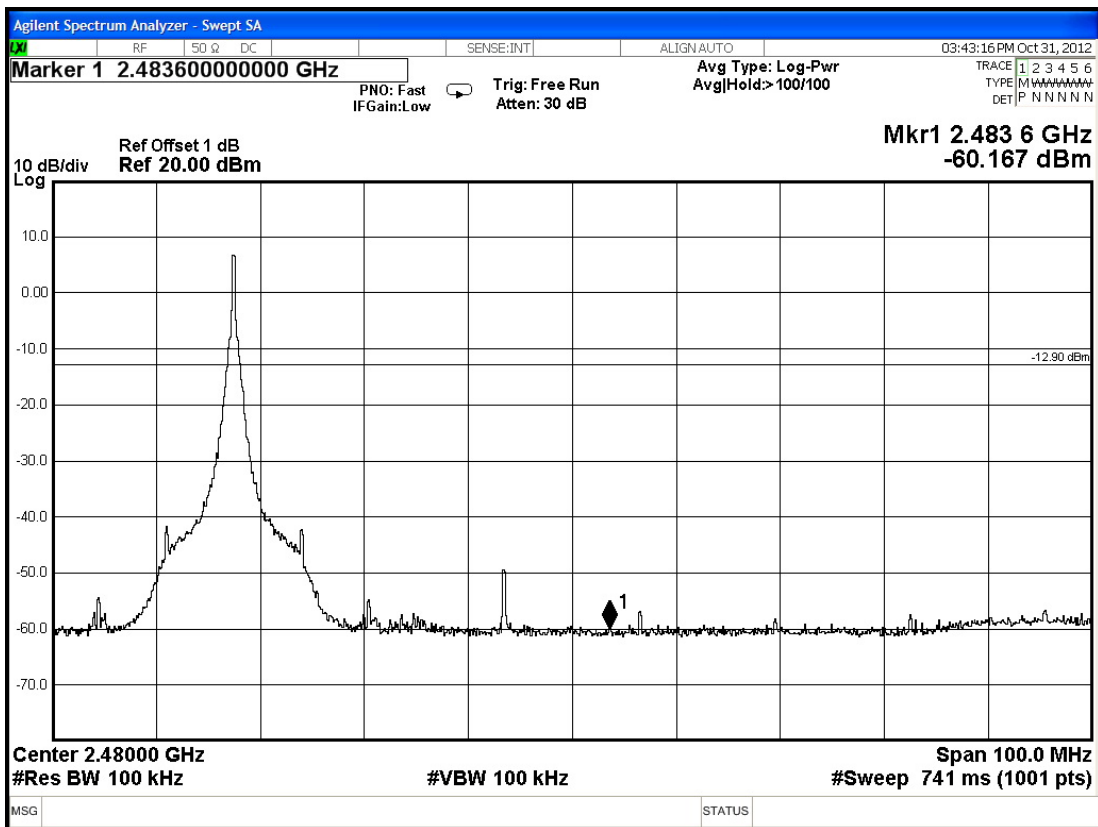

11.DEVIATION TO TEST SPECIFICATIONS

【NONE】