

APPLICATION FOR CERTIFICATION

On Behalf of

FUTABA Corporation

Radio Control

Model No. : T2PSK2-2.4G

FCC ID : AZPT2PSK2-24G

Brand: Futaba

Prepared for : FUTABA Corporation
1080 Yabutsuka Chosei-son Chosei-gun
Chiba, 299-4395 Japan.

Prepared by : AUDIX Technology Corporation
EMC Department
No. 53-11, Dingfu, Linkou Dist.,
New Taipei City 244, Taiwan, R.O.C.

Tel : (02) 2609-9301, 2609-2133
Fax: (02) 2609-9303

File Number : C1M1209132
Report Number : EM-F1010788
Date of Test : Sep. 27, 2012
Date of Report : Oct. 02, 2012

TABLE OF CONTENTS

<u>Description</u>	<u>Page</u>
TEST REPORT CERTIFICATION	4
1. GENERAL INFORMATION.....	5
1.1. Description of Device (EUT).....	5
1.2. Description of Test Facility	6
1.3. Measurement Uncertainty	6
2. CONDUCTED EMISSION MEASUREMET.....	7
3. RADIATED EMISSION MEASUREMENT	8
3.1. Test Equipment.....	8
3.2. Test Setup	8
3.3. Radiated Emission Limits (§15.209)	10
3.4. Operating Condition of EUT	10
3.5. Test Procedure	10
3.6. Radiated Emission Measurement Results.....	11
4. 20dB BANDWIDTH MEASUREMENT.....	29
4.1. Test Equipment.....	29
4.2. Block Diagram of Test Setup.....	29
4.3. Specification Limits (§15.247(a)(1))	29
4.4. Operating Condition of EUT	29
4.5. Test Procedure (DA 00-705).....	29
4.6. Test Results.....	30
5. CARRIER FREQUENCY SEPARATION MEASUREMENT	33
5.1. Test Equipment.....	33
5.2. Block Diagram of Test Setup.....	33
5.3. Specification Limits (§15.247(a)(1))	33
5.4. Operating Condition of EUT	33
5.5. Test Procedure (DA 00-705).....	33
5.6. Test Results.....	33
6. TIME OF OCCUPANCY MEASUREMENT	35
6.1. Test Equipment.....	35
6.2. Block Diagram of Test Setup.....	35
6.3. Specification Limits (§15.247(a)(1)(iii))	35
6.4. Operating Condition of EUT	35
6.5. Test Procedure (DA 00-705).....	35
6.6. Test Results.....	35
7. NUMBER OF HOPPING CHANNELS MEASUREMENT	37
7.1. Test Equipment.....	37
7.2. Block Diagram of Test Setup.....	37
7.3. Specification Limits (§15.247(a)(1)(iii))	37
7.4. Operating Condition of EUT	37
7.5. Test Procedure (DA 00-705).....	37
7.6. Test Results.....	37
8. MAXIMUM PEAK OUTPUT POWER MEASUREMENT	39
8.1. Test Equipment.....	39
8.2. Block Diagram of Test Setup.....	39
8.3. Specification Limits (§15.247(b)-(1)).....	39
8.4. Operating Condition of EUT	39
8.5. Test Procedure (DA 00-705).....	39
8.6. Test Results.....	39

9. EMISSION LIMITATIONS MEASUREMENT	42
10. BAND EDGES MEASUREMENT.....	43
10.1. Test Equipment.....	43
10.2. Block Diagram of Test Setup	43
10.3. Specification Limits (§15.247(c))	43
10.4. Operating Condition of EUT	43
10.5. Test Procedure (DA 00-705)	43
10.6. Test Results	43
11. DEVIATION TO TEST SPECIFICATIONS	45
12. PHOTOGRAPHS	46
12.1. Photos of Radiated Measurement at Semi-Anechoic Chamber.....	46
12.2. Photo of RF Conducted Measurement	49

TEST REPORT CERTIFICATION

Applicant : FUTABA Corporation
 Manufacturer : FUTABA Corporation
 EUT Description : Radio Control
 FCC ID : AZPT2PSK2-24G
 (A) Model No. : T2PSK2-2.4G
 (B) Serial No. : N/A
 (C) Brand : Futaba
 (D) Power Supply : DC 6V
 (E) Test Voltage : DC 6V (Via Battery)

Measurement Procedure Used:

FCC RULES AND REGULATIONS PART 15 SUBPART C, Oct. 2011
AND ANSI C63.4/2003

(FCC CFR 47 Part 15C, §15.207 and §15.209 and §15.247)

The device described above was tested by AUDIX Technology Corporation to determine the maximum emission levels emanating from the device. The maximum emission levels were compared to the FCC Part 15 subpart C limits.

The measurement results are contained in this test report and AUDIX Technology Corporation is assumed full responsibility for the accuracy and completeness of these measurements. Also, this report shows that the EUT to be technically compliant with the FCC official limits.

This report applies to above tested sample only. This report shall not be reproduced in part without written approval of AUDIX Technology Corporation.

Date of Test : Sep. 27, 2012 Date of Report : Oct. 02, 2012

Producer : Annie Yu
(Annie Yu/Assistant Administrator)

Signatory : Leon Liu
(Leon Liu/Deputy General Manager)

1. GENERAL INFORMATION

1.1. Description of Device (EUT)

Description : Radio Control

Model Number : T2PSK2-2.4G

Serial Number : N/A

FCC ID : AZPT2PSK2-24G

Applicant : FUTABA Corporation
1080 Yabutsuka Chosei-son Chosei-gun
Chiba, 299-4395 Japan.

Manufacturer : FUTABA Corporation
1080 Yabutsuka Chosei-son Chosei-gun
Chiba, 299-4395 Japan.

Radio Technology : FHSS

Modulation System : FSK

Frequency Band : 2403.250MHz ~ 2447.500MHz

Tested Frequency : 2403.250MHz (Channel 01)
2425.00MHz (Channel 30)
2447.500MHz (Channel 60)

Frequency Channel : 60 channels

Antenna (Print Pattern) : Antenna Gain: 1.3dBi

Date of Receipt of Sample : Sep. 13, 2012

Date of Test : Sep. 27, 2012

1.2. Description of Test Facility

Name of Firm : **AUDIX Technology Corporation
EMC Department**
No. 53-11, Dingfu, Linkou Dist.,
New Taipei City 244, Taiwan, R.O.C.

Test Location & Facility (AC) : **Semi-Anechoic Chamber**
No. 53-11, Dingfu, Linkou Dist.,
New Taipei City 244, Taiwan, R.O.C.

May 11, 2012 Renewal on
Federal Communication Commission
Registration Number: 90993

NVLAP Lab. Code : 200077-0

TAF Accreditation No : 1724

1.3. Measurement Uncertainty

Test Item	Frequency Range	Uncertainty (dB)
Radiation Test (Distance: 3m)	30MHz~300MHz	±2.91dB
	300MHz~1000MHz	±2.94dB
	Above 1GHz	± 5.02dB

Remark : Uncertainty = $ku_c(y)$

Test Item	Uncertainty
20dB Bandwidth	± 0.2kHz
Carrier Frequency Separation	± 0.2kHz
Time Of Occupancy	± 0.03sec
Maximum peak Output power	± 0.52dBm
Emission Limitations	± 0.13dB
Band Edges	± 0.13dB

2. CONDUCTED EMISSION MEASUREMET

【The EUT only employs DC power for operation, no conductive emission limits are required according to FCC Part 15 Section §15.207】

3. RADIATED EMISSION MEASUREMENT

3.1. Test Equipment

The following test equipment was used during the radiated emission measurement:

3.1.1. For Frequency Range 30MHz~1000MHz (at Semi-Anechoic Chamber)

Item	Type	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
1.	Spectrum Analyzer	Agilent	E4446A	US44300366	Aug. 07, 12'	Aug. 06, 13'
2.	Test Receiver	R & S	ESCS30	100339	Mar. 08, 12'	Mar. 07, 13'
3.	Amplifier	HP	8447D	2944A06305	Feb. 13, 12'	Feb. 12, 13'
4.	Log Periodic Antenna	Schwarzbeck	UHALP 9108-A	0810	Mar. 03, 12'	Mar. 02, 13'
5.	Biconical Antenna	CHASE	VBA6106A	1264	Mar. 03, 12'	Mar. 02, 13'

3.1.2. For Frequency Above 1GHz (at Semi-Anechoic Chamber)


Item	Type	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
1.	Spectrum Analyzer	Agilent	E4446A	US44300366	Aug. 07, 12'	Aug. 06, 13'
2.	Test Receiver	R & S	ESCS30	100339	Mar. 08, 12'	Mar. 07, 13'
3.	Amplifier	HP	8449B	3008A00529	Dec. 09, 11'	Dec. 08, 12'
4.	Horn Antenna	EMCO	3115	9112-3775	May 09, 12'	May 08, 13'
5.	Horn Antenna	EMCO	3116	2653	Oct. 07, 11'	Oct. 06, 12'
6.	2.4GHz Notch Filter	EWT	EWT-14-007 0-R1	G2	Dec. 05, 11'	Dec. 04, 12'
7.	3.5GHz High Pass Filter	HP	84300-80038	005	Jan. 04, 12'	Jan. 03, 13'

3.2. Test Setup


3.2.1. Block Diagram of connection between EUT and simulators

**RADIO CONTROL
(EUT)**

3.2.2. Semi-Anechoic Chamber (3m) Setup Diagram for 30-1000MHz

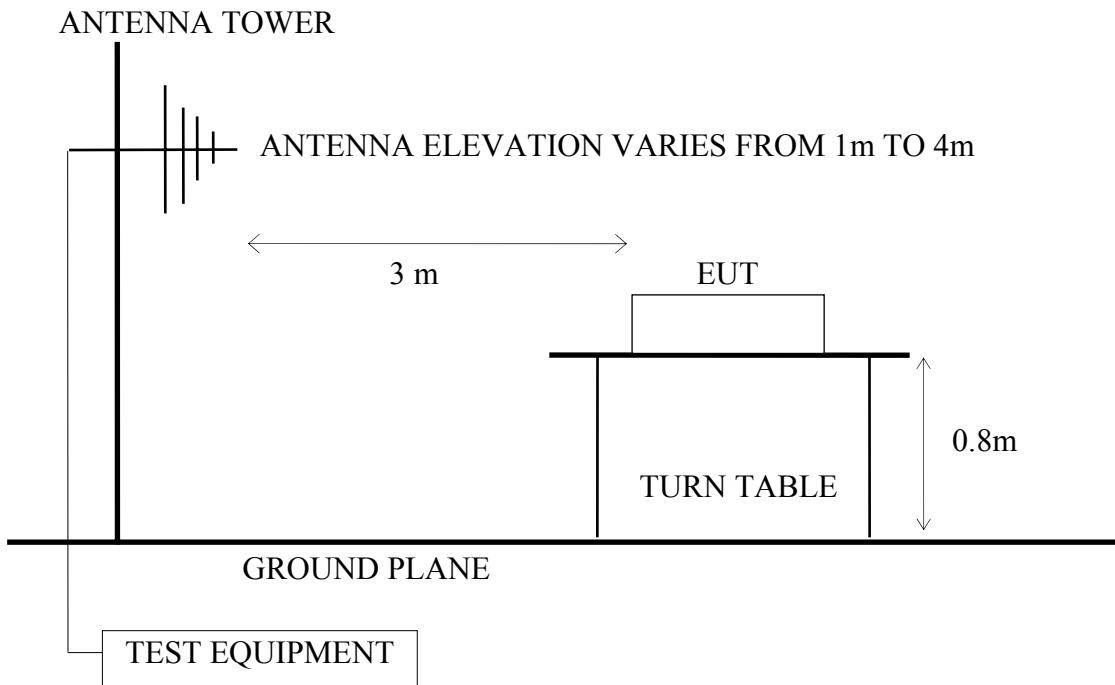

3.2.3. Semi-Anechoic Chamber (3m) Setup Diagram for above 1GHz

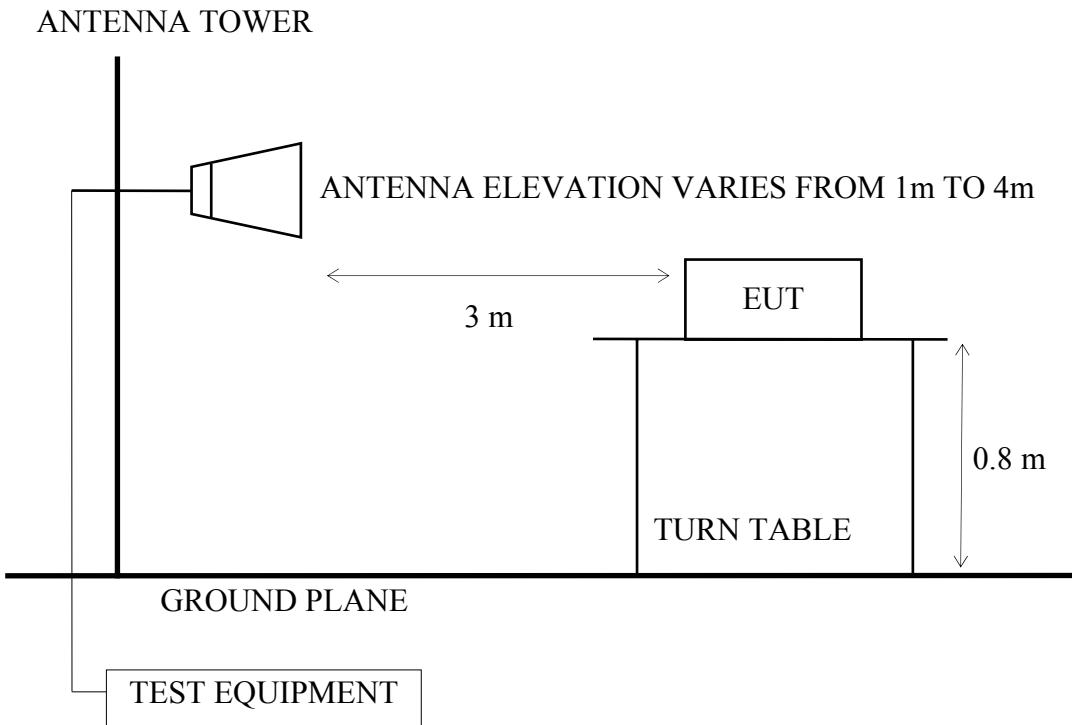

3.3. Radiated Emission Limits (§15.209)

FREQUENCY MHz	DISTANCE Meters	FIELD STRENGTHS LIMITS	
		$\mu\text{V/m}$	$\text{dB}\mu\text{V/m}$
30 ~ 88	3	100	40.0
88 ~ 216	3	150	43.5
216 ~ 960	3	200	46.0
Above 960	3	500	54.0
Above 1000	3	74.0 $\text{dB}\mu\text{V/m}$ (Peak) 54.0 $\text{dB}\mu\text{V/m}$ (Average)	

- Remark : (1) Emission level ($\text{dB}\mu\text{V/m}$) = 20 log Emission level ($\mu\text{V/m}$)
(2) The tighter limit applies at the edge between two frequency bands.
(3) Distance refers to the distance in meters between the measuring instrument antenna and the closed point of any part of the device or system.
(4) The limits in this table are based on CFR 47 Part 15.205(a)(b) and Part 15.209 (a).
(5) The over 1GHz limit, FCC limit is used based on CFR 47 Part 15.35 (b) and Part 15.205(b) & Part 15.209(e) and Part 15.207(c).

3.4. Operating Condition of EUT

- 3.4.1. Set up the EUT (Radio Control) as shown on 3.2.
- 3.4.2. To turn on the power of all equipment.
- 3.4.3. The EUT was set the PC system using test program “Futaba Term”.
- 3.4.4. Transmit Mode: The EUT was set to continuously transmit signals at 2403.250MHz, 2425.000MHz and 2447.500MHz during testing.
- 3.4.5. Receive Mode: The EUT was set to continuously receive signals at 2425.000MHz during testing.

3.5. Test Procedure

The EUT and its simulators were placed on a turn table which was 0.8 meter above the ground. The turn table rotated 360 degrees to determine the position of the maximum emission level. EUT was set 3 meters away from the receiving antenna which was mounted on an antenna tower. The antenna could be moved up and down between 1 to 4 meters to find out the maximum emission level. Broadband antennas such as calibrated biconical and log-periodical antenna or horn antenna were used as a receiving antenna. Both horizontal and vertical polarization of the antenna were set on measurement. In order to find the maximum emission, all of the interface cables were manipulated according to FCC ANSI C63.4-2003 regulation.

The bandwidth of the R&S Test Receiver ESCS30 was set at 120kHz. (For 30MHz to 1000MHz)

The resolution bandwidth and video bandwidth of test spectrum analyzer is 1MHz for peak detection (PK) at frequency above 1GHz.

The resolution bandwidth of test spectrum analyzer is 1MHz and the video bandwidth is 10Hz for average detection (AV) at frequency above 1GHz.

The frequency range from 30MHz to 25GHz (Up to 10th harmonics from fundamental frequency) was checked.

Above 1GHz was measured with peak and average detector. For frequency from 10GHz to 25GHz, we checked it in 1 meter distance and with a shorter cable 2 meter instead of original's. There is no signal exist.

3.6. Radiated Emission Measurement Results

PASSED.

(All emissions not reported below are too low against the prescribed limits.)

EUT : Radio Control M/N : T2PSK2-2.4G

Test Date : Jun 04, 2012 Temperature : 24 Humidity : 54%

For Frequency Range 30MHz~1000MHz:

The EUT emitted the fundamental frequency with data code at the stand, side and lying conditions.

The EUT select **worst position “stand”** and with following test modes was performed during this section testing and all the test results are listed in section 3.6.1.

Mode	Channel	Frequency	Test Mode	Position	Reference Test Data	
					Horizontal	Vertical
1.	01	2403.250MHz	Transmit	Stand	# 2, #4	# 1, #3
2.	30	2425.000MHz		Stand	# 2, #4	# 1, #3
3.	60	2447.500MHz		Stand	# 2, #4	# 1, #3

Note 1: Above all final readings were measured with Peak detector.

Note 2: Pursuant to ANSI C63.4 8.3.1.2, when peak value complies with the average limit, we didn't perform measurement in average detector.

For Frequency above 1GHz:

The EUT select **worst position “stand ”** and with following test modes was performed during this section testing and all the test results are listed in section 3.6.2.

Mode	Chnnel	Frequency	Test Mode	Position	Test Frequency Range
1.	01	2403.250MHz	Transmit	Stand	1000-2680MHz*
2.					2680-4000MHz
3.					4000-5500MHz*
4.					5500-11000MHz
5.					11000-18000MHz
6.					18000-25000MHz
7.	30	2425.000MHz	Transmit	Stand	1000-2680MHz*
8.					2680-4000MHz
9.					4000-5500MHz*
10.					5500-11000MHz
11.					11000-18000MHz
12.					18000-25000MHz
13.	60	2447.500MHz	Transmit	Stand	1000-2680MHz*
14.					2680-4000MHz
15.					4000-5500MHz*
16.					5500-11000MHz
17.					11000-18000MHz
18.					18000-25000MHz

Remark 1 : The emissions level were too low against the official limit and not report.

Remark 2 : “*” means there is spurious emission falling the frequency band and be measures.

For Restricted Bands:

The EUT was tested in restricted bands and all the test results are listed in section 3.6.3. (The restricted bands defined in part 15.205(a))

Mode	Channel	Frequency	Test Mode	Reference Test Data	
				Horizontal	Vertical
1.	01	2403.250MHz	Transmit	# 2	#1
2.	60	2447.500MHz	Transmit	# 4	#3

3.6.1. Frequency Range 30-1000MHz

Frequency: 2403.250MHz

Site no. : A/C Chamber Data no. : 2
 Dis. / Ant. : 3m VBA6106A/UHALP9108A Ant. pol. : HORIZONTAL
 Limit : FCC PART-15C
 Env. / Ins. : E4446A 26°C/61% ☐jianlun Hung
 EUT : T2PSK2-2.4G
 Power Rating : DC6V
 Test Mode : TX2403.25

		Ant.	Cable	Emission			
Freq.	Factor	Loss	Reading	Level	Limits	Margin	Remark
(MHz)	(dB/m)	(dB)	(dB μ V)	(dB μ V/m)	(dB μ V/m)	(dB)	
1	144.480	20.31	2.60	9.53	32.44	43.50	11.06 Peak
2	150.690	20.63	2.60	12.71	35.93	43.50	7.57 Peak
3	168.780	20.99	2.80	11.19	34.98	43.50	8.52 Peak
4	193.080	21.66	3.00	12.31	36.96	43.50	6.54 Peak
5	209.280	21.81	3.16	12.41	37.37	43.50	6.13 Peak
6	289.740	26.08	3.80	7.36	37.24	46.00	8.76 Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

Site no. : A/C Chamber Data no. : 4
 Dis. / Ant. : 3m VBA6106A/UHALP9108A Ant. pol. : HORIZONTAL
 Limit : FCC PART-15C
 Env. / Ins. : E4446A 26°C/61% ☐jianlun Hung
 EUT : T2PSK2-2.4G
 Power Rating : DC6V
 Test Mode : TX2403.25

		Ant.	Cable	Emission			
Freq.	Factor	Loss	Reading	Level	Limits	Margin	Remark
(MHz)	(dB/m)	(dB)	(dB μ V)	(dB μ V/m)	(dB μ V/m)	(dB)	
1	360.900	16.24	4.43	14.66	35.33	46.00	10.67 Peak
2	400.800	17.66	4.80	12.87	35.33	46.00	10.67 Peak
3	792.800	23.95	6.90	5.61	36.46	46.00	9.54 Peak
4	938.400	25.31	7.50	6.54	39.35	46.00	6.65 Peak
5	974.800	26.52	7.70	3.98	38.20	54.00	15.80 Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

Site no. : A/C Chamber Data no. : 1
 Dis. / Ant. : 3m VBA6106A/UHALP9108A Ant. pol. : VERTICAL
 Limit : FCC PART-15C
 Env. / Ins. : E4446A 26°C/61% ☐jianlun_hung
 EUT : T2PSK2-2.4G
 Power Rating : DC6V
 Test Mode : TX2403.25

		Ant.	Cable	Emission			
Freq.	Factor	Loss	Reading	Level	Limits	Margin	Remark
(MHz)	(dB/m)	(dB)	(dB μ V)	(dB μ V/m)	(dB μ V/m)	(dB)	
1	51.330	15.96	1.50	20.06	37.52	40.00	2.48 Peak
2	112.890	18.36	2.26	18.29	38.92	43.50	4.58 Peak
3	144.480	20.31	2.60	8.75	31.66	43.50	11.84 Peak
4	209.280	21.81	3.16	10.60	35.56	43.50	7.94 Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

Site no. : A/C Chamber Data no. : 3
 Dis. / Ant. : 3m VBA6106A/UHALP9108A Ant. pol. : VERTICAL
 Limit : FCC PART-15C
 Env. / Ins. : E4446A 26°C/61% ☐jianlun_hung
 EUT : T2PSK2-2.4G
 Power Rating : DC6V
 Test Mode : TX2403.25

		Ant.	Cable	Emission			
Freq.	Factor	Loss	Reading	Level	Limits	Margin	Remark
(MHz)	(dB/m)	(dB)	(dB μ V)	(dB μ V/m)	(dB μ V/m)	(dB)	
1	336.400	15.08	4.20	10.17	29.46	46.00	16.54 Peak
2	360.900	16.24	4.43	8.42	29.09	46.00	16.91 Peak
3	399.400	17.69	4.80	11.67	34.15	46.00	11.85 Peak
4	558.300	19.89	6.70	6.00	32.58	46.00	13.42 Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

Frequency: 2425.000MHz

Site no. : A/C Chamber Data no. : 2
 Dis. / Ant. : 3m VBA6106A/UHALP9108A Ant. pol. : HORIZONTAL
 Limit : FCC PART-15C
 Env. / Ins. : E4446A 26°C/61% ☐jianlun_hung
 EUT : T2PSK2-2.4G
 Power Rating : DC6V
 Test Mode : TX2425

		Ant.	Cable	Emission				
Freq.	Factor	Loss	Reading	Level		Limits	Margin	Remark
(MHz)	(dB/m)	(dB)	(dB μ V)	(dB μ V/m)	(dB μ V/m)	(dB)		
1	93.990	16.37	2.00	7.87	26.24	43.50	17.26	Peak
2	144.480	20.31	2.60	8.24	31.15	43.50	12.35	Peak
3	168.780	20.99	2.80	10.58	34.37	43.50	9.13	Peak
4	193.080	21.66	3.00	9.55	34.20	43.50	9.30	Peak
5	209.280	21.81	3.16	10.23	35.19	43.50	8.31	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

Site no. : A/C Chamber Data no. : 4
 Dis. / Ant. : 3m VBA6106A/UHALP9108A Ant. pol. : HORIZONTAL
 Limit : FCC PART-15C
 Env. / Ins. : E4446A 26°C/61% ☐jianlun_hung
 EUT : T2PSK2-2.4G
 Power Rating : DC6V
 Test Mode : TX2425

		Ant.	Cable	Emission				
Freq.	Factor	Loss	Reading	Level		Limits	Margin	Remark
(MHz)	(dB/m)	(dB)	(dB μ V)	(dB μ V/m)	(dB μ V/m)	(dB)		
1	360.900	16.24	4.43	15.08	35.75	46.00	10.25	Peak
2	372.800	17.12	4.60	11.05	32.78	46.00	13.22	Peak
3	913.900	24.96	7.40	4.65	37.01	46.00	8.99	Peak
4	938.400	25.31	7.50	5.03	37.84	46.00	8.16	Peak
5	950.300	25.93	7.50	6.12	39.55	46.00	6.45	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

Site no. : A/C Chamber Data no. : 1
 Dis. / Ant. : 3m VBA6106A/UHALP9108A Ant. pol. : VERTICAL
 Limit : FCC PART-15C
 Env. / Ins. : E4446A 26°C/61% Objianlun Hung
 EUT : T2PSK2-2.4G
 Power Rating : DC6V
 Test Mode : TX2425

		Ant.	Cable	Emission			
	Freq.	Factor	Loss	Reading	Level	Limits	Margin Remark
	(MHz)	(dB/m)	(dB)	(dB μ V)	(dB μ V/m)	(dB μ V/m)	(dB)
1	48.090	17.32	1.40	12.61	31.33	40.00	8.67 Peak
2	96.690	16.75	2.05	13.88	32.68	43.50	10.82 Peak
3	144.480	20.31	2.60	8.80	31.71	43.50	11.79 Peak
4	180.390	21.31	2.90	7.57	31.78	43.50	11.72 Peak
5	209.280	21.81	3.16	4.22	29.18	43.50	14.32 Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

Site no. : A/C Chamber Data no. : 3
 Dis. / Ant. : 3m VBA6106A/UHALP9108A Ant. pol. : VERTICAL
 Limit : FCC PART-15C
 Env. / Ins. : E4446A 26°C/61% Objianlun Hung
 EUT : T2PSK2-2.4G
 Power Rating : DC6V
 Test Mode : TX2425

		Ant.	Cable	Emission			
	Freq.	Factor	Loss	Reading	Level	Limits	Margin Remark
	(MHz)	(dB/m)	(dB)	(dB μ V)	(dB μ V/m)	(dB μ V/m)	(dB)
1	360.900	16.24	4.43	4.92	25.59	46.00	20.41 Peak
2	554.800	19.46	6.80	2.61	28.87	46.00	17.13 Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

Frequency: 2447.500MHz

Site no. : A/C Chamber Data no. : 2
 Dis. / Ant. : 3m VBA6106A/UHALP9108A Ant. pol. : HORIZONTAL
 Limit : FCC PART-15C
 Env. / Ins. : E4446A 26°C/61% ☐jianlun_hung
 EUT : T2PSK2-2.4G
 Power Rating : DC6V
 Test Mode : TX2447.5

Freq. (MHz)	Ant. Cable		Emission				
	Factor (dB/m)	Loss (dB)	Reading (dB μ V)	Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Remark
1 93.990	16.37	2.00	9.91	28.28	43.50	15.22	Peak
2 144.480	20.31	2.60	6.73	29.64	43.50	13.86	Peak
3 156.630	20.70	2.70	5.77	29.17	43.50	14.33	Peak
4 168.780	20.99	2.80	8.71	32.50	43.50	11.00	Peak
5 193.080	21.66	3.00	9.36	34.01	43.50	9.49	Peak
6 209.280	21.81	3.16	8.90	33.86	43.50	9.64	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

Site no. : A/C Chamber Data no. : 4
 Dis. / Ant. : 3m VBA6106A/UHALP9108A Ant. pol. : HORIZONTAL
 Limit : FCC PART-15C
 Env. / Ins. : E4446A 26°C/61% ☐jianlun_hung
 EUT : T2PSK2-2.4G
 Power Rating : DC6V
 Test Mode : TX2447.5

Freq. (MHz)	Ant. Cable		Emission				
	Factor (dB/m)	Loss (dB)	Reading (dB μ V)	Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Remark
1 360.900	16.24	4.43	8.75	29.42	46.00	16.58	Peak
2 456.800	17.77	5.52	4.93	28.22	46.00	17.78	Peak
3 673.800	22.87	6.40	3.97	33.24	46.00	12.76	Peak
4 792.800	23.95	6.90	3.32	34.17	46.00	11.83	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

Site no. : A/C Chamber Data no. : 1
 Dis. / Ant. : 3m VBA6106A/UHALP9108A Ant. pol. : VERTICAL
 Limit : FCC PART-15C
 Env. / Ins. : E4446A 26°C/61% ☐jianlun Hung
 EUT : T2PSK2-2.4G
 Power Rating : DC6V
 Test Mode : TX2447.5

		Ant.	Cable	Emission			
Freq.	Factor	Loss	Reading	Level	Limits	Margin	Remark
(MHz)	(dB/m)	(dB)	(dB μ V)	(dB μ V/m)	(dB μ V/m)	(dB)	
1	48.090	17.32	1.40	12.27	30.99	40.00	9.01 Peak
2	72.390	12.42	1.80	6.43	20.65	40.00	19.35 Peak
3	96.690	16.75	2.05	13.76	32.56	43.50	10.94 Peak
4	210.090	21.77	3.20	9.67	34.64	43.50	8.86 Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

Site no. : A/C Chamber Data no. : 3
 Dis. / Ant. : 3m VBA6106A/UHALP9108A Ant. pol. : VERTICAL
 Limit : FCC PART-15C
 Env. / Ins. : E4446A 26°C/61% ☐jianlun Hung
 EUT : T2PSK2-2.4G
 Power Rating : DC6V
 Test Mode : TX2447.5

		Ant.	Cable	Emission			
Freq.	Factor	Loss	Reading	Level	Limits	Margin	Remark
(MHz)	(dB/m)	(dB)	(dB μ V)	(dB μ V/m)	(dB μ V/m)	(dB)	
1	336.400	15.08	4.20	8.63	27.92	46.00	18.08 Peak
2	360.900	16.24	4.43	5.17	25.84	46.00	20.16 Peak
3	400.800	17.66	4.80	7.36	29.82	46.00	16.18 Peak
4	558.300	19.89	6.70	3.29	29.87	46.00	16.13 Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

3.6.2. Above 1GHz Frequency Range Measurement Results

Date of Test : Sep. 27, 2012 Temperature : 26EUT : Radio Control Humidity : 61%Test Mode : Transmitting Mode, Frequency: 2403.250MHz

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading Horizontal (dB μ V)	Emission Level Horizontal (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)
1196.560	24.88	4.58	18.55	48.01	74.00	25.99
2254.960	28.17	6.17	19.93	54.27	74.00	19.73
4808.500	33.06	9.14	8.98	51.18	74.00	22.82

Remarks: 1. Emission level=Antenna Factor + Cable Loss + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

Emission Frequency (MHz)	Peak Value (dB/m)	Duty Cycle Correction Factor (dB)	Average Value Horizontal (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
1196.56	48.01	-30.37	17.64	54.00	36.36
2254.96	54.27	-30.37	23.90	54.00	30.10
4808.50	51.18	-30.37	20.81	54.00	33.19

Remarks: 1. Duty Cycle Correction Factor = $20\log(Dwell\ time/100ms) = 20\log(3.030ms/100ms) = -30.37$
 2. Average value=Peak value+ Duty Cycle Correction Factor

Date of Test : Sep. 27, 2012 Temperature : 26

EUT : Radio Control Humidity : 61%

Test Mode : Transmitting Mode, Frequency: 2403.250MHz

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading Vertical (dB μ V)	Emission Level Vertical (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)
1196.560	24.88	4.58	19.52	48.98	74.00	25.02
1594.720	26.08	6.12	25.21	57.42	74.00	16.58
1994.560	27.60	5.91	14.41	47.92	74.00	26.08
2254.960	28.17	6.17	13.33	47.67	74.00	26.33
4808.500	33.06	9.14	14.22	56.42	74.00	17.58

Remarks: 1. Emission level=Antenna Factor + Cable Loss + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

Emission Frequency (MHz)	Peak Value (dB/m)	Duty Cycle Correction Factor	Average Value Vertical (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
1196.56	48.98	-30.37	18.61	54.00	35.39
1594.72	57.42	-30.37	27.05	54.00	26.95
1994.56	47.92	-30.37	17.55	54.00	36.45
2254.96	47.67	-30.37	17.30	54.00	36.70
4808.50	56.42	-30.37	26.05	54.00	27.95

Remarks: 1. Duty Cycle Correction Factor = $20\log(\text{Dwell time}/100\text{ms}) = 20\log(3.030\text{ms}/100\text{ms}) = -30.37$
 2. Average value=Peak value+ Duty Cycle Correction Factor

Date of Test : Sep. 27, 2012 Temperature : 26

EUT : Radio Control Humidity : 61%

Test Mode : Transmitting Mode, Frequency: 2425.000MHz

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading Horizontal (dB μ V)	Emission Level Horizontal (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)
1196.560	24.88	4.58	18.67	48.13	74.00	25.87
1599.760	26.08	6.14	16.48	48.69	74.00	25.31
2221.360	28.09	6.13	14.06	48.28	74.00	25.72
2275.120	28.21	6.19	15.33	49.73	74.00	24.27

Remarks: 1. Emission level=Antenna Factor + Cable Loss + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

Emission Frequency (MHz)	Peak Value (dB/m)	Duty Cycle Correction Factor (dB)	Average Value Horizontal (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
1196.56	48.13	-30.37	17.76	54.00	36.24
1599.76	48.69	-30.37	18.32	54.00	35.68
2221.36	48.28	-30.37	17.91	54.00	36.09
2275.12	49.73	-30.37	19.36	54.00	34.64

Remarks: 1. Duty Cycle Correction Factor = $20\log(Dwell\ time/100ms) = 20\log(3.030ms/100ms) = -30.37$
 2. Average value=Peak value+ Duty Cycle Correction Factor

Date of Test : Sep. 27, 2012 Temperature : 26

EUT : Radio Control Humidity : 61%

Test Mode : Transmitting Mode, Frequency: 2425.000MHz

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading Vertical (dB μ V)	Emission Level Vertical (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)
1191.520	24.83	4.56	19.56	48.95	74.00	25.05
1314.160	25.17	4.88	19.92	49.97	74.00	24.03
1594.720	26.08	6.12	23.53	55.74	74.00	18.26
2002.960	27.60	5.86	13.05	46.51	74.00	27.49
4853.500	33.15	9.15	14.62	56.92	74.00	17.08

Remarks: 1. Emission level=Antenna Factor + Cable Loss + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

Emission Frequency (MHz)	Peak Value (dB/m)	Duty Cycle Correction Factor (dB)	Average Value Vertical (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
1191.52	48.95	-30.37	18.58	54.00	35.42
1314.16	49.97	-30.37	19.60	54.00	34.40
1594.72	55.74	-30.37	25.37	54.00	28.63
2002.96	46.51	-30.37	16.14	54.00	37.86
4853.50	56.92	-30.37	26.55	54.00	27.45

Remarks: 1. Duty Cycle Correction Factor = $20\log(Dwell\ time/100ms) = 20\log(3.030ms/100ms) = -30.37$
 2. Average value=Peak value+ Duty Cycle Correction Factor

Date of Test : Sep. 27, 2012 Temperature : 26

EUT : Radio Control Humidity : 61%

Test Mode : Transmitting Mode, Frequency: 2447.500MHz

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading Horizontal (dB μ V)	Emission Level Horizontal (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)
1196.560	24.88	4.58	19.11	48.57	74.00	25.43
1599.760	26.08	6.14	14.39	46.60	74.00	27.40
1997.920	27.60	5.89	11.34	44.83	74.00	29.17
2296.960	28.24	6.23	21.95	56.42	74.00	17.58
4898.500	33.21	9.16	11.20	53.58	74.00	20.42

Remarks: 1. Emission level=Antenna Factor + Cable Loss + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

Emission Frequency (MHz)	Peak Value (dB/m)	Duty Cycle Correction Factor (dB)	Average Value Horizontal (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
1196.56	48.57	-30.37	18.20	54.00	35.80
1599.76	46.60	-30.37	16.23	54.00	37.77
1997.92	44.83	-30.37	14.46	54.00	39.54
2296.96	56.42	-30.37	26.05	54.00	27.95
4898.50	53.58	-30.37	23.21	54.00	30.79

Remarks: 1. Duty Cycle Correction Factor = $20\log(Dwell\ time/100ms) = 20\log(3.030ms/100ms) = -30.37$
 2. Average value=Peak value+ Duty Cycle Correction Factor

Date of Test : Sep. 27, 2012 Temperature : 26

EUT : Radio Control Humidity : 61%

Test Mode : Transmitting Mode, Frequency: 2447.500MHz

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading Vertical (dB μ V)	Emission Level Vertical (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)
1196.560	24.88	4.58	20.80	50.26	74.00	23.74
1594.720	26.08	6.12	18.89	51.10	74.00	22.90
1994.560	27.60	5.91	13.47	46.98	74.00	27.02
2296.960	28.24	6.23	16.48	50.95	74.00	23.05
4898.500	33.21	9.16	14.73	57.11	74.00	16.89

Remarks: 1. Emission level=Antenna Factor + Cable Loss + Reading.
2. The emission levels that are 20dB below the official limit are not reported.

Emission Frequency (MHz)	Peak Value (dB/m)	Duty Cycle Correction Factor (dB)	Average Value Vertical (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
1196.56	50.26	-30.37	19.89	54.00	34.11
1594.72	51.10	-30.37	20.73	54.00	33.27
1994.56	46.98	-30.37	16.61	54.00	37.39
2296.96	50.95	-30.37	20.58	54.00	33.42
4898.50	57.11	-30.37	26.74	54.00	27.26

Remarks: 1. Duty Cycle Correction Factor = $20\log(Dwell\ time/100ms) = 20\log(3.030ms/100ms) = -30.37$
2. Average value=Peak value+ Duty Cycle Correction Factor

3.6.3. Restricted Bands Measurement Results


Date of Test : Sep. 27, 2012 Temperature : 26

EUT : Radio Control Humidity : 61%

Test Mode : Transmit, Channel: 01, Frequency: 2403.250MHz



AUDIX TECHNOLOGY Corp. EMC Laboratory
No.53-11, Tin-fu Tsun, Lin-kou Hsiang, Taipei
County, Taiwan R.O.C. Post Code:24443
Tel:+886-2-26092133 Fax:+886-2-26099303
Email:temc@temc.com.tw

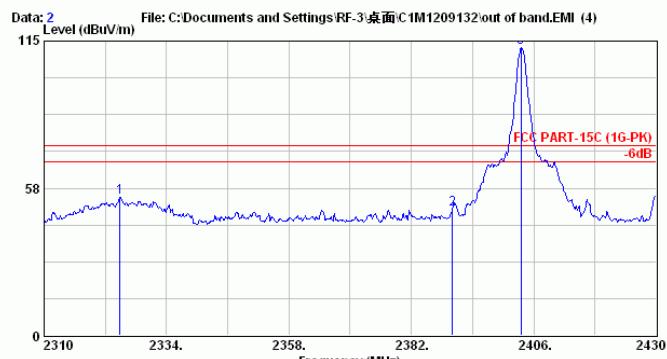

Site no. : A/C Chamber	Data no. : 2
Dis. / Ant. : 3m 3115(4927)	Ant. pol. : HORIZONTAL
Limit : FCC PART-15C (1G-PK)	
Env. / Ins. : E4446A 26°C/61%	Djianlun Hung
BUT : T2PSK2-2.4G	
Power Rating : DC6V	
Test Mode : TX2403.25	

Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Emission Reading (dB μ V)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Remark
1 2324.880	28.32	6.26	19.52	54.10	74.00	19.90	Peak
2 2390.040	28.47	6.34	14.58	49.40	74.00	24.60	Peak
3 2403.480	28.51	6.36	77.41	112.28	74.00	-38.28	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
2. The emission levels that are 20dB below the official limit are not reported.

Emission Frequency (MHz)	Peak Value (dB/m)	Duty Cycle Correction Factor	Average Value Vertical (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
2324.88	54.10	-30.37	23.73	54.00	30.27
2390.04	49.40	-30.37	19.03	54.00	34.97

Remarks: 1. Duty Cycle Correction Factor = $20\log(Dwell\ time/100ms) = 20\log(3.030ms/100ms) = -30.37$
2. Average value=Peak value+ Duty Cycle Correction Factor


Date of Test : Sep. 27, 2012 Temperature : 26

EUT : Radio Control Humidity : 61%

Test Mode : Transmit, Channel: 01, Frequency: 2403.250MHz



AUDIX TECHNOLOGY Corp. EMC Laboratory
No.33-11, Tin-fu Tsun, Lin-kou Hsiang, Taipei
County, Taiwan R.O.C. Post Code:24443
Tel:+886-2-26092133 Fax:+886-2-26099303
Email:ttmc@ttmc.com.tw

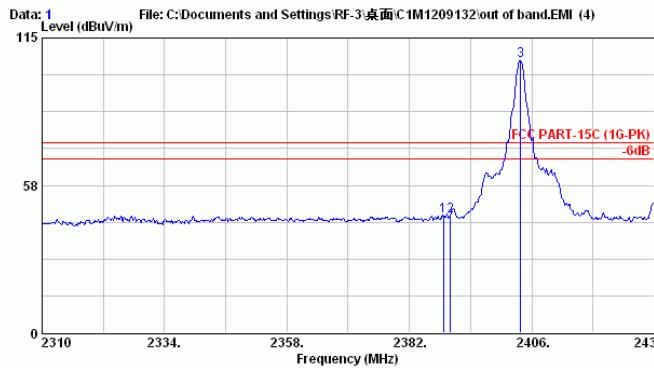

Site no. : A/C Chamber Data no. : 1
Dis. / Ant. : 3m 3115(4927) Ant. pol. : VERTICAL
Limit : FCC PART-15C (1G-PK)
Env. / Ins. : E4446A 26°C/61% □jianlun Hung
BUT : T2PSK2-2.4G
Power Rating : DC6V
Test Mode : TX2403.25

Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dB μ V)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Remark
1 2388.720	28.47	6.34	10.67	45.48	74.00	28.52	Peak
2 2390.040	28.47	6.34	10.85	45.67	74.00	28.33	Peak
3 2403.840	28.51	6.36	71.31	106.18	74.00	-32.18	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
2. The emission levels that are 20dB below the official limit are not reported.

Emission Frequency (MHz)	Peak Value (dB/m)	Duty Cycle Correction Factor	Average Value Vertical (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
2388.72	45.48	-30.37	15.11	54.00	38.89
2390.04	45.67	-30.37	15.30	54.00	38.70

Remarks: 1. Duty Cycle Correction Factor = $20\log(Dwell\ time/100ms) = 20\log(3.030ms/100ms) = -30.37$
2. Average value=Peak value+ Duty Cycle Correction Factor


Date of Test : Sep. 27, 2012 Temperature : 26

EUT : Radio Control Humidity : 61%

Test Mode : Transmit, Channel: 60, Frequency: 2447.500MHz



AUDIX TECHNOLOGY Corp. EMC Laboratory
No.53-11, Tin-fu Tsun, Lin-kou Hsiang, Taipei
County, Taiwan R.O.C. Post Code 24443
Tel:+886-2-26092133 Fax:+886-2-26099303
Email:itemc@itemc.com.tw

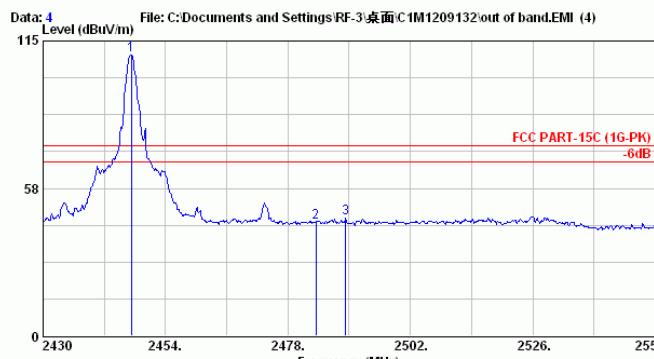

Site no. : A/C Chamber Data no. : 4
Dis. / Ant. : 3m 3115(4927) Ant. pol. : HORIZONTAL
Limit : FCC PART-15C (1G-PK)
Env. / Ins. : E4446A 26°C/61% Objianlun Hung
BUT : T2PSK2-2.4G
Power Rating : DC6V
Test Mode : TX2447.5

Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Emission Reading (dB μ V)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Remark
1 2447.280	28.59	6.41	74.43	109.42	74.00	-35.42	Peak
2 2483.520	28.66	6.45	9.31	44.43	74.00	29.57	Peak
3 2489.280	28.66	6.45	10.57	45.72	74.00	28.28	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
2. The emission levels that are 20dB below the official limit are not reported.

Emission Frequency (MHz)	Peak Value (dB/m)	Duty Cycle Correction Factor	Average Value Vertical (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
2483.52	44.43	-30.37	14.06	54.00	39.94
2489.28	45.72	-30.37	15.35	54.00	38.65

Remarks: 1. Duty Cycle Correction Factor = $20\log(Dwell\ time/100ms) = 20\log(3.030ms/100ms) = -30.37$
2. Average value=Peak value+ Duty Cycle Correction Factor


Date of Test : Sep. 27, 2012 Temperature : 26

EUT : Radio Control Humidity : 61%

Test Mode : Transmit, Channel: 60, Frequency: 2447.500MHz



AUDIX TECHNOLOGY Corp. EMC Laboratory
No.53-11, Tin-fu Tsun, Lin-kou Hsiang, Taipei
County, Taiwan R.O.C. Post Code:24443
Tel:+886-2-26092133 Fax:+886-2-26099303
Email:ttmc@ttmc.com.tw

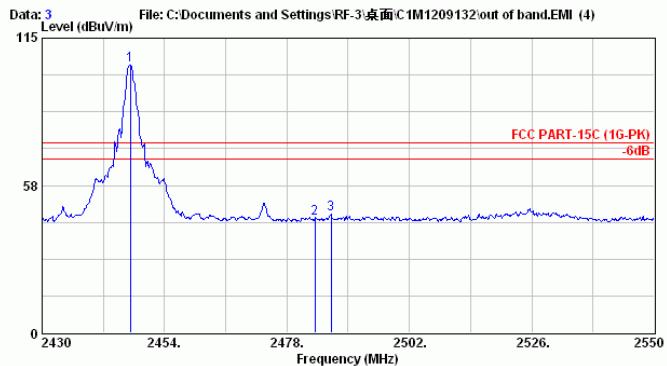

Site no. : A/C Chamber Data no. : 3
Dis. / Ant. : 3m 3115(4927) Ant. pol. : VERTICAL
Limit : FCC PART-15C (1G-PK)
Env. / Ins. : E4446A 26°C/61% Objianlun Hung
BUT : T2PSK2-2.4G
Power Rating : DC6V
Test Mode : TX2447.5

Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Emission Reading (dB μ V)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Remark
1 2447.280	28.59	6.41	69.45	104.44	74.00	-30.44	Peak
2 2483.520	28.66	6.45	9.49	44.60	74.00	29.40	Peak
3 2486.640	28.66	6.45	11.28	46.40	74.00	27.60	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
2. The emission levels that are 20dB below the official limit are not reported.

Emission Frequency (MHz)	Peak Value (dB/m)	Duty Cycle Correction Factor	Average Value Vertical (dB)	Limit (dB μ V/m)	Margin (dB)
2483.52	44.60	-30.37	14.23	54.00	39.77
2486.64	46.40	-30.37	16.03	54.00	37.97

Remarks: 1. Duty Cycle Correction Factor = $20\log(Dwell\ time/100ms) = 20\log(3.030ms/100ms) = -30.37$
2. Average value=Peak value+ Duty Cycle Correction Factor


4. 20dB BANDWIDTH MEASUREMENT

4.1. Test Equipment

The following test equipment was used during the 20dB bandwidth measurement:

Item	Type	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
1.	Spectrum Analyzer	Agilent	N9030A-544	US51350140	Oct. 14, 11'	Oct. 13, 12'
2.	DC Power Supply	TOP WARD	3303A	721773	N/A	N/a

4.2. Block Diagram of Test Setup

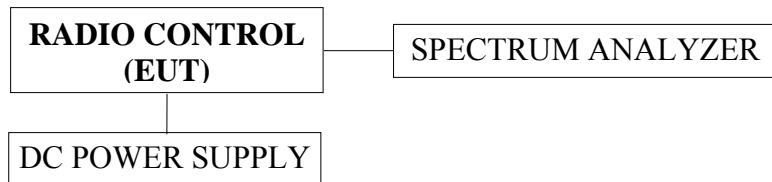

4.3. Specification Limits (§15.247(a)(1))

Alternatively, frequency hopping systems operating in the 2400-2483.5MHz band may have hopping channel carrier frequencies that are separated by 25kHz or two-thirds of the 20dB bandwidth of the hopping channel, whichever is greater.

4.4. Operating Condition of EUT

- 4.4.1. Set up the EUT and simulator as shown on 4.2.
- 4.4.2. To turn on the power of all equipment.
- 4.4.3. EUT (Radio Control) was on transmitting frequency function during the testing.

4.5. Test Procedure (DA 00-705)

The transmitter output was connected to the spectrum analyzer. The bandwidth of the fundamental frequency was measure by spectrum analyzer with 3kHz RBW and 3kHz VBW. The 20dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 20dB.

RBW=1% of the 20dB bandwidth

VBW=RBW

4.6. Test Results


PASSED. All the test results are attached in next pages.

Test Date : Sep. 27, 2012 Temperature :26 Humidity : 63%


No.	Channel	Test Frequency	20dB Bandwidth	2/3 (20dB Bandwidth)
1.	01	2403.250MHz	279.0kHz	186.0kHz
2.	30	2425.000MHz	276.0kHz	184.0kHz
3.	60	2447.500MHz	276.0kHz	184.0kHz

The maximum two-thirds of the 20dB bandwidth shall be at maximum 182.0kHz.

4.6.1. Channel 01, Frequency: 2403.250MHz

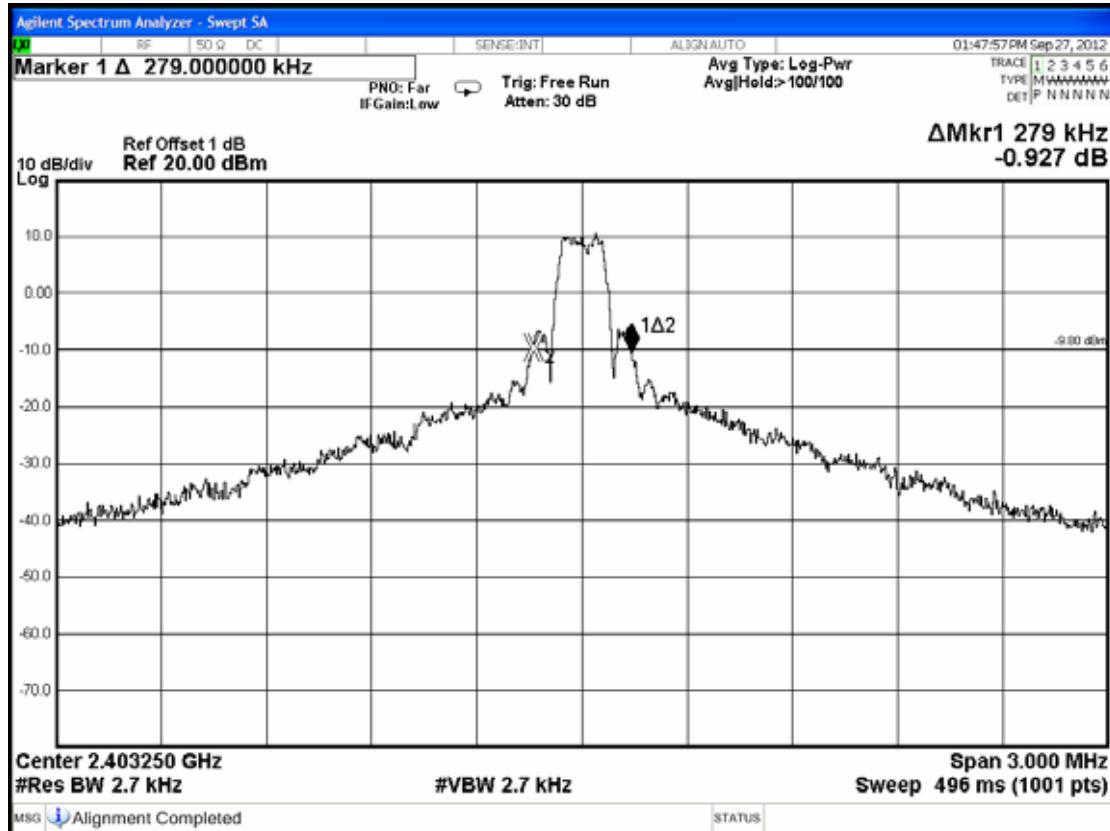

4.6.2. Channel 30, Frequency: 2425.000MHz

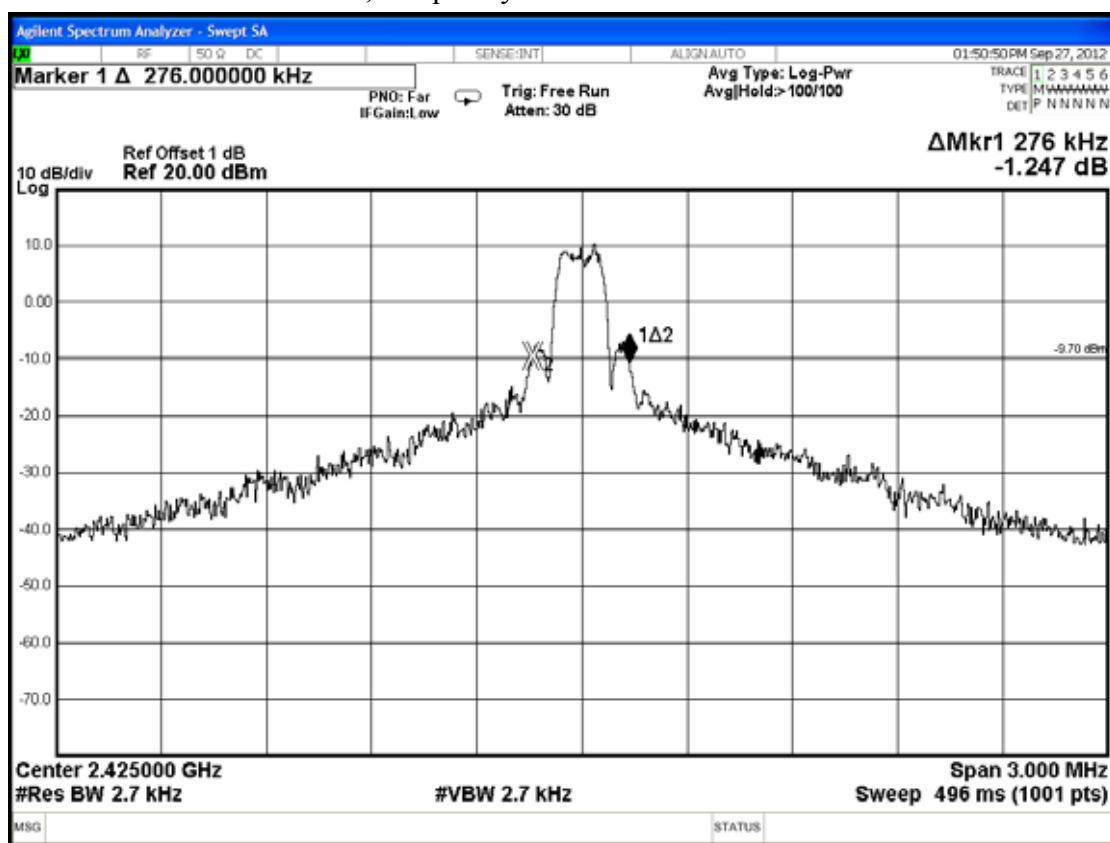

4.6.3. Channel 60, Frequency: 2447.500MHz



5. CARRIER FREQUENCY SEPARATION MEASUREMENT

5.1. Test Equipment

The following test equipment was used during the carrier frequency separation measurement:

Item	Type	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
1.	Spectrum Analyzer	Agilent	N9030A-544	US51350140	Oct. 14, 11'	Oct. 13, 12'
2.	DC Power Supply	TOP WARD	3303A	721773	N/A	N/a

5.2. Block Diagram of Test Setup

The same as section 4.2.

5.3. Specification Limits (§15.247(a)(1))

Alternatively, frequency hopping systems operating in the 2400-2483.5MHz band may have hopping channel carrier frequencies that are separated by 25kHz or two-thirds of the 20dB bandwidth of the hopping channel, whichever is greater.

5.4. Operating Condition of EUT

Same as carrier frequency separation measurement which was listed in section 4.4.

5.5. Test Procedure (DA 00-705)

The transmitter output was connected to the spectrum analyzer. The channel separation was measured by spectrum analyzer with 39kHz RBW and 39kHz VBW. The video bandwidth not to be smaller than resolution bandwidth, the peak was marked on adjacent bandwidth, the between of peak is carrier frequency separation.

RBW=1% Span

VBW=RBW

5.6. Test Results



PASSED. All the test results are attached in next pages.

Test Date : Sep. 27, 2012 Temperature :26 Humidity : 63%

The minimum adjacent channel carrier frequency separation: 752kHz.

[Above values have met the requirement as specified in section 4.3: frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater.]

5.6.1. Channel 30, Test Frequency: 2425.000MHz

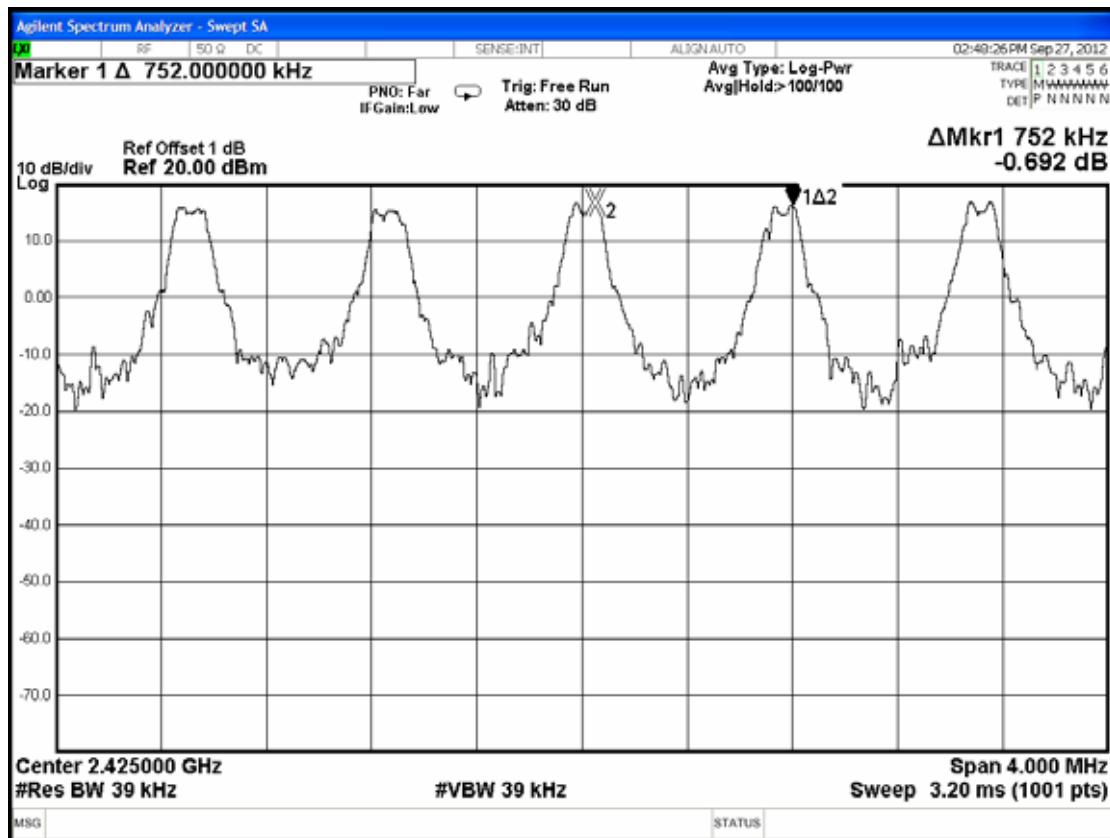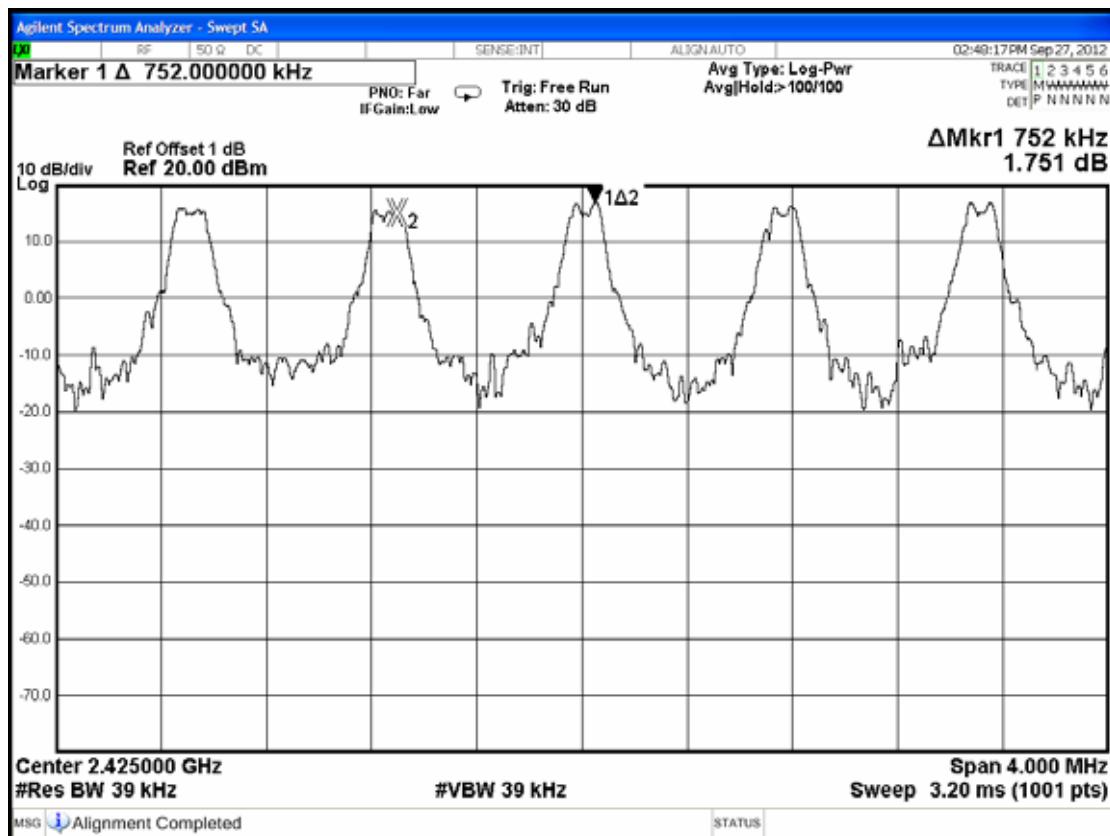

6. TIME OF OCCUPANCY MEASUREMENT

6.1. Test Equipment

The following test equipment was used during the time of occupancy measurement:

Item	Type	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
1.	Spectrum Analyzer	Agilent	N9030A-544	US51350140	Oct. 14, 11'	Oct. 13, 12'
2.	DC Power Supply	TOP WARD	3303A	721773	N/A	N/a

6.2. Block Diagram of Test Setup

The same as section 4.2.

6.3. Specification Limits (§15.247(a)(1)(iii))

Frequency hopping systems in the 2400-2483.5MHz shall use at least 15 non-overlapping channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by number of hopping channels employed.

6.4. Operating Condition of EUT

Same as carrier frequency separation measurement which was listed in section 4.4.

6.5. Test Procedure (DA 00-705)

The transmitter output was connected to the spectrum analyzer. The bandwidth of the fundamental frequency was measured by spectrum analyzer with 1MHz RBW and 1MHz VBW. $VBW \geq RBW$; Span=zero span.

Centered on a hopping channel sweep=as necessary to capture the entire dwell time per hopping channel; Detector function=peak; Trace=Max hold

6.6. Test Results

PASSED. All the test results are attached in next pages.

Test Date : Sep. 27, 2012 Temperature : 26 Humidity : 63%



Duty cycle: 60 channels * 0.4 seconds = 24 seconds

Test Frequency: 2425.000MHz

For every second of 5 channels appearance, the longest time of occupancy for each of 24 seconds is:

5 channels * 24 seconds * 3.02ms = 362.4ms (<400ms)

6.6.1. Channel 30, Test Frequency: 2425.000MHz

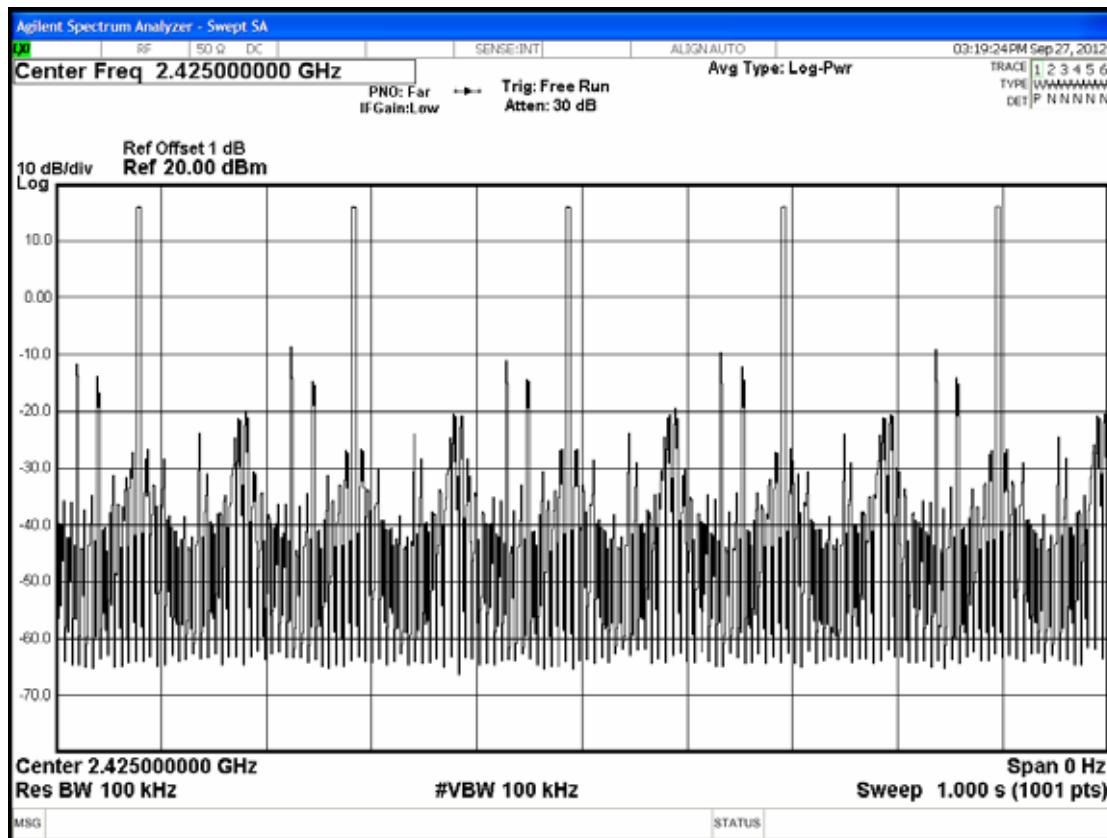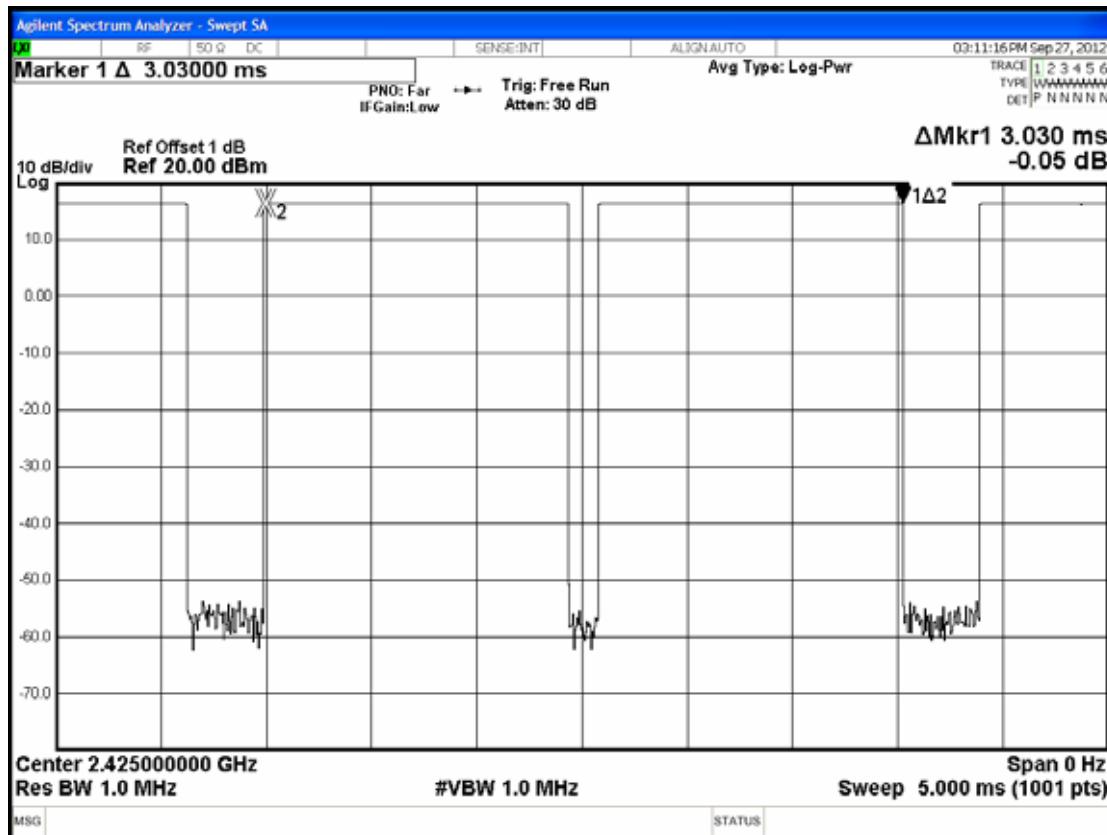

7. NUMBER OF HOPPING CHANNELS MEASUREMENT

7.1. Test Equipment

The following test equipment was used during the number of hopping channels measurement:

Item	Type	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
1.	Spectrum Analyzer	Agilent	N9030A-544	US51350140	Oct. 14, 11'	Oct. 13, 12'
2.	DC Power Supply	TOP WARD	3303A	721773	N/A	N/a

7.2. Block Diagram of Test Setup

The same as section 4.2.

7.3. Specification Limits (§15.247(a)(1)(iii))

Frequency hopping systems which use fewer than 20 hopping frequencies may employ intelligent hopping techniques to avoid interference to other transmissions. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 non-overlapping channels.

7.4. Operating Condition of EUT

Same as carrier frequency separation measurement which was listed in section 4.4.

7.5. Test Procedure (DA 00-705)


The transmitter output was connected to the spectrum analyzer. The bandwidth of the fundamental frequency was measured by spectrum analyzer with 100kHz RBW and 100kHz VBW. Sweep = Auto ; Detector function = peak ; Trace = Max hold

7.6. Test Results

PASSED. All the test results are attached in next page.

Test Date : Sep. 27, 2012 Temperature : 26 Humidity : 63%

The number hopping channel is 60.

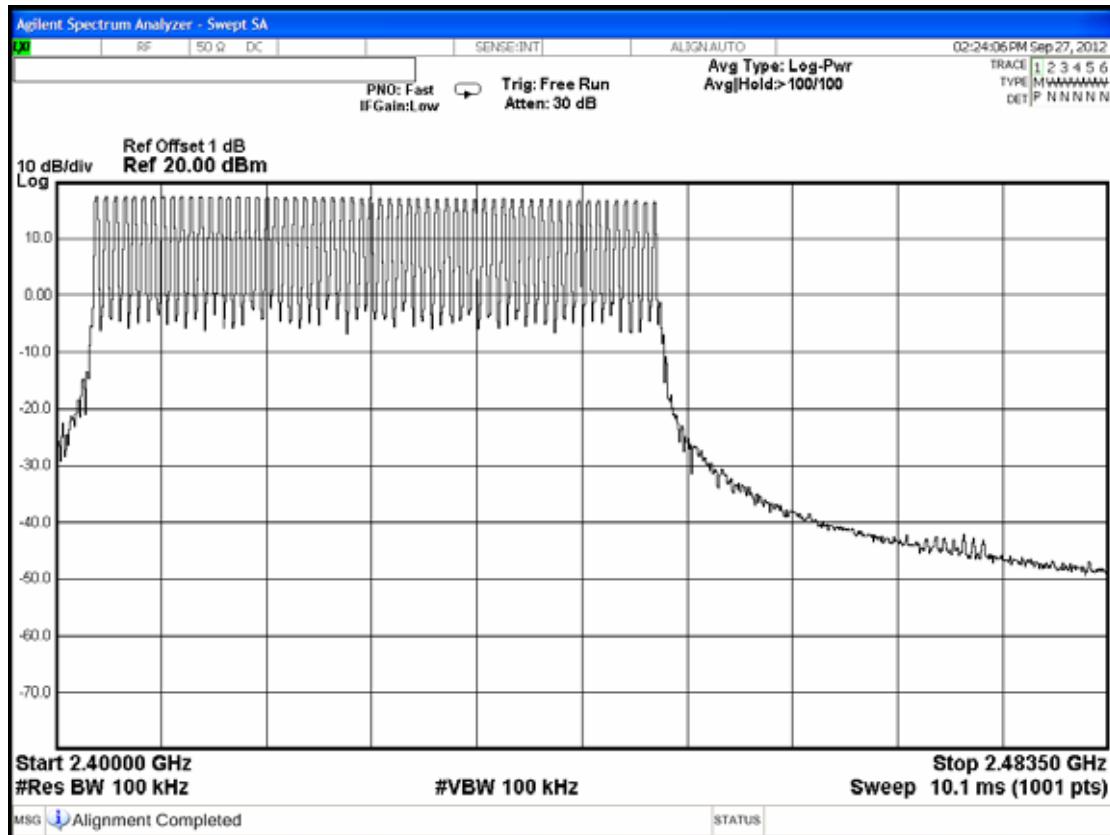

8. MAXIMUM PEAK OUTPUT POWER MEASUREMENT

8.1. Test Equipment

The following test equipment was used during the maximum peak output power measurement:

Item	Type	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
1.	Spectrum Analyzer	Agilent	N9030A-544	US51350140	Oct. 14, 11'	Oct. 13, 12'
2.	DC Power Supply	TOP WARD	3303A	721773	N/A	N/a

8.2. Block Diagram of Test Setup

The same as section 4.2.

8.3. Specification Limits (§15.247(b)-(1))

The Limits of maximum Peak Output Power for frequency hopping systems in 2400-2483.5MHz is: 0.125Watt. (21dBm)

8.4. Operating Condition of EUT

Same as carrier frequency separation measurement which was listed in 4.4 except the test set up replaced by section 8.2.

8.5. Test Procedure (DA 00-705)

The transmitter output was connected to the spectrum analyzer. The bandwidth of the fundamental frequency was measure by spectrum analyzer with RBW>EBW, VBM 3*RBW and 13MHz VBW. Sweep=Auto ; Detector function=peak ; Trace=Max hold


8.6. Test Results

PASSED. All the test results are listed below.


Test Date : Sep. 27, 2012 Temperature :26 Humidity : 63%

No.	Channel	Test Frequency	Peak Output Power	Limit
1.	01	2403.250MHz	16.787dBm	21dBm
2.	30	2425.000MHz	16.453dBm	21dBm
3.	60	2447.500MHz	15.869dBm	21dBm


8.6.1. Channel 01, Frequency: 2403.250MHz

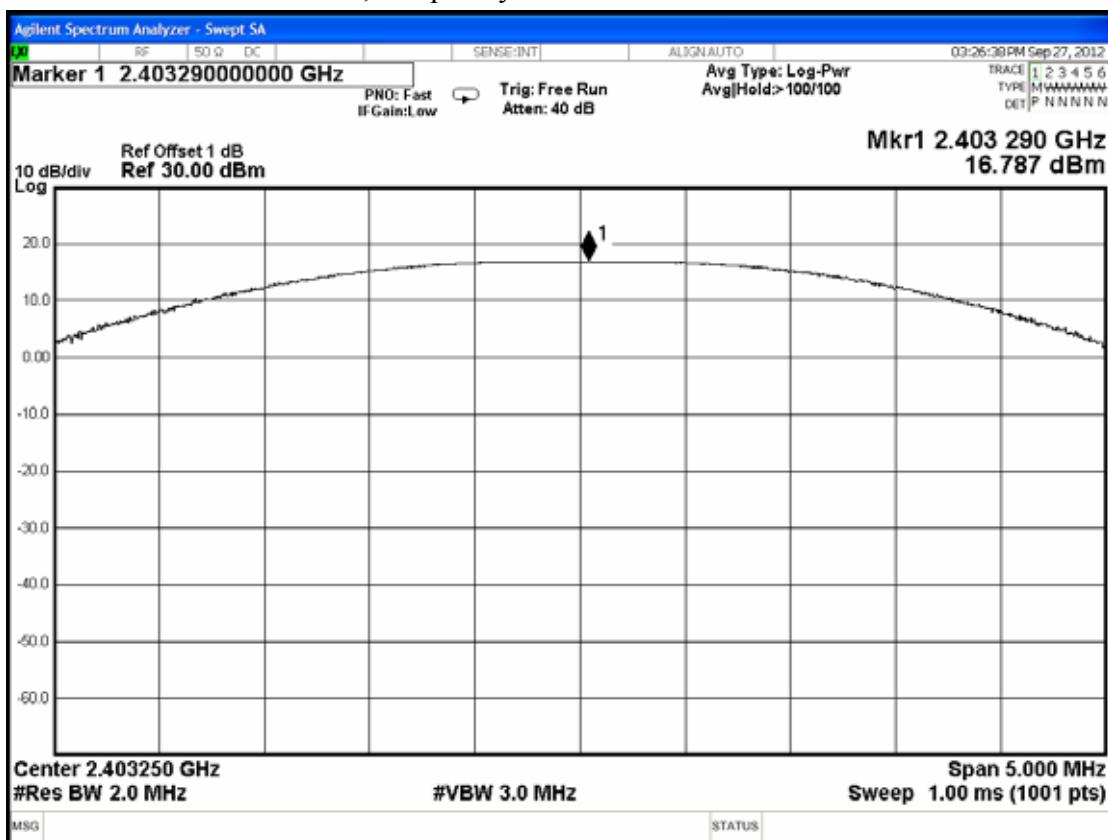

8.6.2. Channel 30, Frequency: 2425.000MHz

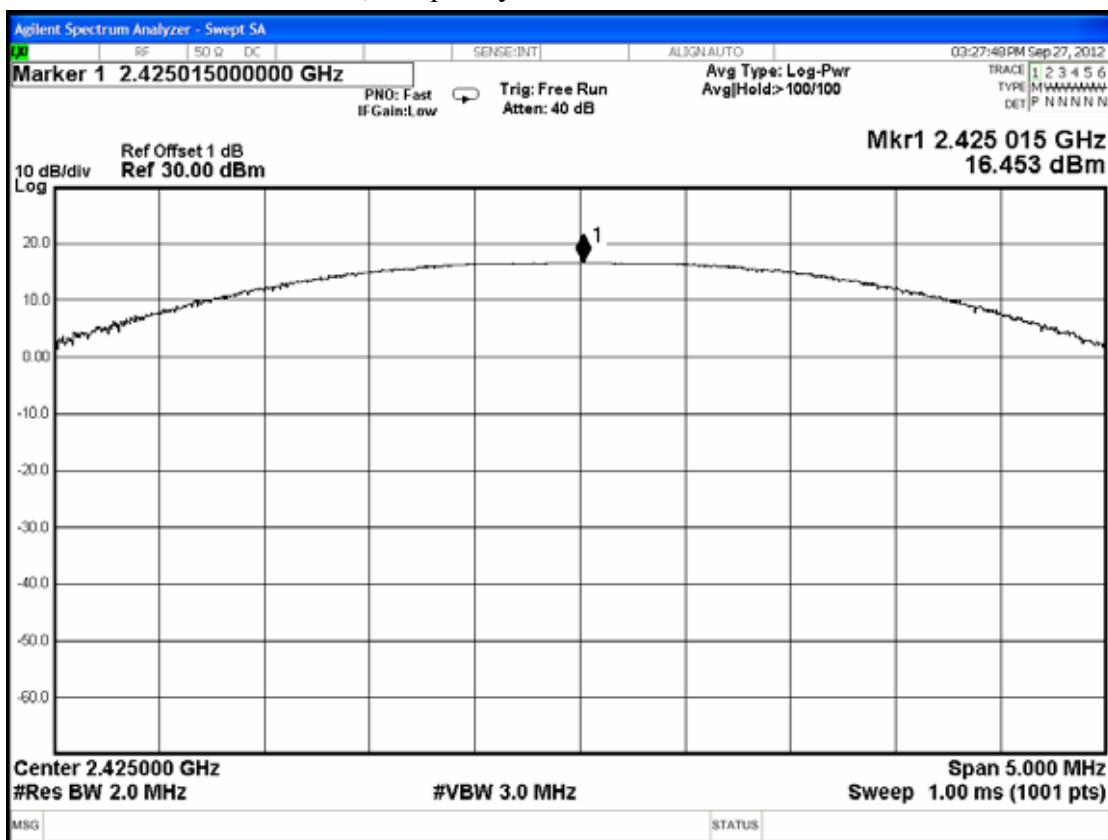

8.6.3. Channel 60, Frequency: 2447.500MHz

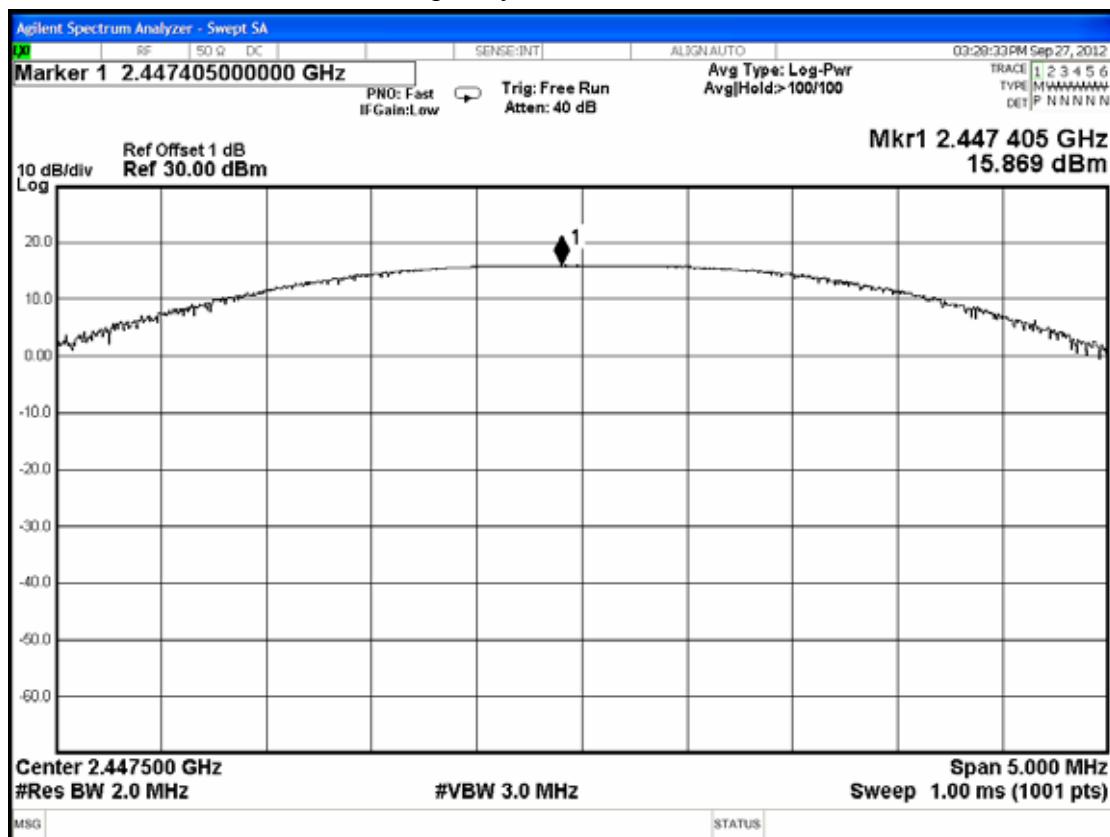

9. EMISSION LIMITATIONS MEASUREMENT

Emission level is below limits specified in 15.209, thus conducted emission is not need.

10.BAND EDGES MEASUREMENT

10.1.Test Equipment

The following test equipment was used during the band edges measurement:

Item	Type	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
1.	Spectrum Analyzer	Agilent	N9030A-544	US51350140	Oct. 14, 11'	Oct. 13, 12'
2.	DC Power Supply	TOP WARD	3303A	721773	N/A	N/a

10.2.Block Diagram of Test Setup

The same as section.4.2.

10.3.Specification Limits (§15.247(c))

In any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (See Section 15.205(c)). (This test result attaching to §3.6.3)

10.4.Operating Condition of EUT

Same as carrier frequency separation measurement which was listed in section 4.4.

10.5.Test Procedure (DA 00-705)

The transmitter output was connected to the spectrum analyzer. Set both RBW and VBW of spectrum analyzer to 100kHz with suitable frequency span including 100kHz bandwidth from band edge.

10.6.Test Results

PASSED. The testing data was attached in the next pages.


Test Date : Sep. 27, 2012 Temperature :26 Hum idity : 63%

1. Below Band edge : The highest emission level is -31.315dBm on 2.39990GHz.
2. Upper Band edge: The highest emission level is -58.266dBm on 2.4831GHz.

10.6.1. Below Band edge



10.6.2. Upper Band edge

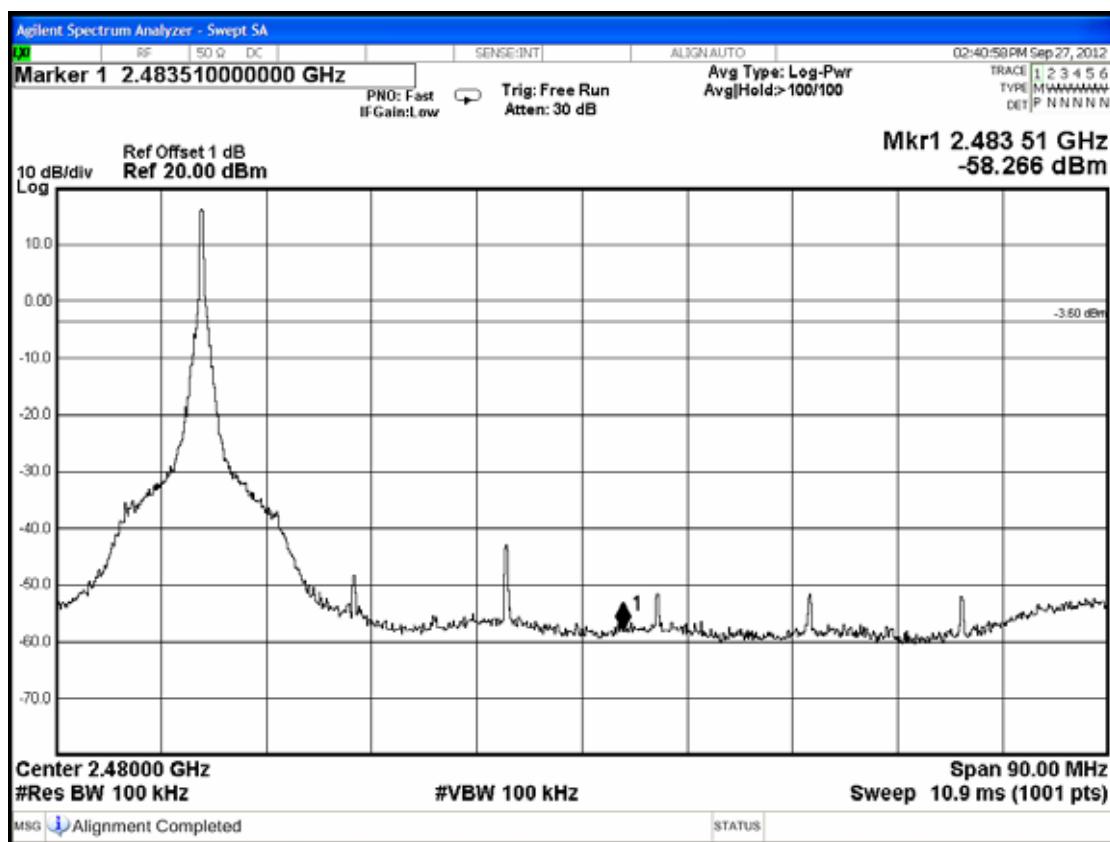

11. DEVIATION TO TEST SPECIFICATIONS

【NONE】

12.PHOTOGRAPHS

12.1.Photos of Radiated Measurement at Semi-Anechoic Chamber

12.1.1.Frequency Range 30MHz~1GHz, Stand




12.1.2.Frequency Range 30MHz~1GHz, Side



12.1.3.Frequency Range 30MHz~1GHz, Lie



12.1.4.Frequency Range Above 1GHz, Stand

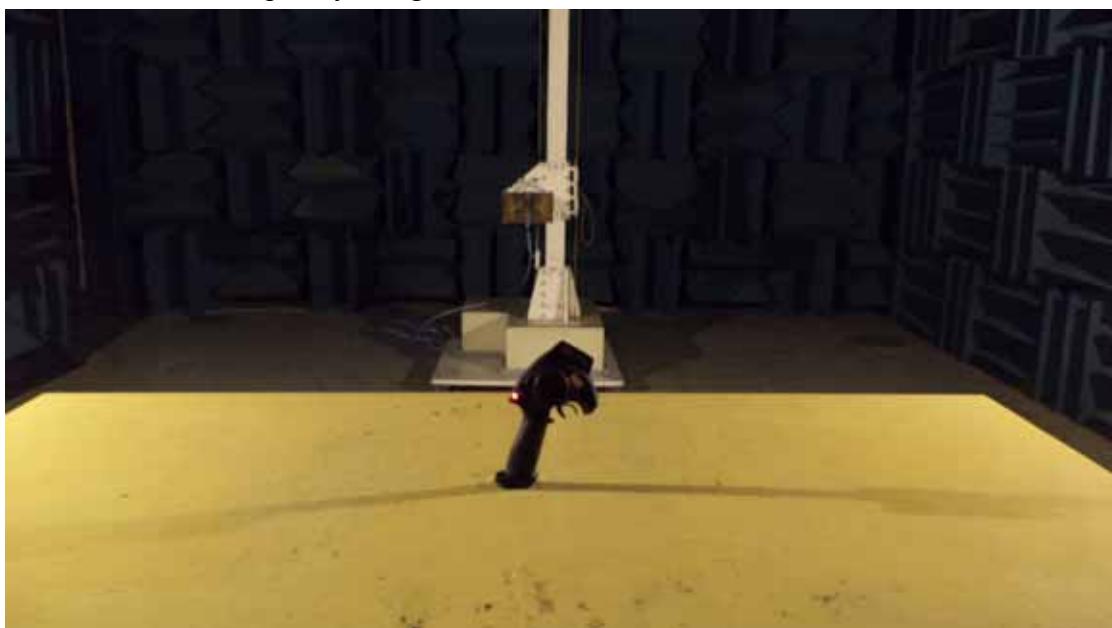

12.1.5.Frequency Range Above 1GHz, Side



12.1.6.Frequency Range Above 1GHz, Lie



12.2.Photo of RF Conducted Measurement

