

# FCC TEST REPORT

**FCC ID** : AZQKB302  
**Applicant** : KOHO TECHNOLOGY(HONG KONG) CO.,LTD.  
**Address** : Building3,Jin Yuda Industrial Park , ShangLiao ,Shajin ,Baoan ,Shenzhen,  
China  
**Manufacturer** : Shenzhen Kanghai Electronics Co.,Ltd.  
**Address** : Shenzhen Baoan District Shajing Street 107 State Road jinyudaindustrial  
park(I,II,3)3 2 nd Floor,3rd Floor,A  
**Equipment Under Test (EUT) :**  
Product Name : Bluetooth Speaker  
Model No. : KB302  
**Standards** : FCC CFR47 Part 15 Section 15.247:2011  
**Date of Test** : April 7~May 08, 2013  
**Date of Issue** : May 14, 2013

**Test Result** : **PASS**

Remark:

\* The sample described above has been tested to be in compliance with the requirements of ANSI C63.4:2003. The test results have been reviewed and comply with the rules listed above and found to meet their essential requirements.

The results shown in this test report refer only to the sample(s) tested, this test report cannot be reproduced, except in full, without prior written permission of the company.

The report would be invalid without specific stamp of test institute and the signatures of compiler and approver.

**Prepared By:**

Waltek Services (Shenzhen) Co., Ltd.

1/F, Fukangtai Building, West Baima Rd., Songgang Street, Baoan District,

Shenzhen 518105, China

Tel: +86-755-83551033


Fax: +86-755-83552400

Compiled by:



Zero Zhou / Project Engineer

Approved by:



Philo Zhong / Manager

## 2 Test Summary

Test Items	Test Requirement	Result
Spurious Radiated Emissions	15.205(a) 15.209 15.247(d)	PASS
Band edge Emissions	15.247(d)	PASS
Spurious RF Conducted Emissions from out of band	15.247(d)	PASS
Duty Cycle	15.35	PASS
Conducted Emissions	15.207	PASS
20dB Bandwidth	15.215c 15.247(a)(1)	PASS
Maximum Peak Output Power	15.247(b)(1)	PASS
Frequency Separation	15.247(a)(1)	PASS
Number of Hopping Frequency	15.247(a)(1)(iii)	PASS
Dwell time	15.247(a)(1)(iii)	PASS
Radiofrequency radiation exposure evaluation	2.1093	PASS

### 3 Contents

	<b>Page</b>
<b>1 COVER PAGE</b> .....	<b>1</b>
<b>2 TEST SUMMARY</b> .....	<b>2</b>
<b>3 CONTENTS</b> .....	<b>3</b>
<b>4 GENERAL INFORMATION</b> .....	<b>5</b>
4.1 GENERAL DESCRIPTION OF E.U.T. ....	5
4.2 DETAILS OF E.U.T. ....	5
4.3 TEST FACILITY .....	5
4.4 TEST LOCATION .....	5
<b>5 EQUIPMENT USED DURING TEST</b> .....	<b>6</b>
5.1 EQUIPMENTS LIST .....	6
5.2 MEASUREMENT UNCERTAINTY .....	7
5.3 TEST EQUIPMENT CALIBRATION .....	7
<b>6 CONDUCTED EMISSION</b> .....	<b>8</b>
6.1 E.U.T. OPERATION .....	8
6.2 EUT SETUP .....	8
6.3 CONDUCTED EMISSION TEST RESULT .....	9
<b>7 SPURIOUS RADIATED EMISSIONS</b> .....	<b>11</b>
7.1 EUT OPERATION : .....	11
7.2 TEST SETUP .....	12
7.3 SPECTRUM ANALYZER SETUP .....	13
7.4 TEST PROCEDURE .....	14
7.5 CORRECTED AMPLITUDE & MARGIN CALCULATION .....	14
7.6 SUMMARY OF TEST RESULTS .....	15
<b>8 SPURIOUS RF CONDUCTED EMISSIONS FROM OUT OF BAND</b> .....	<b>23</b>
8.1 TEST PROCEDURE .....	23
8.2 TEST RESULT .....	23
<b>9 BAND EDGE MEASUREMENT</b> .....	<b>33</b>
9.1 TEST PROCEDURE .....	33
9.2 TEST RESULT .....	34
<b>10 20 DB BANDWIDTH MEASUREMENT</b> .....	<b>42</b>
10.1 TEST PROCEDURE: .....	42
10.2 TEST RESULT: .....	42
<b>11 MAXIMUM PEAK OUTPUT POWER</b> .....	<b>48</b>
11.1 TEST PROCEDURE: .....	48
11.2 TEST RESULT: .....	48
<b>12 HOPPING CHANNEL SEPARATION</b> .....	<b>54</b>
12.1 TEST PROCEDURE: .....	54
12.2 TEST RESULT: .....	54
<b>13 NUMBER OF HOPPING FREQUENCY</b> .....	<b>60</b>
13.1 TEST PROCEDURE: .....	60
13.2 TEST RESULT: .....	60
<b>14 DWELL TIME</b> .....	<b>62</b>
14.1 TEST PROCEDURE: .....	62

14.2	TEST RESULT:.....	62
<b>15</b>	<b>ANTENNA REQUIREMENT .....</b>	<b>78</b>
<b>16</b>	<b>RADIOFREQUENCY RADIATION EXPOSURE EVALUATION .....</b>	<b>79</b>
16.1	REQUIMENTS: .....	79
16.2	TEST RESULT.....	80
<b>17</b>	<b>PHOTOGRAPHS – TEST SETUP .....</b>	<b>81</b>
17.1	RADIATED EMISSIONS.....	81
17.2	CONDUCTED EMISSIONS .....	82
<b>18</b>	<b>PHOTOGRAPHS - CONSTRUCTIONAL DETAILS .....</b>	<b>83</b>
18.1	EUT – EXTERNAL VIEW FOR WHITE.....	83
18.2	EUT – EXTERNAL VIEW FOR BLACK.....	86
18.3	EUT – INTERNAL VIEW.....	89
18.4	EUT-RF MODULE VIEW.....	93

## 4 General Information

### 4.1 General Description of E.U.T.

<b>Product Name</b>	: Bluetooth Speaker
<b>Model No.</b>	: KB302
<b>Model Description</b>	: N/A
<b>Operation Frequency</b>	: 2402MHz ~ 2480MHz,79 channels in total,separated by 1MHz
<b>Type of Modulation</b>	: GFSK, Pi/4DQPSK, 8DPSK
<b>Oscillator</b>	: Crystal 32.768kHz,12MHz,26MHz
<b>Antenna installation</b>	: PCB Printed Antenna
<b>Antenna Gain</b>	: 0dBi

### 4.2 Details of E.U.T.

<b>Technical Data</b> .....	: (1)DC 5V from USB Charging (2)DC 3.7V, 2200mAh from lithium battery
-----------------------------	--

### 4.3 Test Facility

The test facility has a test site registered with the following organizations:

- **IC – Registration No.: 7760A**

Waltek Services(Shenzhen) Co., Ltd. has been registered and fully described in a report filed with the Industry Canada. The acceptance letter from the Industry Canada is maintained in our files.

Registration 7760A, July 12, 2012.

- **FCC – Registration No.: 880581**

Waltek Services(Shenzhen) Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration 880581, May 26, 2011.

### 4.4 Test Location

All the tests were performed at:

Waltek Services(Shenzhen) Co., Ltd. at 1/F, Fukangtai Building, West Baima Rd.,Songgang Street, Baoan District, Shenzhen, China

## 5 Equipment Used during Test

### 5.1 Equipments List

<b>Conducted Emissions</b>						
<b>Item</b>	<b>Equipment</b>	<b>Manufacturer</b>	<b>Model No.</b>	<b>Serial No.</b>	<b>Last Calibration Date</b>	<b>Calibration Due Date</b>
1.	EMI Test Receiver	R&S	ESCI	101155	Aug. 13,2012	Aug. 12,2013
2.	LISN	SCHWARZBECK	NSLK 8128	8128-289	Aug. 13,2012	Aug. 12,2013
3.	Cable	LARGE	RF300	EW02014-3	Aug.14,2012	Aug. 13,2013
<b>3m Semi-anechoic Chamber for Radiation(TDK) (Test Frequency:32.768kHz~1000MHz)</b>						
<b>Item</b>	<b>Equipment</b>	<b>Manufacturer</b>	<b>Model No.</b>	<b>Serial No</b>	<b>Last Calibration Date</b>	<b>Calibration Due Date</b>
1	Test Receiver	R&S	ESCI	101296	Aug.09,2012	Aug.08,2013
2	Active Loop Antenna	Beijing Dazhi	ZN30900A	-	Aug. 13,2012	Aug. 12,2013
3	Trilog Broadband Antenna	SCHWARZBECK	VULB9160	9160-3325	Aug.11,2012	Aug.10,2013
4	Amplifier	Compliance pirection systems inc	PAP-0203	22024	Apr.07,2013	Apr.06,2014
5	Cable	HUBER+SUHNE R	CBL2	525178	Sep.15,2012	Sep.14,2013
<b>3m Semi-anechoic Chamber for Radiation Emissions (Test Frequency:Above 1GHz)</b>						
<b>Item</b>	<b>Equipment</b>	<b>Manufacturer</b>	<b>Model No.</b>	<b>Serial No.</b>	<b>Last Calibration Date</b>	<b>Calibration Due Date</b>
1.	EMC Analyzer	Agilent	E7405A	MY45114943	Aug. 13,2012	Aug. 12,2013
2.	Broad-band Horn Antenna	SCHWARZBECK	BBHA 9120 D	667	Aug. 13,2012	Aug. 12,2013
3.	Broad-band Horn Antenna	SCHWARZBECK	BBHA 9170	399	Aug. 13,2012	Aug. 12,2013
4.	Broadband Preamplifier	COMPLIANCE DIRECTION	PAP-1G18	2004	Apr.07,2013	Apr.06,2014
5.	Broadband Preamplifier	SCHWARZBECK	BBV 9718	9718-148	Aug. 13,2012	Aug. 12,2013
6.	10m Coaxial Cable with N- plug	SCHWARZBECK	AK 9515 H	-	Aug. 13,2012	Aug. 12,2013

## 5.2 Measurement Uncertainty

Parameter	Uncertainty
Radio Frequency	$\pm 1 \times 10^{-6}$
Bandwidth	$\pm 1.5 \times 10^{-6}$
RF Power	$\pm 1.0$ dB
RF Power Density	$\pm 2.2$ dB
Temperature	$\pm 1$ °C
DC Source	$\pm 0.05\%$
Radiated Emissions test	$\pm 3.58$ dB (9KH~30MHz)
	$\pm 5.03$ dB (30M~1000MHz)
	$\pm 4.74$ dB (1000M~25000MHz)
Conducted Spurious Emissions test	$\pm 0.5$ dB (9KHz~1000MHz)
	$\pm 1$ dB(1000M~26500MHz)
Conducted Emissions test	$\pm 3.64$ dB (AC mains 150KHz~30MHz)

## 5.3 Test Equipment Calibration

All the test equipments used are valid and calibrated by CEPREI Certification Body that address is No.110 Dongguan Zhuang RD. Guangzhou, P.R.China.

## 6 Conducted Emission

Test Requirement:	FCC CFR 47 Part 15 Section 15.207
Test Method:	ANSI C63.4:2003
Test Result:	PASS
Frequency Range:	150kHz to 30MHz
Class:	Class B
Limit:	66-56 dB $\mu$ V between 0.15MHz & 0.5MHz 56 dB $\mu$ V between 0.5MHz & 5MHz 60 dB $\mu$ V between 5MHz & 30MHz
Detector:	Peak for pre-scan (9kHz Resolution Bandwidth) Quasi-Peak & Average if maximised peak within 6dB of Average Limit

### 6.1 E.U.T. Operation

#### Operating Environment:

Temperature: 25.5 °C

Humidity: 51 % RH

Atmospheric Pressure: 1012 mbar

#### EUT Operation:


The EUT was tested in Charging + BT linking mode. The test data were shown as follow.

The EUT was tested according to ANSI C63.4:2003. The frequency spectrum from 150kHz to 30MHz was investigated.

The maximised peak emissions from the EUT was scanned and measured for both the Live and Neutral Lines. Quasi-peak & average measurements were performed if peak emissions were within 6dB of the average limit line.

### 6.2 EUT Setup

The EUT was placed on the test table in shielding room.

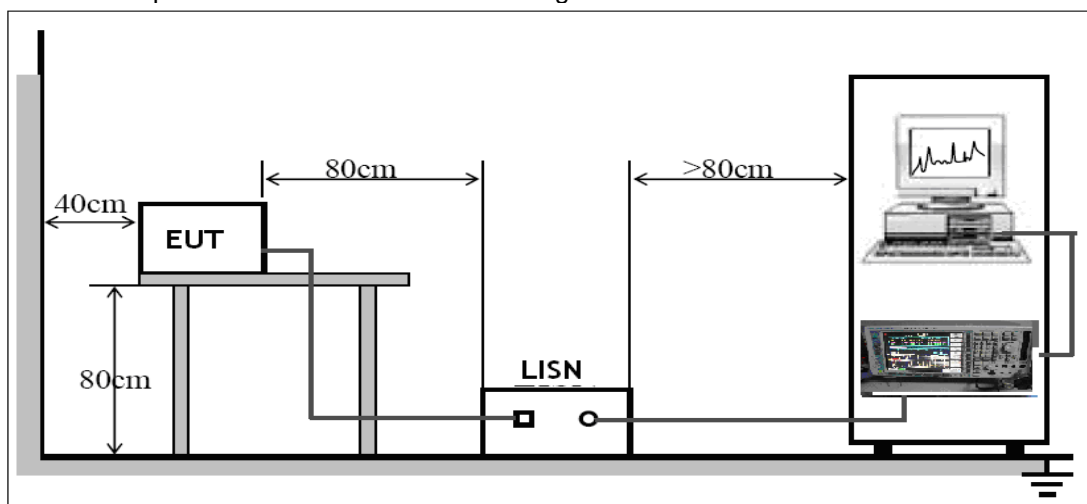




### 6.3 Conducted Emission Test Result

An initial pre-scan was performed on the live and neutral lines.


Test Mode: Charging + BT linking(the worst data)

Live line:

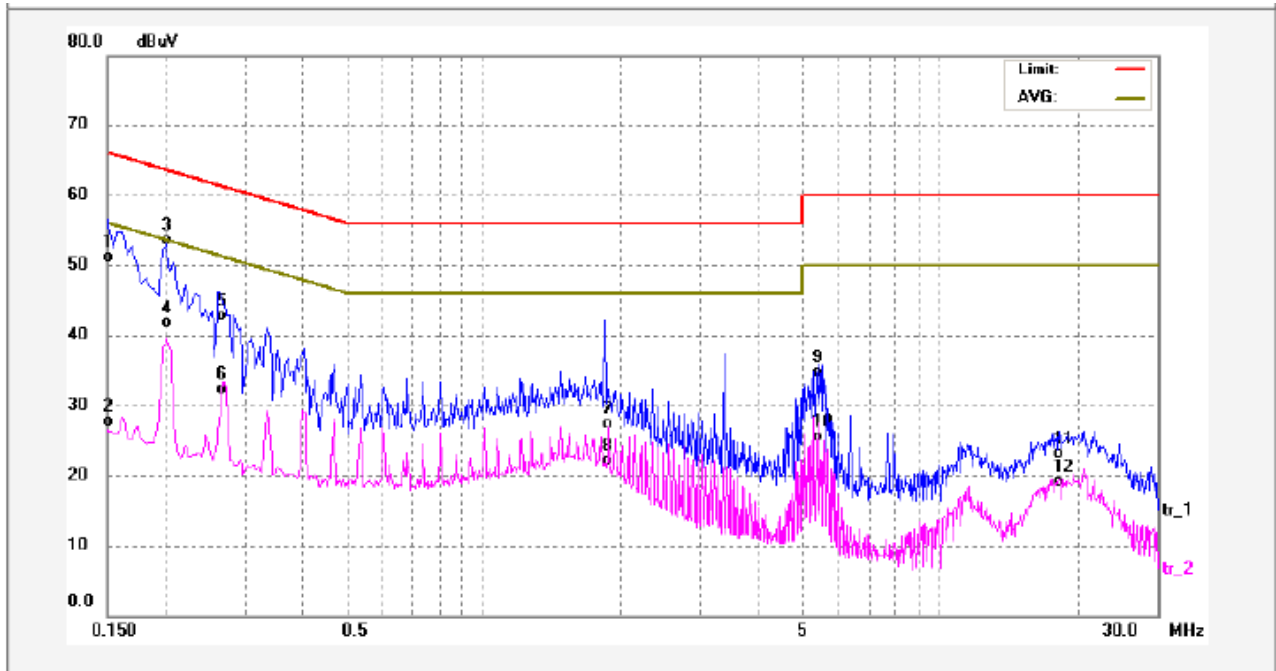

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit dBuV	Margin (dB)	Detector	Remark
1	0.1500	39.17	11.17	50.34	65.99	-15.65	QP	
2	0.1500	15.72	11.17	26.89	55.99	-29.10	AVG	
3	0.2020	41.50	11.30	52.80	63.52	-10.72	QP	
4	0.2020	29.51	11.30	40.81	53.52	-12.71	AVG	
5	0.2720	30.64	11.30	41.94	61.05	-19.11	QP	
6	0.2720	20.29	11.30	31.59	51.05	-19.46	AVG	
7	1.8540	15.22	11.20	26.42	56.00	-29.58	QP	
8	1.8540	10.02	11.20	21.22	46.00	-24.78	AVG	
9	5.4340	22.61	11.24	33.85	60.00	-26.15	QP	
10	5.4340	13.54	11.24	24.78	50.00	-25.22	AVG	
11	18.2500	10.92	11.48	22.40	60.00	-37.60	QP	
12	18.2500	6.73	11.48	18.21	50.00	-31.79	AVG	

Neutral line:

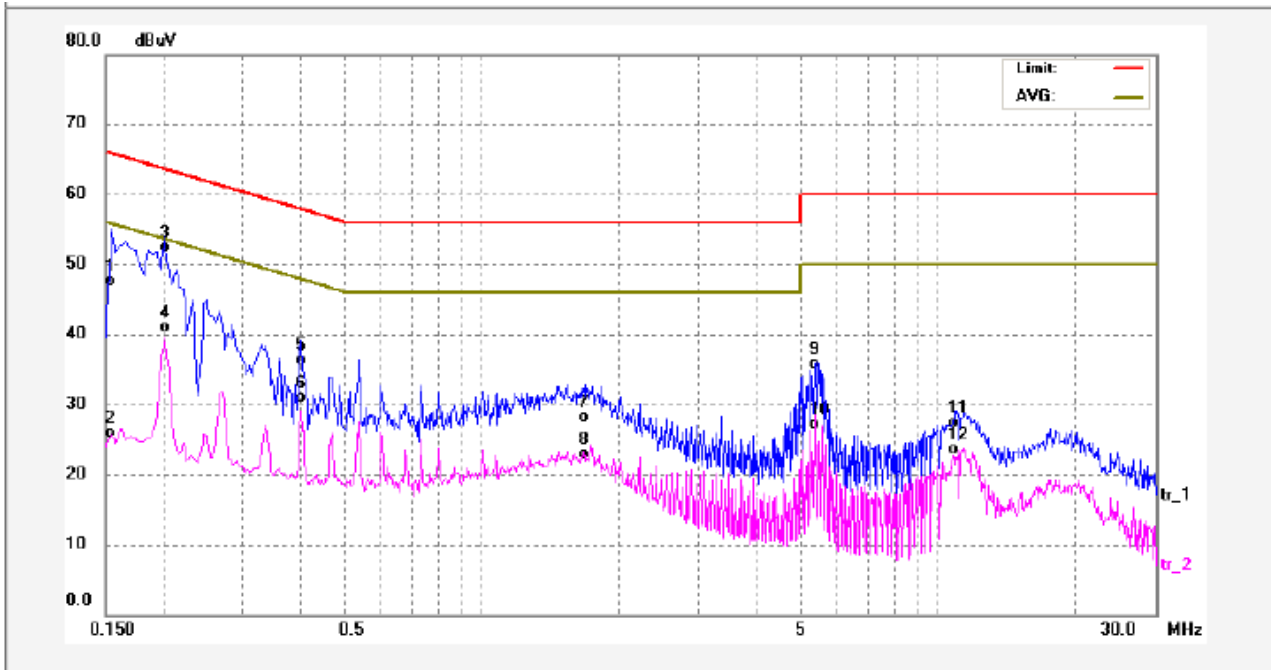

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit dBuV	Margin (dB)	Detector	Remark
1	0.1539	35.60	11.18	46.78	65.78	-19.00	QP	
2	0.1539	13.99	11.18	25.17	55.78	-30.61	AVG	
3	0.2020	40.27	11.30	51.57	63.52	-11.95	QP	
4	0.2020	28.76	11.30	40.06	53.52	-13.46	AVG	
5	0.4020	24.29	11.31	35.60	57.81	-22.21	QP	
6	0.4020	18.86	11.31	30.17	47.81	-17.64	AVG	
7	1.6980	16.17	11.19	27.36	56.00	-28.64	QP	
8	1.6980	10.96	11.19	22.15	46.00	-23.85	AVG	
9	5.4340	23.58	11.24	34.82	60.00	-25.18	QP	
10	5.4340	15.08	11.24	26.32	50.00	-23.68	AVG	
11	10.9340	15.16	11.34	26.50	60.00	-33.50	QP	
12	10.9340	11.28	11.34	22.62	50.00	-27.38	AVG	

## 7 Spurious Radiated Emissions

Test Requirement: FCC CFR47 Part 15 Section 15.209 & 15.247

Test Method: DA 00-705

Test Result: PASS

Measurement Distance: 3m

Limit:

Frequency (MHz)	Field Strength		Field Strength Limit at 3m Measurement Dist	
	uV/m	Distance (m)	uV/m	dBuV/m
0.009 ~ 0.490	2400/F(kHz)	300	10000 * 2400/F(kHz)	$20\log^{(2400/F(kHz))} + 80$
0.490 ~ 1.705	24000/F(kHz)	30	100 * 24000/F(kHz)	$20\log^{(24000/F(kHz))} + 40$
1.705 ~ 30	30	30	100 * 30	$20\log^{(30)} + 40$
30 ~ 88	100	3	100	$20\log^{(100)}$
88 ~ 216	150	3	150	$20\log^{(150)}$
216 ~ 960	200	3	200	$20\log^{(200)}$
Above 960	500	3	500	$20\log^{(500)}$

### 7.1 EUT Operation :

Operating Environment:

Temperature: 25.5 °C


Humidity: 51 % RH

Atmospheric Pressure: 1017 mbar


### 7.2 Test Setup

The radiated emission tests were performed in the 3m Semi- Anechoic Chamber test site, using the setup accordance with the ANSI C63.4: 2003.


The test setup for emission measurement below 30MHz.

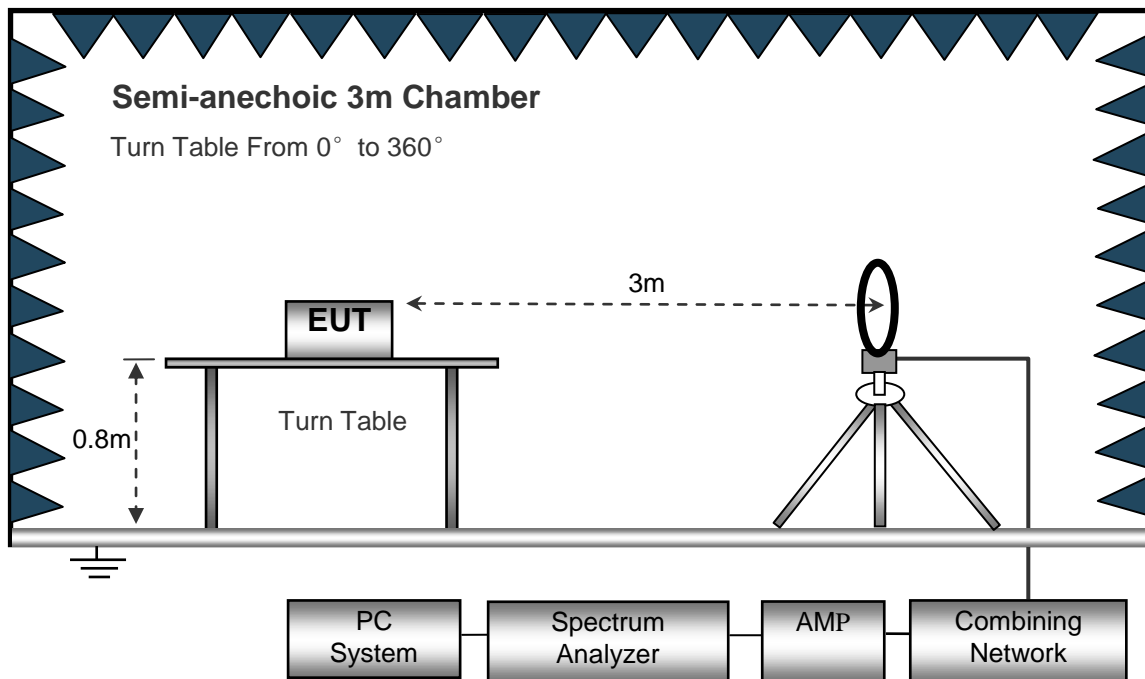

The test setup for emission measurement from 30 MHz to 1 GHz.

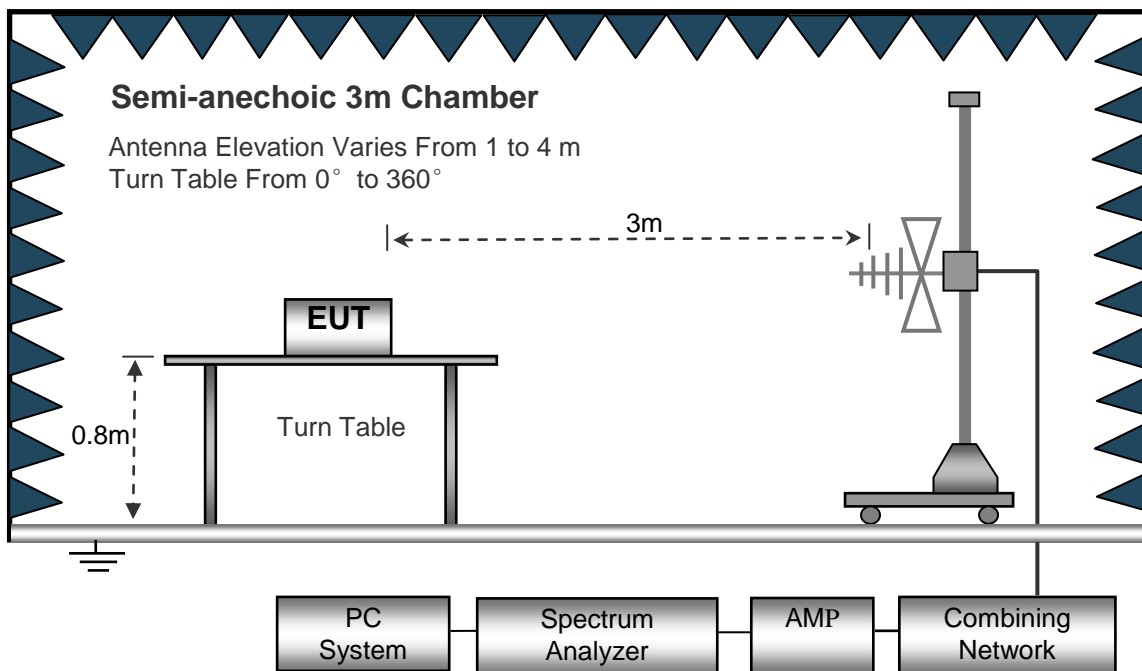

The test setup for emission measurement above 1 GHz.

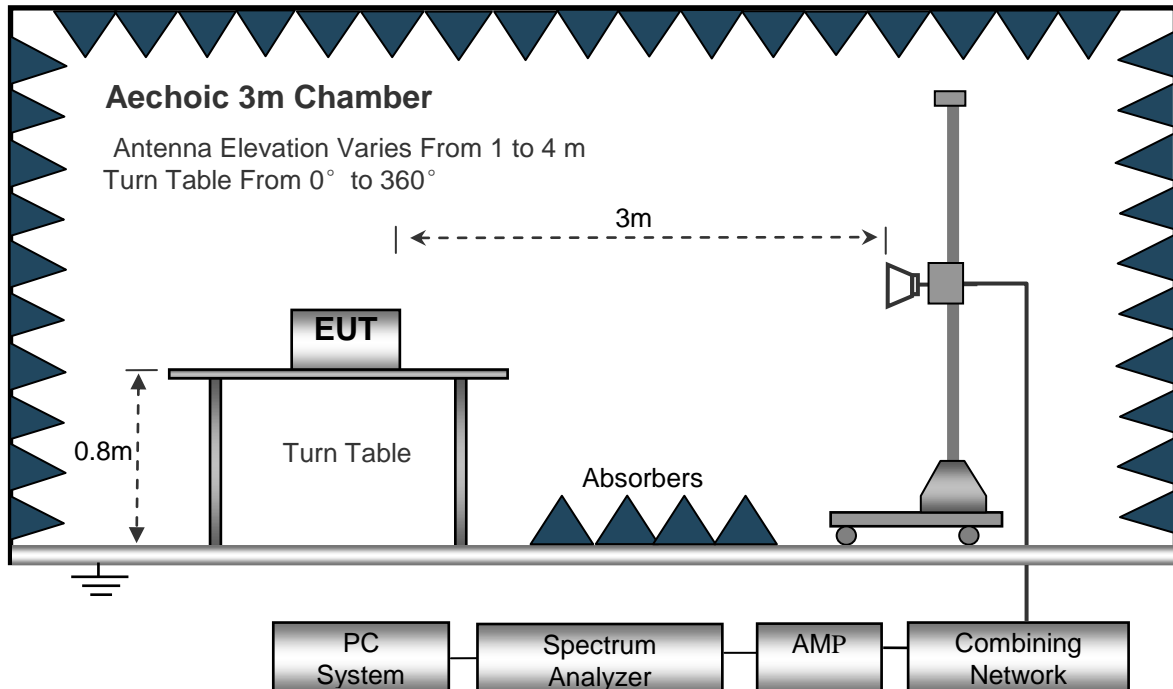

### 7.3 Spectrum Analyzer Setup

According to FCC Part15 Rules, the system was tested 32.768kHz to 25000MHz.

#### Below 30MHz

Sweep Speed .....Auto  
 IF Bandwidth .....10KHz  
 Video Bandwidth .....10KHz  
 Resolution Bandwidth .....10KHz

#### 30MHz ~ 1GHz

Sweep Speed .....Auto  
 IF Bandwidth .....120 KHz  
 Video Bandwidth .....100KHz  
 Quasi-Peak Adapter Bandwidth .....120 KHz  
 Quasi-Peak Adapter Mode .....Normal  
 Resolution Bandwidth .....100KHz

#### Above 1GHz

Sweep Speed .....Auto  
 IF Bandwidth .....120 KHz  
 Video Bandwidth .....3MHz  
 Quasi-Peak Adapter Bandwidth .....120 KHz  
 Quasi-Peak Adapter Mode .....Normal  
 Resolution Bandwidth .....1MHz

## 7.4 Test Procedure

1. The EUT is placed on a turntable, which is 0.8m above ground plane.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is moved from 1m to 4m to find out the maximum emissions.
4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
5. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
6. Repeat above procedures until the measurements for all frequencies are complete.
7. The radiation measurements are tested under 3-axes(X,Y,Z) position(X denotes lying on the table, Y denotes side stand and Z denotes vertical stand), After pre-test, It was found that the worse radiation emission was get at the X position. So the data shown was the X position only.

## 7.5 Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Factor, and subtracting the Amplifier Gain from the Amplitude reading. The basic equation is as follows:

$$\text{Corr. Ampl.} = \text{Indicated Reading} + \text{Antenna Factor} + \text{Cable Factor} - \text{Amplifier Gain}$$

The "Margin" column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of -7dB means the emission is 7dB below the maximum limit for Class B. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Corr. Ampl.} - \text{Limit}$$

### 7.6 Summary of Test Results

**Test Frequency :Below 30MHz**


All emissions were more than 20 dB below the limit and therefore not reported

**Test Frequency : 30MHz ~ 1000MHz**

Test voltage: DC 3.7V, 2200mAh from lithium battery


Test Mode: BT linking

Antenna polarization: Vertical

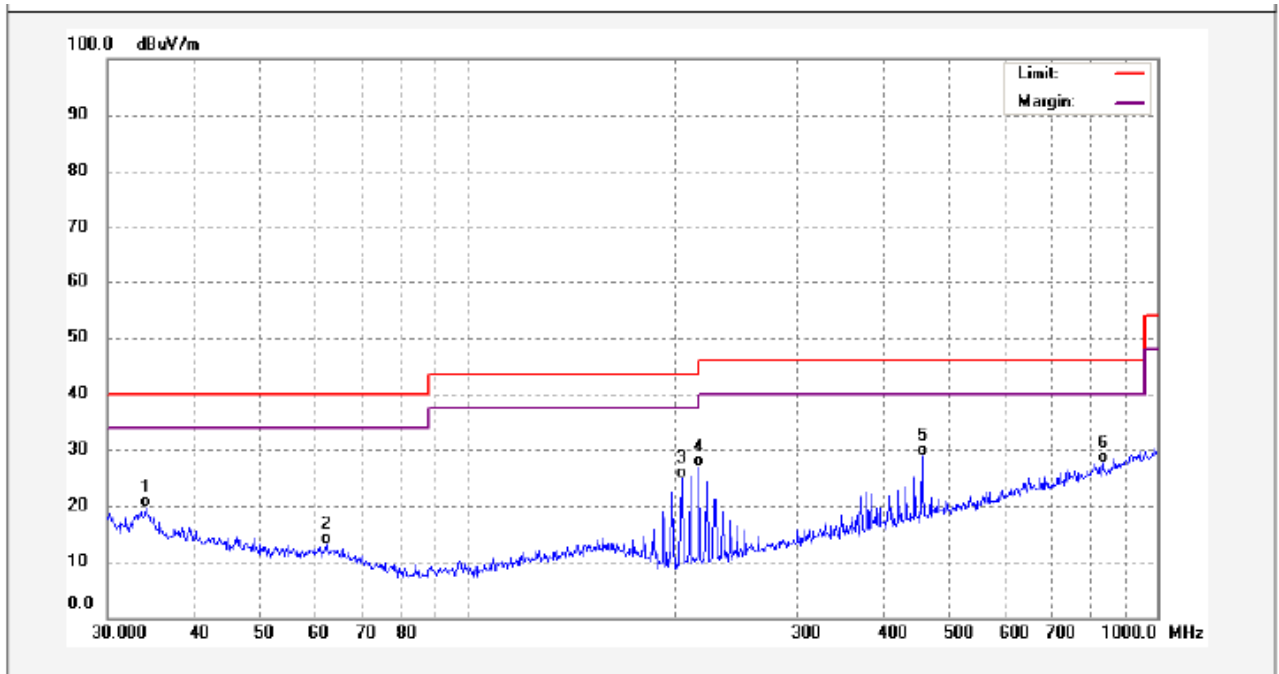

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Remark
1	34.0365	37.72	-18.17	19.55	40.00	-20.45	QP	
2	62.2128	34.67	-21.49	13.18	40.00	-26.82	QP	
3	204.2377	48.48	-23.66	24.82	43.50	-18.68	QP	
4	216.0240	50.11	-23.26	26.85	46.00	-19.15	QP	
5	455.9058	44.07	-15.20	28.87	46.00	-17.13	QP	
6	833.3171	34.52	-6.95	27.57	46.00	-18.43	QP	

Antenna polarization: Horizontal

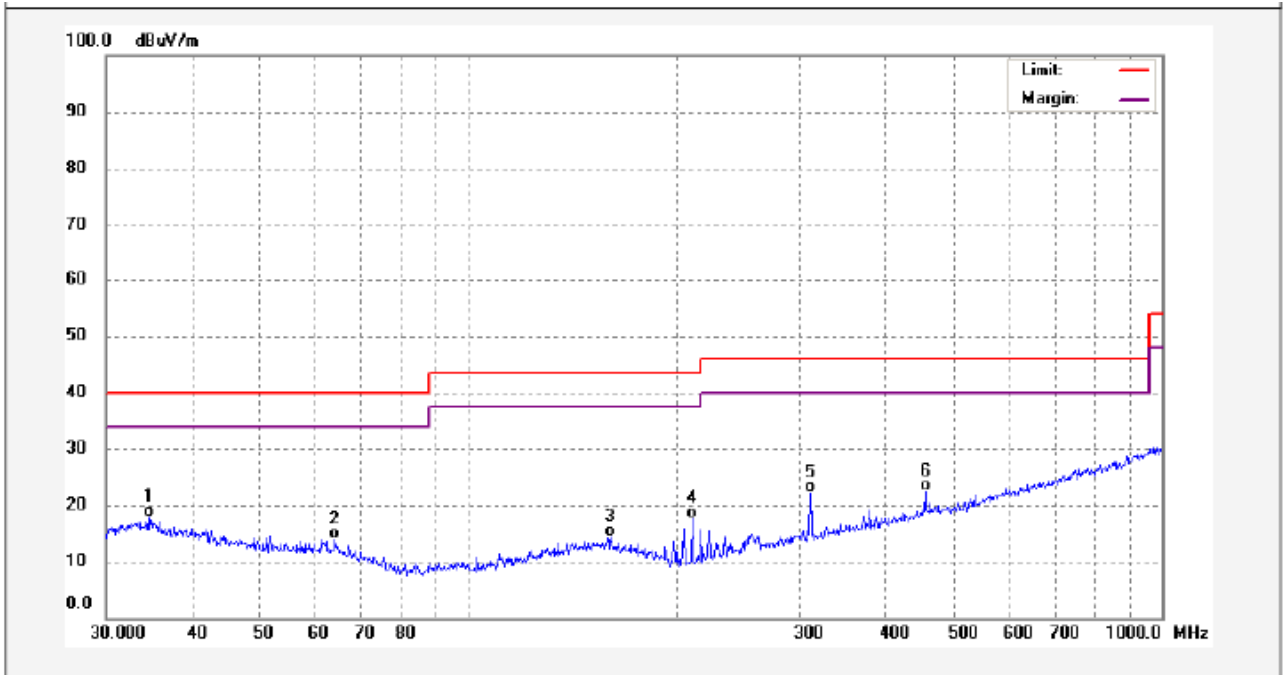

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Remark
1	34.5173	36.03	-18.14	17.89	40.00	-22.11	QP	
2	64.2074	35.53	-21.67	13.86	40.00	-26.14	QP	
3	160.3456	35.09	-20.72	14.37	43.50	-29.13	QP	
4	210.0482	41.19	-23.46	17.73	43.50	-25.77	QP	
5	311.0867	41.45	-19.31	22.14	46.00	-23.86	QP	
6	455.9058	37.55	-15.20	22.35	46.00	-23.65	QP	




**Test Frequency: 1GHz ~ 18GHz**

All the modulation modes were tested, the data of the worst mode (GFSK) were recorded in the following pages.

Test mode: transmitting at lower channel

Antenna polarization: Vertical

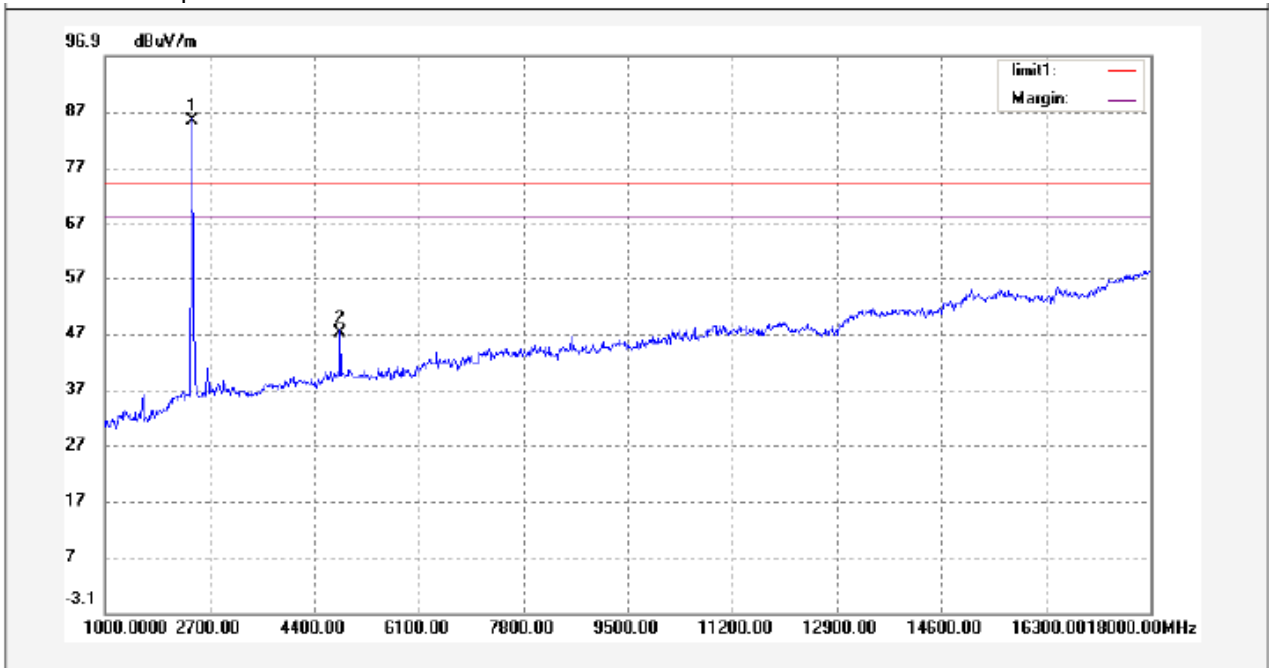


No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Remark
1	2402.000	94.51	-9.29	85.22	74.00	11.22	peak	
2	4804.000	50.28	-3.17	47.11	74.00	-26.89	peak	

No.	Freq. (MHz)	Duty Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Remark
1	-	-	-	-	-	AV	All emissions were more than 20 dB below the limit and therefore not reported

Remark: Mark 1 is fundamental which should be ignored.

Antenna polarization: Horizontal

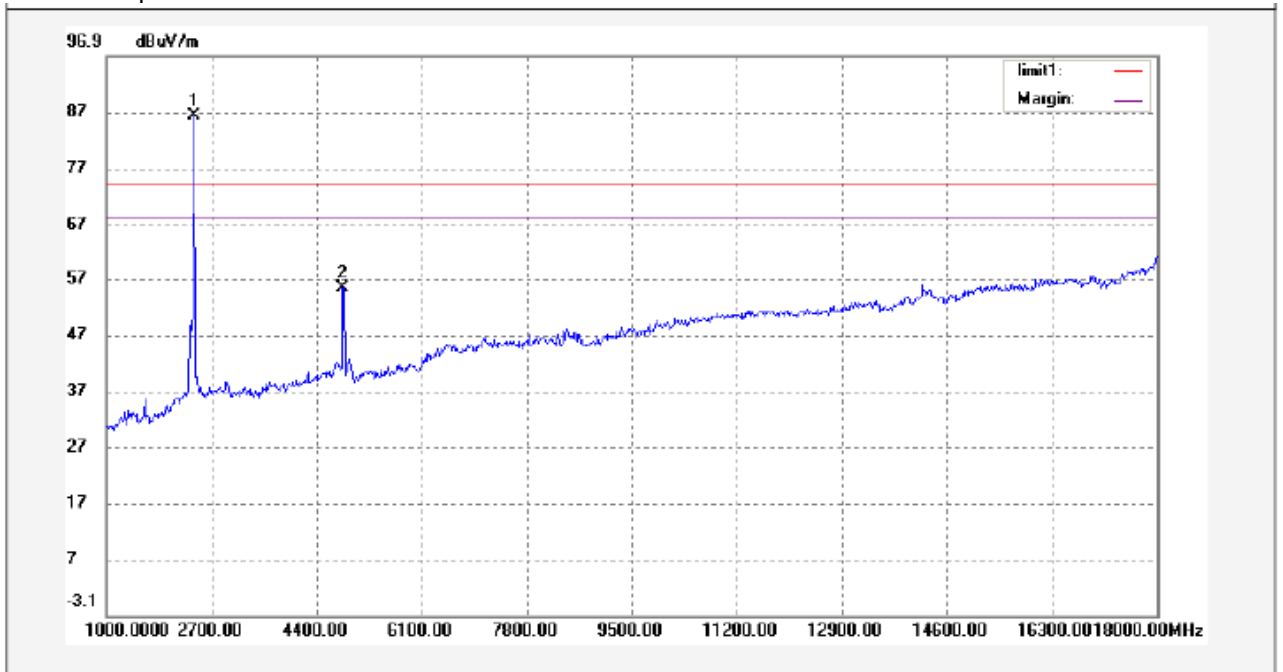


No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Remark
1	2402.000	95.51	-9.29	86.22	74.00	12.22	peak	
2	4804.000	58.40	-3.17	55.23	74.00	-18.77	peak	

No.	Freq. (MHz)	Duty Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Remark
1	-	-	-	-	-	AV	All emissions were more than 20 dB below the limit and therefore not reported

Remark: Mark 1 is fundamental which should be ignored.

Test mode: transmitting at middle channel

Antenna polarization: Vertical

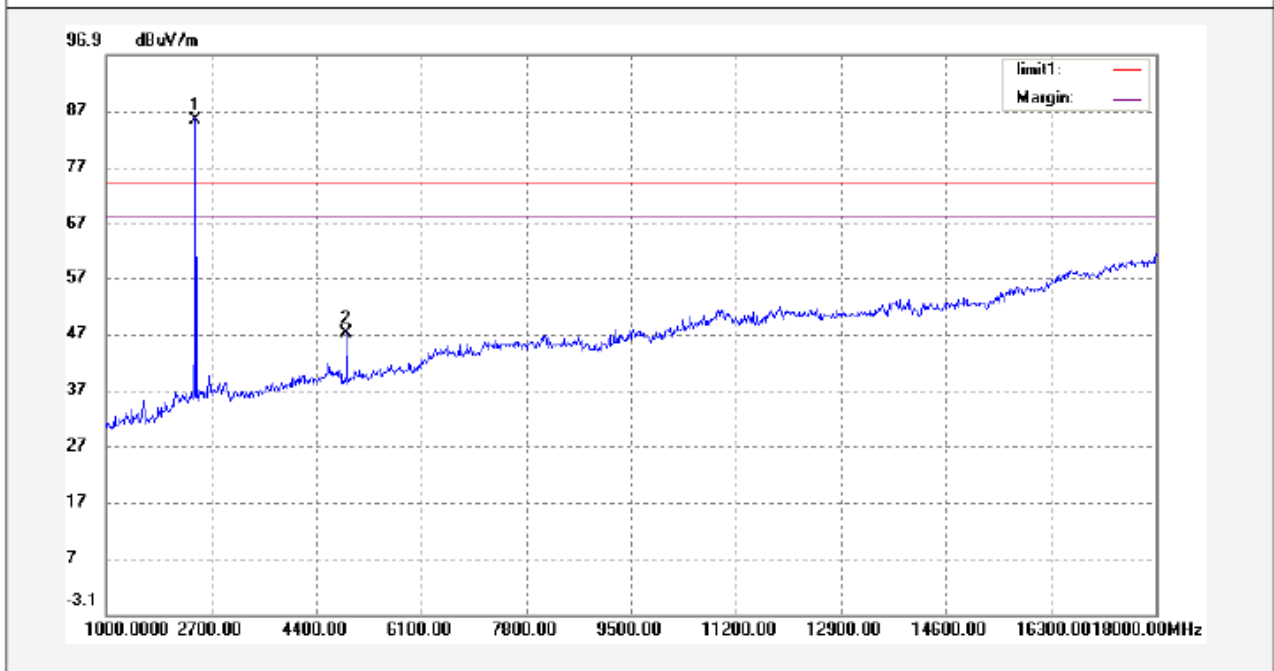


No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Remark
1	2445.000	94.53	-9.32	85.21	74.00	11.21	peak	
2	4893.000	50.16	-3.02	47.14	74.00	-26.86	peak	

No.	Freq. (MHz)	Duty Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Remark
1	-	-	-	-	-	AV	All emissions were more than 20 dB below the limit and therefore not reported

Remark: Mark 1 is fundamental which should be ignored.

Antenna polarization: Horizontal

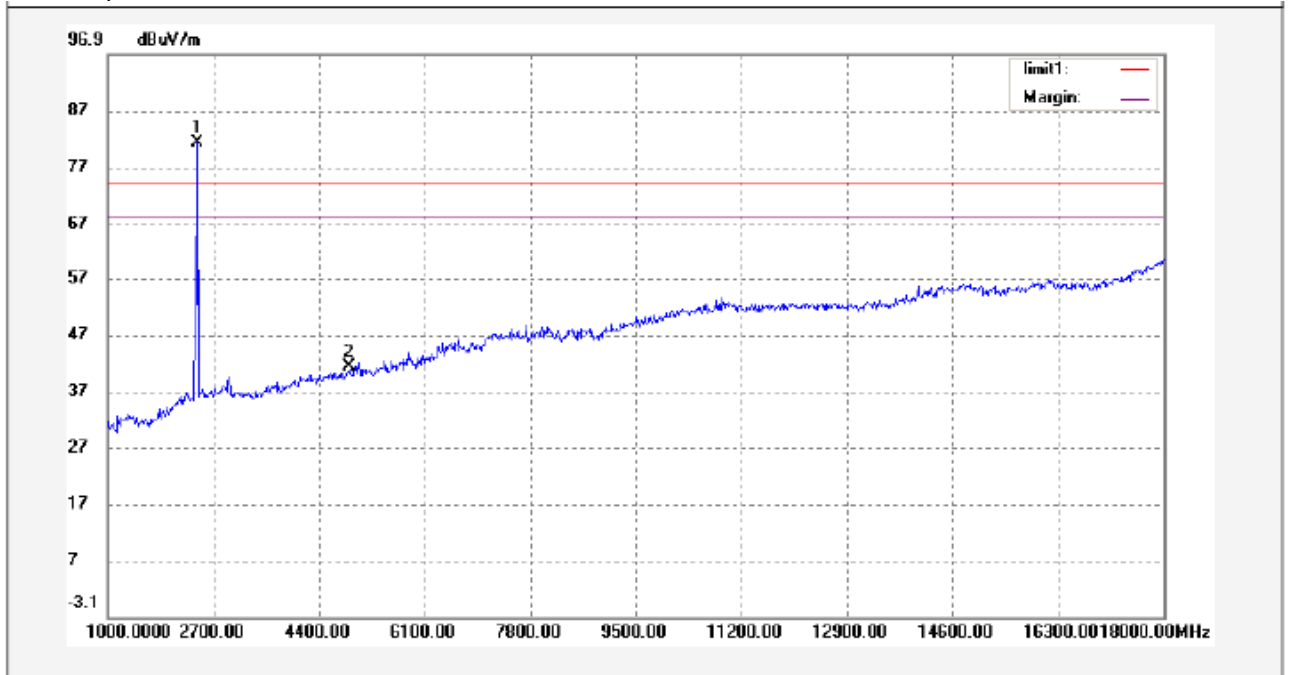


No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Remark
1	2445.000	90.55	-9.32	81.23	74.00	7.23	peak	
2	4882.000	44.29	-3.04	41.25	74.00	-32.75	peak	

No.	Freq. (MHz)	Duty Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Remark
1	-	-	-	-	-	AV	All emissions were more than 20 dB below the limit and therefore not reported

Remark: Mark 1 is fundamental which should be ignored.

Test mode: transmitting at upper channel

Antenna polarization: Vertical

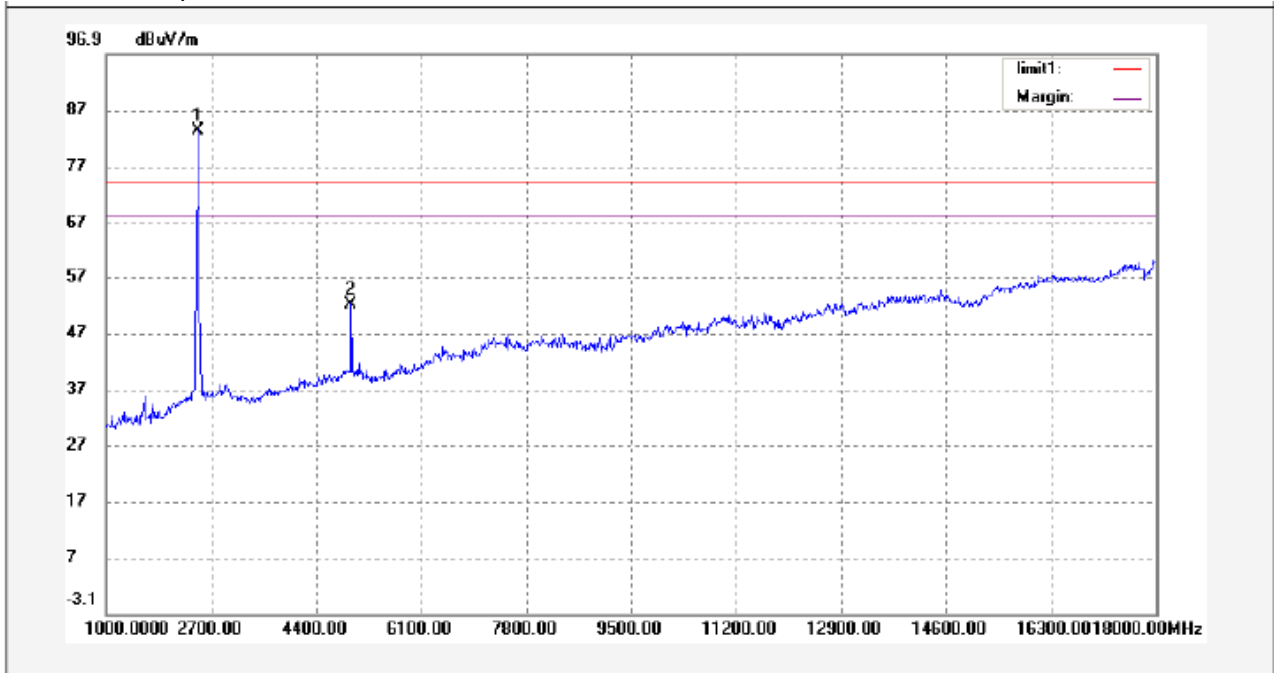


No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Remark
1	2479.000	92.44	-9.22	83.22	74.00	9.22	peak	
2	4960.000	54.92	-2.81	52.11	74.00	-21.89	peak	

No.	Freq. (MHz)	Duty Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Remark
1	-	-	-	-	-	AV	All emissions were more than 20 dB below the limit and therefore not reported

Remark: Mark 1 is fundamental which should be ignored.

Antenna polarization: Horizontal

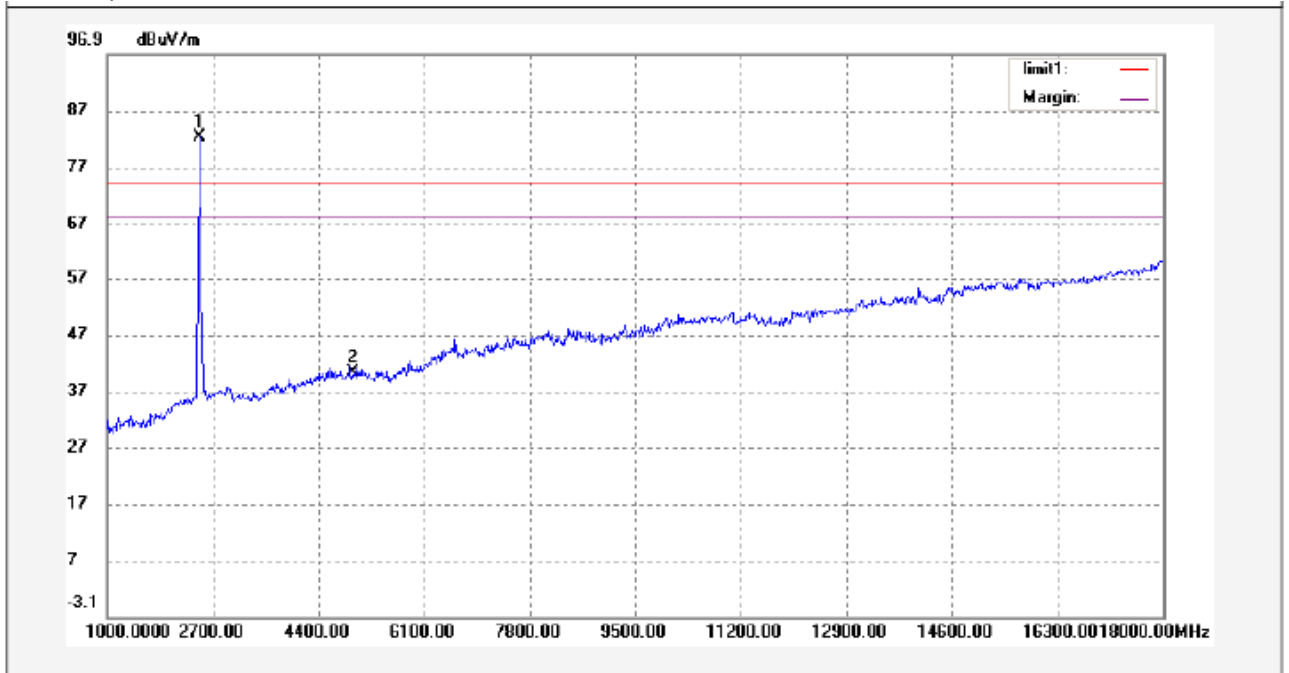

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Remark
1	2479.000	91.47	-9.22	82.25	74.00	8.25	peak	
2	4960.000	43.07	-2.81	40.26	74.00	-33.74	peak	

No.	Freq. (MHz)	Duty Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Remark
1	-	-	-	-	-	AV	All emissions were more than 20 dB below the limit and therefore not reported

Remark: Mark 1 is fundamental which should be ignored.

**Test Frequency :Above 18GHz**

The measurement is performed up to 25GHz, and all other emissions are more than 20dB below the limit, therefore the results above 18GHz is not recorded in this report.

## 8 Spurious RF Conducted Emissions from out of band

Test Requirement: FCC Part 15.247(d) In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits.

Test Method: DA 00-705

Test Status: TX mode

### 8.1 Test Procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set to span from the lowest frequency generated in the device up to and including the tenth harmonic of the highest fundamental frequency.
3. Set RBW = 100kHz and VBW = 300kHz.Sweep =auto.
4. mark the worst point and record.

### 8.2 Test Result

#### Test Frequency: Below 30MHz



Remark: For emissions below 30MHz,no emission higher than background level, so the data does not show in the report.

#### Test Frequency: 30MHz ~ 25GHz

Test result plots shown as follows:


Modulation:GFSK

Lower Channel

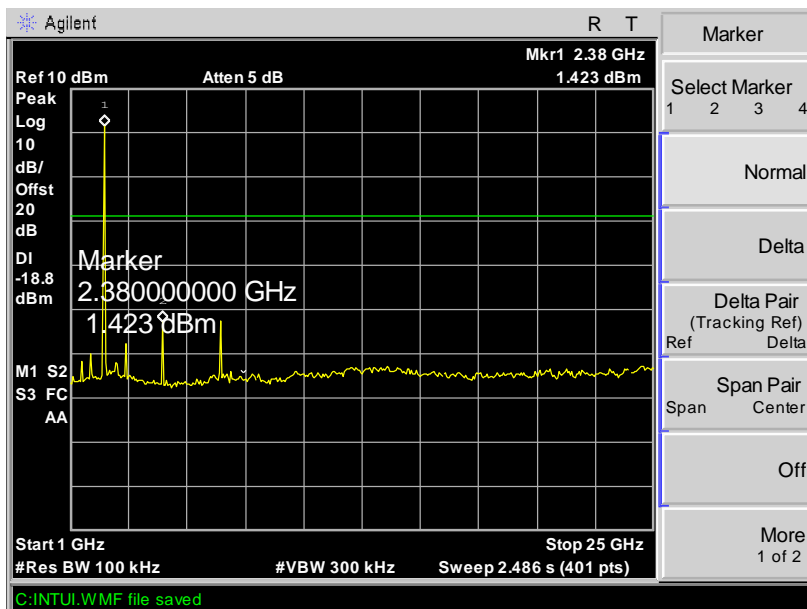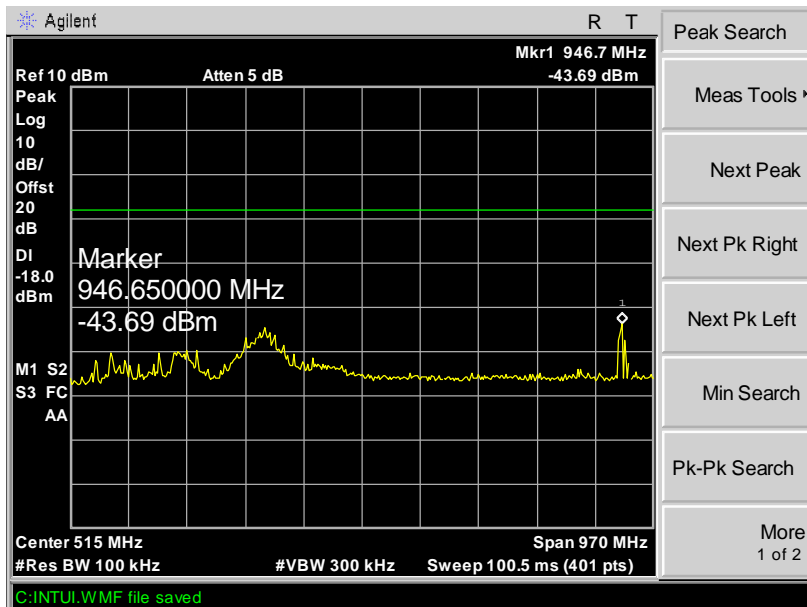




Middle Channel


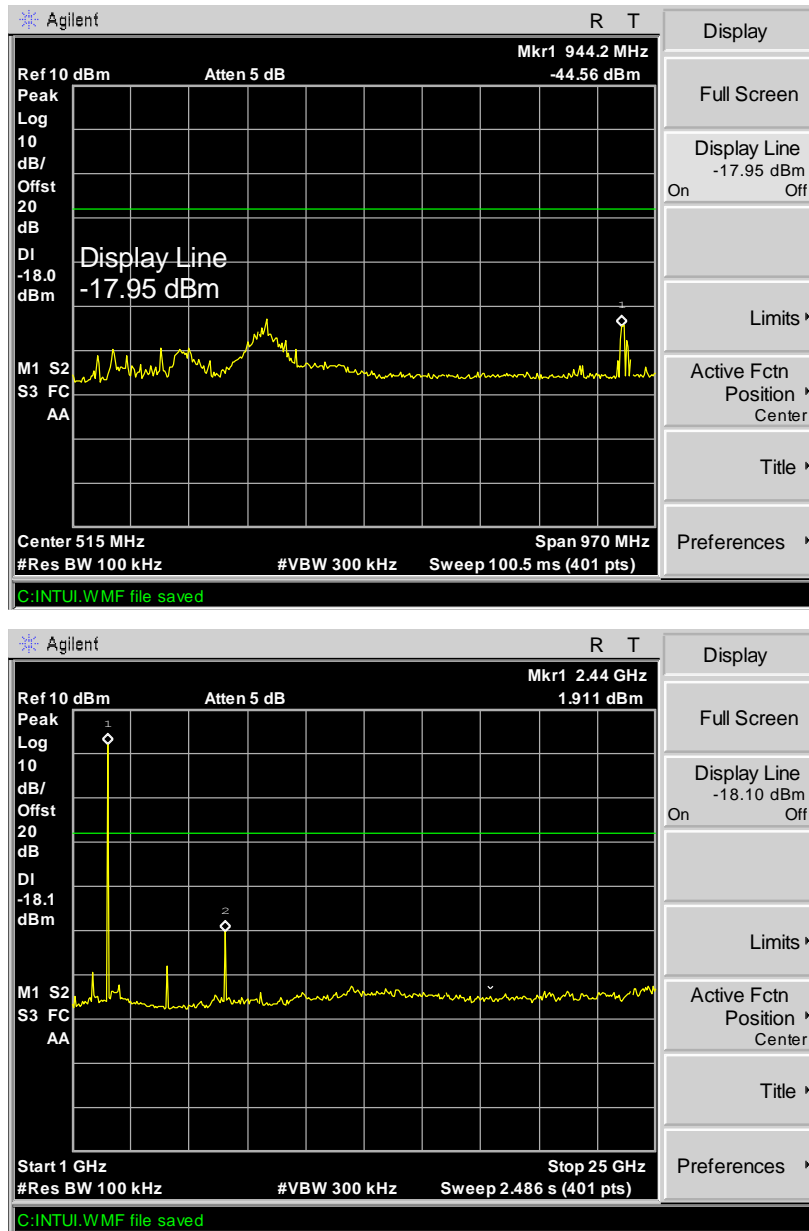


Upper Channel


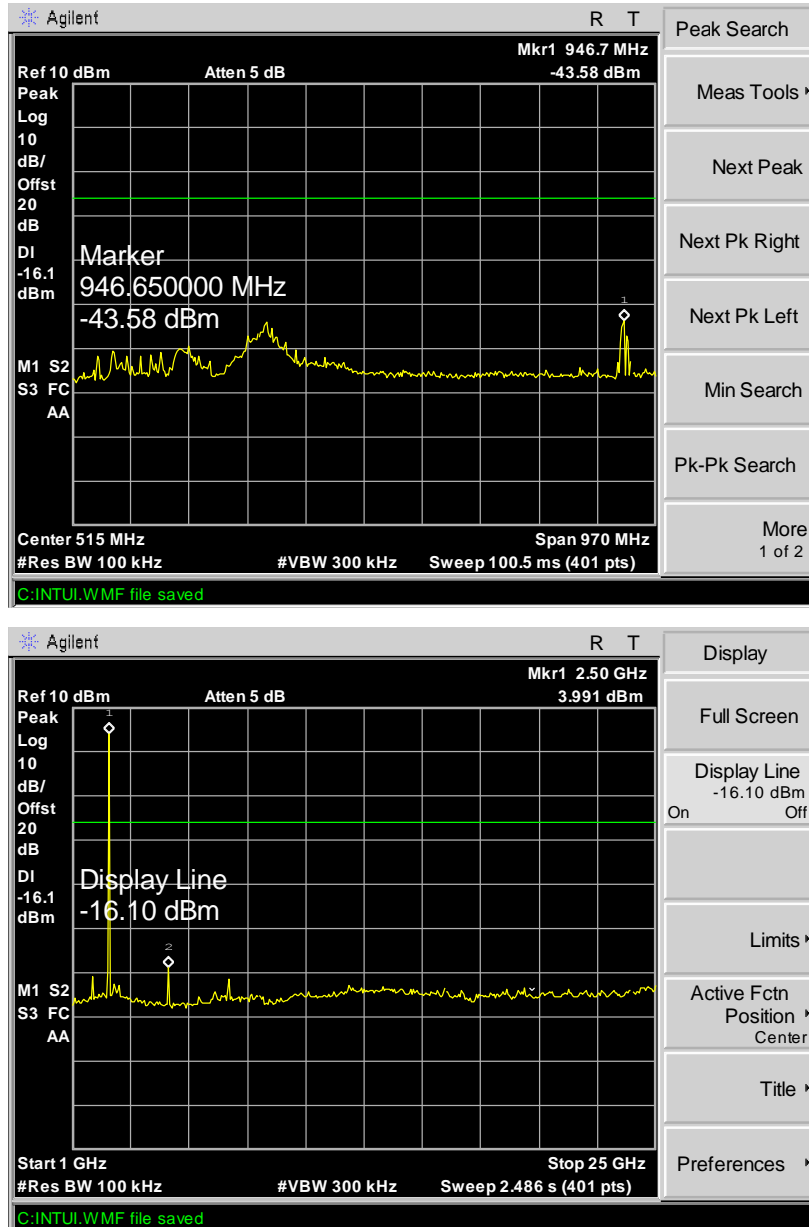


Modulation: Pi/4DQPSK



Lower Channel

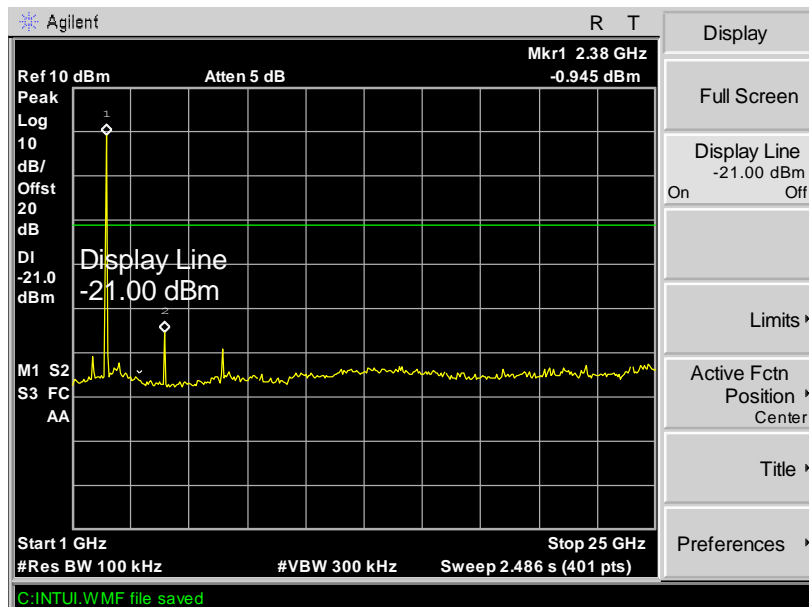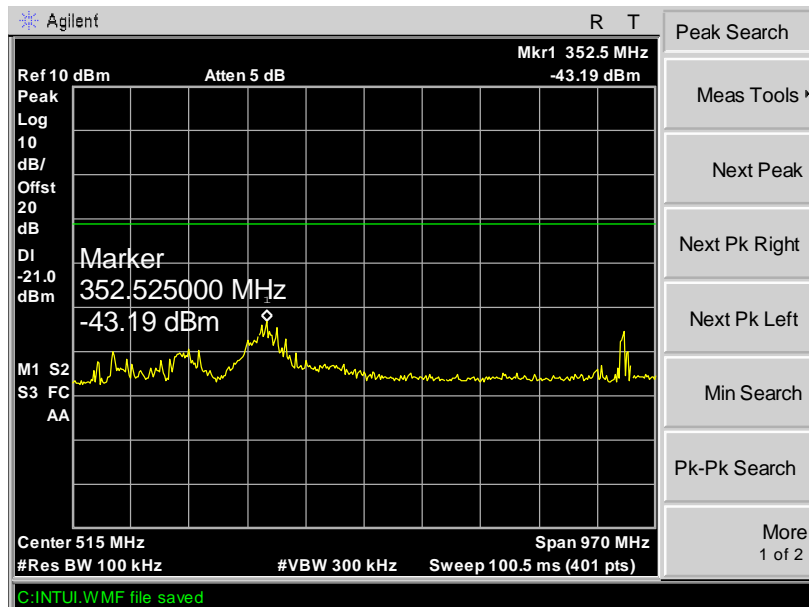

Middle Channel

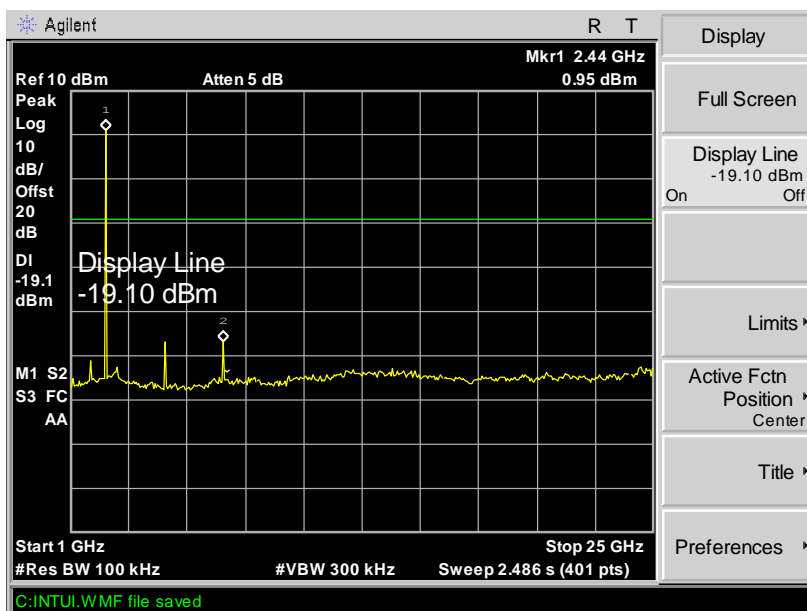
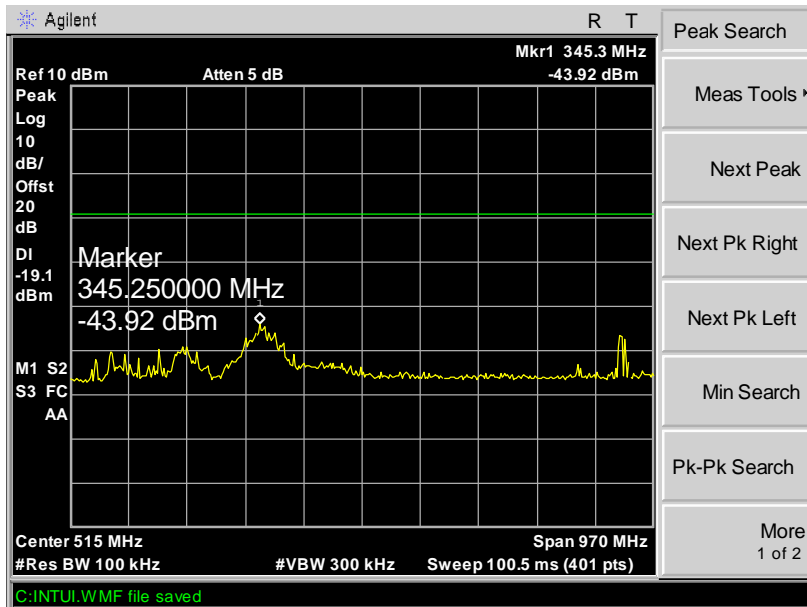


Upper Channel

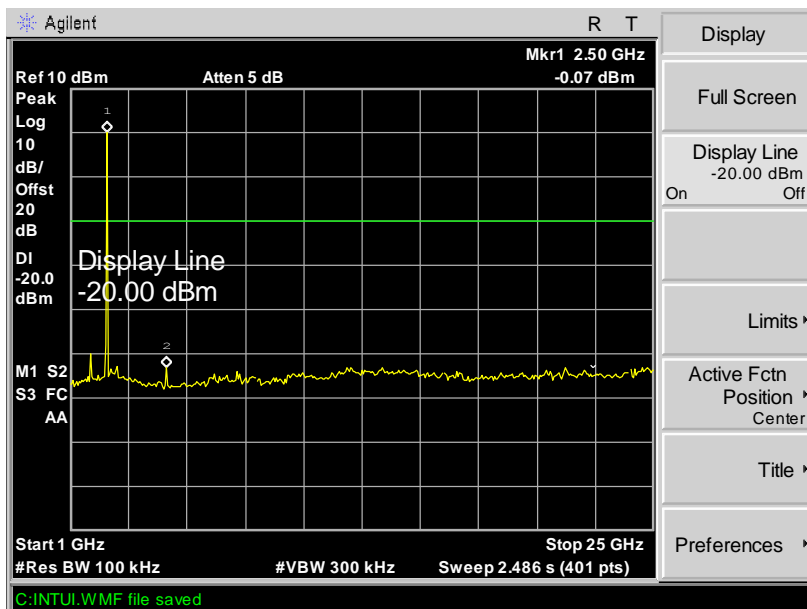
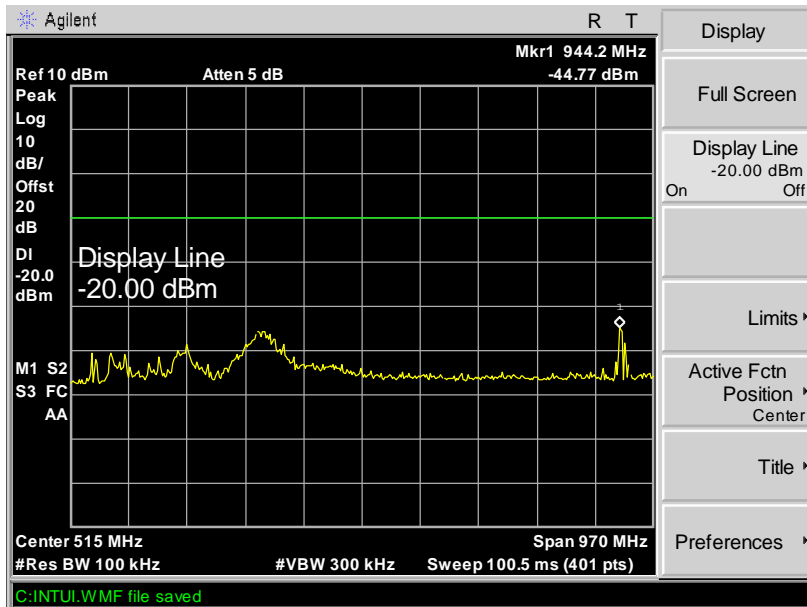


Modulation: 8DPSK



Lower Channel

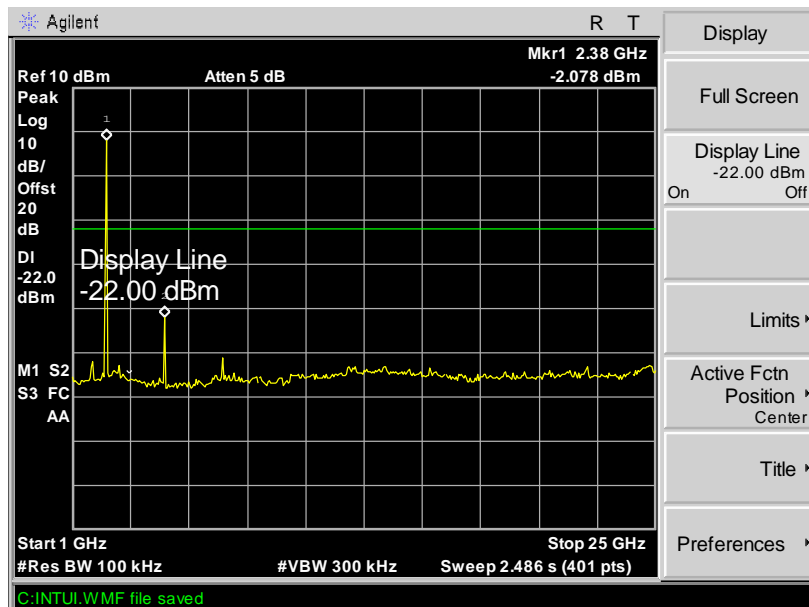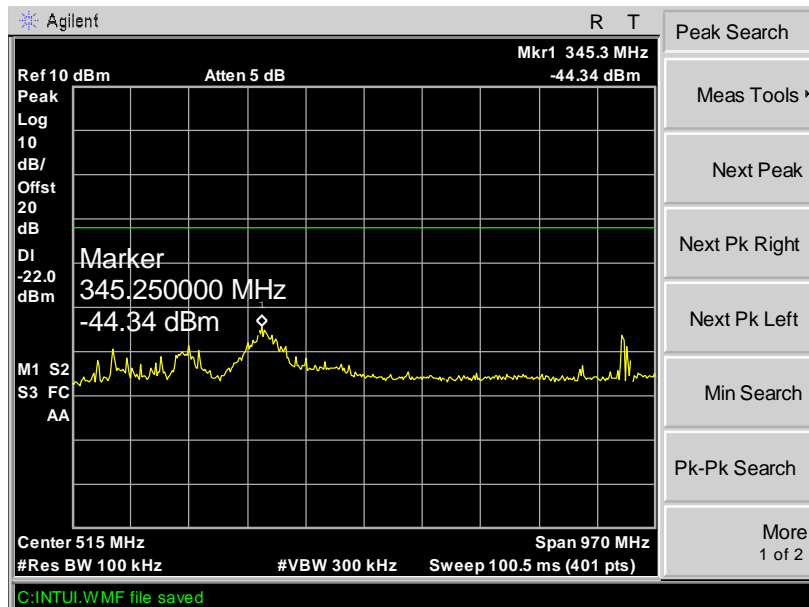

Middle Channel

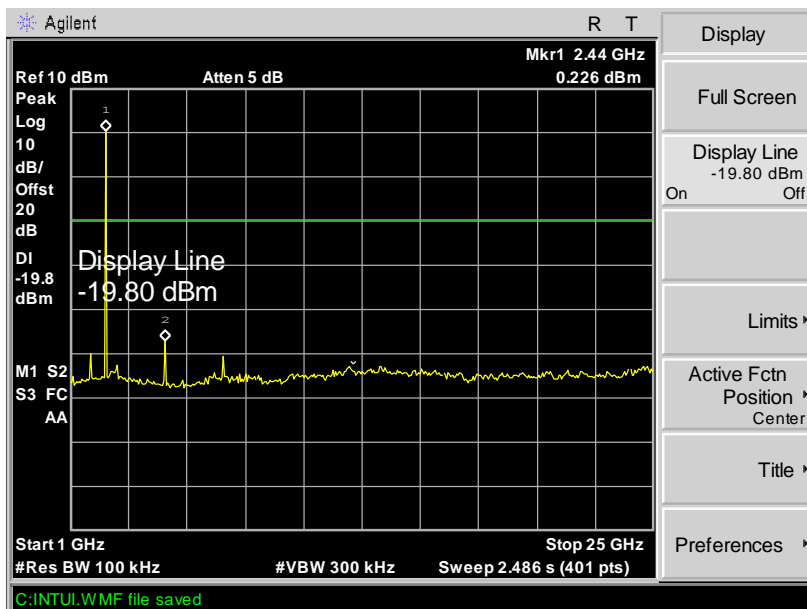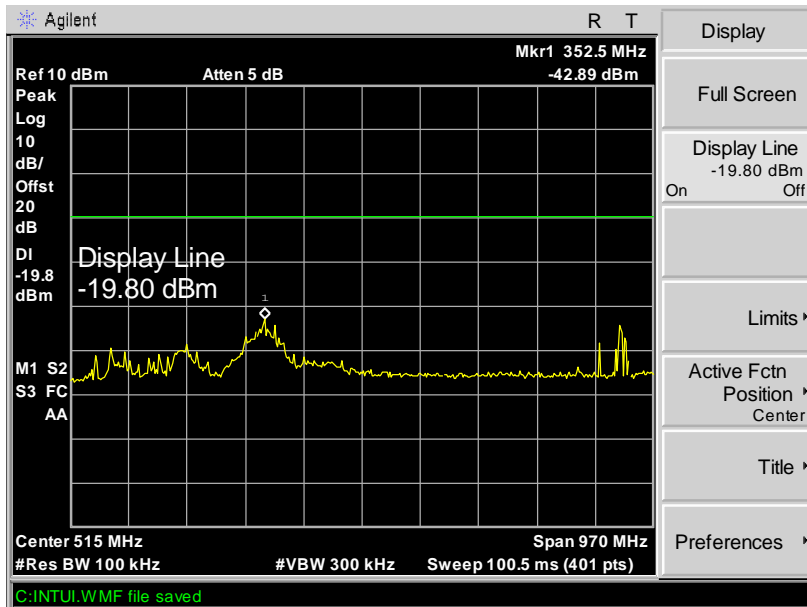

Upper Channel

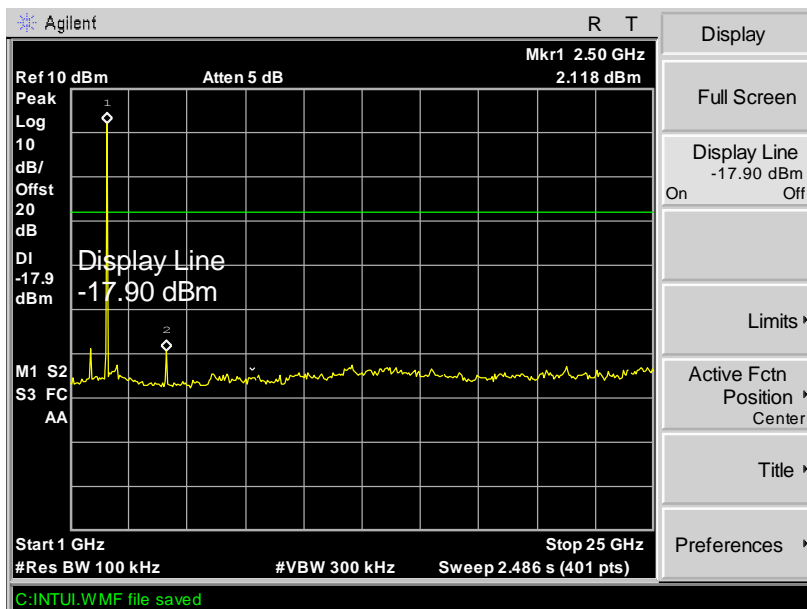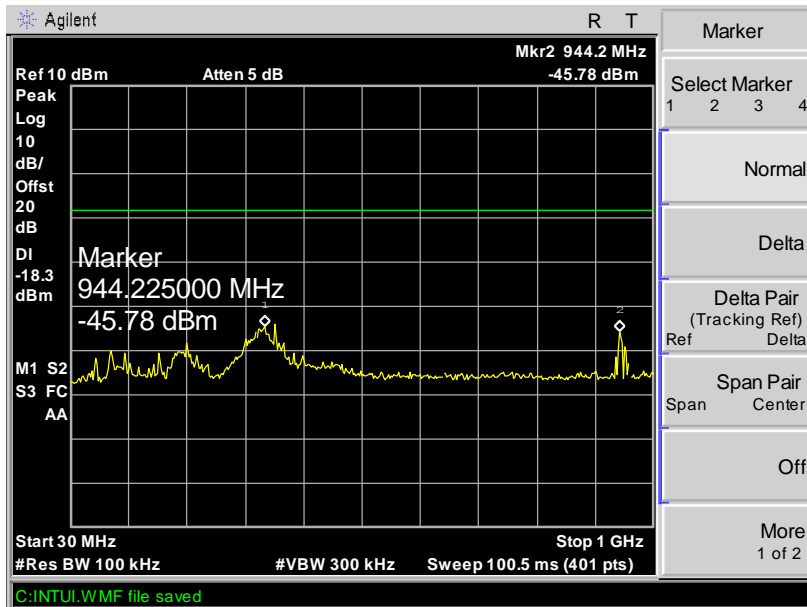



## 9 Band Edge Measurement


Test Requirement:	Section 15.247(d) In addition, radiated emissions which fall in the restricted bands. as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).
Test Method:	DA 00-705
Limit:	40.0 dBuV/m between 30MHz & 88MHz; 43.5 dBuV/m between 88MHz & 216MHz; 46.0 dBuV/m between 216MHz & 960MHz; 54.0 dBuV/m above 960MHz. 74.0 dBuV/m for peak above 1GHz 54.0 dBuV/m for AVG above 1GHz

### 9.1 Test Procedure

1. The EUT was placed on a turntable which is 0.8m above ground plane
2. Measurement Distance is 3m
3. Detector:
  - For Peak value:
    - RBW = 1 MHz for  $f \geq 1$  GHz
    - VBW  $\geq$  RBW; Sweep = auto
    - Detector function = peak
    - Trace = max hold
  - For AVG value:
    - RBW = 1 MHz for  $f \geq 1$  GHz
    - VBW = 10Hz; Sweep = auto
    - Detector function = AVG
    - Trace = max hold

## 9.2 Test Result

Test method: radiated  
 Test modulation: GFSK(the worst data)  
 Test mode: continuous transmitting  
 Lower Channel – Peak, Vertical

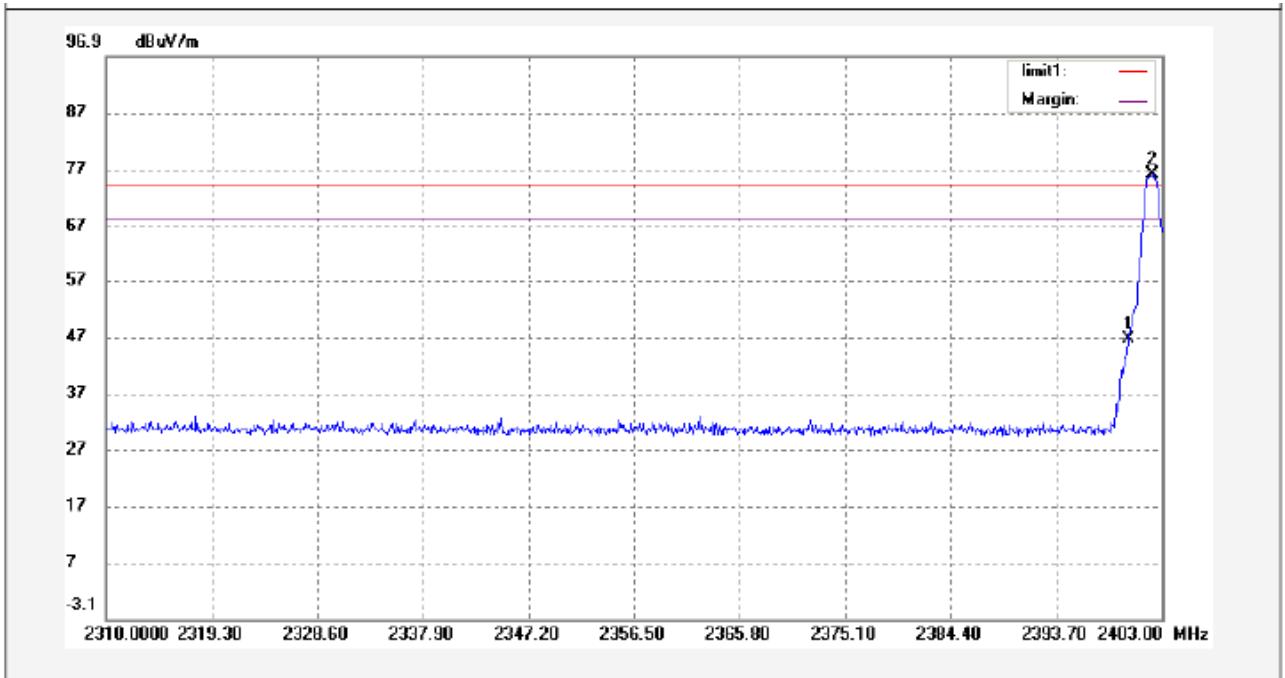


No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Remark
1	2400.000	62.10	-15.58	46.52	74.00	-27.48	peak	
2	2402.163	91.71	-15.59	76.12	74.00	2.12	peak	

No.	Freq. (MHz)	Duty Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Remark
1	-	-	-	-	-	AV	All emissions were more than 20 dB below the limit and therefore not reported

Remark: Mark 2 is fundamental which should be ignored.

Lower Channel – Peak, Horizontal

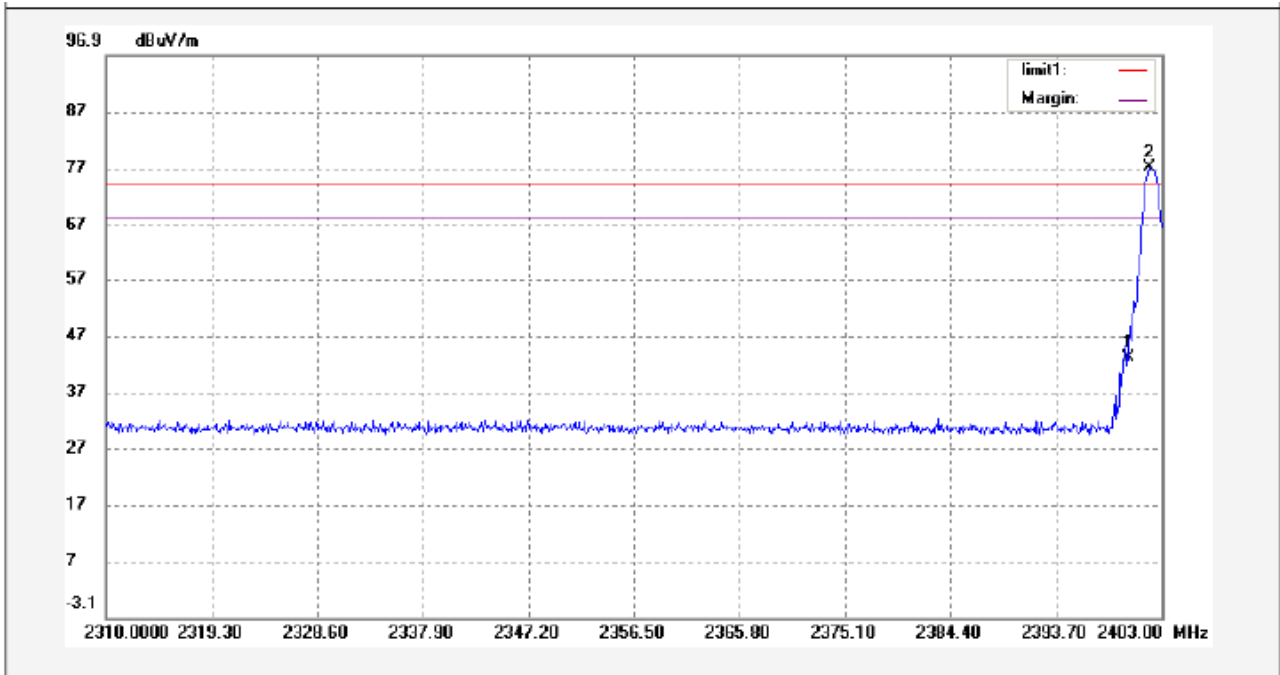


No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Remark
1	2400.000	58.60	-15.58	43.02	74.00	-30.98	peak	
2	2401.977	92.54	-15.58	76.96	74.00	2.96	peak	

No.	Freq. (MHz)	Duty Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Remark
1	-	-	-	-	-	AV	All emissions were more than 20 dB below the limit and therefore not reported

Remark: Mark 2 is fundamental which should be ignored.

Upper Channel – Peak, Vertical

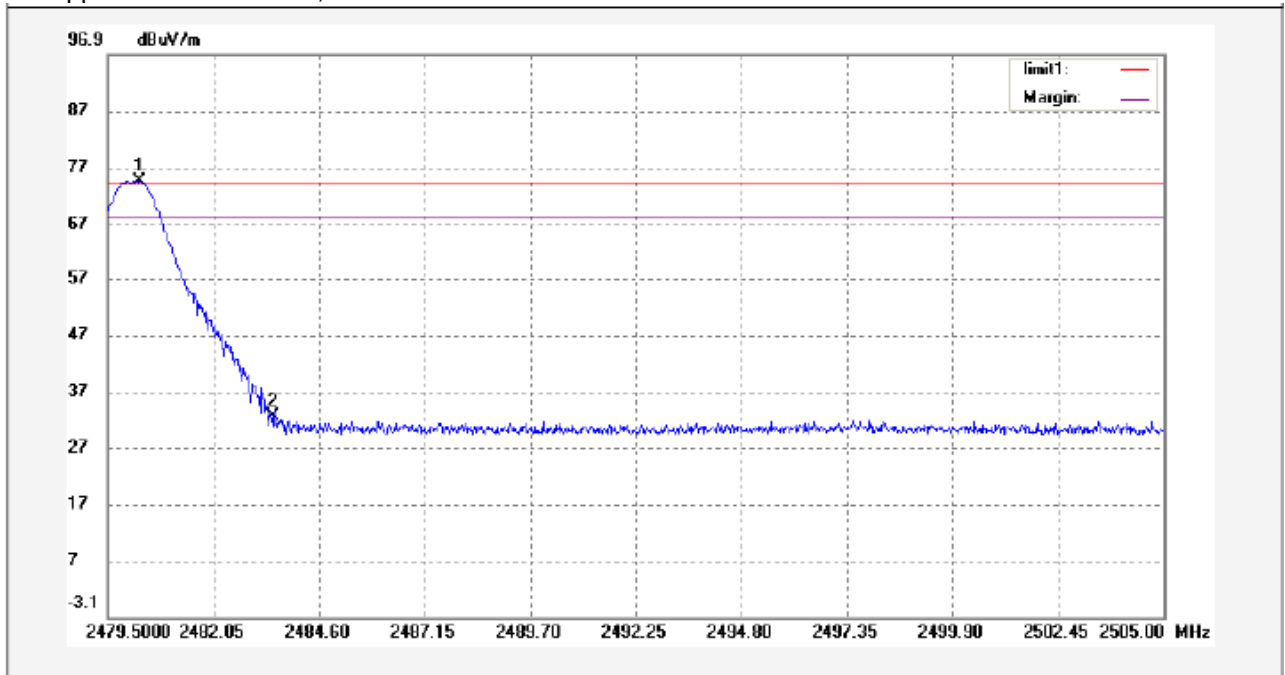


No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Remark
1	2480.240	90.25	-15.68	74.57	74.00	0.57	peak	
2	2483.500	48.28	-15.67	32.61	74.00	-41.39	peak	

No.	Freq. (MHz)	Duty Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Remark
1	-	-	-	-	-	AV	All emissions were more than 20 dB below the limit and therefore not reported

Remark: Mark 2 is fundamental which should be ignored.

Upper Channel – Peak, Horizontal

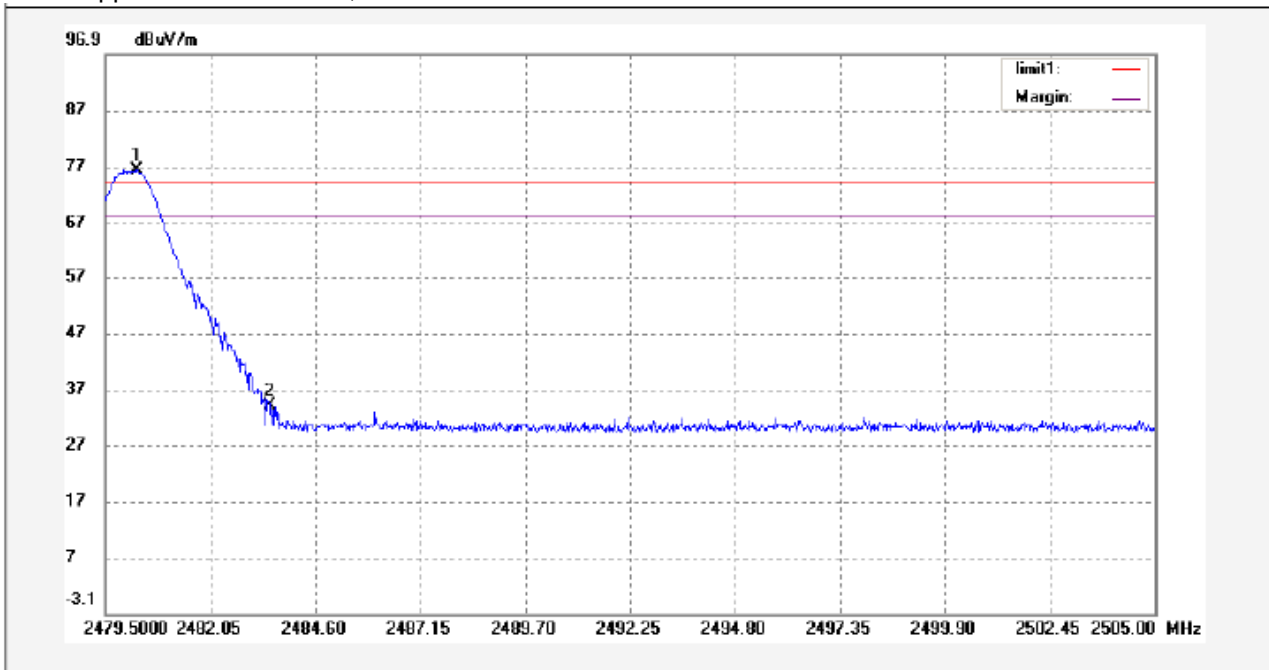

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Remark
1	2480.240	91.90	-15.68	76.22	74.00	2.22	peak	
2	2483.500	49.58	-15.67	33.91	74.00	-40.09	peak	

No.	Freq. (MHz)	Duty Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Remark
1	-	-	-	-	-	AV	All emissions were more than 20 dB below the limit and therefore not reported

Remark: Mark 2 is fundamental which should be ignored.

Test Method: Conducted


Test modulation: GFSK

Test mode: continuous transmitting

Lower Channel – Peak




Upper Channel – Peak

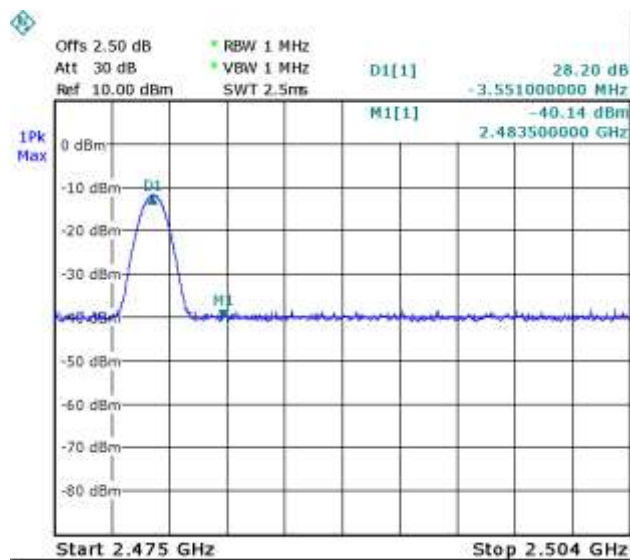


Test modulation: 4DQPSK

Test mode: continuous transmitting

Lower Channel – Peak

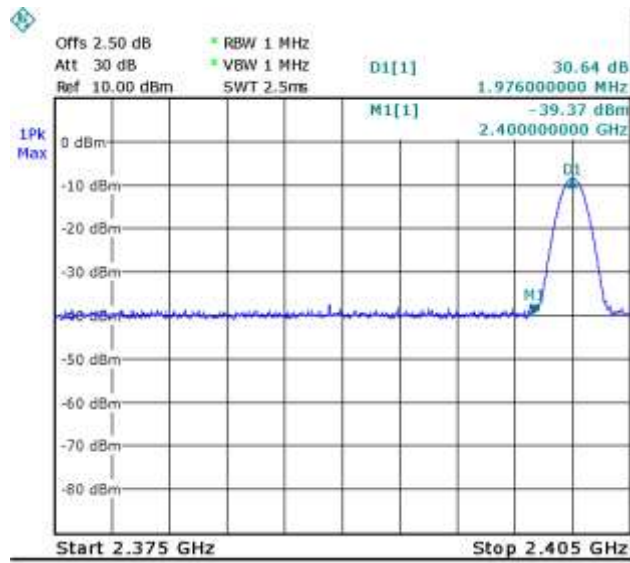

Upper Channel – Peak

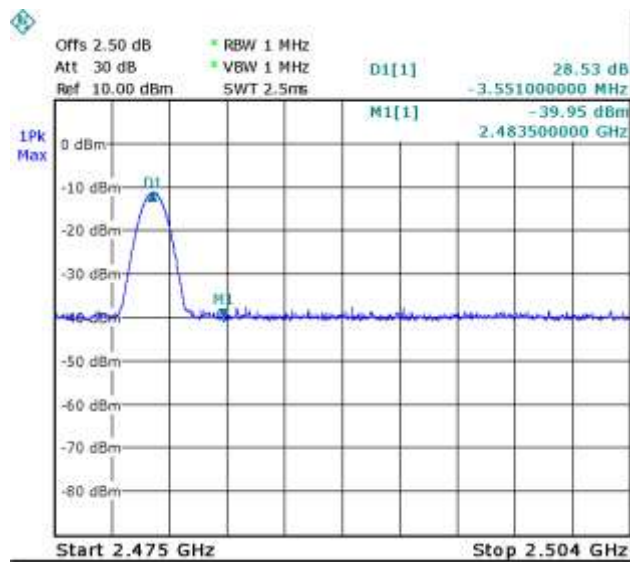


Test modulation: GFSK

Test mode: Hopping on Lower Channel – Peak




Upper Channel – Peak

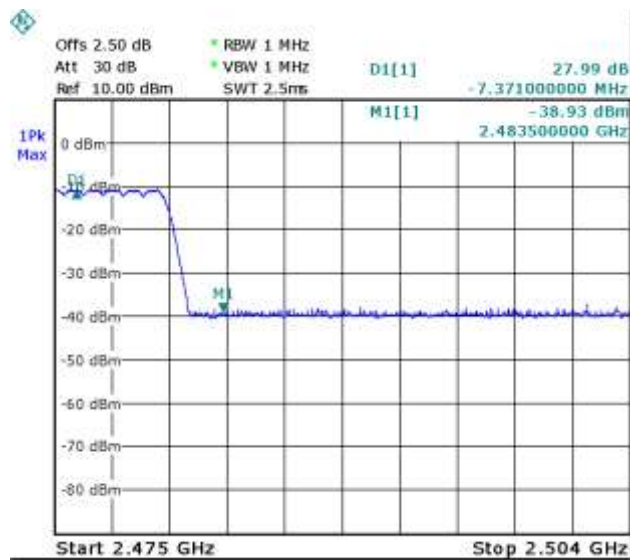




Test modulation: 4DQPSK

Test mode: Hopping on  
Lower Channel – Peak

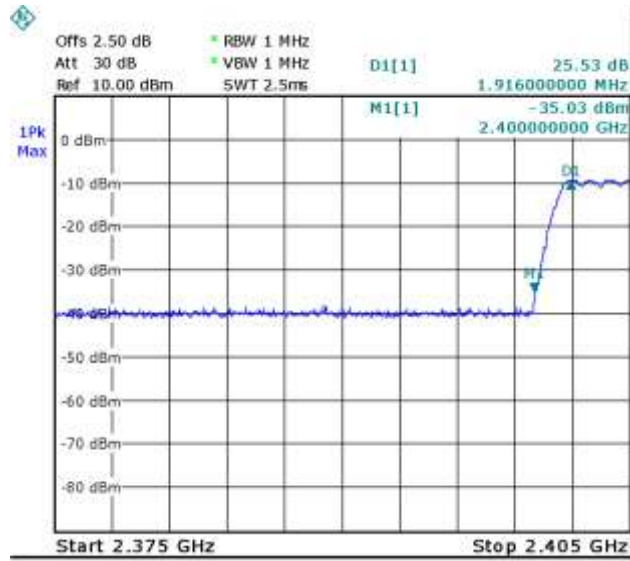

Upper Channel – Peak

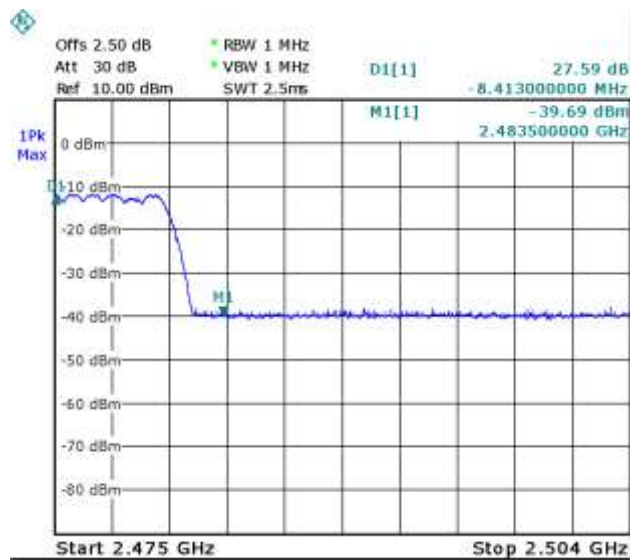

## 10 20 dB Bandwidth Measurement

Test Requirement: FCC CFR47 Part 15 Section 15.247  
 Test Method: DA 00-705  
 Test Mode: Test in fixing operating frequency at low, Middle, high channel.



### 10.1 Test Procedure:

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum;
2. Set the spectrum analyzer: RBW = 100kHz, VBW = 300kHz


### 10.2 Test Result:

Modulation	Test Channel	Bandwidth(MHz)
GFSK	Lower	1.120
	Middle	1.128
	Upper	1.128
Pi/4DQPSK	Lower	1.367
	Middle	1.357
	Upper	1.376
8DPSK	Lower	1.356
	Middle	1.356
	Upper	1.346

Test result plot as follows:

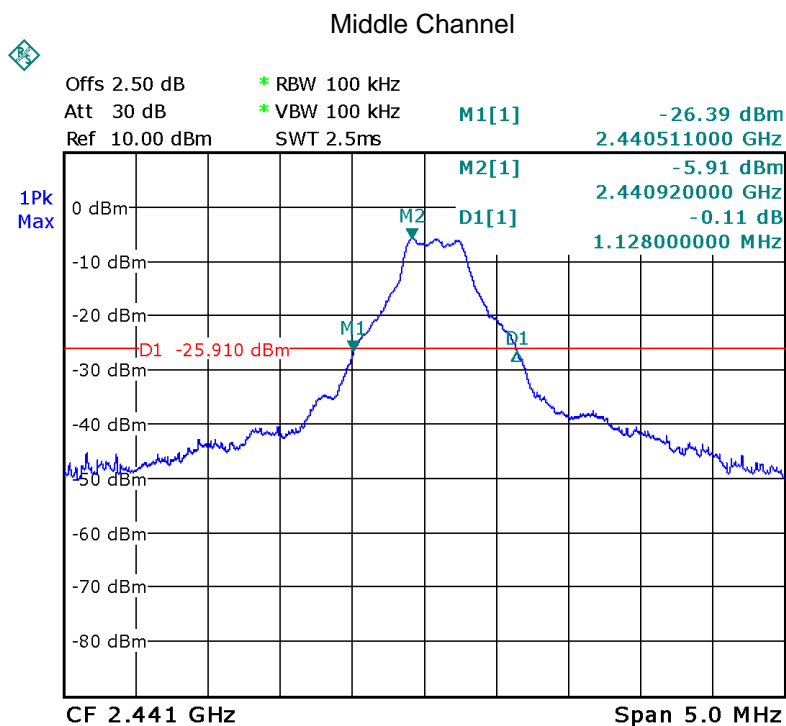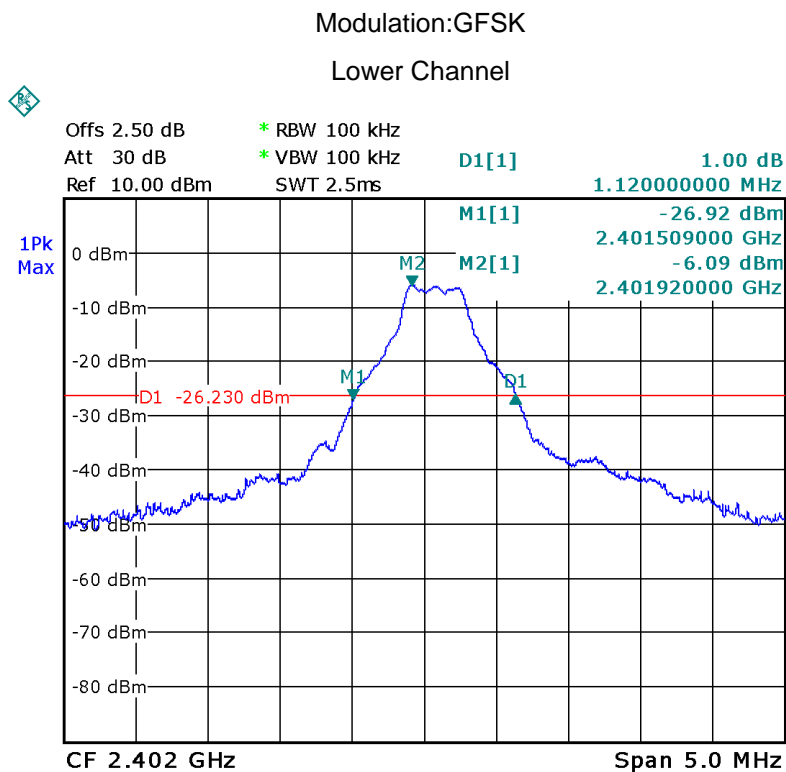




Upper Channel

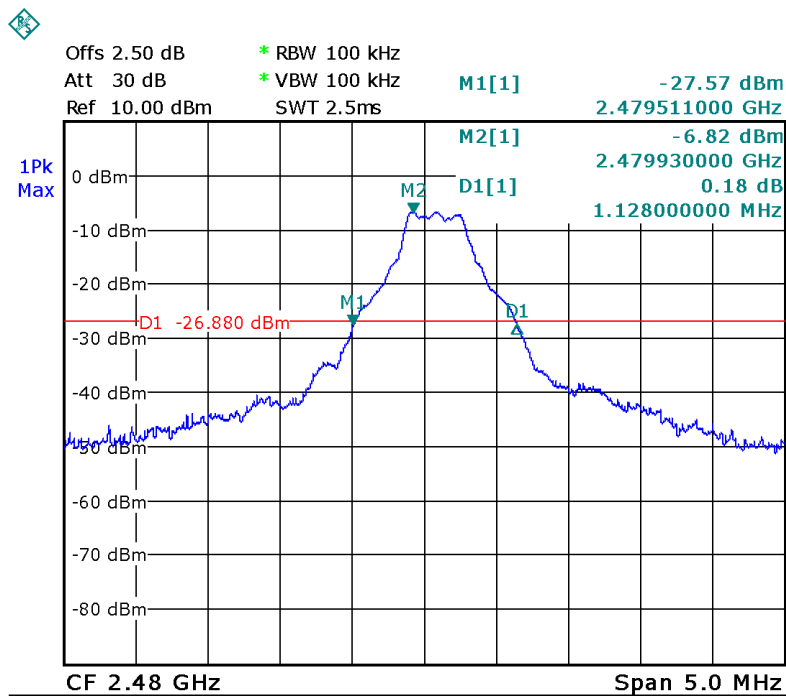

Modulation: Pi/4DQPSK


Lower Channel

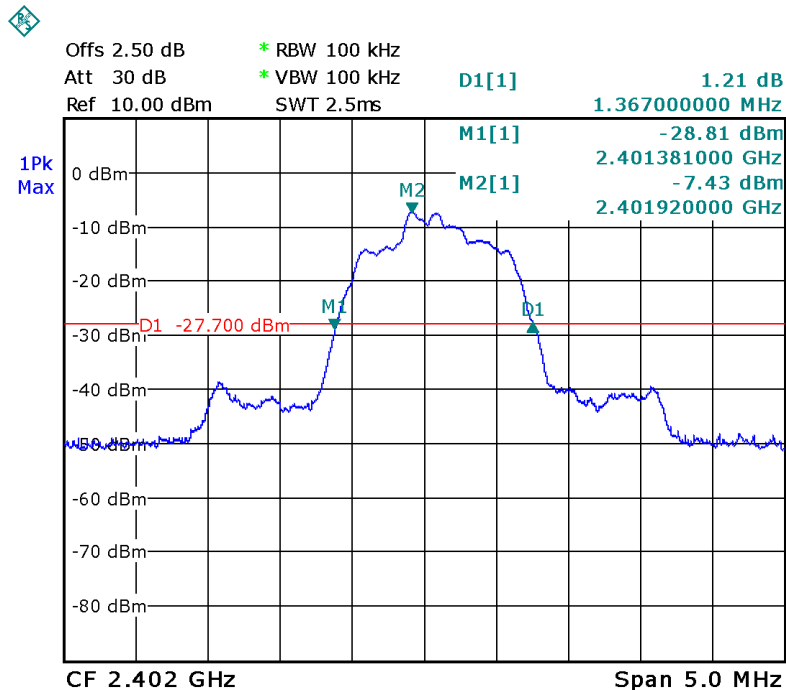

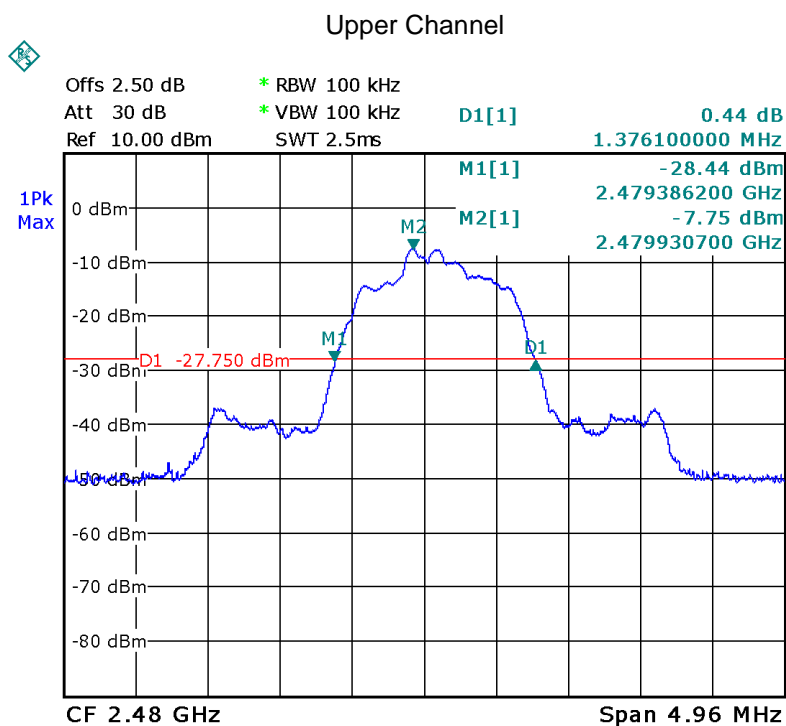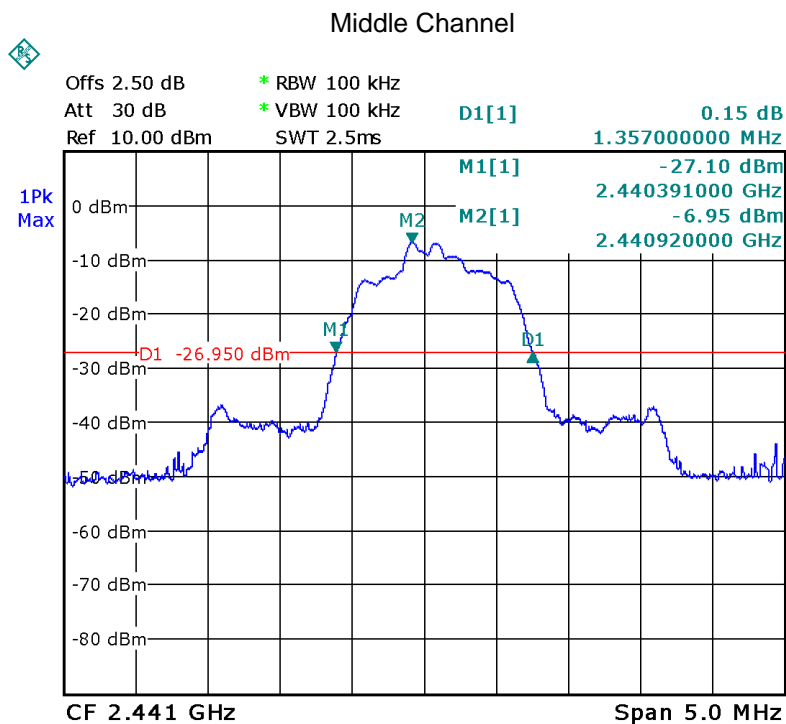



Modulation: 8DPSK

Lower Channel

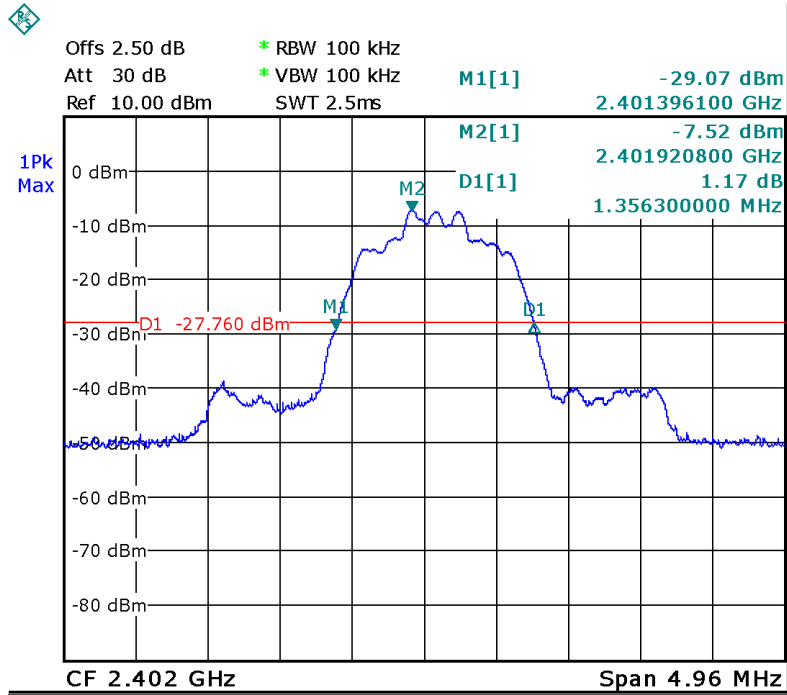

Middle Channel

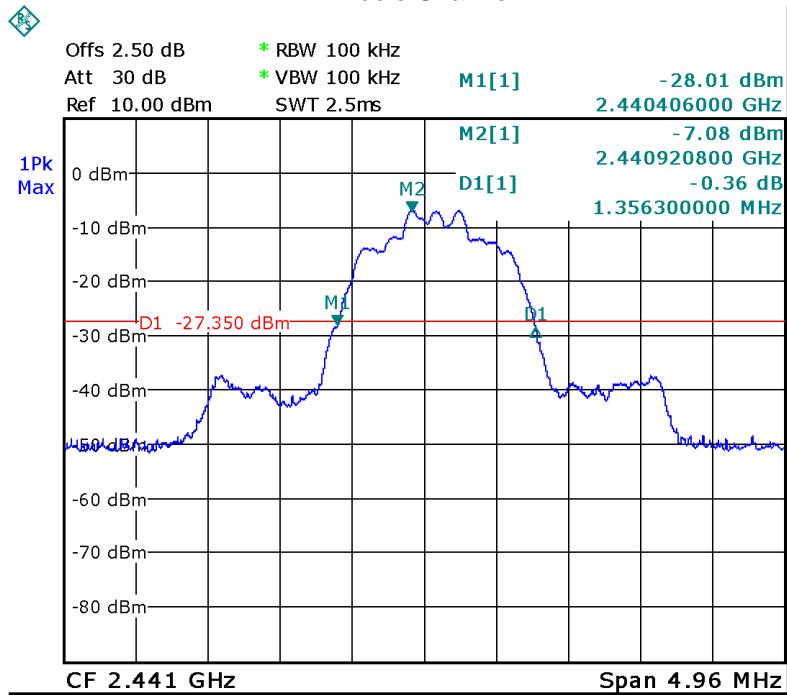

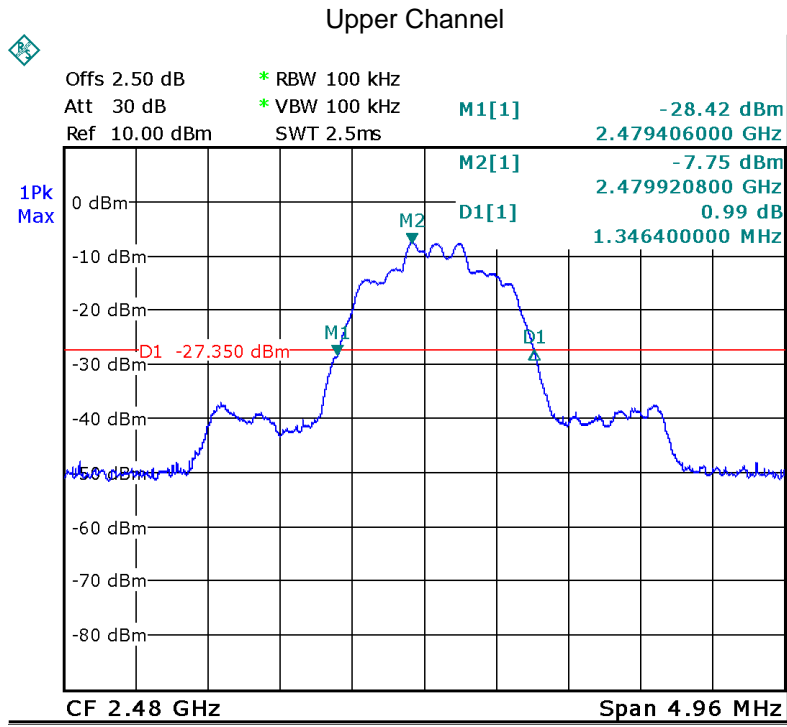

## 11 Maximum Peak Output Power

Test Requirement:	FCC CFR47 Part 15 Section 15.247
Test Method:	DA 00-705
Test Limit:	Regulation 15.247 (b)(1), For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts. Refer to the result "Number of Hopping Frequency" of this document. The 1watts (30 dBm) limit applies.
Test mode:	Test in fixing frequency transmitting mode.

### 11.1 Test Procedure:

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 3 MHz. VBW = 3 MHz. Sweep = auto; Detector Function = Peak.
3. Keep the EUT in transmitting at lowest, medium and highest channel individually. Record the max value.

### 11.2 Test Result:


Modulation	Test Channel	Output Power (dBm)	Limit (dBm)
GFSK	Lower	-1.10	20.97
	Middle	-0.97	20.97
	Upper	-1.69	20.97
Pi/4DQPSK	Lower	-2.37	20.97
	Middle	-2.09	20.97
	Upper	-2.61	20.97
8DPSK	Lower	-2.34	20.97
	Middle	-2.13	20.97
	Upper	-2.60	20.97

Test result plot as follows:




Modulation:GFSK


Lower Channel

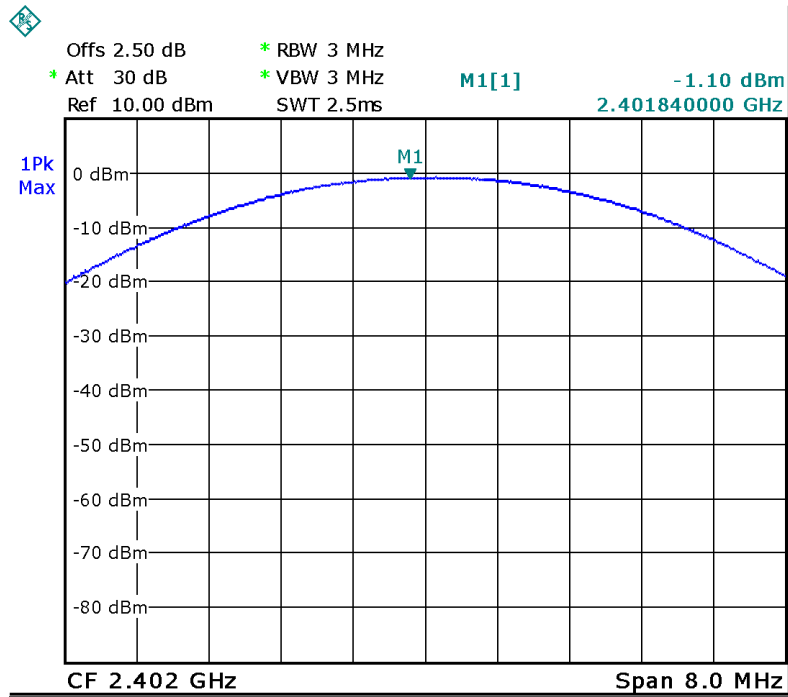

Middle Channel

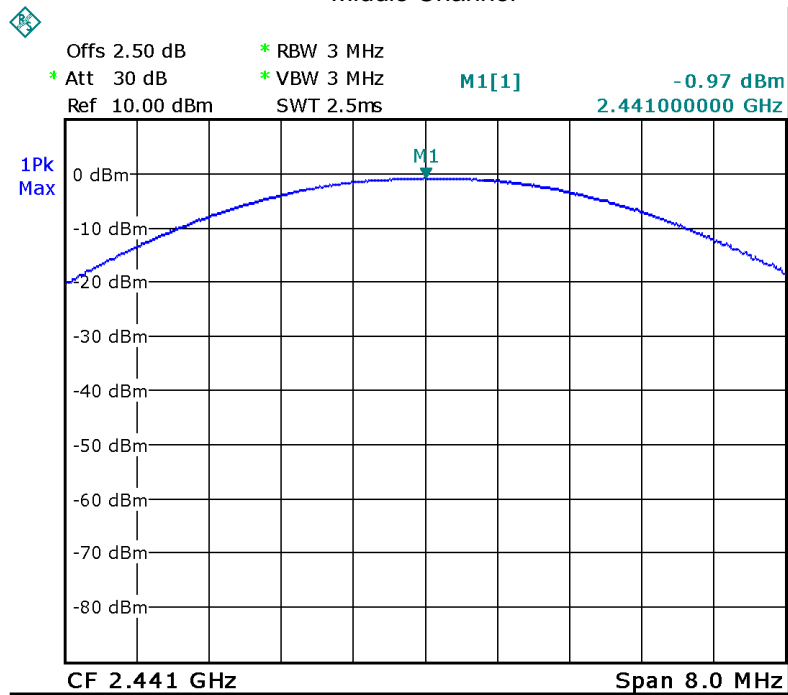


### Upper Channel

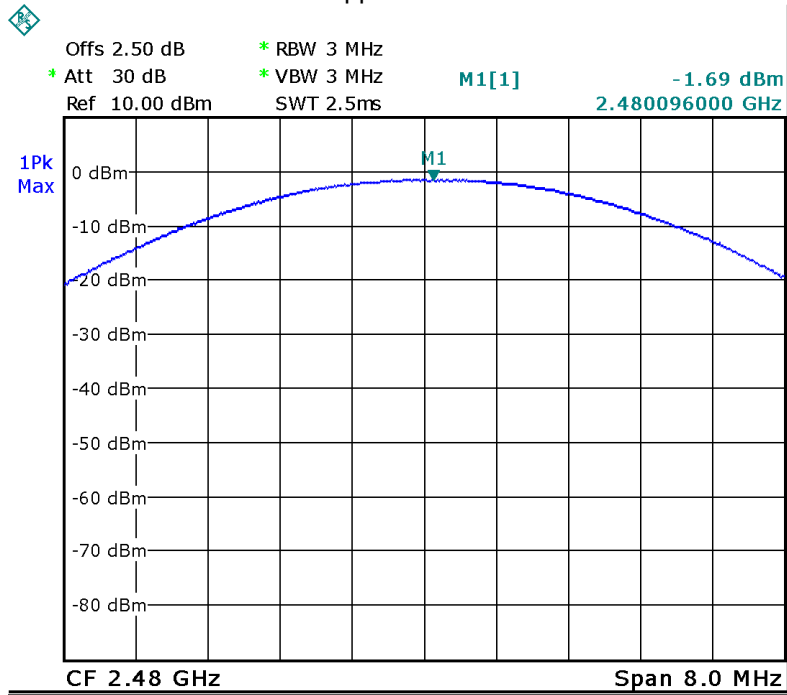


### Modulation: Pi/4DQPSK


### Lower Channel

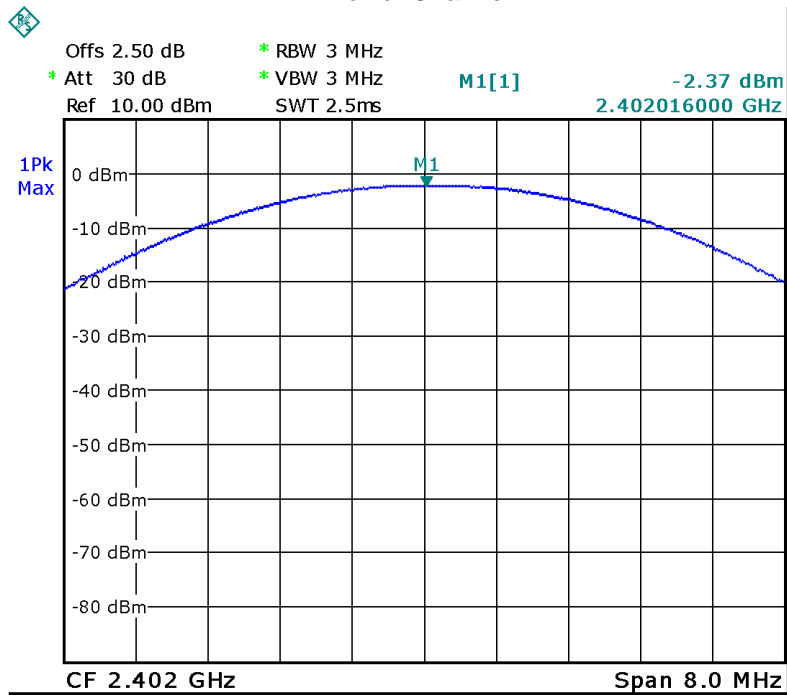

### Middle Channel

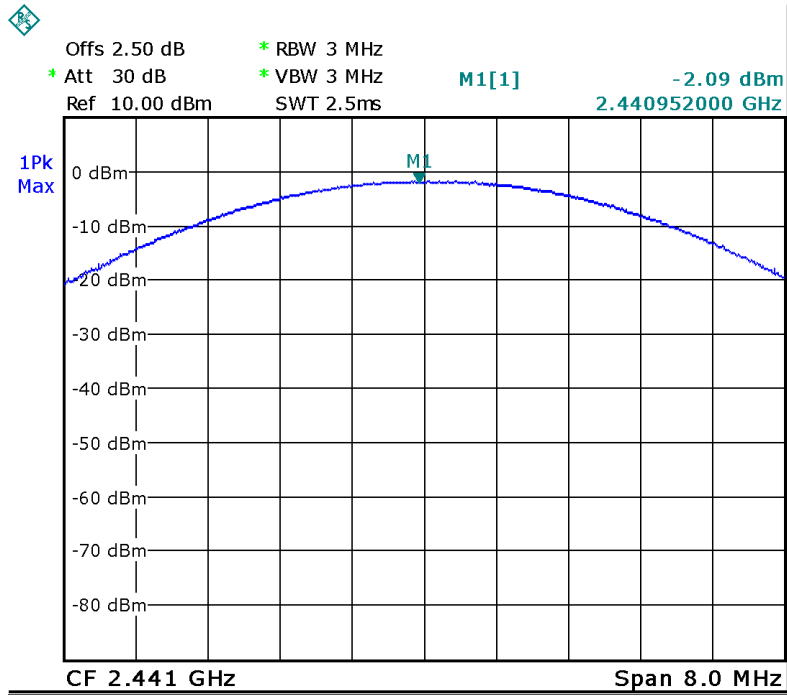


### Upper Channel

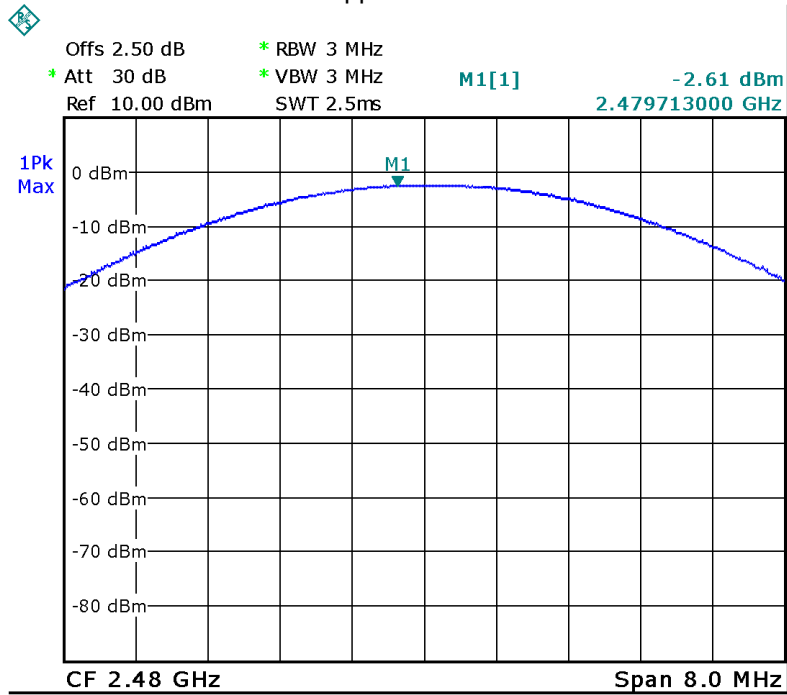


Modulation: 8DPSK


Lower Channel

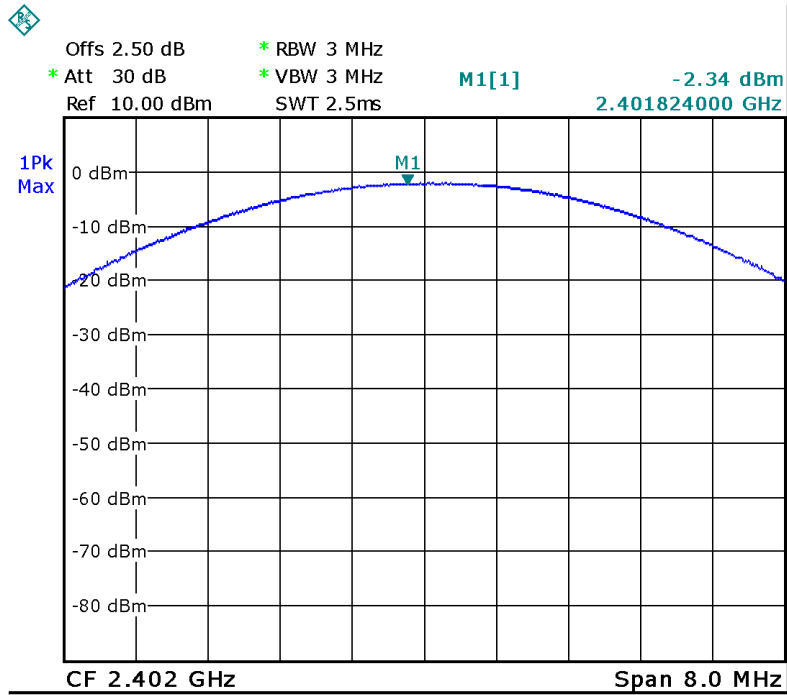

Middle Channel

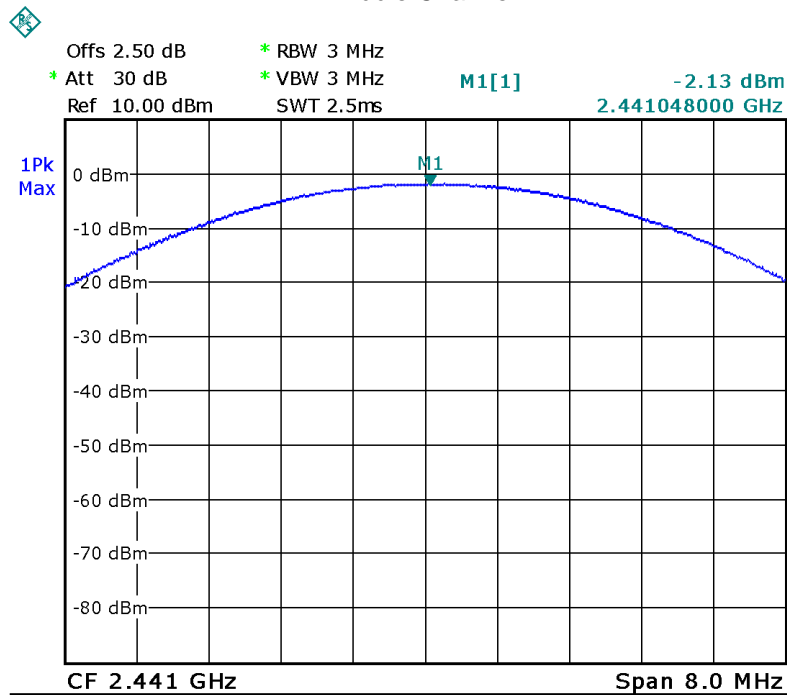

Upper Channel

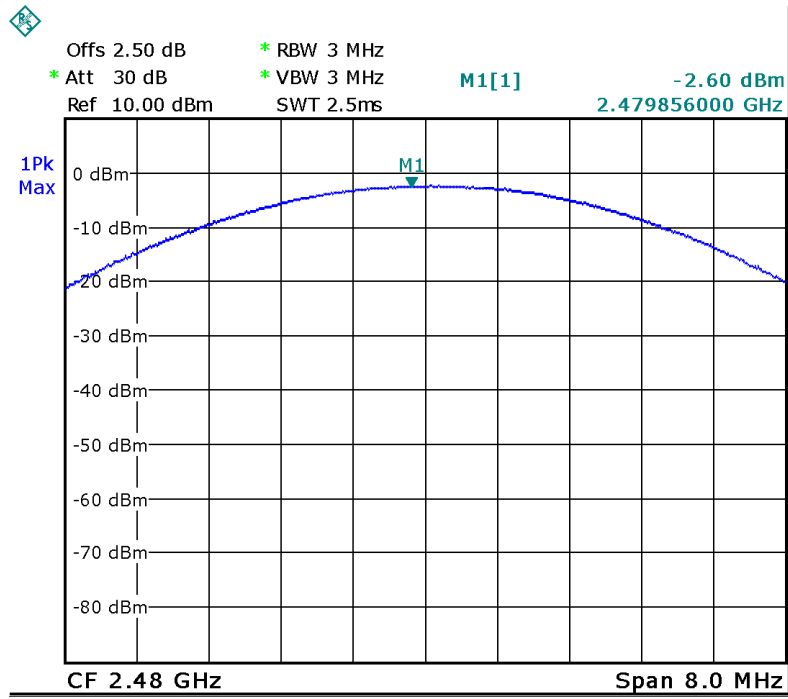

## 12 Hopping Channel Separation

Test Requirement: FCC CFR47 Part 15 Section 15.247

Test Method: DA 00-705

Test Limit: Regulation 15.247(a)(1) Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 1W.

Test Mode: Test in hopping transmitting operating mode.

### 12.1 Test Procedure:

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 100KHz. VBW = 300KHz , Span = 5MHz. Sweep = auto; Detector Function = Peak. Trace = Max hold.
3. Allow the trace to stabilize. Use the marker-delta function to determine the separation between the peaks of the adjacent channels. The limit is specified in one of the subparagraphs of this Section  
Submit this plot.


### 12.2 Test Result:

Modulation	Test Channel	Separation (MHz)
GFSK	Lower	1.006
	Middle	1.006
	Upper	1.006
Pi/4DQPSK	Lower	1.006
	Middle	1.006
	Upper	1.006
8DPSK	Lower	1.006
	Middle	1.006
	Upper	1.018


Test result plot as follows:

Modulation:GFSK


Lower Channel

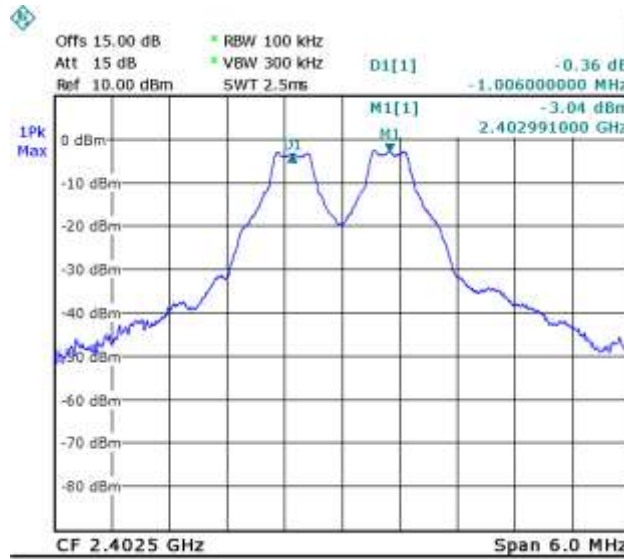

Middle Channel

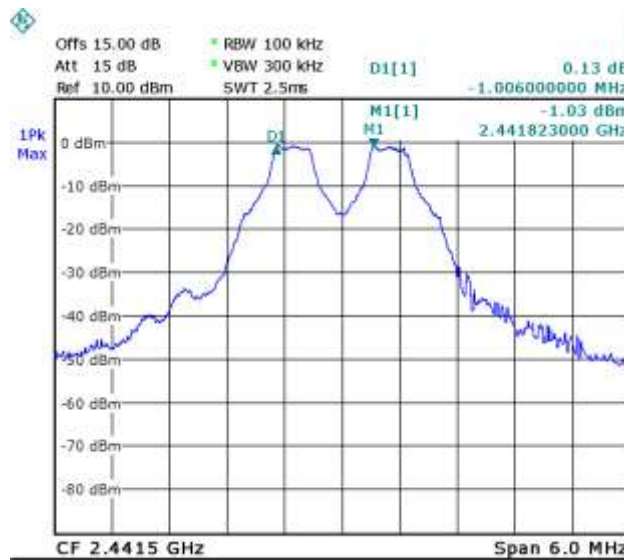


Upper Channel

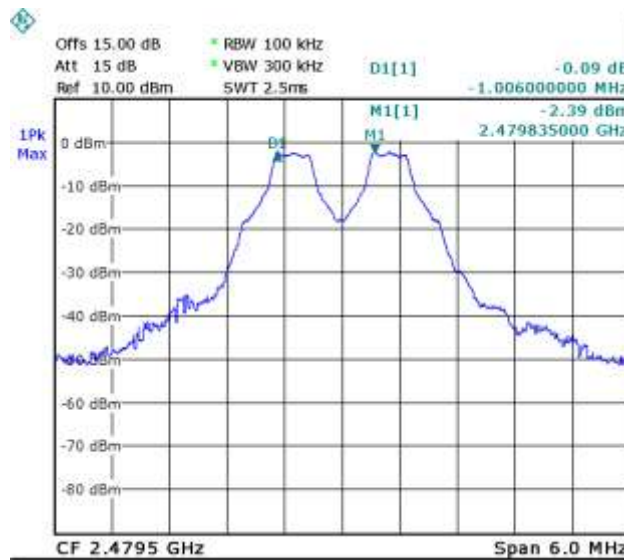

Modulation: Pi/4DQPSK

Lower Channel

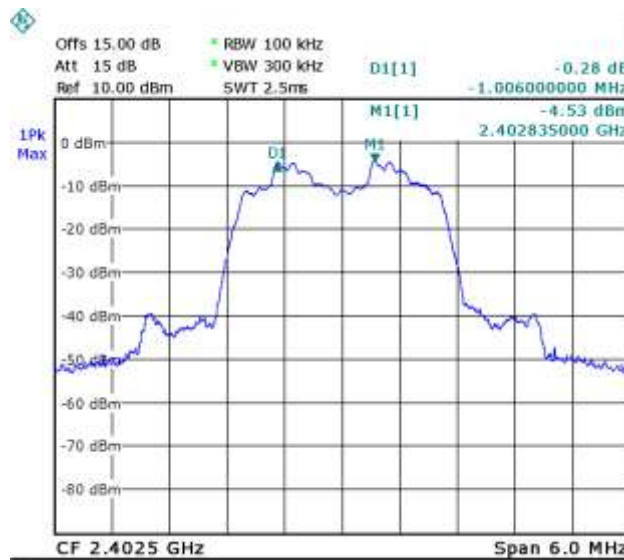




### Middle Channel




### Upper Channel

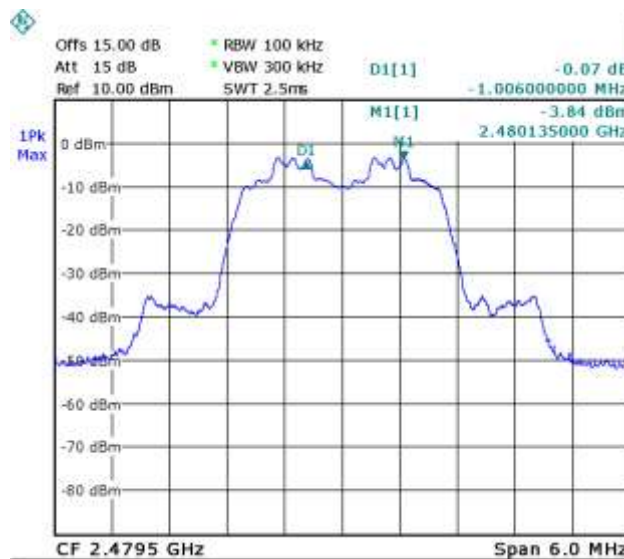


Modulation: 8DPSK


Lower Channel

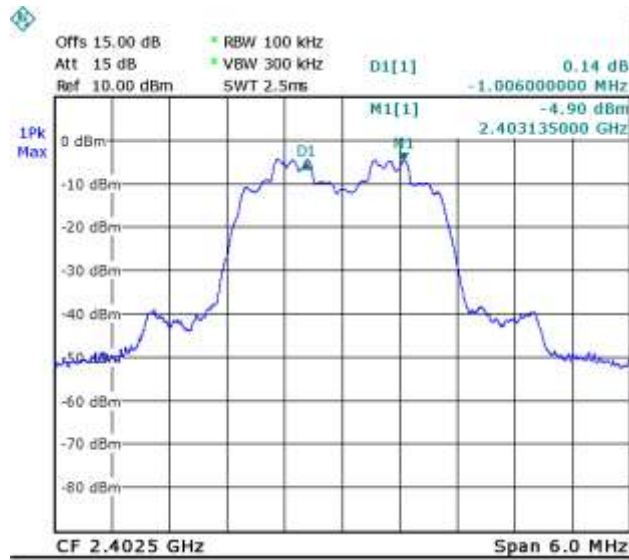

Middle Channel

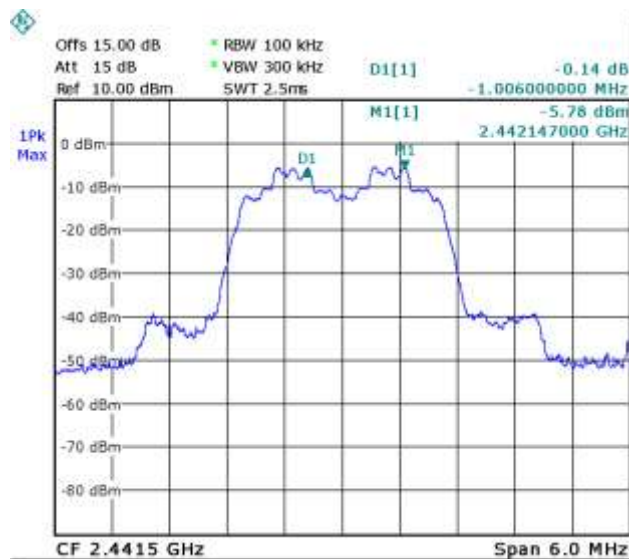

Upper Channel

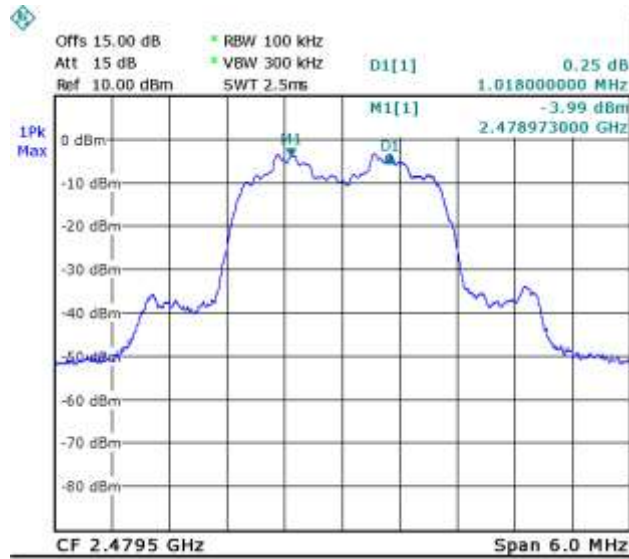

## 13 Number of Hopping Frequency


Test Requirement:	FCC CFR47 Part 15 Section 15.247
Test Method:	DA 00-705
Test Limit:	Regulation 15.247 (a)(1)(iii) Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels.
Test Mode:	Test in hopping transmitting operating mode.

### 13.1 Test Procedure:


1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 1MHz. VBW = 1MHz. Sweep = auto; Detector Function = Peak. Trace = Max hold.
3. Allow the trace to stabilize. It may prove necessary to break the span up to sections. in order to clearly show all of the hopping frequencies. The limit is specified in one of the subparagraphs of this Section.
4. Set the spectrum analyzer: Centre Frequency = 2.441GHz, Span = 86MHz. Sweep=auto;

### 13.2 Test Result:


**Total Channels are 79 Channels.**

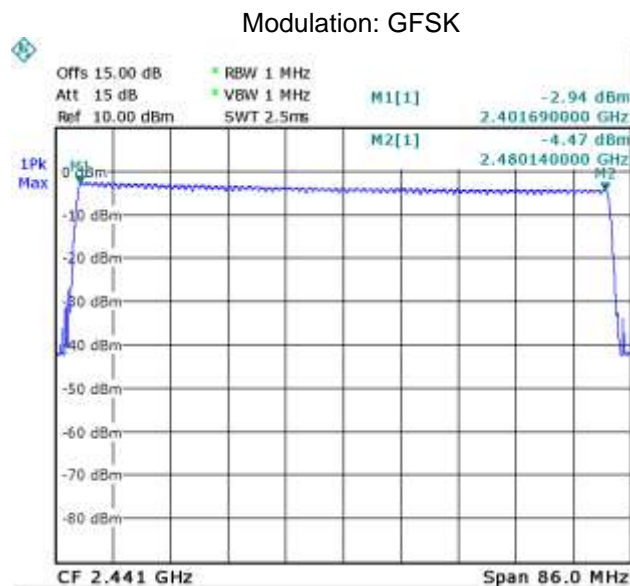

Modulation: Pi/4DQPSK

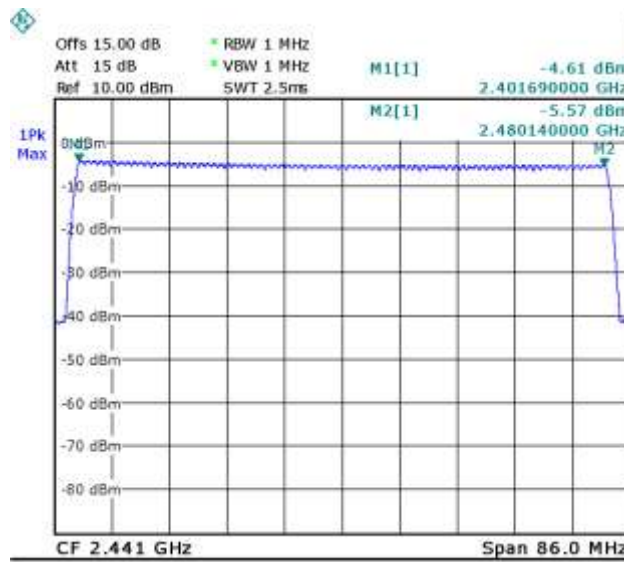

Modulation: 8DPSK

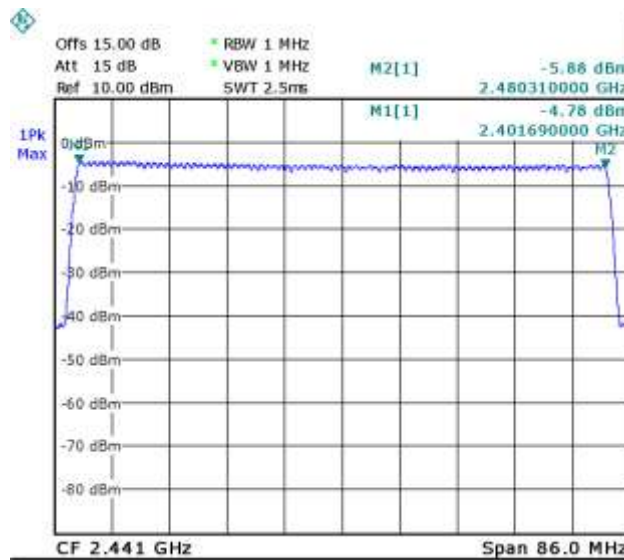

## 14 Dwell Time

Test Requirement:	FCC CFR47 Part 15 Section 15.247
Test Method:	DA 00-705
Test Limit:	Regulation 15.247(a)(1)(iii) Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.
Test Mode:	Test in hopping transmitting operating mode.

### 14.1 Test Procedure:

- 1.Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
- 2.Set spectrum analyzer span = 0. centered on a hopping channel;
- 3.Set RBW = 1MHz and VBW = 3MHz.Sweep = as necessary to capture the entire dwell time per hopping channel.
- 4.Use the marker-delta function to determine the dwell time. If this value varies with different modes of operation (e.g.. data rate. modulation format. etc.). repeat this test for each variation. The limit is specified in one of the subparagraphs of this Section. Submit this plot(s).

### 14.2 Test Result:

Dwell time = Pulse wide x (Hopping rate / Number of channels) x Period

The test period:  $T = 0.4(s) * 79 = 31.6 (s)$

DH5 Packet permit maximum  $1600 / 79 / 6$  hops per second in each channel (5 time slots RX, 1 time slot TX).

DH3 Packet permit maximum  $1600 / 79 / 4$  hops per second in each channel (3 time slots RX, 1 time slot TX).


DH1 Packet permit maximum  $1600 / 79 / 2$  hops per second in each channel (1 time slot RX, 1 time slot TX). So, the Dwell Time can be calculated as follows:

Data Packet	Dwell Time(s)
DH5	$1600/79/6*31.6*(MkrDelta)/1000$
DH3	$1600/79/4*31.6*(MkrDelta)/1000$
DH1	$1600/79/2*31.6*(MkrDelta)/1000$
Remark	Mkr Delta is single pulse time.


Modulation	Frequency	Data Packet	Mkr Delta(ms)	Dwell Time(s)	Limits(s)
GFSK	Lower channel	DH1	0.440	0.1408	0.400
	Middle channel		0.420	0.1344	0.400
	Upper channel		0.440	0.1408	0.400
	Lower channel	DH3	1.680	0.2688	0.400
	Middle channel		1.680	0.2688	0.400
	Upper channel		1.700	0.2720	0.400
	Lower channel	DH5	2.940	0.3136	0.400
	Middle channel		2.980	0.3179	0.400
	Upper channel		2.940	0.3136	0.400
Pi/4DQPSK	Lower channel	DH1	0.480	0.1536	0.400
	Middle channel		0.520	0.1664	0.400
	Upper channel		0.480	0.1536	0.400
	Lower channel	DH3	1.720	0.2752	0.400
	Middle channel		1.740	0.2784	0.400
	Upper channel		1.740	0.2784	0.400
	Lower channel	DH5	2.960	0.3157	0.400
	Middle channel		3.020	0.3221	0.400
	Upper channel		3.000	0.3200	0.400
8DPSK	Lower channel	DH1	0.460	0.1472	0.400
	Middle channel		0.460	0.1472	0.400
	Upper channel		0.440	0.1408	0.400
	Lower channel	DH3	1.820	0.2912	0.400
	Middle channel		1.760	0.2816	0.400
	Upper channel		1.700	0.2720	0.400
	Lower channel	DH5	3.020	0.3221	0.400
	Middle channel		3.020	0.3221	0.400
	Upper channel		2.980	0.3179	0.400

Modulation:GFSK

Data Packet:DH1,Lower channel

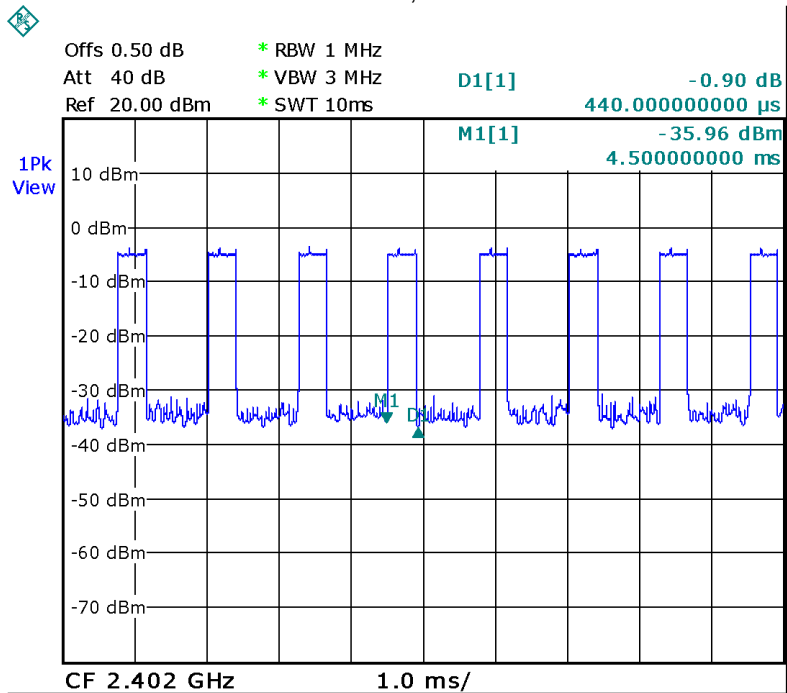


Data Packet:DH1,Middle channel

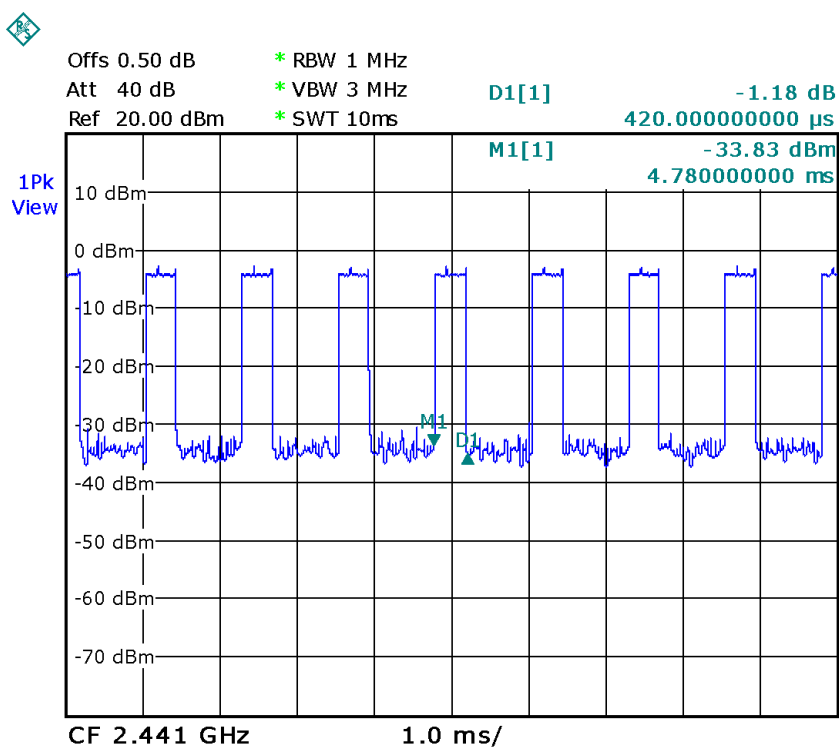





Data Packet:DH1,Upper channel

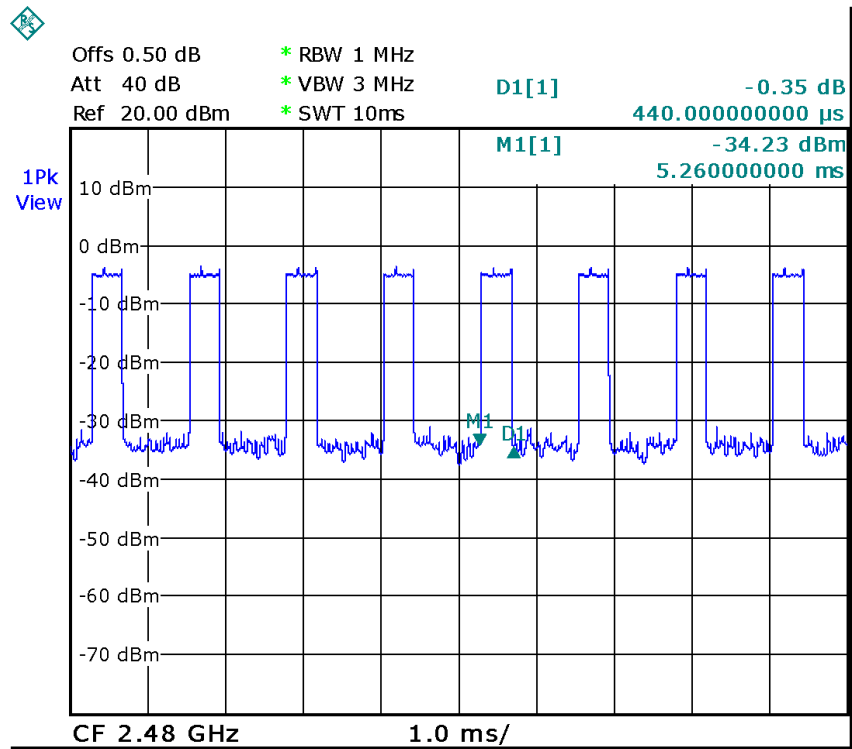


Data Packet:DH3,Lower channel

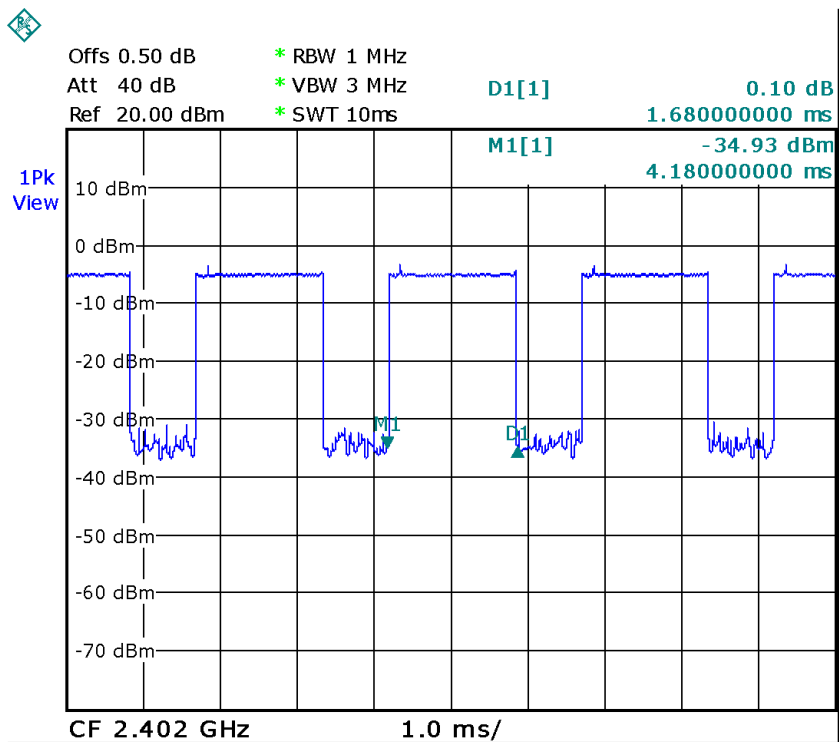


Data Packet:DH3,Middle channel

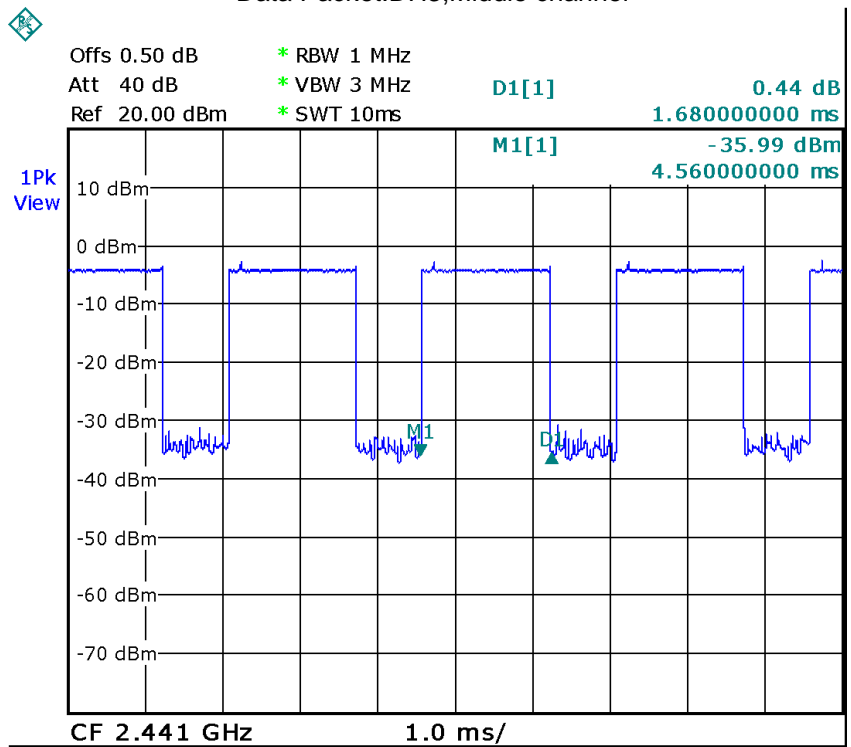


Data Packet:DH3,Upper channel

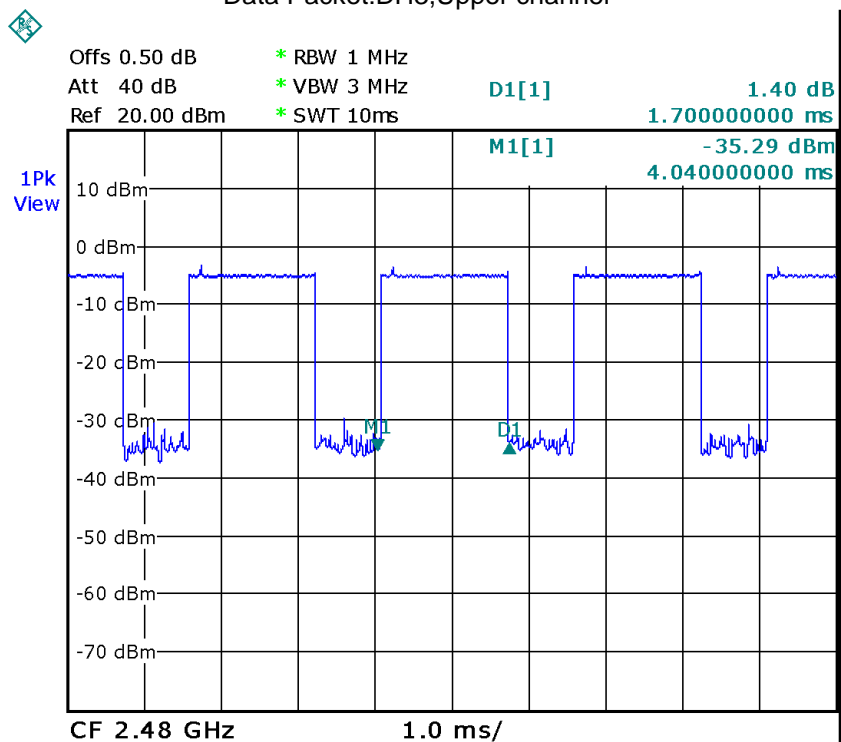



Data Packet:DH5,Lower channel


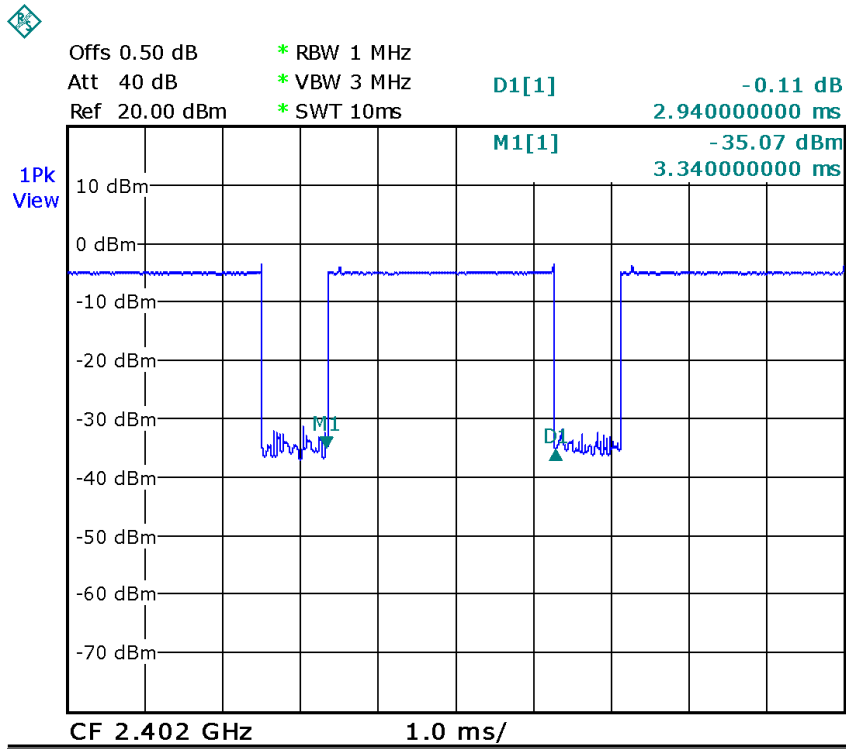




Data Packet:DH5,Middle channel

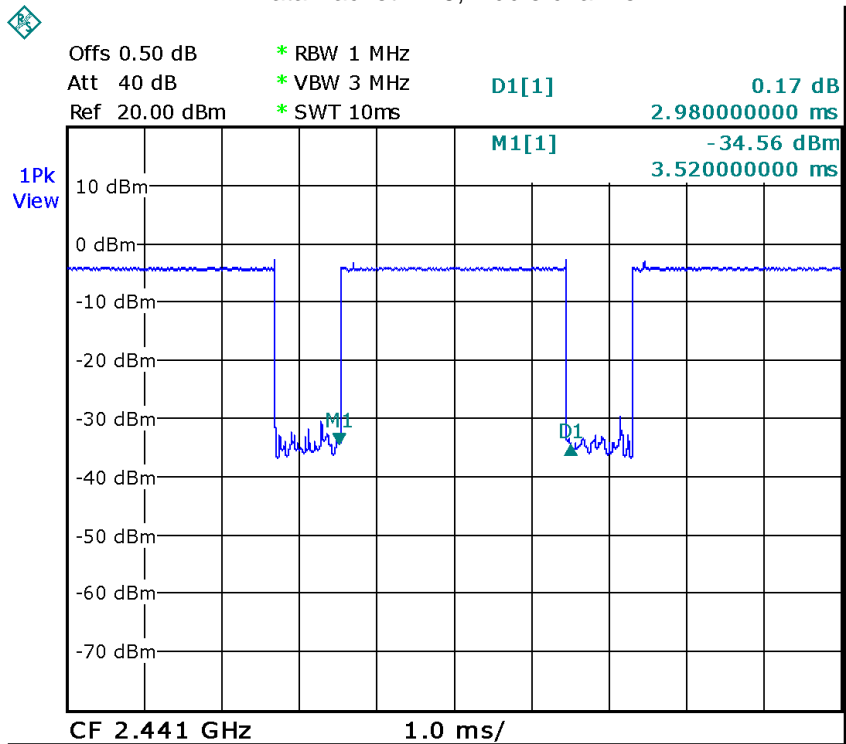




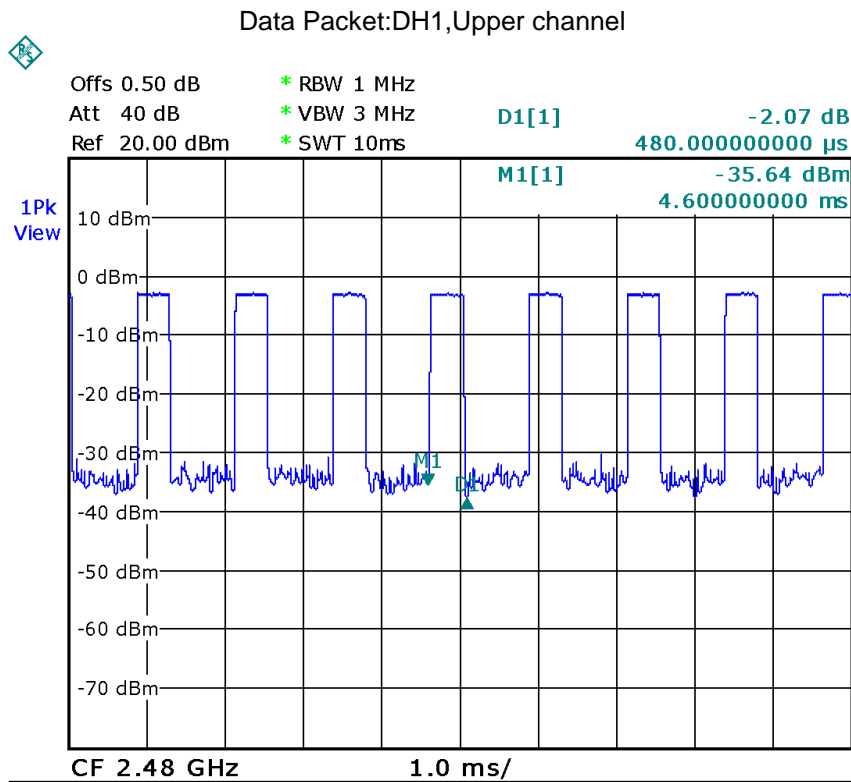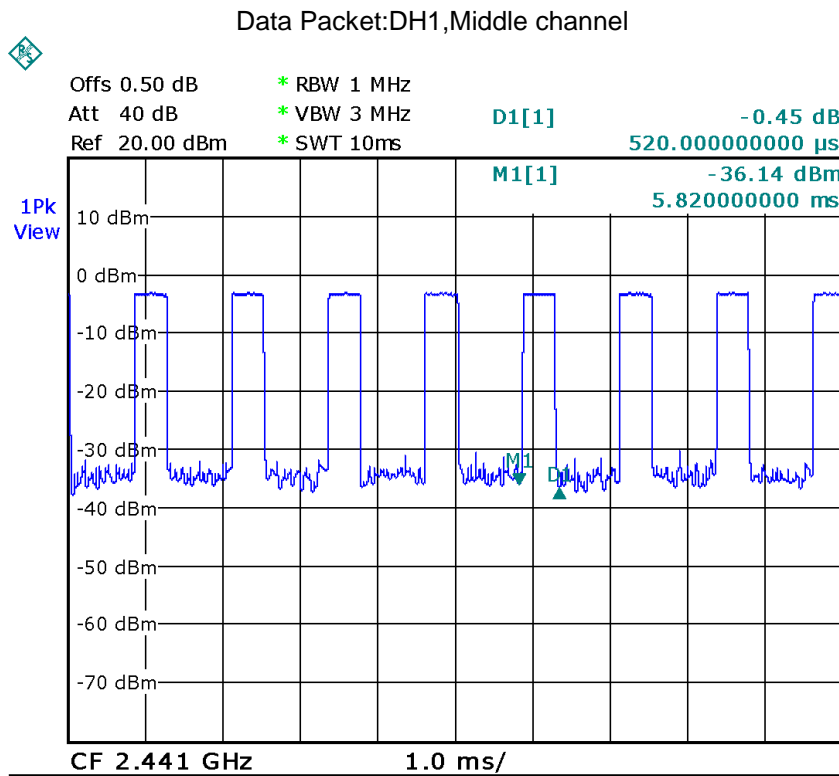

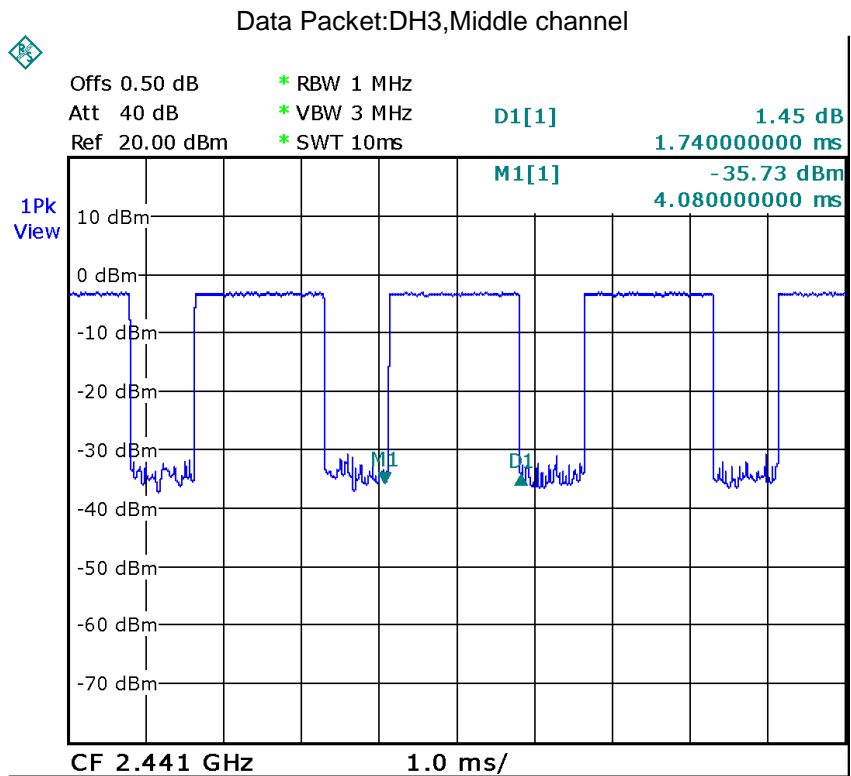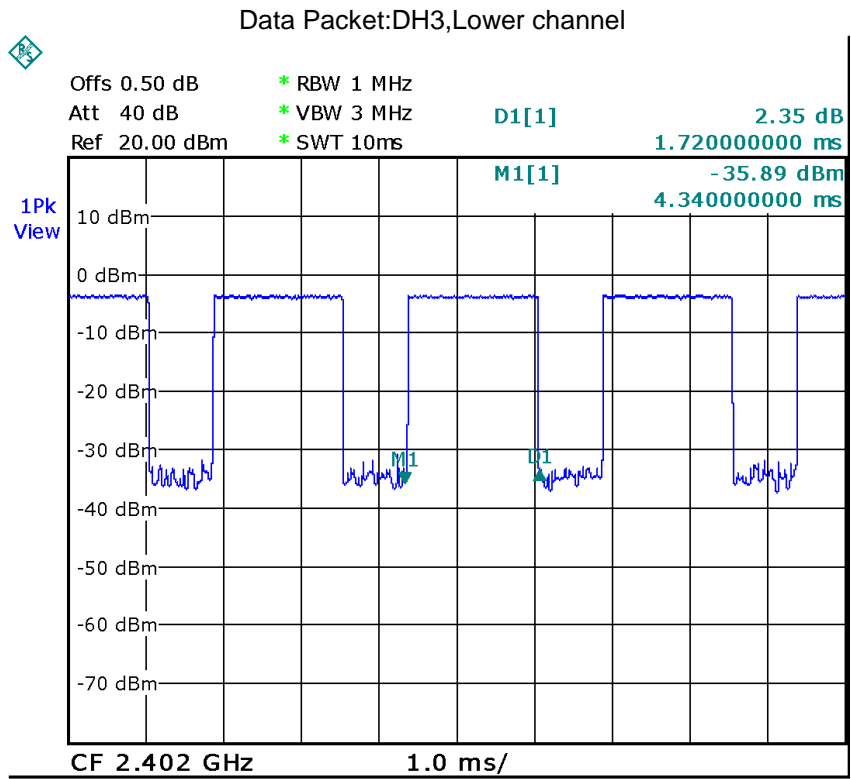


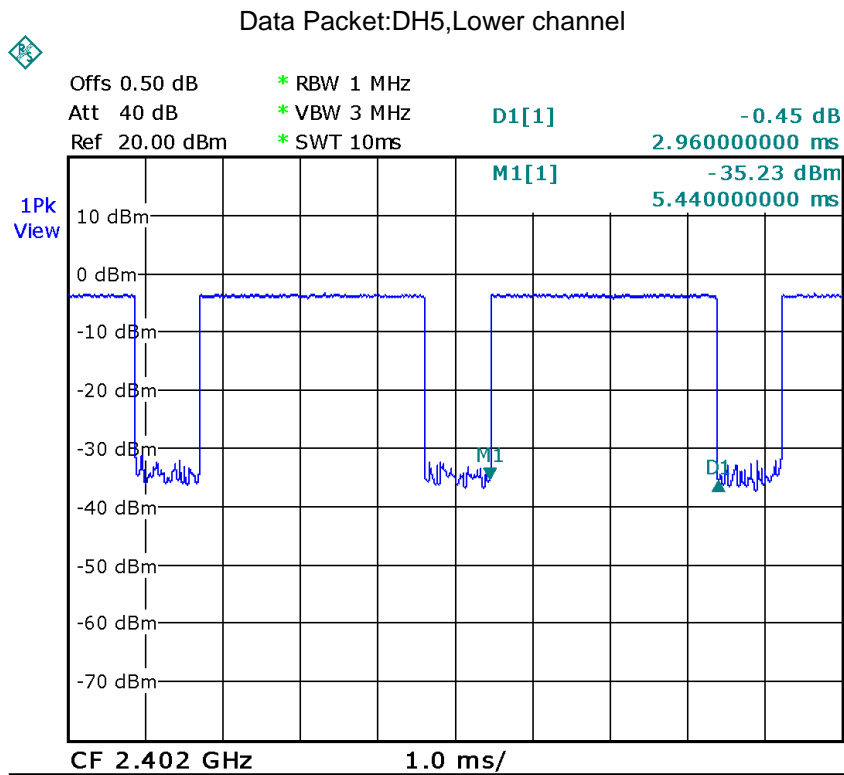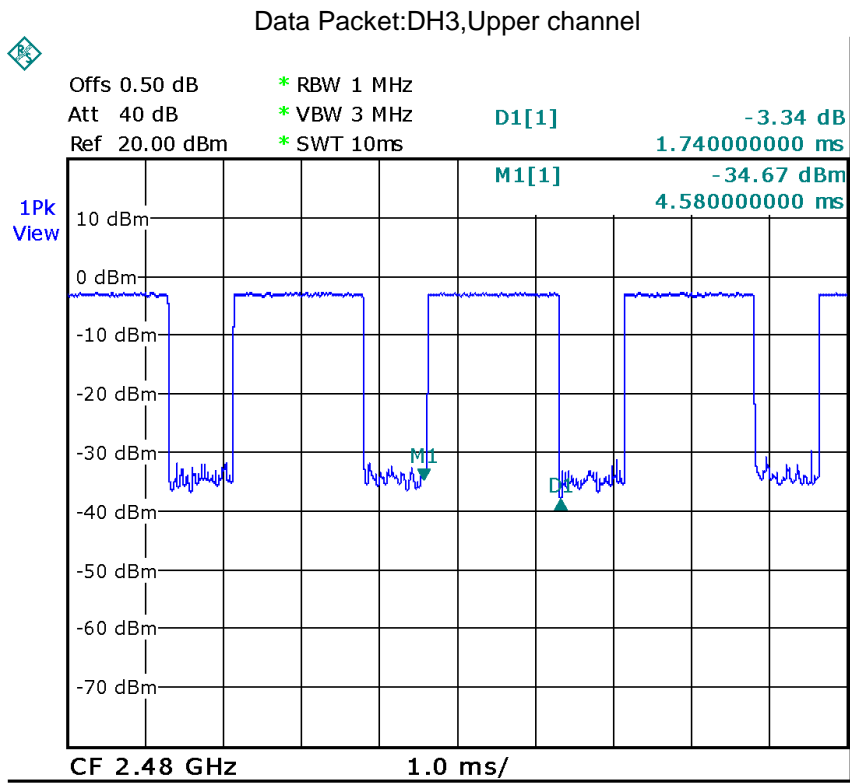

Data Packet:DH5,Middle channel

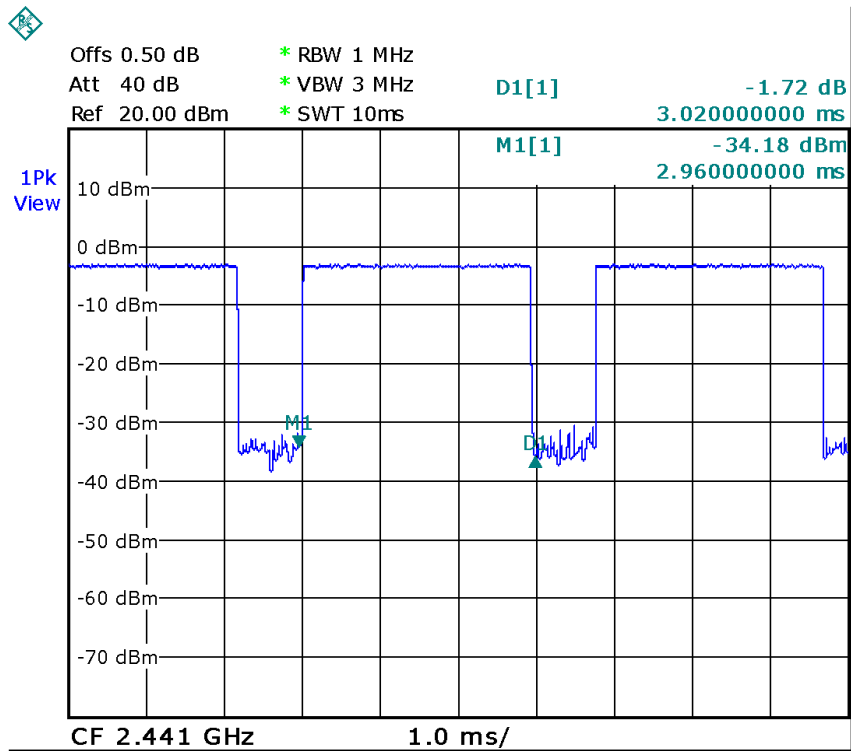


Data Packet:DH5,Upper channel

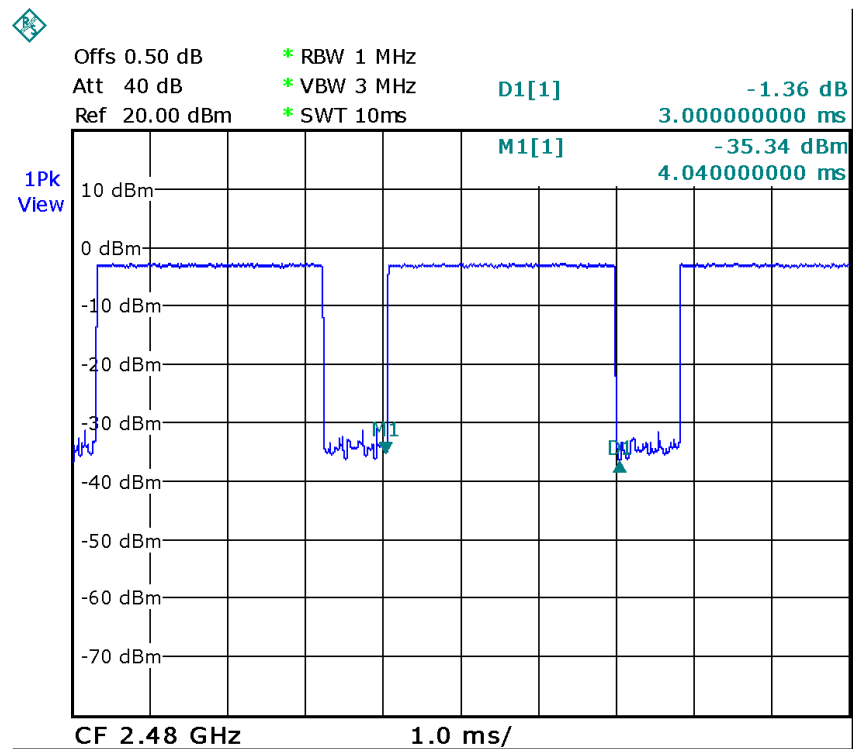





Modulation: 8DPSK  
Data Packet:DH1,Lower channel

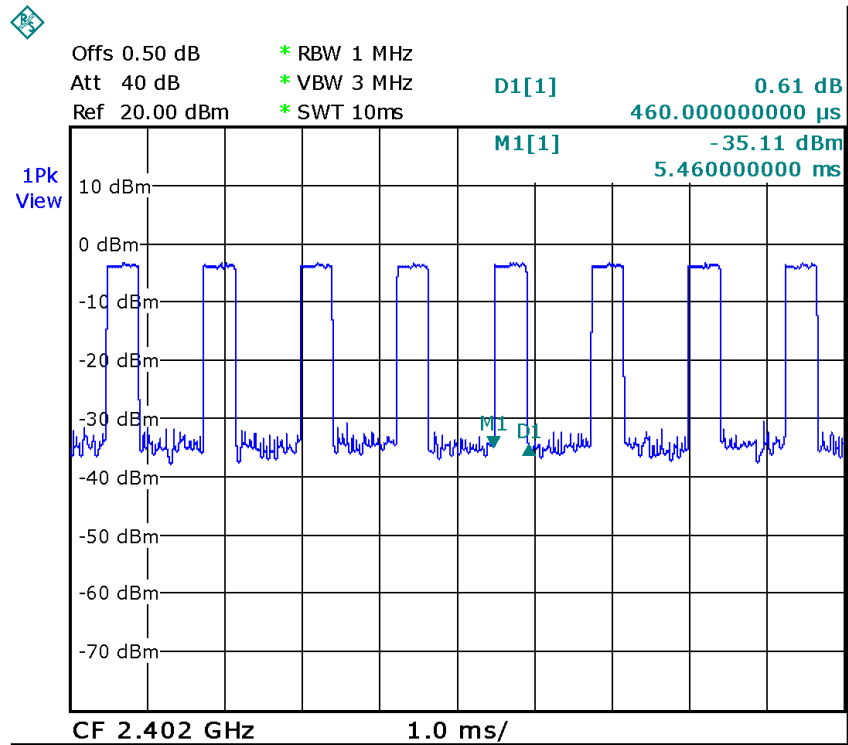


Data Packet:DH1,Middle channel

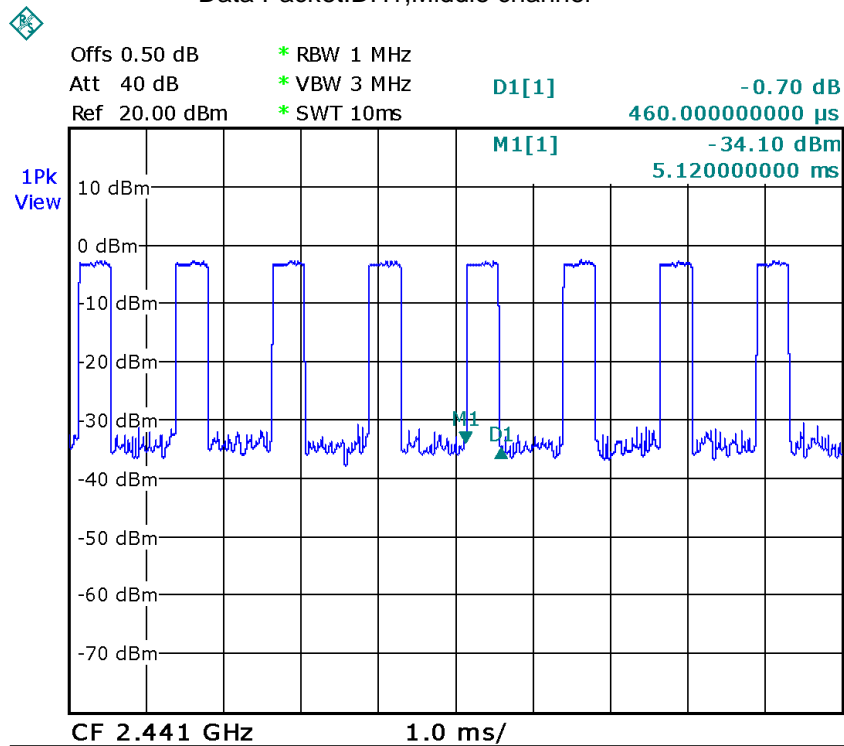


Data Packet:DH1,Upper channel

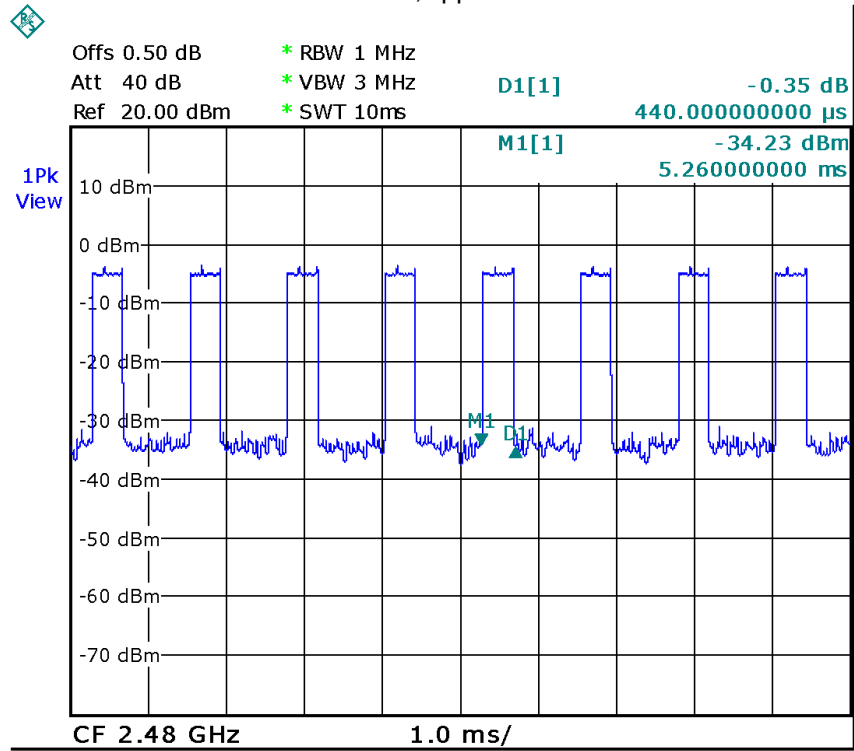


Data Packet:DH3,Lower channel

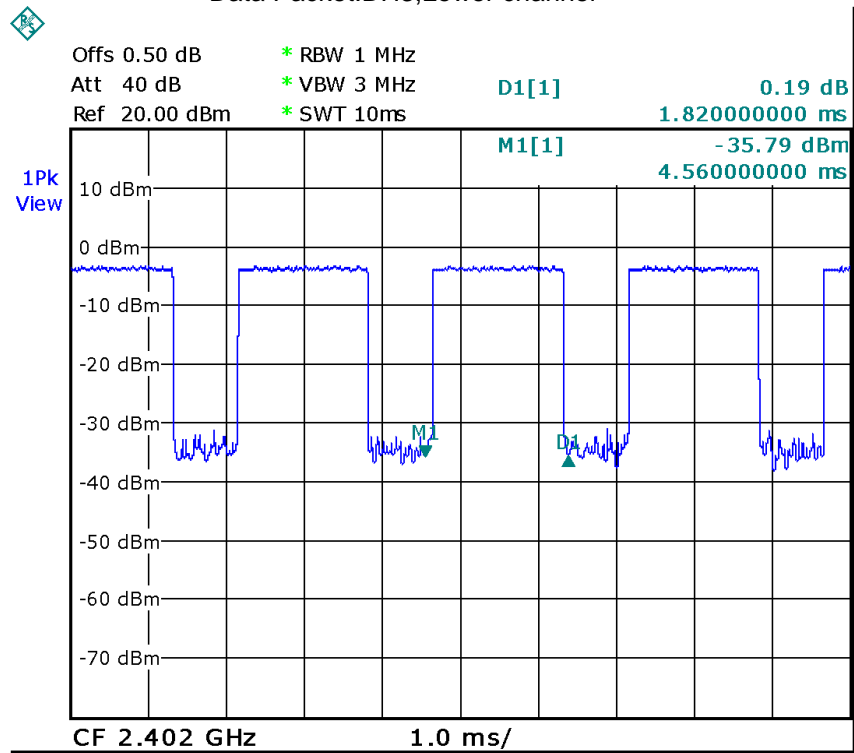


Data Packet:DH3,Middle channel

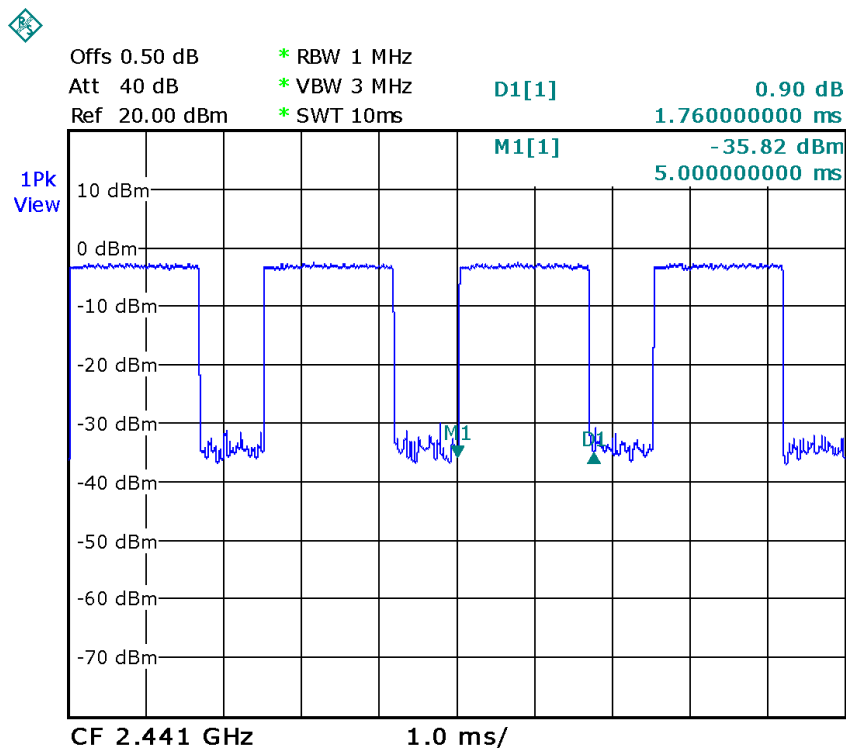


Data Packet:DH3,Upper channel

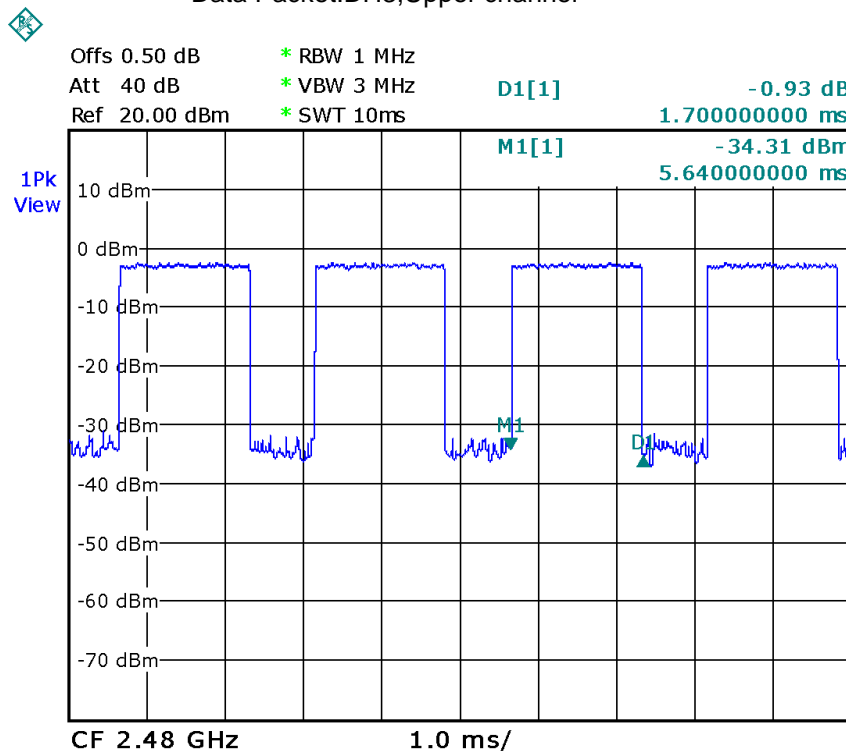


Data Packet:DH5,Lower channel

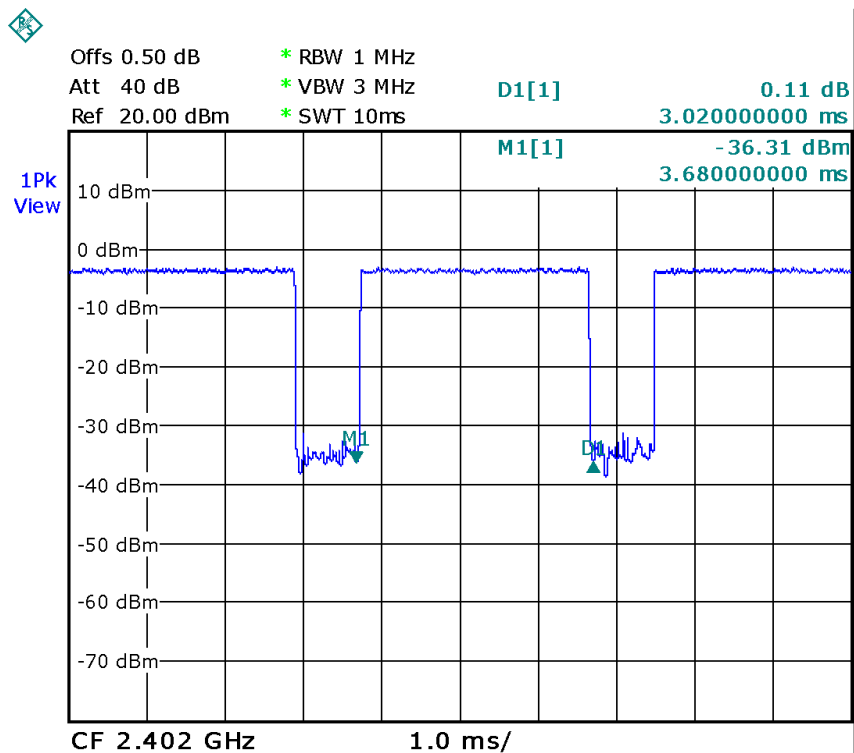

Data Packet:DH5,Middle channel

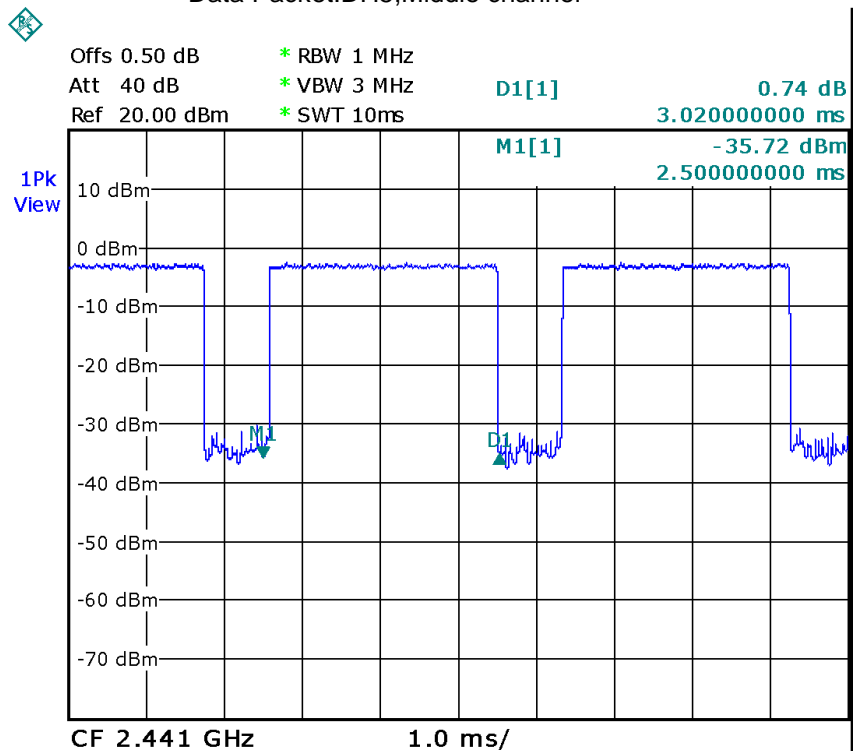

Data Packet:DH5,Upper channel

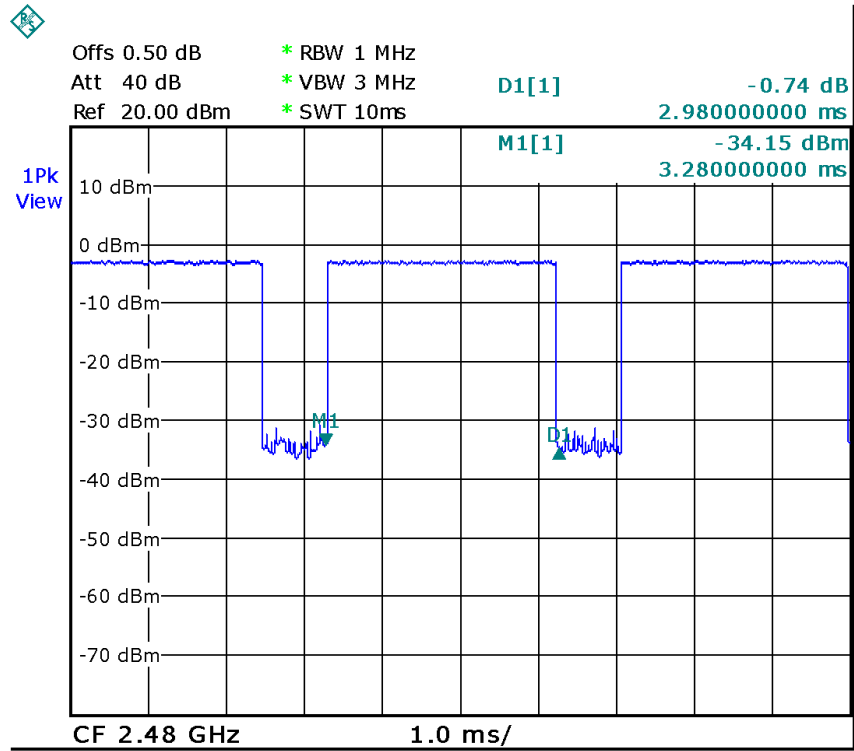

## 15 Antenna Requirement

According to the FCC Part 15 Paragraph 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. This product has a PCB printed antenna, fulfill the requirement of this section.

## 16 Radiofrequency radiation exposure evaluation

Test Requirement:	FCC Part 2.1093
Test Method	KDB 447498 D01 General RF Exposure Guidance v05
Test Mode:	The EUT work in test mode(Tx).

### 16.1 Requirments:

1) The 1-g and 10-g SAR test exclusion thresholds for 100 MHz to 6 GHz at test separation distances  $\leq 50$  mm are determined by:

$$\left[ \frac{\text{max. power of channel, including tune-up tolerance, mW}}{\text{min. test separation distance, mm}} \right] \cdot \left[ \sqrt{f(\text{GHz})} \right] \leq 3.0$$
 for 1-g SAR and  $\leq 7.5$  for 10-g extremity SAR where

1.  $f(\text{GHz})$  is the RF channel transmit frequency in GHz
2. Power and distance are rounded to the nearest mW and mm before calculation
3. The result is rounded to one decimal place for comparison

The test exclusions are applicable only when the minimum test separation distance is  $\leq 50$  mm and for transmission frequencies between 100 MHz and 6 GHz. When the minimum test separation distance is  $< 5$  mm, a distance of 5 mm is applied to determine SAR test exclusion.

**16.2 Test Result**


Modulation	Conducted Peak power(dBm)	Conducted Peak power(mW)	Minimum test separation distance required for the exposure conditions (mm)	SAR Test Exclusion Thresholds(mW)
GFSK	-0.97	0.800	5	10
Pi/4DQPSK	-2.09	0.618	5	10
8DPSK	-2.13	0.612	5	10



## 17 Photographs – Test Setup

### 17.1 Radiated Emissions


Below 30MHz

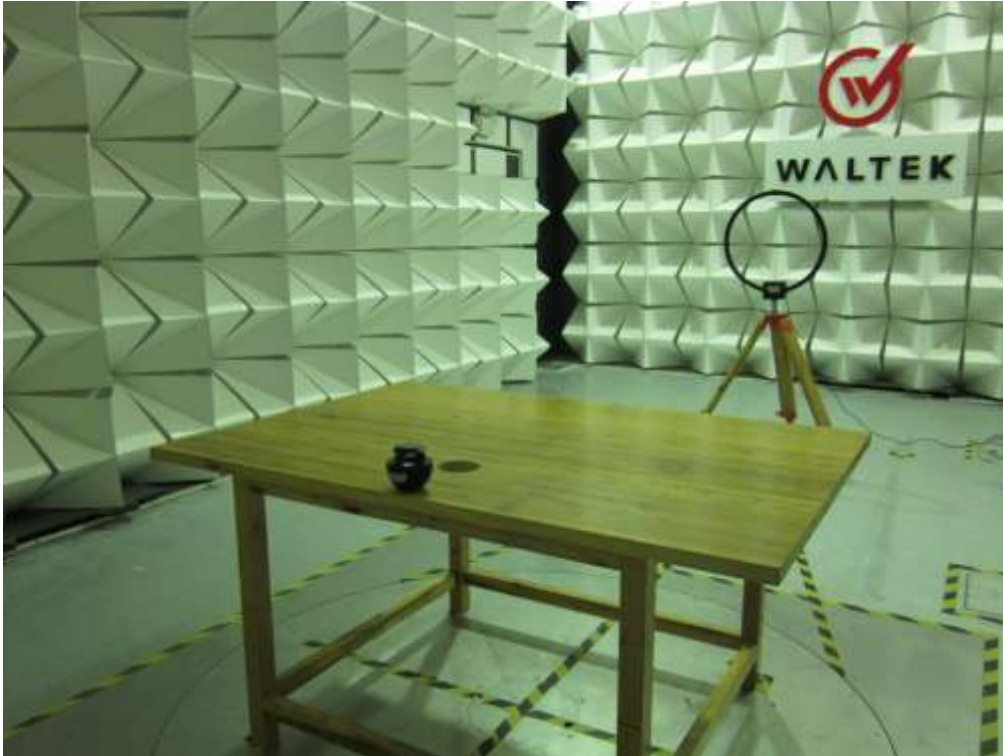

From 30-1000MHz



Above 1GHz

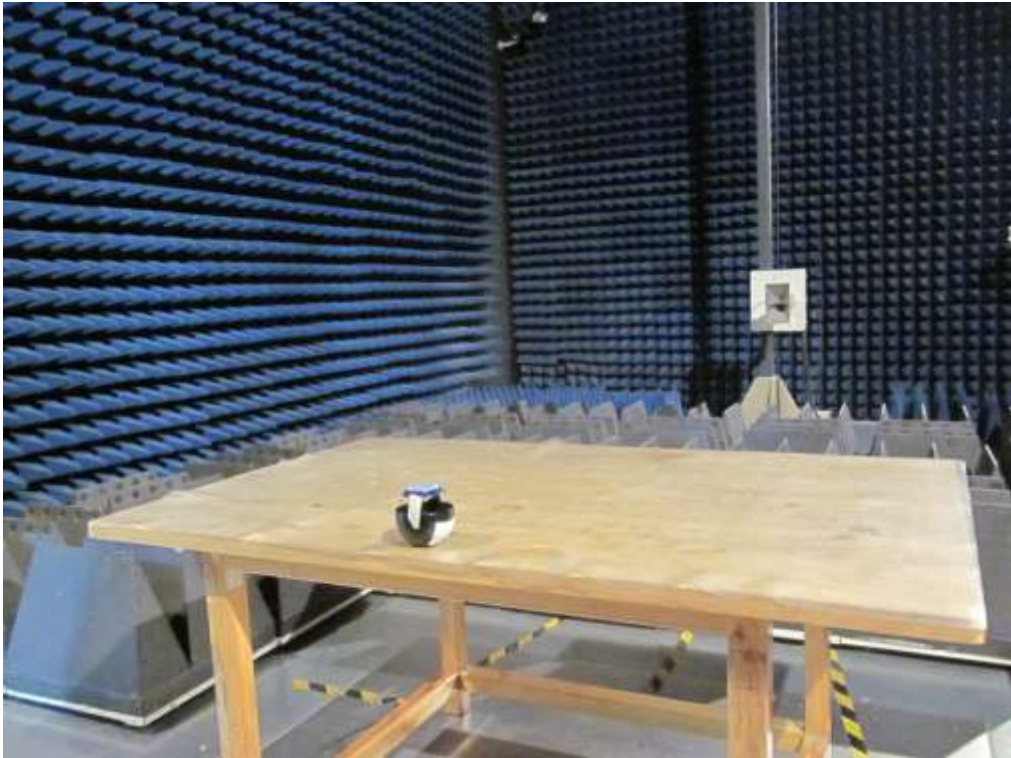

**17.2 Conducted Emissions**



## 18 Photographs - Constructional Details

### 18.1 EUT – External View For White







18.2 EUT – External View For Black













### 18.3 EUT – Internal View

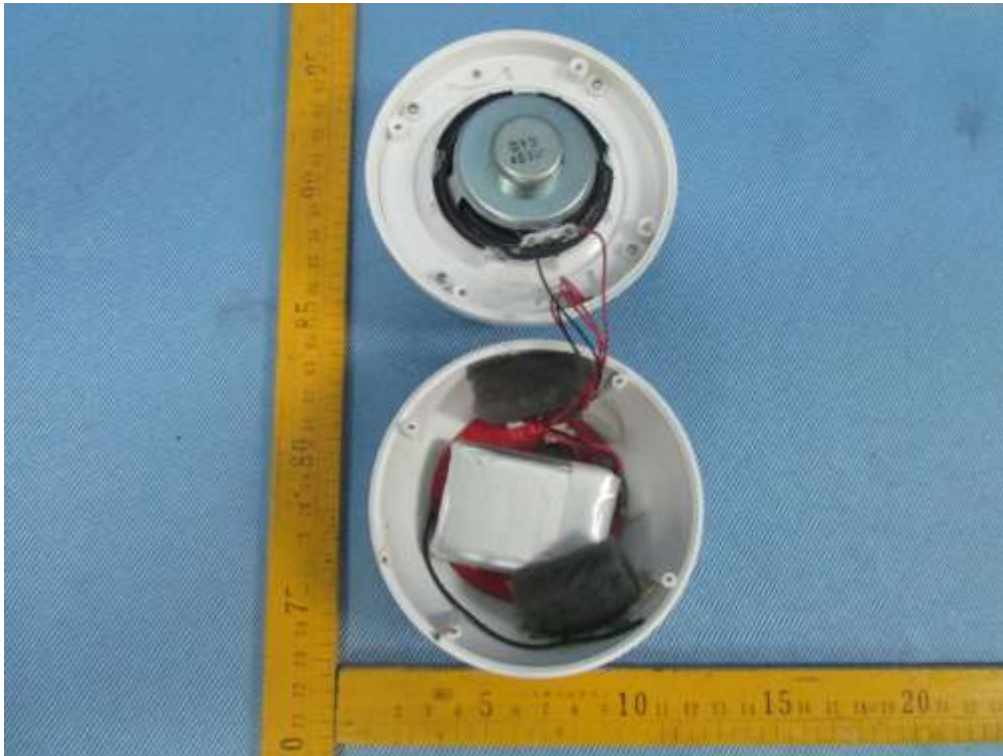


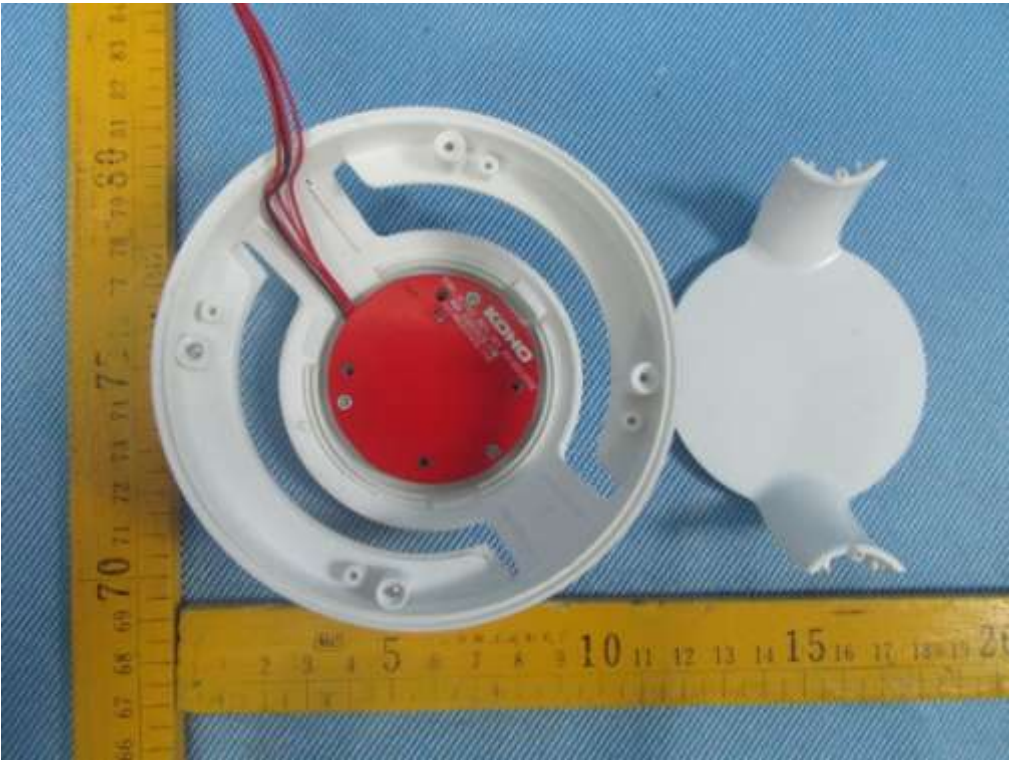


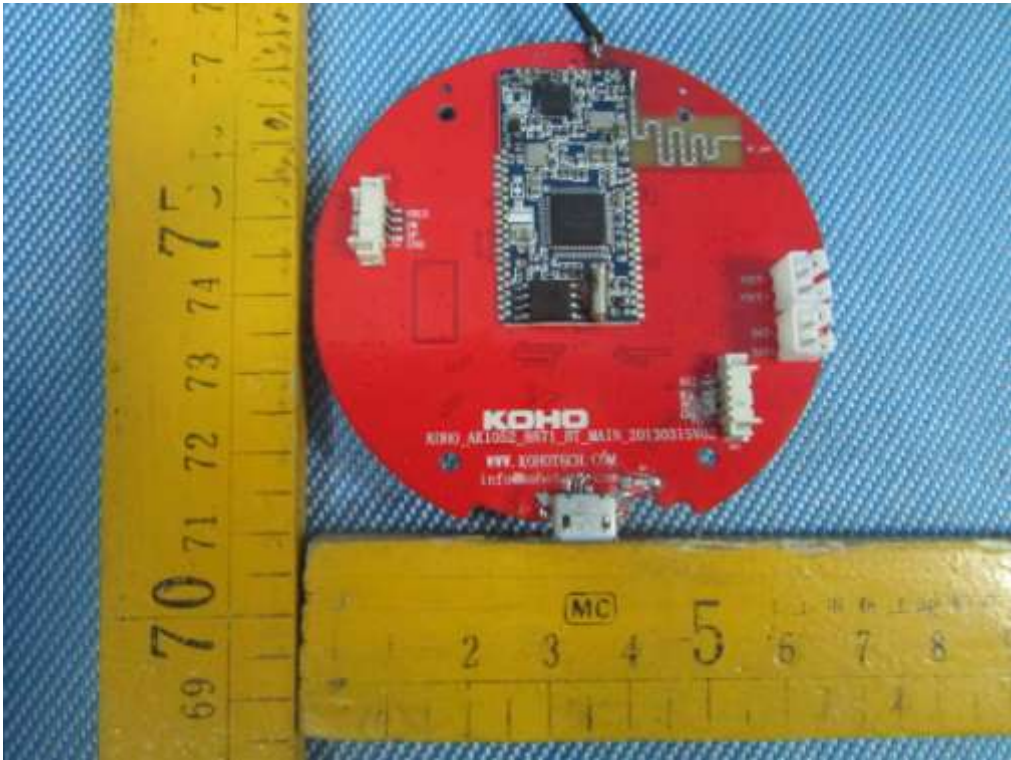

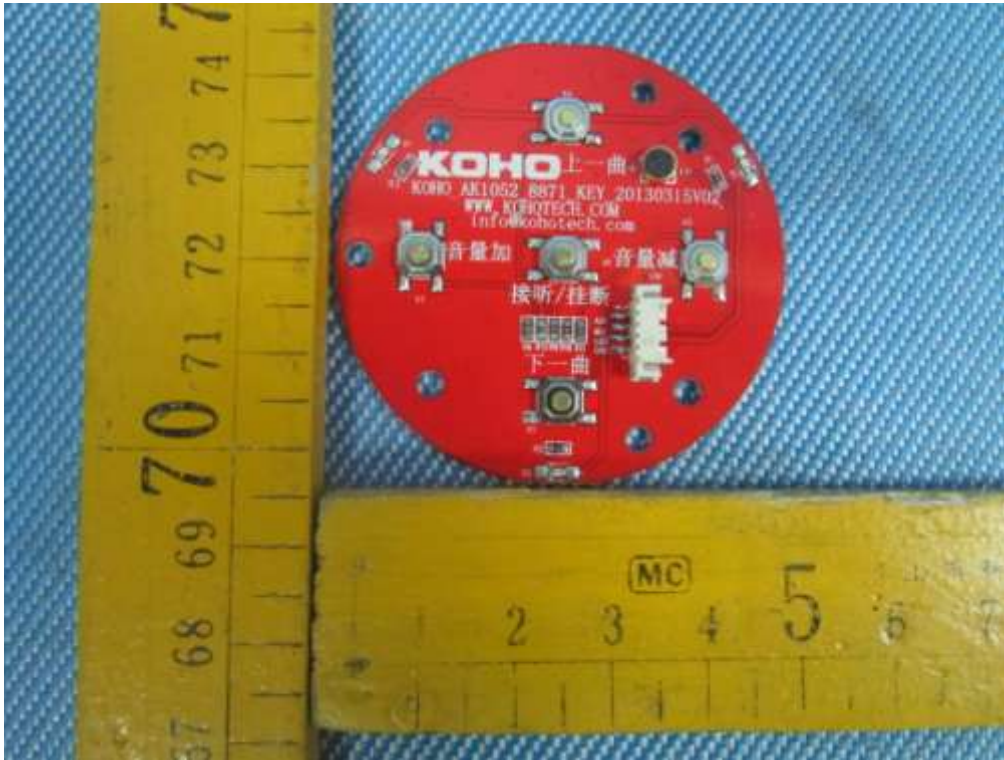

**18.4 EUT-RF Module View**

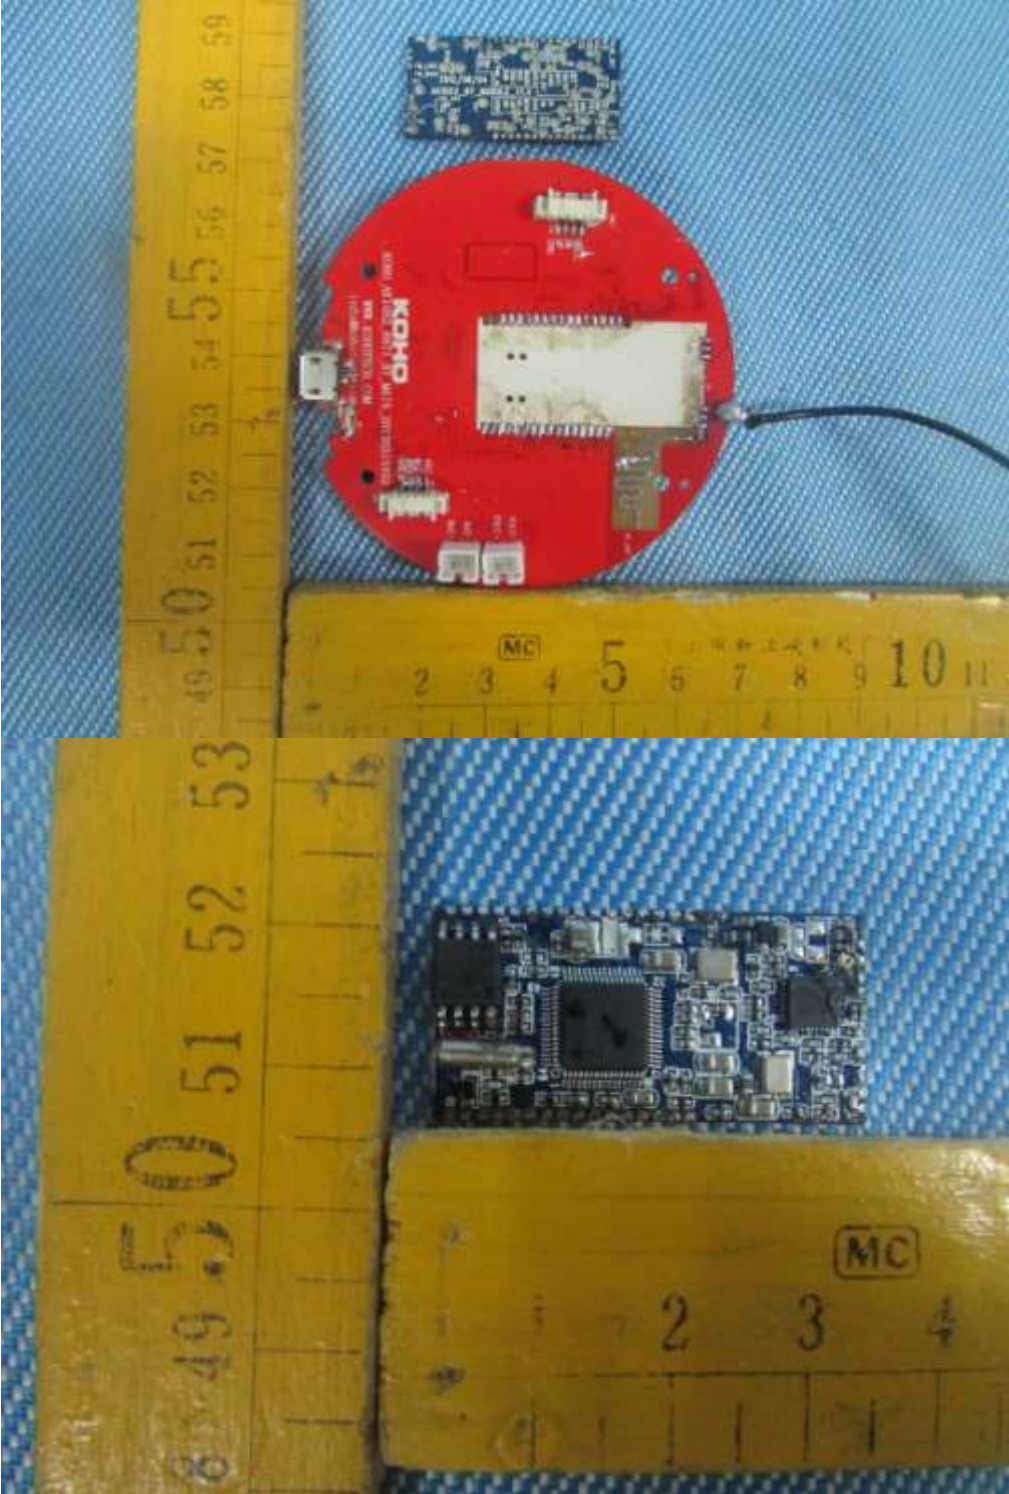

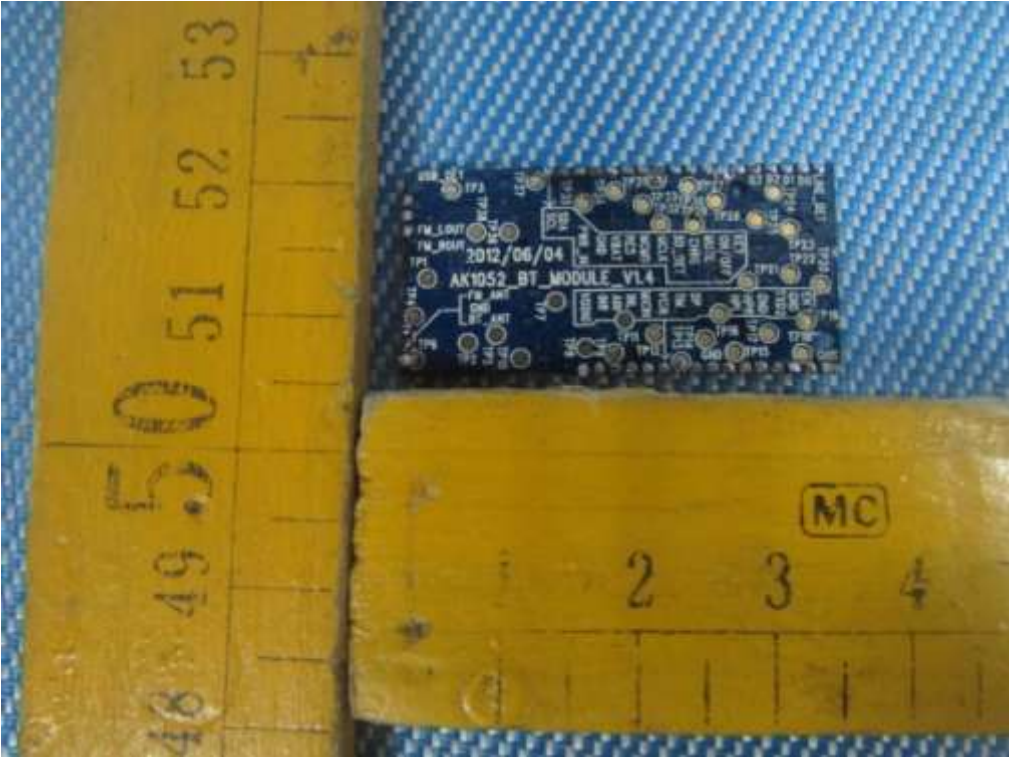

==End of test report==