


Murandi

Communications Ltd.


Innovative Radio Frequency Solutions

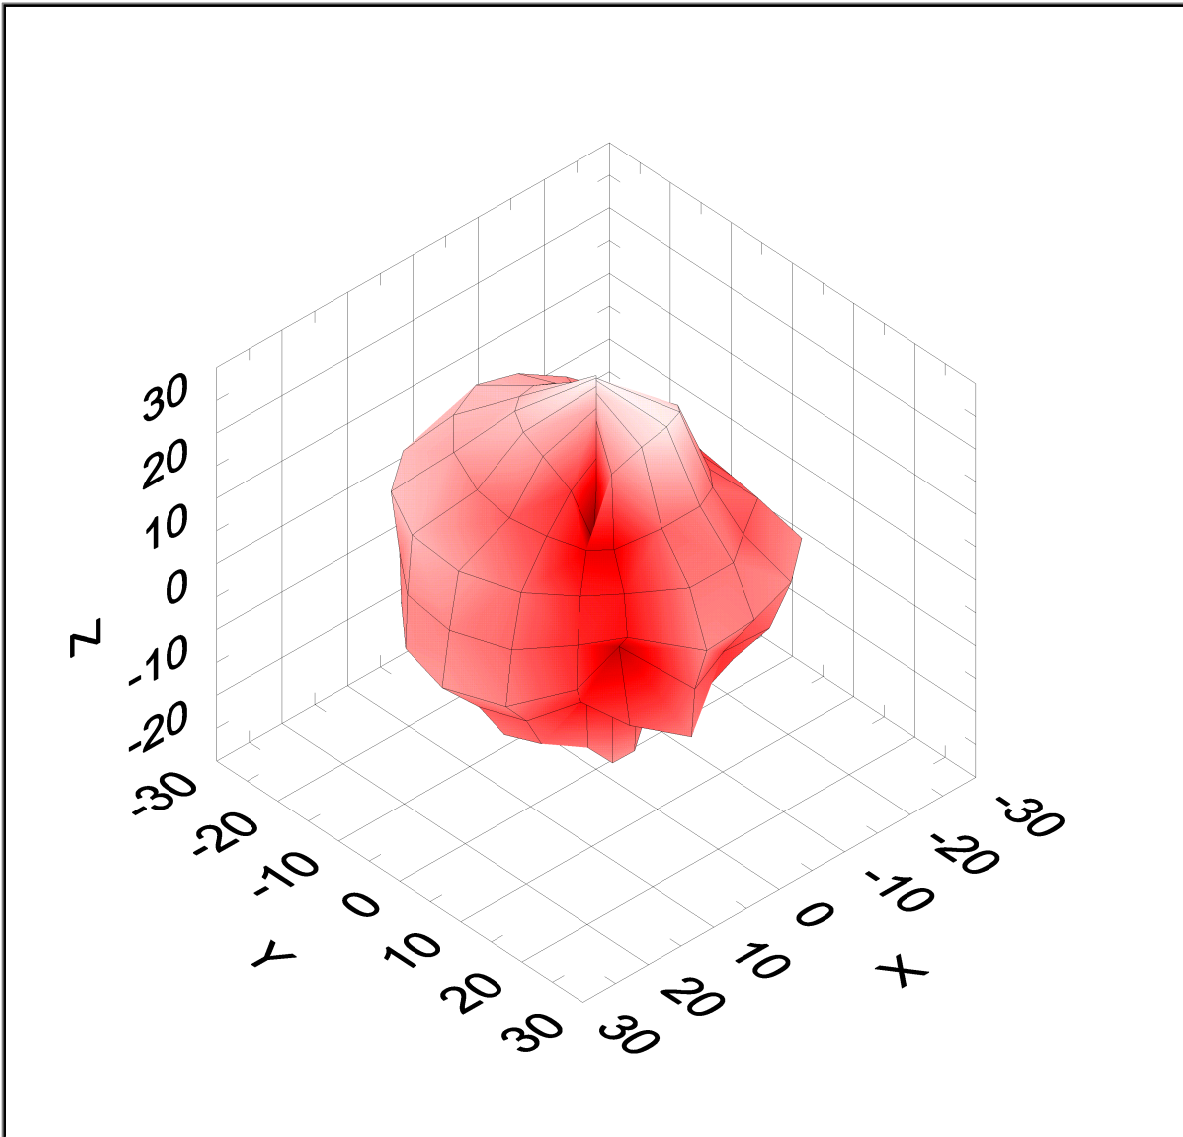

unit 6 w MMCX to pad whole unit
4 screws 1784Mhz low loss cable 1
Horizontal Polarization
Peak Gain (dB):1.86
Total Radiated power (dBm):8.54
Horz. Component (dBm): 4.52

Dec 20, 2002 11:23 AM


Frequency (MHz):1784.00
Cable Attenuation (dB):1.22
Receive Antenna Gain (dB):2.15
Separation (m):1.27
Tx Power (dBm):10.80 **Measured**



Murandi

Communications Ltd.

Innovative Radio Frequency Solutions

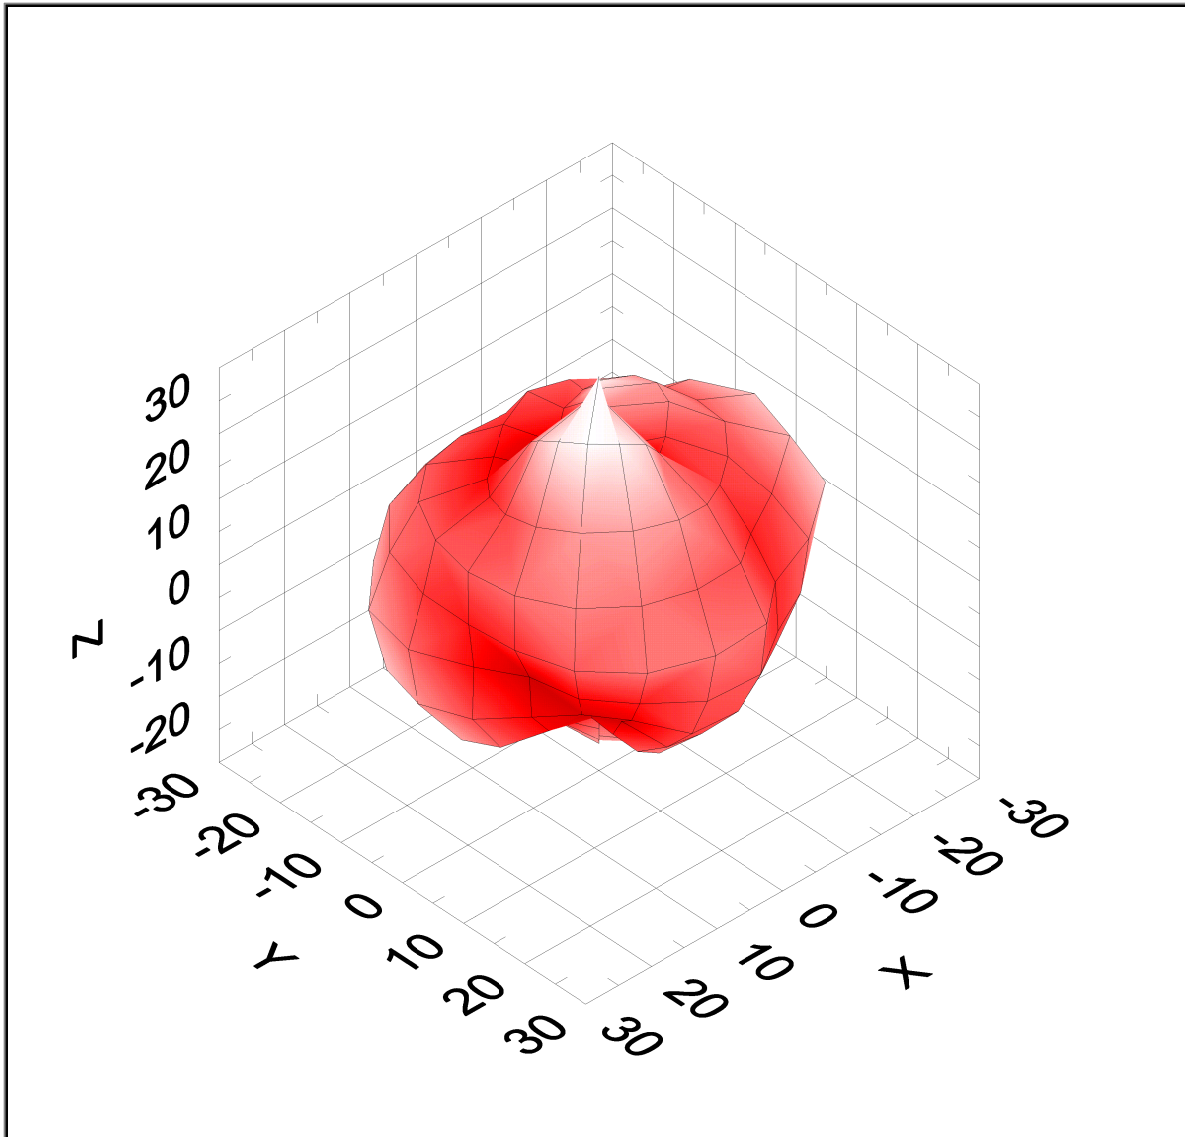

unit 6 w MMCX to pad whole unit
4 screws 1784Mhz low loss cable 1
Vertical Polarization

Peak Gain (dB):1.86

Total Radiated power (dBm):8.54

Vert. Component (dBm); 6.32

Dec 20, 2002 11:23 AM

Frequency (MHz):1784.00

Cable Attenuation (dB):1.22

Receive Antenna Gain (dB):2.15

Separation (m):1.27

Tx Power (dBm):10.80

Measured