

## FCC Test Report

**Report No.:** RFBCUG-WTW-P22010682-6

**FCC ID:** B32UX700

**Test Model:** UX700-WBU

**Received Date:** Jan. 20, 2022

**Test Date:** Mar. 04 ~ Mar. 28, 2022

**Issued Date:** Mar. 30, 2022

**Applicant:** Verifone, Inc.

**Address:** 1400 West Stanford Ranch Road Suite 150 Rocklin CA 95765 USA

**Issued By:** Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch  
Lin Kou Laboratories

**Lab Address:** No. 47-2, 14th Ling, Chia Pau Vil., Lin Kou Dist., New Taipei City, Taiwan

**Test Location (1):** No. 19, Hwa Ya 2nd Rd., Wen Hwa Vil., Kwei Shan Dist., Taoyuan City  
33383, TAIWAN

**FCC Registration /  
Designation Number:** 788550 / TW0003

**Test Location (2):** No. 70, Wenming Rd., Guishan Dist., Taoyuan City 333, Taiwan (R.O.C.)

**FCC Registration /  
Designation Number:** 281270 / TW0032



This report is for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence, provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents. Unless specific mention, the uncertainty of measurement has been explicitly taken into account to declare the compliance or non-compliance to the specification.

## Table of Contents

<b>Release Control Record</b> .....	<b>3</b>
<b>1. Certificate of Conformity</b> .....	<b>4</b>
<b>2. Summary of Test Results</b> .....	<b>5</b>
2.1 Measurement Uncertainty.....	5
2.2 Modification Record.....	5
<b>3. General Information</b> .....	<b>6</b>
3.1 General Description of EUT.....	6
3.2 Description of Test Modes.....	7
3.2.1 Test Mode Applicability and Tested Channel Detail.....	8
3.3 Duty cycle of test signal.....	10
3.4 Description of Support Units.....	12
3.4.1 Configuration of System under Test.....	12
3.5 General Description of Applied Standards.....	12
<b>4. Test Types and Results</b> .....	<b>13</b>
4.1 Radiated Emissions.....	13
4.1.1 Limits of Radiated Emission Measurement - at or Below 960 MHz.....	13
4.1.2 Limits of Radiated Emission Measurement - Above 960 MHz.....	14
4.2 Test Instruments.....	17
4.2.1 Test Procedures.....	18
4.2.2 Deviation from Test Standard.....	18
4.2.3 Test Setup.....	19
4.2.4 EUT Operating Conditions.....	20
4.2.5 Test Results.....	21
4.3 Conducted Emission Measurement.....	45
4.3.1 Limits of Conducted Emission Measurement.....	45
4.3.2 Test Instruments.....	45
4.3.3 Test Procedures.....	46
4.3.4 Deviation from Test Standard.....	46
4.3.5 Test Setup.....	46
4.3.6 EUT Operating Conditions.....	46
4.3.7 Test Results.....	47
4.4 Occupied Bandwidth Measurement.....	49
4.4.1 Limits of Transmitter Power and Power Spectral Density Measurement.....	49
4.4.2 Test Setup.....	49
4.4.3 Test Instruments.....	49
4.4.4 Test Procedure.....	49
4.4.5 Deviation from Test Standard.....	49
4.4.6 EUT Operating Conditions.....	49
4.4.7 Test Results.....	50
4.5 Transmission Time Measurement.....	54
4.5.1 Limits of Transmitter Emission Measurement.....	54
4.5.2 Test Setup.....	55
4.5.3 Test Instruments.....	55
4.5.4 Test Procedure.....	55
4.5.5 Deviation from Test Standard.....	55
4.5.6 EUT Operating Condition.....	55
4.5.7 Test Results.....	55
<b>5. Pictures of Test Arrangements</b> .....	<b>56</b>
<b>Appendix – Information of the Testing Laboratories</b> .....	<b>57</b>

### Release Control Record

Issue No.	Description	Date Issued
RFBCUG-WTW-P22010682-6	Original release	Mar. 30, 2022

## 1. Certificate of Conformity

**Product:** Point of Sale Terminal  
**Brand:** Verifone  
**Test Model:** UX700-WBU  
**Sample Status:** Engineering sample  
**Applicant:** Verifone, Inc.  
**Test Date:** Mar. 04 ~ Mar. 28, 2022  
**Standards:** 47 CFR FCC Part 15, Subpart F  
ANSI C63.10:2013

The above equipment has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's RF characteristics under the conditions specified in this report.

**Prepared by :** Celine Chou , **Date:** Mar. 30, 2022  
Celine Chou / Senior Specialist

**Approved by :** Jeremy Lin , **Date:** Mar. 30, 2022  
Jeremy Lin / Project Engineer

## 2. Summary of Test Results

47 CFR FCC Part 15, Subpart F			
Standard Section	Test Item	Result	Remarks
15.207	AC Power Conducted Emission	Pass	Meet the requirement of limit. Minimum passing margin is -15.71dB at 0.42577MHz.
15.209	Radiated Emissions at or Below 960 MHz	Pass	Meet the requirement of limit. Minimum passing margin is -9.50dB at 59.52MHz.
15.517	Radiated emissions above 960 MHz	Pass	Meet the requirement of limit. Minimum passing margin is -3.66dB at 1104.60MHz.
15.517	Occupied Bandwidth	Pass	Meet the requirement of limit.
15.509/15.510/ 15.511/15.513/ 15.515/15.517/ 15.519/15.521	Transmission Time	NA	Not applicable to Indoor UWB systems

Note: Determining compliance based on the results of the compliance measurement, not taking into account measurement instrumentation uncertainty.

### 2.1 Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

Measurement	Frequency	Expanded Uncertainty (k=2) ( $\pm$ )
Conducted Emissions at mains ports	150kHz ~ 30MHz	2.79 dB
Radiated Emissions up to 1 GHz	9kHz ~ 30MHz	3.00 dB
	30MHz ~ 200MHz	2.91 dB
	200MHz ~ 1000MHz	2.93 dB
Radiated Emissions above 1 GHz	1GHz ~ 18GHz	1.76 dB
	18GHz ~ 40GHz	1.77 dB

### 2.2 Modification Record

There were no modifications required for compliance.

### 3. General Information

#### 3.1 General Description of EUT

Product	Point of Sale Terminal
Brand	Verifone
Test Model	UX700-WBU
Sample Status	Engineering sample
Power Supply Rating	9-43Vdc, 2.4A-0.5A
Modulation Type	BPM-BPSK
Modulation Technology	BPM-BPSK
Transfer Rate	6.8Mbps, 7.8Mbps, 27Mbps and 31.2Mbps
Operating Frequency	CH 5: FL: 6.2269GHz, FH: 6.7504GHz CH 9: FM: 7.9872GHz, FL: 7.6765GHz, FH: 8.2989GHz
Number of Channel	2
Output Power	CH 5: -12.88dBm (PK) CH 9: -13.05dBm (PK)
Antenna Type	Patch antenna with -0.50dBi gain
Antenna Connector	ipex MHF4 RF connector
Accessory Device	Adapter
Cable Supplied	NA

Note:

- The EUT consumes power from the following adapters.

Adapter 1	
Brand	Verifone
Model	CAE040122
Input Power	100-240Vac, 50/60Hz, 1.7A
Output Power	12Vdc, 3.33A
Power Line	1.77m cable with one core attached on adapter

Adapter 2	
Brand	Verifone
Model	A140-5120330G
Input Power	100-240Vac, 50/60Hz, 2.0A
Output Power	12Vdc, 3.33A
Power Line	1.75m cable with one core attached on adapter

\* After pre-tested, adapter 1 was chosen for final test and presented in the test report.

- The above Antenna information is declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications, the laboratory shall not be held responsible.

3. List of test command.

Channel	Frequency (MHz)	Payload	Test command
5	6489.6	2	A24_test_HPRF_Murata_ch5_Len2_20211125
		64	A24_test_HPRF_Murata_ch5_Len64_20211125
		127	A24_test_HPRF_Murata_ch5_Len127_20211125
		512	A24_test_HPRF_Murata_ch5_Len512_20211125
		1023	A24_test_HPRF_Murata_ch5_Len1023_20211125
9	7987.2	2	A24_test_HPRF_Murata_ch9_Len2_20211125
		64	A24_test_HPRF_Murata_ch9_Len64_20211125
		127	A24_test_HPRF_Murata_ch9_Len127_20211125
		512	A24_test_HPRF_Murata_ch9_Len512_20211125
		1023	A24_test_HPRF_Murata_ch9_Len1023_20211125

\*After pre-test, Payload 127 was chosen for final test and present on this test report.

4. 2.4GHz & BT or 5GHz & BT technology can transmit at same time.
5. Spurious emission of the simultaneous operation (2.4GHz & BT or 5GHz & BT) has been evaluated and no non-compliance was found.

**3.2 Description of Test Modes**

2 channels are provided for WSDs as below table:

Channel	Frequency (MHz)
5	6489.6
9	7987.2

### 3.2.1 Test Mode Applicability and Tested Channel Detail

EUT Configure Mode	Applicable to					Description
	BW	RE<1G	RE≥1G	TT	PLC	
-	√	√	√	-	√	-

Where BW: Occupied Bandwidth RE<1G: Radiated Emission below 960 MHz  
 RE≥1G: Radiated Emission above 960 MHz & Bandedge Measurement PLC: Power Line Conducted Emission  
 TT: Transmission Time

Note: The EUT had been pre-tested on the positioned of each 3 axis. The worst case was found when positioned on **Z-plane**.

#### **Radiated Emission Test (Above 1GHz):**

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Available Channel	Tested Channel	Modulation Type
-	5, 9	5, 9	BPM-BPSK

#### **Radiated Emission Test (Below 1GHz):**

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Available Channel	Tested Channel	Modulation Type
-	5, 9	5, 9	BPM-BPSK

#### **Power Line Conducted Emission Test:**

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Available Channel	Tested Channel	Modulation Type
-	5, 9	5	BPM-BPSK

#### **Occupied Bandwidth Test:**

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Available Channel	Tested Channel	Modulation Type
-	5, 9	5, 9	BPM-BPSK



**Test Condition:**

<b>Applicable to</b>	<b>Environmental Conditions</b>	<b>Input Power</b>	<b>Tested by</b>
<b>RE<math>\geq</math>1G</b>	23 deg. C, 66% RH	120Vac, 60Hz	Randy Wu
<b>RE<math>&lt;</math>1G</b>	23 deg. C, 66% RH	120Vac, 60Hz	Randy Wu
<b>PLC</b>	22 deg. C, 66% RH	120Vac, 60Hz	Adair Peng
<b>BW</b>	23 deg. C, 66% RH	120Vac, 60Hz	Randy Wu

### 3.3 Duty cycle of test signal.

CH 5:


Len2: Duty cycle =  $0.135/1.000 = 0.135$

Len64: Duty cycle =  $0.210/1.015 = 0.207$

Len127: Duty cycle =  $0.270/1.005 = 0.269$

Len512: Duty cycle =  $0.275/0.990 = 0.278$

Len1023: Duty cycle =  $0.295/1.020 = 0.289$

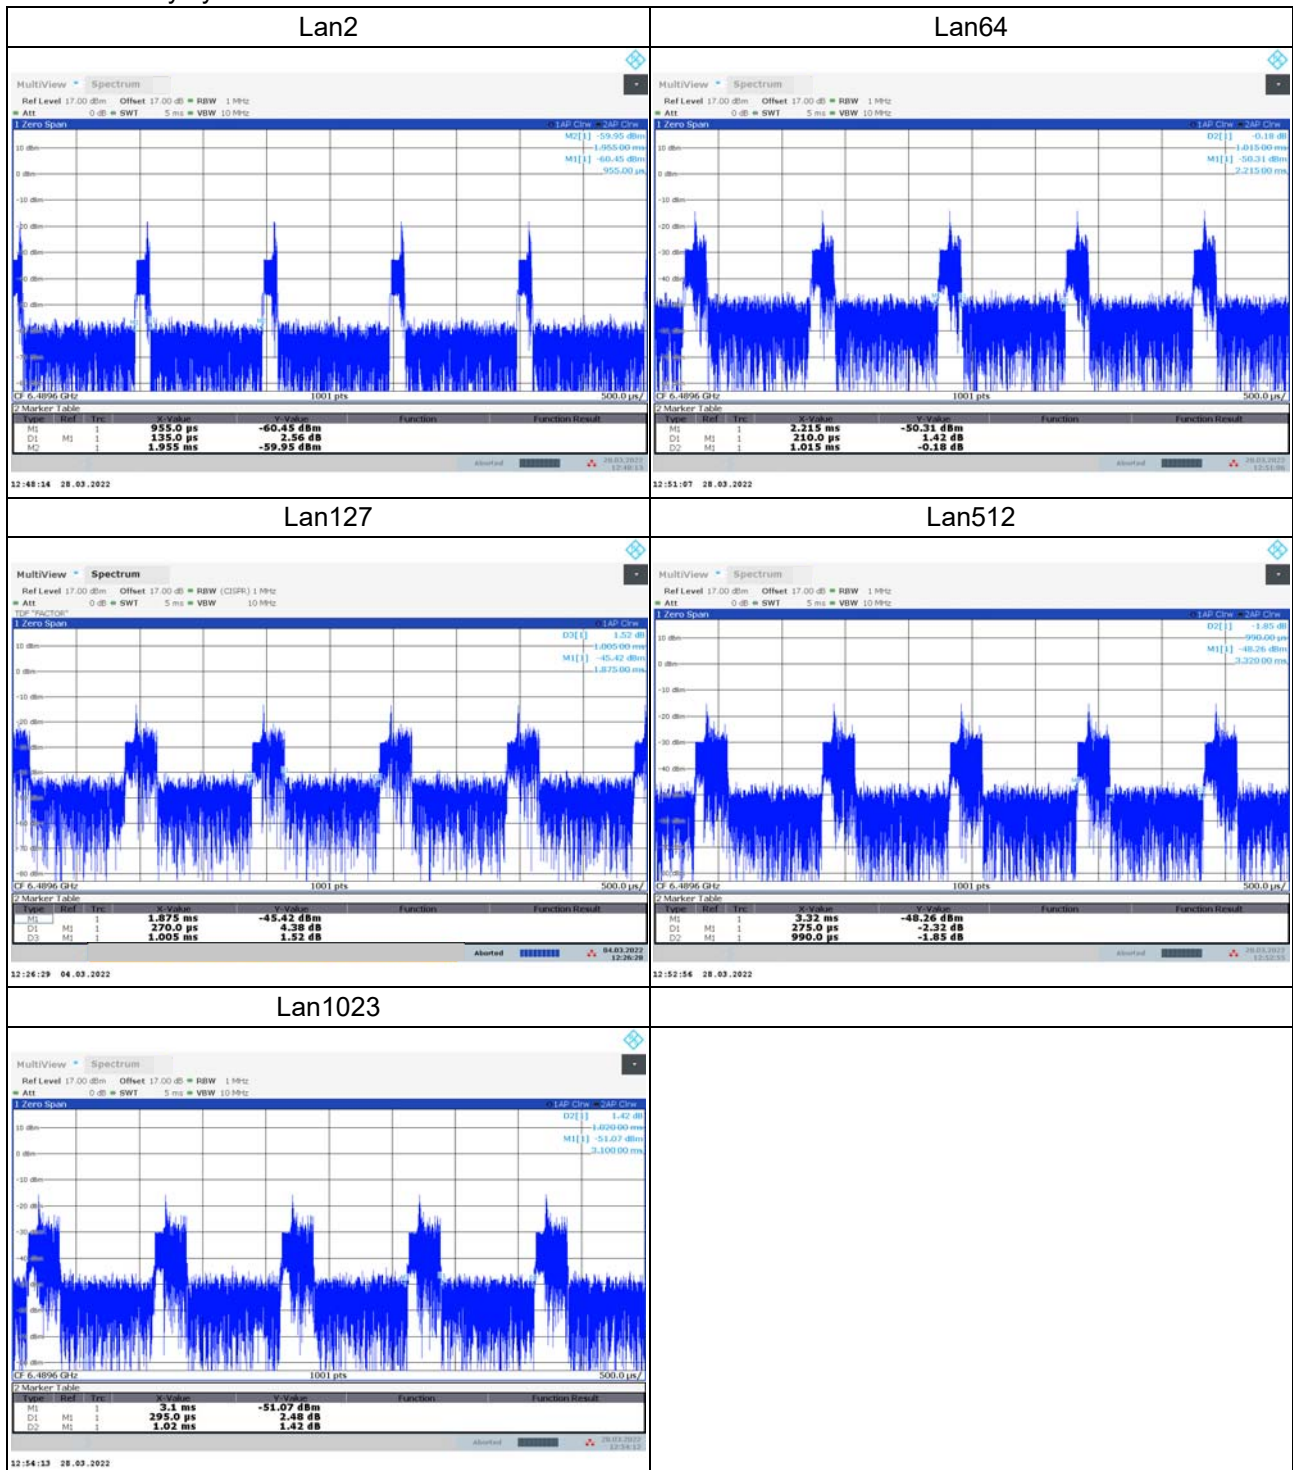

CH 9:


Len2: Duty cycle =  $0.140/1.015 = 0.138$

Len64: Duty cycle =  $0.200/1.005 = 0.199$

Len127: Duty cycle =  $0.285/1.005 = 0.284$

Len512: Duty cycle =  $0.285/1.005 = 0.284$

Len1023: Duty cycle =  $0.305/1.025 = 0.298$

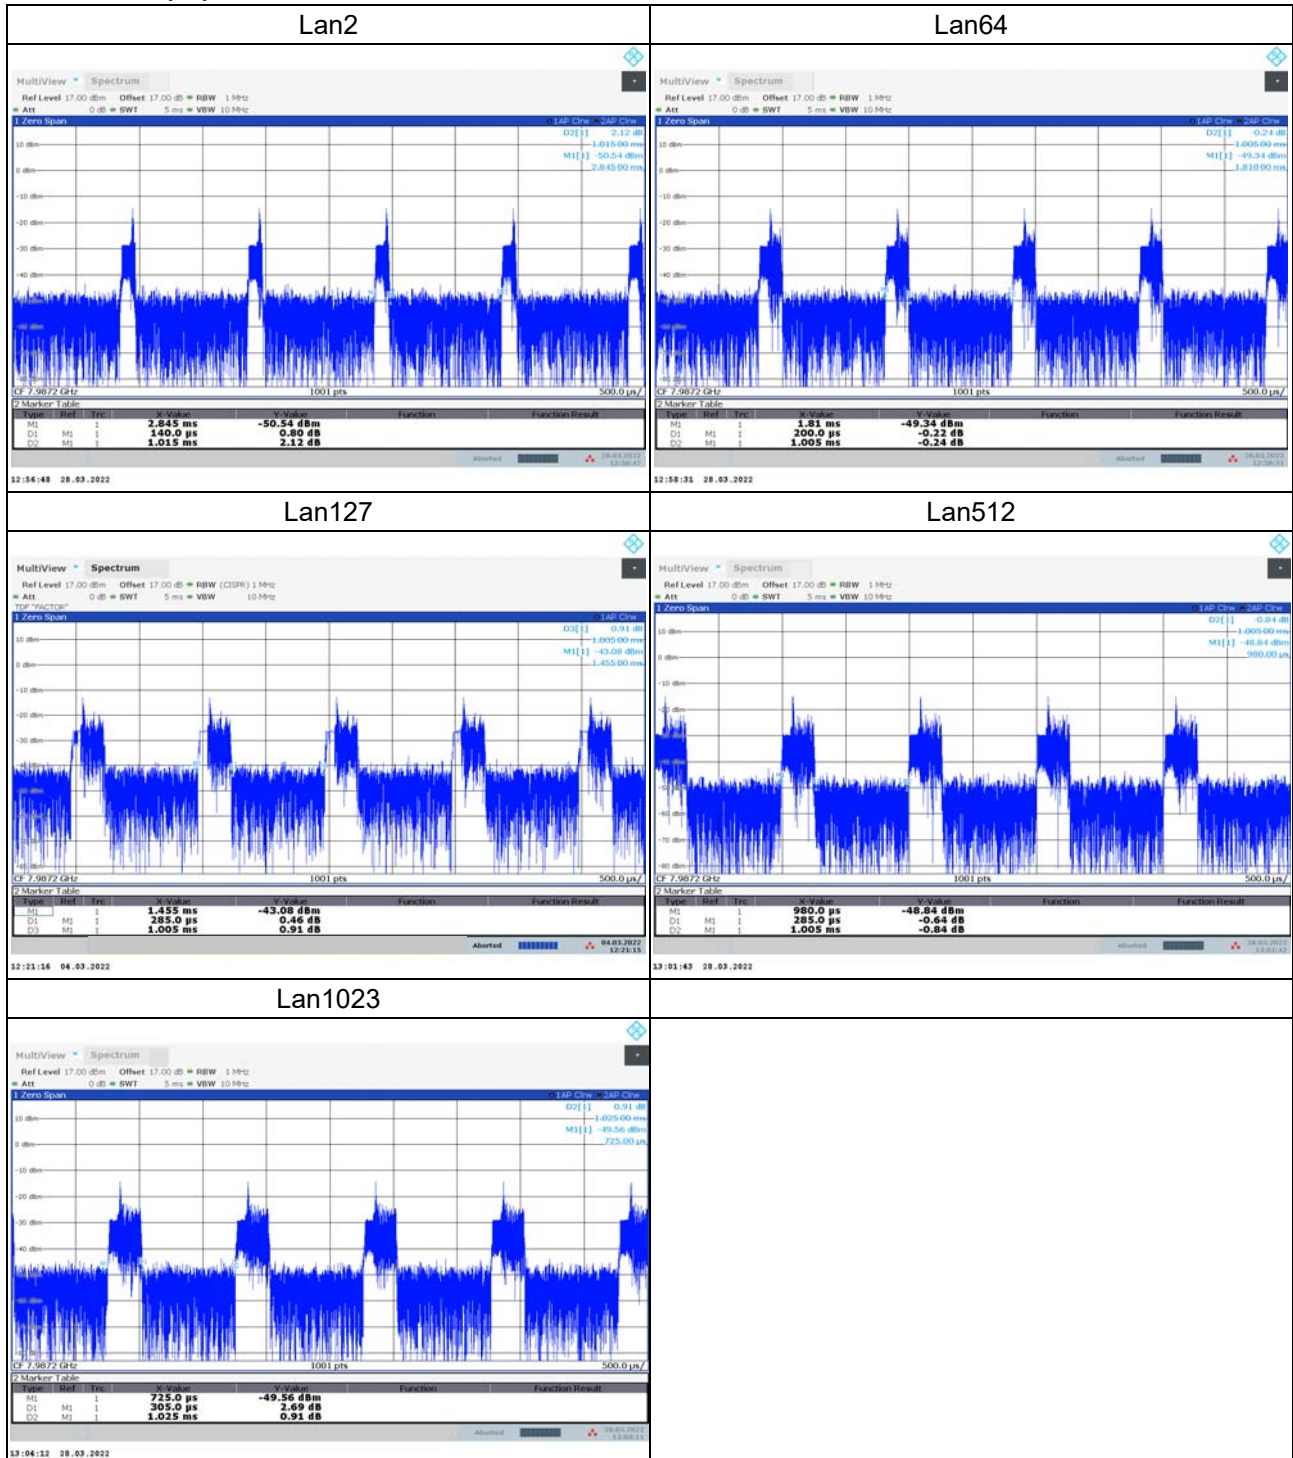

### 3.4 Description of Support Units

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

ID	Product	Brand	Model No.	Serial No.	FCC ID	Remarks
A.	USB Flash x 3	HP	v250W	01	NA	-
		SanDisk	SDDD3-032G	NA	NA	-
		SanDisk	SDDD3-032G	NA	NA	-
B.	Load	NA	NA	NA	NA	-
C.	Notebook	Lenovo	20J4 MD A003TW	PF-11H9AK	FCC DoC Approved	-

Note: All power cords of the above support units are non-shielded (1.8m).

ID	Descriptions	Qty.	Length (m)	Shielding (Yes/No)	Cores (Qty.)	Remarks
1.	LAN Cable	3	1.5	N	0	RJ45, Cat5e
2.	LAN Cable	1	1.5	N	0	RJ45, Cat5e
3.	USB Type B Cable	1	1.8	Y	0	-
4.	RS-232 Cable	1	0.2	N	0	Provided by manufacturer
5.	Micro USB Cable	1	1.8	Y	0	-
6.	RS-232 Cable	1	2.0	N	0	-

#### 3.4.1 Configuration of System under Test



### 3.5 General Description of Applied Standards

The EUT is a RF Product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

#### Test standard:

**47 CFR FCC Part 15, Subpart F**

ANSI C63.10-2013

All test items have been performed and recorded as per the above standards.

#### 4. Test Types and Results

##### 4.1 Radiated Emissions

##### 4.1.1 Limits of Radiated Emission Measurement - at or Below 960 MHz

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

Note:

1. The emission limits for the bands 9-90 kHz and 110-490 kHz are based on measurements employing an average emissions detector.
2. The lower limit shall apply at the transition frequencies.
3. Emission level (dBuV/m) = 20 log Emission level (uV/m).
4. For frequencies above 1000 MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20 dB under any condition of modulation.

#### 4.1.2 Limits of Radiated Emission Measurement - Above 960 MHz

##### Ground penetrating radars and wall imaging systems

Frequency (MHz)	E.i.r.p. in a Resolution Bandwidth of 1 MHz (dBm)
960-1610	-65.3
1610-1990	-53.3
1990-3100	-51.3
3100-10600	-41.3
Above 10600	-51.3
Frequency (MHz)	E.i.r.p. in a Resolution Bandwidth of of no less than 1 kHz (dBm)
1164-1240	-75.3
1559-1610	-75.3

##### D-wall imaging systems

Frequency (MHz)	E.i.r.p. in a Resolution Bandwidth of 1 MHz (dBm)
960-1610	-65.3
1610-1990	-53.3
Above 1990	-51.3
Frequency (MHz)	E.i.r.p. in a Resolution Bandwidth of of no less than 1 kHz (dBm)
1164-1240	-75.3
1559-1610	-75.3

##### Surveillance systems

Frequency (MHz)	E.i.r.p. in a Resolution Bandwidth of 1 MHz (dBm)
960-1610	-53.3
1610-1990	-51.3
1990-10600	-41.3
Above 10600	-51.3
Frequency (MHz)	E.i.r.p. in a Resolution Bandwidth of of no less than 1 kHz (dBm)
1164-1240	-63.3
1559-1610	-63.3

**Medical imaging systems**

Frequency (MHz)	E.i.r.p. in a Resolution Bandwidth of 1 MHz (dBm)
960-1610	-65.3
1610-1990	-53.3
011990-3100	-51.3
3100-10600	-41.3
Above 10600	-51.3
Frequency (MHz)	E.i.r.p. in a Resolution Bandwidth of of no less than 1 kHz (dBm)
1164-1240	-75.3
1559-1610	-75.3

**Vehicular radar systems**

Frequency (MHz)	E.i.r.p. in a Resolution Bandwidth of 1 MHz (dBm)
960-1610	-75.3
1610-22,000	-61.3
22,000-29,000	-41.3
29,000-31,000	-51.3
Above 31,000	-61.3
Frequency (MHz)	E.i.r.p. in a Resolution Bandwidth of of no less than 1 kHz (dBm)
1164-1240	-85.3
1559-1610	-85.3

**Indoor UWB systems**

Frequency (MHz)	E.i.r.p. in a Resolution Bandwidth of 1 MHz (dBm)
960-1610	-75.3
1610-1990	-53.3
1990-3100	-51.3
3100-10600	-41.3
Above 10600	-51.3
Frequency (MHz)	E.i.r.p. in a Resolution Bandwidth of of no less than 1 kHz (dBm)
1164-1240	-85.3
1559-1610	-85.3

## Hand held UWB systems

Frequency (MHz)	E.i.r.p. in a Resolution Bandwidth of 1 MHz (dBm)
960-1610	-75.3
1610-1990	-63.3
1990-3100	-61.3
3100-10600	-41.3
Above 10600	-61.3
Frequency (MHz)	E.i.r.p. in a Resolution Bandwidth of of no less than 1 kHz (dBm)
1164-1240	-85.3
1559-1610	-85.3

## Note:

1. Within the tables in §§15.509, 15.511, 15.513, 15.515, 15.517, and 15.519, the tighter emission limit applies at the band edges. Radiated emission levels at and below 960 MHz are based on measurements employing a CISPR quasi-peak detector. Radiated emission levels above 960 MHz are based on RMS average measurements over a 1 MHz resolution bandwidth. The RMS average measurement is based on the use of a spectrum analyzer with a resolution bandwidth of 1 MHz, an RMS detector, and a 1 millisecond or less averaging time. Unless otherwise stated, if pulse gating is employed where the transmitter is quiescent for intervals that are long compared to the nominal pulse repetition interval, measurements shall be made with the pulse train gated on. Alternative measurement procedures may be considered by the Commission.
2. When a peak measurement is required, it is acceptable to use a resolution bandwidth other than the 50 MHz specified in this subpart. This resolution bandwidth shall not be lower than 1 MHz or greater than 50 MHz, and the measurement shall be centered on the frequency at which the highest radiated emission occurs, fM. If a resolution bandwidth other than 50 MHz is employed, the peak EIRP limit shall be  $20 \log(RBW/50)$  dBm where RBW is the resolution bandwidth in megahertz that is employed. This may be converted to a peak field strength level at 3 meters using  $E(\text{dBuV/m}) = P(\text{dBm EIRP}) + 95.2$ . If RBW is greater than 3 MHz, the application for certification filed with the Commission must contain a detailed description of the test procedure, calibration of the test setup, and the instrumentation employed in the testing.
3. For vehicular radar systems: Following proper installation, vehicular radar systems shall attenuate any emissions within the 23.6-24.0 GHz band that appear 38 degrees or greater above the horizontal plane by 25 dB below the limit specified in paragraph (d) of this section. For equipment authorized, manufactured or imported on or after January 1, 2005, this level of attenuation shall be 25 dB for any emissions within the 23.6-24.0 GHz band that appear 30 degrees or greater above the horizontal plane. For equipment authorized, manufactured or imported on or after January 1, 2010, this level of attenuation shall be 30 dB for any emissions within the 23.6-24.0 GHz band that appear 30 degrees or greater above the horizontal plane. For equipment authorized, manufactured or imported on or after January 1, 2014, this level of attenuation shall be 35 dB for any emissions within the 23.6-24.0 GHz band that appear 30 degrees or greater above the horizontal plane. This level of attenuation can be achieved through the antenna directivity, through a reduction in output power or any other means.



## 4.2 Test Instruments

Description & Manufacturer	Model No.	Serial No.	Cal. Date	Cal. Due
Test Receiver ROHDE & SCHWARZ	ESR3	102782	Dec. 10, 2021	Dec. 09, 2022
Spectrum Analyzer ROHDE & SCHWARZ	FSW43	101582	Apr. 01, 2021	Mar. 31, 2022
BILOG Antenna SCHWARZBECK	VULB9168	9168-1213	Oct. 27, 2021	Oct. 26, 2022
HORN Antenna RF SPIN	DRH18-E	210103A18E	Nov. 14, 2021	Nov. 13, 2022
HORN Antenna SCHWARZBECK	BBHA 9170	9170-1048	Nov. 14, 2021	Nov. 13, 2022
Loop Antenna TESEQ	HLA 6121	45745	Jul. 21, 2021	Jul. 20, 2022
Preamplifier EMCI (Below 1GHz)	EMC330N	980782	Jan. 17, 2022	Jan. 16, 2023
Preamplifier EMCI (Above 1GHz)	EMC118A45SE	980808	Dec. 30, 2021	Dec. 29, 2022
Preamplifier EMCI (18GHz~40GHz)	EMC184045SE	980788	Jan. 17, 2022	Jan. 16, 2023
RF signal cable EMCI	EMC104-SM-SM-(9 000+2000+1000)	201243+ 201231+ 210102	Jan. 17, 2022	Jan. 16, 2023
RF signal cable EMCI	EMCCFD400-NM-N M-(9000+300+500)	201236+ 201235+ 201233	Jan. 17, 2022	Jan. 16, 2023
RF signal cable EMCI	EMC101G-KM-KM- (5000+3000+2000)	201260+201257+20125 4	Jan. 17, 2022	Jan. 16, 2023
Software BV ADT	ADT_Radiated_ V7.6.15.9.5	NA	NA	NA
Antenna Tower & Turn Max-Full	MFT-151SS-0.5T	NA	NA	NA
Turn Table Max-Full	MF-7802BS	NA	NA	NA
Turn Table Controller Max-Full	MF-7802BS	MF780208674	NA	NA
Turn Table Controller Max-Full	MF-7802BS	MF780208674	NA	NA

Note: 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

2. The test was performed in WM Chamber 8.

#### 4.2.1 Test Procedures

##### For Radiated emission below 30MHz

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter chamber room. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. Both X and Y axes of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Quasi-Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.

Note:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 9kHz at frequency below 30MHz.

##### For Radiated emission above 30MHz


- a. The EUT was placed on the top of a rotating table 0.8 meters (for 30MHz ~ 960MHz) / 1.5 meters (for above 960MHz) above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1 GHz.
- f. The test-receiver system was set to peak and average detects function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz. If the peak reading value also meets average limit, measurement with the average detector is unnecessary.

#### 4.2.2 Deviation from Test Standard


No deviation.

### 4.2.3 Test Setup


#### For Radiated emission below 30MHz

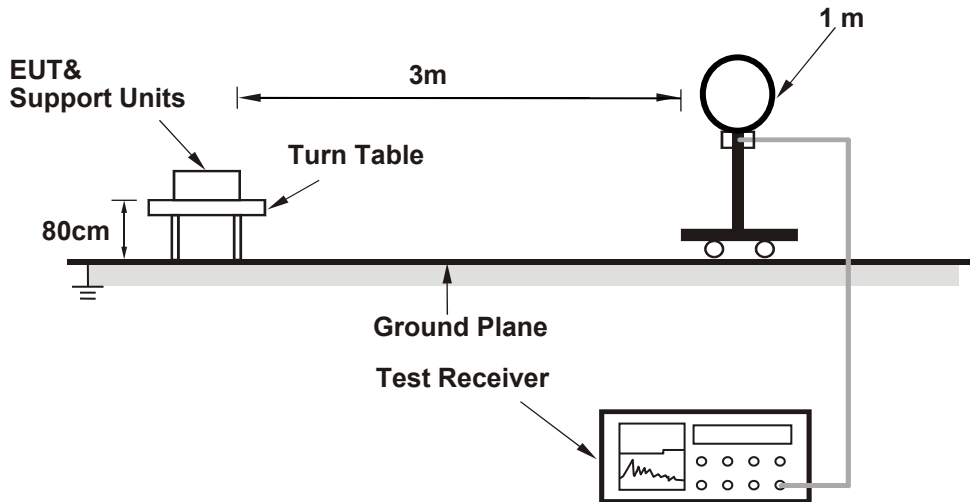

#### For Radiated emission 30MHz to 960MHz

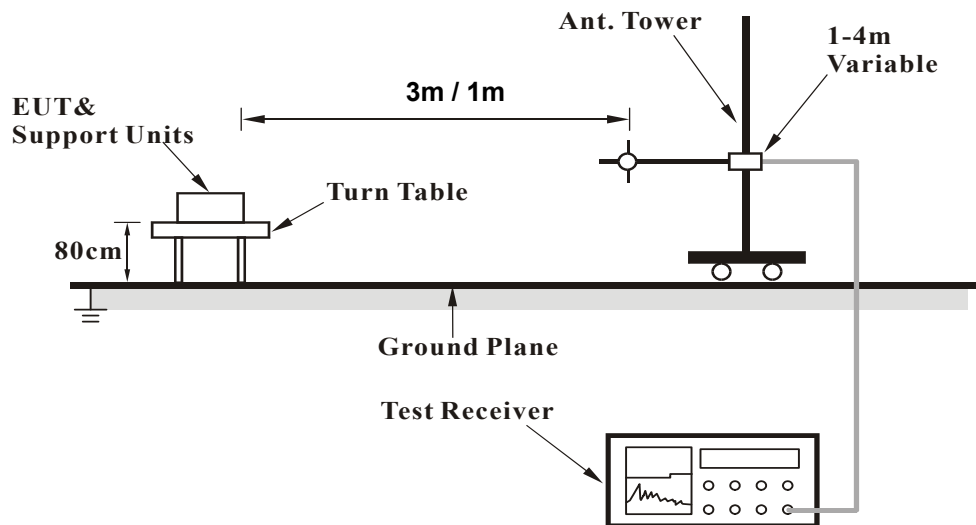

### For Radiated emission above 1GHz

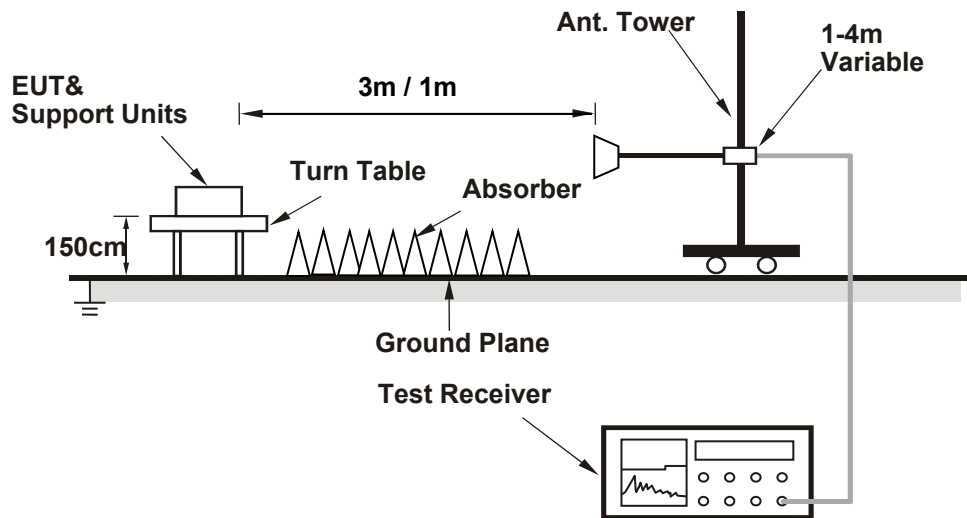

For the actual test configuration, please refer to the attached file (Test Setup Photo).

#### 4.2.4 EUT Operating Conditions

Set the EUT under transmission condition continuously at specific channel frequency.

#### 4.2.5 Test Results


##### < 960MHz

RF Mode	TX UWB	Channel	CH 5 : 6489.6 MHz
Frequency Range	30MHz ~ 960MHz	Detector Function	Quasi-Peak (QP)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	59.52	21.53 QP	40.00	-18.47	1.49 H	7	40.27	-18.74
2	148.09	20.78 QP	43.50	-22.72	1.00 H	48	38.94	-18.16
3	256.33	22.31 QP	46.00	-23.69	1.99 H	2	41.54	-19.23
4	319.59	26.30 QP	46.00	-19.70	1.00 H	266	43.32	-17.02
5	488.29	18.62 QP	46.00	-27.38	1.99 H	2	31.68	-13.06
6	883.32	23.27 QP	46.00	-22.73	1.00 H	2	29.60	-6.33

#### Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit of frequency range 30MHz~1000MHz.
5. The emission levels were very low against the limit of frequency range 9kHz~30MHz: the amplitude of spurious emissions attenuated more than 20 dB below the permissible value to be report.

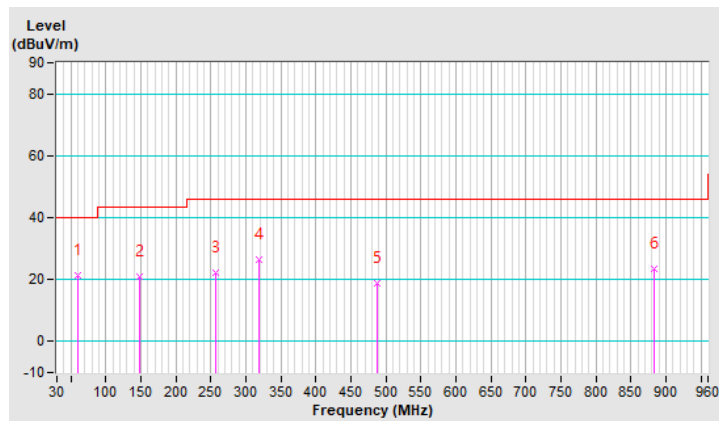


RF Mode	TX UWB	Channel	CH 5 : 6489.6 MHz
Frequency Range	30MHz ~ 960MHz	Detector Function	Quasi-Peak (QP)

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	59.52	30.50 QP	40.00	-9.50	1.51 V	2	49.24	-18.74
2	148.09	26.98 QP	43.50	-16.52	1.01 V	19	45.14	-18.16
3	256.33	26.32 QP	46.00	-19.68	1.01 V	283	45.55	-19.23
4	384.26	32.16 QP	46.00	-13.84	1.01 V	18	47.66	-15.50
5	552.96	19.01 QP	46.00	-26.99	1.01 V	270	30.90	-11.89
6	870.67	23.78 QP	46.00	-22.22	1.01 V	18	30.31	-6.53

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit of frequency range 30MHz~1000MHz.
5. The emission levels were very low against the limit of frequency range 9kHz~30MHz: the amplitude of spurious emissions attenuated more than 20 dB below the permissible value to be report.

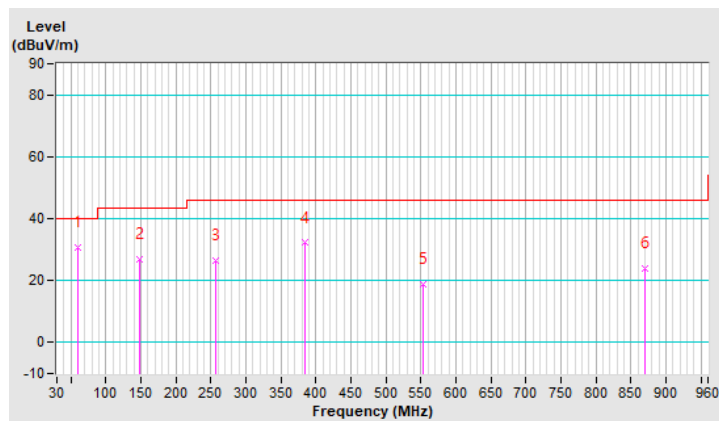


RF Mode	TX UWB	Channel	CH 9 : 7987.2 MHz
Frequency Range	30MHz ~ 960MHz	Detector Function	Quasi-Peak (QP)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	59.52	21.34 QP	40.00	-18.66	1.51 H	13	40.08	-18.74
2	148.09	21.85 QP	43.50	-21.65	2.00 H	66	40.01	-18.16
3	256.33	21.05 QP	46.00	-24.95	1.01 H	257	40.28	-19.23
4	384.26	26.88 QP	46.00	-19.12	1.01 H	349	42.38	-15.50
5	523.43	18.44 QP	46.00	-27.56	2.00 H	42	30.80	-12.36
6	867.86	23.46 QP	46.00	-22.54	2.00 H	116	30.04	-6.58

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit of frequency range 30MHz~1000MHz.
5. The emission levels were very low against the limit of frequency range 9kHz~30MHz: the amplitude of spurious emissions attenuated more than 20 dB below the permissible value to be report.

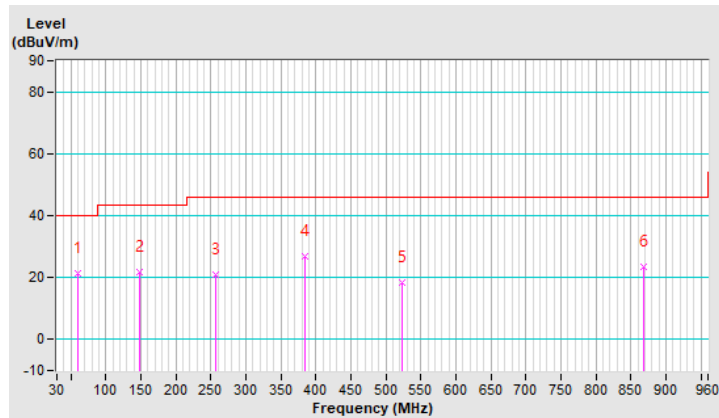


RF Mode	TX UWB	Channel	CH 9 : 7987.2 MHz
Frequency Range	30MHz ~ 960MHz	Detector Function	Quasi-Peak (QP)

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	59.52	29.83 QP	40.00	-10.17	1.00 V	2	48.57	-18.74
2	148.09	25.61 QP	43.50	-17.89	1.49 V	23	43.77	-18.16
3	319.59	28.80 QP	46.00	-17.20	1.00 V	166	45.82	-17.02
4	384.26	31.59 QP	46.00	-14.41	1.00 V	283	47.09	-15.50
5	586.70	19.39 QP	46.00	-26.61	1.00 V	2	30.18	-10.79
6	843.96	23.28 QP	46.00	-22.72	1.00 V	103	30.12	-6.84

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit of frequency range 30MHz~1000MHz.
5. The emission levels were very low against the limit of frequency range 9kHz~30MHz: the amplitude of spurious emissions attenuated more than 20 dB below the permissible value to be report.

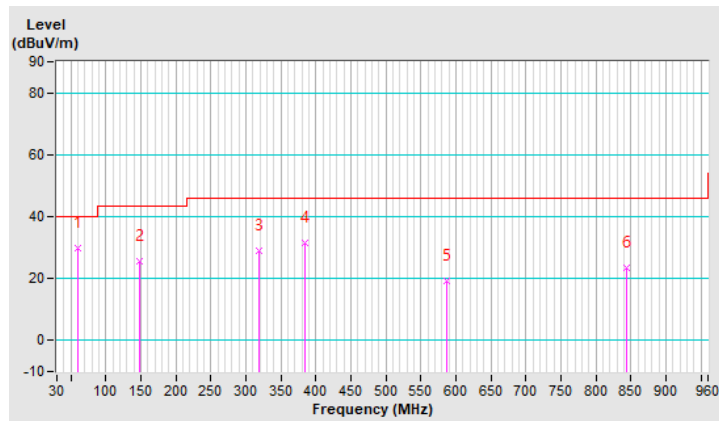




**960-16000MHz**

RF Mode	TX UWB	Channel	CH 5 : 6489.6 MHz
Frequency Range	960MHz ~ 10600MHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance: Horizontal at 1 m								
No.	Freq. (MHz)	EIRP Emission Level (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV/m)	Correction Factor
1	1104.60	-78.96 AV	-75.30	-3.66	1.66 H	199	33.53	-112.49
2	1924.00	-76.18 AV	-53.30	-22.88	1.45 H	211	34.26	-110.44
3	2675.92	-73.76 AV	-51.30	-22.46	1.93 H	99	34.55	-108.31
4	3794.16	-70.14 AV	-41.30	-28.84	1.87 H	166	34.60	-104.74
5	5066.64	-67.50 AV	-41.30	-26.20	1.84 H	155	35.07	-102.57
6	*6489.60	-52.98 AV	-41.30	-11.68	1.47 H	123	45.13	-98.11
7	*6489.60	-12.88 PK	0.00	-12.88	1.47 H	123	85.23	-98.11

Remarks:

1. EIRP Emission Level(dBm) = Raw Value(dBuV/m) + Correction Factor.
2. Correction Factor = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)-1m to 3m Test distance Fact(dB) – 95.2 (field strength converted to EIRP at 3m).
3. Test distance at 1m, 1m to 3m Test distance Fact(dB)=20\*log(3/1)= 9.54dB
4. Margin value = Emission Level – Limit value.
5. “ \* “: Fundamental frequency.

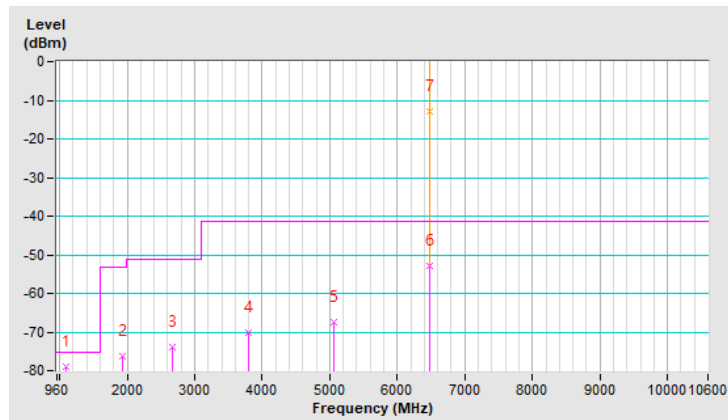


RF Mode	TX UWB	Channel	CH 5 : 6489.6 MHz
Frequency Range	960MHz ~ 10600MHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance: Vertical at 1 m								
No.	Freq. (MHz)	EIRP Emission Level (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV/m)	Correction Factor
1	1335.96	-79.24 AV	-75.30	-3.94	1.88 V	301	32.55	-111.79
2	1991.48	-75.65 AV	-51.30	-24.35	1.23 V	314	34.23	-109.88
3	2772.32	-73.12 AV	-51.30	-21.82	1.33 V	301	34.59	-107.71
4	4237.60	-69.63 AV	-41.30	-28.33	1.11 V	300	35.22	-104.85
5	*6489.60	-51.92 AV	-41.30	-10.62	1.52 V	337	46.19	-98.11
6	*6489.60	-34.50 PK	0.00	-34.50	1.52 V	337	63.61	-98.11
7	8556.32	-60.97 AV	-41.30	-19.67	1.82 V	311	36.13	-97.10

Remarks:

1. EIRP Emission Level(dBm) = Raw Value(dBuV/m) + Correction Factor.
2. Correction Factor = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)-1m to 3m Test distance Fact(dB) – 95.2 (field strength converted to EIRP at 3m).
3. Test distance at 1m, 1m to 3m Test distance Fact(dB)=20\*log(3/1)= 9.54dB
4. Margin value = Emission Level – Limit value.
5. “ \* “: Fundamental frequency.

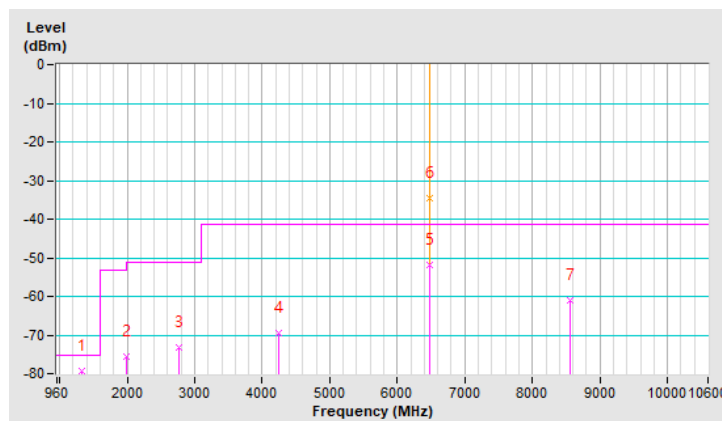


RF Mode	TX UWB	Channel	CH 9 : 7987.2 MHz
Frequency Range	960MHz ~ 10600MHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance: Horizontal at 1 m								
No.	Freq. (MHz)	EIRP Emission Level (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV/m)	Correction Factor
1	1335.96	-79.21 AV	-75.30	-3.91	1.18 H	164	32.58	-111.79
2	1962.56	-75.87 AV	-53.30	-22.57	1.74 H	100	34.29	-110.16
3	2675.92	-73.97 AV	-51.30	-22.67	1.82 H	177	34.34	-108.31
4	5153.40	-67.13 AV	-41.30	-25.83	1.24 H	160	35.28	-102.41
5	*7987.20	-44.43 AV	-41.30	-3.13	1.48 H	132	52.89	-97.32
6	*7987.20	-13.05 PK	0.00	-13.05	1.48 H	132	84.27	-97.32
7	10060.16	-59.21 AV	-41.30	-17.91	1.77 H	162	37.52	-96.73

Remarks:

1. EIRP Emission Level(dBm) = Raw Value(dBuV/m) + Correction Factor.
2. Correction Factor = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)-1m to 3m Test distance Fact(dB) – 95.2 (field strength converted to EIRP at 3m).
3. Test distance at 1m, 1m to 3m Test distance Fact(dB)= $20 \cdot \log(3/1) = 9.54$ dB
4. Margin value = Emission Level – Limit value.
5. “ \* “: Fundamental frequency.

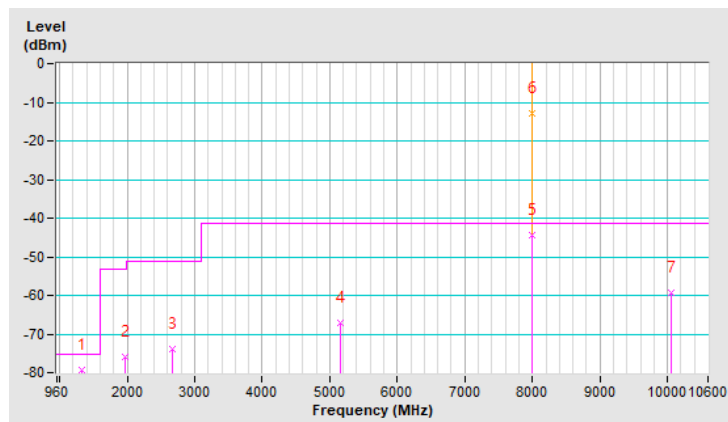


RF Mode	TX UWB	Channel	CH 9 : 7987.2 MHz
Frequency Range	960MHz ~ 10600MHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance: Vertical at 1 m								
No.	Freq. (MHz)	EIRP Emission Level (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV/m)	Correction Factor
1	1586.60	-79.17 AV	-75.30	-3.87	1.82 V	221	32.35	-111.52
2	1856.52	-76.84 AV	-53.30	-23.54	1.88 V	286	34.21	-111.05
3	2560.24	-74.04 AV	-51.30	-22.74	1.84 V	289	34.70	-108.74
4	4121.92	-69.47 AV	-41.30	-28.17	1.12 V	220	35.62	-105.09
5	6290.92	-63.78 AV	-41.30	-22.48	1.87 V	289	35.27	-99.05
6	*7987.20	-50.27 AV	-41.30	-8.97	1.54 V	259	47.05	-97.32
7	*7987.20	-23.75 PK	0.00	-23.75	1.54 V	259	73.57	-97.32

Remarks:

1. EIRP Emission Level(dBm) = Raw Value(dBuV/m) + Correction Factor.
2. Correction Factor = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)-1m to 3m Test distance Fact(dB) – 95.2 (field strength converted to EIRP at 3m).
3. Test distance at 1m, 1m to 3m Test distance Fact(dB)=20\*log(3/1)= 9.54dB
4. Margin value = Emission Level – Limit value.
5. “ \* “: Fundamental frequency.

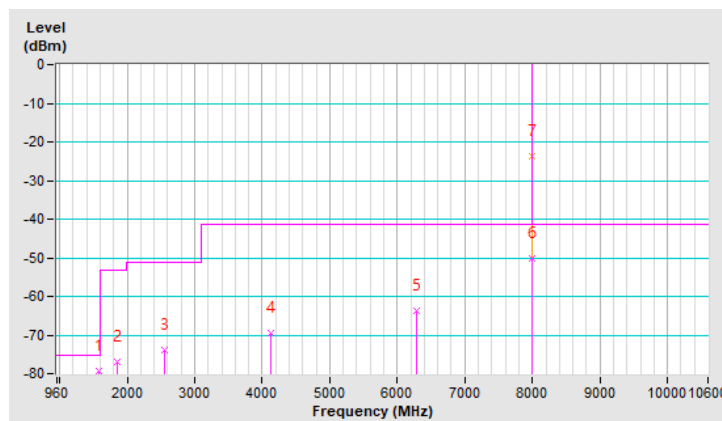


**10600-18000MHz**

RF Mode	TX UWB	Channel	CH 5 : 6489.6 MHz
Frequency Range	10600MHz ~ 18000MHz	Detector Function	Average (AV)

Antenna Polarity & Test Distance: Horizontal at 1 m								
No.	Freq. (MHz)	EIRP Emission Level (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV/m)	Correction Factor
1	16658.56	-57.62 AV	-51.30	-6.32	1.44 H	360	43.40	-101.02

Remarks:

1. EIRP Emission Level(dBm) = Raw Value(dBuV/m) + Correction Factor.
2. Correction Factor = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)-1m to 3m Test distance Fact(dB) – 95.2 (field strength converted to EIRP at 3m).
3. Test distance at 1m, 1m to 3m Test distance Fact(dB)= $20 \cdot \log(3/1) = 9.54\text{dB}$
4. Margin value = Emission Level – Limit value.

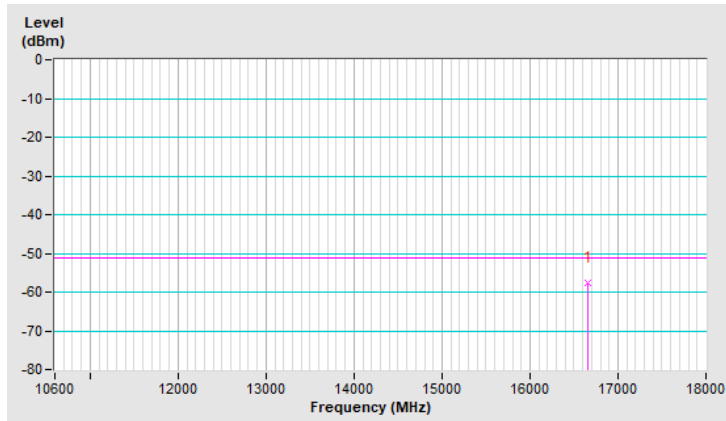


RF Mode	TX UWB	Channel	CH 5 : 6489.6 MHz
Frequency Range	10600MHz ~ 18000MHz	Detector Function	Average (AV)

Antenna Polarity & Test Distance: Vertical at 1 m								
No.	Freq. (MHz)	EIRP Emission Level (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV/m)	Correction Factor
1	15726.53	-57.34 AV	-51.30	-6.04	1.44 V	211	43.54	-100.88

Remarks:

1. EIRP Emission Level(dBm) = Raw Value(dBuV/m) + Correction Factor.
2. Correction Factor = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)-1m to 3m Test distance Fact(dB) – 95.2 (field strength converted to EIRP at 3m).
3. Test distance at 1m, 1m to 3m Test distance Fact(dB)=20\*log(3/1)= 9.54dB
4. Margin value = Emission Level – Limit value.

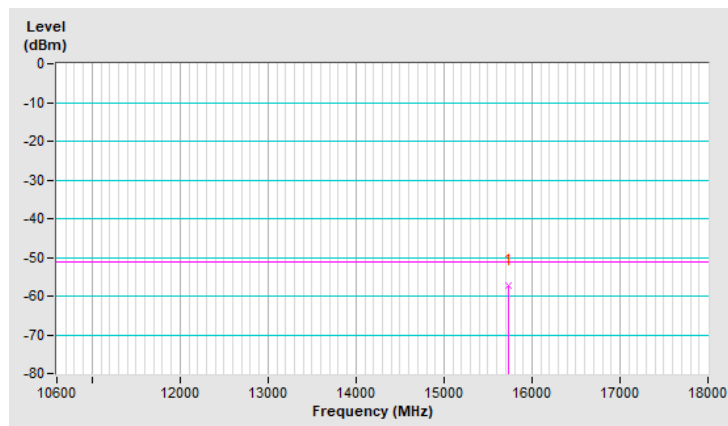


RF Mode	TX UWB	Channel	CH 9 : 7987.2 MHz
Frequency Range	10600MHz ~ 18000MHz	Detector Function	Average (AV)

Antenna Polarity & Test Distance: Horizontal at 1 m								
No.	Freq. (MHz)	EIRP Emission Level (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV/m)	Correction Factor
1	16884.63	-57.12 AV	-51.30	-5.82	1.45 H	247	44.19	-101.31

Remarks:

1. EIRP Emission Level(dBm) = Raw Value(dBuV/m) + Correction Factor.
2. Correction Factor = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)-1m to 3m Test distance Fact(dB) – 95.2 (field strength converted to EIRP at 3m).
3. Test distance at 1m, 1m to 3m Test distance Fact(dB)= $20 \cdot \log(3/1) = 9.54\text{dB}$
4. Margin value = Emission Level – Limit value.

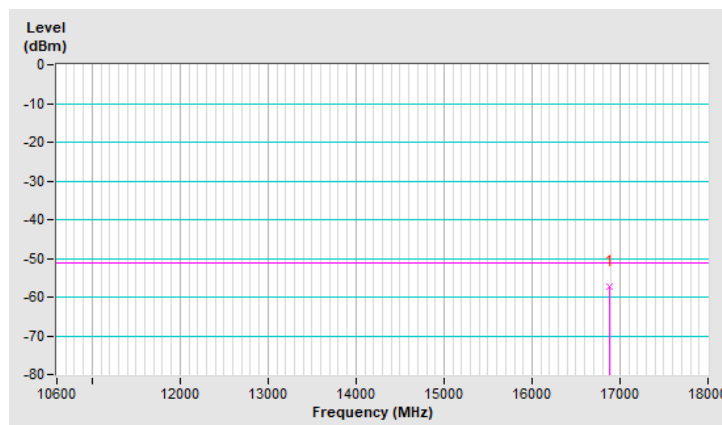


RF Mode	TX UWB	Channel	CH 9 : 7987.2 MHz
Frequency Range	10600MHz ~ 18000MHz	Detector Function	Average (AV)

Antenna Polarity & Test Distance: Vertical at 1 m								
No.	Freq. (MHz)	EIRP Emission Level (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV/m)	Correction Factor
1	17901.58	-56.96 AV	-51.30	-5.66	1.45 V	214	45.30	-102.26

Remarks:

1. EIRP Emission Level(dBm) = Raw Value(dBuV/m) + Correction Factor.
2. Correction Factor = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)-1m to 3m Test distance Fact(dB) – 95.2 (field strength converted to EIRP at 3m).
3. Test distance at 1m, 1m to 3m Test distance Fact(dB)=20\*log(3/1)= 9.54dB
4. Margin value = Emission Level – Limit value.

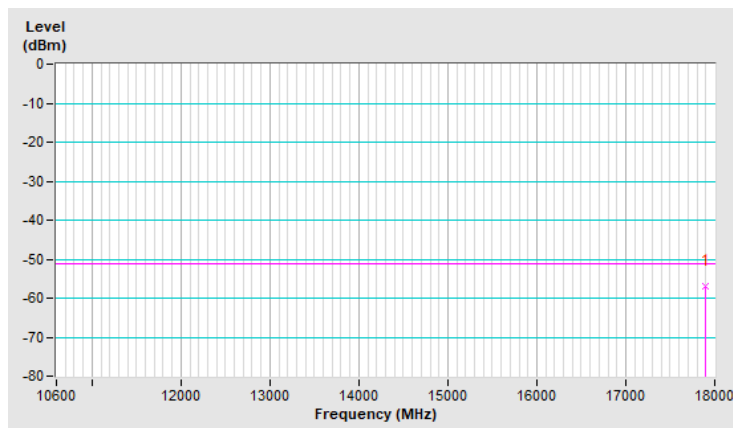




**18000-40000MHz**

RF Mode	TX UWB	Channel	CH 5 : 6489.6 MHz
Frequency Range	18000MHz ~ 40GHz	Detector Function	Average (AV)

Antenna Polarity & Test Distance: Horizontal at 1 m								
No.	Freq. (MHz)	EIRP Emission Level (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV/m)	Correction Factor
1	37884.15	-56.86 AV	-51.30	-5.56	1.47 H	211	37.92	-94.78

Remarks:

1. EIRP Emission Level(dBm) = Raw Value(dBuV/m) + Correction Factor.
2. Correction Factor = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)-1m to 3m Test distance Fact(dB) – 95.2 (field strength converted to EIRP at 3m).
3. Test distance at 1m, 1m to 3m Test distance Fact(dB)=20\*log(3/1)= 9.54dB
4. Margin value = Emission Level – Limit value.

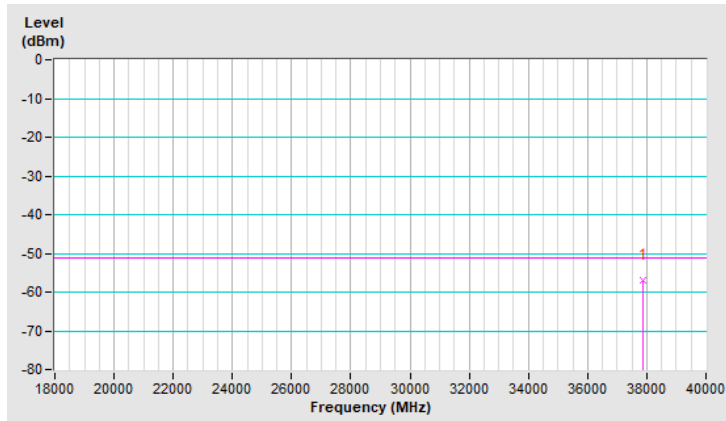


RF Mode	TX UWB	Channel	CH 5 : 6489.6 MHz
Frequency Range	18000MHz ~ 40GHz	Detector Function	Average (AV)

Antenna Polarity & Test Distance: Vertical at 1 m								
No.	Freq. (MHz)	EIRP Emission Level (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV/m)	Correction Factor
1	37934.20	-56.42 AV	-51.30	-5.12	1.58 V	211	38.37	-94.79

Remarks:

1. EIRP Emission Level(dBm) = Raw Value(dBuV/m) + Correction Factor.
2. Correction Factor = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)-1m to 3m Test distance Fact(dB) – 95.2 (field strength converted to EIRP at 3m).
3. Test distance at 1m, 1m to 3m Test distance Fact(dB)=20\*log(3/1)= 9.54dB
4. Margin value = Emission Level – Limit value.

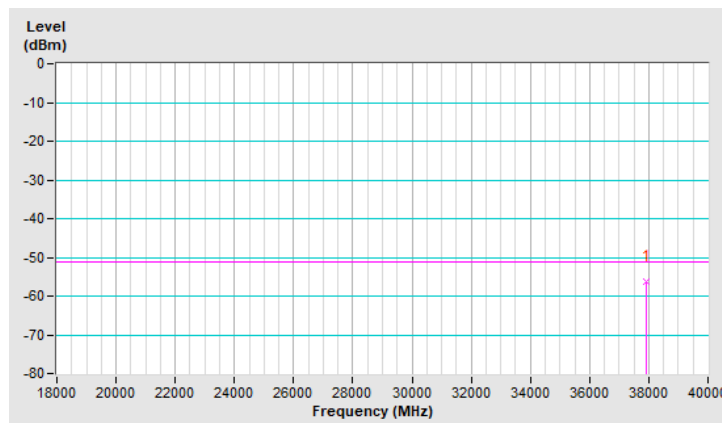


RF Mode	TX UWB	Channel	CH 9 : 7987.2 MHz
Frequency Range	18000MHz ~ 40GHz	Detector Function	Average (AV)

Antenna Polarity & Test Distance: Horizontal at 1 m								
No.	Freq. (MHz)	EIRP Emission Level (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV/m)	Correction Factor
1	30231.45	-63.49 AV	-51.30	-12.19	1.37 H	214	32.41	-95.90

Remarks:

1. EIRP Emission Level(dBm) = Raw Value(dBuV/m) + Correction Factor.
2. Correction Factor = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)-1m to 3m Test distance Fact(dB) – 95.2 (field strength converted to EIRP at 3m).
3. Test distance at 1m, 1m to 3m Test distance Fact(dB)= $20 \cdot \log(3/1) = 9.54\text{dB}$
4. Margin value = Emission Level – Limit value.

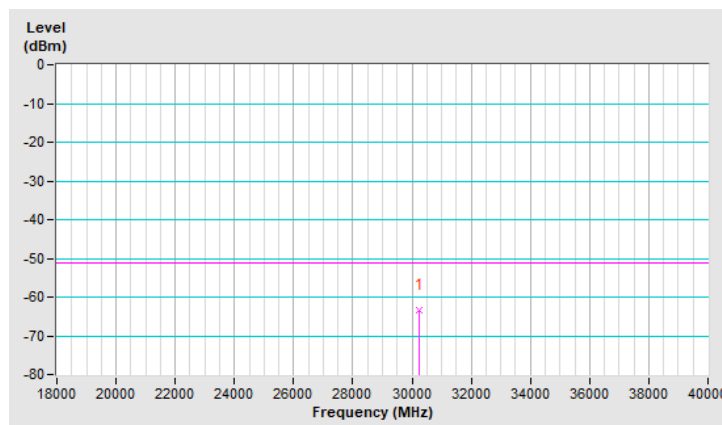


RF Mode	TX UWB	Channel	CH 9 : 7987.2 MHz
Frequency Range	18000MHz ~ 40GHz	Detector Function	Average (AV)

Antenna Polarity & Test Distance: Vertical at 1 m								
No.	Freq. (MHz)	EIRP Emission Level (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV/m)	Correction Factor
1	30403.05	-63.63 AV	-51.30	-12.33	1.66 V	242	32.27	-95.90

Remarks:

1. EIRP Emission Level(dBm) = Raw Value(dBuV/m) + Correction Factor.
2. Correction Factor = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)-1m to 3m Test distance Fact(dB) – 95.2 (field strength converted to EIRP at 3m).
3. Test distance at 1m, 1m to 3m Test distance Fact(dB)=20\*log(3/1)= 9.54dB
4. Margin value = Emission Level – Limit value.

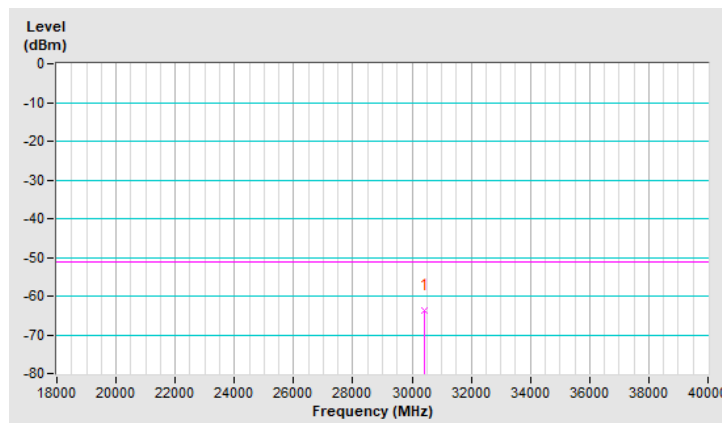


**1164-1240MHz**

RF Mode	TX UWB	Channel	CH 5 : 6489.6 MHz
Frequency Range	1164MHz ~ 1240MHz	Detector Function	Average (AV)

Antenna Polarity & Test Distance: Horizontal at 1 m								
No.	Freq. (MHz)	EIRP Emission Level (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV/m)	Correction Factor
1	1201.62	-108.17 AV	-85.30	-22.87	1.23 H	222	4.23	-112.40

Remarks:

1. EIRP Emission Level(dBm) = Raw Value(dBuV/m) + Correction Factor.
2. Correction Factor = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)-1m to 3m Test distance Fact(dB) – 95.2 (field strength converted to EIRP at 3m).
3. Test distance at 1m, 1m to 3m Test distance Fact(dB)=20\*log(3/1)= 9.54dB
4. Margin value = Emission Level – Limit value.

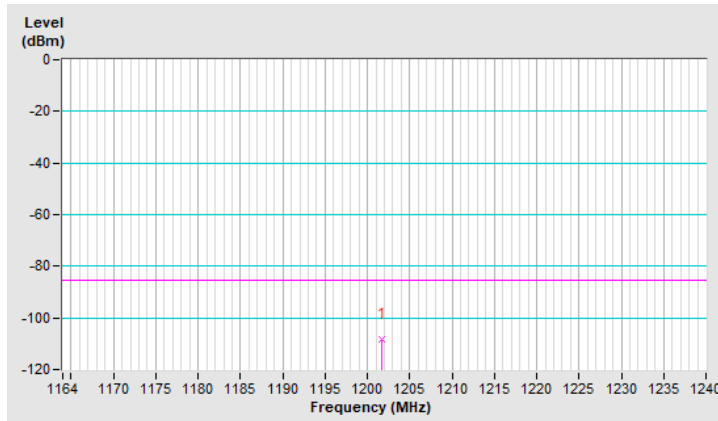


RF Mode	TX UWB	Channel	CH 5 : 6489.6 MHz
Frequency Range	1164MHz ~ 1240MHz	Detector Function	Average (AV)

Antenna Polarity & Test Distance: Vertical at 1 m								
No.	Freq. (MHz)	EIRP Emission Level (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV/m)	Correction Factor
1	1202.76	-108.52 AV	-85.30	-23.22	2.11 V	145	3.87	-112.39

Remarks:

1. EIRP Emission Level(dBm) = Raw Value(dBuV/m) + Correction Factor.
2. Correction Factor = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)-1m to 3m Test distance Fact(dB) – 95.2 (field strength converted to EIRP at 3m).
3. Test distance at 1m, 1m to 3m Test distance Fact(dB)=20\*log(3/1)= 9.54dB
4. Margin value = Emission Level – Limit value.

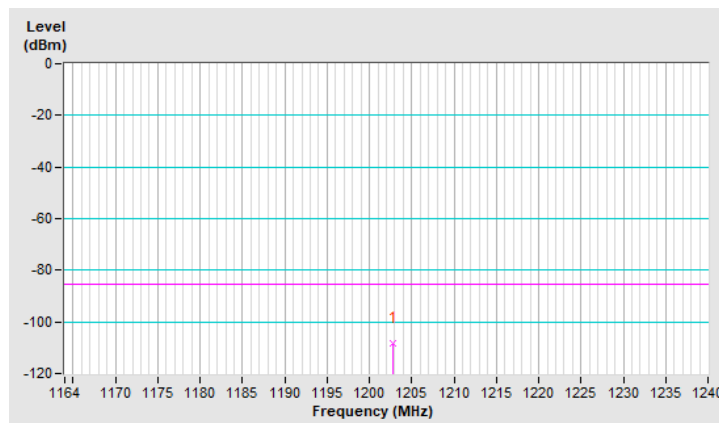


RF Mode	TX UWB	Channel	CH 9 : 7987.2 MHz
Frequency Range	1164MHz ~ 1240MHz	Detector Function	Average (AV)

Antenna Polarity & Test Distance: Horizontal at 1 m								
No.	Freq. (MHz)	EIRP Emission Level (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV/m)	Correction Factor
1	1219.18	-106.27 AV	-85.30	-20.97	1.41 H	133	5.98	-112.25

Remarks:

1. EIRP Emission Level(dBm) = Raw Value(dBuV/m) + Correction Factor.
2. Correction Factor = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)-1m to 3m Test distance Fact(dB) – 95.2 (field strength converted to EIRP at 3m).
3. Test distance at 1m, 1m to 3m Test distance Fact(dB)= $20 \cdot \log(3/1) = 9.54$ dB
4. Margin value = Emission Level – Limit value.

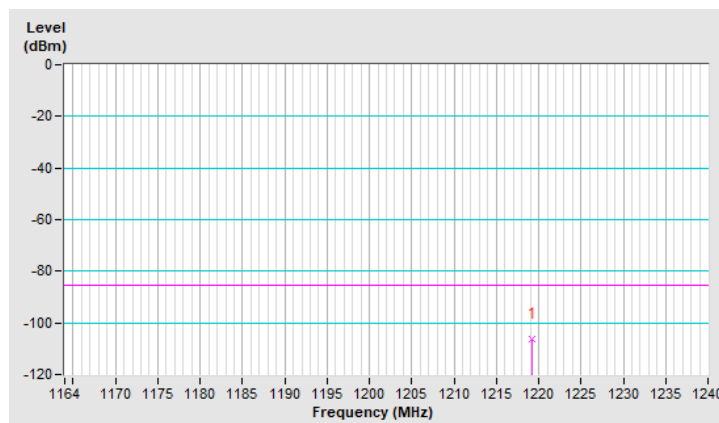


RF Mode	TX UWB	Channel	CH 9 : 7987.2 MHz
Frequency Range	1164MHz ~ 1240MHz	Detector Function	Average (AV)

Antenna Polarity & Test Distance: Vertical at 1 m								
No.	Freq. (MHz)	EIRP Emission Level (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV/m)	Correction Factor
1	1185.43	-107.16 AV	-85.30	-21.86	1.52 V	214	5.20	-112.36

Remarks:

1. EIRP Emission Level(dBm) = Raw Value(dBuV/m) + Correction Factor.
2. Correction Factor = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)-1m to 3m Test distance Fact(dB) – 95.2 (field strength converted to EIRP at 3m).
3. Test distance at 1m, 1m to 3m Test distance Fact(dB)=20\*log(3/1)= 9.54dB
4. Margin value = Emission Level – Limit value.

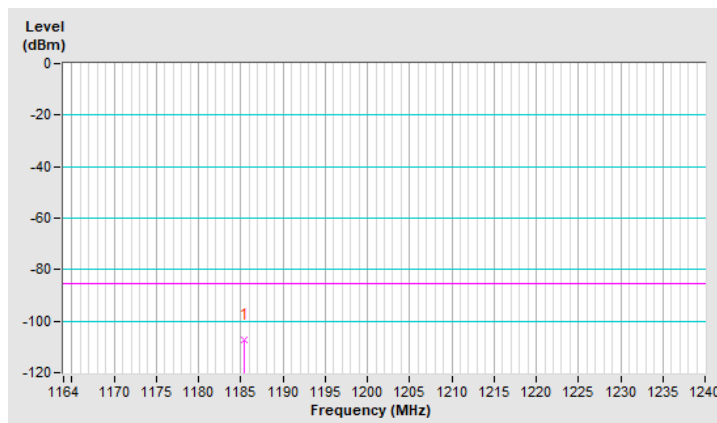




**1559-1610 MHz**

RF Mode	TX UWB	Channel	CH 5 : 6489.6 MHz
Frequency Range	1559MHz ~ 1610MHz	Detector Function	Average (AV)

Antenna Polarity & Test Distance: Horizontal at 1 m								
No.	Freq. (MHz)	EIRP Emission Level (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV/m)	Correction Factor
1	1585.37	-107.42 AV	-85.30	-22.12	1.45 H	311	4.11	-111.53

Remarks:

1. EIRP Emission Level(dBm) = Raw Value(dBuV/m) + Correction Factor.
2. Correction Factor = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)-1m to 3m Test distance Fact(dB) – 95.2 (field strength converted to EIRP at 3m).
3. Test distance at 1m, 1m to 3m Test distance Fact(dB)=20\*log(3/1)= 9.54dB
4. Margin value = Emission Level – Limit value.

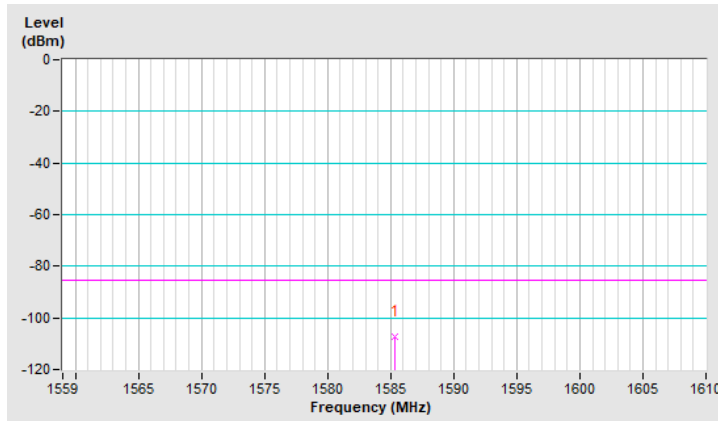


RF Mode	TX UWB	Channel	CH 5 : 6489.6 MHz
Frequency Range	1559MHz ~ 1610MHz	Detector Function	Average (AV)

Antenna Polarity & Test Distance: Vertical at 1 m								
No.	Freq. (MHz)	EIRP Emission Level (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV/m)	Correction Factor
1	1581.44	-107.50 AV	-85.30	-22.20	1.45 V	211	4.04	-111.54

Remarks:

1. EIRP Emission Level(dBm) = Raw Value(dBuV/m) + Correction Factor.
2. Correction Factor = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)-1m to 3m Test distance Fact(dB) – 95.2 (field strength converted to EIRP at 3m).
3. Test distance at 1m, 1m to 3m Test distance Fact(dB)=20\*log(3/1)= 9.54dB
4. Margin value = Emission Level – Limit value.

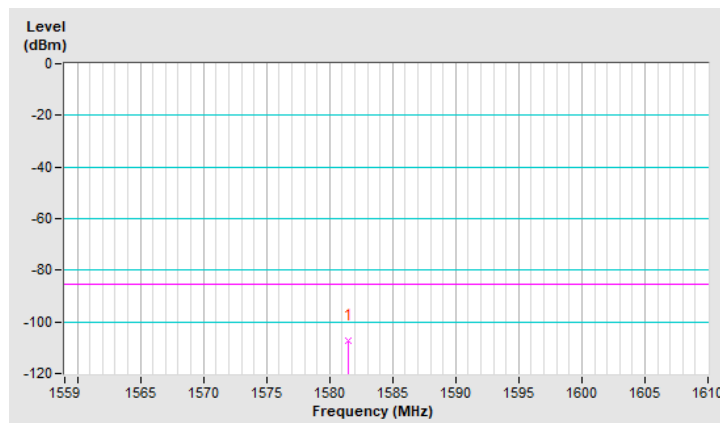


RF Mode	TX UWB	Channel	CH 9 : 7987.2 MHz
Frequency Range	1559MHz ~ 1610MHz	Detector Function	Average (AV)

Antenna Polarity & Test Distance: Horizontal at 1 m								
No.	Freq. (MHz)	EIRP Emission Level (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV/m)	Correction Factor
1	1582.66	-105.98 AV	-85.30	-20.68	1.99 H	211	5.56	-111.54

Remarks:

1. EIRP Emission Level(dBm) = Raw Value(dBuV/m) + Correction Factor.
2. Correction Factor = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)-1m to 3m Test distance Fact(dB) – 95.2 (field strength converted to EIRP at 3m).
3. Test distance at 1m, 1m to 3m Test distance Fact(dB)= $20 \cdot \log(3/1) = 9.54\text{dB}$
4. Margin value = Emission Level – Limit value.

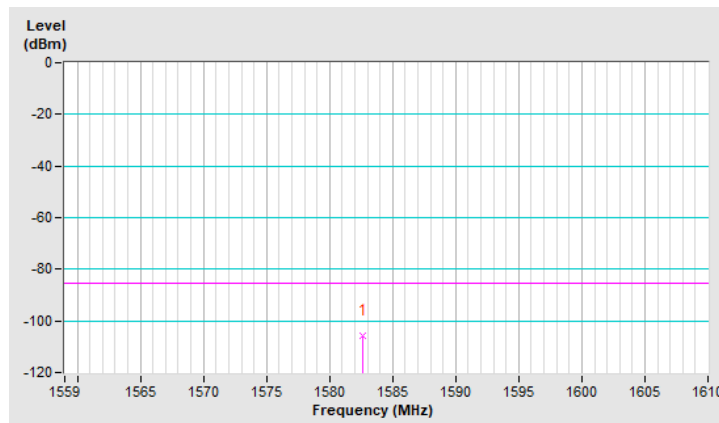


RF Mode	TX UWB	Channel	CH 9 : 7987.2 MHz
Frequency Range	1559MHz ~ 1610MHz	Detector Function	Average (AV)

Antenna Polarity & Test Distance: Vertical at 1 m								
No.	Freq. (MHz)	EIRP Emission Level (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV/m)	Correction Factor
1	1586.64	-106.00 AV	-85.30	-20.70	1.66 V	133	5.52	-111.52

Remarks:

1. EIRP Emission Level(dBm) = Raw Value(dBuV/m) + Correction Factor.
2. Correction Factor = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)-1m to 3m Test distance Fact(dB) – 95.2 (field strength converted to EIRP at 3m).
3. Test distance at 1m, 1m to 3m Test distance Fact(dB)=20\*log(3/1)= 9.54dB
4. Margin value = Emission Level – Limit value.

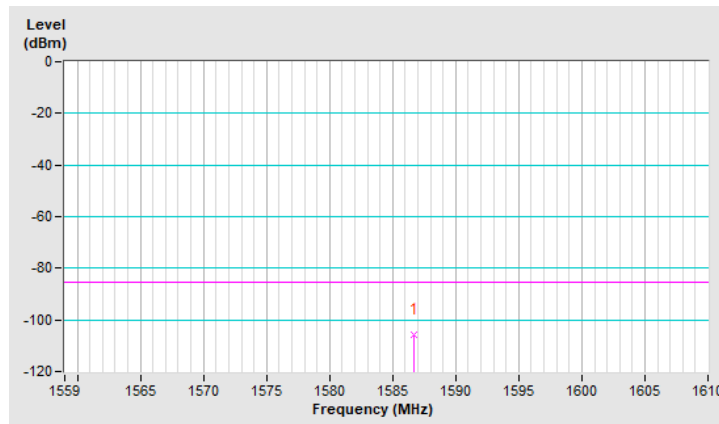

### 4.3 Conducted Emission Measurement

#### 4.3.1 Limits of Conducted Emission Measurement

Frequency (MHz)	Conducted Limit (dBuV)	
	Quasi-peak	Average
0.15 - 0.5	66 - 56	56 - 46
0.50 - 5.0	56	46
5.0 - 30.0	60	50

Note: 1. The lower limit shall apply at the transition frequencies.  
 2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.

#### 4.3.2 Test Instruments

Description & Manufacturer	Model No.	Serial No.	Cal. Date	Cal. Due
Test Receiver ROHDE & SCHWARZ	ESCI	100613	Dec. 03, 2021	Dec. 02, 2022
RF signal cable Woken	5D-FB	Cable-cond1-01	Jan. 15, 2022	Jan. 14, 2023
LISN ROHDE & SCHWARZ (EUT)	ESH2-Z5	100100	Feb. 17, 2022	Feb. 16, 2023
LISN ROHDE & SCHWARZ (Peripheral)	ESH3-Z5	100311	Sep. 07, 2021	Sep. 06, 2022
Software ADT	BV ADT_Cond_ V7.3.7.4	NA	NA	NA

Note: 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.  
 2. The test was performed in HwaYa Shielded Room 1 (Conduction 1).  
 3. The VCCI Site Registration No. is C-12040.

### 4.3.3 Test Procedures


- The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- The frequency range from 150kHz to 30MHz was searched. Emission levels under (Limit - 20dB) was not recorded.

Note: The resolution bandwidth and video bandwidth of test receiver is 9kHz for quasi-peak detection (QP) and average detection (AV) at frequency 0.15MHz-30MHz.

### 4.3.4 Deviation from Test Standard

No deviation.

### 4.3.5 Test Setup

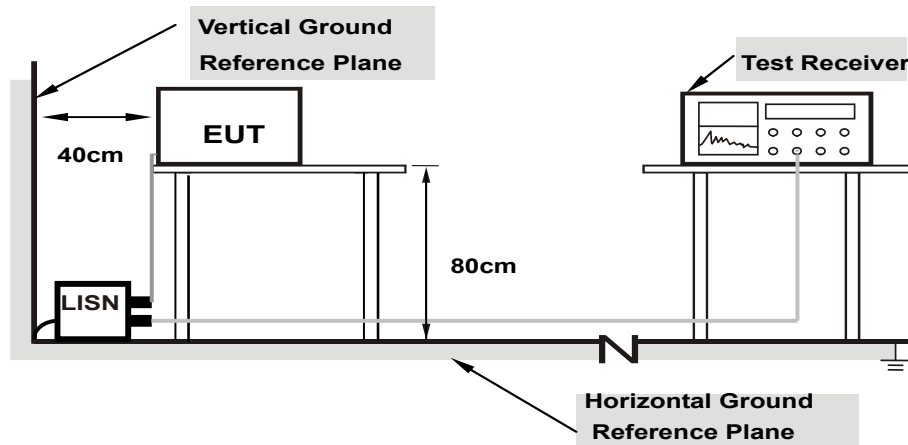

- Note:**
- Support units were connected to second LISN.
  - Both of LISNs (AMN) are 80 cm from EUT and at least 80 from other units and other metal planes

For the actual test configuration, please refer to the attached file (Test Setup Photo).

### 4.3.6 EUT Operating Conditions

Same as 4.2.4.

### 4.3.7 Test Results

Worst-case data:


CH 5

Phase	Line (L)	Detector Function	Quasi-Peak (QP) / Average (AV)
-------	----------	-------------------	--------------------------------

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
			1	0.15400	9.62	33.78	18.67	43.40	28.29	65.78
2	0.17800	9.63	31.23	13.42	40.86	23.05	64.58	54.58	-23.72	-31.53
3	0.20200	9.64	28.01	11.68	37.65	21.32	63.53	53.53	-25.88	-32.21
<b>4</b>	<b>0.42577</b>	<b>9.69</b>	<b>24.42</b>	<b>21.93</b>	<b>34.11</b>	<b>31.62</b>	<b>57.33</b>	<b>47.33</b>	<b>-23.22</b>	<b>-15.71</b>
5	12.06600	9.82	15.88	7.74	25.70	17.56	60.00	50.00	-34.30	-32.44
6	17.19800	9.86	19.72	11.98	29.58	21.84	60.00	50.00	-30.42	-28.16

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

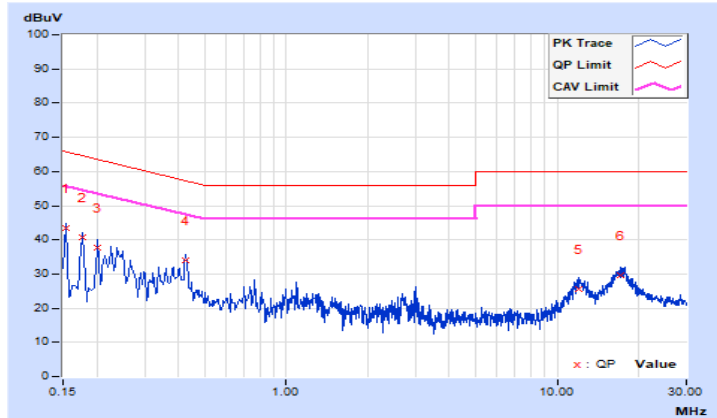


Phase	Neutral (N)	Detector Function	Quasi-Peak (QP) / Average (AV)
-------	-------------	-------------------	--------------------------------

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
			1	0.15800	9.62	31.48	13.46	41.10	23.08	65.57
2	0.17800	9.63	30.04	12.25	39.67	21.88	64.58	54.58	-24.91	-32.70
3	0.42600	9.69	24.06	21.06	33.75	30.75	57.33	47.33	-23.58	-16.58
4	3.00600	9.74	12.37	2.95	22.11	12.69	56.00	46.00	-33.89	-33.31
5	11.61800	9.83	14.97	6.88	24.80	16.71	60.00	50.00	-35.20	-33.29
6	17.24200	9.88	20.62	13.63	30.50	23.51	60.00	50.00	-29.50	-26.49

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

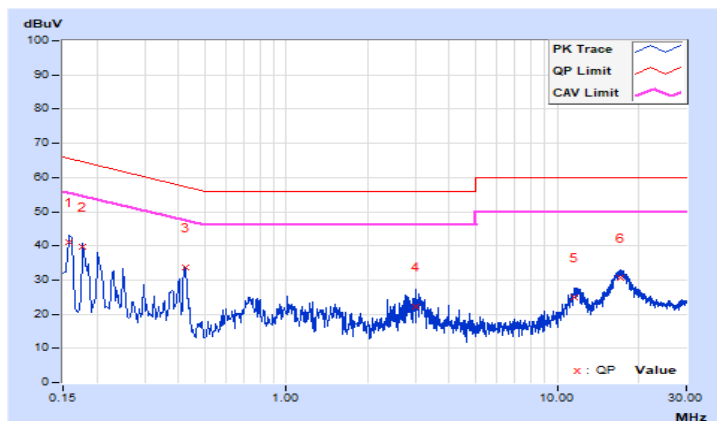



#### 4.4 Occupied Bandwidth Measurement

##### 4.4.1 Limits of Transmitter Power and Power Spectral Density Measurement

	EUT Description	Limit
<input type="checkbox"/>	Ground penetrating radars and wall imaging systems	Must be below 10.6 GHz
<input type="checkbox"/>	D-wall imaging systems	Must be below 960 MHz or the center frequency, $f_C$ , and the frequency at which the highest radiated emission occurs, $f_M$ , must be contained between 1990 MHz and 10600 MHz
<input type="checkbox"/>	Surveillance systems	Must be contained between 1990 MHz and 10,600 MHz
<input type="checkbox"/>	Medical imaging systems	Must be contained between 3100 MHz and 10,600 MHz
<input type="checkbox"/>	Vehicular radar systems	Shall be contained between 22 GHz and 29 GHz. In addition, the center frequency, $f_C$ , and the frequency at which the highest level emission occurs, $f_M$ , must be greater than 24.075 GHz
<input checked="" type="checkbox"/>	Indoor UWB systems	Must be contained between 3100 MHz and 10,600 MHz
<input type="checkbox"/>	Hand held UWB systems	Must be contained between 3100 MHz and 10,600 MHz

##### 4.4.2 Test Setup

Same as 4.2.3

##### 4.4.3 Test Instruments

Refer to section 4.2 to get information of above instrument.

##### 4.4.4 Test Procedure

The frequency at which the maximum power level is measured with the peak detector is designated  $f_M$ . The peak power measurements shall be made using a spectrum analyzer or EMI receiver with a 1 MHz resolution bandwidth and a video bandwidth of 1 MHz or greater. The instrument shall be set to peak detection using the maximum-hold trace mode. The outermost 1 MHz segments above and below  $f_M$ , where the peak power falls by 10 dB relative to the level at  $f_M$ , are designated as  $f_H$  and  $f_L$ , respectively:

##### 4.4.5 Deviation from Test Standard

No deviation.


##### 4.4.6 EUT Operating Conditions

Same as 4.2.4.

#### 4.4.7 Test Results


Detector Function	Peak (PK)	Environmental Conditions	23 deg. C, 66% RH
Tested By	Randy Wu		

Channel	Frequency (MHz)	Len	Peak Power (dBm)	Antenna Polarity (H/V)	Antenna Height(m)	Table Angle (Degree)	Limit (dBm)	Pass/Fail
5	6489.6	2	-13.21	H	1.32	113	0.00	Pass
5	6489.6	64	-13.72	H	1.41	120	0.00	Pass
5	6489.6	127	-12.88	H	1.47	123	0.00	Pass
5	6489.6	512	-12.98	H	1.21	117	0.00	Pass
5	6489.6	1023	-13.66	H	1.17	109	0.00	Pass
9	7987.2	2	-15.47	H	1.23	111	0.00	Pass
9	7987.2	64	-16.50	H	1.17	116	0.00	Pass
9	7987.2	127	-13.05	H	1.48	132	0.00	Pass
9	7987.2	512	-18.14	H	1.61	157	0.00	Pass
9	7987.2	1023	-18.13	H	1.68	161	0.00	Pass

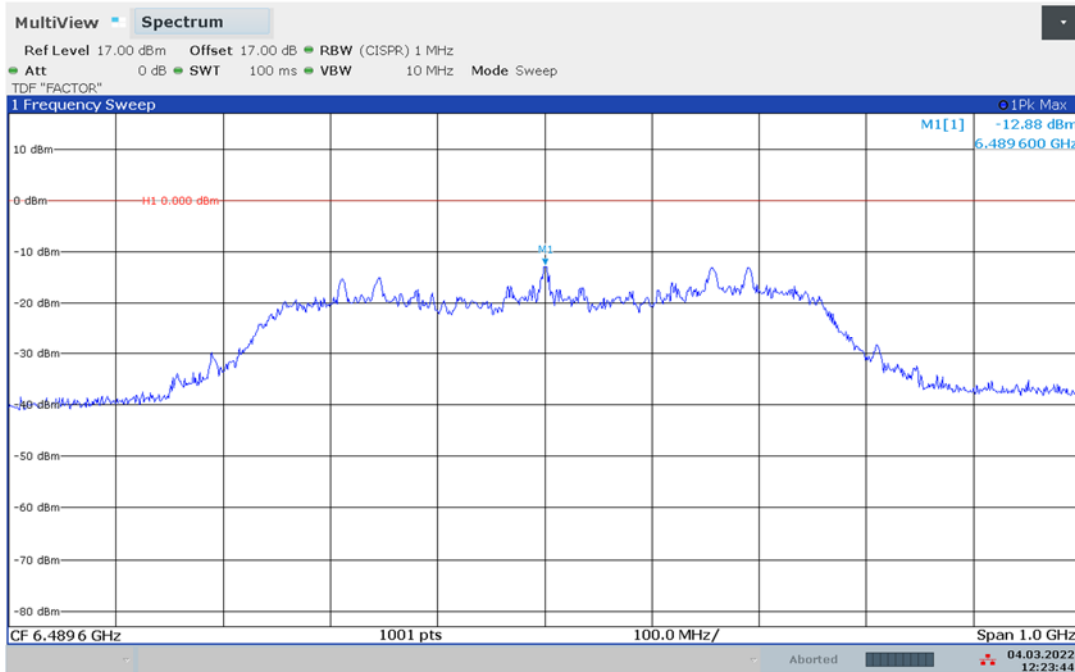

12:23:45 04.03.2022

### CH 5

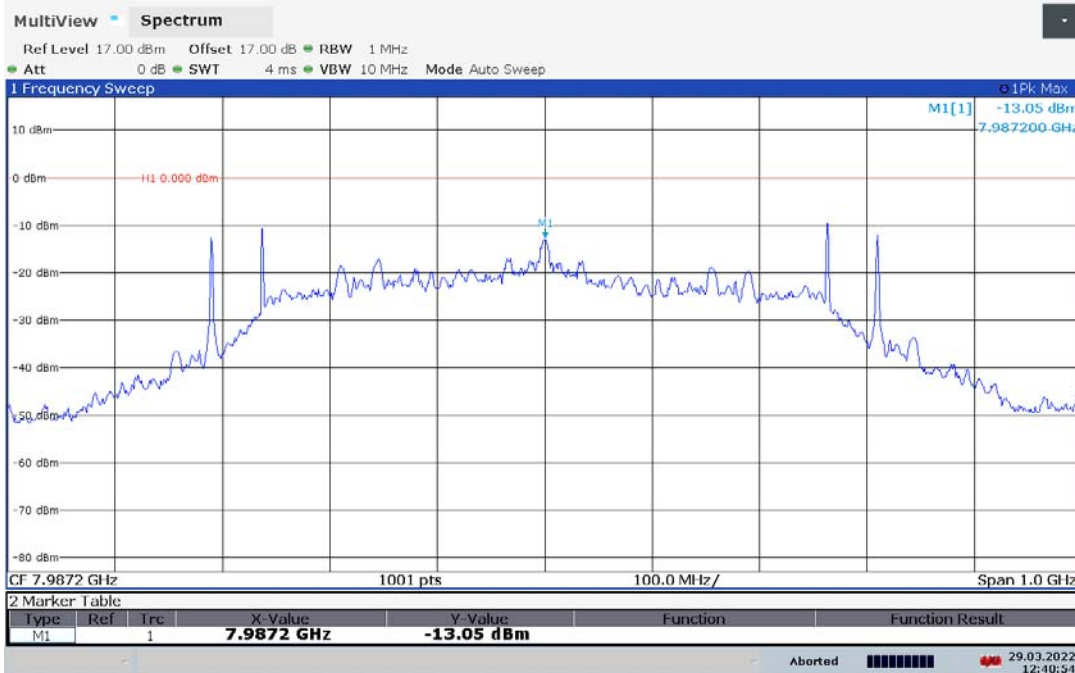

12:40:54 29.03.2022


### CH 9

Note:  $RBW\ 1MHz\ to\ 50MHz = offset = 10 \cdot \log(50/1) = 17.0\ dB$

**10 dB Bandwidth**


Tested By	Randy Wu	Environmental Conditions	23 deg. C, 66% RH
-----------	----------	--------------------------	-------------------

Channel	Frequency (MHz)	Len	10dB Bandwidth (MHz)	Minimum Limit (MHz)	Pass / Fail
5	6489.60	127	523.50	500	Pass
9	7987.20	127	622.40	500	Pass

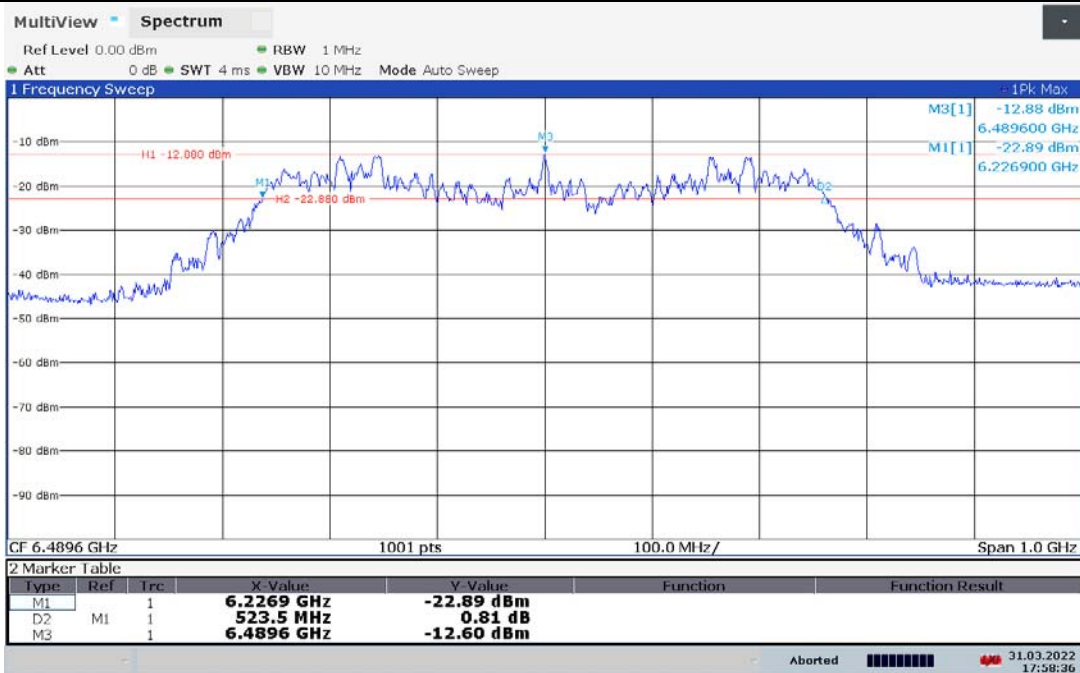

17:58:36 31.03.2022

CH 5

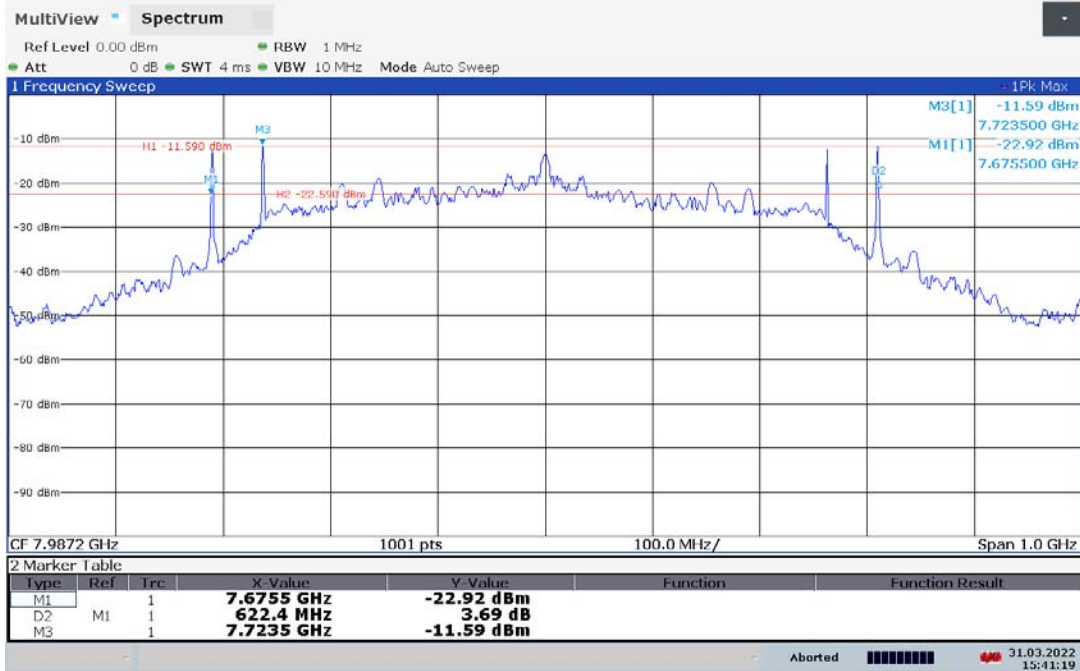

15:41:19 31.03.2022

CH 9

## 5.5 Transmission Time Measurement

### 4.5.1 Limits of Transmitter Emission Measurement

	EUT Description	Limit
<input type="checkbox"/>	Ground penetrating radars and wall imaging systems	Shall contain a manually operated switch that causes the transmitter to cease operation within 10 seconds of being released by the operator. In lieu of a switch located on the imaging system, it is permissible to operate an imaging system by remote control provided the imaging system ceases transmission within 10 seconds of the remote switch being released by the operator.
<input type="checkbox"/>	D-wall imaging systems	Shall contain a manually operated switch that causes the transmitter to cease operation within 10 seconds of being released by the operator. In lieu of a switch located on the imaging system, it is permissible to operate an imaging system by remote control provided the imaging system ceases transmission within 10 seconds of the remote switch being released by the operator.
<input type="checkbox"/>	Surveillance systems	N/A
<input type="checkbox"/>	Medical imaging systems	Shall contain a manually operated switch that causes the transmitter to cease operation within 10 seconds of being released by the operator. In lieu of a switch located on the imaging system, it is permissible to operate an imaging system by remote control provided the imaging system ceases transmission within 10 seconds of the remote switch being released by the operator.
<input type="checkbox"/>	Vehicular radar systems	N/A
<input checked="" type="checkbox"/>	Indoor UWB systems	N/A
<input type="checkbox"/>	Hand held UWB systems	Shall transmit only when it is sending information to an associated receiver. The UWB intentional radiator shall cease transmission within 10 seconds unless it receives an acknowledgement from the associated receiver that its transmission is being received. An acknowledgement of reception must continue to be received by the UWB intentional radiator at least every 10 seconds or the UWB device must cease transmitting.

#### **4.5.2 Test Setup**

NA

#### **4.5.3 Test Instruments**

NA

#### **4.5.4 Test Procedure**

NA

#### **4.5.5 Deviation from Test Standard**

NA

#### **4.5.6 EUT Operating Condition**

NA

#### **4.5.7 Test Results**

Not applicable to Indoor UWB systems.

## 5. Pictures of Test Arrangements

Please refer to the attached file (Test Setup Photo).



## Appendix – Information of the Testing Laboratories

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are FCC recognized accredited test firms and accredited and approved according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

### Lin Kou EMC/RF Lab

Tel: 886-2-26052180

Fax: 886-2-26051924

### Hsin Chu EMC/RF/Telecom Lab

Tel: 886-3-6668565

Fax: 886-3-6668323

### Hwa Ya EMC/RF/Safety Lab

Tel: 886-3-3183232

Fax: 886-3-3270892

**Email:** [service.adt@tw.bureauveritas.com](mailto:service.adt@tw.bureauveritas.com)

**Web Site:** [www.bureauveritas-adt.com](http://www.bureauveritas-adt.com)

The address and road map of all our labs can be found in our web site also.

--- END ---