

## CONSTRUCTION PHOTOS OF EUT

Support unit are listed as below.



**<Device for UX700-ML-1>**



Tablet	Brand	Verifone
	Model	IX90_CQA1103_EEA
HUB	Brand	Verifone
	Model	IX90 HUB
Pedestal	Brand	Verifone
	Description	IX90 Pedestal UX700 with VFT
Cable 1 (Type C)	Brand	Verifone
	Model	CBL900-101-01-A
	SPEC	1.2 M / 1 core, shielding
Cable 2 (JR-45)	Brand	Verifone
	Model	CBL900-003-02-A
	SPEC	1.5 M / 1 core, shielding
AC Adapter 1 (for Device + IX90)	Brand	Verifone
	Model	CAE040122
	AC Input	100-240V, 50/60Hz, 1.7A
	DC Output	12V, 3.33A
	DC Output Cable	1.8M / 1 core
AC Adapter 2 (for Device + IX90)	Brand	Verifone
	Model	A140-5120330G
	AC Input	100-240V, 50/60Hz, 2A
	DC Output	12V, 3.3A
	DC Output Cable	1.8M / 1 core
Stand Base (Countertop Pedestal)	Brand	Verifone
	Description	Stand Base for UX700
Orange Dongle 1	Brand	Verifone
	Description	Orange D1
	P/N	445-117-01
Orange Dongle 2	Brand	Verifone
	Description	Orange D2
	P/N	445-114-01



Cable 1 (USB to RJ-45)	Brand	Verifone
	Model	CBL132-003-03-A
	SPEC	3M / 1 core, shielding
Cable 2 (USB to RJ-45)	Brand	Verifone
	Model	CBL132-003-01-A
	SPEC	1M / 1 core, shielding
Cable 3 (Type C to Type C)	Brand	Verifone
	Model	CBL184-700-05-A
	SPEC	2M / 2 core, shielding
AC Adapter 3 (For Device + Orange D2) (For Device + Orange D1)	Brand	Verifone
	Model	2ABL018F US
	AC Input	100-240Vac, 50/60 Hz, 0.6A
	DC Output	12Vdc, 1.5A
AC Adapter 4 (For Device + Orange D2) (For Device + Orange D1)	DC Output Cable	1.8M / 1 core
	Brand	Verifone
	Model	2AAJ012F US
	AC Input	100-240Vac, 50/60 Hz, 0.35A
	DC Output	12Vdc, 1A
DC Output Cable	1.8M / 1 core	



Model: UX700-ML-1 with Dongle





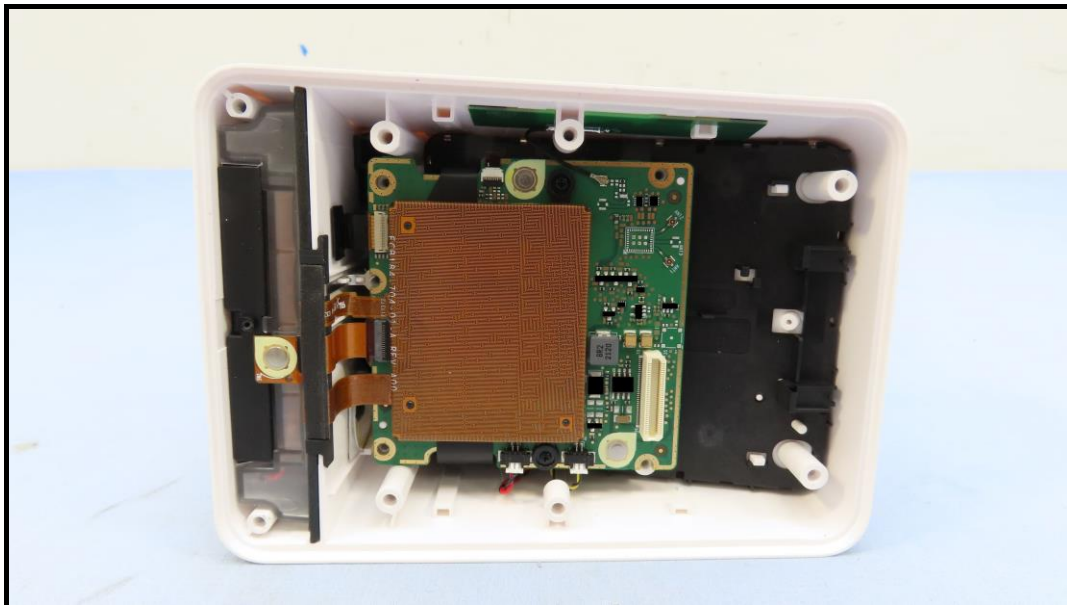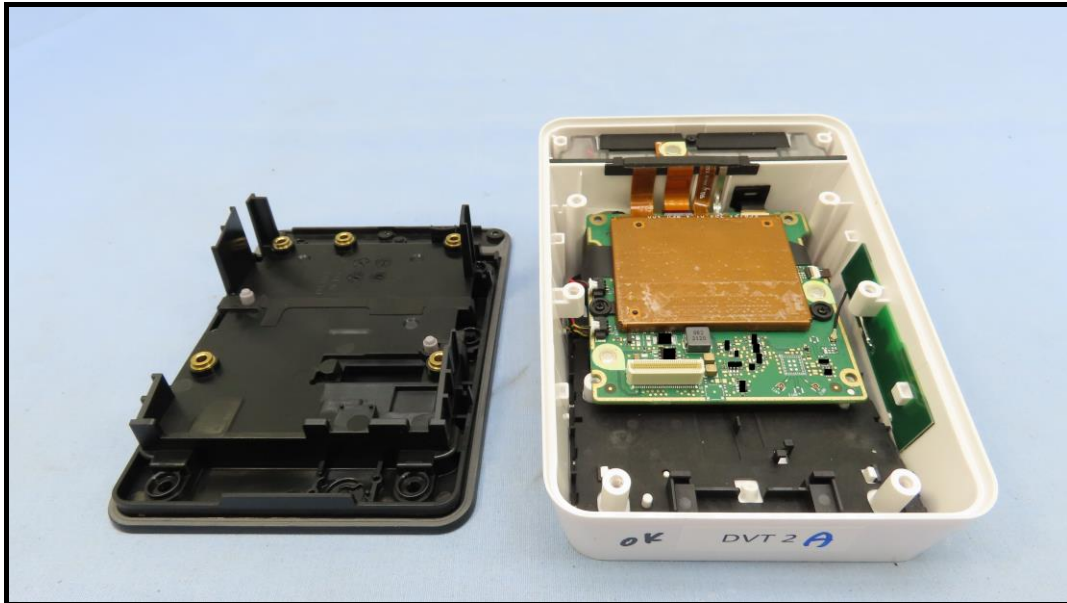

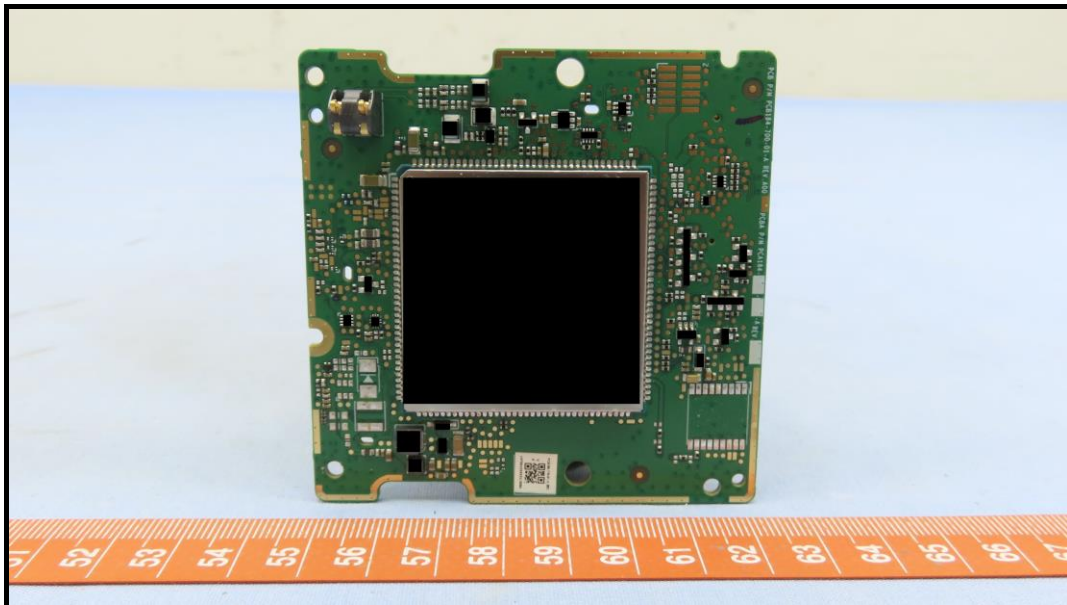
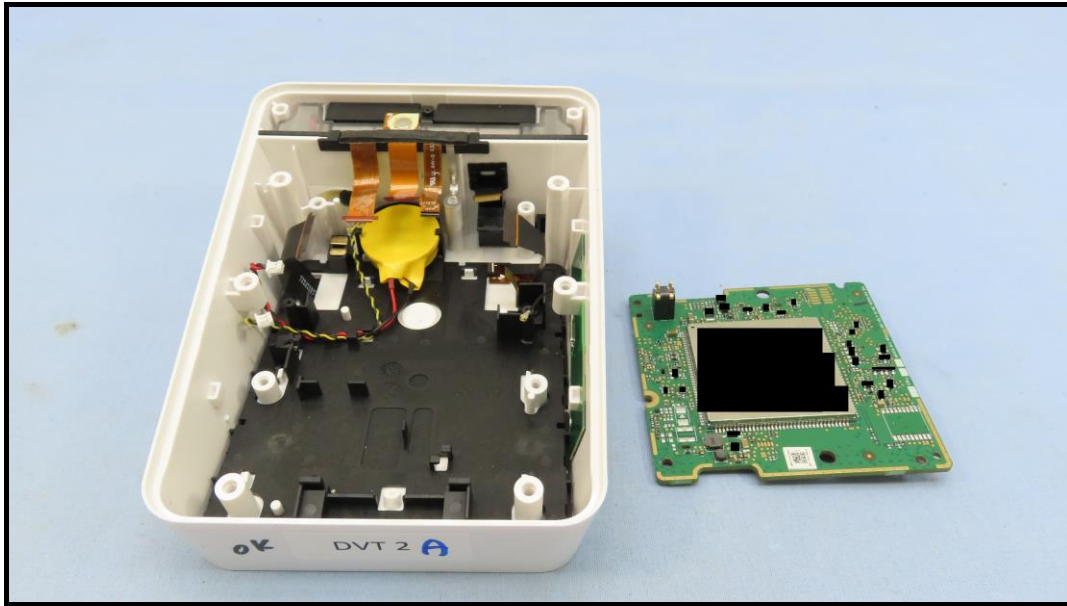


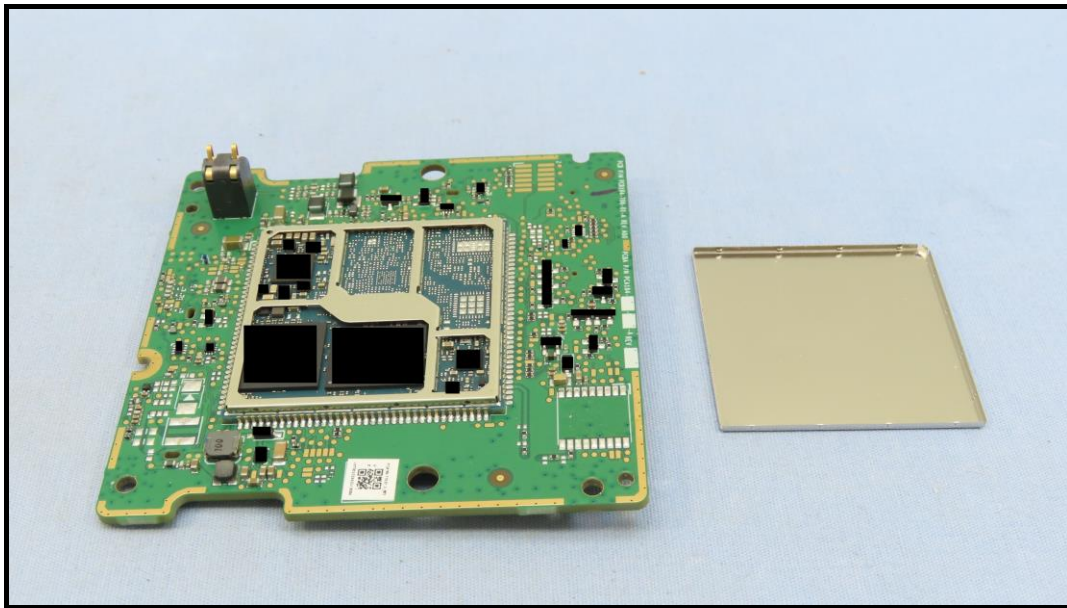
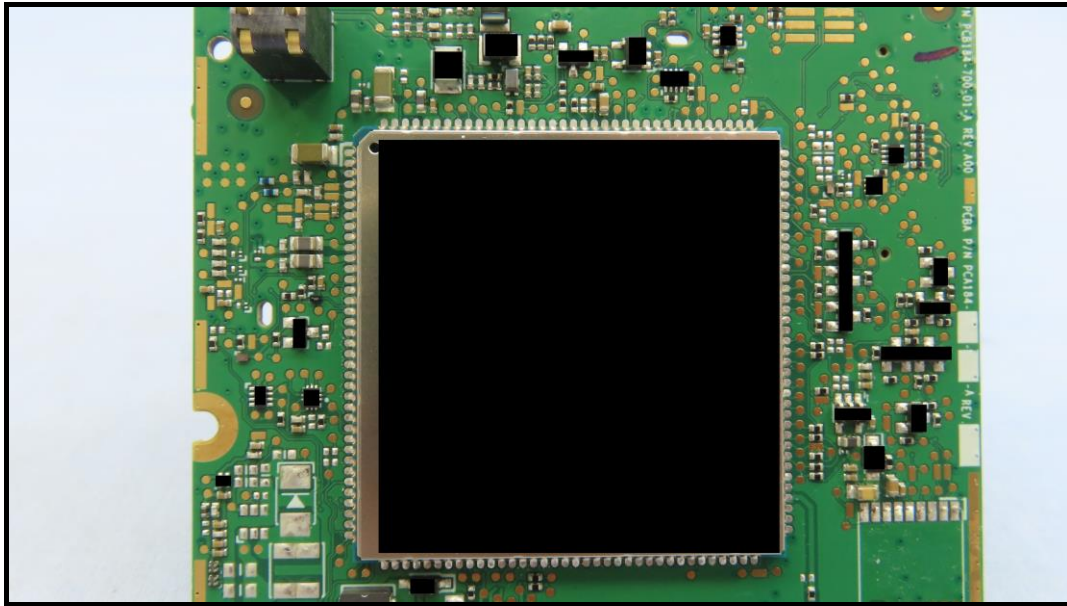


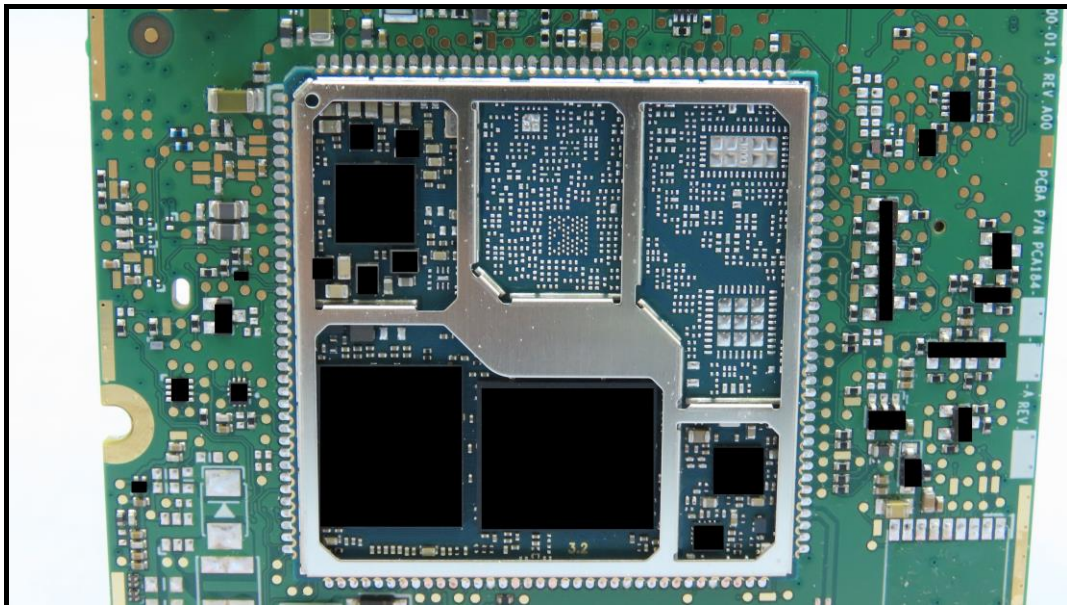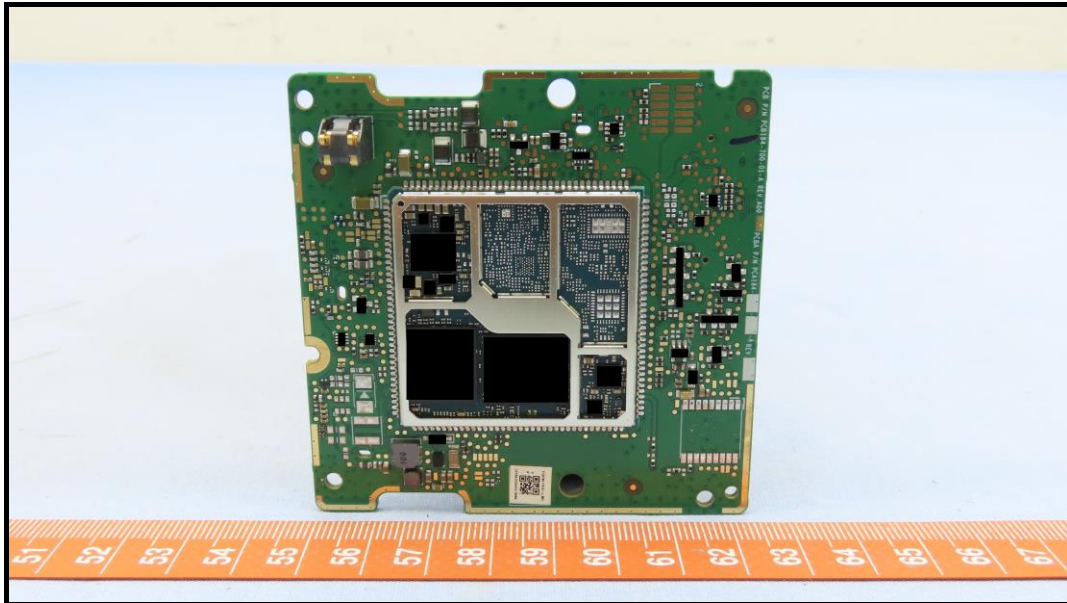


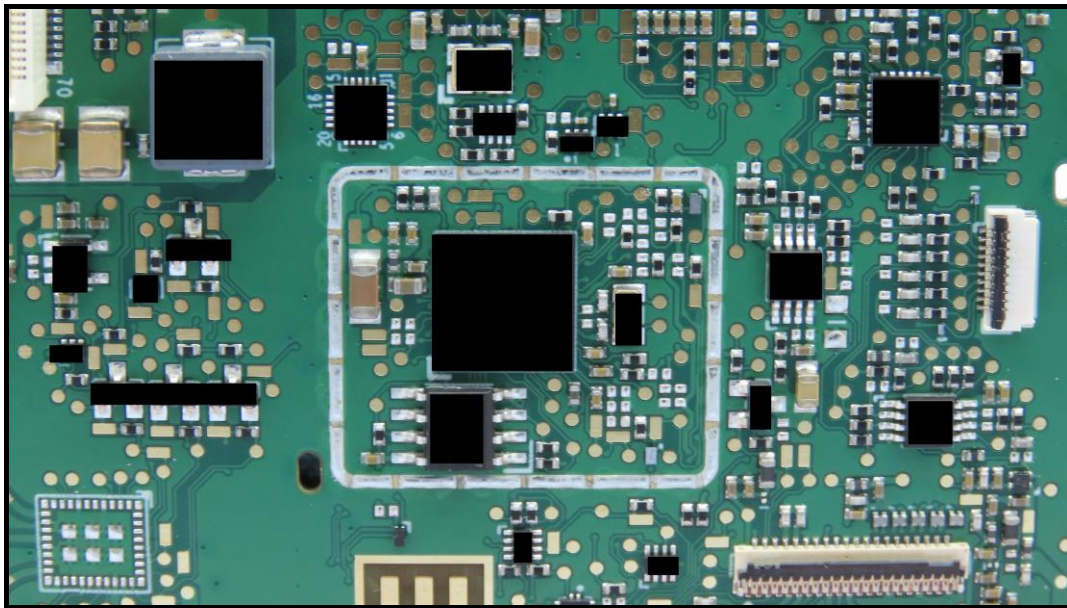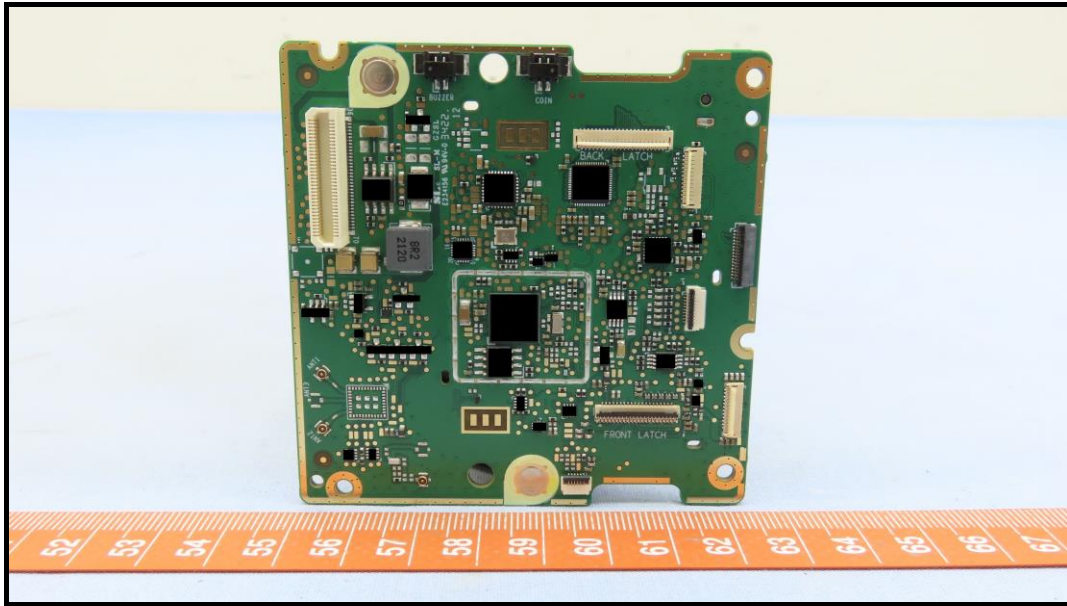



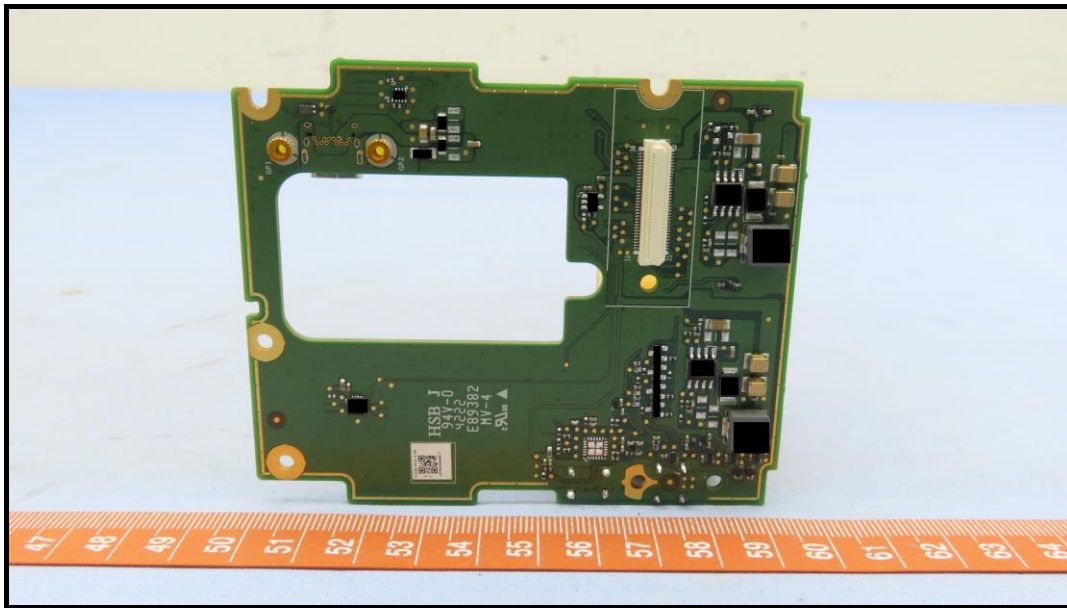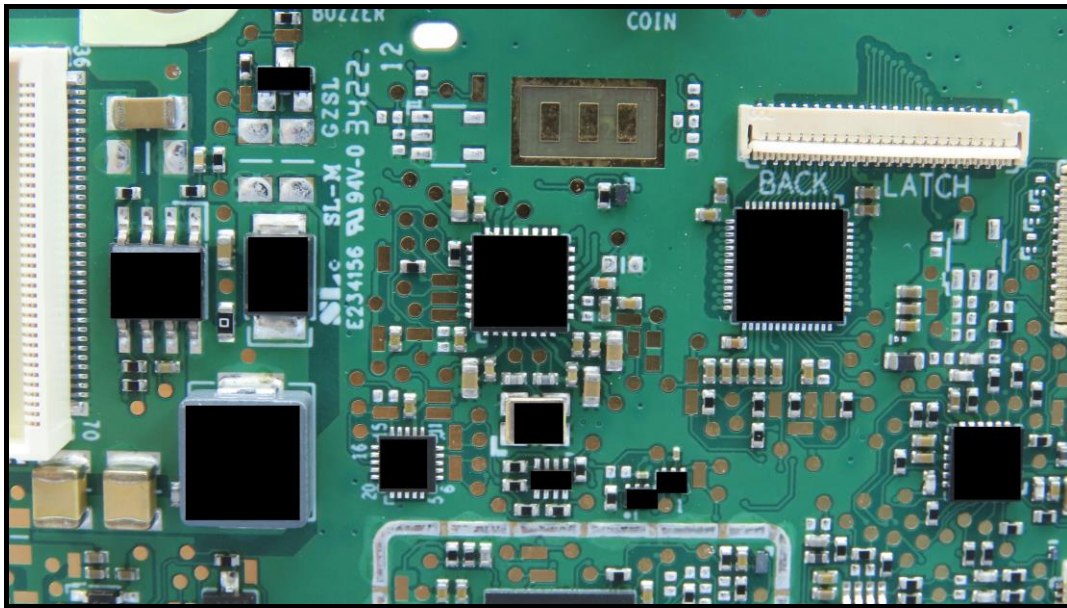

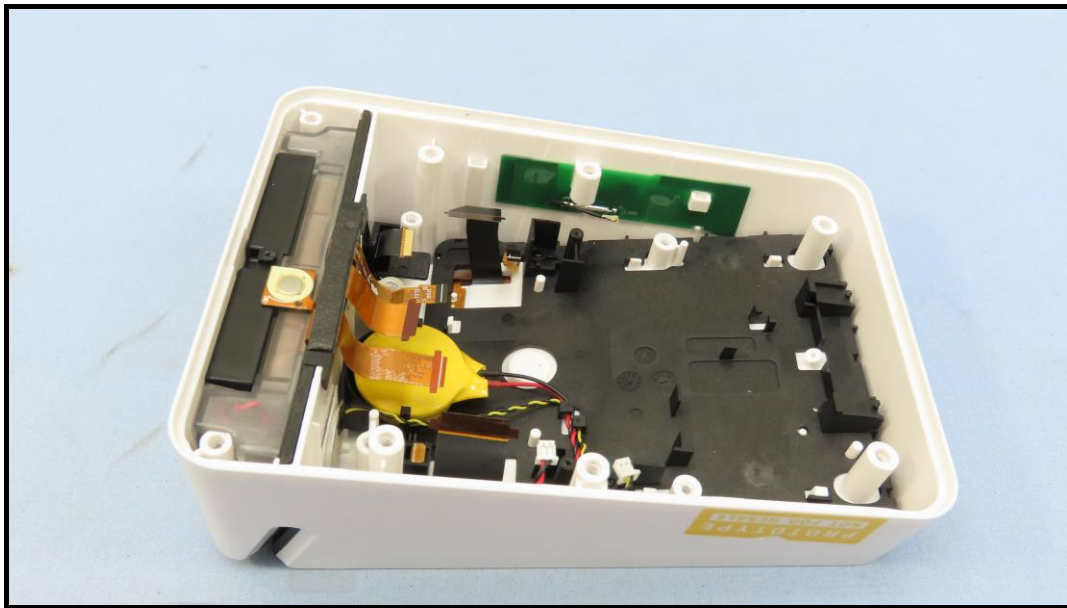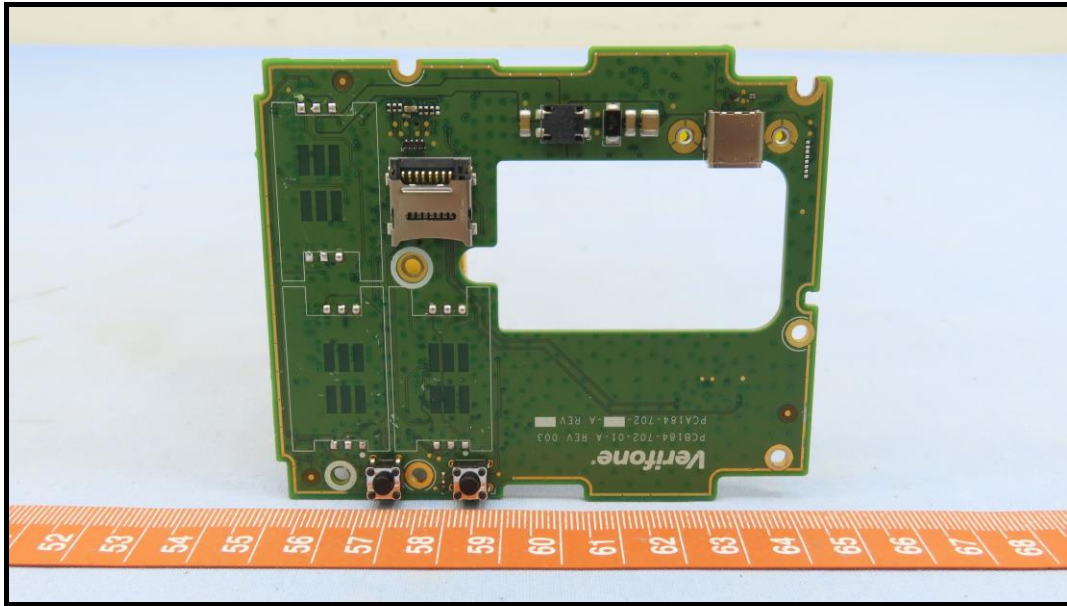

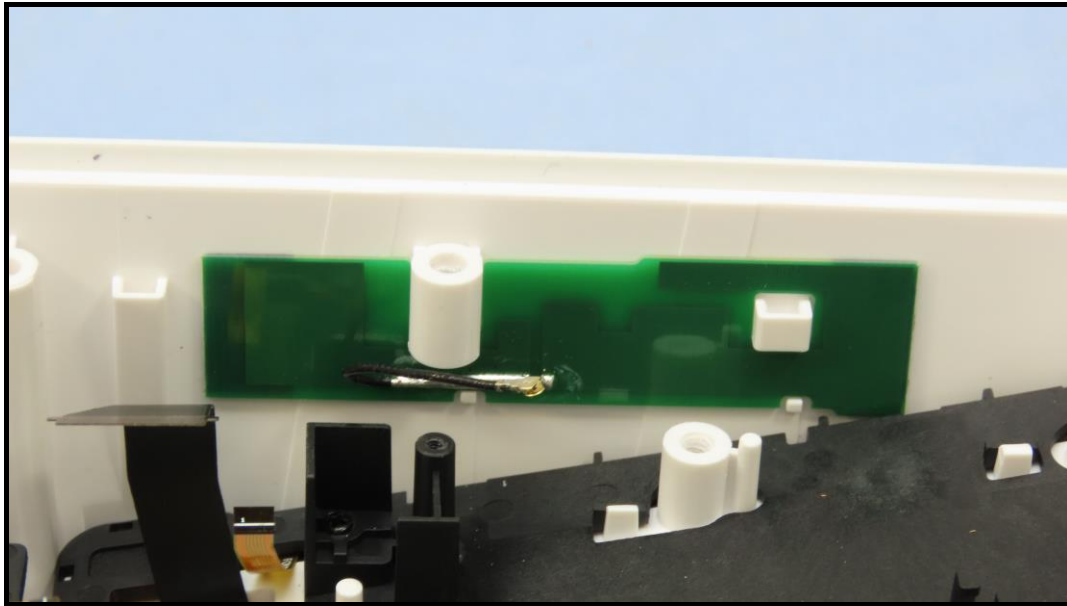

Model: UX700-ML-1 with Tablet



