

FCC Test Report

(PART 27)

Report No.: RFBFMG-WTW-P22060328-9

FCC ID: B32V2104GPLUS

Test Model: V210 4G Plus

Received Date: Jun. 09, 2022

Test Date: Jul. 12, 2022 ~ Jul. 20, 2022

Issued Date: Sep. 08, 2022

Applicant: Verifone, Inc.

Address: 1400 West Stanford Ranch Road Suite 150 Rocklin CA 95765 USA

Issued By: Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch
Lin Kou Laboratories

Lab Address: No. 47-2, 14th Ling, Chia Pau Vil., Lin Kou Dist., New Taipei City, Taiwan

Test Location (1): No.19, Hwa Ya 2nd Rd., Wen Hwa Vil., Kwei Shan Dist., Taoyuan City
33383, Taiwan

Test Location (2): No. 70, Wenming Rd., Guishan Dist., Taoyuan City 333, Taiwan (R.O.C.)

FCC Registration / 788550 / TW0003

Designation Number: 281270 / TW0032



This report is governed by, and incorporates by reference, the Conditions of Testing as posted at the date of issuance of this report at <http://www.bureauveritas.com/home/about-us/our-business/cps/about-us/terms-conditions/> and is intended for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. Measurement uncertainty is only provided upon request for accredited tests. Statements of conformity are based on simple acceptance criteria without taking measurement uncertainty into account, unless otherwise requested in writing. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence or if you require measurement uncertainty; provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents.

Table of Contents

Release Control Record	4
1 Certificate of Conformity	5
2 Summary of Test Results	6
2.1 Measurement Uncertainty	6
2.2 Test Site and Instruments	7
3 General Information	8
3.1 General Description of EUT	8
3.2 Configuration of System under Test	9
3.2.1 Description of Support Units	9
3.3 Test Mode Applicability and Tested Channel Detail	10
3.4 EUT Operating Conditions	12
3.1 General Description of Applied Standards and references	12
4 Test Types and Results	13
4.1 Output Power Measurement	13
4.1.1 Limits of Output Power Measurement	13
4.1.2 Test Procedures	13
4.1.3 Test Setup	13
4.1.4 Test Results	14
4.2 Modulation Characteristics Measurement	18
4.2.1 Limits of Modulation Characteristics	18
4.2.2 Test Setup	18
4.2.3 Test Procedure	18
4.2.4 Test Results	18
4.3 Frequency Stability Measurement	19
4.3.1 Limits of Frequency Stability Measurement	19
4.3.2 Test Procedure	19
4.3.3 Test Setup	19
4.3.4 Test Results	20
4.4 Occupied Bandwidth Measurement	24
4.4.1 Limits of Occupied Bandwidth Measurement	24
4.4.2 Test Procedure	24
4.4.3 Test Setup	24
4.4.4 Test Results	25
4.5 Out-of-Band Emissions Measurement	29
4.5.1 Limits of Out-of-Band Emissions Measurement	29
4.5.2 Test Setup	29
4.5.3 Test Procedures	29
4.5.4 Test Results	30
4.6 Peak to Average Ratio	34
4.6.1 Limits of Peak to Average Ratio Measurement	34
4.6.2 Test Setup	34
4.6.3 Test Procedures	34
4.6.4 Test Results	35
4.7 Conducted Spurious Emissions	39
4.7.1 Limits of Conducted Spurious Emissions Measurement	39
4.7.2 Test Setup	39
4.7.3 Test Procedure	39
4.7.4 Test Results	40
4.8 Radiated Emission Measurement	44
4.8.1 Limits of Radiated Emission Measurement	44
4.8.2 Test Procedure	44
4.8.3 Deviation from Test Standard	44
4.8.4 Test Setup	45

4.8.5 Test Results	46
5 Pictures of Test Arrangements.....	52
Appendix – Information of the Testing Laboratories	53

Release Control Record

Issue No.	Description	Date Issued
RFBFMG-WTW-P22060328-9	Original Release	Sep. 08, 2022

1 Certificate of Conformity

Product: Point of Sale Terminal

Brand: Verifone

Test Model: V210 4G Plus

Sample Status: Engineering Sample

Applicant: Verifone, Inc.

Test Date: Jul. 12, 2022 ~ Jul. 20, 2022

Standards: FCC Part 27, Subpart C, M

The above equipment has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's RF characteristics under the conditions specified in this report.

Prepared by : *Vera Huang* , **Date:** Sep. 08, 2022
Vera Huang / Specialist

Approved by : *Jeremy Lin* , **Date:** Sep. 08, 2022
Jeremy Lin / Project Engineer

2 Summary of Test Results

Applied Standard: FCC Part 27 & Part 2			
FCC Clause	Test Item	Result	Remarks
2.1046 27.50(h)(2)	Equivalent Isotropically radiated power	Pass	Meet the requirement of limit.
2.1047	Modulation characteristics	Pass	Meet the requirement.
2.1055 27.54	Frequency Stability	Pass	Meet the requirement of limit.
2.1049	Emission Bandwidth	Pass	Meet the requirement of limit.
2.1051 27.53(m)(4)(6)	Channel Edge / Out of Band Emission Measurements	Pass	Meet the requirement of limit.
--	Peak To Average Ratio	Pass	Meet the requirement of limit.
2.1051 27.53(m)(4)(6)	Conducted Spurious Emissions	Pass	Meet the requirement of limit.
2.1053 27.53(m)(4)(6)	Radiated Spurious Emissions	Pass	Meet the requirement of limit. Minimum passing margin is -17.53 dB at 37.76 MHz.

Note: Determining compliance based on the results of the compliance measurement, not taking into account measurement instrumentation uncertainty.

2.1 Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

Measurement	Frequency	Expanded Uncertainty (k=2) (±)
Radiated Emissions up to 1 GHz	9kHz ~ 30MHz	3.00 dB
	30MHz ~ 200MHz	2.91 dB
	200MHz ~ 1000MHz	2.92 dB
Radiated Emissions above 1 GHz	1GHz ~ 18GHz	1.76 dB
	18GHz ~ 40GHz	1.77 dB

2.2 Test Site and Instruments

Description & Manufacturer	Model No.	Serial No.	Date Of Calibration	Due Date Of Calibration
Test Receiver Rohde & Schwarz	ESR3	102579	Jul. 01, 2022	Jun. 30, 2023
Spectrum Analyzer KEYSIGHT	N9020B	MY60110462	Dec. 21, 2021	Dec. 20, 2022
BILOG Antenna SCHWARZBECK	VULB9168	995	Oct. 28, 2021	Oct. 27, 2022
HORN Antenna SCHWARZBECK	BBHA 9120 D	9120D-404	Nov. 14, 2021	Nov. 13, 2022
HORN Antenna SCHWARZBECK	BBHA 9170	995	Nov. 14, 2021	Nov. 13, 2022
Loop Antenna EMCI	EM-6879	269	Sep. 16, 2021	Sep. 15, 2022
Preamplifier EMCI	EMC330N	980783	Jan. 17, 2022	Jan. 16, 2023
Preamplifier EMCI	EMC118A45SE	980810	Dec. 30, 2021	Dec. 29, 2022
Preamplifier EMCI	EMC184045SE	980787	Jan. 17, 2022	Jan. 16, 2023
RF signal cable EMCI	EMC104-SM-SM-(900 0+2000+1000)	201230+ 201242+ 210101	Jan. 17, 2022	Jan. 16, 2023
RF signal cable EMCI	EMCCFD400-NM-NM -(9000+300+500)	201252+ 201250+ 201245	Jan. 17, 2022	Jan. 16, 2023
RF signal cable EMCI	EMC101G-KM-KM-(5 000+3000+2000)	201261+201258+ 201249	Jan. 17, 2022	Jan. 16, 2023
Software BV CPS	ADT_Radiated_V7.6.1 5.9.5	NA	NA	NA
Turn Table Max-Full	MFT-151SS-0.5T	NA	NA	NA
Turn Table Controller Max-Full	MF-7802BS	MF780208675	NA	NA
Antenna Tower KaiTuo	NA	NA	NA	NA
Antenna Tower Controller KaiTuo	KT-2000	NA	NA	NA
USB Wideband Power Sensor KEYSIGHT	U2021XA	MY55050005/MY5 5190004/MY55190 007/MY55210005	Jul. 12, 2021	Jul. 11, 2022
			Jul. 13, 2022	Jul. 12, 2023
Radio Communication Analyzer Anritsu	MT8821C	6261806803	Feb. 16, 2022	Feb. 15, 2023

Note: 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

2. The test was performed in WM Chamber 7.

3 General Information

3.1 General Description of EUT

Product	Point of Sale Terminal	
Brand	Verifone	
Test Model	V210 4G Plus	
Status of EUT	Engineering Sample	
Power Supply Rating	5 Vdc (from adapter) 3.7 Vdc (from Li-ion battery)	
Modulation Type	QPSK, 16QAM	
Frequency Range	LTE Band 7 (Channel Bandwidth: 5 MHz)	2502.5 ~ 2567.5 MHz
	LTE Band 7 (Channel Bandwidth: 10 MHz)	2505 ~ 2565 MHz
	LTE Band 7 (Channel Bandwidth: 15 MHz)	2507.5 ~ 2562.5 MHz
	LTE Band 7 (Channel Bandwidth: 20 MHz)	2510 ~ 2560 MHz
Max. EIRP Power	LTE Band 7 (Channel Bandwidth: 5 MHz)	301.301 mW (24.79dBm)
	LTE Band 7 (Channel Bandwidth: 10 MHz)	296.483 mW (24.72dBm)
	LTE Band 7 (Channel Bandwidth: 15 MHz)	304.789 mW (24.84dBm)
	LTE Band 7 (Channel Bandwidth: 20 MHz)	309.742 mW (24.91dBm)
Emission Designator	LTE Band 7 (Channel Bandwidth: 5 MHz)	4M49G7D
	LTE Band 7 (Channel Bandwidth: 10 MHz)	8M96D7W
	LTE Band 7 (Channel Bandwidth: 15 MHz)	13M5D7W
	LTE Band 7 (Channel Bandwidth: 20 MHz)	17M9D7W

Note:


1. The antenna information is listed as below.

Ant. Type	Ant.	Antenna Peak Gain (dBi)				
		GSM850 / WCDMA 5 / LTE 5	GSM1900 / WCDMA 2 / LTE 2	WCDMA 4 / LTE 4	LTE 7	LTE 66
Dipole	1	0	3.6	3.2	2.0	3.2
	2	1.9	3.8	2.7	2.2	2.7

* The Max antenna gain was chosen for final test.

2. Detail antenna specification please refer to antenna datasheet and/or antenna measurement report.
3. The above EUT information is declared by manufacturer and for more detailed features description, please refers to the manufacturer's specifications or user's manual.

3.2 Configuration of System under Test

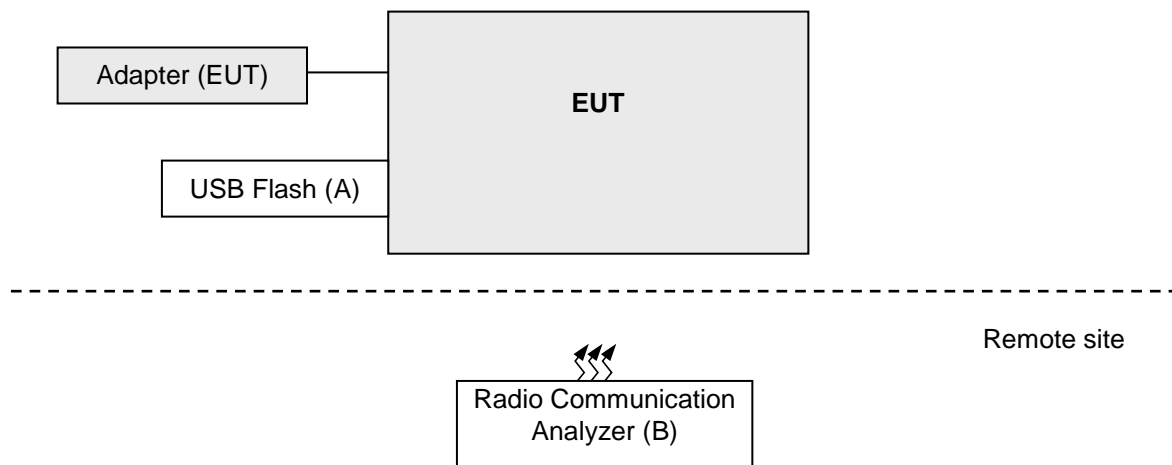

3.2.1 Description of Support Units

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

ID	Product	Brand	Model No.	Serial No.	FCC ID	Remarks
A	USB Flash	SanDisk	SDDDC3-032G	N/A	N/A	Supplied by lab
B	Radio Communication Analyzer	Anritsu	MT8821C	6261806803	N/A	Supplied by lab

3.3 Test Mode Applicability and Tested Channel Detail

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates, XYZ axis, and antenna ports.

The worst case was found when positioned as the table below. Following channel(s) was (were) selected for the final test as listed below:

Band	Radiated Emission
LTE Band 7	X-plane

LTE Band 7

EUT Configure Mode	Test Item	Available Channel	Tested Channel	Channel Bandwidth	Modulation	RB #
-	EIRP	20775 to 21425	20775, 21100, 21425	5 MHz	QPSK, 16QAM	1 Half Full
		20800 to 21400	20800, 21100, 21400	10 MHz	QPSK, 16QAM	1 Half Full
		20825 to 21375	20825, 21100, 21375	15 MHz	QPSK, 16QAM	1 Half Full
		20850 to 21350	20850, 21100, 21350	20 MHz	QPSK, 16QAM	1 Half Full
-	Modulation Characteristics	20850 to 21350	21110	20 MHz	QPSK, 16QAM	Full
-	Frequency Stability	20775 to 21425	20775, 21425	5 MHz	QPSK	Full
		20800 to 21400	20800, 21400	10 MHz	QPSK	Full
		20825 to 21375	20825, 21375	15 MHz	QPSK	Full
		20850 to 21350	20850, 21350	20 MHz	QPSK	Full
-	Occupied Bandwidth	20775 to 21425	20775, 21100, 21425	5 MHz	QPSK, 16QAM	Full
		20800 to 21400	20800, 21100, 21400	10 MHz	QPSK, 16QAM	Full
		20825 to 21375	20825, 21100, 21375	15 MHz	QPSK, 16QAM	Full
		20850 to 21350	20850, 21100, 21350	20 MHz	QPSK, 16QAM	Full
-	Peak to Average Ratio	20775 to 21425	20775, 21100, 21425	5 MHz	QPSK, 16QAM	1
		20800 to 21400	20800, 21100, 21400	10 MHz	QPSK, 16QAM	1
		20825 to 21375	20825, 21100, 21375	15 MHz	QPSK, 16QAM	1
		20850 to 21350	20850, 21100, 21350	20 MHz	QPSK, 16QAM	1

EUT Configure Mode	Test Item	Available Channel	Tested Channel	Channel Bandwidth	Modulation	RB #
-	Out-of-Band Emissions	20775 to 21425	20775, 21425	5 MHz	QPSK, 16QAM	1 Half Full
		20800 to 21400	20800, 21400	10 MHz	QPSK, 16QAM	1 Half Full
		20825 to 21375	20825, 21375	15 MHz	QPSK, 16QAM	1 Half Full
		20850 to 21350	20850, 21350	20 MHz	QPSK, 16QAM	1 Half Full
-	Conducted Emission	20775 to 21425	20775, 21100, 21425	5 MHz	QPSK	1
		20800 to 21400	20800, 21100, 21400	10 MHz	QPSK	1
		20825 to 21375	20825, 21100, 21375	15 MHz	QPSK	1
		20850 to 21350	20850, 21100, 21350	20 MHz	QPSK	1
-	Radiated Emission Below 1GHz	20850 to 21350	20850	20 MHz	QPSK	1
-	Radiated Emission Above 1GHz	20775 to 21425	20775, 21100, 21425	5 MHz	QPSK	1
		20850 to 21350	20850, 21100, 21350	20 MHz	QPSK	1

Note:

1. For radiated emission below 1GHz, select the worst radiated emission channel (above 1GHz) for final testing.
2. For radiated emission above 1GHz, according to 3GPP 36.521 Section 6.6.3.1.4, choose the lowest, 5MHz & highest channel bandwidth for final test.
3. The output power for QPSK and 16QAM, measured value of QPSK is higher than 16QAM mode. Therefore, only EIRP, Modulation characteristics, occupied bandwidth and Peak to average ratio items had been tested under QPSK and 16QAM modes, the other test items were performed under worse mode according to the maximum output power.

Test Condition:

Test Item	Environmental Conditions	Input Power	Tested By
EIRP	25 deg. C, 65 % RH	3.7 Vdc	James Yang
Modulation Characteristics	25 deg. C, 65 % RH	3.7 Vdc	James Yang
Frequency Stability	25 deg. C, 65 % RH	3.7 Vdc	James Yang
Occupied Bandwidth	25 deg. C, 65 % RH	3.7 Vdc	James Yang
Out-of-Band Emissions	25 deg. C, 65 % RH	3.7 Vdc	James Yang
Peak to Average Ratio	25 deg. C, 65 % RH	3.7 Vdc	James Yang
Conducted Emission	25 deg. C, 65 % RH	3.7 Vdc	James Yang
Radiated Emission Below 1GHz	23 deg. C, 68 % RH	120 Vac, 60 Hz	Edison Lee
Radiated Emission Above 1GHz	23 deg. C, 68 % RH	120 Vac, 60 Hz	Edison Lee

3.4 EUT Operating Conditions

The EUT makes a call to the communication simulator. The communication simulator station system controlled a EUT to export maximum output power under transmission mode and specific channel frequency

3.1 General Description of Applied Standards and references

The EUT is a RF Product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards and references:

Test Standard:

FCC 47 CFR Part 2

FCC 47 CFR Part 27

ANSI/TIA/EIA-603-E 2016

ANSI 63.26-2015

References Test Guidance:

KDB 971168 D01 Power Meas License Digital Systems v03r01

All test items have been performed as a reference to the above KDB test guidance.

4 Test Types and Results

4.1 Output Power Measurement

4.1.1 Limits of Output Power Measurement

Mobile stations are limited to 2.0 watts EIRP. All user stations are limited to 2.0 watts transmitter output power.

4.1.2 Test Procedures

Conducted Power Measurement:

The EUT was set up for the maximum power with LTE link data modulation and link up with simulator. Set the EUT to transmit under low, middle and high channel and record the power level shown on simulator.

Maximum EIRP / ERP

The relevant equation for determining the maximum ERP or EIRP from the measured RF output power is given in Equation as follows:

$$\text{EIRP} = P_{\text{Meas}} + G_{\text{T}}$$

$$\text{ERP} = P_{\text{Meas}} + G_{\text{T}} - 2.15$$

where

ERP or EIRP effective radiated power or equivalent isotropically radiated power, respectively
(expressed in the same units as P_{Meas} , e.g., dBm or dBW)

P_{Meas} measured transmitter output power or PSD, in dBm or dBW

G_{T} gain of the transmitting antenna, in dBd (ERP) or dBi (EIRP)

4.1.3 Test Setup

Conducted Power Measurement:



4.1.4 Test Results

Conducted Output Power (dBm)

LTE Band 7						
BW	MCS Index	Channel		20775	21100	21425
		Frequency (MHz)		2502.5	2535	2567.5
5M	QPSK	1	0	22.18	22.59	21.92
		1	12	22.25	22.24	22.06
		1	24	21.75	21.73	21.70
		12	0	21.57	21.62	21.51
		12	6	21.28	21.32	21.23
		12	13	20.85	20.91	20.82
		25	0	21.05	21.24	20.85
	16QAM	1	0	21.86	21.90	21.76
		1	12	21.53	21.63	21.60
		1	24	21.11	21.02	21.01
		12	0	20.85	20.78	20.69
		12	6	20.36	20.44	20.41
		12	13	20.15	20.21	20.03
		25	0	20.40	20.32	20.23

LTE Band 7						
BW	MCS Index	Channel		20800	21100	21400
		Frequency (MHz)		2505	2535	2565
10M	QPSK	1	0	22.14	22.52	22.02
		1	24	22.20	22.15	22.14
		1	49	21.88	21.78	21.76
		25	0	21.47	21.54	21.53
		25	12	21.27	21.27	21.35
		25	25	20.92	20.98	20.95
		50	0	21.01	21.13	20.96
	16QAM	1	0	21.85	21.80	21.70
		1	24	21.57	21.63	21.50
		1	49	21.15	21.06	21.04
		25	0	20.75	20.69	20.69
		25	12	20.41	20.49	20.40
		25	25	20.07	20.16	20.05
		50	0	20.38	20.31	20.18

LTE Band 7						
BW	MCS Index	Channel		20825	21100	21375
		Frequency (MHz)		2507.5	2535	2562.5
15M	QPSK	1	0	22.24	22.64	22.04
		1	37	22.26	22.29	22.24
		1	74	21.89	21.86	21.77
		36	0	21.60	21.68	21.64
		36	19	21.36	21.40	21.38
		36	39	21.00	21.04	20.97
		75	0	21.15	21.25	21.11
	16QAM	1	0	21.92	21.93	21.79
		1	37	21.62	21.66	21.63
		1	74	21.19	21.17	21.10
		36	0	20.86	20.78	20.75
		36	19	20.45	20.50	20.43
		36	39	20.16	20.25	20.14
		75	0	20.40	20.38	20.28

LTE Band 7						
BW	MCS Index	Channel		20850	21100	21350
		Frequency (MHz)		2510	2535	2560
20M	QPSK	1	0	22.33	22.71	22.11
		1	50	22.31	22.34	22.07
		1	99	21.90	21.92	21.86
		50	0	21.70	21.74	21.64
		50	25	21.46	21.47	21.39
		50	50	21.04	21.07	21.03
		100	0	21.24	21.32	21.18
	16QAM	1	0	21.99	21.97	21.89
		1	50	21.67	21.69	21.63
		1	99	21.19	21.21	21.16
		50	0	20.86	20.86	20.81
		50	25	20.51	20.59	20.50
		50	50	20.22	20.31	20.18
		100	0	20.40	20.48	20.31

EIRP Power(dBm)

LTE Band 7						
BW	MCS Index	Channel		20775	21100	21425
		Frequency (MHz)		2502.5	2535	2567.5
5M	QPSK	1	0	24.38	24.79	24.12
		1	12	24.45	24.44	24.26
		1	24	23.95	23.93	23.90
		12	0	23.77	23.82	23.71
		12	6	23.48	23.52	23.43
		12	13	23.05	23.11	23.02
		25	0	23.25	23.44	23.05
	16QAM	1	0	24.06	24.10	23.96
		1	12	23.73	23.83	23.80
		1	24	23.31	23.22	23.21
		12	0	23.05	22.98	22.89
		12	6	22.56	22.64	22.61
		12	13	22.35	22.41	22.23
		25	0	22.60	22.52	22.43

*EIRP = Conducted + antenna gain (2.2dBi)

LTE Band 7						
BW	MCS Index	Channel		20800	21100	21400
		Frequency (MHz)		2505	2535	2565
10M	QPSK	1	0	24.34	24.72	24.22
		1	24	24.40	24.35	24.34
		1	49	24.08	23.98	23.96
		25	0	23.67	23.74	23.73
		25	12	23.47	23.47	23.55
		25	25	23.12	23.18	23.15
		50	0	23.21	23.33	23.16
	16QAM	1	0	24.05	24.00	23.90
		1	24	23.77	23.83	23.70
		1	49	23.35	23.26	23.24
		25	0	22.95	22.89	22.89
		25	12	22.61	22.69	22.60
		25	25	22.27	22.36	22.25
		50	0	22.58	22.51	22.38

*EIRP = Conducted + antenna gain (2.2dBi)

LTE Band 7						
BW	MCS Index	Channel		20825	21100	21375
		Frequency (MHz)		2507.5	2535	2562.5
15M	QPSK	1	0	24.44	24.84	24.24
		1	37	24.46	24.49	24.44
		1	74	24.09	24.06	23.97
		36	0	23.80	23.88	23.84
		36	19	23.56	23.60	23.58
		36	39	23.20	23.24	23.17
		75	0	23.35	23.45	23.31
	16QAM	1	0	24.12	24.13	23.99
		1	37	23.82	23.86	23.83
		1	74	23.39	23.37	23.30
		36	0	23.06	22.98	22.95
		36	19	22.65	22.70	22.63
		36	39	22.36	22.45	22.34
		75	0	22.60	22.58	22.48

*EIRP = Conducted + antenna gain (2.2dBi)

LTE Band 7						
BW	MCS Index	Channel		20850	21100	21350
		Frequency (MHz)		2510	2535	2560
20M	QPSK	1	0	24.53	24.91	24.31
		1	50	24.51	24.54	24.27
		1	99	24.10	24.12	24.06
		50	0	23.90	23.94	23.84
		50	25	23.66	23.67	23.59
		50	50	23.24	23.27	23.23
		100	0	23.44	23.52	23.38
	16QAM	1	0	24.19	24.17	24.09
		1	50	23.87	23.89	23.83
		1	99	23.39	23.41	23.36
		50	0	23.06	23.06	23.01
		50	25	22.71	22.79	22.70
		50	50	22.42	22.51	22.38
		100	0	22.60	22.68	22.51

*EIRP = Conducted + antenna gain (2.2dBi)

4.2 Modulation Characteristics Measurement

4.2.1 Limits of Modulation Characteristics

N/A


4.2.2 Test Setup



4.2.3 Test Procedure

Connect the EUT to Communication Simulator via the antenna connector. The frequency band is set as EUT supported Modulation and Channels, the EUT output is matched with 50 ohm load, the waveform quality and constellation of the EUT was tested.

4.2.4 Test Results

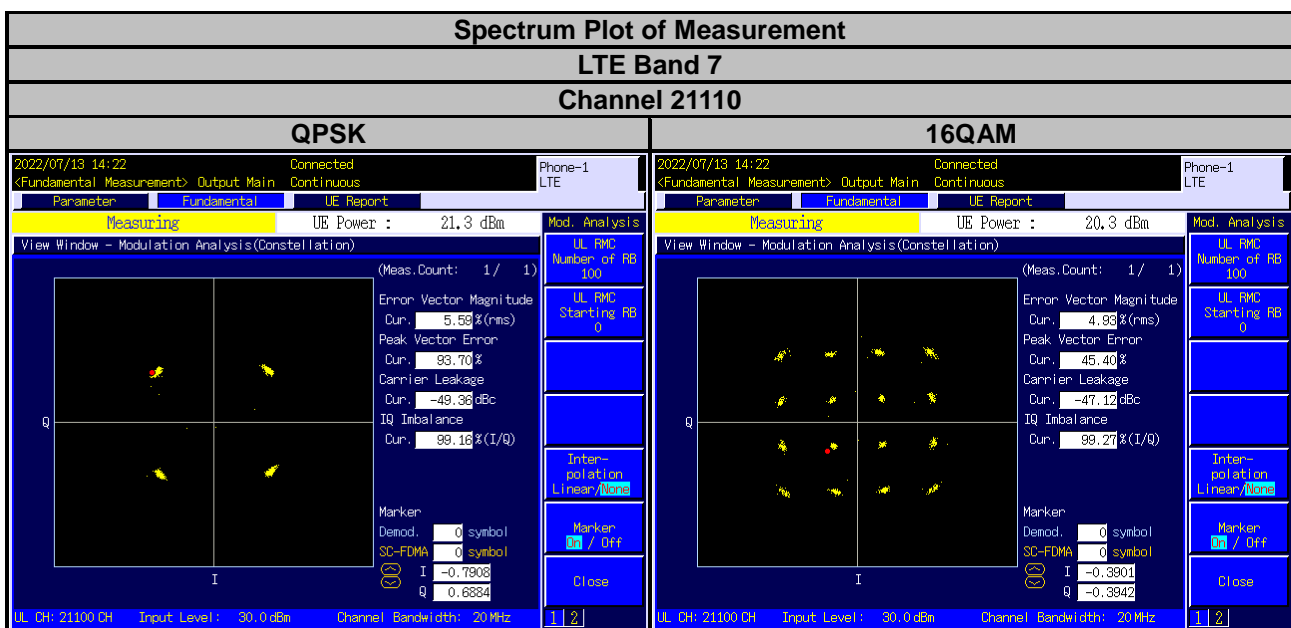

4.3 Frequency Stability Measurement

4.3.1 Limits of Frequency Stability Measurement


According to the FCC part 2.1055 shall be tested the frequency stability. The rule is defined that "The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block." The test extreme voltage is according to the 2.1055(d)(1) Vary primary supply voltage from 85 to 115 percent of the nominal value for other than hand carried battery equipment and the extreme temperature rule is comply with specification of EUT $-30^{\circ}\text{C} \sim 50^{\circ}\text{C}$.

4.3.2 Test Procedure

- Device is placed at the oven room. The oven room could control the temperatures and humidity. Power warm up is at least 15 min and power applied should perform before recording frequency error.
- EUT is connected the external power supply to control the DC input power. The test voltage range is from minimum to maximum working voltage. Each step shall be record the frequency error rate.
- The temperature range step is 10 degrees in this test items. All temperature levels shall be hold the $\pm 0.5^{\circ}\text{C}$ during the measurement testing. The each temperature step shall be at least 0.5 hours, consider the EUT could be test under the stability condition.

NOTE: The frequency error was recorded frequency error from the communication simulator.

4.3.3 Test Setup

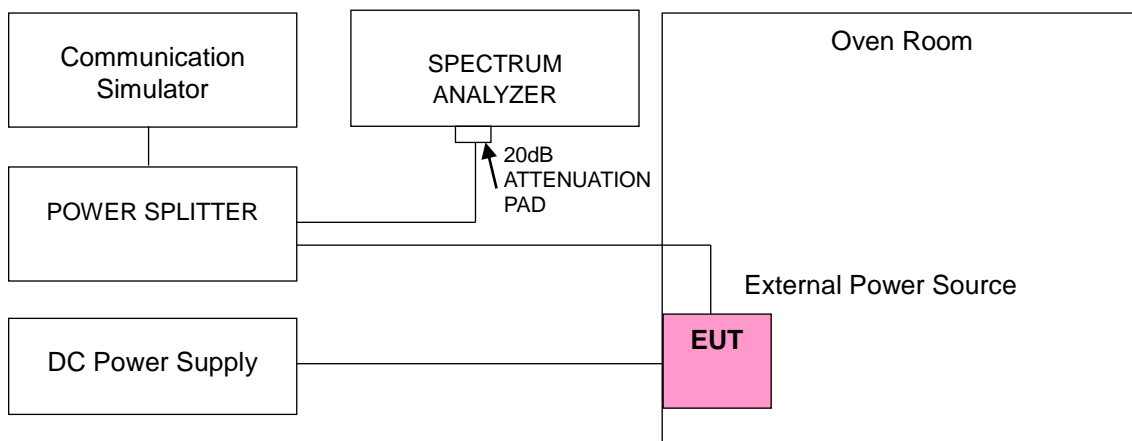

4.3.4 Test Results

Frequency Error vs. Voltage

Voltage (Volts)	LTE Band 7			
	Channel Bandwidth: 5 MHz			
	Low Channel		High Channel	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
3.7	2502.500002	0.00076	2567.500003	0.00117
3.15	2502.500003	0.00132	2567.500003	0.00132
4.26	2502.500003	0.00116	2567.500001	0.00043

Note: The applicant defined the normal working voltage is from 3.15 Vdc to 4.26 Vdc.

Frequency Error vs. Temperature

Temp. (°C)	LTE Band 7			
	Channel Bandwidth: 5 MHz			
	Low Channel		High Channel	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
-30	2502.500002	0.00084	2567.500003	0.00113
-20	2502.500002	0.00076	2567.500003	0.00097
-10	2502.500004	0.00140	2567.500003	0.00109
0	2502.500001	0.00044	2567.500003	0.00113
10	2502.500001	0.00040	2567.500003	0.00101
20	2502.499998	-0.00072	2567.499997	-0.00136
30	2502.499999	-0.00052	2567.499998	-0.00086
40	2502.499998	-0.00076	2567.499997	-0.00136
50	2502.499999	-0.00060	2567.499999	-0.00051

Frequency Error vs. Voltage

Voltage (Volts)	LTE Band 7			
	Channel Bandwidth: 10 MHz			
	Low Channel		High Channel	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
3.7	2505.000003	0.00108	2565.000003	0.00097
3.15	2505.000002	0.00092	2565.000004	0.00136
4.26	2505.000004	0.00144	2565.000002	0.00082

Note: The applicant defined the normal working voltage is from 3.15 Vdc to 4.26 Vdc.

Frequency Error vs. Temperature

Temp. (°C)	LTE Band 7			
	Channel Bandwidth: 10 MHz			
	Low Channel		High Channel	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
-30	2505.000003	0.00104	2565.000003	0.00101
-20	2505.000004	0.00140	2565.000004	0.00144
-10	2505.000002	0.00088	2565.000002	0.00058
0	2505.000003	0.00128	2565.000003	0.00105
10	2505.000001	0.00044	2565.000004	0.00140
20	2504.999998	-0.00068	2564.999999	-0.00058
30	2504.999999	-0.00044	2564.999998	-0.00094
40	2504.999999	-0.00052	2564.999998	-0.00070
50	2504.999996	-0.00152	2564.999996	-0.00140

Frequency Error vs. Voltage

Voltage (Volts)	LTE Band 7			
	Channel Bandwidth: 15 MHz			
	Low Channel		High Channel	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
3.7	2507.500002	0.00088	2562.500002	0.00086
3.15	2507.500001	0.00048	2562.500003	0.00133
4.26	2507.500003	0.00136	2562.500002	0.00062

Note: The applicant defined the normal working voltage is from 3.15 Vdc to 4.26 Vdc.

Frequency Error vs. Temperature

Temp. (°C)	LTE Band 7			
	Channel Bandwidth: 15 MHz			
	Low Channel		High Channel	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
-30	2507.500001	0.00048	2562.500004	0.00140
-20	2507.500003	0.00120	2562.500002	0.00094
-10	2507.500002	0.00060	2562.500003	0.00121
0	2507.500003	0.00124	2562.500002	0.00059
10	2507.500001	0.00040	2562.500003	0.00125
20	2507.499998	-0.00080	2562.499998	-0.00066
30	2507.499999	-0.00040	2562.499998	-0.00074
40	2507.499999	-0.00044	2562.499996	-0.00148
50	2507.499996	-0.00160	2562.499999	-0.00055

Frequency Error vs. Voltage

Voltage (Volts)	LTE Band 7			
	Channel Bandwidth: 20 MHz			
	Low Channel		High Channel	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
3.7	2510.000002	0.00088	2560.000002	0.00094
3.15	2510.000004	0.00151	2560.000004	0.00148
4.26	2510.000004	0.00151	2560.000002	0.00070

Note: The applicant defined the normal working voltage is from 3.15 Vdc to 4.26 Vdc.

Frequency Error vs. Temperature

Temp. (°C)	LTE Band 7			
	Channel Bandwidth: 20 MHz			
	Low Channel		High Channel	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
-30	2510.000004	0.00139	2560.000004	0.00141
-20	2510.000001	0.00048	2560.000002	0.00063
-10	2510.000003	0.00131	2560.000002	0.00063
0	2510.000002	0.00072	2560.000004	0.00141
10	2510.000002	0.00088	2560.000002	0.00063
20	2509.999999	-0.00060	2559.999997	-0.00105
30	2509.999998	-0.00084	2559.999996	-0.00141
40	2509.999997	-0.00127	2559.999999	-0.00039
50	2509.999999	-0.00040	2559.999999	-0.00047

4.4 Occupied Bandwidth Measurement

4.4.1 Limits of Occupied Bandwidth Measurement

The width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5 % of the total mean power of a given emission.

4.4.2 Test Procedure


The EUT makes a call to the communication simulator. All measurements were done at low, middle and high operational frequency range. The communication simulator station system controlled a EUT to export maximum output power under transmission mode and specific channel frequency.

For the 26dBc bandwidth measurement method, please refer to section 5.4.3 of ANSI C63.26.

- a) The spectrum analyzer center frequency is set to the nominal EUT channel center frequency. The span range for the spectrum analyzer shall be wide enough to see sufficient roll off of the signal to make the measurement.
- b) The nominal RBW shall be in the range of 1% to 5% of the anticipated OBW, and the VBW shall be set $\geq 3 \times$ RBW.
- c) Set the reference level of the instrument as required to prevent the signal amplitude from exceeding the maximum spectrum analyzer input mixer level for linear operation. See guidance provided in 4.2.3.
- d) The dynamic range of the spectrum analyzer at the selected RBW shall be more than 10 dB below the target “-X dB” requirement, i.e., if the requirement calls for measuring the -26 dB OBW, the spectrum analyzer noise floor at the selected RBW shall be at least 36 dB below the reference level.
- e) Set spectrum analyzer detection mode to peak, and the trace mode to max hold.
- f) Determine the following reference values: Set the EUT to transmit a modulated signal. Allow the trace to stabilize. Set the spectrum analyzer marker to the highest level of the displayed trace (this is the reference value).
- g) Determine the “-X dB amplitude” as equal to (Reference Value - X). Alternatively, this calculation can be performed on the spectrum analyzer using the delta-marker measurement function.
- h) Place two markers, one at the lowest and the other at the highest frequency of the envelope of the spectral display such that each marker is at or slightly below the “-X dB amplitude” determined in step f). If a marker is below this “-X dB amplitude” value it should be as close as possible to this value. The OBW is the positive frequency difference between the two markers.
- i) The OBW shall be reported by providing plot(s) of the measuring instrument display, to include markers depicting the relevant frequency and amplitude information (e.g., marker table). The frequency and amplitude axis and scale shall be clearly labeled. Tabular data may be reported in addition to the plot(s).

For the occupied bandwidth measurement method, please refer to section 5.4.4 of ANSI C63.26.

4.4.3 Test Setup

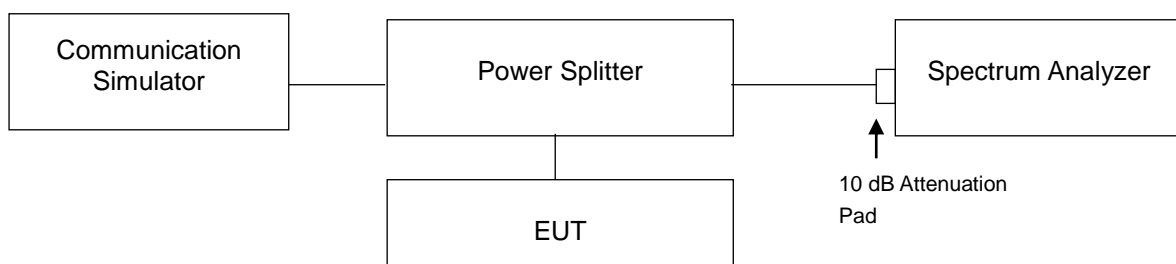


4.4.4 Test Results

LTE Band 7 (Channel Bandwidth 5MHz)

Test Condition	Channel	Frequency (MHz)	Occupied bandwidth (MHz)	26 dB Bandwidth (MHz)
QPSK	20775	2502.5	4.4905	4.822
QPSK	21100	2535	4.4882	4.794
QPSK	21425	2567.5	4.4914	4.791
16QAM	20775	2502.5	4.4904	4.820
16QAM	21100	2535	4.4892	4.804
16QAM	21425	2567.5	4.4896	4.815

Spectrum Plot of Worst Value

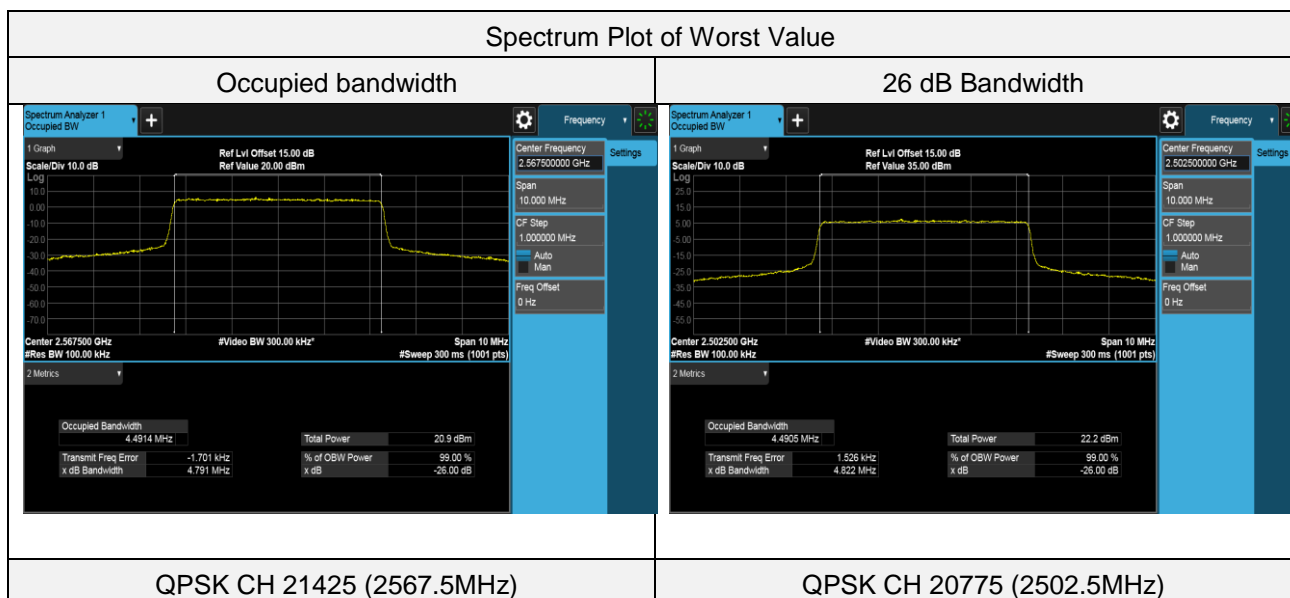



LTE Band 7 (Channel Bandwidth 10MHz)

Test Condition	Channel	Frequency (MHz)	Occupied bandwidth (MHz)	26 dB Bandwidth (MHz)
QPSK	20800	2505	8.9624	9.501
QPSK	21100	2535	8.9597	9.497
QPSK	21400	2565	8.9621	9.493
16QAM	20800	2505	8.9629	9.511
16QAM	21100	2535	8.9636	9.501
16QAM	21400	2565	8.9627	9.499

Spectrum Plot of Worst Value

Occupied bandwidth

26 dB Bandwidth

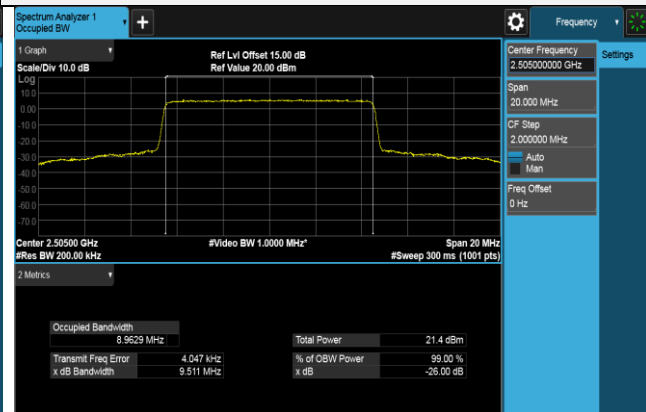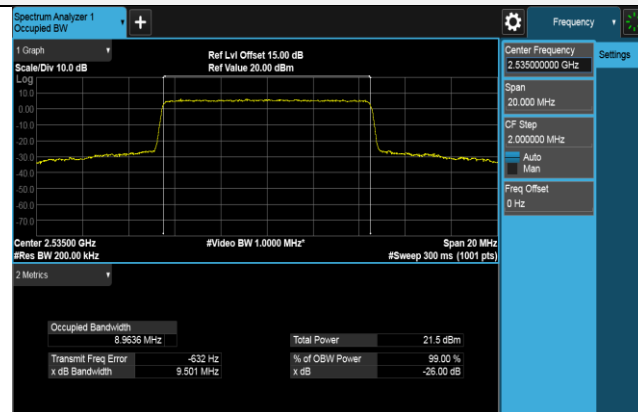

16QAM CH 21100 (2535MHz)

16QAM CH 20800 (2505MHz)



LTE Band 7 (Channel Bandwidth 15MHz)

Test Condition	Channel	Frequency (MHz)	Occupied bandwidth (MHz)	26 dB Bandwidth (MHz)
QPSK	20825	2507.5	13.4582	14.254
QPSK	21100	2535	13.4610	14.254
QPSK	21375	2562.5	13.4585	14.232
16QAM	20825	2507.5	13.4585	14.243
16QAM	21100	2535	13.4647	14.249
16QAM	21375	2562.5	13.4527	14.240

Spectrum Plot of Worst Value

Occupied bandwidth

26 dB Bandwidth

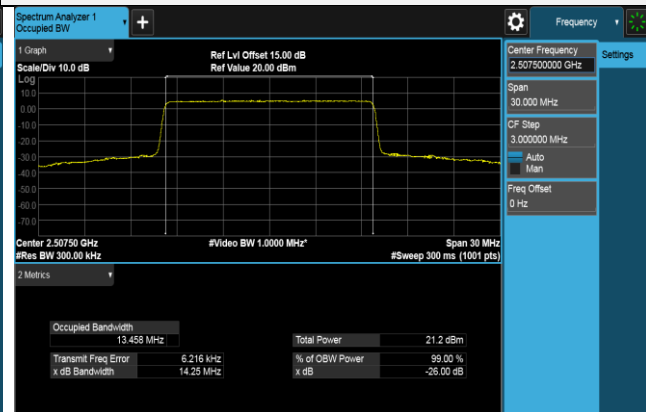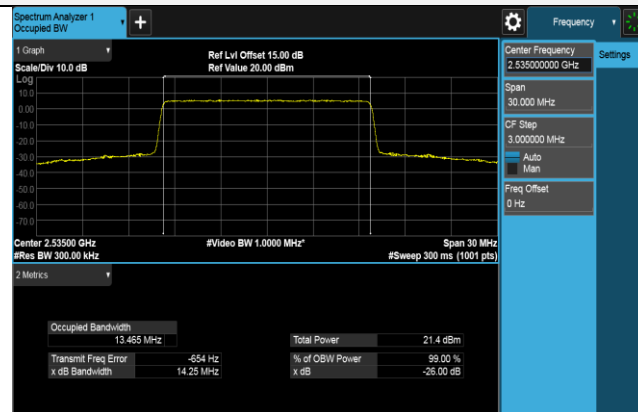

16QAM CH 21100 (2535MHz)

QPSK CH 20825 (2507.5MHz)



LTE Band 7 (Channel Bandwidth 20MHz)

Test Condition	Channel	Frequency (MHz)	Occupied bandwidth (MHz)	26 dB Bandwidth (MHz)
QPSK	20850	2510	17.9213	19.033
QPSK	21100	2535	17.9231	19.035
QPSK	21350	2560	17.8898	18.996
16QAM	20850	2510	17.9234	19.036
16QAM	21100	2535	17.9223	19.038
16QAM	21350	2560	17.8840	19.006

Spectrum Plot of Worst Value

Occupied bandwidth

26 dB Bandwidth

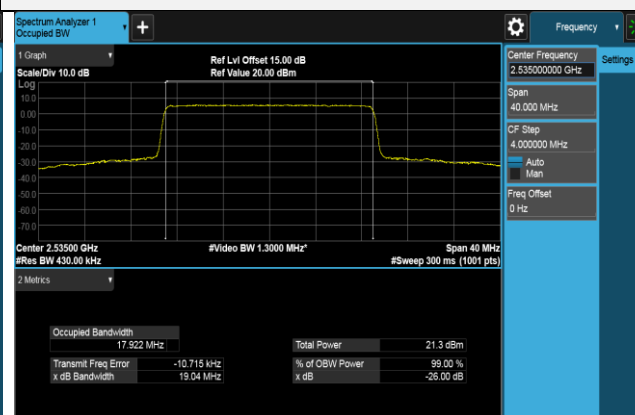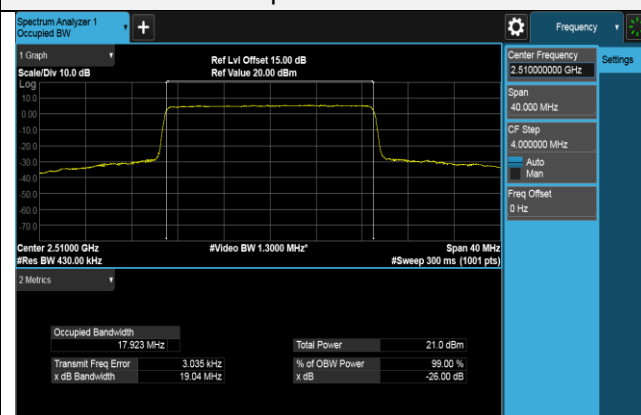

16QAM CH 20850 (2510MHz)


16QAM CH 21100 (2535MHz)

4.5 Out-of-Band Emissions Measurement

4.5.1 Limits of Out-of-Band Emissions Measurement

According to FCC 27.53(m)(4)&(6) specified that power of any emission outside of the channel edge must be attenuated below the transmitting power (P) by a factor shall be not less than $40 + 10 \log (P)$ dB on all frequencies between the channel edge and 5 megahertz from the channel edge, $43 + 10 \log (P)$ dB on all frequencies between 5 megahertz and X megahertz from the channel edge, and $55 + 10 \log (P)$ dB on all frequencies more than X megahertz from the channel edge, where X is the greater of 6 megahertz or the actual emission bandwidth. In addition, the attenuation factor shall not be less that $43 + 10 \log (P)$ dB on all frequencies between 2490.5 MHz and 2496 MHz and $55 + 10 \log (P)$ dB at or below 2490.5 MHz. In the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least two percent may be employed, except when the 1 megahertz band is 2495-2496 MHz, in which case a resolution bandwidth of at least one percent may be employed.

4.5.2 Test Setup

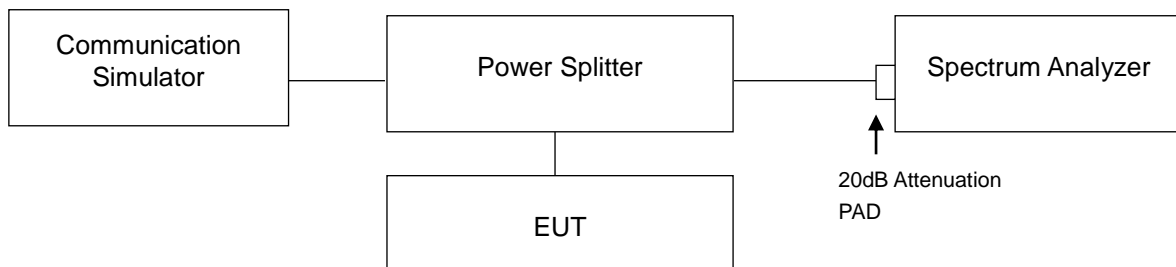

4.5.3 Test Procedures


- The EUT was set up for the maximum peak power with LTE link data modulation. The power was measured with R&S Spectrum Analyzer. All measurements were done at 2 channels (low and high operational frequency range.).
- The out-of-band emissions measurement used the power splitter via EUT RF power connector between simulation base station and spectrum analyzer.
- Record the max. trace plot into the test report.

4.5.4 Test Results

LTE Band 7 (Channel Bandwidth 5MHz)




LTE Band 7 (Channel Bandwidth 10MHz)

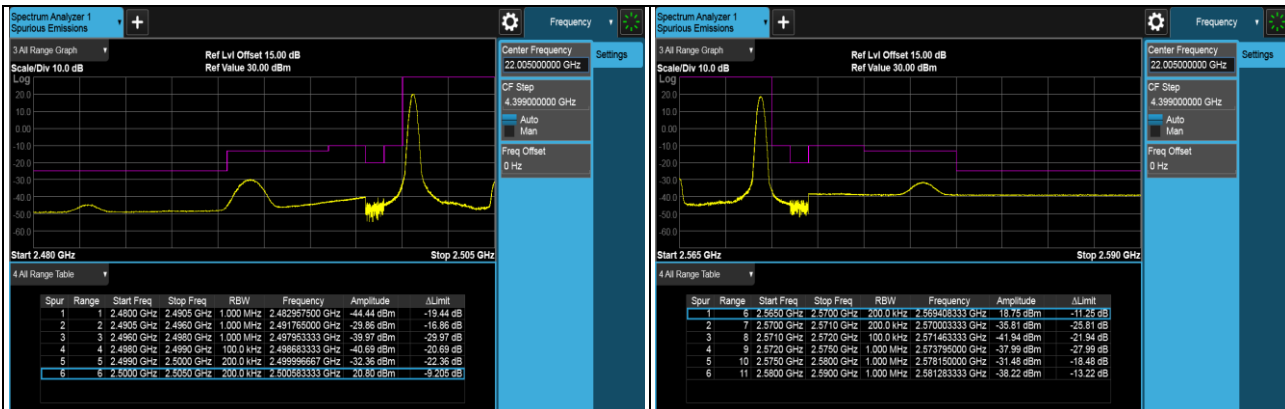

1RB (2505MHz)


1RB (2565MHz)

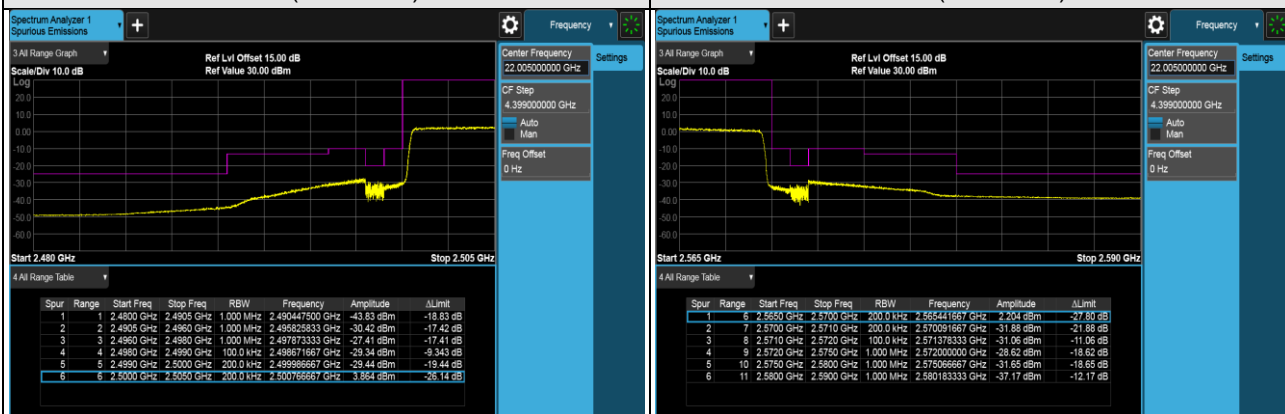


FULL (2505MHz)

FULL (2565MHz)


LTE Band 7 (Channel Bandwidth 15MHz)

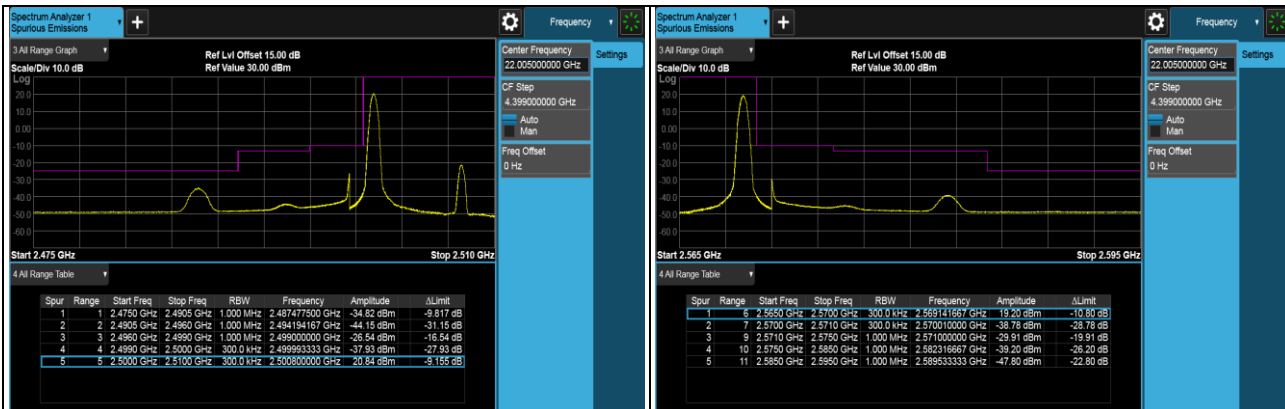

1RB (2507.5MHz)

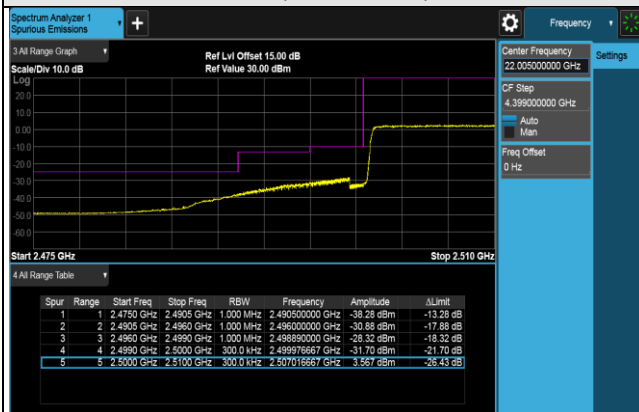


1RB (2562.5MHz)

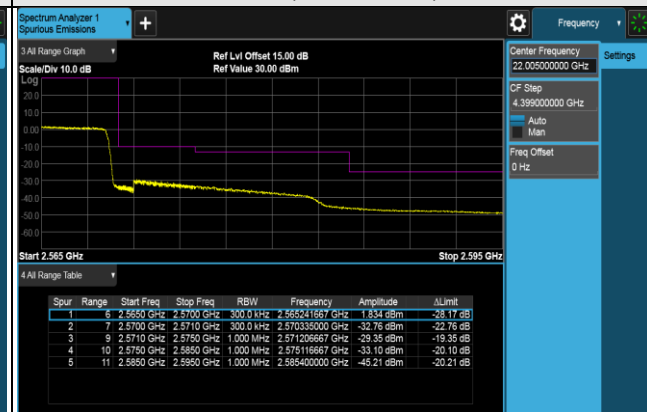


FULL (2507.5MHz)



FULL (2562.5MHz)




LTE Band 7 (Channel Bandwidth 20MHz)

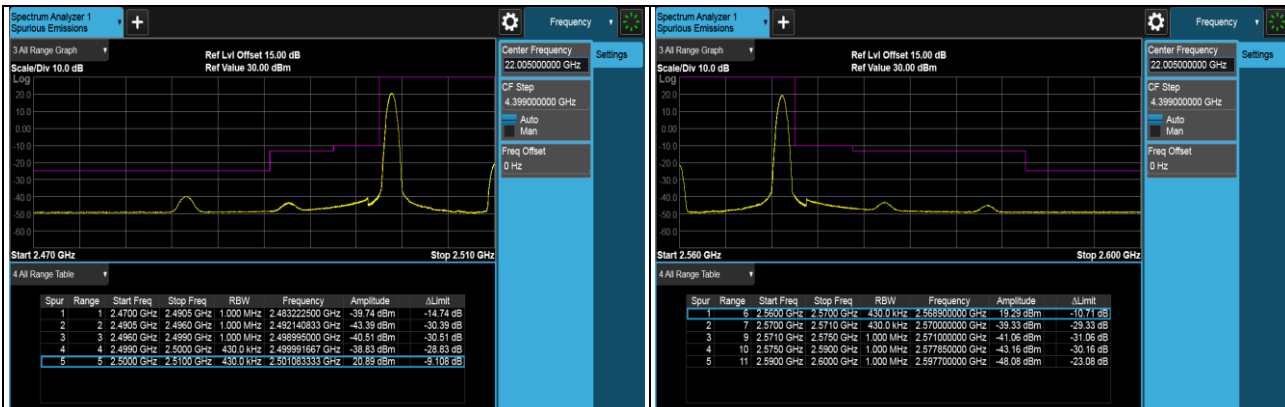

1RB (2510MHz)

1RB (2560MHz)

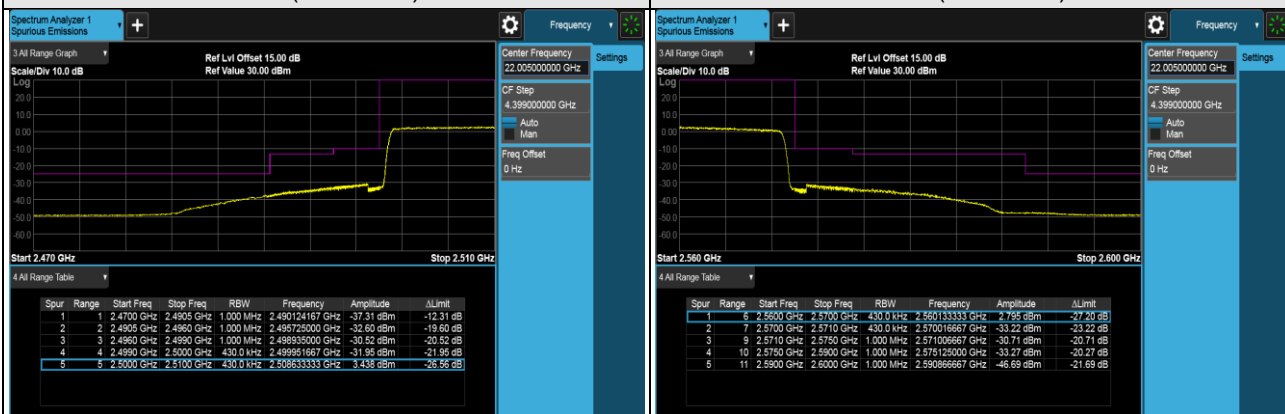

FULL (2510MHz)


FULL (2560MHz)

4.6 Peak to Average Ratio

4.6.1 Limits of Peak to Average Ratio Measurement

In measuring transmissions in this band using an average power technique, the peak to-average ratio (PAR) of the transmission may not exceed 13 dB.

4.6.2 Test Setup

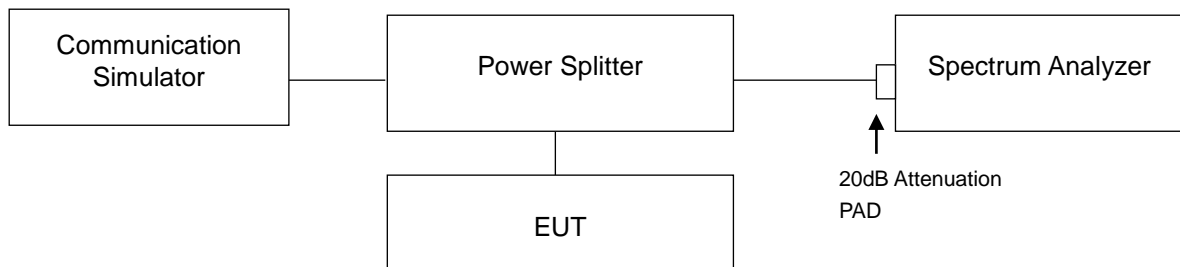

4.6.3 Test Procedures


1. Set resolution/measurement bandwidth \geq signal's occupied bandwidth;
2. Set the number of counts to a value that stabilizes the measured CCDF curve;
3. Record the maximum PAPR level associated with a probability of 0.1 %.

4.6.4 Test Results

LTE Band 7 (Channel Bandwidth 5MHz)

Test Condition	Channel	Frequency (MHz)	Measure. Value(dB)	Limit dB	Result
QPSK	20775	2502.5	3.78	13	PASS
QPSK	21100	2535	3.97	13	PASS
QPSK	21425	2567.5	4.35	13	PASS
16QAM	20775	2502.5	3.74	13	PASS
16QAM	21100	2535	3.94	13	PASS
16QAM	21425	2567.5	4.34	13	PASS

Spectrum Plot of Worst Value

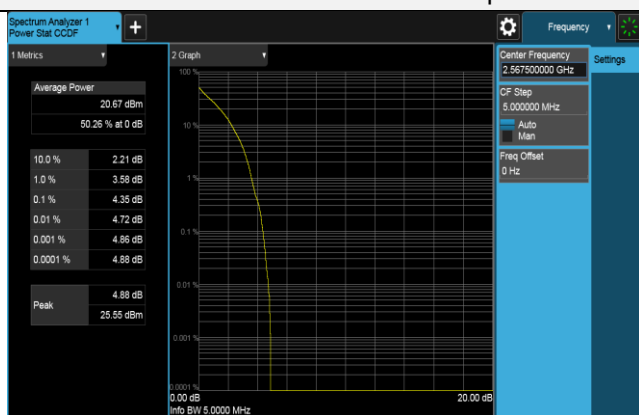


QPSK CH 21425 (2567.5MHz)

LTE Band 7 (Channel Bandwidth 10MHz)

Test Condition	Channel	Frequency (MHz)	Measure. Value(dB)	Limit dB	Result
QPSK	20800	2505	3.78	13	PASS
QPSK	21100	2535	3.91	13	PASS
QPSK	21400	2565	4.24	13	PASS
16QAM	20800	2505	3.78	13	PASS
16QAM	21100	2535	3.91	13	PASS
16QAM	21400	2565	4.21	13	PASS

Spectrum Plot of Worst Value

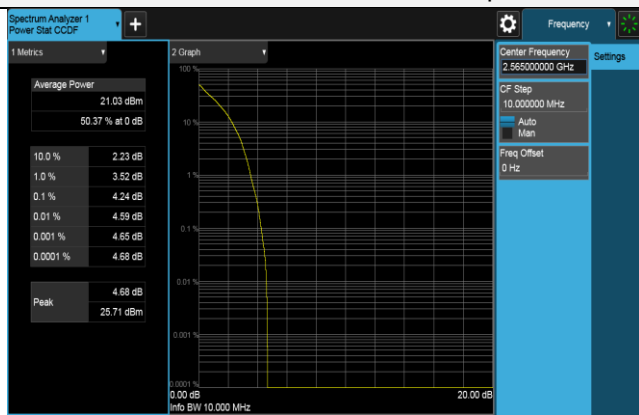


QPSK CH 21400 (2565MHz)

LTE Band 7 (Channel Bandwidth 15MHz)

Test Condition	Channel	Frequency (MHz)	Measure. Value(dB)	Limit dB	Result
QPSK	20825	2507.5	3.74	13	PASS
QPSK	21100	2535	3.76	13	PASS
QPSK	21375	2562.5	3.88	13	PASS
16QAM	20825	2507.5	3.76	13	PASS
16QAM	21100	2535	3.80	13	PASS
16QAM	21375	2562.5	3.86	13	PASS

Spectrum Plot of Worst Value

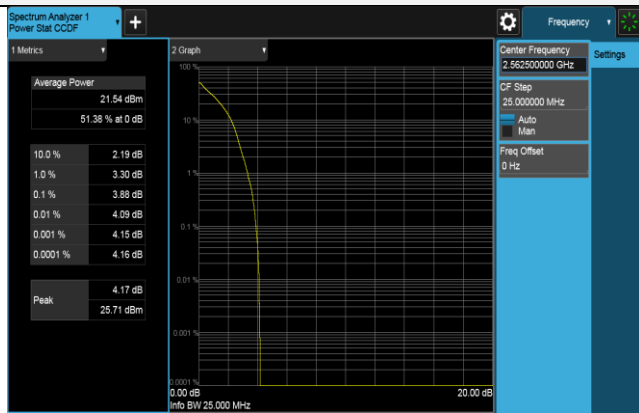


QPSK CH 21375 (2562.5MHz)

LTE Band 7 (Channel Bandwidth 20MHz)

Test Condition	Channel	Frequency (MHz)	Measure. Value(dB)	Limit dB	Result
QPSK	20850	2510	3.84	13	PASS
QPSK	21100	2535	3.85	13	PASS
QPSK	21350	2560	4.13	13	PASS
16QAM	20850	2510	3.82	13	PASS
16QAM	21100	2535	3.87	13	PASS
16QAM	21350	2560	4.13	13	PASS

Spectrum Plot of Worst Value

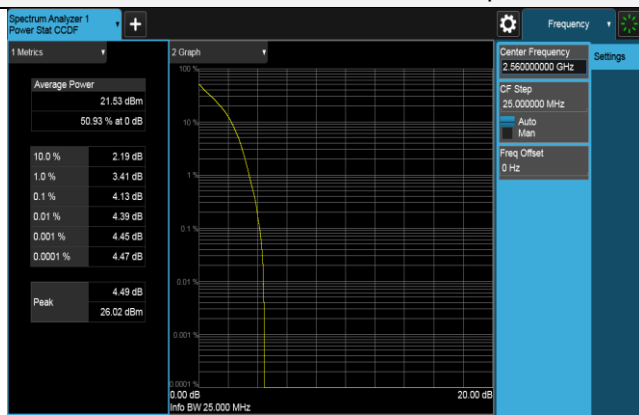


QPSK CH 21350 (2560MHz)

4.7 Conducted Spurious Emissions

4.7.1 Limits of Conducted Spurious Emissions Measurement

According to FCC 27.53(m)(4), on any frequency outside a licensee's frequency block, The power of any emission shall be attenuated below the transmitter power (P) by at least $55 + 10 \log (P)$ dB. The emission limit equal to -25dBm .

4.7.2 Test Setup

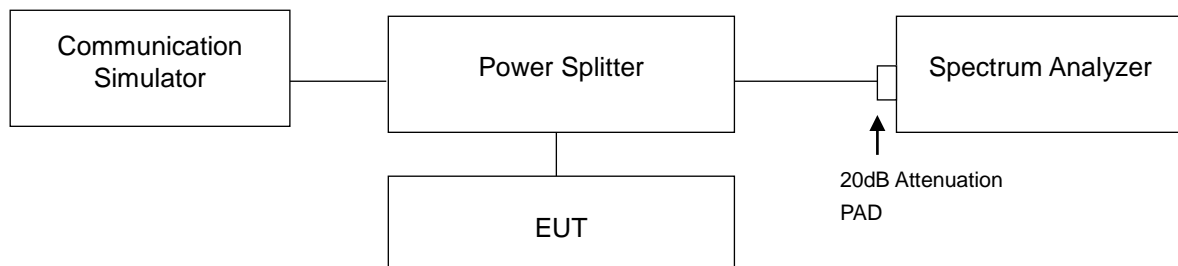


4.7.3 Test Procedure


- The EUT makes a phone call to the communication simulator. All measurements were done at low, middle and high operational frequency range.
- Measuring frequency range is from 9 kHz to 1 GHz. 10 dB attenuation pad is connected with spectrum. RBW = 1 MHz and VBW = 3 MHz are used for conducted emission measurement.
- Measuring frequency range is from 1 GHz to 26 GHz. 10 dB attenuation pad is connected with spectrum. RBW = 1 MHz and VBW = 3 MHz are used for conducted emission measurement.
- Spectrum RBW settings are referenced to ANSI C63.26 section 5.7.2.

4.7.4 Test Results


LTE Band 7 (Channel Bandwidth 5MHz)

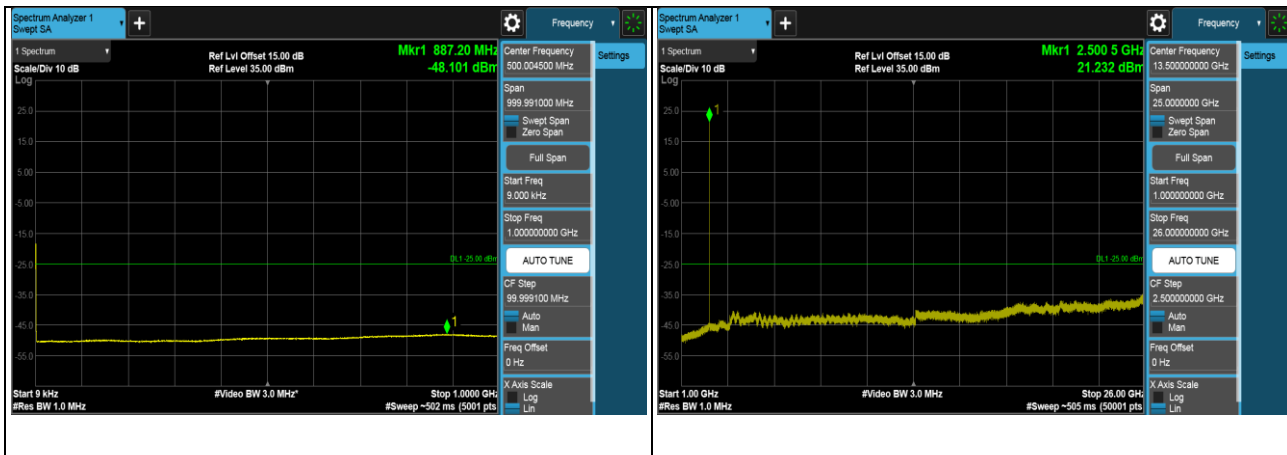

CH 20775 (2502.5MHz)

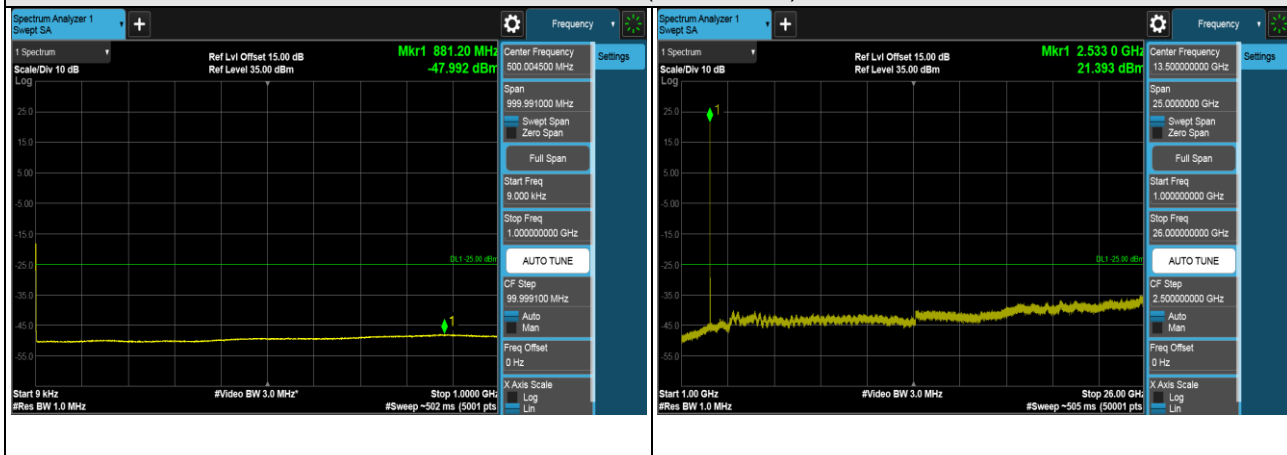


CH 21100 (2535MHz)

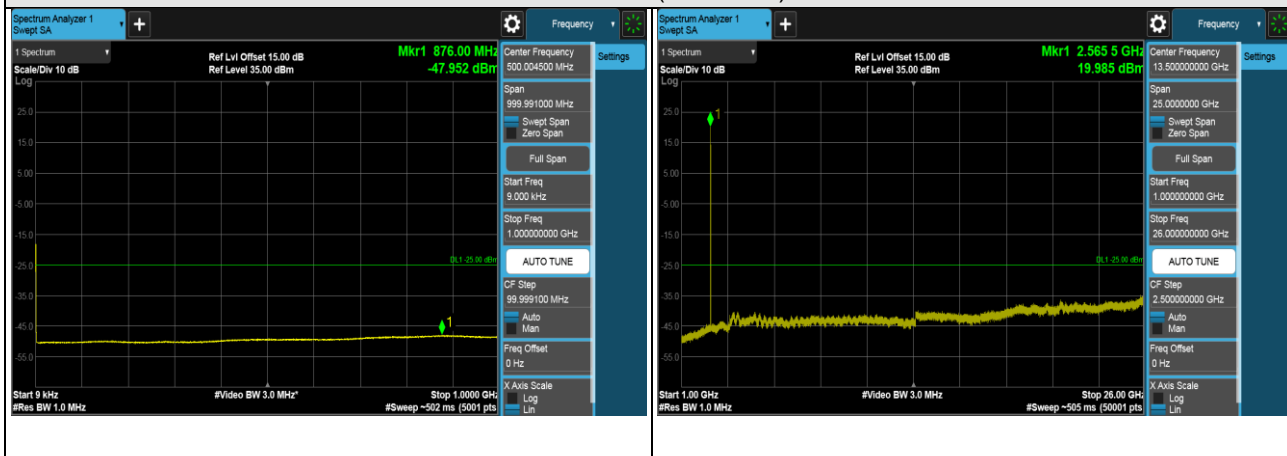

CH 21425 (2567.5MHz)

*The 9kHz signal over the limit is from Spectrum.

LTE Band 7 (Channel Bandwidth 10MHz)

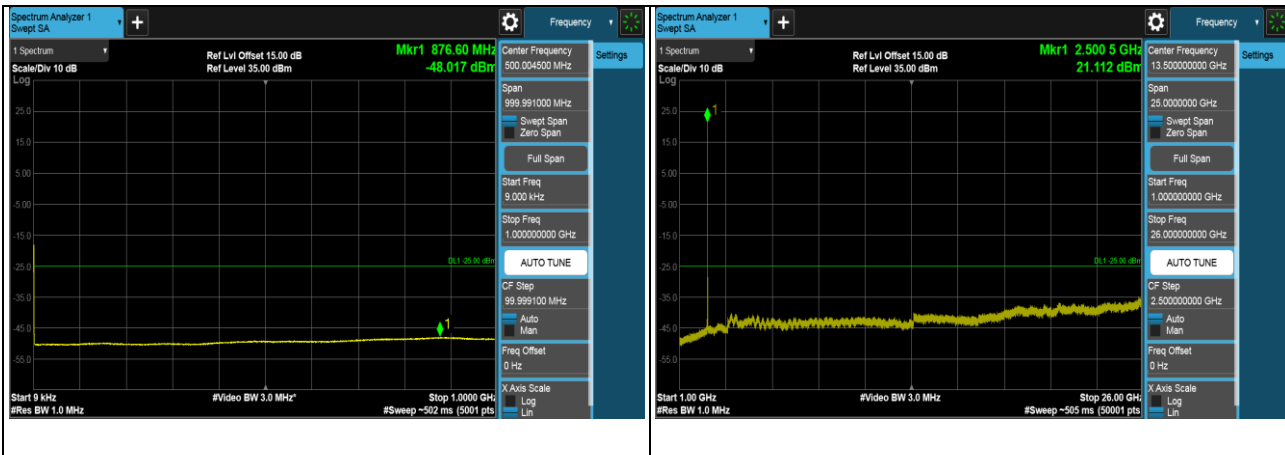

CH 20800 (2505MHz)




CH 21100 (2535MHz)




CH 21400 (2565MHz)

*The 9kHz signal over the limit is from Spectrum.


LTE Band 7 (Channel Bandwidth 15MHz)

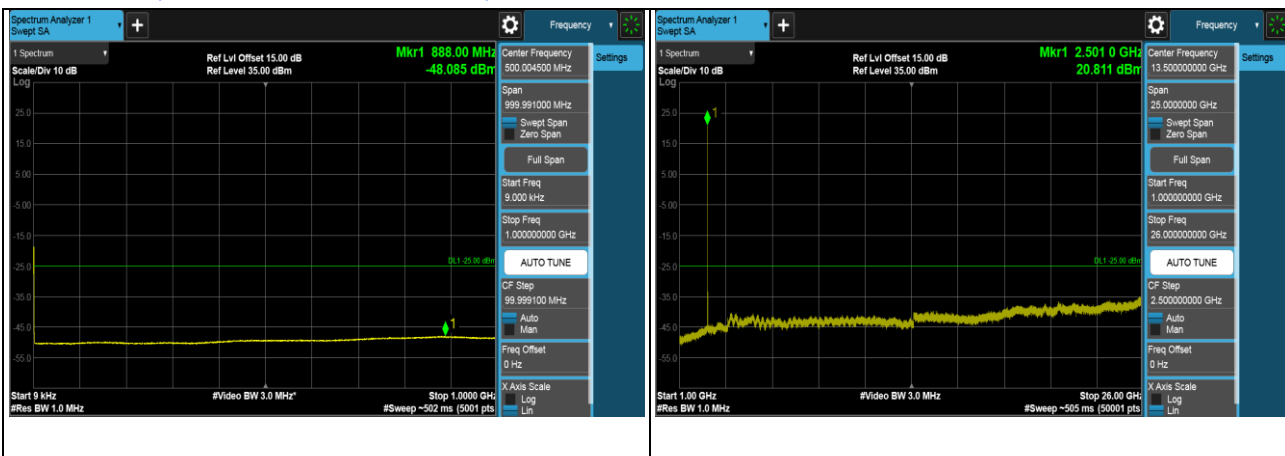

CH 20825 (2507.5MHz)

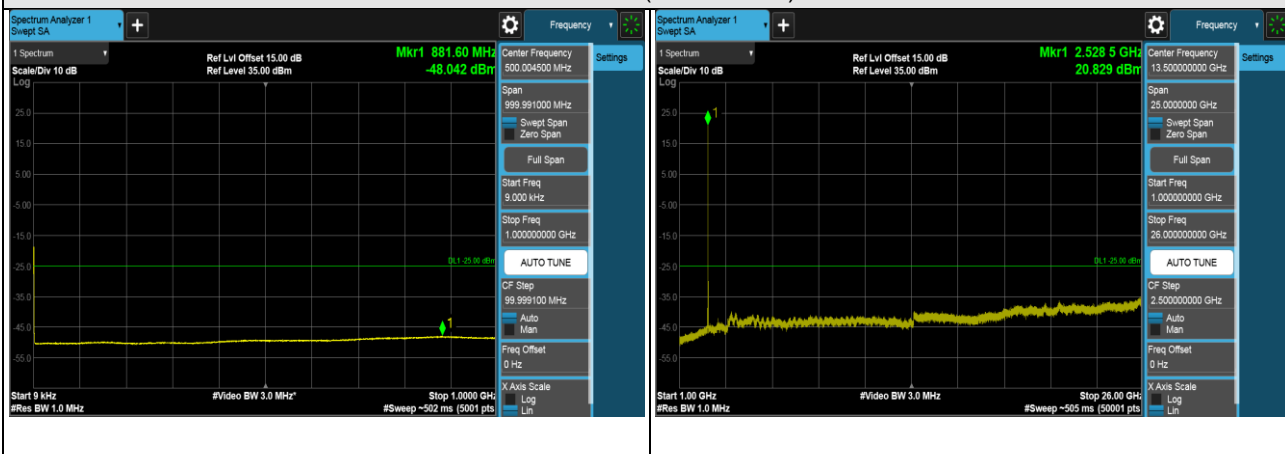


CH 21100 (2535MHz)

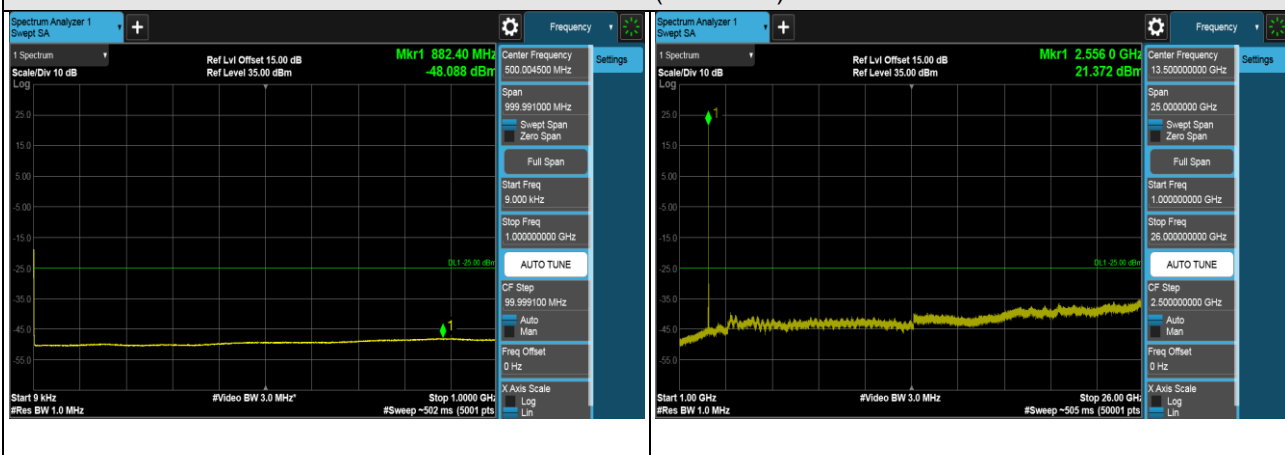


CH 21375 (2562.5MHz)

*The 9kHz signal over the limit is from Spectrum.


LTE Band 7 (Channel Bandwidth 20MHz)

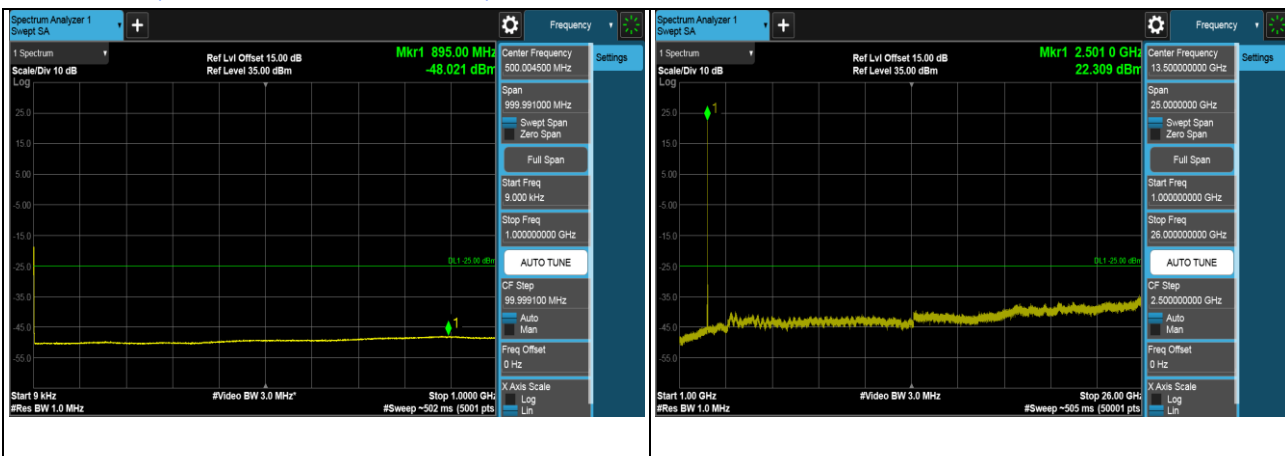

CH 20850 (2510MHz)

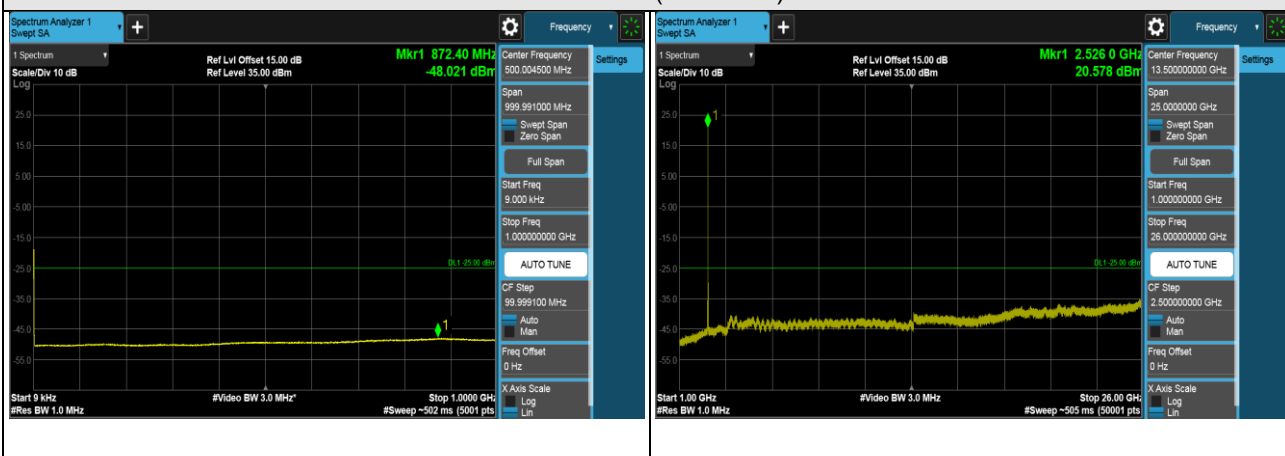

CH 21100 (2535MHz)

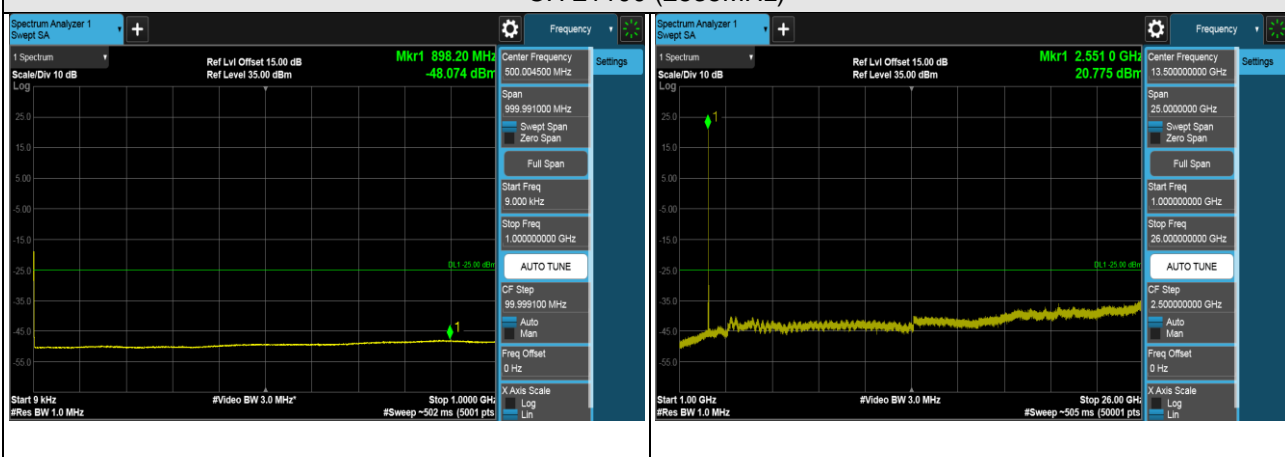

CH 21350 (2560MHz)

*The 9kHz signal over the limit is from Spectrum.

4.8 Radiated Emission Measurement

4.8.1 Limits of Radiated Emission Measurement

According to FCC 27.53(m)(4), on any frequency outside a licensee's frequency block, The power of any emission shall be attenuated below the transmitter power (P) by at least $55 + 10 \log (P)$ dB. The emission limit equal to -25dBm .

4.8.2 Test Procedure

- a. In the semi-anechoic chamber, EUT placed on the 0.8m(below or equal 1GHz) and/or 1.5m(above 1GHz) height of Turn Table, rotated the table around 360 degrees to search the maximum radiation power and receiver antenna shall be rotated vertical and horizontal polarization and moved height from 1m to 4m to find the maximum polar radiated power. The "Read Value" is the spectrum reading the maximum power value.
- b. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- c. Perform a field strength measurement and record the worse read value, is the field strength value via a spectrum reading obtained corrected for antenna factor, cable loss and pre-amplifier factor and then mathematically convert the measured field strength level to EIRP/ERP level.
- d. Following C63.26 section 5.5 and 5.2.7
 $\text{EIRP (dBm)} = E (\text{dB}\mu\text{V/m}) + 20\log(D) - 104.8$; where D is the measurement distance (in the far field region) in m.
 $\text{ERP (dBm)} = E (\text{dB}\mu\text{V/m}) + 20\log(D) - 104.8 - 2.15$; where D is the measurement distance (in the far field region) in m.

NOTE:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 1 MHz/3 MHz.
2. The emission levels were against the limit of frequency range 9 kHz ~ 30 MHz:


The amplitude of spurious emissions attenuated more than 20 dB below the permissible value is not required to be report.

4.8.3 Deviation from Test Standard


No deviation.

4.8.4 Test Setup

<Radiated Emission below or equal 1 GHz>

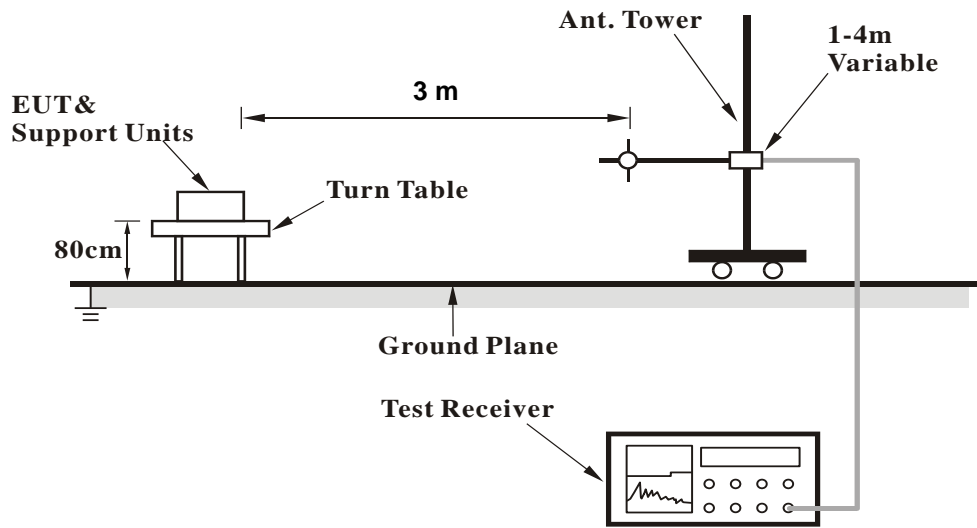

<Radiated Emission above 1 GHz>

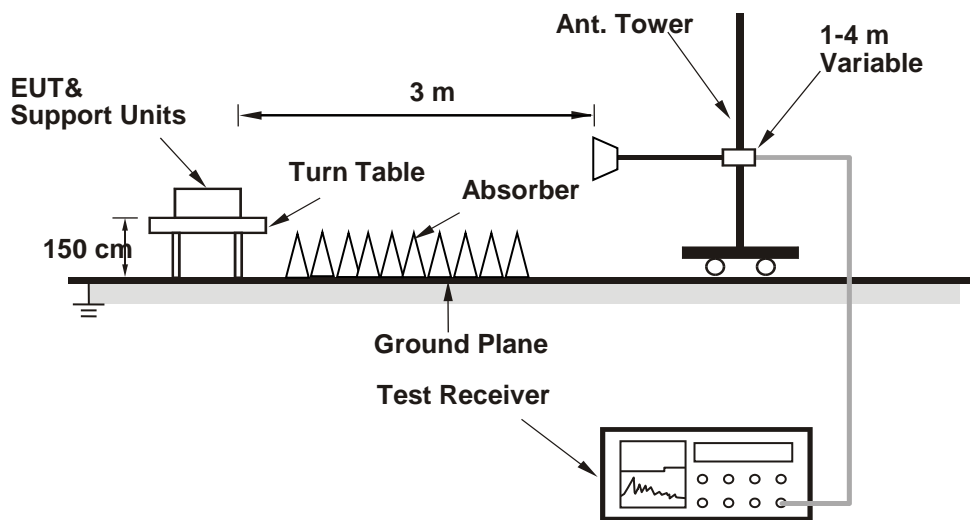

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.8.5 Test Results

Below 1GHz


LTE Band 7, Channel Bandwidth 20MHz

Mode	TX channel 20850 (2510.0MHz)	Frequency Range	Below 1000 MHz
Environmental Conditions	23deg. C, 68%RH	Input Power	120Vac, 60Hz
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	37.76	-42.53	-25.00	-17.53	2.00 H	63	68.73	-111.26
2	79.47	-43.02	-25.00	-18.02	1.00 H	338	72.52	-115.54
3	221.09	-52.13	-25.00	-27.13	1.50 H	104	62.18	-114.31
4	403.45	-66.07	-25.00	-41.07	1.00 H	306	41.72	-107.79
5	473.29	-62.73	-25.00	-37.73	1.50 H	232	43.36	-106.09
6	571.26	-63.06	-25.00	-38.06	1.00 H	98	41.07	-104.13

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. $Margin\ value = EIRP - Limit\ value$
4. The other EIRP levels were very low against the limit.

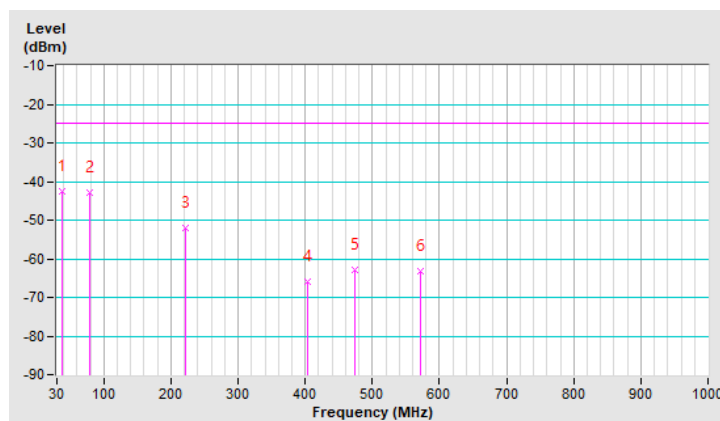


Mode	TX channel 20850 (2510.0MHz)	Frequency Range	Below 1000 MHz
Environmental Conditions	23deg. C, 68%RH	Input Power	120Vac, 60Hz
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Vertical at 3m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	32.91	-43.22	-25.00	-18.22	1.00 V	185	68.74	-111.96
2	79.47	-44.29	-25.00	-19.29	1.00 V	15	71.25	-115.54
3	148.34	-52.66	-25.00	-27.66	1.50 V	205	58.01	-110.67
4	305.48	-64.74	-25.00	-39.74	1.50 V	140	45.56	-110.30
5	384.05	-64.71	-25.00	-39.71	1.00 V	268	43.47	-108.18
6	532.46	-58.31	-25.00	-33.31	2.00 V	191	46.66	-104.97

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. $Margin\ value = EIRP - Limit\ value$
4. The other EIRP levels were very low against the limit.

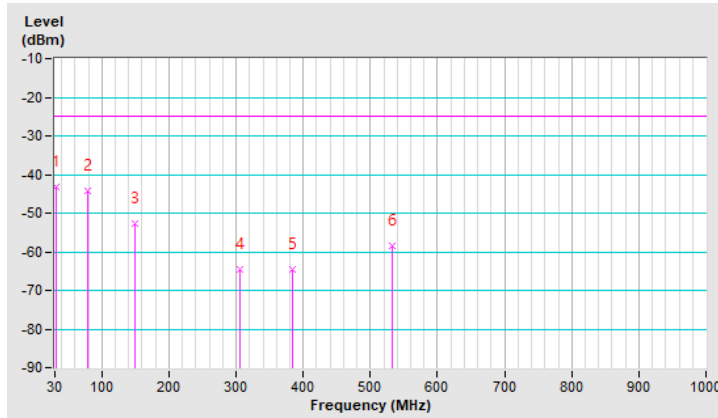

Above 1GHz

LTE Band 7, Channel Bandwidth 5MHz

Mode	TX channel 20775 (2502.5MHz)	Frequency Range	1GHz ~ 26GHz
Environmental Conditions	23deg. C, 68%RH	Input Power	120Vac, 60Hz
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5005.00	-53.69	-25.00	-28.69	1.32 H	303	41.74	-95.43
Antenna Polarity & Test Distance : Vertical at 3m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5005.00	-53.26	-25.00	-28.26	1.08 V	253	42.17	-95.43

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. $Margin\ value = EIRP - Limit\ value$
4. The other EIRP levels were very low against the limit.

Mode	TX channel 21100 (2535.0MHz)	Frequency Range	1GHz ~ 26GHz
Environmental Conditions	23deg. C, 68%RH	Input Power	120Vac, 60Hz
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5070.00	-54.11	-25.00	-29.11	1.26 H	303	41.37	-95.48
Antenna Polarity & Test Distance : Vertical at 3m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5070.00	-53.73	-25.00	-28.73	1.03 V	253	41.75	-95.48

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. $Margin\ value = EIRP - Limit\ value$
4. The other EIRP levels were very low against the limit.

Mode	TX channel 21425 (2567.5MHz)	Frequency Range	1GHz ~ 26GHz
Environmental Conditions	23deg. C, 68%RH	Input Power	120Vac, 60Hz
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5135.00	-53.96	-25.00	-28.96	1.24 H	301	41.38	-95.34
Antenna Polarity & Test Distance : Vertical at 3m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5135.00	-53.46	-25.00	-28.46	1.12 V	256	41.88	-95.34

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. $Margin\ value = EIRP - Limit\ value$
4. The other EIRP levels were very low against the limit.

LTE Band 7, Channel Bandwidth 20MHz

Mode	TX channel 20850 (2510.0MHz)	Frequency Range	1GHz ~ 26GHz
Environmental Conditions	23deg. C, 68%RH	Input Power	120Vac, 60Hz
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5020.00	-53.77	-25.00	-28.77	1.24 H	304	41.69	-95.46
Antenna Polarity & Test Distance : Vertical at 3m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5020.00	-53.09	-25.00	-28.09	1.06 V	256	42.37	-95.46

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. Margin value = EIRP – Limit value
4. The other EIRP levels were very low against the limit.

Mode	TX channel 21100 (2535.0MHz)	Frequency Range	1GHz ~ 26GHz
Environmental Conditions	23deg. C, 68%RH	Input Power	120Vac, 60Hz
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5070.00	-54.14	-25.00	-29.14	1.28 H	300	41.34	-95.48
Antenna Polarity & Test Distance : Vertical at 3m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5070.00	-53.14	-25.00	-28.14	1.09 V	254	42.34	-95.48

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. Margin value = EIRP – Limit value
4. The other EIRP levels were very low against the limit.

Mode	TX channel 21350 (2560.0MHz)	Frequency Range	1GHz ~ 26GHz
Environmental Conditions	23deg. C, 68%RH	Input Power	120Vac, 60Hz
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5120.00	-53.81	-25.00	-28.81	1.27 H	301	41.57	-95.38
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5120.00	-53.16	-25.00	-28.16	1.08 V	256	42.22	-95.38

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. $Margin\ value = EIRP - Limit\ value$
4. The other EIRP levels were very low against the limit.

5 Pictures of Test Arrangements

Please refer to the attached file (Test Setup Photo).

Appendix – Information of the Testing Laboratories

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are FCC recognized accredited test firms and accredited according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

Lin Kou EMC/RF Lab

Tel: 886-2-26052180

Fax: 886-2-26051924

Hsin Chu EMC/RF/Telecom Lab

Tel: 886-3-6668565

Fax: 886-3-6668323

Hwa Ya EMC/RF/Safety Lab

Tel: 886-3-3183232

Fax: 886-3-3270892

Email: service.adt@tw.bureauveritas.com

Web Site: www.bureauveritas-adt.com

The address and road map of all our labs can be found in our web site also.

--- END ---