



FCC RADIO TEST REPORT

FCC ID : B32V240MPLUSU
Equipment : Point of Sales Terminal
Brand Name : Verifone
Model Name : V240m Plus 3GBWU, V240m Plus 3GBWCU
Applicant : Verifone, Inc.
1400 West Stanford Ranch Road, Suite 200,
Rocklin CA 95765 USA
Manufacturer : Verifone, Inc.
Standard : FCC 47 CFR Part 2, 22(H), 24(E)

The product was received on Nov. 04, 2020 and testing was started from Nov. 24, 2020 and completed on Dec. 02, 2020. We, SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory, would like to declare that the tested sample has been evaluated in accordance with the test procedures given in ANSI / TIA-603-E and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory, the test report shall not be reproduced except in full.

Louis Wu

Approved by: Louis Wu

SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory
No. 52, Huaya 1st Rd., Guishan Dist., Taoyuan City, Taiwan (R.O.C.)



Table of Contents

History of this test report.....3

Summary of Test Result.....4

1 General Description5

 1.1 Product Feature of Equipment Under Test5

 1.2 Modification of EUT6

 1.3 Testing Location6

 1.4 Applicable Standards6

2 Test Configuration of Equipment Under Test7

 2.1 Test Mode.....7

 2.2 Connection Diagram of Test System8

 2.3 Support Unit used in test configuration8

 2.4 Measurement Results Explanation Example8

 2.5 Frequency List of Low/Middle/High Channels.....9

3 Conducted Test Result10

 3.1 Measuring Instruments.....10

 3.2 Conducted Output Power and ERP/EIRP11

 3.3 Peak-to-Average Ratio12

 3.4 99% Occupied Bandwidth and 26dB Bandwidth Measurement.....13

 3.5 Conducted Band Edge14

 3.6 Conducted Spurious Emission15

 3.7 Frequency Stability.....16

4 Radiated Test Items17

 4.1 Measuring Instruments.....17

 4.2 Test Setup17

 4.3 Test Result of Radiated Test.....18

 4.4 Field Strength of Spurious Radiation Measurement19

5 List of Measuring Equipment.....20

6 Uncertainty of Evaluation.....21

Appendix A. Test Results of Conducted Test

Appendix B. Test Results of ERP/EIRP and Radiated Test

Appendix C. Test Setup Photographs



Summary of Test Result

Report Clause	Ref Std. Clause	Test Items	Result (PASS/FAIL)	Remark
3.2	§2.1046	Conducted Output Power	Pass	-
	§22.913 (a)(2)	Effective Radiated Power (GSM850) (WCDMA Band V)		
	§24.232 (c)	Equivalent Isotropic Radiated Power (GSM1900) (WCDMA Band II)		
3.3	§24.232 (d)	Peak-to-Average Ratio	Pass	
3.4	§2.1049 §22.917 (b) §24.238 (b)	Occupied Bandwidth (GSM850) (WCDMA Band V) (GSM1900) (WCDMA Band II)	Pass	-
3.5	§2.1051 §22.917 (a) §24.238 (a)	Band Edge Measurement (GSM850) (WCDMA Band V) (GSM1900) (WCDMA Band II)	Pass	-
3.6	§2.1051 §22.917 (a) §24.238 (a)	Conducted Emission (GSM850) (WCDMA Band V) (GSM1900) (WCDMA Band II)	Pass	-
3.7	§2.1055 §22.355 §24.235	Frequency Stability Temperature & Voltage	Pass	-
4.4	§2.1053 §22.917 (a) §24.238 (a)	Field Strength of Spurious Radiation (GSM850) (WCDMA Band V) (GSM1900) (WCDMA Band II)	Pass	Under limit 23.20 dB at 3392.000 MHz

Declaration of Conformity:

The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers.

Comments and Explanations:

The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.

Reviewed by: Wii Chang

Report Producer: Ruby Zou



1 General Description

1.1 Product Feature of Equipment Under Test

GSM/WCDMA, Bluetooth, Wi-Fi 2.4GHz 802.11b/g/n, Wi-Fi 5GHz 802.11a/n/ac and RFID.

Product Specification subjective to this standard	
SKU 1	EUT with Camera
SKU 2	EUT without Camera
Antenna Type	WWAN: PIFA Antenna WLAN: FPC Antenna Bluetooth: FPC Antenna RFID: Loop Antenna
Antenna Gain	Cellular Band: -2.0 dBi PCS Band: -0.4 dBi

Remark: The above EUT's information was declared by manufacturer. Please refer to Comments and Explanations in report summary.

Specification of Accessory		
AC Adapter 1	Brand Name	Verifone
	Manufacturer	PHIHONG
	Model Name	AM11A-050A
	Power Rating	Input : 100-240Vac, 0.5A Output: 5Vdc, 2.2A, 11W
AC Adapter 2	Brand Name	Verifone
	Manufacturer	Salcomp
	Model Name	VF0402
	Power Rating	Input : 100-240Vac, 0.5A Output: 5Vdc, 2.2A, 11W
AC Adapter 3	Brand Name	Verifone
	Manufacturer	Salcomp
	Model Name	SC1402
	Power Rating	Input : 100-240Vac, 0.15A Output: 5Vdc, 1A, 5W
AC Adapter 4	Brand Name	Verifone
	Manufacturer	Leader
	Model Name	MU06-E050100-A1
	Power Rating	Input : 100-240Vac, 0.18A Output: 5Vdc, 1A, 5W
Battery	Brand Name	Verifone
	Model Name	BPK474-001



1.2 Modification of EUT

No modifications are made to the EUT during all test items.

1.3 Testing Location

Test Site	SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory	
Test Site Location	No.52, Huaya 1st Rd., Guishan Dist., Taoyuan City, Taiwan (R.O.C.) TEL: +886-3-327-3456 FAX: +886-3-328-4978	
Test Site No.	Sporton Site No.	
	TH03-HY	03CH07-HY
Test Engineer	Oscar Chi	Jesse Wang, Stan Hsieh
Temperature	21~24°C	23~24°C
Relative Humidity	51~55%	57~60%

Note: The test site complies with ANSI C63.4 2014 requirement.

FCC Designation No.: TW1190

1.4 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ ANSI C63.26-2015
- ♦ ANSI / TIA-603-E
- ♦ FCC 47 CFR Part 2, 22(H), 24(E)
- ♦ FCC KDB 971168 D01 Power Meas. License Digital Systems v03r01
- ♦ FCC KDB 412172 D01 Determining ERP and EIRP v01r01
- ♦ FCC KDB 414788 D01 Radiated Test Site v01r01

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.
3. The TAF code is not including all the FCC KDB listed without accreditation.



2 Test Configuration of Equipment Under Test

2.1 Test Mode

Antenna port conducted and radiated test items were performed according to KDB 971168 D01 Power Meas. License Digital Systems v03r01 with maximum output power.

Radiated emissions were investigated as following frequency range:

1. 30 MHz to 9000 MHz for GSM850 and WCDMA Band V
2. 30 MHz to 19100 MHz for GSM1900 and WCDMA Band II


All modes and data rates and positions were investigated.

Test modes are chosen to be reported as the worst case configuration below:

Test Modes		
Band	Radiated TCs	Conducted TCs
GSM850	<ul style="list-style-type: none">■ GPRS Class 8 Link■ EDGE Class 8 Link	<ul style="list-style-type: none">■ GPRS Class 8 Link■ EDGE Class 8 Link
GSM1900	<ul style="list-style-type: none">■ GPRS Class 8 Link■ EDGE Class 8 Link	<ul style="list-style-type: none">■ GPRS Class 8 Link■ EDGE Class 8 Link
WCDMA Band V	<ul style="list-style-type: none">■ RMC 12.2Kbps Link	<ul style="list-style-type: none">■ RMC 12.2Kbps Link
WCDMA Band II	<ul style="list-style-type: none">■ RMC 12.2Kbps Link	<ul style="list-style-type: none">■ RMC 12.2Kbps Link

Remark: All the radiated test cases were performed with Adapter 1.

2.2 Connection Diagram of Test System

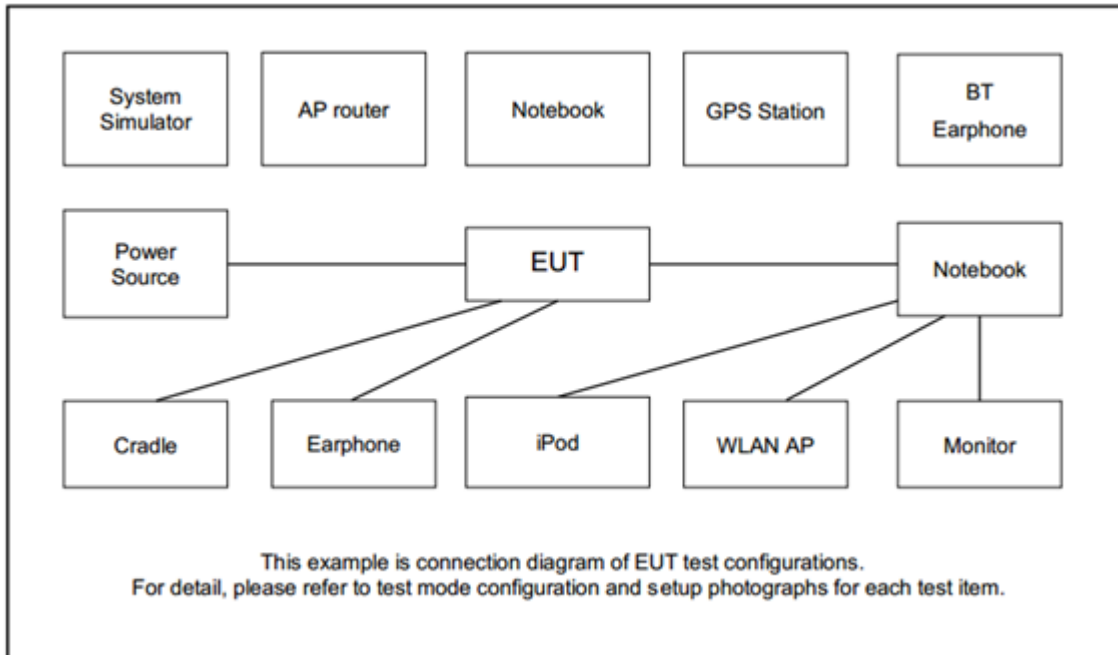

2.3 Support Unit used in test configuration

Item	Equipment	Brand Name	Model No.	FCC ID	Data Cable	Power Cord
1.	System Simulator	R&S	CMU 200	N/A	N/A	Unshielded, 1.8 m

2.4 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between RF conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level will be exactly the RF output level.

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

The following shows an offset computation example with RF cable loss 4.2 dB and a 10dB attenuator.

Example:

$$\begin{aligned} \text{Offset(dB)} &= \text{RF cable loss(dB)} + \text{attenuator factor(dB)}. \\ &= 4.2 + 10 = 14.2 \text{ (dB)} \end{aligned}$$



2.5 Frequency List of Low/Middle/High Channels

Frequency List				
Band	Channel/Frequency(MHz)	Lowest	Middle	Highest
GSM850	Channel	128	189	251
	Frequency	824.2	836.4	848.8
WCDMA Band V	Channel	4132	4182	4233
	Frequency	826.4	836.4	846.6
GSM1900	Channel	512	661	810
	Frequency	1850.2	1880.0	1909.8
WCDMA Band II	Channel	9262	9400	9538
	Frequency	1852.4	1880.0	1907.6


3 Conducted Test Result

3.1 Measuring Instruments


See list of measuring instruments of this test report.

3.1.1 Test Setup


3.1.2 Conducted Output Power



3.1.3 Peak-to-Average Ratio, Occupied Bandwidth, Conducted Band-Edge and Conducted Spurious Emission

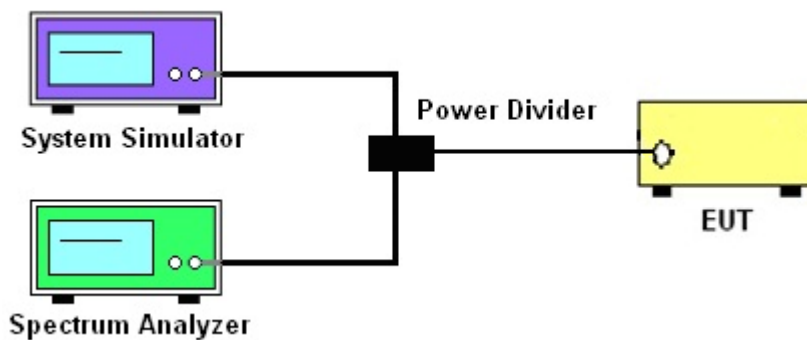

3.1.4 Frequency Stability

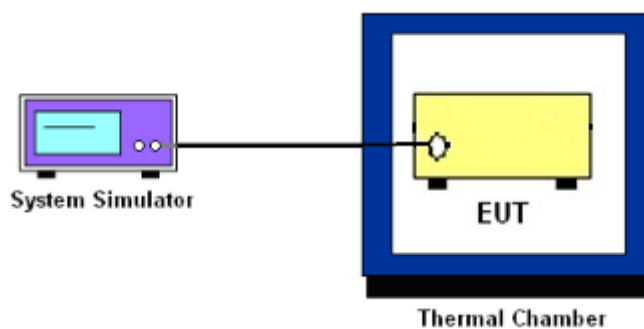

3.1.5 Test Result of Conducted Test

Please refer to Appendix A.



3.2 Conducted Output Power and ERP/EIRP

3.2.1 Description of the Conducted Output Power and ERP/EIRP

A system simulator was used to establish communication with the EUT. Its parameters were set to enforce EUT transmitting at the maximum power. The measured power in the radio frequency on the transmitter output terminals shall be reported.

The ERP of mobile transmitters must not exceed 7 Watts for GSM850 and WCDMA Band V

The EIRP of mobile transmitters must not exceed 2 Watts for GSM1900 and WCDMA Band II

According to KDB 412172 D01 Power Approach,

$EIRP = P_T + G_T - L_C$, $ERP = EIRP - 2.15$, where

P_T = transmitter output power in dBm

G_T = gain of the transmitting antenna in dBi

L_C = signal attenuation in the connecting cable between the transmitter and antenna in dB

3.2.2 Test Procedures

1. The transmitter output port was connected to the system simulator.
2. Set EUT at maximum power through system simulator.
3. Select lowest, middle, and highest channels for each band and different modulation.
4. Measure the maximum burst average power for GSM and maximum average power for other modulation signal.



3.3 Peak-to-Average Ratio

3.3.1 Description of the PAR Measurement

The peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.

3.3.2 Test Procedures

The testing follows ANSI C63.26-2015 Section 5.2.6

1. The EUT was connected to spectrum analyzer and system simulator via a power divider.
2. Set EUT to transmit at maximum output power.
3. When the duty cycle is less than 98%, then signal gating will be implemented on the spectrum analyzer by triggering from the system simulator.
4. Set the CCDF (Complementary Cumulative Distribution Function) option of the spectrum analyzer.
5. Record the maximum PAPR level associated with a probability of 0.1%.



3.4 99% Occupied Bandwidth and 26dB Bandwidth Measurement

3.4.1 Description of 99% Occupied Bandwidth and 26dB Bandwidth Measurement

The occupied bandwidth is the width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5% of the total mean transmitted power.

The 26 dB emission bandwidth is defined as the frequency range between two points, one above and one below the carrier frequency, at which the spectral density of the emission is attenuated 26 dB below the maximum in-band spectral density of the modulated signal. Spectral density (power per unit bandwidth) is to be measured with a detector of resolution bandwidth equal to approximately 1.0% of the emission bandwidth.

3.4.2 Test Procedures

The testing follows ANSI C63.26-2015 Section 5.4.3 (26dB) and Section 5.4.4 (99OB)

1. The EUT was connected to spectrum analyzer and system simulator via a power divider.
2. The spectrum analyzer center frequency is set to the nominal EUT channel center frequency. The span range for the spectrum analyzer shall be between two and five times the anticipated OBW.
3. The nominal resolution bandwidth (RBW) shall be in the range of 1 to 5 % of the anticipated OBW, and the VBW shall be at least 3 times the RBW.
4. Set the detection mode to peak, and the trace mode to max hold.
5. Determine the reference value: Set the EUT to transmit a modulated signal. Allow the trace to stabilize. Set the spectrum analyzer marker to the highest level of the displayed trace.
(this is the reference value)
6. Determine the “-26 dB down amplitude” as equal to (Reference Value – X).
7. Place two markers, one at the lowest and the other at the highest frequency of the envelope of the spectral display such that each marker is at or slightly below the “-X dB down amplitude” determined in step 6. If a marker is below this “-X dB down amplitude” value it shall be placed as close as possible to this value. The OBW is the positive frequency difference between the two markers.
8. Use the 99 % power bandwidth function of the spectrum analyzer and report the measured bandwidth.



3.5 Conducted Band Edge

3.5.1 Description of Conducted Band Edge Measurement

The power of any emission outside of the authorized operating frequency ranges must be lower than the transmitter power (P) by a factor of at least $43 + 10 \log (P)$ dB.

3.5.2 Test Procedures

The testing follows FCC KDB 971168 D01 v03r01 Section 6.1.

1. The EUT was connected to the spectrum analyzer and system simulator via a power divider.
2. The RF output of EUT was connected to the spectrum analyzer by an RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. The band edges of low and high channels for the highest RF powers were measured.
4. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
5. The limit line is derived from $43 + 10\log(P)$ dB below the transmitter power P(Watts)



3.6 Conducted Spurious Emission

3.6.1 Description of Conducted Spurious Emission Measurement

The power of any emission outside of the authorized operating frequency ranges must be lower than the transmitter power (P) by a factor of at least $43 + 10 \log (P)$ dB.

It is measured by means of a calibrated spectrum analyzer and scanned from 30 MHz up to a frequency including its 10th harmonic.

3.6.2 Test Procedures

The testing follows FCC KDB 971168 D01 v03r01 Section 6.1.

1. The EUT was connected to the spectrum analyzer and system simulator via a power divider.
2. The RF output of EUT was connected to the spectrum analyzer by an RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. The middle channel for the highest RF power within the transmitting frequency was measured.
4. The conducted spurious emission for the whole frequency range was taken.
5. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
6. The limit line is derived from $43 + 10\log(P)$ dB below the transmitter power P(Watts)



3.7 Frequency Stability

3.7.1 Description of Frequency Stability Measurement

22.355

The frequency stability shall be measured by variation of ambient temperature and variation of primary supply voltage to ensure that the fundamental emission stays within the authorized frequency block. The frequency stability of the transmitter shall be maintained within $\pm 0.00025\%$ ($\pm 2.5\text{ppm}$) of the center frequency.

24.235

The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block.

3.7.2 Test Procedures for Temperature Variation

The testing follows FCC KDB 971168 D01 v03r01 Section 9.0.

1. The EUT was set up in the thermal chamber and connected with the system simulator.
2. With power OFF, the temperature was decreased to -30°C and the EUT was stabilized before testing. Power was applied and the maximum change in frequency was recorded within one minute.
3. With power OFF, the temperature was raised in 10°C steps up to 50°C . The EUT was stabilized at each step for at least half an hour. Power was applied and the maximum frequency change was recorded within one minute.

3.7.3 Test Procedures for Voltage Variation

The testing follows FCC KDB 971168 D01 v03r01 Section 9.0.

1. The EUT was placed in a temperature chamber at $20\pm 5^{\circ}\text{C}$ and connected with the system simulator.
2. The power supply voltage to the EUT was varied from 85% to 115% of the nominal value measured at the input to the EUT.
3. The variation in frequency was measured for the worst case.


4 Radiated Test Items

4.1 Measuring Instruments


See list of measuring instruments of this test report.

4.2 Test Setup


For radiated test below 30MHz

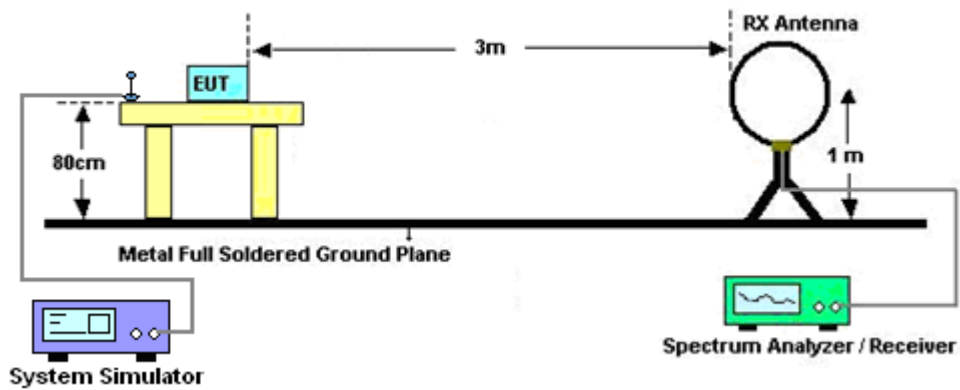

For radiated test from 30MHz to 1GHz

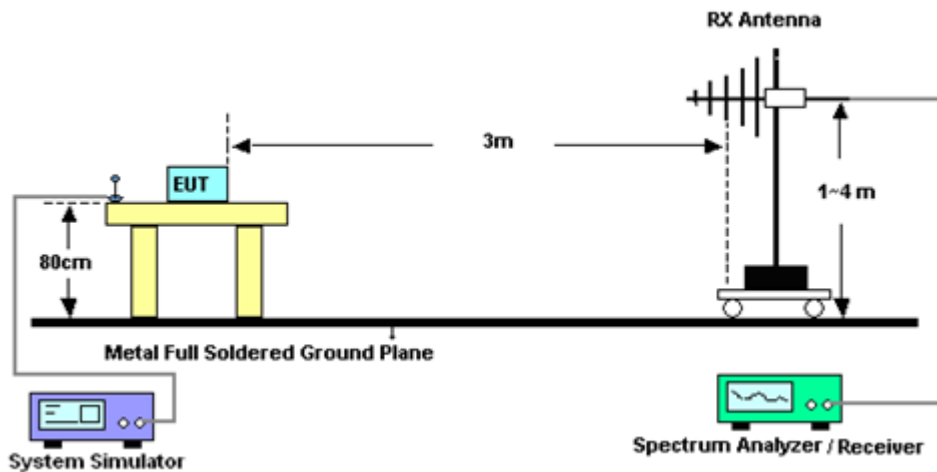

For radiated test above 1GHz

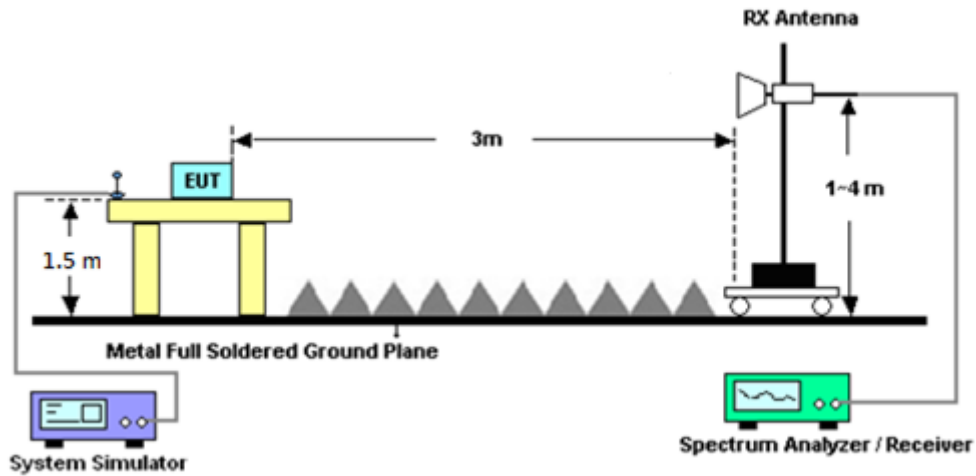

4.3 Test Result of Radiated Test

Please refer to Appendix B.

Note:

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

There is a comparison data of both open-field test site and alternative test site - semi-Anechoic chamber according to 414788 D01 Radiated Test Site v01r01, and the result came out very similar.



4.4 Field Strength of Spurious Radiation Measurement

4.4.1 Description of Field Strength of Spurious Radiated Measurement

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitter power (P) by a factor of at least $43 + 10 \log (P)$ dB. The spectrum is scanned from 30 MHz up to a frequency including its 10th harmonic.

4.4.2 Test Procedures

The testing follows FCC KDB 971168 D01 v03r01 Section 7 and ANSI / TIA-603-E Section 2.2.12.

1. The EUT was placed on a rotatable wooden table 0.8 meters for frequency below 1GHz and 1.5 meter for frequency above 1GHz above the ground.
2. The EUT was set 3 meters from the receiving antenna, which was mounted on the antenna tower.
3. The table was rotated 360 degrees to determine the position of the highest spurious emission.
4. The height of the receiving antenna is varied between one meter and four meters to search for the maximum spurious emission for both horizontal and vertical polarizations.
5. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz, taking record of maximum spurious emission.
6. A horn antenna was substituted in place of the EUT and was driven by a signal generator.
7. Tune the output power of signal generator to the same emission level with EUT maximum spurious emission.
8. Taking the record of output power at antenna port.
9. Repeat step 7 to step 8 for another polarization.
10. $EIRP (dBm) = S.G. Power - Tx Cable Loss + Tx Antenna Gain$
11. $ERP (dBm) = EIRP - 2.15$
12. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
13. The limit line is derived from $43 + 10\log(P)$ dB below the transmitter power P(Watts)



5 List of Measuring Equipment

Instrument	Brand Name	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Bilog Antenna	TESEQ	CBL 6111D & 00800N1D01N-06	35419 & 03	30MHz~1GHz	Apr. 29, 2020	Nov. 24, 2020~Dec. 02, 2020	Apr. 28, 2021	Radiation (03CH07-HY)
Double Ridge Horn Antenna	ESCO	3117	00075962	1GHz ~ 18GHz	Dec. 06, 2019	Nov. 24, 2020~Dec. 02, 2020	Dec. 05, 2020	Radiation (03CH07-HY)
Preamplifier	COM-POWER	PA-103A	161241	10MHz~1GHz	May 19, 2020	Nov. 24, 2020~Dec. 02, 2020	May 18, 2021	Radiation (03CH07-HY)
Preamplifier	Agilent	8449B	3008A02362	1GHz~26.5GHz	Oct. 31, 2020	Nov. 24, 2020~Dec. 02, 2020	Oct. 30, 2021	Radiation (03CH07-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	MY2858/2,80 1606/2	18GHz~40GHz	Feb. 25, 2020	Nov. 24, 2020~Dec. 02, 2020	Feb. 24, 2021	Radiation (03CH07-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 104	MY28655/4, MY24971/4, MY15682/4	30MHz~1GHz	Feb. 25, 2020	Nov. 24, 2020~Dec. 02, 2020	Feb. 24, 2021	Radiation (03CH07-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 104	MY28655/4, MY24971/4, MY15682/4	1GHz~18GHz	Feb. 25, 2020	Nov. 24, 2020~Dec. 02, 2020	Feb. 24, 2021	Radiation (03CH07-HY)
Controller	ChainTek	Chaintek 3000	N/A	Control Turn table	N/A	Nov. 24, 2020~Dec. 02, 2020	N/A	Radiation (03CH07-HY)
Controller	Max-Full	MF7802	MF78020836 8	Control Ant Mast	N/A	Nov. 24, 2020~Dec. 02, 2020	N/A	Radiation (03CH07-HY)
Antenna Mast	Max-Full	MFA520BS	N/A	1m~4m	N/A	Nov. 24, 2020~Dec. 02, 2020	N/A	Radiation (03CH07-HY)
Turn Table	ChainTek	Chaintek 3000	N/A	0~360 Degree	N/A	Nov. 24, 2020~Dec. 02, 2020	N/A	Radiation (03CH07-HY)
USB Data Logger	TECPEL	TR-32	HE17XB2495	N/A	N/A	Nov. 24, 2020~Dec. 02, 2020	N/A	Radiation (03CH07-HY)
Horn Antenna	EMCO	3117	00143261	1GHz~18GHz	Jan. 10, 2020	Nov. 24, 2020~Dec. 02, 2020	Jan. 09, 2021	Radiation (03CH07-HY)
SHF-EHF Horn Antenna	SCHWARZBECK	BBHA 9170	BBHA917058 4	18GHz~40GHz	Dec. 10, 2019	Nov. 24, 2020~Dec. 02, 2020	Dec. 09, 2020	Radiation (03CH07-HY)
Software	Audix	E3 6.2009-8-24	N/A	N/A	N/A	Nov. 24, 2020~Dec. 02, 2020	N/A	Radiation (03CH07-HY)
Preamplifier	EMEC	EM18G40G	060801	18GHz~40GHz	N/A	Nov. 24, 2020~Dec. 02, 2020	N/A	Radiation (03CH07-HY)
Signal Generator	Anritsu	MG3694C	163401	0.1Hz~40GHz	Feb. 15, 2020	Nov. 24, 2020~Dec. 02, 2020	Feb. 14, 2021	Radiation (03CH07-HY)
Hygrometer	Testo	608-H1	34893241	N/A	Mar. 02, 2020	Nov. 25, 2020	Mar. 01, 2021	Conducted (TH03-HY)
Spectrum Analyzer	Rohde & Schwarz	FSP30	101329	9kHz~30GHz	Sep. 03, 2020	Nov. 25, 2020	Sep. 02, 2021	Conducted (TH03-HY)
Temperature & Humidity Cabinet Chamber	ESPEC	LHU-113	1012005860	N/A	Dec. 12, 2019	Nov. 25, 2020	Dec. 11, 2020	Conducted (TH03-HY)
Programmable Power Supply	GW Instek	PSS-2005	EL890001	1V~20V 0.5A~4A	Oct. 05, 2020	Nov. 25, 2020	Oct. 04, 2021	Conducted (TH03-HY)
Base Station (Measure)	Rohde & Schwarz	CMU200	117995	GSM / GPRS / WCDMA / CDMA	Sep. 07, 2020	Nov. 25, 2020	Sep. 06, 2021	Conducted (TH03-HY)
Power Divider	Warison	WCOU-0.4-26.5S-20	#A	N/A	Nov. 03, 2020	Nov. 25, 2020	Nov. 02, 2021	Conducted (TH03-HY)



6 Uncertainty of Evaluation

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	3.35
---	------

Uncertainty of Radiated Emission Measurement (1 GHz ~ 18 GHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	3.81
---	------

Uncertainty of Radiated Emission Measurement (18 GHz ~ 40 GHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	4.85
---	------



Appendix A. Test Results of Conducted Test

Conducted Output Power(Average power)

Conducted Power (*Unit: dBm)						
Band	GSM850			GSM1900		
Channel	128	189	251	512	661	810
Frequency	824.2	836.4	848.8	1850.2	1880	1909.8
GPRS class 8	32.82	32.81	32.64	29.79	29.76	29.48
GPRS class 10	32.80	32.80	32.63	29.78	29.00	29.46
GPRS class 11	31.36	31.36	32.12	28.00	28.03	27.94
GPRS class 12	29.38	29.30	28.99	25.89	25.96	25.92
EGPRS class 8	27.02	27.08	26.97	26.20	26.17	26.05
EGPRS class 10	26.96	26.93	26.88	26.04	26.01	25.90
EGPRS class 11	24.77	24.88	24.74	24.29	24.28	24.29
EGPRS class 12	22.81	22.95	22.86	22.00	21.99	21.99

Conducted Power (*Unit: dBm)						
Band	WCDMA Band V			WCDMA Band II		
Channel	4132	4182	4233	9262	9400	9538
Frequency	826.4	836.4	846.6	1852.4	1880	1907.6
RMC 12.2K	23.45	23.09	23.23	21.75	21.61	21.20
HSDPA Subtest-1	23.36	22.93	23.14	21.57	21.05	21.09
HSDPA Subtest-2	23.37	22.96	23.09	21.60	21.47	21.10
HSDPA Subtest-3	22.90	22.79	22.82	21.46	21.46	21.14
HSDPA Subtest-4	22.92	22.83	22.80	21.40	21.49	21.13
HSUPA Subtest-1	23.07	22.69	22.78	21.72	21.52	21.16
HSUPA Subtest-2	21.46	21.16	21.38	19.85	19.68	19.34
HSUPA Subtest-3	21.98	21.53	21.69	20.30	19.97	19.68
HSUPA Subtest-4	21.40	21.26	21.36	19.93	19.65	19.53
HSUPA Subtest-5	21.96	21.85	21.70	21.69	21.31	21.47









A2. GSM

Peak-to-Average Ratio







Mode	GSM850		Limit: 13dB
Mod.	GPRS class 8	EDGE class 8	Result
Lowest CH	0.28	3.40	PASS
Middle CH	0.24	3.44	
Highest CH	0.24	3.36	

Mode	GSM1900		Limit: 13dB
Mod.	GPRS class 8	EDGE class 8	Result
Lowest CH	0.24	2.92	PASS
Middle CH	0.24	3.08	
Highest CH	0.20	2.80	

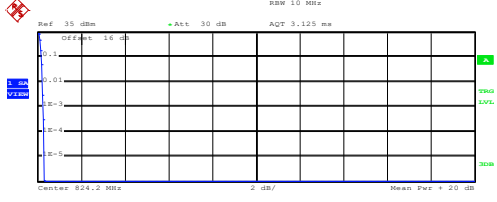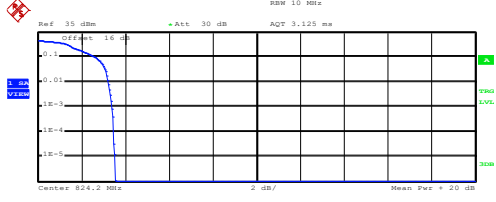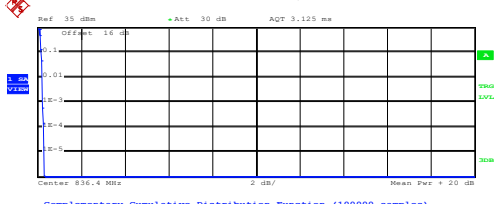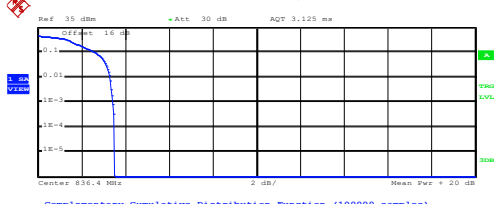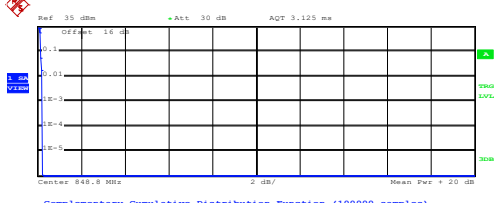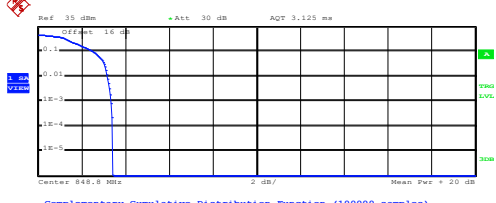

GSM850 (GPRS class 8)	GSM850 (EDGE class 8)
<p style="text-align: center;">Lowest Channel</p>  <p>Complementary Cumulative Distribution Function (100000 samples)</p> <p>Trace 1</p> <p>Mean 31.58 dBm Peak 31.86 dBm Crest 0.28 dB</p> <p>10 % 0.20 dB 1 % 0.24 dB .1 % 0.28 dB .01 % 0.32 dB</p> <p>Date: 25.NOV.2020 15:04:19</p>	<p style="text-align: center;">Lowest Channel</p>  <p>Complementary Cumulative Distribution Function (100000 samples)</p> <p>Trace 1</p> <p>Mean 26.28 dBm Peak 29.82 dBm Crest 3.53 dB</p> <p>10 % 2.64 dB 1 % 3.20 dB .1 % 3.40 dB .01 % 3.48 dB</p> <p>Date: 25.NOV.2020 15:29:48</p>
<p style="text-align: center;">Middle Channel</p>  <p>Complementary Cumulative Distribution Function (100000 samples)</p> <p>Trace 1</p> <p>Mean 31.50 dBm Peak 31.79 dBm Crest 0.29 dB</p> <p>10 % 0.16 dB 1 % 0.24 dB .1 % 0.24 dB .01 % 0.28 dB</p> <p>Date: 25.NOV.2020 15:04:41</p>	<p style="text-align: center;">Middle Channel</p>  <p>Complementary Cumulative Distribution Function (100000 samples)</p> <p>Trace 1</p> <p>Mean 26.32 dBm Peak 29.82 dBm Crest 3.50 dB</p> <p>10 % 2.64 dB 1 % 3.28 dB .1 % 3.44 dB .01 % 3.52 dB</p> <p>Date: 25.NOV.2020 15:30:12</p>
<p style="text-align: center;">Highest Channel</p>  <p>Complementary Cumulative Distribution Function (100000 samples)</p> <p>Trace 1</p> <p>Mean 31.42 dBm Peak 31.65 dBm Crest 0.23 dB</p> <p>10 % 0.16 dB 1 % 0.20 dB .1 % 0.24 dB .01 % 0.24 dB</p> <p>Date: 25.NOV.2020 15:05:03</p>	<p style="text-align: center;">Highest Channel</p>  <p>Complementary Cumulative Distribution Function (100000 samples)</p> <p>Trace 1</p> <p>Mean 26.27 dBm Peak 29.67 dBm Crest 3.41 dB</p> <p>10 % 2.56 dB 1 % 3.20 dB .1 % 3.36 dB .01 % 3.44 dB</p> <p>Date: 25.NOV.2020 15:30:34</p>

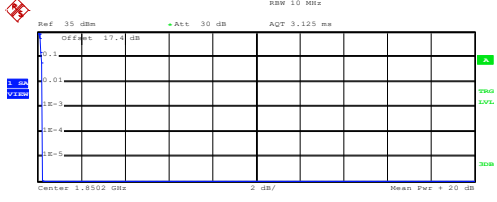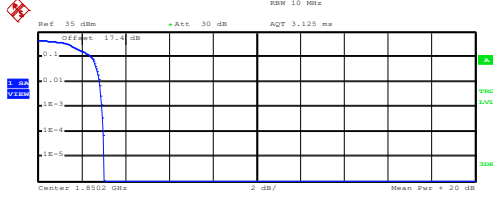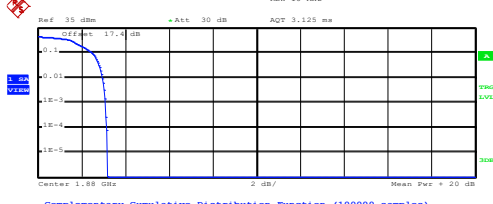


GSM1900 (GPRS class 8)	GSM1900 (EDGE class 8)
<p style="text-align: center;">Lowest Channel</p>  <p style="text-align: center;">Complementary Cumulative Distribution Function (100000 samples)</p> <p style="text-align: center;">Trace 1</p> <p>Mean 28.32 dBm Peak 28.55 dBm Crest 0.23 dB</p> <p>10 % 0.20 dB 1 % 0.24 dB .1 % 0.24 dB .01 % 0.24 dB</p> <p>Date: 25.NOV.2020 13:59:28</p>	<p style="text-align: center;">Lowest Channel</p>  <p style="text-align: center;">Complementary Cumulative Distribution Function (100000 samples)</p> <p style="text-align: center;">Trace 1</p> <p>Mean 25.33 dBm Peak 28.33 dBm Crest 3.00 dB</p> <p>10 % 2.48 dB 1 % 2.84 dB .1 % 2.92 dB .01 % 3.00 dB</p> <p>Date: 25.NOV.2020 14:44:55</p>
<p style="text-align: center;">Middle Channel</p>  <p style="text-align: center;">Complementary Cumulative Distribution Function (100000 samples)</p> <p style="text-align: center;">Trace 1</p> <p>Mean 28.32 dBm Peak 28.55 dBm Crest 0.23 dB</p> <p>10 % 0.16 dB 1 % 0.24 dB .1 % 0.24 dB .01 % 0.24 dB</p> <p>Date: 25.NOV.2020 13:59:50</p>	<p style="text-align: center;">Middle Channel</p>  <p style="text-align: center;">Complementary Cumulative Distribution Function (100000 samples)</p> <p style="text-align: center;">Trace 1</p> <p>Mean 25.09 dBm Peak 28.26 dBm Crest 3.17 dB</p> <p>10 % 2.48 dB 1 % 2.96 dB .1 % 3.08 dB .01 % 3.16 dB</p> <p>Date: 25.NOV.2020 14:45:16</p>
<p style="text-align: center;">Highest Channel</p>  <p style="text-align: center;">Complementary Cumulative Distribution Function (100000 samples)</p> <p style="text-align: center;">Trace 1</p> <p>Mean 28.08 dBm Peak 28.33 dBm Crest 0.25 dB</p> <p>10 % 0.20 dB 1 % 0.20 dB .1 % 0.20 dB .01 % 0.24 dB</p> <p>Date: 25.NOV.2020 14:00:10</p>	<p style="text-align: center;">Highest Channel</p>  <p style="text-align: center;">Complementary Cumulative Distribution Function (100000 samples)</p> <p style="text-align: center;">Trace 1</p> <p>Mean 25.15 dBm Peak 28.05 dBm Crest 2.90 dB</p> <p>10 % 2.32 dB 1 % 2.68 dB .1 % 2.80 dB .01 % 2.88 dB</p> <p>Date: 25.NOV.2020 14:45:37</p>




26dB Bandwidth

Mode	GSM850: 26dB BW(MHz)	
Mod.	GPRS class 8	EDGE class 8
Lowest CH	0.309	0.290
Middle CH	0.318	0.293
Highest CH	0.310	0.298

Mode	GSM1900: 26dB BW(MHz)	
Mod.	GPRS class 8	EDGE class 8
Lowest CH	0.311	0.309
Middle CH	0.301	0.302
Highest CH	0.300	0.308

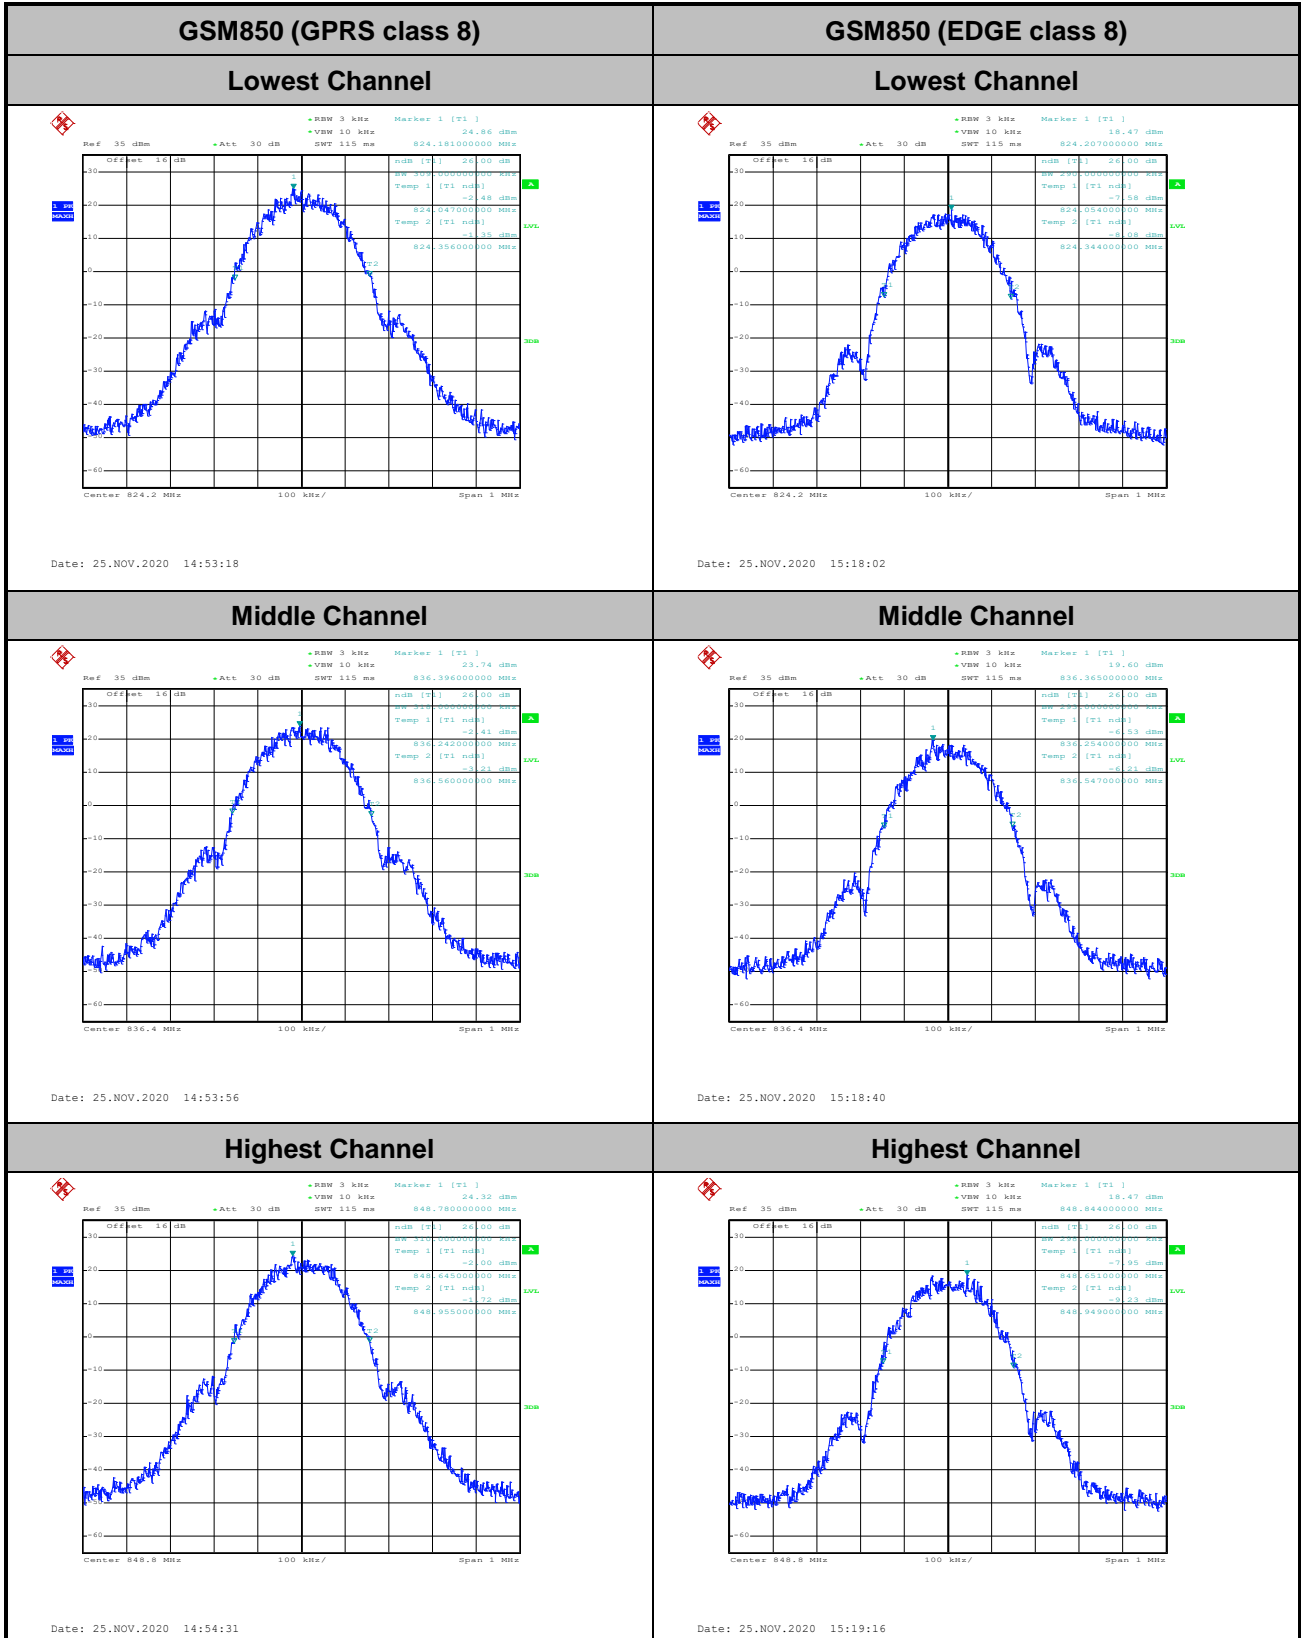

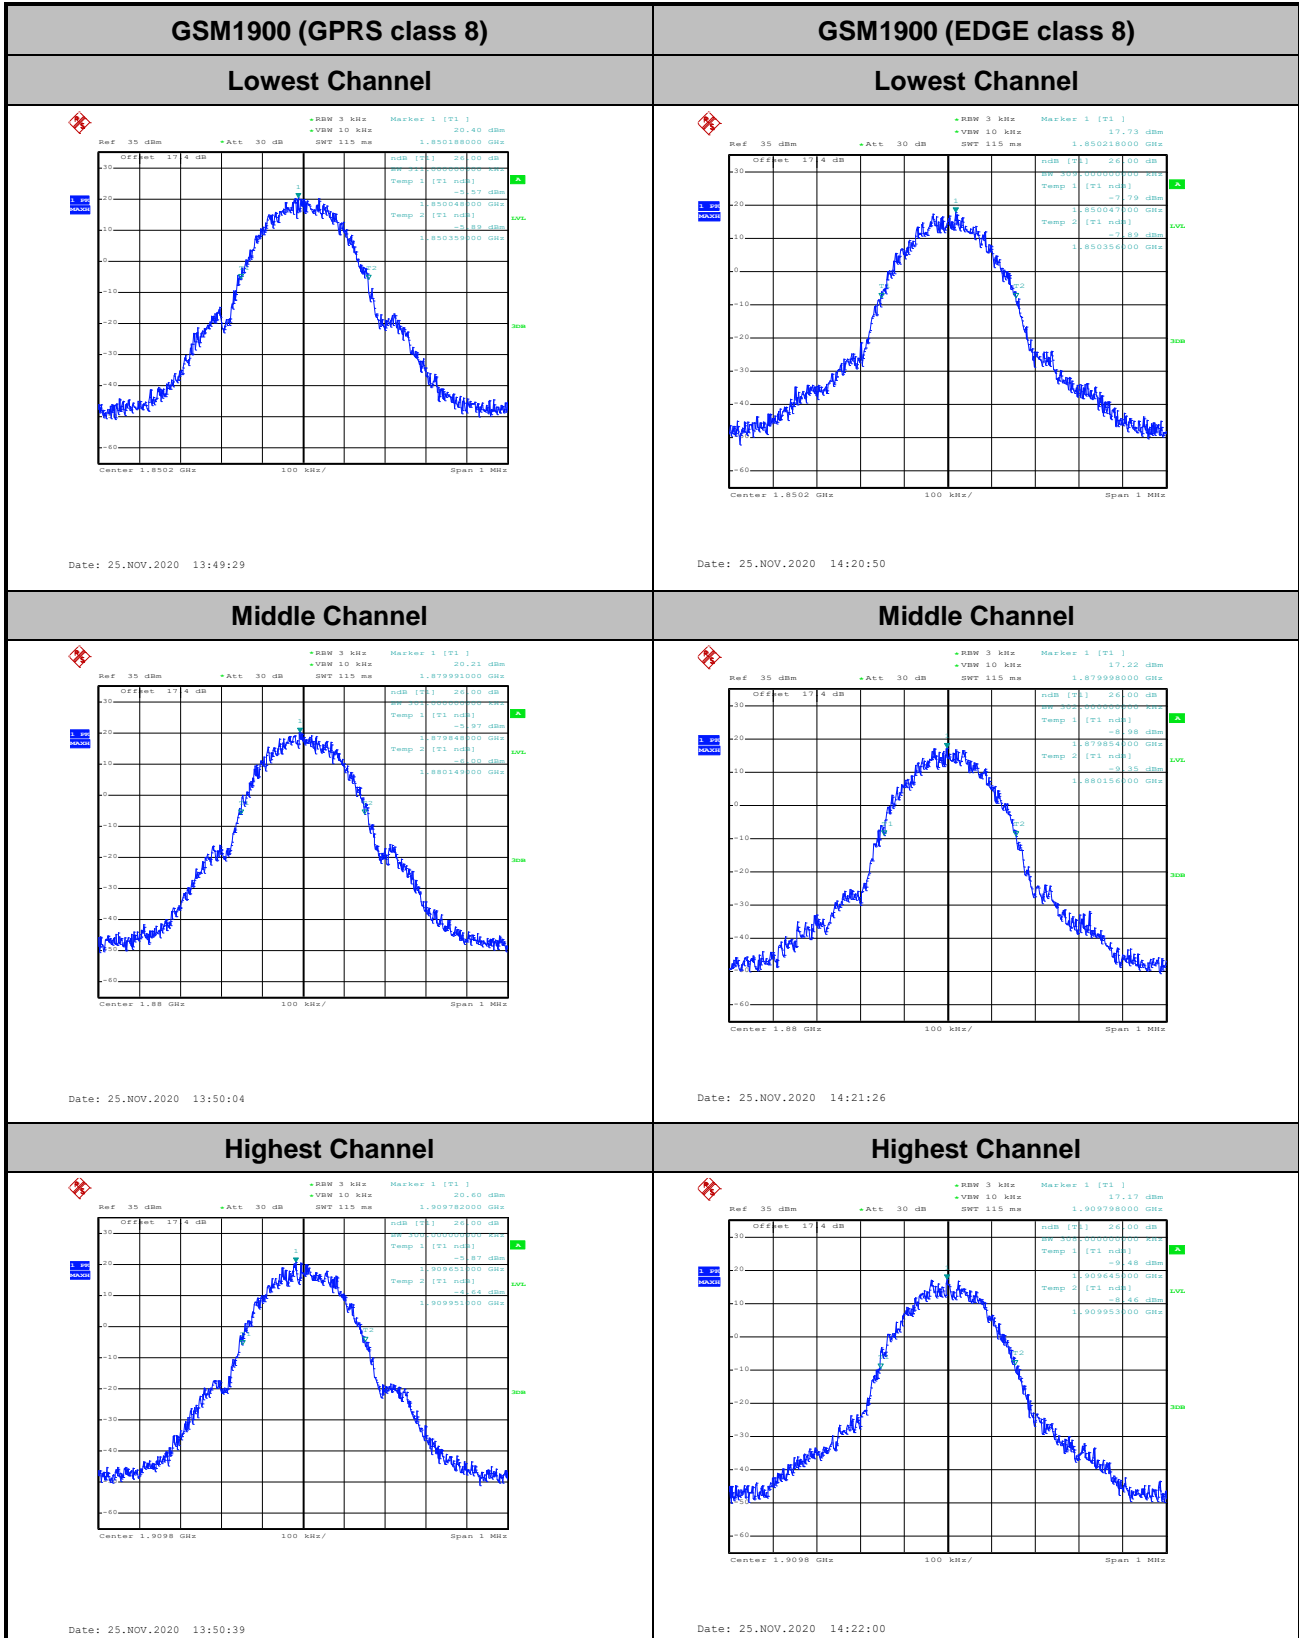










Occupied Bandwidth

Mode	GSM850: 99% OBW (MHz)	
Mod.	GPRS class 8	EDGE class 8
Lowest CH	0.246	0.246
Middle CH	0.244	0.241
Highest CH	0.247	0.243

Mode	GSM1900: 99% OBW (MHz)	
Mod.	GPRS class 8	EDGE class 8
Lowest CH	0.243	0.247
Middle CH	0.244	0.247
Highest CH	0.244	0.250

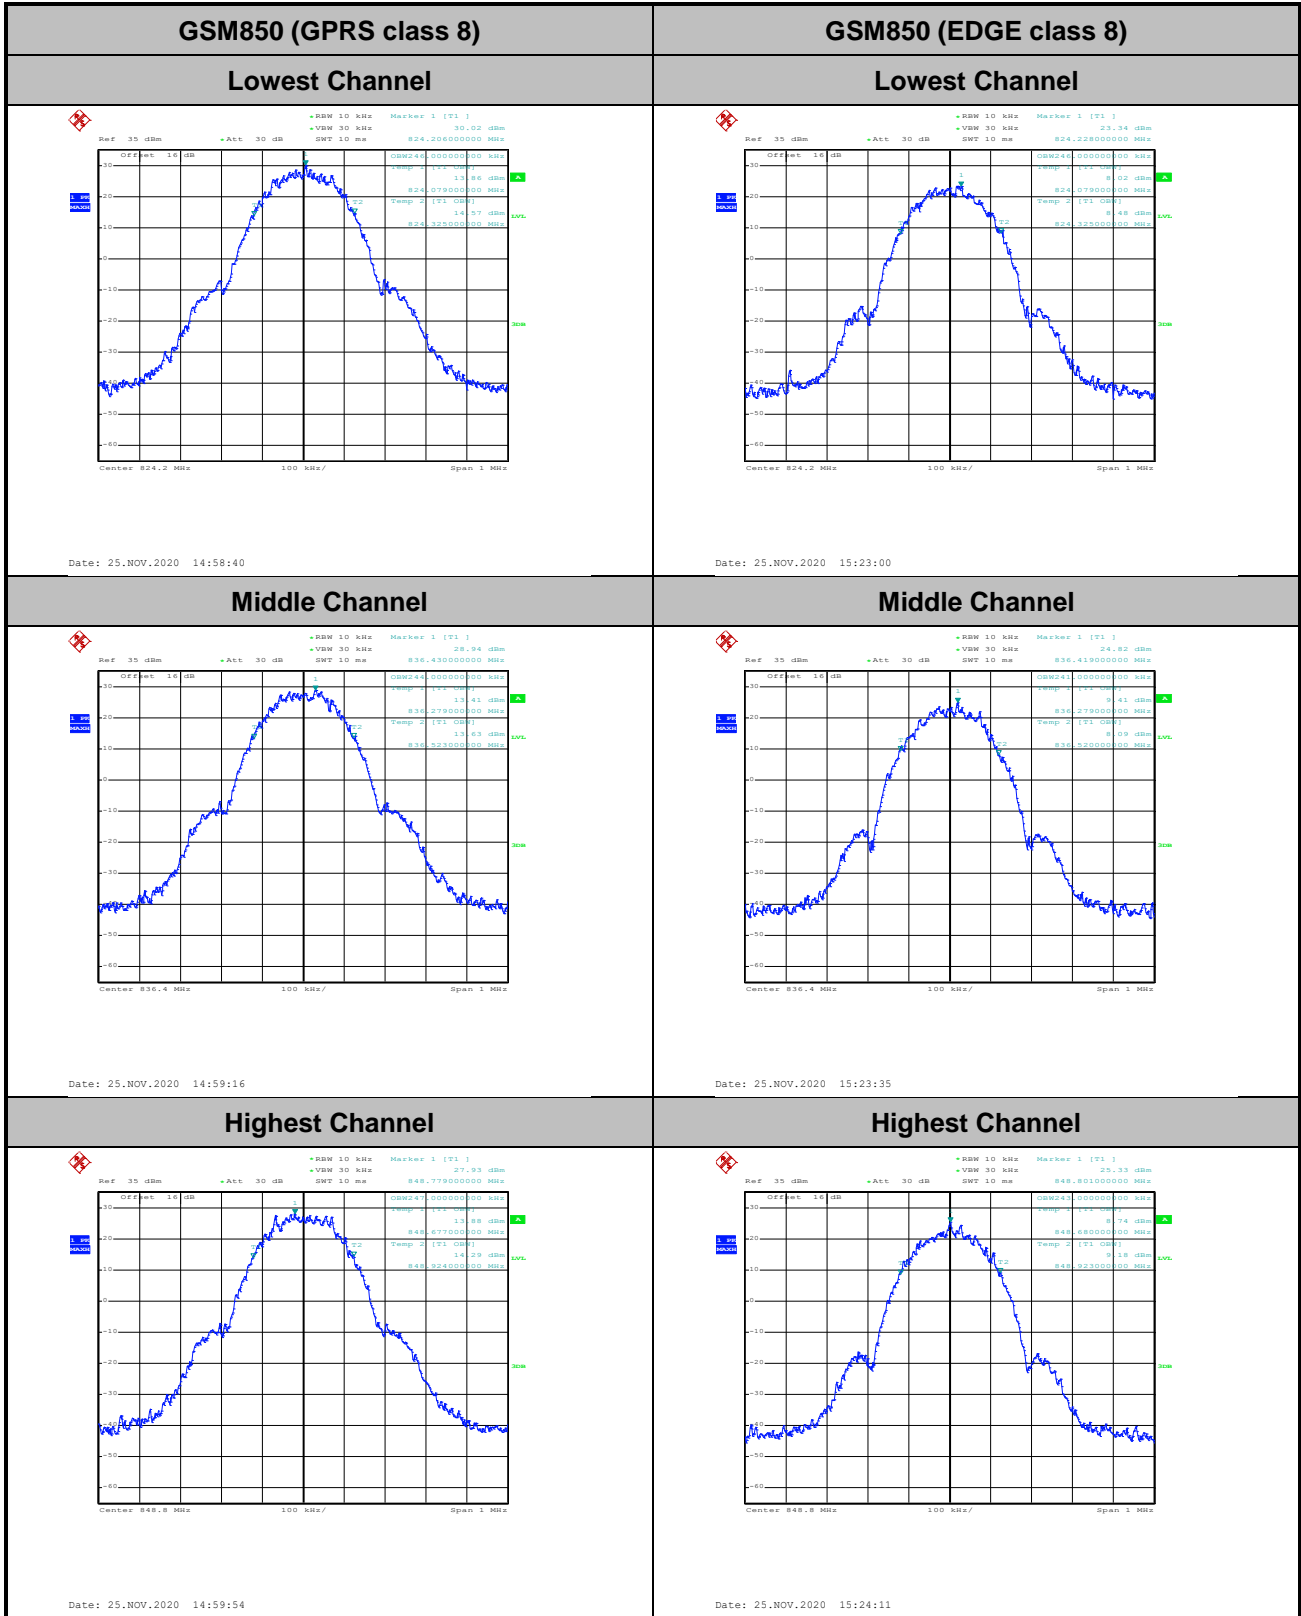

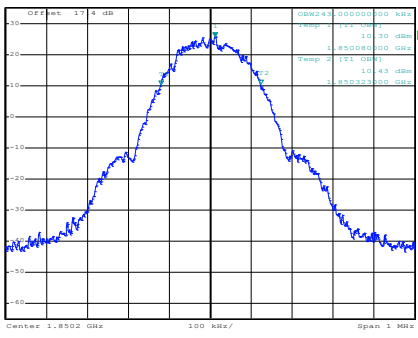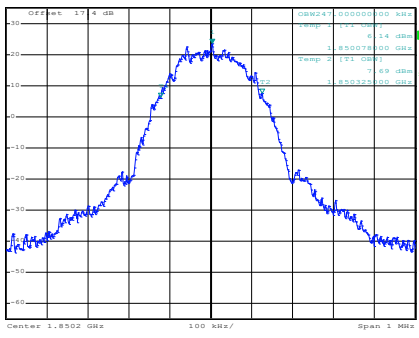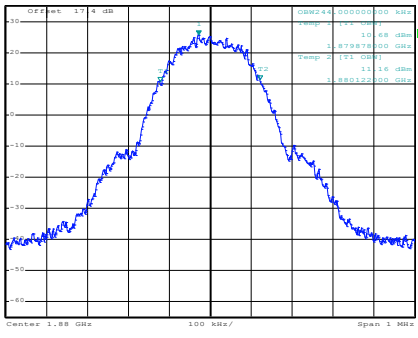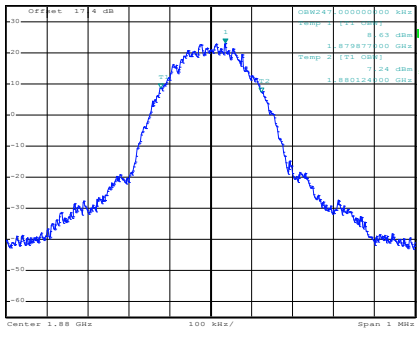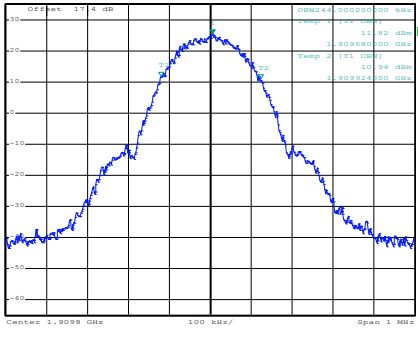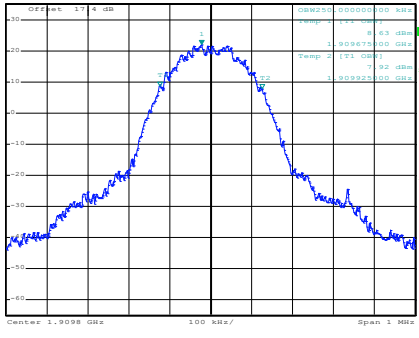


GSM1900 (GPRS class 8)	GSM1900 (EDGE class 8)
<p align="center">Lowest Channel</p>  <p>Date: 25.NOV.2020 13:54:13</p>	<p align="center">Lowest Channel</p>  <p>Date: 25.NOV.2020 14:36:46</p>
<p align="center">Middle Channel</p>  <p>Date: 25.NOV.2020 13:54:48</p>	<p align="center">Middle Channel</p>  <p>Date: 25.NOV.2020 14:37:22</p>
<p align="center">Highest Channel</p>  <p>Date: 25.NOV.2020 13:55:27</p>	<p align="center">Highest Channel</p>  <p>Date: 25.NOV.2020 14:37:58</p>




Conducted Band Edge

GSM850 (GPRS class 8)

Lowest Band Edge

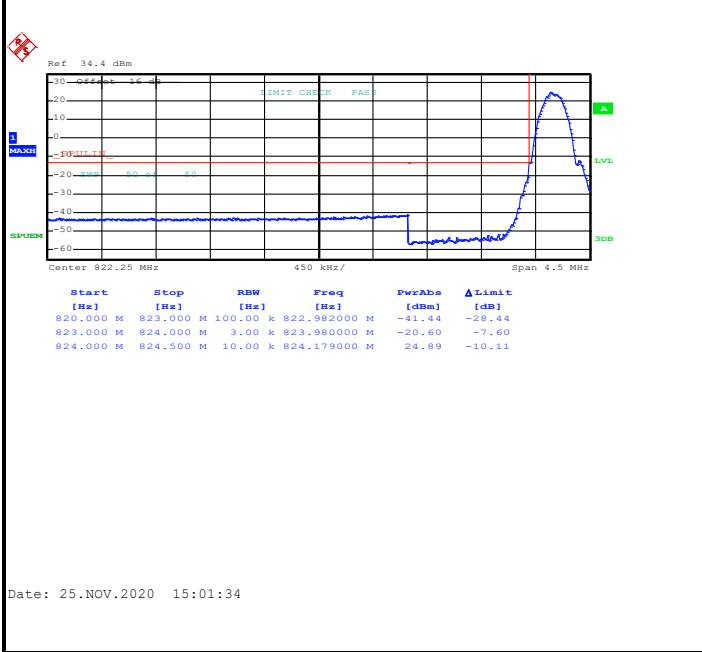


Highest Band Edge

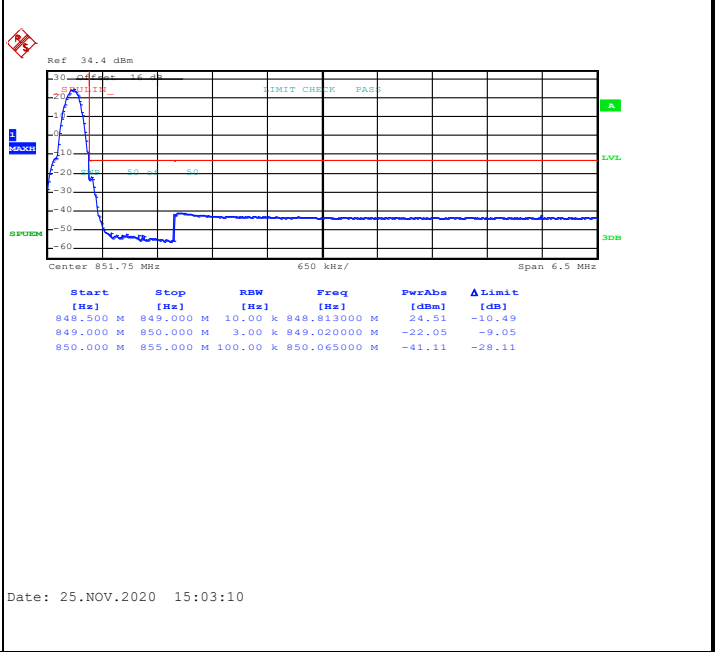


GSM850 (EDGE class 8)

Lowest Band Edge

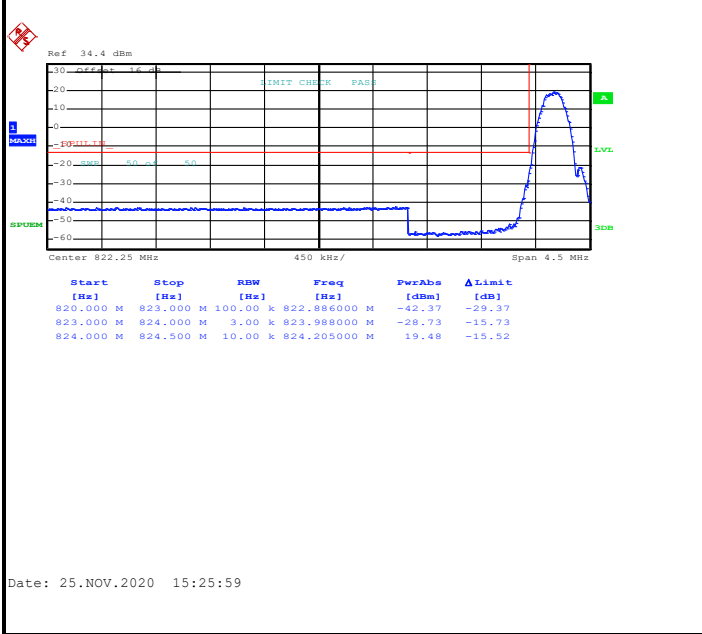

Highest Band Edge

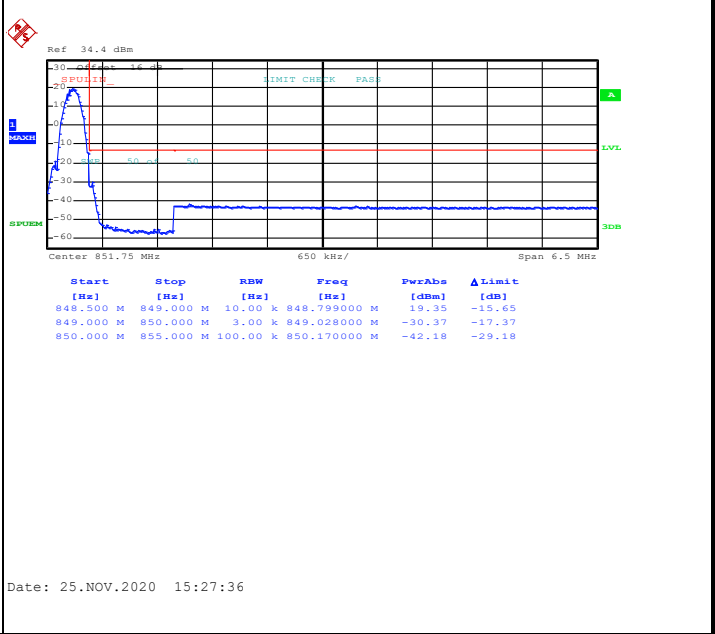





GSM1900 (GPRS class 8)

Lowest Band Edge

Highest Band Edge

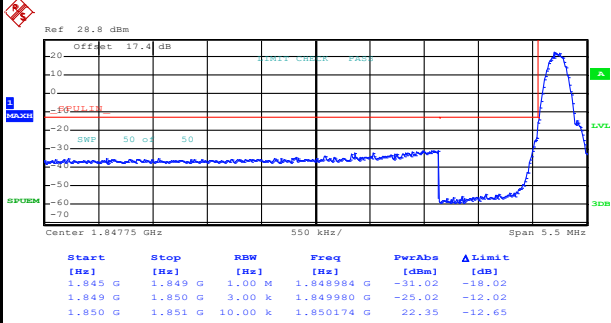

Date: 25.NOV.2020 13:57:11

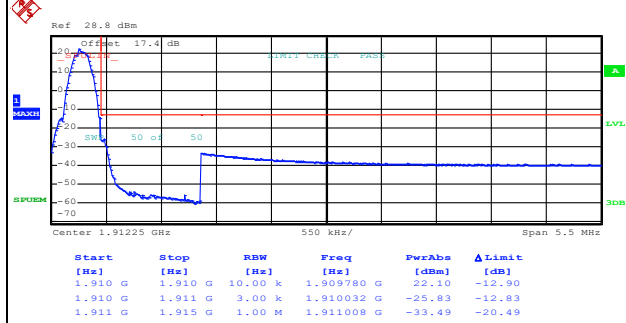


Date: 25.NOV.2020 13:58:46


GSM1900 (EDGE class 8)

Lowest Band Edge

Highest Band Edge

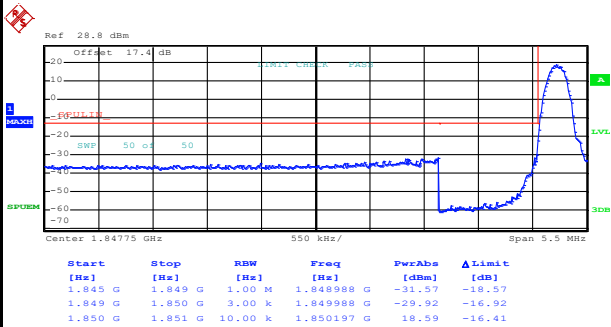







Date: 25.NOV.2020 14:42:48

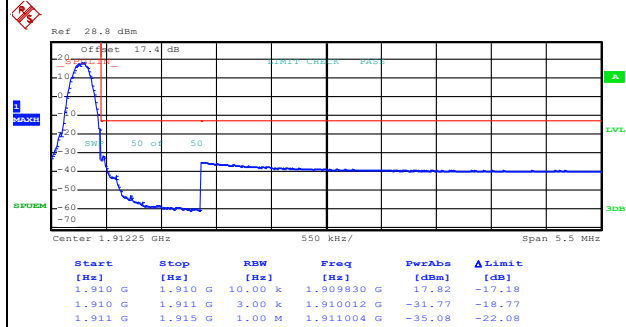







Date: 25.NOV.2020 14:44:23



Conducted Spurious Emission

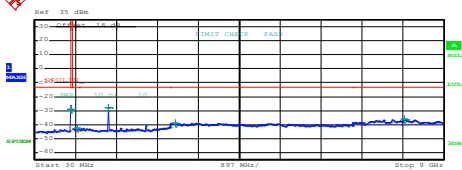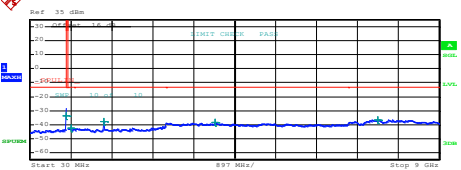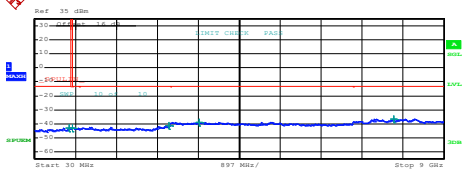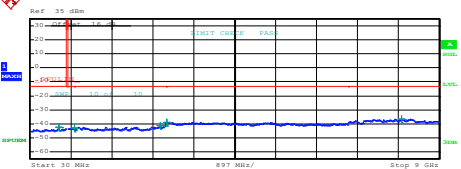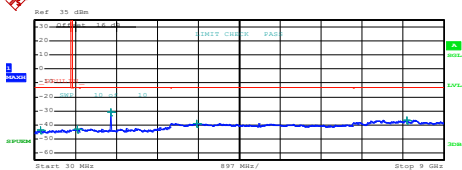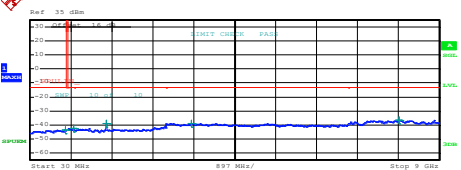GSM850 (GPRS class 8)	GSM850 (EDGE class 8)																																																																								
Lowest Channel	Lowest Channel																																																																								
 <table border="1" data-bbox="239 660 654 739"> <thead> <tr> <th>Start [Hz]</th> <th>Stop [Hz]</th> <th>RBW [Hz]</th> <th>Freq [Hz]</th> <th>PwrAbs [dBm]</th> <th>ΔLimit [dB]</th> </tr> </thead> <tbody> <tr><td>35.0000 M</td><td>820.0000 M</td><td>1.00 M</td><td>816.802500 M</td><td>-28.80</td><td>-25.80</td></tr> <tr><td>855.0000 M</td><td>1.0000 G</td><td>1.00 M</td><td>970.818758 M</td><td>-42.77</td><td>-29.77</td></tr> <tr><td>1.0000 G</td><td>3.0000 G</td><td>1.00 M</td><td>1.6485000 G</td><td>-27.72</td><td>-24.72</td></tr> <tr><td>3.0000 G</td><td>7.0000 G</td><td>1.00 M</td><td>3.1100000 G</td><td>-38.88</td><td>-25.88</td></tr> <tr><td>7.0000 G</td><td>9.0000 G</td><td>1.00 M</td><td>8.1385000 G</td><td>-36.32</td><td>-23.32</td></tr> </tbody> </table> <p>Date: 25.NOV.2020 14:55:43</p>	Start [Hz]	Stop [Hz]	RBW [Hz]	Freq [Hz]	PwrAbs [dBm]	ΔLimit [dB]	35.0000 M	820.0000 M	1.00 M	816.802500 M	-28.80	-25.80	855.0000 M	1.0000 G	1.00 M	970.818758 M	-42.77	-29.77	1.0000 G	3.0000 G	1.00 M	1.6485000 G	-27.72	-24.72	3.0000 G	7.0000 G	1.00 M	3.1100000 G	-38.88	-25.88	7.0000 G	9.0000 G	1.00 M	8.1385000 G	-36.32	-23.32	 <table border="1" data-bbox="893 660 1308 739"> <thead> <tr> <th>Start [Hz]</th> <th>Stop [Hz]</th> <th>RBW [Hz]</th> <th>Freq [Hz]</th> <th>PwrAbs [dBm]</th> <th>ΔLimit [dB]</th> </tr> </thead> <tbody> <tr><td>35.0000 M</td><td>820.0000 M</td><td>1.00 M</td><td>816.802500 M</td><td>-28.80</td><td>-25.80</td></tr> <tr><td>855.0000 M</td><td>1.0000 G</td><td>1.00 M</td><td>922.425005 M</td><td>-42.63</td><td>-29.63</td></tr> <tr><td>1.0000 G</td><td>3.0000 G</td><td>1.00 M</td><td>1.6485000 G</td><td>-27.90</td><td>-24.90</td></tr> <tr><td>3.0000 G</td><td>7.0000 G</td><td>1.00 M</td><td>4.0830000 G</td><td>-38.22</td><td>-25.22</td></tr> <tr><td>7.0000 G</td><td>9.0000 G</td><td>1.00 M</td><td>7.6495000 G</td><td>-36.43</td><td>-23.43</td></tr> </tbody> </table> <p>Date: 25.NOV.2020 15:20:14</p>	Start [Hz]	Stop [Hz]	RBW [Hz]	Freq [Hz]	PwrAbs [dBm]	ΔLimit [dB]	35.0000 M	820.0000 M	1.00 M	816.802500 M	-28.80	-25.80	855.0000 M	1.0000 G	1.00 M	922.425005 M	-42.63	-29.63	1.0000 G	3.0000 G	1.00 M	1.6485000 G	-27.90	-24.90	3.0000 G	7.0000 G	1.00 M	4.0830000 G	-38.22	-25.22	7.0000 G	9.0000 G	1.00 M	7.6495000 G	-36.43	-23.43
Start [Hz]	Stop [Hz]	RBW [Hz]	Freq [Hz]	PwrAbs [dBm]	ΔLimit [dB]																																																																				
35.0000 M	820.0000 M	1.00 M	816.802500 M	-28.80	-25.80																																																																				
855.0000 M	1.0000 G	1.00 M	970.818758 M	-42.77	-29.77																																																																				
1.0000 G	3.0000 G	1.00 M	1.6485000 G	-27.72	-24.72																																																																				
3.0000 G	7.0000 G	1.00 M	3.1100000 G	-38.88	-25.88																																																																				
7.0000 G	9.0000 G	1.00 M	8.1385000 G	-36.32	-23.32																																																																				
Start [Hz]	Stop [Hz]	RBW [Hz]	Freq [Hz]	PwrAbs [dBm]	ΔLimit [dB]																																																																				
35.0000 M	820.0000 M	1.00 M	816.802500 M	-28.80	-25.80																																																																				
855.0000 M	1.0000 G	1.00 M	922.425005 M	-42.63	-29.63																																																																				
1.0000 G	3.0000 G	1.00 M	1.6485000 G	-27.90	-24.90																																																																				
3.0000 G	7.0000 G	1.00 M	4.0830000 G	-38.22	-25.22																																																																				
7.0000 G	9.0000 G	1.00 M	7.6495000 G	-36.43	-23.43																																																																				
Middle Channel	Middle Channel																																																																								
 <table border="1" data-bbox="239 1180 654 1258"> <thead> <tr> <th>Start [Hz]</th> <th>Stop [Hz]</th> <th>RBW [Hz]</th> <th>Freq [Hz]</th> <th>PwrAbs [dBm]</th> <th>ΔLimit [dB]</th> </tr> </thead> <tbody> <tr><td>35.0000 M</td><td>820.0000 M</td><td>1.00 M</td><td>784.845000 M</td><td>-42.88</td><td>-29.88</td></tr> <tr><td>855.0000 M</td><td>1.0000 G</td><td>1.00 M</td><td>820.473200 M</td><td>-43.24</td><td>-30.24</td></tr> <tr><td>1.0000 G</td><td>3.0000 G</td><td>1.00 M</td><td>2.9765000 G</td><td>-41.15</td><td>-28.15</td></tr> <tr><td>3.0000 G</td><td>7.0000 G</td><td>1.00 M</td><td>3.6290000 G</td><td>-39.01</td><td>-26.01</td></tr> <tr><td>7.0000 G</td><td>9.0000 G</td><td>1.00 M</td><td>7.9000000 G</td><td>-36.44</td><td>-23.44</td></tr> </tbody> </table> <p>Date: 25.NOV.2020 14:56:38</p>	Start [Hz]	Stop [Hz]	RBW [Hz]	Freq [Hz]	PwrAbs [dBm]	ΔLimit [dB]	35.0000 M	820.0000 M	1.00 M	784.845000 M	-42.88	-29.88	855.0000 M	1.0000 G	1.00 M	820.473200 M	-43.24	-30.24	1.0000 G	3.0000 G	1.00 M	2.9765000 G	-41.15	-28.15	3.0000 G	7.0000 G	1.00 M	3.6290000 G	-39.01	-26.01	7.0000 G	9.0000 G	1.00 M	7.9000000 G	-36.44	-23.44	 <table border="1" data-bbox="893 1180 1308 1258"> <thead> <tr> <th>Start [Hz]</th> <th>Stop [Hz]</th> <th>RBW [Hz]</th> <th>Freq [Hz]</th> <th>PwrAbs [dBm]</th> <th>ΔLimit [dB]</th> </tr> </thead> <tbody> <tr><td>35.0000 M</td><td>820.0000 M</td><td>1.00 M</td><td>653.705000 M</td><td>-42.59</td><td>-29.59</td></tr> <tr><td>855.0000 M</td><td>1.0000 G</td><td>1.00 M</td><td>920.982510 M</td><td>-42.84</td><td>-29.84</td></tr> <tr><td>1.0000 G</td><td>3.0000 G</td><td>1.00 M</td><td>2.8735000 G</td><td>-41.34</td><td>-28.34</td></tr> <tr><td>3.0000 G</td><td>7.0000 G</td><td>1.00 M</td><td>3.0210000 G</td><td>-38.88</td><td>-25.88</td></tr> <tr><td>7.0000 G</td><td>9.0000 G</td><td>1.00 M</td><td>8.1320000 G</td><td>-36.50</td><td>-23.50</td></tr> </tbody> </table> <p>Date: 25.NOV.2020 15:21:08</p>	Start [Hz]	Stop [Hz]	RBW [Hz]	Freq [Hz]	PwrAbs [dBm]	ΔLimit [dB]	35.0000 M	820.0000 M	1.00 M	653.705000 M	-42.59	-29.59	855.0000 M	1.0000 G	1.00 M	920.982510 M	-42.84	-29.84	1.0000 G	3.0000 G	1.00 M	2.8735000 G	-41.34	-28.34	3.0000 G	7.0000 G	1.00 M	3.0210000 G	-38.88	-25.88	7.0000 G	9.0000 G	1.00 M	8.1320000 G	-36.50	-23.50
Start [Hz]	Stop [Hz]	RBW [Hz]	Freq [Hz]	PwrAbs [dBm]	ΔLimit [dB]																																																																				
35.0000 M	820.0000 M	1.00 M	784.845000 M	-42.88	-29.88																																																																				
855.0000 M	1.0000 G	1.00 M	820.473200 M	-43.24	-30.24																																																																				
1.0000 G	3.0000 G	1.00 M	2.9765000 G	-41.15	-28.15																																																																				
3.0000 G	7.0000 G	1.00 M	3.6290000 G	-39.01	-26.01																																																																				
7.0000 G	9.0000 G	1.00 M	7.9000000 G	-36.44	-23.44																																																																				
Start [Hz]	Stop [Hz]	RBW [Hz]	Freq [Hz]	PwrAbs [dBm]	ΔLimit [dB]																																																																				
35.0000 M	820.0000 M	1.00 M	653.705000 M	-42.59	-29.59																																																																				
855.0000 M	1.0000 G	1.00 M	920.982510 M	-42.84	-29.84																																																																				
1.0000 G	3.0000 G	1.00 M	2.8735000 G	-41.34	-28.34																																																																				
3.0000 G	7.0000 G	1.00 M	3.0210000 G	-38.88	-25.88																																																																				
7.0000 G	9.0000 G	1.00 M	8.1320000 G	-36.50	-23.50																																																																				
Highest Channel	Highest Channel																																																																								
 <table border="1" data-bbox="239 1700 654 1778"> <thead> <tr> <th>Start [Hz]</th> <th>Stop [Hz]</th> <th>RBW [Hz]</th> <th>Freq [Hz]</th> <th>PwrAbs [dBm]</th> <th>ΔLimit [dB]</th> </tr> </thead> <tbody> <tr><td>35.0000 M</td><td>820.0000 M</td><td>1.00 M</td><td>160.1305000 M</td><td>-43.47</td><td>-30.47</td></tr> <tr><td>855.0000 M</td><td>1.0000 G</td><td>1.00 M</td><td>969.187508 M</td><td>-43.26</td><td>-30.26</td></tr> <tr><td>1.0000 G</td><td>3.0000 G</td><td>1.00 M</td><td>1.6975000 G</td><td>-30.51</td><td>-27.51</td></tr> <tr><td>3.0000 G</td><td>7.0000 G</td><td>1.00 M</td><td>3.5910000 G</td><td>-38.78</td><td>-25.78</td></tr> <tr><td>7.0000 G</td><td>9.0000 G</td><td>1.00 M</td><td>8.1935000 G</td><td>-36.64</td><td>-23.64</td></tr> </tbody> </table> <p>Date: 25.NOV.2020 14:57:32</p>	Start [Hz]	Stop [Hz]	RBW [Hz]	Freq [Hz]	PwrAbs [dBm]	ΔLimit [dB]	35.0000 M	820.0000 M	1.00 M	160.1305000 M	-43.47	-30.47	855.0000 M	1.0000 G	1.00 M	969.187508 M	-43.26	-30.26	1.0000 G	3.0000 G	1.00 M	1.6975000 G	-30.51	-27.51	3.0000 G	7.0000 G	1.00 M	3.5910000 G	-38.78	-25.78	7.0000 G	9.0000 G	1.00 M	8.1935000 G	-36.64	-23.64	 <table border="1" data-bbox="893 1700 1308 1778"> <thead> <tr> <th>Start [Hz]</th> <th>Stop [Hz]</th> <th>RBW [Hz]</th> <th>Freq [Hz]</th> <th>PwrAbs [dBm]</th> <th>ΔLimit [dB]</th> </tr> </thead> <tbody> <tr><td>35.0000 M</td><td>820.0000 M</td><td>1.00 M</td><td>795.005000 M</td><td>-43.78</td><td>-30.78</td></tr> <tr><td>855.0000 M</td><td>1.0000 G</td><td>1.00 M</td><td>975.893758 M</td><td>-42.30</td><td>-29.30</td></tr> <tr><td>1.0000 G</td><td>3.0000 G</td><td>1.00 M</td><td>1.6980000 G</td><td>-39.01</td><td>-26.01</td></tr> <tr><td>3.0000 G</td><td>7.0000 G</td><td>1.00 M</td><td>3.5650000 G</td><td>-38.84</td><td>-25.84</td></tr> <tr><td>7.0000 G</td><td>9.0000 G</td><td>1.00 M</td><td>8.1255000 G</td><td>-36.54</td><td>-23.54</td></tr> </tbody> </table> <p>Date: 25.NOV.2020 15:22:02</p>	Start [Hz]	Stop [Hz]	RBW [Hz]	Freq [Hz]	PwrAbs [dBm]	ΔLimit [dB]	35.0000 M	820.0000 M	1.00 M	795.005000 M	-43.78	-30.78	855.0000 M	1.0000 G	1.00 M	975.893758 M	-42.30	-29.30	1.0000 G	3.0000 G	1.00 M	1.6980000 G	-39.01	-26.01	3.0000 G	7.0000 G	1.00 M	3.5650000 G	-38.84	-25.84	7.0000 G	9.0000 G	1.00 M	8.1255000 G	-36.54	-23.54
Start [Hz]	Stop [Hz]	RBW [Hz]	Freq [Hz]	PwrAbs [dBm]	ΔLimit [dB]																																																																				
35.0000 M	820.0000 M	1.00 M	160.1305000 M	-43.47	-30.47																																																																				
855.0000 M	1.0000 G	1.00 M	969.187508 M	-43.26	-30.26																																																																				
1.0000 G	3.0000 G	1.00 M	1.6975000 G	-30.51	-27.51																																																																				
3.0000 G	7.0000 G	1.00 M	3.5910000 G	-38.78	-25.78																																																																				
7.0000 G	9.0000 G	1.00 M	8.1935000 G	-36.64	-23.64																																																																				
Start [Hz]	Stop [Hz]	RBW [Hz]	Freq [Hz]	PwrAbs [dBm]	ΔLimit [dB]																																																																				
35.0000 M	820.0000 M	1.00 M	795.005000 M	-43.78	-30.78																																																																				
855.0000 M	1.0000 G	1.00 M	975.893758 M	-42.30	-29.30																																																																				
1.0000 G	3.0000 G	1.00 M	1.6980000 G	-39.01	-26.01																																																																				
3.0000 G	7.0000 G	1.00 M	3.5650000 G	-38.84	-25.84																																																																				
7.0000 G	9.0000 G	1.00 M	8.1255000 G	-36.54	-23.54																																																																				

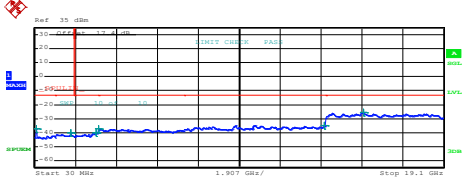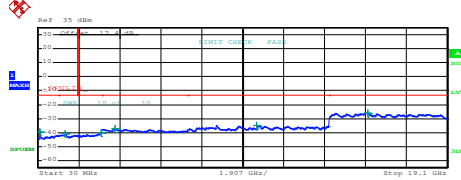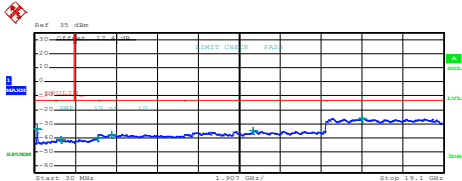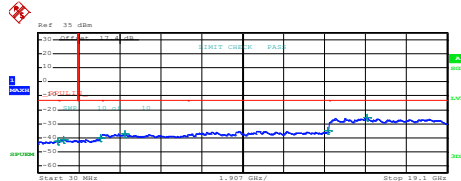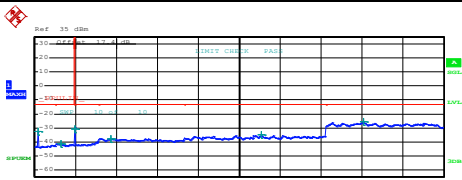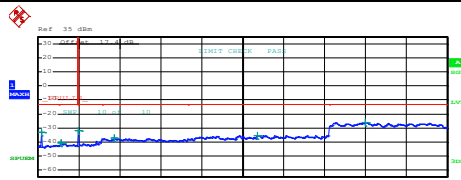

GSM1900 (GPRS class 8)	GSM1900 (EDGE class 8)																																																																																				
Lowest Channel	Lowest Channel																																																																																				
 <table border="1" data-bbox="239 571 638 672"> <thead> <tr> <th>Start [Hz]</th> <th>Stop [Hz]</th> <th>RBW [Hz]</th> <th>Freq [Hz]</th> <th>PwrAve [dBm]</th> <th>ΔLimit [dB]</th> </tr> </thead> <tbody> <tr><td>30.0000 M</td><td>1.0000 G</td><td>1.000 M</td><td>111.965000 M</td><td>-37.25</td><td>-24.25</td></tr> <tr><td>1.0000 G</td><td>1.845 G</td><td>1.000 M</td><td>1.097336 G</td><td>-40.24</td><td>-27.24</td></tr> <tr><td>1.845 G</td><td>3.0000 G</td><td>1.000 M</td><td>2.888816 G</td><td>-39.97</td><td>-26.97</td></tr> <tr><td>3.0000 G</td><td>7.0000 G</td><td>1.000 M</td><td>3.013000 G</td><td>-37.45</td><td>-24.45</td></tr> <tr><td>7.0000 G</td><td>13.6000 G</td><td>1.000 M</td><td>13.543075 G</td><td>-35.01</td><td>-22.01</td></tr> <tr><td>13.6000 G</td><td>19.1000 G</td><td>1.000 M</td><td>15.343500 G</td><td>-25.30</td><td>-12.30</td></tr> </tbody> </table> <p data-bbox="207 828 383 851">Date: 25.NOV.2020 13:51:38</p>	Start [Hz]	Stop [Hz]	RBW [Hz]	Freq [Hz]	PwrAve [dBm]	ΔLimit [dB]	30.0000 M	1.0000 G	1.000 M	111.965000 M	-37.25	-24.25	1.0000 G	1.845 G	1.000 M	1.097336 G	-40.24	-27.24	1.845 G	3.0000 G	1.000 M	2.888816 G	-39.97	-26.97	3.0000 G	7.0000 G	1.000 M	3.013000 G	-37.45	-24.45	7.0000 G	13.6000 G	1.000 M	13.543075 G	-35.01	-22.01	13.6000 G	19.1000 G	1.000 M	15.343500 G	-25.30	-12.30	 <table border="1" data-bbox="885 571 1284 672"> <thead> <tr> <th>Start [Hz]</th> <th>Stop [Hz]</th> <th>RBW [Hz]</th> <th>Freq [Hz]</th> <th>PwrAve [dBm]</th> <th>ΔLimit [dB]</th> </tr> </thead> <tbody> <tr><td>30.0000 M</td><td>1.0000 G</td><td>1.000 M</td><td>112.207800 M</td><td>-39.27</td><td>-26.27</td></tr> <tr><td>1.0000 G</td><td>1.845 G</td><td>1.000 M</td><td>1.305679 G</td><td>-40.58</td><td>-27.58</td></tr> <tr><td>1.845 G</td><td>3.0000 G</td><td>1.000 M</td><td>2.998770 G</td><td>-40.01</td><td>-27.01</td></tr> <tr><td>3.0000 G</td><td>7.0000 G</td><td>1.000 M</td><td>3.622000 G</td><td>-37.00</td><td>-24.00</td></tr> <tr><td>7.0000 G</td><td>13.6000 G</td><td>1.000 M</td><td>10.215025 G</td><td>-34.66</td><td>-21.66</td></tr> <tr><td>13.6000 G</td><td>19.1000 G</td><td>1.000 M</td><td>15.338463 G</td><td>-25.83</td><td>-12.83</td></tr> </tbody> </table> <p data-bbox="853 828 1029 851">Date: 25.NOV.2020 14:39:12</p>	Start [Hz]	Stop [Hz]	RBW [Hz]	Freq [Hz]	PwrAve [dBm]	ΔLimit [dB]	30.0000 M	1.0000 G	1.000 M	112.207800 M	-39.27	-26.27	1.0000 G	1.845 G	1.000 M	1.305679 G	-40.58	-27.58	1.845 G	3.0000 G	1.000 M	2.998770 G	-40.01	-27.01	3.0000 G	7.0000 G	1.000 M	3.622000 G	-37.00	-24.00	7.0000 G	13.6000 G	1.000 M	10.215025 G	-34.66	-21.66	13.6000 G	19.1000 G	1.000 M	15.338463 G	-25.83	-12.83
Start [Hz]	Stop [Hz]	RBW [Hz]	Freq [Hz]	PwrAve [dBm]	ΔLimit [dB]																																																																																
30.0000 M	1.0000 G	1.000 M	111.965000 M	-37.25	-24.25																																																																																
1.0000 G	1.845 G	1.000 M	1.097336 G	-40.24	-27.24																																																																																
1.845 G	3.0000 G	1.000 M	2.888816 G	-39.97	-26.97																																																																																
3.0000 G	7.0000 G	1.000 M	3.013000 G	-37.45	-24.45																																																																																
7.0000 G	13.6000 G	1.000 M	13.543075 G	-35.01	-22.01																																																																																
13.6000 G	19.1000 G	1.000 M	15.343500 G	-25.30	-12.30																																																																																
Start [Hz]	Stop [Hz]	RBW [Hz]	Freq [Hz]	PwrAve [dBm]	ΔLimit [dB]																																																																																
30.0000 M	1.0000 G	1.000 M	112.207800 M	-39.27	-26.27																																																																																
1.0000 G	1.845 G	1.000 M	1.305679 G	-40.58	-27.58																																																																																
1.845 G	3.0000 G	1.000 M	2.998770 G	-40.01	-27.01																																																																																
3.0000 G	7.0000 G	1.000 M	3.622000 G	-37.00	-24.00																																																																																
7.0000 G	13.6000 G	1.000 M	10.215025 G	-34.66	-21.66																																																																																
13.6000 G	19.1000 G	1.000 M	15.338463 G	-25.83	-12.83																																																																																
Middle Channel	Middle Channel																																																																																				
 <table border="1" data-bbox="239 1086 638 1187"> <thead> <tr> <th>Start [Hz]</th> <th>Stop [Hz]</th> <th>RBW [Hz]</th> <th>Freq [Hz]</th> <th>PwrAve [dBm]</th> <th>ΔLimit [dB]</th> </tr> </thead> <tbody> <tr><td>30.0000 M</td><td>1.0000 G</td><td>1.000 M</td><td>141.792500 M</td><td>-33.92</td><td>-20.92</td></tr> <tr><td>1.0000 G</td><td>3.845 G</td><td>1.000 M</td><td>1.238500 G</td><td>-41.13</td><td>-28.13</td></tr> <tr><td>1.915 G</td><td>3.0000 G</td><td>1.000 M</td><td>2.965009 G</td><td>-40.29</td><td>-27.29</td></tr> <tr><td>3.0000 G</td><td>7.0000 G</td><td>1.000 M</td><td>3.605000 G</td><td>-37.53</td><td>-24.53</td></tr> <tr><td>7.0000 G</td><td>13.6000 G</td><td>1.000 M</td><td>10.213950 G</td><td>-35.10</td><td>-22.10</td></tr> <tr><td>13.6000 G</td><td>19.1000 G</td><td>1.000 M</td><td>15.290563 G</td><td>-25.99</td><td>-12.99</td></tr> </tbody> </table> <p data-bbox="207 1344 383 1366">Date: 25.NOV.2020 13:52:31</p>	Start [Hz]	Stop [Hz]	RBW [Hz]	Freq [Hz]	PwrAve [dBm]	ΔLimit [dB]	30.0000 M	1.0000 G	1.000 M	141.792500 M	-33.92	-20.92	1.0000 G	3.845 G	1.000 M	1.238500 G	-41.13	-28.13	1.915 G	3.0000 G	1.000 M	2.965009 G	-40.29	-27.29	3.0000 G	7.0000 G	1.000 M	3.605000 G	-37.53	-24.53	7.0000 G	13.6000 G	1.000 M	10.213950 G	-35.10	-22.10	13.6000 G	19.1000 G	1.000 M	15.290563 G	-25.99	-12.99	 <table border="1" data-bbox="885 1086 1284 1187"> <thead> <tr> <th>Start [Hz]</th> <th>Stop [Hz]</th> <th>RBW [Hz]</th> <th>Freq [Hz]</th> <th>PwrAve [dBm]</th> <th>ΔLimit [dB]</th> </tr> </thead> <tbody> <tr><td>30.0000 M</td><td>1.0000 G</td><td>1.000 M</td><td>951.505000 M</td><td>-42.29</td><td>-29.29</td></tr> <tr><td>1.0000 G</td><td>3.845 G</td><td>1.000 M</td><td>1.622909 G</td><td>-41.22</td><td>-28.22</td></tr> <tr><td>1.915 G</td><td>3.0000 G</td><td>1.000 M</td><td>2.945208 G</td><td>-40.22</td><td>-27.22</td></tr> <tr><td>3.0000 G</td><td>7.0000 G</td><td>1.000 M</td><td>4.090000 G</td><td>-37.25</td><td>-24.25</td></tr> <tr><td>7.0000 G</td><td>13.6000 G</td><td>1.000 M</td><td>13.539775 G</td><td>-35.15</td><td>-22.15</td></tr> <tr><td>13.6000 G</td><td>19.1000 G</td><td>1.000 M</td><td>15.336675 G</td><td>-25.85</td><td>-12.85</td></tr> </tbody> </table> <p data-bbox="853 1344 1029 1366">Date: 25.NOV.2020 14:40:05</p>	Start [Hz]	Stop [Hz]	RBW [Hz]	Freq [Hz]	PwrAve [dBm]	ΔLimit [dB]	30.0000 M	1.0000 G	1.000 M	951.505000 M	-42.29	-29.29	1.0000 G	3.845 G	1.000 M	1.622909 G	-41.22	-28.22	1.915 G	3.0000 G	1.000 M	2.945208 G	-40.22	-27.22	3.0000 G	7.0000 G	1.000 M	4.090000 G	-37.25	-24.25	7.0000 G	13.6000 G	1.000 M	13.539775 G	-35.15	-22.15	13.6000 G	19.1000 G	1.000 M	15.336675 G	-25.85	-12.85
Start [Hz]	Stop [Hz]	RBW [Hz]	Freq [Hz]	PwrAve [dBm]	ΔLimit [dB]																																																																																
30.0000 M	1.0000 G	1.000 M	141.792500 M	-33.92	-20.92																																																																																
1.0000 G	3.845 G	1.000 M	1.238500 G	-41.13	-28.13																																																																																
1.915 G	3.0000 G	1.000 M	2.965009 G	-40.29	-27.29																																																																																
3.0000 G	7.0000 G	1.000 M	3.605000 G	-37.53	-24.53																																																																																
7.0000 G	13.6000 G	1.000 M	10.213950 G	-35.10	-22.10																																																																																
13.6000 G	19.1000 G	1.000 M	15.290563 G	-25.99	-12.99																																																																																
Start [Hz]	Stop [Hz]	RBW [Hz]	Freq [Hz]	PwrAve [dBm]	ΔLimit [dB]																																																																																
30.0000 M	1.0000 G	1.000 M	951.505000 M	-42.29	-29.29																																																																																
1.0000 G	3.845 G	1.000 M	1.622909 G	-41.22	-28.22																																																																																
1.915 G	3.0000 G	1.000 M	2.945208 G	-40.22	-27.22																																																																																
3.0000 G	7.0000 G	1.000 M	4.090000 G	-37.25	-24.25																																																																																
7.0000 G	13.6000 G	1.000 M	13.539775 G	-35.15	-22.15																																																																																
13.6000 G	19.1000 G	1.000 M	15.336675 G	-25.85	-12.85																																																																																
Highest Channel	Highest Channel																																																																																				
 <table border="1" data-bbox="239 1601 638 1702"> <thead> <tr> <th>Start [Hz]</th> <th>Stop [Hz]</th> <th>RBW [Hz]</th> <th>Freq [Hz]</th> <th>PwrAve [dBm]</th> <th>ΔLimit [dB]</th> </tr> </thead> <tbody> <tr><td>30.0000 M</td><td>1.0000 G</td><td>1.000 M</td><td>171.620000 M</td><td>-32.66</td><td>-19.66</td></tr> <tr><td>1.0000 G</td><td>1.845 G</td><td>1.000 M</td><td>1.233431 G</td><td>-41.30</td><td>-28.30</td></tr> <tr><td>1.845 G</td><td>3.0000 G</td><td>1.000 M</td><td>1.932771 G</td><td>-30.98</td><td>-17.98</td></tr> <tr><td>3.0000 G</td><td>7.0000 G</td><td>1.000 M</td><td>3.580000 G</td><td>-37.71</td><td>-24.71</td></tr> <tr><td>7.0000 G</td><td>13.6000 G</td><td>1.000 M</td><td>10.591225 G</td><td>-35.13</td><td>-22.13</td></tr> <tr><td>13.6000 G</td><td>19.1000 G</td><td>1.000 M</td><td>15.343000 G</td><td>-25.76</td><td>-12.76</td></tr> </tbody> </table> <p data-bbox="207 1859 383 1881">Date: 25.NOV.2020 13:53:29</p>	Start [Hz]	Stop [Hz]	RBW [Hz]	Freq [Hz]	PwrAve [dBm]	ΔLimit [dB]	30.0000 M	1.0000 G	1.000 M	171.620000 M	-32.66	-19.66	1.0000 G	1.845 G	1.000 M	1.233431 G	-41.30	-28.30	1.845 G	3.0000 G	1.000 M	1.932771 G	-30.98	-17.98	3.0000 G	7.0000 G	1.000 M	3.580000 G	-37.71	-24.71	7.0000 G	13.6000 G	1.000 M	10.591225 G	-35.13	-22.13	13.6000 G	19.1000 G	1.000 M	15.343000 G	-25.76	-12.76	 <table border="1" data-bbox="885 1601 1284 1702"> <thead> <tr> <th>Start [Hz]</th> <th>Stop [Hz]</th> <th>RBW [Hz]</th> <th>Freq [Hz]</th> <th>PwrAve [dBm]</th> <th>ΔLimit [dB]</th> </tr> </thead> <tbody> <tr><td>30.0000 M</td><td>1.0000 G</td><td>1.000 M</td><td>171.620000 M</td><td>-31.15</td><td>-18.15</td></tr> <tr><td>1.0000 G</td><td>1.845 G</td><td>1.000 M</td><td>1.109950 G</td><td>-40.89</td><td>-27.89</td></tr> <tr><td>1.845 G</td><td>3.0000 G</td><td>1.000 M</td><td>1.932571 G</td><td>-31.79</td><td>-18.79</td></tr> <tr><td>3.0000 G</td><td>7.0000 G</td><td>1.000 M</td><td>3.578000 G</td><td>-37.47</td><td>-24.47</td></tr> <tr><td>7.0000 G</td><td>13.6000 G</td><td>1.000 M</td><td>10.262875 G</td><td>-35.34</td><td>-22.34</td></tr> <tr><td>13.6000 G</td><td>19.1000 G</td><td>1.000 M</td><td>15.301362 G</td><td>-25.30</td><td>-12.30</td></tr> </tbody> </table> <p data-bbox="853 1859 1029 1881">Date: 25.NOV.2020 14:40:58</p>	Start [Hz]	Stop [Hz]	RBW [Hz]	Freq [Hz]	PwrAve [dBm]	ΔLimit [dB]	30.0000 M	1.0000 G	1.000 M	171.620000 M	-31.15	-18.15	1.0000 G	1.845 G	1.000 M	1.109950 G	-40.89	-27.89	1.845 G	3.0000 G	1.000 M	1.932571 G	-31.79	-18.79	3.0000 G	7.0000 G	1.000 M	3.578000 G	-37.47	-24.47	7.0000 G	13.6000 G	1.000 M	10.262875 G	-35.34	-22.34	13.6000 G	19.1000 G	1.000 M	15.301362 G	-25.30	-12.30
Start [Hz]	Stop [Hz]	RBW [Hz]	Freq [Hz]	PwrAve [dBm]	ΔLimit [dB]																																																																																
30.0000 M	1.0000 G	1.000 M	171.620000 M	-32.66	-19.66																																																																																
1.0000 G	1.845 G	1.000 M	1.233431 G	-41.30	-28.30																																																																																
1.845 G	3.0000 G	1.000 M	1.932771 G	-30.98	-17.98																																																																																
3.0000 G	7.0000 G	1.000 M	3.580000 G	-37.71	-24.71																																																																																
7.0000 G	13.6000 G	1.000 M	10.591225 G	-35.13	-22.13																																																																																
13.6000 G	19.1000 G	1.000 M	15.343000 G	-25.76	-12.76																																																																																
Start [Hz]	Stop [Hz]	RBW [Hz]	Freq [Hz]	PwrAve [dBm]	ΔLimit [dB]																																																																																
30.0000 M	1.0000 G	1.000 M	171.620000 M	-31.15	-18.15																																																																																
1.0000 G	1.845 G	1.000 M	1.109950 G	-40.89	-27.89																																																																																
1.845 G	3.0000 G	1.000 M	1.932571 G	-31.79	-18.79																																																																																
3.0000 G	7.0000 G	1.000 M	3.578000 G	-37.47	-24.47																																																																																
7.0000 G	13.6000 G	1.000 M	10.262875 G	-35.34	-22.34																																																																																
13.6000 G	19.1000 G	1.000 M	15.301362 G	-25.30	-12.30																																																																																



Frequency Stability

Test Conditions	Middle Channel	GSM850 (GPRS class 8)	GSM850 (EDGE class 8)	Limit 2.5ppm
Temperature (°C)	Voltage (Volt)	Deviation (ppm)		Result
50	Normal Voltage	0.0048	0.0024	PASS
40	Normal Voltage	0.0024	0.0000	
30	Normal Voltage	0.0024	0.0012	
20(Ref.)	Normal Voltage	0.0000	0.0000	
10	Normal Voltage	0.0108	0.0000	
0	Normal Voltage	0.0179	0.0012	
-10	Normal Voltage	0.0155	0.0024	
-20	Normal Voltage	0.0120	0.0012	
-30	Normal Voltage	0.0048	0.0096	
20	Maximum Voltage	0.0084	0.0024	
20	Normal Voltage	0.0000	0.0000	
20	Battery End Point	0.0287	0.0060	



Test Conditions	Middle Channel	GSM1900 (GPRS class 8)	GSM1900 (EDGE class 8)	Limit Note 2.
Temperature (°C)	Voltage (Volt)	Deviation (ppm)		Result
50	Normal Voltage	0.0335	0.0043	PASS
40	Normal Voltage	0.0229	0.0005	
30	Normal Voltage	0.0027	0.0000	
20(Ref.)	Normal Voltage	0.0000	0.0000	
10	Normal Voltage	0.0005	0.0138	
0	Normal Voltage	0.0059	0.0186	
-10	Normal Voltage	0.0080	0.0197	
-20	Normal Voltage	0.0101	0.0202	
-30	Normal Voltage	0.0117	0.0245	
20	Maximum Voltage	0.0335	0.0160	
20	Normal Voltage	0.0000	0.0000	
20	Battery End Point	0.0303	0.0011	

Note:

1. Normal Voltage = 3.7V. ; Battery End Point (BEP) = 3.2 V. ; Maximum Voltage =4.2 V
2. The frequency fundamental emissions stay within the authorized frequency block.









A3. WCDMA

Peak-to-Average Ratio

Mode	WCDMA Band V	WCDMA Band II	Limit: 13dB
Mod.	RMC 12.2Kbps	RMC 12.2Kbps	Result
Lowest CH	3.12	3.28	PASS
Middle CH	3.16	3.24	
Highest CH	3.20	3.20	

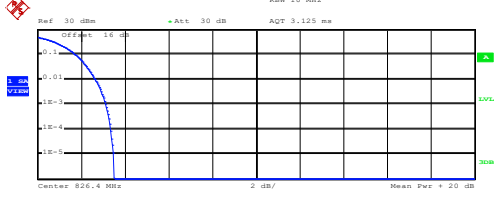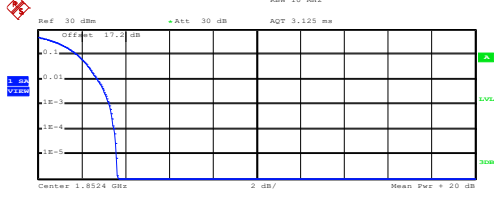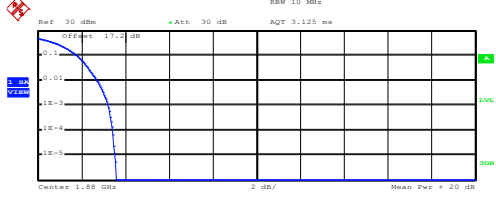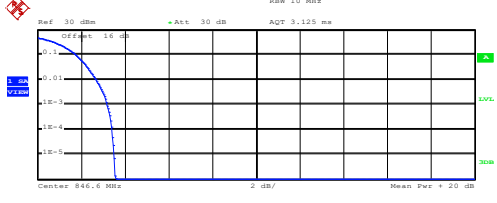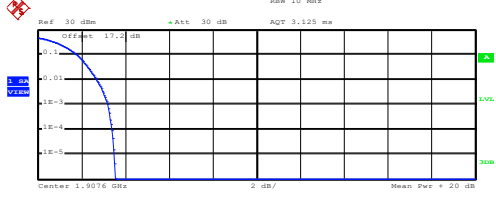

WCDMA Band V (RMC 12.2Kbps)	WCDMA Band II (RMC 12.2Kbps)
<p style="text-align: center;">Lowest Channel</p>  <p>Center 826.4 MHz 2 dB/ Mean Pwr + 20 dB</p> <p>Complementary Cumulative Distribution Function (100000 samples)</p> <p>Trace 1</p> <p>Mean 22.57 dBm Peak 26.09 dBm Crest 3.52 dB</p> <p>10 % 1.76 dB 1 % 2.64 dB .1 % 3.12 dB .01 % 3.36 dB</p> <p>Date: 25.NOV.2020 16:25:40</p>	<p style="text-align: center;">Lowest Channel</p>  <p>Center 1.8524 GHz 2 dB/ Mean Pwr + 20 dB</p> <p>Complementary Cumulative Distribution Function (100000 samples)</p> <p>Trace 1</p> <p>Mean 20.82 dBm Peak 24.46 dBm Crest 3.64 dB</p> <p>10 % 1.80 dB 1 % 2.72 dB .1 % 3.28 dB .01 % 3.48 dB</p> <p>Date: 25.NOV.2020 16:08:35</p>
<p style="text-align: center;">Middle Channel</p>  <p>Center 836.6 MHz 2 dB/ Mean Pwr + 20 dB</p> <p>Complementary Cumulative Distribution Function (100000 samples)</p> <p>Trace 1</p> <p>Mean 22.49 dBm Peak 26.02 dBm Crest 3.53 dB</p> <p>10 % 1.76 dB 1 % 2.68 dB .1 % 3.16 dB .01 % 3.32 dB</p> <p>Date: 25.NOV.2020 16:25:59</p>	<p style="text-align: center;">Middle Channel</p>  <p>Center 1.88 GHz 2 dB/ Mean Pwr + 20 dB</p> <p>Complementary Cumulative Distribution Function (100000 samples)</p> <p>Trace 1</p> <p>Mean 21.08 dBm Peak 24.67 dBm Crest 3.59 dB</p> <p>10 % 1.80 dB 1 % 2.72 dB .1 % 3.24 dB .01 % 3.44 dB</p> <p>Date: 25.NOV.2020 16:08:55</p>
<p style="text-align: center;">Highest Channel</p>  <p>Center 846.8 MHz 2 dB/ Mean Pwr + 20 dB</p> <p>Complementary Cumulative Distribution Function (100000 samples)</p> <p>Trace 1</p> <p>Mean 22.59 dBm Peak 26.16 dBm Crest 3.56 dB</p> <p>10 % 1.76 dB 1 % 2.68 dB .1 % 3.20 dB .01 % 3.40 dB</p> <p>Date: 25.NOV.2020 16:26:18</p>	<p style="text-align: center;">Highest Channel</p>  <p>Center 1.9076 GHz 2 dB/ Mean Pwr + 20 dB</p> <p>Complementary Cumulative Distribution Function (100000 samples)</p> <p>Trace 1</p> <p>Mean 20.58 dBm Peak 24.11 dBm Crest 3.53 dB</p> <p>10 % 1.80 dB 1 % 2.68 dB .1 % 3.20 dB .01 % 3.40 dB</p> <p>Date: 25.NOV.2020 16:09:16</p>



26dB Bandwidth

Mode	WCDMA Band V: 26dB BW (MHz)	WCDMA Band II: 26dB BW (MHz)
Mod.	RMC 12.2Kbps	RMC 12.2Kbps
Lowest CH	4.72	4.70
Middle CH	4.70	4.71
Highest CH	4.71	4.73





WCDMA Band V (RMC 12.2Kbps)

WCDMA Band II (RMC 12.2Kbps)

Lowest Channel

Lowest Channel

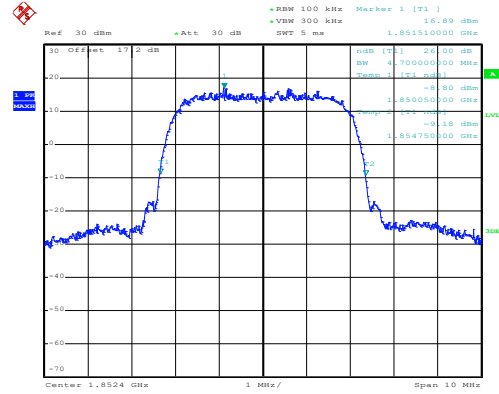
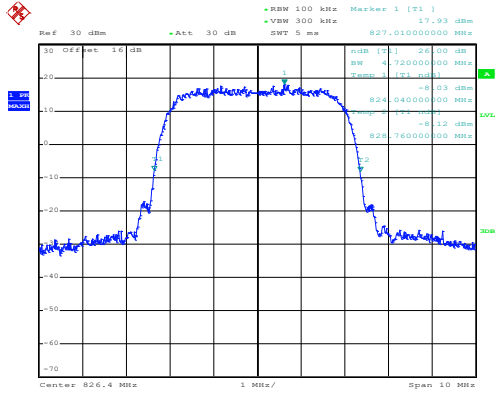


Date: 25.NOV.2020 16:12:54

Date: 25.NOV.2020 15:51:53

Middle Channel

Middle Channel

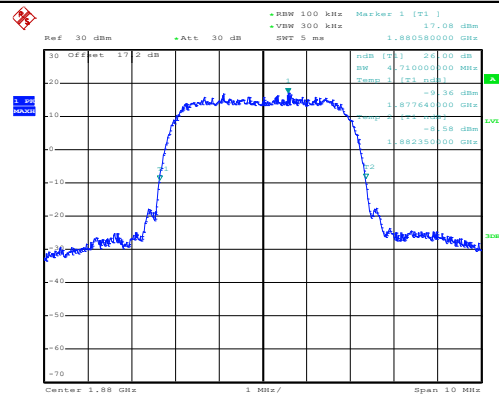
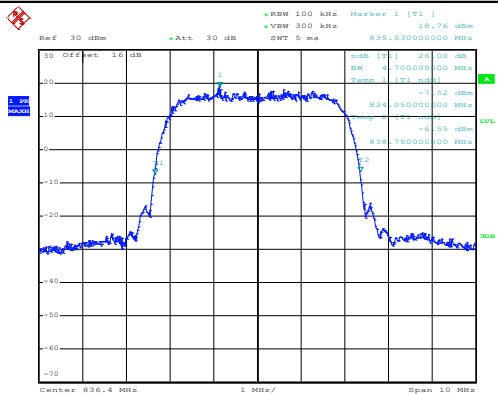


Date: 25.NOV.2020 16:13:33

Date: 25.NOV.2020 15:52:31

Highest Channel

Highest Channel

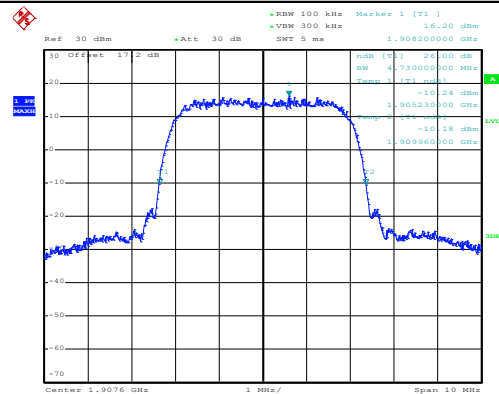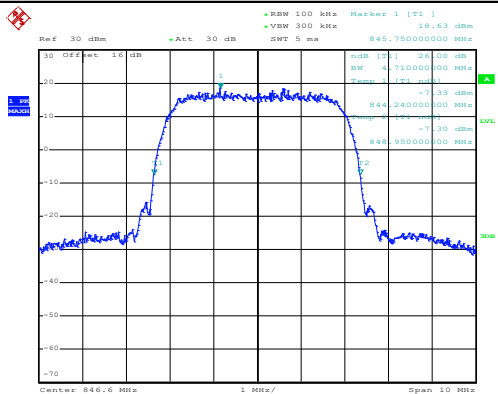

Date: 25.NOV.2020 16:14:11







Date: 25.NOV.2020 15:53:11



Occupied Bandwidth

Mode	WCDMA Band V: 99% OBW (MHz)	WCDMA Band II: 99% OBW (MHz)
Mod.	RMC 12.2Kbps	RMC 12.2Kbps
Lowest CH	4.14	4.14
Middle CH	4.15	4.14
Highest CH	4.15	4.15

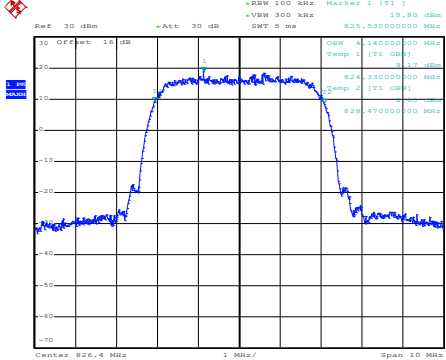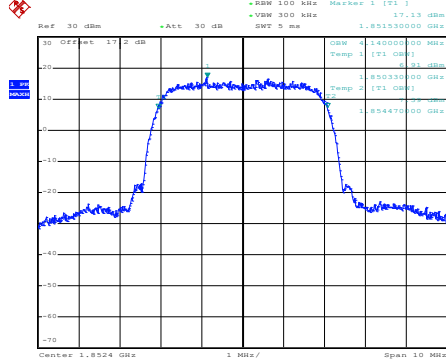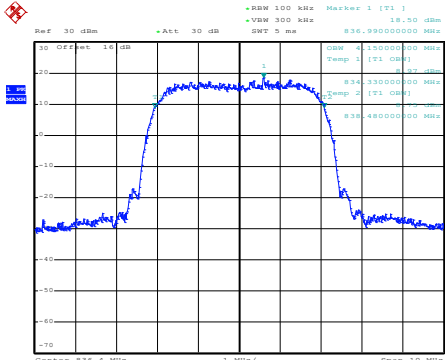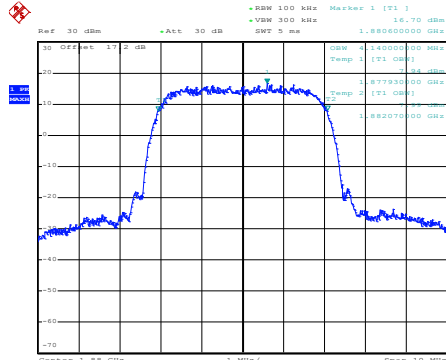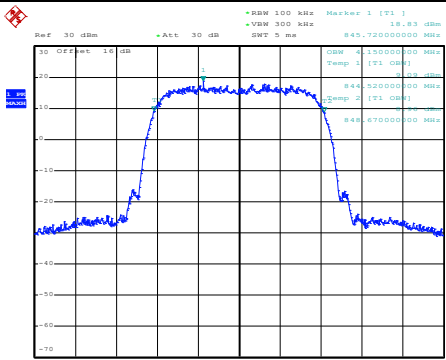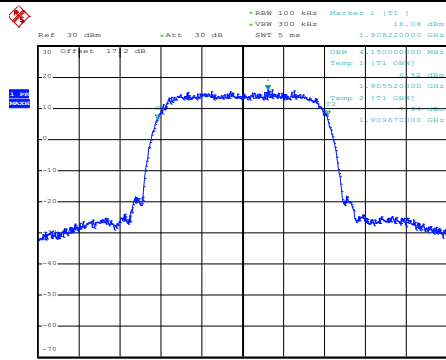


WCDMA Band V (RMC 12.2Kbps)	WCDMA Band II (RMC 12.2Kbps)
<p style="text-align: center;">Lowest Channel</p>  <p style="text-align: center;">Date: 25.NOV.2020 16:17:50</p>	<p style="text-align: center;">Lowest Channel</p>  <p style="text-align: center;">Date: 25.NOV.2020 15:59:54</p>
<p style="text-align: center;">Middle Channel</p>  <p style="text-align: center;">Date: 25.NOV.2020 16:18:28</p>	<p style="text-align: center;">Middle Channel</p>  <p style="text-align: center;">Date: 25.NOV.2020 16:00:39</p>
<p style="text-align: center;">Highest Channel</p>  <p style="text-align: center;">Date: 25.NOV.2020 16:19:05</p>	<p style="text-align: center;">Highest Channel</p>  <p style="text-align: center;">Date: 25.NOV.2020 16:01:26</p>



Conducted Band Edge


WCDMA Band V (RMC 12.2Kbps)

Lowest Band Edge

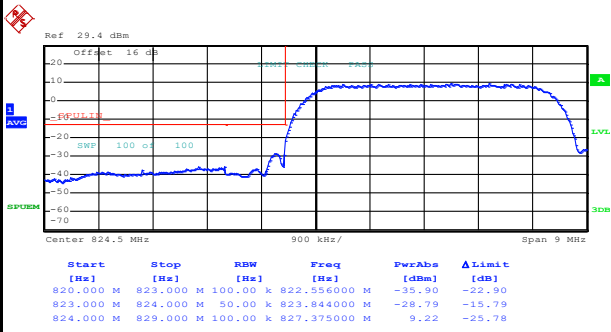

Date: 25.NOV.2020 16:22:05


Highest Band Edge

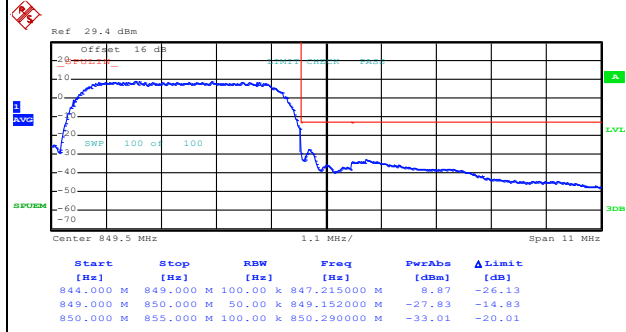

Date: 25.NOV.2020 16:25:01


WCDMA Band II (RMC 12.2Kbps)

Lowest Band Edge

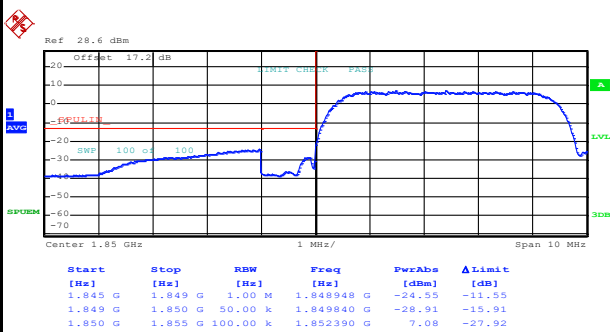

Date: 25.NOV.2020 16:04:29







Highest Band Edge

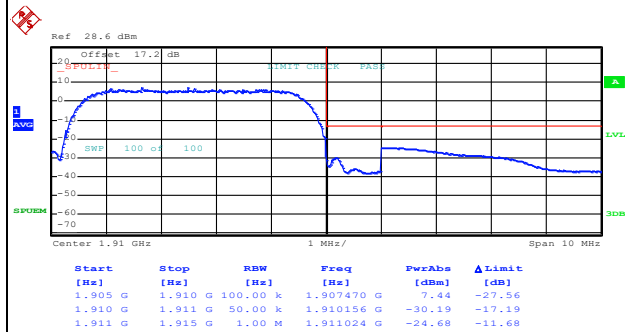

Date: 25.NOV.2020 16:08:10



Conducted Spurious Emission

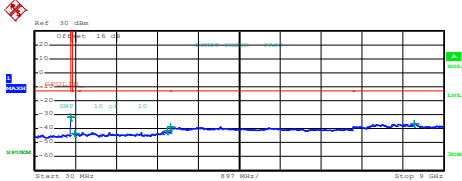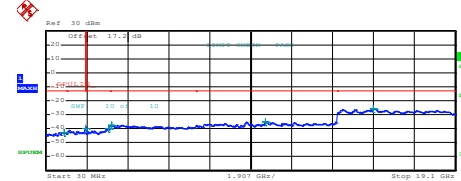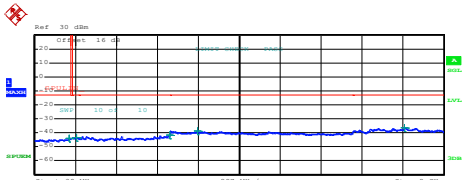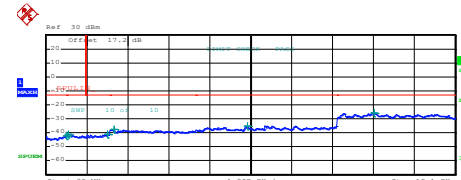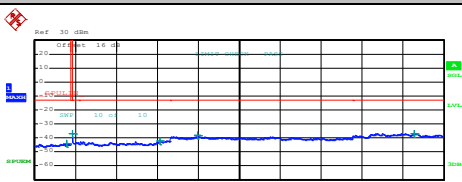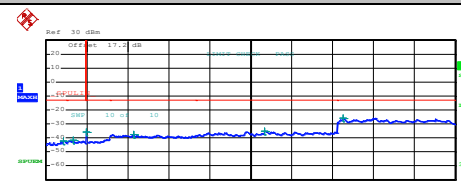WCDMA Band V (RMC 12.2Kbps)	WCDMA Band II (RMC 12.2Kbps)																																																																																										
Lowest Channel	Lowest Channel																																																																																										
 <table border="1" data-bbox="239 660 654 739"> <thead> <tr> <th>Start</th> <th>Stop</th> <th>RBW</th> <th>Freq</th> <th>PwrAbs</th> <th>ΔLimit</th> </tr> <tr> <th>[Hz]</th> <th>[Hz]</th> <th>[Hz]</th> <th>[Hz]</th> <th>[dBm]</th> <th>[dB]</th> </tr> </thead> <tbody> <tr> <td>35,000 M</td> <td>820,000 M</td> <td>1,000 M</td> <td>816,210000 M</td> <td>-31.73</td> <td>-28.73</td> </tr> <tr> <td>855,000 M</td> <td>1,000 G</td> <td>1,000 G</td> <td>908,577504 M</td> <td>-43.14</td> <td>-30.14</td> </tr> <tr> <td>1,000 G</td> <td>3,000 G</td> <td>1,000 M</td> <td>2,940500 G</td> <td>-42.84</td> <td>-28.84</td> </tr> <tr> <td>3,000 G</td> <td>7,000 G</td> <td>1,000 M</td> <td>3,016000 G</td> <td>-38.52</td> <td>-25.52</td> </tr> <tr> <td>7,000 G</td> <td>9,000 G</td> <td>1,000 M</td> <td>8,356500 G</td> <td>-36.30</td> <td>-23.30</td> </tr> </tbody> </table> <p data-bbox="207 907 383 929">Date: 25.NOV.2020 16:15:12</p>	Start	Stop	RBW	Freq	PwrAbs	ΔLimit	[Hz]	[Hz]	[Hz]	[Hz]	[dBm]	[dB]	35,000 M	820,000 M	1,000 M	816,210000 M	-31.73	-28.73	855,000 M	1,000 G	1,000 G	908,577504 M	-43.14	-30.14	1,000 G	3,000 G	1,000 M	2,940500 G	-42.84	-28.84	3,000 G	7,000 G	1,000 M	3,016000 G	-38.52	-25.52	7,000 G	9,000 G	1,000 M	8,356500 G	-36.30	-23.30	 <table border="1" data-bbox="877 660 1292 739"> <thead> <tr> <th>Start</th> <th>Stop</th> <th>RBW</th> <th>Freq</th> <th>PwrAbs</th> <th>ΔLimit</th> </tr> <tr> <th>[Hz]</th> <th>[Hz]</th> <th>[Hz]</th> <th>[Hz]</th> <th>[dBm]</th> <th>[dB]</th> </tr> </thead> <tbody> <tr> <td>35,000 M</td> <td>1,000 G</td> <td>1,000 M</td> <td>880,821500 M</td> <td>-42.67</td> <td>-29.67</td> </tr> <tr> <td>1,000 G</td> <td>1,845 G</td> <td>1,000 M</td> <td>1,843310 G</td> <td>-39.61</td> <td>-26.61</td> </tr> <tr> <td>1,845 G</td> <td>3,000 G</td> <td>1,000 M</td> <td>2,947306 G</td> <td>-39.69</td> <td>-26.69</td> </tr> <tr> <td>3,000 G</td> <td>7,000 G</td> <td>1,000 M</td> <td>3,084000 G</td> <td>-37.42</td> <td>-24.42</td> </tr> <tr> <td>7,000 G</td> <td>13,600 G</td> <td>1,000 M</td> <td>10,238950 G</td> <td>-34.97</td> <td>-21.97</td> </tr> <tr> <td>13,600 G</td> <td>19,100 G</td> <td>1,000 M</td> <td>15,303625 G</td> <td>-25.84</td> <td>-12.84</td> </tr> </tbody> </table> <p data-bbox="845 907 1021 929">Date: 25.NOV.2020 15:54:59</p>	Start	Stop	RBW	Freq	PwrAbs	ΔLimit	[Hz]	[Hz]	[Hz]	[Hz]	[dBm]	[dB]	35,000 M	1,000 G	1,000 M	880,821500 M	-42.67	-29.67	1,000 G	1,845 G	1,000 M	1,843310 G	-39.61	-26.61	1,845 G	3,000 G	1,000 M	2,947306 G	-39.69	-26.69	3,000 G	7,000 G	1,000 M	3,084000 G	-37.42	-24.42	7,000 G	13,600 G	1,000 M	10,238950 G	-34.97	-21.97	13,600 G	19,100 G	1,000 M	15,303625 G	-25.84	-12.84
Start	Stop	RBW	Freq	PwrAbs	ΔLimit																																																																																						
[Hz]	[Hz]	[Hz]	[Hz]	[dBm]	[dB]																																																																																						
35,000 M	820,000 M	1,000 M	816,210000 M	-31.73	-28.73																																																																																						
855,000 M	1,000 G	1,000 G	908,577504 M	-43.14	-30.14																																																																																						
1,000 G	3,000 G	1,000 M	2,940500 G	-42.84	-28.84																																																																																						
3,000 G	7,000 G	1,000 M	3,016000 G	-38.52	-25.52																																																																																						
7,000 G	9,000 G	1,000 M	8,356500 G	-36.30	-23.30																																																																																						
Start	Stop	RBW	Freq	PwrAbs	ΔLimit																																																																																						
[Hz]	[Hz]	[Hz]	[Hz]	[dBm]	[dB]																																																																																						
35,000 M	1,000 G	1,000 M	880,821500 M	-42.67	-29.67																																																																																						
1,000 G	1,845 G	1,000 M	1,843310 G	-39.61	-26.61																																																																																						
1,845 G	3,000 G	1,000 M	2,947306 G	-39.69	-26.69																																																																																						
3,000 G	7,000 G	1,000 M	3,084000 G	-37.42	-24.42																																																																																						
7,000 G	13,600 G	1,000 M	10,238950 G	-34.97	-21.97																																																																																						
13,600 G	19,100 G	1,000 M	15,303625 G	-25.84	-12.84																																																																																						
Middle Channel	Middle Channel																																																																																										
 <table border="1" data-bbox="239 1176 654 1254"> <thead> <tr> <th>Start</th> <th>Stop</th> <th>RBW</th> <th>Freq</th> <th>PwrAbs</th> <th>ΔLimit</th> </tr> <tr> <th>[Hz]</th> <th>[Hz]</th> <th>[Hz]</th> <th>[Hz]</th> <th>[dBm]</th> <th>[dB]</th> </tr> </thead> <tbody> <tr> <td>35,000 M</td> <td>820,000 M</td> <td>1,000 M</td> <td>787,412500 M</td> <td>-44.19</td> <td>-31.19</td> </tr> <tr> <td>855,000 M</td> <td>1,000 G</td> <td>1,000 M</td> <td>944,733006 M</td> <td>-43.62</td> <td>-30.62</td> </tr> <tr> <td>1,000 G</td> <td>3,000 G</td> <td>1,000 M</td> <td>2,991000 G</td> <td>-41.65</td> <td>-28.65</td> </tr> <tr> <td>3,000 G</td> <td>7,000 G</td> <td>1,000 M</td> <td>3,295000 G</td> <td>-38.68</td> <td>-25.68</td> </tr> <tr> <td>7,000 G</td> <td>9,000 G</td> <td>1,000 M</td> <td>8,148500 G</td> <td>-36.53</td> <td>-23.53</td> </tr> </tbody> </table> <p data-bbox="207 1422 383 1444">Date: 25.NOV.2020 16:16:09</p>	Start	Stop	RBW	Freq	PwrAbs	ΔLimit	[Hz]	[Hz]	[Hz]	[Hz]	[dBm]	[dB]	35,000 M	820,000 M	1,000 M	787,412500 M	-44.19	-31.19	855,000 M	1,000 G	1,000 M	944,733006 M	-43.62	-30.62	1,000 G	3,000 G	1,000 M	2,991000 G	-41.65	-28.65	3,000 G	7,000 G	1,000 M	3,295000 G	-38.68	-25.68	7,000 G	9,000 G	1,000 M	8,148500 G	-36.53	-23.53	 <table border="1" data-bbox="877 1176 1292 1254"> <thead> <tr> <th>Start</th> <th>Stop</th> <th>RBW</th> <th>Freq</th> <th>PwrAbs</th> <th>ΔLimit</th> </tr> <tr> <th>[Hz]</th> <th>[Hz]</th> <th>[Hz]</th> <th>[Hz]</th> <th>[dBm]</th> <th>[dB]</th> </tr> </thead> <tbody> <tr> <td>35,000 M</td> <td>1,000 G</td> <td>1,000 M</td> <td>993,695000 M</td> <td>-42.37</td> <td>-29.37</td> </tr> <tr> <td>1,000 G</td> <td>3,845 G</td> <td>1,000 M</td> <td>3,037671 G</td> <td>-41.26</td> <td>-28.26</td> </tr> <tr> <td>1,915 G</td> <td>3,000 G</td> <td>1,000 M</td> <td>2,906690 G</td> <td>-40.82</td> <td>-27.82</td> </tr> <tr> <td>3,000 G</td> <td>7,000 G</td> <td>1,000 M</td> <td>3,193000 G</td> <td>-37.59</td> <td>-24.59</td> </tr> <tr> <td>7,000 G</td> <td>13,600 G</td> <td>1,000 M</td> <td>8,462400 G</td> <td>-35.61</td> <td>-22.61</td> </tr> <tr> <td>13,600 G</td> <td>19,100 G</td> <td>1,000 M</td> <td>15,311875 G</td> <td>-25.99</td> <td>-12.99</td> </tr> </tbody> </table> <p data-bbox="845 1422 1021 1444">Date: 25.NOV.2020 15:55:56</p>	Start	Stop	RBW	Freq	PwrAbs	ΔLimit	[Hz]	[Hz]	[Hz]	[Hz]	[dBm]	[dB]	35,000 M	1,000 G	1,000 M	993,695000 M	-42.37	-29.37	1,000 G	3,845 G	1,000 M	3,037671 G	-41.26	-28.26	1,915 G	3,000 G	1,000 M	2,906690 G	-40.82	-27.82	3,000 G	7,000 G	1,000 M	3,193000 G	-37.59	-24.59	7,000 G	13,600 G	1,000 M	8,462400 G	-35.61	-22.61	13,600 G	19,100 G	1,000 M	15,311875 G	-25.99	-12.99
Start	Stop	RBW	Freq	PwrAbs	ΔLimit																																																																																						
[Hz]	[Hz]	[Hz]	[Hz]	[dBm]	[dB]																																																																																						
35,000 M	820,000 M	1,000 M	787,412500 M	-44.19	-31.19																																																																																						
855,000 M	1,000 G	1,000 M	944,733006 M	-43.62	-30.62																																																																																						
1,000 G	3,000 G	1,000 M	2,991000 G	-41.65	-28.65																																																																																						
3,000 G	7,000 G	1,000 M	3,295000 G	-38.68	-25.68																																																																																						
7,000 G	9,000 G	1,000 M	8,148500 G	-36.53	-23.53																																																																																						
Start	Stop	RBW	Freq	PwrAbs	ΔLimit																																																																																						
[Hz]	[Hz]	[Hz]	[Hz]	[dBm]	[dB]																																																																																						
35,000 M	1,000 G	1,000 M	993,695000 M	-42.37	-29.37																																																																																						
1,000 G	3,845 G	1,000 M	3,037671 G	-41.26	-28.26																																																																																						
1,915 G	3,000 G	1,000 M	2,906690 G	-40.82	-27.82																																																																																						
3,000 G	7,000 G	1,000 M	3,193000 G	-37.59	-24.59																																																																																						
7,000 G	13,600 G	1,000 M	8,462400 G	-35.61	-22.61																																																																																						
13,600 G	19,100 G	1,000 M	15,311875 G	-25.99	-12.99																																																																																						
Highest Channel	Highest Channel																																																																																										
 <table border="1" data-bbox="239 1691 654 1769"> <thead> <tr> <th>Start</th> <th>Stop</th> <th>RBW</th> <th>Freq</th> <th>PwrAbs</th> <th>ΔLimit</th> </tr> <tr> <th>[Hz]</th> <th>[Hz]</th> <th>[Hz]</th> <th>[Hz]</th> <th>[dBm]</th> <th>[dB]</th> </tr> </thead> <tbody> <tr> <td>35,000 M</td> <td>820,000 M</td> <td>1,000 M</td> <td>735,407500 M</td> <td>-43.82</td> <td>-30.82</td> </tr> <tr> <td>855,000 M</td> <td>1,000 G</td> <td>1,000 M</td> <td>855,072500 M</td> <td>-36.94</td> <td>-23.94</td> </tr> <tr> <td>1,000 G</td> <td>3,000 G</td> <td>1,000 M</td> <td>2,779500 G</td> <td>-42.97</td> <td>-28.97</td> </tr> <tr> <td>3,000 G</td> <td>7,000 G</td> <td>1,000 M</td> <td>3,604000 G</td> <td>-38.30</td> <td>-25.30</td> </tr> <tr> <td>7,000 G</td> <td>9,000 G</td> <td>1,000 M</td> <td>8,350500 G</td> <td>-36.77</td> <td>-23.77</td> </tr> </tbody> </table> <p data-bbox="207 1937 383 1960">Date: 25.NOV.2020 16:17:05</p>	Start	Stop	RBW	Freq	PwrAbs	ΔLimit	[Hz]	[Hz]	[Hz]	[Hz]	[dBm]	[dB]	35,000 M	820,000 M	1,000 M	735,407500 M	-43.82	-30.82	855,000 M	1,000 G	1,000 M	855,072500 M	-36.94	-23.94	1,000 G	3,000 G	1,000 M	2,779500 G	-42.97	-28.97	3,000 G	7,000 G	1,000 M	3,604000 G	-38.30	-25.30	7,000 G	9,000 G	1,000 M	8,350500 G	-36.77	-23.77	 <table border="1" data-bbox="877 1691 1292 1769"> <thead> <tr> <th>Start</th> <th>Stop</th> <th>RBW</th> <th>Freq</th> <th>PwrAbs</th> <th>ΔLimit</th> </tr> <tr> <th>[Hz]</th> <th>[Hz]</th> <th>[Hz]</th> <th>[Hz]</th> <th>[dBm]</th> <th>[dB]</th> </tr> </thead> <tbody> <tr> <td>35,000 M</td> <td>1,000 G</td> <td>1,000 M</td> <td>843,051500 M</td> <td>-42.28</td> <td>-29.28</td> </tr> <tr> <td>1,000 G</td> <td>1,845 G</td> <td>1,000 M</td> <td>1,276526 G</td> <td>-41.77</td> <td>-28.77</td> </tr> <tr> <td>1,845 G</td> <td>3,000 G</td> <td>1,000 M</td> <td>1,933542 G</td> <td>-35.60</td> <td>-22.60</td> </tr> <tr> <td>3,000 G</td> <td>7,000 G</td> <td>1,000 M</td> <td>4,092000 G</td> <td>-37.50</td> <td>-24.50</td> </tr> <tr> <td>7,000 G</td> <td>13,600 G</td> <td>1,000 M</td> <td>10,230700 G</td> <td>-35.25</td> <td>-22.25</td> </tr> <tr> <td>13,600 G</td> <td>19,100 G</td> <td>1,000 M</td> <td>13,889438 G</td> <td>-25.59</td> <td>-12.59</td> </tr> </tbody> </table> <p data-bbox="845 1937 1021 1960">Date: 25.NOV.2020 15:56:54</p>	Start	Stop	RBW	Freq	PwrAbs	ΔLimit	[Hz]	[Hz]	[Hz]	[Hz]	[dBm]	[dB]	35,000 M	1,000 G	1,000 M	843,051500 M	-42.28	-29.28	1,000 G	1,845 G	1,000 M	1,276526 G	-41.77	-28.77	1,845 G	3,000 G	1,000 M	1,933542 G	-35.60	-22.60	3,000 G	7,000 G	1,000 M	4,092000 G	-37.50	-24.50	7,000 G	13,600 G	1,000 M	10,230700 G	-35.25	-22.25	13,600 G	19,100 G	1,000 M	13,889438 G	-25.59	-12.59
Start	Stop	RBW	Freq	PwrAbs	ΔLimit																																																																																						
[Hz]	[Hz]	[Hz]	[Hz]	[dBm]	[dB]																																																																																						
35,000 M	820,000 M	1,000 M	735,407500 M	-43.82	-30.82																																																																																						
855,000 M	1,000 G	1,000 M	855,072500 M	-36.94	-23.94																																																																																						
1,000 G	3,000 G	1,000 M	2,779500 G	-42.97	-28.97																																																																																						
3,000 G	7,000 G	1,000 M	3,604000 G	-38.30	-25.30																																																																																						
7,000 G	9,000 G	1,000 M	8,350500 G	-36.77	-23.77																																																																																						
Start	Stop	RBW	Freq	PwrAbs	ΔLimit																																																																																						
[Hz]	[Hz]	[Hz]	[Hz]	[dBm]	[dB]																																																																																						
35,000 M	1,000 G	1,000 M	843,051500 M	-42.28	-29.28																																																																																						
1,000 G	1,845 G	1,000 M	1,276526 G	-41.77	-28.77																																																																																						
1,845 G	3,000 G	1,000 M	1,933542 G	-35.60	-22.60																																																																																						
3,000 G	7,000 G	1,000 M	4,092000 G	-37.50	-24.50																																																																																						
7,000 G	13,600 G	1,000 M	10,230700 G	-35.25	-22.25																																																																																						
13,600 G	19,100 G	1,000 M	13,889438 G	-25.59	-12.59																																																																																						



Frequency Stability

Test Conditions	Middle Channel	WCDMA Band V (RMC 12.2Kbps)	Limit 2.5ppm
Temperature (°C)	Voltage (Volt)	Deviation (ppm)	Result
50	Normal Voltage	0.0060	PASS
40	Normal Voltage	0.0012	
30	Normal Voltage	0.0012	
20(Ref.)	Normal Voltage	0.0000	
10	Normal Voltage	0.0072	
0	Normal Voltage	0.0108	
-10	Normal Voltage	0.0048	
-20	Normal Voltage	0.0060	
-30	Normal Voltage	0.0036	
20	Maximum Voltage	0.0096	
20	Normal Voltage	0.0000	
20	Battery End Point	0.0167	



Test Conditions	Middle Channel	WCDMA Band II (RMC 12.2Kbps)	Limit Note 2.
Temperature (°C)	Voltage (Volt)	Deviation (ppm)	Result
50	Normal Voltage	0.0064	PASS
40	Normal Voltage	0.0043	
30	Normal Voltage	0.0032	
20(Ref.)	Normal Voltage	0.0000	
10	Normal Voltage	0.0000	
0	Normal Voltage	0.0016	
-10	Normal Voltage	0.0037	
-20	Normal Voltage	0.0048	
-30	Normal Voltage	0.0069	
20	Maximum Voltage	0.0064	
20	Normal Voltage	0.0000	
20	Battery End Point	0.0048	

Note:

1. Normal Voltage = 3.7V. ; Battery End Point (BEP) = 3.2 V. ; Maximum Voltage =4.2 V
2. The frequency fundamental emissions stay within the authorized frequency block.



Appendix B. Test Results of ERP/EIRP and Radiated Test

ERP/EIRP

Channel	Mode	Conducted		ERP	
		Power (dBm)	Power (Watts)	ERP(dBm)	ERP(W)
Lowest	GSM850 GPRS class 8 (GT - LC = -2 dB)	32.82	1.9143	28.67	0.7362
Middle		32.81	1.9099	28.66	0.7345
Highest		32.64	1.8365	28.49	0.7063
Lowest	GSM850 EDGE class 8 (GT - LC = -2 dB)	27.02	0.5035	22.87	0.1936
Middle		27.08	0.5105	22.93	0.1963
Highest		26.97	0.4977	22.82	0.1914
Lowest	WCDMA Band V RMC 12.2Kbps (GT - LC = -2 dB)	23.45	0.2213	19.30	0.0851
Middle		23.09	0.2037	18.94	0.0783
Highest		23.23	0.2104	19.08	0.0809
Limit	ERP < 7W	Result		PASS	

Channel	Mode	Conducted		EIRP	
		Power (dBm)	Power (Watts)	EIRP(dBm)	EIRP(W)
Lowest	GSM1900 GPRS class 8 (GT - LC = -0.4 dB)	29.79	0.9528	29.39	0.8690
Middle		29.76	0.9462	29.36	0.8630
Highest		29.48	0.8872	29.08	0.8091
Lowest	GSM1900 EDGE class 8 (GT - LC = -0.4 dB)	26.20	0.4169	25.80	0.3802
Middle		26.17	0.4140	25.77	0.3776
Highest		26.05	0.4027	25.65	0.3673
Lowest	WCDMA Band II RMC 12.2Kbps (GT - LC = -0.4 dB)	21.75	0.1496	21.35	0.1365
Middle		21.61	0.1449	21.21	0.1321
Highest		21.20	0.1318	20.80	0.1202
Limit	EIRP < 2W	Result		PASS	



Radiated Spurious Emission

<For SKU 1>

GPRS850

GSM 850									
Channel	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
Lowest	1648	-43.62	-13	-30.62	-55.5	-45.38	0.98	4.89	H
	2472	-51.37	-13	-38.37	-68.58	-53.25	1.28	5.32	H
	3296	-52.95	-13	-39.95	-72.29	-56.36	1.54	7.10	H
	4120	-52.73	-13	-39.73	-73.43	-57.37	1.83	8.62	H
	4944	-56.20	-13	-43.20	-79.73	-61.33	2.30	9.59	H
	1648	-43.20	-13	-30.20	-55.55	-44.96	0.98	4.89	V
	2472	-47.78	-13	-34.78	-65.43	-49.66	1.28	5.32	V
	3296	-49.57	-13	-36.57	-69.24	-52.98	1.54	7.10	V
	4120	-53.89	-13	-40.89	-74.74	-58.53	1.83	8.62	V
	4944	-55.66	-13	-42.66	-79.01	-60.79	2.30	9.59	V
Middle	1672	-46.20	-13	-33.20	-58.38	-47.88	0.99	4.82	H
	2512	-48.87	-13	-35.87	-66.12	-50.84	1.29	5.41	H
	3344	-52.14	-13	-39.14	-71.75	-55.75	1.56	7.31	H
	4184	-50.86	-13	-37.86	-71.69	-55.48	1.87	8.64	H
	5016	-54.05	-13	-41.05	-77.66	-59.25	2.35	9.70	H
	1672	-46.06	-13	-33.06	-58.7	-47.74	0.99	4.82	V
	2512	-51.98	-13	-38.98	-69.69	-53.95	1.29	5.41	V
	3344	-49.46	-13	-36.46	-69.28	-53.07	1.56	7.31	V
	4184	-49.85	-13	-36.85	-70.82	-54.47	1.87	8.64	V
	5016	-52.66	-13	-39.66	-76.08	-57.86	2.35	9.70	V



Highest	1696	-40.35	-13	-27.35	-52.69	-41.95	1.00	4.75	H
	2544	-45.11	-13	-32.11	-62.33	-47.09	1.30	5.44	H
	3392	-54.03	-13	-41.03	-73.92	-57.83	1.57	7.52	H
	4248	-52.98	-13	-39.98	-74.01	-57.58	1.90	8.65	H
	5096	-56.44	-13	-43.44	-80.33	-61.6	2.39	9.70	H
	1696	-38.74	-13	-25.74	-51.52	-40.34	1.00	4.75	V
	2544	-48.46	-13	-35.46	-66.18	-50.44	1.30	5.44	V
	3392	-51.04	-13	-38.04	-71.02	-54.84	1.57	7.52	V
	4248	-49.62	-13	-36.62	-70.78	-54.22	1.90	8.65	V
	5096	-53.91	-13	-40.91	-77.63	-59.07	2.39	9.70	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.



GPRS1900

GPRS 1900									
Channel	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
Lowest	3702	-45.78	-13	-32.78	-66.57	-52.35	1.67	8.24	H
	5550	-39.66	-13	-26.66	-65.26	-46.73	2.65	9.72	H
	7398	-53.98	-13	-40.98	-81.06	-63.11	2.46	11.60	H
	3702	-46.25	-13	-33.25	-67.11	-52.82	1.67	8.24	V
	5550	-43.35	-13	-30.35	-68.83	-50.42	2.65	9.72	V
	7398	-54.06	-13	-41.06	-81.35	-63.19	2.46	11.60	V
Middle	3762	-45.84	-13	-32.84	-66.65	-52.47	1.69	8.31	H
	5640	-40.21	-13	-27.21	-65.89	-47.26	2.71	9.76	H
	7518	-54.05	-13	-41.05	-81.21	-63.44	2.42	11.81	H
	3762	-47.74	-13	-34.74	-68.54	-54.37	1.69	8.31	V
	5640	-43.23	-13	-30.23	-68.94	-50.28	2.71	9.76	V
	7518	-53.28	-13	-40.28	-80.67	-62.67	2.42	11.81	V
Highest	3822	-50.44	-13	-37.44	-71.23	-57.12	1.71	8.39	H
	5730	-39.94	-13	-26.94	-65.88	-46.97	2.76	9.79	H
	7638	-53.78	-13	-40.78	-81.29	-63.28	2.38	11.88	H
	3822	-49.14	-13	-36.14	-69.9	-55.82	1.71	8.39	V
	5730	-42.75	-13	-29.75	-68.76	-49.78	2.76	9.79	V
	7638	-53.48	-13	-40.48	-81.24	-62.98	2.38	11.88	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.



<For SKU 2>

GPRS850

GSM 850									
Channel	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
Lowest	1648	-40.74	-13	-27.74	-52.05	-42.5	0.98	4.89	H
	2472	-52.02	-13	-39.02	-69.16	-53.9	1.28	5.32	H
	3296	-37.29	-13	-24.29	-56.37	-40.7	1.54	7.10	H
	4120	-54.86	-13	-41.86	-74.83	-59.5	1.83	8.62	H
	4944	-51.77	-13	-38.77	-75.14	-56.9	2.30	9.59	H
	1648	-46.34	-13	-33.34	-58.01	-48.1	0.98	4.89	V
	2472	-50.72	-13	-37.72	-68.07	-52.6	1.28	5.32	V
	3296	-37.99	-13	-24.99	-57.41	-41.4	1.54	7.10	V
	4120	-57.26	-13	-44.26	-77.61	-61.9	1.83	8.62	V
	4944	-47.07	-13	-34.07	-69.76	-52.2	2.30	9.59	V
Middle	1672	-48.22	-13	-35.22	-50.1	-49.9	0.99	4.82	H
	2512	-56.13	-13	-43.13	-64.79	-58.1	1.29	5.41	H
	3344	-38.49	-13	-25.49	-57.64	-42.1	1.56	7.31	H
	4184	-51.98	-13	-38.98	-72.68	-56.6	1.87	8.64	H
	5016	-49.40	-13	-36.40	-72.61	-54.6	2.35	9.70	H
	1672	-47.52	-13	-34.52	-59.55	-49.2	0.99	4.82	V
	2512	-48.13	-13	-35.13	-65.2	-50.1	1.29	5.41	V
	3344	-36.99	-13	-23.99	-56.8	-40.6	1.56	7.31	V
	4184	-49.58	-13	-36.58	-70.26	-54.2	1.87	8.64	V
	5016	-47.60	-13	-34.60	-70.59	-52.8	2.35	9.70	V



Highest	1696	-39.20	-13	-26.20	-51.13	-40.8	1.00	4.75	H
	2544	-47.62	-13	-34.62	-64.41	-49.6	1.30	5.44	H
	3392	-41.20	-13	-28.20	-60.37	-45	1.57	7.52	H
	4248	-48.90	-13	-35.90	-69.91	-53.5	1.90	8.65	H
	5096	-50.04	-13	-37.04	-73.76	-55.2	2.39	9.70	H
	1696	-41.00	-13	-28.00	-53.52	-42.6	1.00	4.75	V
	2544	-45.22	-13	-32.22	-62.19	-47.2	1.30	5.44	V
	3392	-36.20	-13	-23.20	-56	-40	1.57	7.52	V
	4248	-47.20	-13	-34.20	-68.23	-51.8	1.90	8.65	V
	5096	-44.84	-13	-31.84	-68.32	-50	2.39	9.70	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.



WCDMA 850

WCDMA 850									
Channel	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
Lowest	1656	-57.02	-13	-44.02	-69.06	-58.75	0.98	4.86	H
	2472	-60.04	-13	-47.04	-77.25	-61.92	1.28	5.32	H
	3304	-57.16	-13	-44.16	-76.59	-60.6	1.54	7.14	H
	1656	-55.37	-13	-42.37	-67.88	-57.1	0.98	4.86	V
	2472	-60.05	-13	-47.05	-77.7	-61.93	1.28	5.32	V
	3304	-57.61	-13	-44.61	-77.32	-61.05	1.54	7.14	V
Middle	1672	-53.54	-13	-40.54	-65.7	-55.22	0.99	4.82	H
	2512	-60.90	-13	-47.90	-78.15	-62.87	1.29	5.41	H
	3344	-57.60	-13	-44.60	-77.21	-61.21	1.56	7.31	H
	1672	-52.55	-13	-39.55	-65.19	-54.23	0.99	4.82	V
	2512	-60.27	-13	-47.27	-77.98	-62.24	1.29	5.41	V
	3344	-58.10	-13	-45.10	-77.92	-61.71	1.56	7.31	V
Highest	1696	-53.15	-13	-40.15	-65.49	-54.75	1.00	4.75	H
	2544	-60.61	-13	-47.61	-77.83	-62.59	1.30	5.44	H
	3384	-57.35	-13	-44.35	-77.16	-61.12	1.57	7.49	H
	1696	-52.43	-13	-39.43	-65.21	-54.03	1.00	4.75	V
	2544	-59.86	-13	-46.86	-77.58	-61.84	1.30	5.44	V
	3384	-57.24	-13	-44.24	-77.18	-61.01	1.57	7.49	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.



GPRS1900

GPRS 1900									
Channel	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
Lowest	3702	-44.45	-13	-31.45	-65.31	-51.02	1.67	8.24	H
	5550	-39.85	-13	-26.85	-65.51	-46.92	2.65	9.72	H
	7404	-53.38	-13	-40.38	-80.6	-62.53	2.46	11.61	H
	3702	-53.02	-13	-40.02	-73.9	-59.59	1.67	8.24	V
	5550	-42.75	-13	-29.75	-68.25	-49.82	2.65	9.72	V
	7404	-52.68	-13	-39.68	-79.95	-61.83	2.46	11.61	V
Middle	3762	-40.38	-13	-27.38	-61.23	-47.01	1.69	8.31	H
	5640	-39.98	-13	-26.98	-65.72	-47.03	2.71	9.76	H
	7518	-53.52	-13	-40.52	-80.78	-62.91	2.42	11.81	H
	3762	-47.73	-13	-34.73	-68.56	-54.36	1.69	8.31	V
	5640	-39.92	-13	-26.92	-65.57	-46.97	2.71	9.76	V
	7518	-53.05	-13	-40.05	-80.52	-62.44	2.42	11.81	V
Highest	3822	-39.14	-13	-26.14	-59.82	-45.82	1.71	8.39	H
	5730	-41.52	-13	-28.52	-67.6	-48.55	2.76	9.79	H
	7638	-53.59	-13	-40.59	-81.1	-63.09	2.38	11.88	H
	3822	-47.41	-13	-34.41	-68.26	-54.09	1.71	8.39	V
	5730	-39.39	-13	-26.39	-65.43	-46.42	2.76	9.79	V
	7638	-53.15	-13	-40.15	-80.92	-62.65	2.38	11.88	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.



WCDMA 1900

WCDMA 1900									
Channel	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
Lowest	3708	-45.57	-13	-32.57	-66.52	-52.15	1.67	8.25	H
	5556	-48.42	-13	-35.42	-73.98	-55.49	2.66	9.72	H
	7416	-54.35	-13	-41.35	-81.58	-63.53	2.46	11.63	H
	3708	-48.63	-13	-35.63	-69.47	-55.21	1.67	8.25	V
	5556	-52.72	-13	-39.72	-78.29	-59.79	2.66	9.72	V
	7416	-54.15	-13	-41.15	-81.41	-63.33	2.46	11.63	V
Middle	3756	-44.05	-13	-31.05	-64.85	-50.67	1.68	8.31	H
	5640	-50.24	-13	-37.24	-76.02	-57.29	2.71	9.76	H
	7518	-53.44	-13	-40.44	-80.67	-62.83	2.42	11.81	H
	3756	-50.39	-13	-37.39	-71.18	-57.01	1.68	8.31	V
	5640	-53.33	-13	-40.33	-79.06	-60.38	2.71	9.76	V
	7518	-53.79	-13	-40.79	-81.23	-63.18	2.42	11.81	V
Highest	3816	-44.34	-13	-31.34	-65.07	-51.02	1.70	8.38	H
	5724	-50.35	-13	-37.35	-76.4	-57.39	2.75	9.79	H
	7632	-53.94	-13	-40.94	-81.44	-63.43	2.39	11.88	H
	3816	-48.57	-13	-35.57	-69.41	-55.25	1.70	8.38	V
	5724	-51.98	-13	-38.98	-77.99	-59.02	2.75	9.79	V
	7632	-53.74	-13	-40.74	-81.4	-63.23	2.39	11.88	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.