



FCC RF Test Report

APPLICANT : VeriFone, Inc.
EQUIPMENT : Point of Sale Terminal
BRAND NAME : Verifone & VERIFONE
MODEL NAME : V660p-A,V660p Plus-A
FCC ID : B32V660PA
STANDARD : FCC Part 15 Subpart E §15.407
CLASSIFICATION : (NII) Unlicensed National Information Infrastructure
TEST DATE(S) : Apr. 20, 2024 ~ Jun. 07, 2024

We, Sporton International Inc. (Kunshan), would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International Inc. (Kunshan), the test report shall not be reproduced except in full.

Jason Jia

Approved by: Jason Jia



Sporton International Inc. (Kunshan)

**No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300
People's Republic of China**



TABLE OF CONTENTS

REVISION HISTORY.....	3
SUMMARY OF TEST RESULT	4
1 GENERAL DESCRIPTION	5
1.1 Applicant	5
1.2 Manufacturer	5
1.3 Product Feature of Equipment Under Test.....	5
1.4 Product Specification of Equipment Under Test.....	6
1.5 Modification of EUT	6
1.6 Testing Location	6
1.7 Test Software.....	7
1.8 Applicable Standards.....	7
2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST	8
2.1 Carrier Frequency and Channel	8
2.2 Test Mode.....	9
2.3 Connection Diagram of Test System.....	10
2.4 Support Unit used in test configuration and system	11
2.5 EUT Operation Test Setup	11
2.6 Measurement Results Explanation Example.....	11
3 TEST RESULT	12
3.1 6dB and 26dB and 99% Occupied Bandwidth Measurement	12
3.2 Maximum Conducted Output Power Measurement	18
3.3 Power Spectral Density Measurement	19
3.4 Unwanted Emissions Measurement	21
3.5 AC Conducted Emission Measurement.....	26
3.6 Antenna Requirements	28
4 LIST OF MEASURING EQUIPMENT	29
5 MEASUREMENT UNCERTAINTY	30
APPENDIX A. CONDUCTED TEST RESULTS	
APPENDIX B. AC CONDUCTED EMISSION TEST RESULT	
APPENDIX C. RADIATED SPURIOUS EMISSION	
APPENDIX D. DUTY CYCLE PLOTS	
APPENDIX E. SETUP PHOTOGRAPHS	



REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FR440202F	Rev. 01	Initial issue of report	Jul. 02, 2024



SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
3.1	15.403(i)	6dB, 26dB and 99% Occupied Bandwidth	6dB Bandwidth > 500kHz	Pass	-
3.2	15.407(a)	Maximum Conducted Output Power	≤ 30 dBm	Pass	-
3.3	15.407(a)	Power Spectral Density	≤ 30 dBm/500kHz	Pass	-
3.4	15.407(b)	Unwanted Emissions	15.407(b)(4)(i) & 15.209(a)	Pass	Under limit 9.85 dB at 5942.980 MHz
3.5	15.207	AC Conducted Emission	15.207(a)	Pass	Under limit 10.29 dB at 0.459 MHz
3.6	15.203 & 15.407(a)	Antenna Requirement	15.203 & 15.407(a)	Pass	-

Conformity Assessment Condition:

1. The test results (PASS/FAIL) with all measurement uncertainty excluded are presented against the regulation limits or in accordance with the requirements stipulated by the applicant/manufacture who shall bear all the risks of non-compliance that may potentially occur if measurement uncertainty is taken into account.
2. The measurement uncertainty please refer to each test result in the section "Measurement Uncertainty"

Disclaimer:

The product specifications of the EUT presented in the test report that may affect the test assessments are declared by the manufacturer who shall take full responsibility for the authenticity.



1 General Description

1.1 Applicant

VeriFone, Inc.

1400 West Stanford Ranch Road Suite 150 Rocklin CA 95765 USA

1.2 Manufacturer

VeriFone, Inc.

1400 West Stanford Ranch Road Suite 150 Rocklin CA 95765 USA

1.3 Product Feature of Equipment Under Test

Product Feature	
Equipment	Point of Sale Terminal
Brand Name	Verifone & VERIFONE
Model Name	V660p-A,V660p Plus-A
FCC ID	B32V660PA
IMEI Code	Conducted: 356784410000664/356784410000672 Conduction: 355510160000062/355510160000070 Radiation: 356784410000144/356784410000151
EUT Stage	Identical Prototype

Remark:

1. The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.
2. There are two samples under test, Sample 1 (V660p-A) is dual P-SIM sample, and Sample 2 (V660p Plus-A) is P-SIM + E-SIM sample. The difference does not affect RF features, full test Sample 1 for representative.



1.4 Product Specification of Equipment Under Test

Standards-related Product Specification	
Tx/Rx Channel Frequency Range	5745 MHz ~ 5825 MHz
Maximum Output Power	<5745 MHz ~ 5825 MHz> 802.11a : 16.82 dBm / 0.0481 W 802.11n HT20 : 16.71 dBm / 0.0469 W 802.11n HT40 : 16.46 dBm / 0.0443 W 802.11ac VHT20: 15.83 dBm / 0.0383 W 802.11ac VHT40: 15.60 dBm / 0.0363 W 802.11ac VHT80: 14.40 dBm / 0.0275 W
99% Occupied Bandwidth	802.11a : 16.733 MHz 802.11n HT20 : 17.932 MHz 802.11n HT40 : 36.663 MHz 802.11ac VHT80 : 75.644 MHz
Type of Modulation	802.11a/n : OFDM (BPSK / QPSK / 16QAM / 64QAM) 802.11ac : OFDM (BPSK / QPSK / 16QAM / 64QAM / 256QAM)
Antenna Type / Gain	Monopole Antenna with gain -0.30 dBi

Note: For 802.11n HT20 / ac VHT20 and 802.11n HT40 / ac VHT40 mode, the whole testing have assessed only 802.11n HT20/HT40 by referring to their maximum output power.

1.5 Modification of EUT

No modifications are made to the EUT during all test items.

1.6 Testing Location

Sporton International Inc. (Kunshan) is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.02.

Test Firm	Sporton International Inc. (Kunshan)		
Test Site Location	No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300 People's Republic of China TEL : +86-512-57900158		
Test Site No.	Sporton Site No.	FCC Designation No.	FCC Test Firm Registration No.
	CO01-KS 03CH08-KS TH01-KS	CN1257	314309



1.7 Test Software

Item	Site	Manufacturer	Name	Version
1.	TH01-KS	SPORTON	FCC 15C-15E Test Tools Ver10.0_210607	10.0
2.	03CH08-KS	AUDIX	E3	210616
3.	CO01-KS	AUDIX	E3	6.2009-8-24

1.8 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ 47 CFR Part 15 Subpart E
- ♦ FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.
- ♦ FCC KDB 662911 D01 Multiple Transmitter Output v02r01.
- ♦ ANSI C63.10-2013

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.

2 Test Configuration of Equipment Under Test

- a. The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conduction emission (150 kHz to 30 MHz), radiation emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, pre-scanned in three orthogonal panels, X, Y, Z. The worst cases (Y plane) were recorded in this report.
- b. AC power line Conducted Emission was tested under maximum output power.

2.1 Carrier Frequency and Channel

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
5745-5825 MHz U-NII-3	149	5745	157	5785
	151 [*]	5755	159 [*]	5795
	153	5765	161	5805
	155 [#]	5775	165	5825

Note:

1. The above Frequency and Channel in "^{*}" are 40MHz Bandwidth.
2. The above Frequency and Channel in "[#]" are 80MHz Bandwidth.

2.2 Test Mode

Final test modes are considering the modulation and worse data rates as below table.


Modulation	Data Rate
802.11a	6 Mbps
802.11n HT20	MCS0
802.11n HT40	MCS0
802.11ac VHT80	MCS0

Test Cases	
AC Conducted Emission	Mode 1 : WCDMA 850 Idle + WIFI 5G Link + Bluetooth Link + USB Cable(charging from Adaptor 4 + Earphone + Battery)
Remark: The Radiated tests were performed with Adapter 8, Battery, Earphone, USB Cable.	


Ch. #		U-NII-3		
		20M BW	40M BW	80M BW
L	Low	149	151	-
M	Middle	157	-	155
H	High	165	159	-

2.3 Connection Diagram of Test System

AC Conducted Emission:

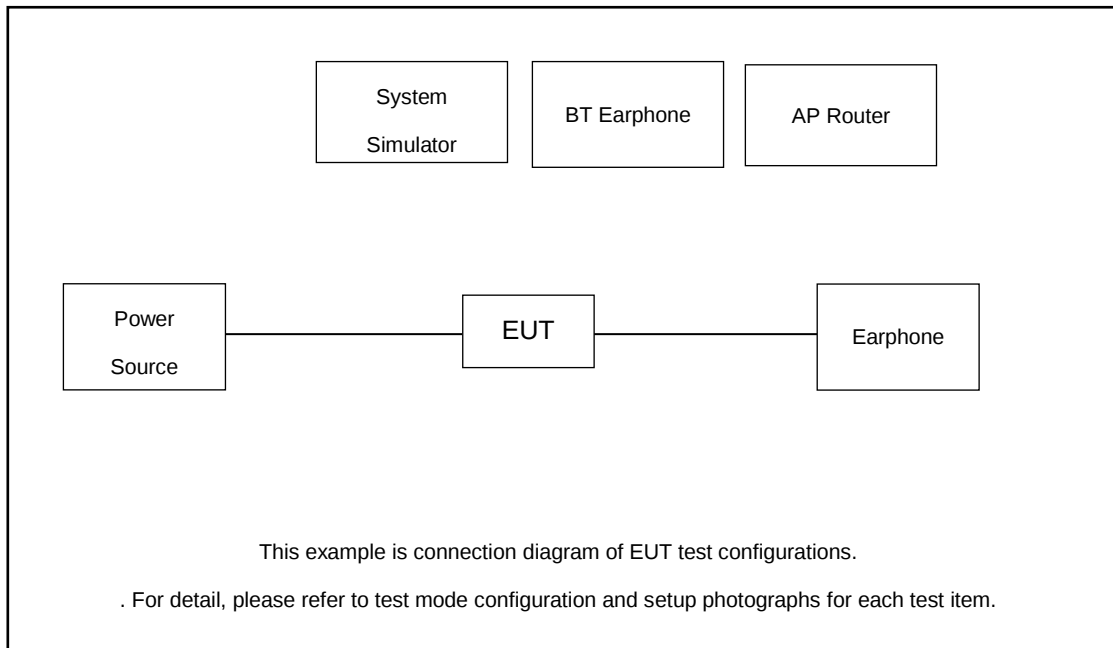

Radiated Emission:

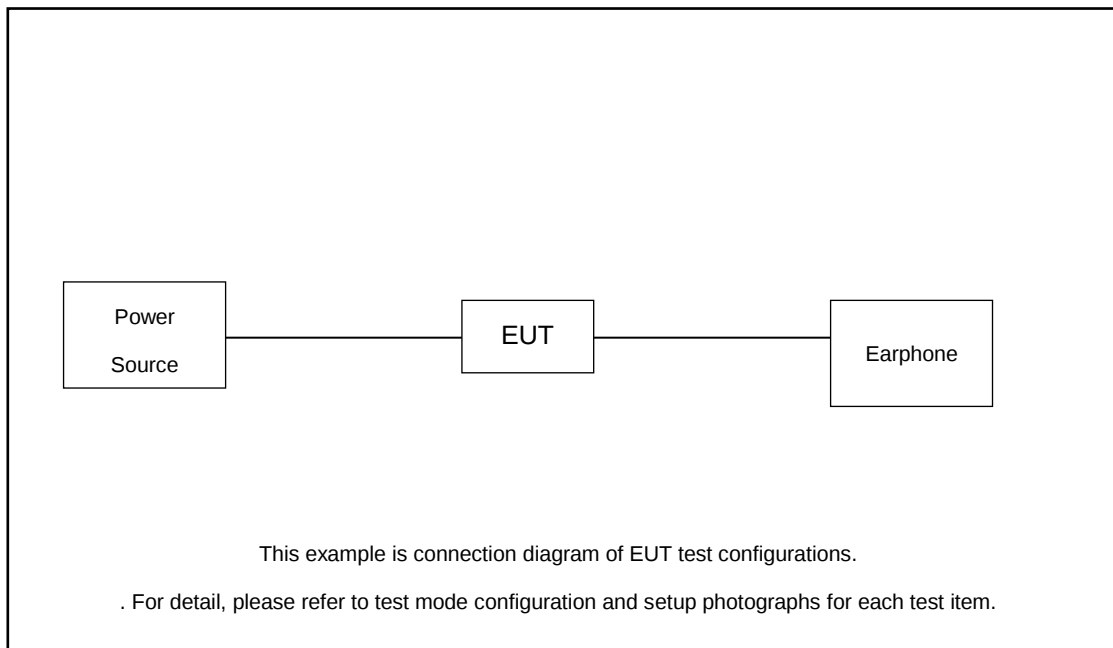

2.4 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	LTE Base Station	Anritus	MT8821C	N/A	N/A	Unshielded,1.8m
2.	Bluetooth Earphone	Lenovo	thinkplus-BH3	N/A	N/A	N/A
3.	Notebook	Lenovo	G480	QDS-BRCM1050I	N/A	Unshielded AC I/P cable 1.8m
4.	WLAN AP	EDIMAX	EW-7679WAC	NDD9576791401	N/A	Unshielded,1.8m

2.5 EUT Operation Test Setup

The RF test items, make the EUT get into the engineering modes to provide channel selection, power level, data rate and the application type and for continuous transmitting signals.

The EUT was set to connect with the WLAN AP under large package sizes transmission.

2.6 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example :

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

Following shows an offset computation example with cable loss 7.00 dB

$$\begin{aligned}\text{Offset(dB)} &= \text{RF cable loss(dB)} \\ &= 7.00(\text{dB})\end{aligned}$$

3 Test Result

3.1 6dB and 26dB and 99% Occupied Bandwidth Measurement

3.1.1 Description of 6dB and 26dB and 99% Occupied Bandwidth

The minimum 6 dB bandwidth shall be at least 500 kHz.

26dB and 99% Occupied bandwidth are reporting only.


3.1.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.1.3 Test Procedures



1. The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.
Section C) Emission bandwidth for the band 5.725-5.85GHz
2. For 6dB BW, Set RBW = 100kHz.
For 26dB BW, Set RBW = approximately 1% of the emission bandwidth.
For 99% OBW, Set RBW = 1% to 5% of the OBW.
3. For 26dB BW, Set the VBW > RBW.
For 6dB BW & 99% OBW, Set the VBW $\geq 3 \times$ RBW.
4. Detector = Peak.
5. Trace mode = max hold
6. Measure the maximum width of the emission that is 6 dB down from the peak of the emission.
7. Measure and record the results in the test report.



3.1.4 Test Setup







3.1.5 Test Result of 6dB Bandwidth


Please refer to Appendix A.

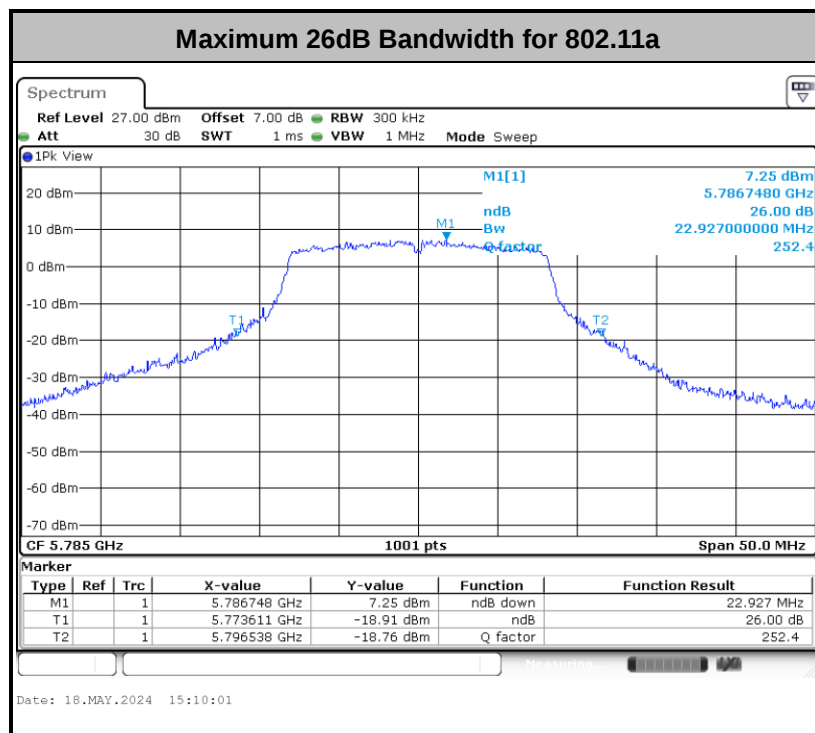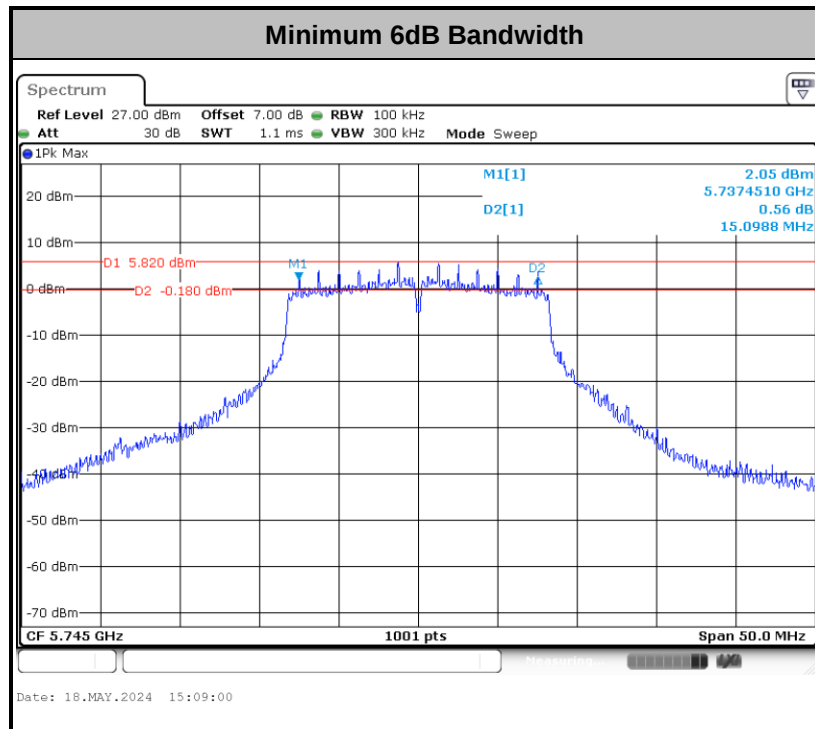

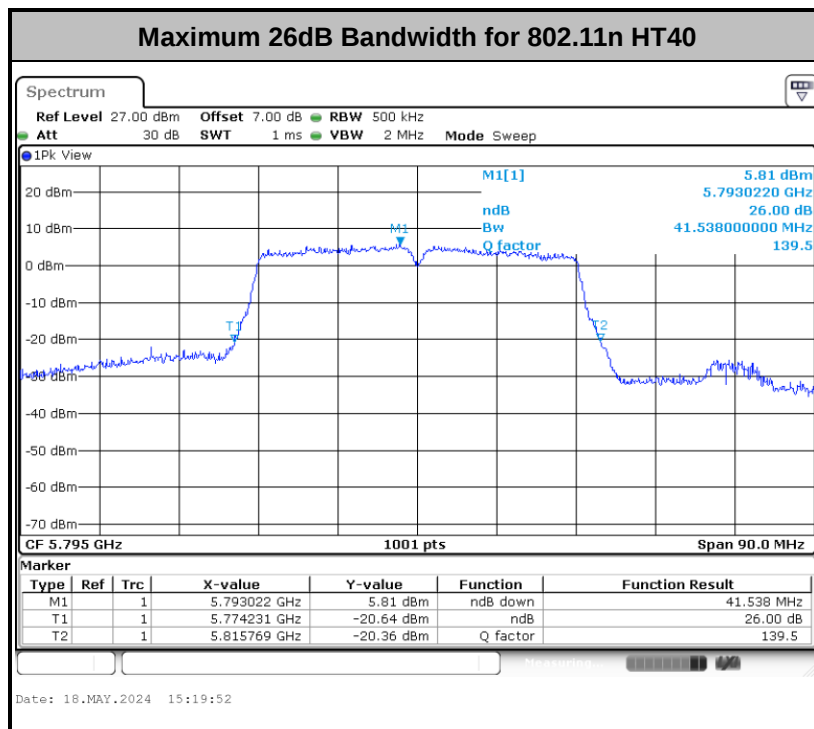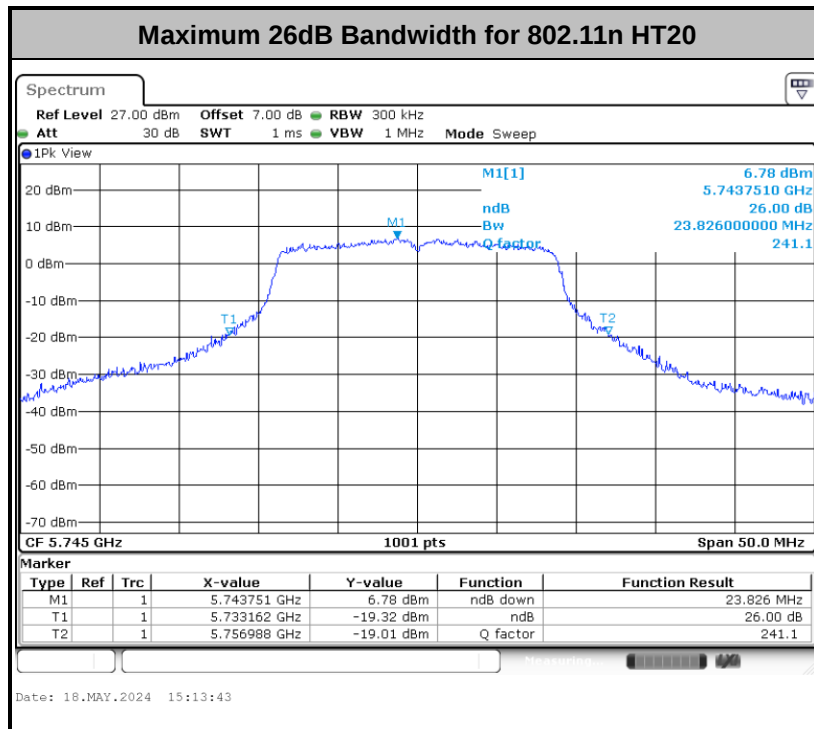

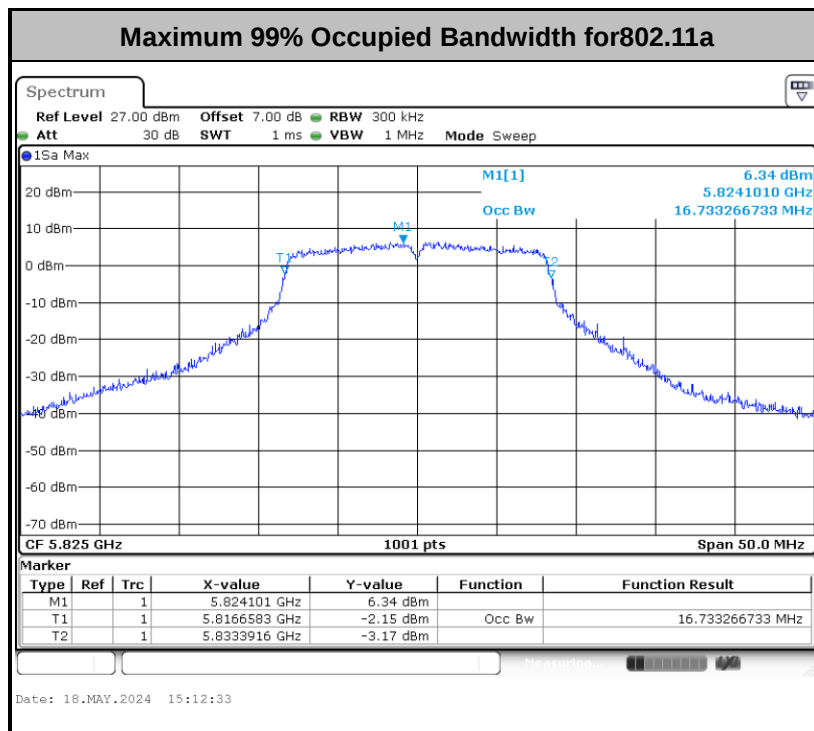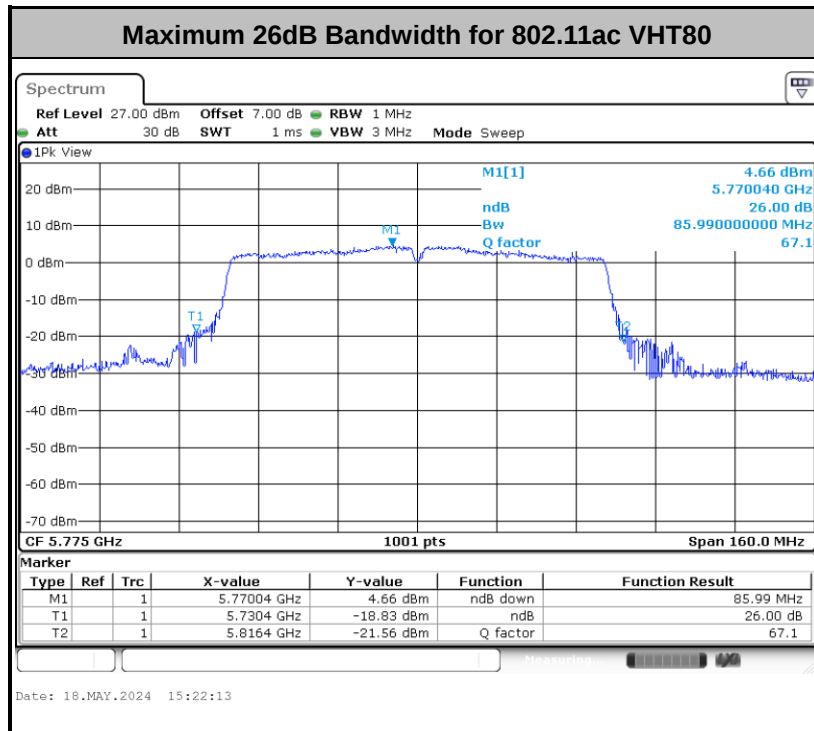

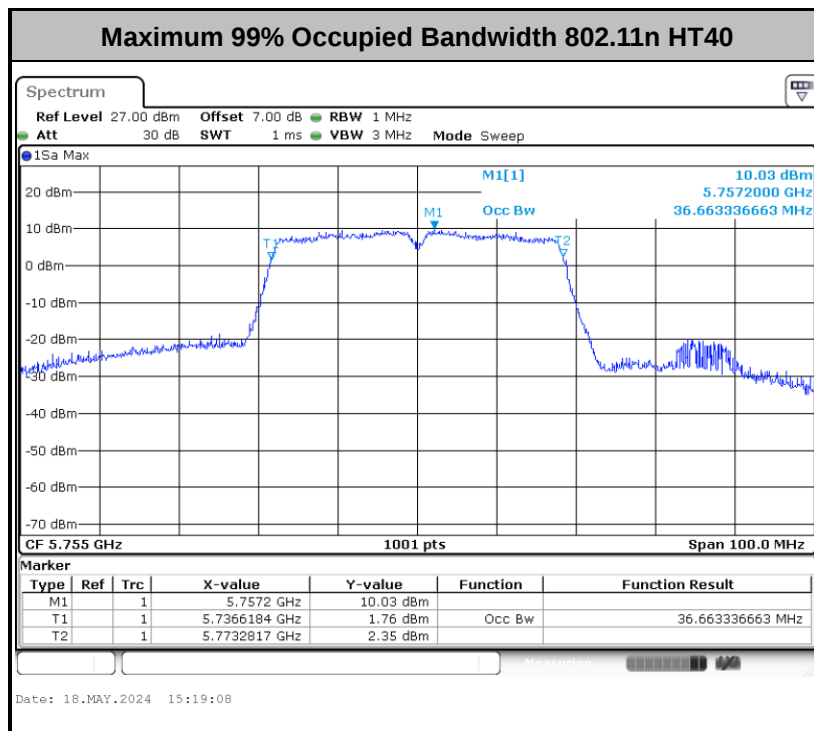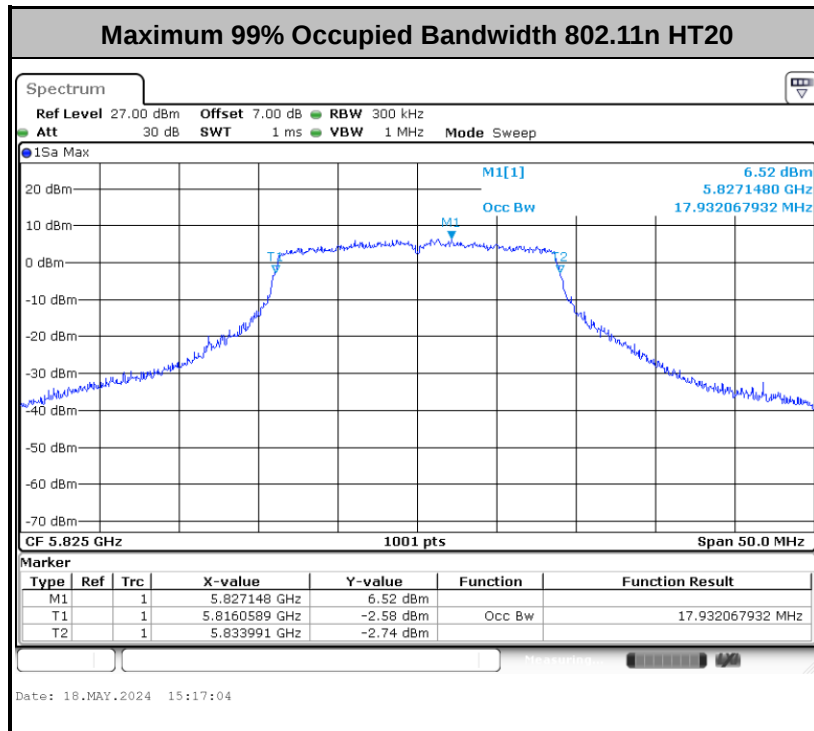

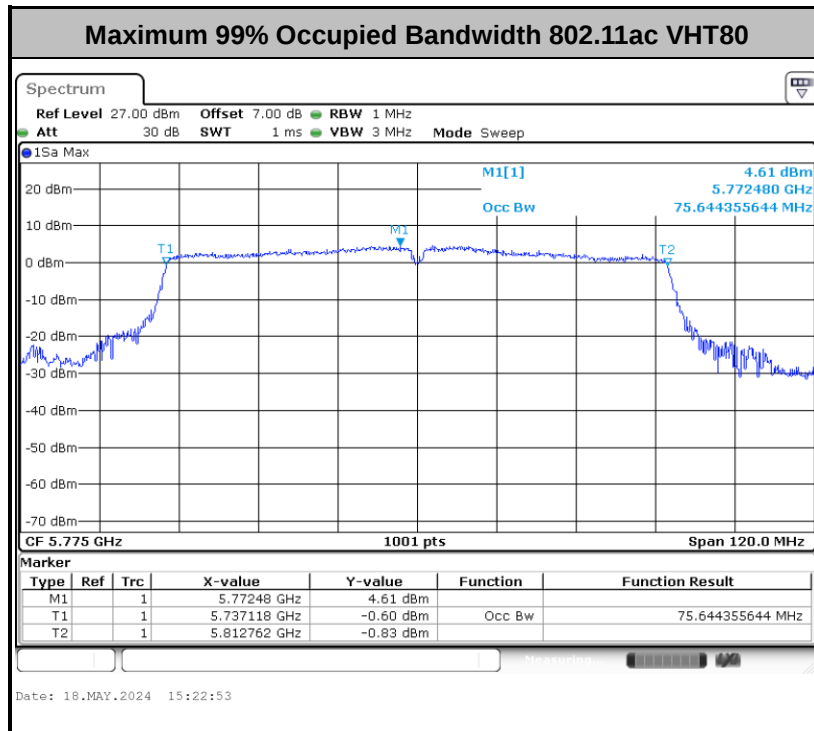

Note: The occupied channel bandwidth is maintained within the band of operation for all of the modulations.

3.2 Maximum Conducted Output Power Measurement

3.2.1 Limit of Maximum Conducted Output Power

For the band 5.725–5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W.

For Straddle Channel, According to KDB 789033 D02 General UNII Test Procedures New Rules v02r01, If the power and PSD of the devices are uniform and comply with the lower limits specified for the U-NII-2 bands, a single measurement over the entire emission bandwidth can be performed to show compliance.

If transmitting antennas of directional gain greater than 6 dBi are used, the peak output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

3.2.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.


3.2.3 Test Procedures

The testing follows Method PM of FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.

Method PM (Measurement using an RF average power meter):

1. Measurement is performed using a wideband RF power meter.
2. The EUT is configured to transmit continuously with a consistent duty cycle at its maximum power control level.
3. Measure the average power of the transmitter, and the average power is corrected with duty factor, $10 \log(1/x)$, where x is the duty cycle.

3.2.4 Test Setup



3.2.5 Test Result of Maximum Conducted Output Power

Please refer to Appendix A.

3.3 Power Spectral Density Measurement

3.3.1 Limit of Power Spectral Density

For the band 5.725–5.85 GHz, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band.

For Straddle Channel, According to KDB 789033 D02 General UNII Test Procedures New Rules v02r01, If the power and PSD of the devices are uniform and comply with the lower limits specified for the U-NII-2 bands, a single measurement over the entire emission bandwidth can be performed to show compliance.

If transmitting antennas of directional gain greater than 6 dBi are used, the peak output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

3.3.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.3.3 Test Procedures


The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01. Section F) Maximum power spectral density.

Method SA-2

(trace averaging across on and off times of the EUT transmissions, followed by duty cycle correction).


- Measure the duty cycle.
- Set span to encompass the entire emission bandwidth (EBW) of the signal.
- Set RBW = 500KHz (or 300 kHz if the SA can't set RBW=500KHz).
- Set VBW $\geq$ 1 MHz.
- Number of points in sweep $\geq$ 2 Span / RBW.
- Sweep time = auto.
- Detector = RMS
- Trace average at least 100 traces in power averaging mode.
- If the SA can't set RBW=500KHz, then add $10 \log(500\text{kHz}/\text{RBW})$ to the test result
- Add $10 \log(1/x)$, where x is the duty cycle, to the measured power in order to compute the average power during the actual transmission times. For example, add $10 \log(1/0.25) = 6$ dB if the duty cycle is 25 percent.

3.3.4 Test Setup

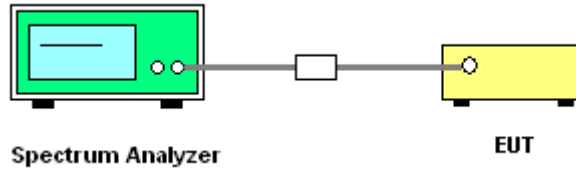

3.3.5 Test Result of Power Spectral Density

Please refer to Appendix A.

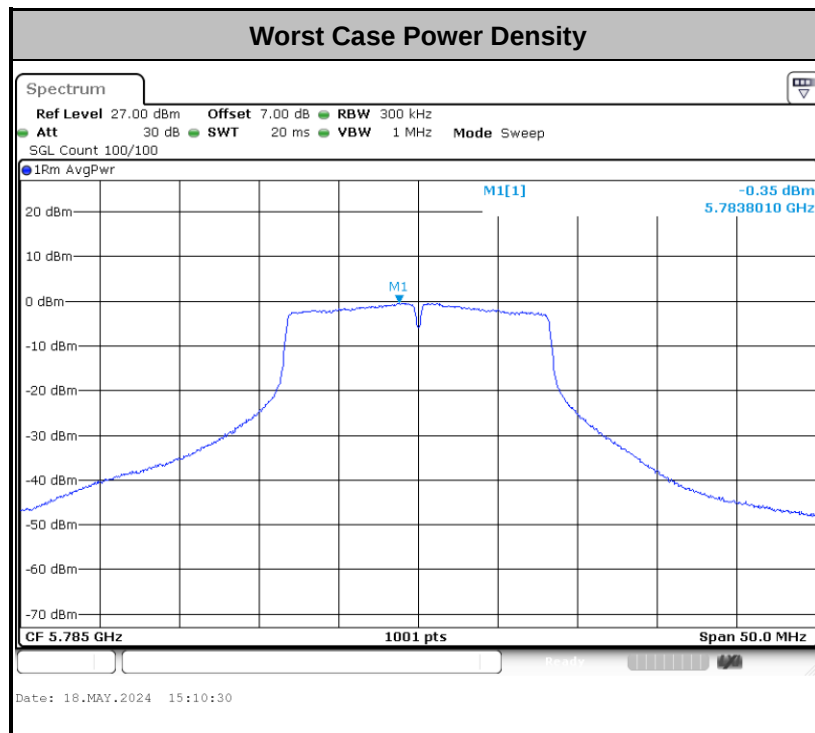

Note: Average Power Density (dBm/500KHz) = Measured value (dBm/300KHz) + Duty Factor + RBW offset

3.4 Unwanted Emissions Measurement

This section is to measure unwanted emissions through radiated measurement for band edge spurious emissions and out of band emissions measurement.

3.4.1 Limit of Unwanted Emissions

- (1) For transmitters operating in the 5.725-5.85 GHz band:

15.407(b)(4)(i) All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

- (2) Unwanted spurious emissions fallen in restricted bands shall comply with the general field strength limits as below table,

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3



EIRP (dBm)	Field Strength at 3m (dBμV/m)
- 27	68.2

Note: The following formula is used to convert the EIRP to field strength.

$$\text{EIRP} = E_{\text{Meas}} + 20\log(d_{\text{Meas}}) - 104.7$$

where

EIRP is the equivalent isotropically radiated power, in dBm

E_{Meas} is the field strength of the emission at the measurement distance, in dBμV/m

d_{Meas} is the measurement distance, in m

(3) ANSI C63.10-2013 clause 12.7.3 note 97

As specified by regulatory requirements, emissions above 1000 MHz that are outside of the restricted bands are subject to a peak emission limit. However, an out-of-band emission that complies with both the average and peak general regulatory limits is not required to satisfy the peak emission limit.

3.4.2 Measuring Instruments


The measuring equipment is listed in the section 4 of this test report.

3.4.3 Test Procedures


1. The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.
Section G) Unwanted emissions measurement.
 - (1) Procedure for Unwanted Emissions Measurements Below 1000MHz
 - RBW = 120 kHz
 - VBW = 300 kHz
 - Detector = Peak
 - Trace mode = max hold
 - (2) Procedure for Peak Unwanted Emissions Measurements Above 1000 MHz
 - RBW = 1 MHz
 - VBW $\geq$ 3 MHz
 - Detector = Peak
 - Sweep time = auto
 - Trace mode = max hold
 - (3) Procedures for Average Unwanted Emissions Measurements Above 1000MHz
 - RBW = 1 MHz
 - VBW = 10 Hz, when duty cycle is no less than 98 percent.
 - VBW $\geq$ 1/T, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.
2. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
3. The EUT was set 3 meters from the interference receiving antenna which was mounted on the top of a variable height antenna tower.
4. The antenna is a broadband antenna and its height is adjusted between one meter and four meters above ground to find the maximum value of the field strength for both horizontal polarization and vertical polarization of the antenna.
5. For each suspected emission, the EUT was arranged to its worst case and then adjust the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading.
6. For testing below 1GHz, if the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then peak values of EUT will be reported, otherwise, the emissions will be repeated one by one using the CISPR quasi-peak method and reported.
7. For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than peak limit (that means the emission level in average mode also complies with the limit in average mode), then peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.

3.4.4 Test Setup


For radiated emissions below 30MHz

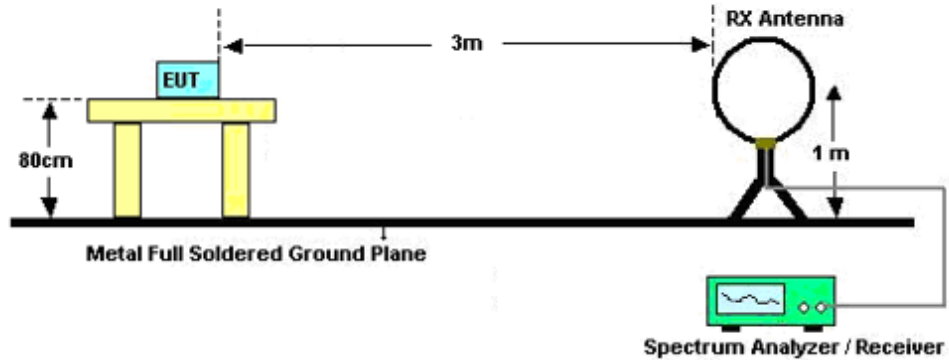

For radiated emissions 30MHz~1GHz

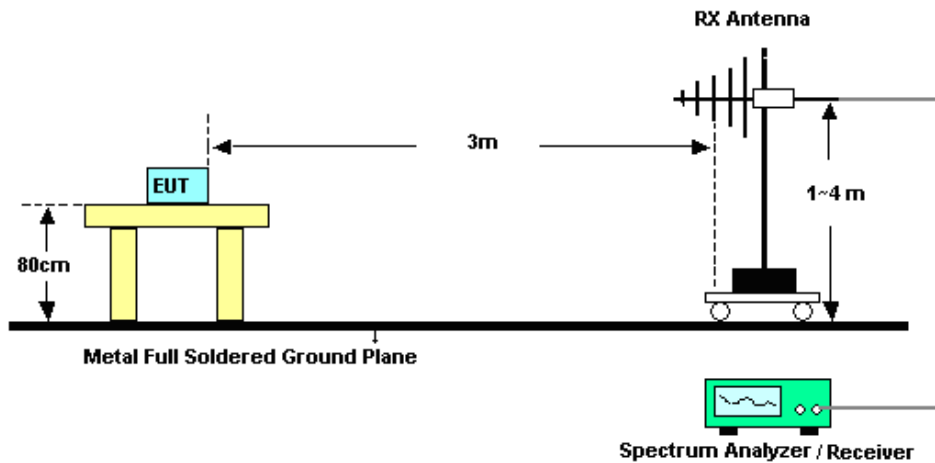

For radiated emissions above 1GHz

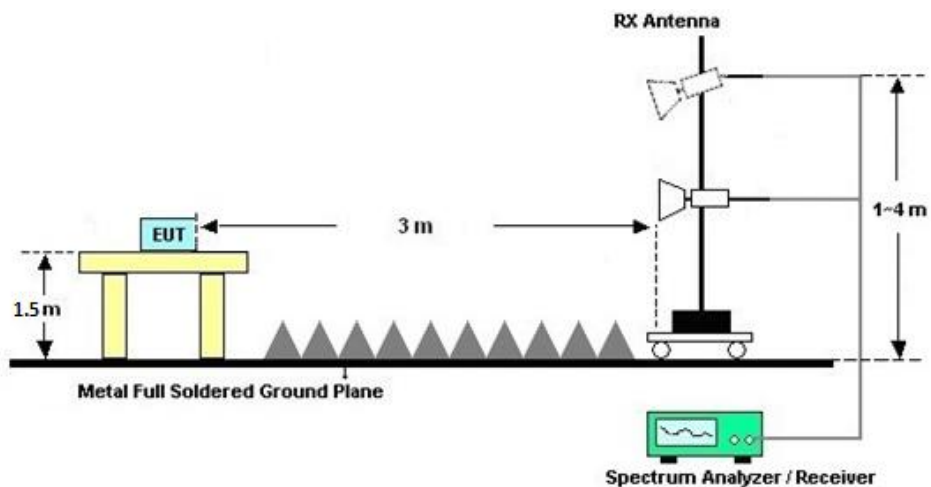



3.4.5 Test Results of Radiated Emissions (9 kHz ~ 30 MHz)

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

There is a comparison data of both open-field test site and semi-Anechoic chamber, and the result came out very similar.

3.4.6 Test Result of Radiated Band Edges

Please refer to Appendix C.

3.4.7 Duty Cycle

Please refer to Appendix D.

3.4.8 Test Result of Unwanted Radiated Emission (30MHz ~ 10th Harmonic or 40GHz, whichever is lower)

Please refer to Appendix C.

3.5 AC Conducted Emission Measurement

3.5.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of emission (MHz)	Conducted limit (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.


3.5.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.5.3 Test Procedures

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth with Maximum Hold Mode.

3.5.4 Test Setup

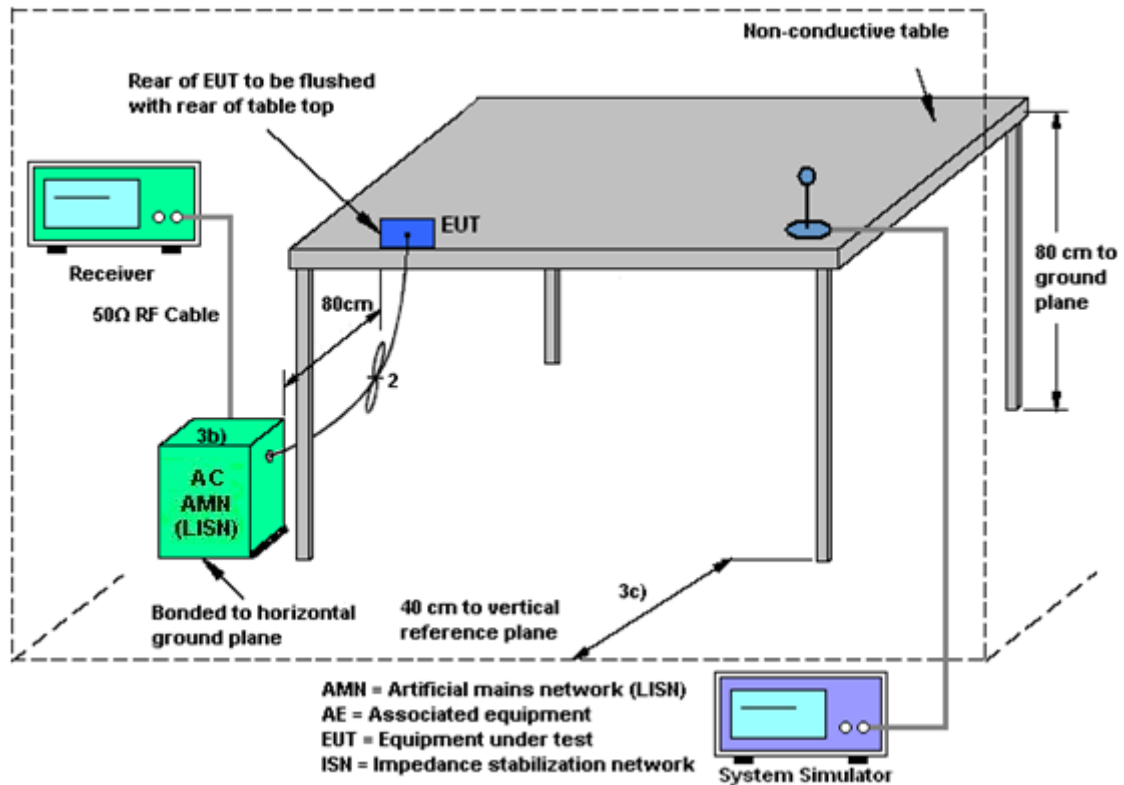

3.5.5 Test Result of AC Conducted Emission

Please refer to Appendix B.



3.6 Antenna Requirements

3.6.1 Standard Applicable

If transmitting antenna directional gain is greater than 6 dBi, both the peak transmit power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

3.6.2 Antenna Anti-Replacement Construction

An embedded-in antenna design is used.

3.6.3 Antenna Gain

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.



4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	R&S	FSV30	101338	10Hz~30GHz	Jan. 05, 2024	Apr. 20, 2024 ~May 18, 2024	Jan. 04, 2025	Conducted (TH01-KS)
Pulse Power Sensor	Anritsu	MA2411B	0917070	300MHz~40GHz	Jan. 02, 2024	Apr. 20, 2024 ~May 18, 2024	Jan. 01, 2025	Conducted (TH01-KS)
Power Meter	Anritsu	ML2495A	1005002	50MHz Bandwidth	Jan. 02, 2024	Apr. 20, 2024 ~May 18, 2024	Jan. 01, 2025	Conducted (TH01-KS)
EMI Test Receiver	Keysight	N9038A	MY56400023	3Hz~8.5GHz; Max 30dBm	Jan. 04, 2024	May 09, 2024 ~Jun. 07, 2024	Jan. 03, 2025	Radiation (03CH08-KS)
Spectrum Analyzer	R&S	FSV40	101932	10kHz~40GHz; Max 30dBm	Oct. 10, 2023	May 09, 2024 ~Jun. 07, 2024	Oct. 09, 2024	Radiation (03CH08-KS)
Loop Antenna	R&S	HFH2-Z2E	101125	9kHz~30MHz	Oct. 10, 2023	May 09, 2024 ~Jun. 07, 2024	Oct. 09, 2024	Radiation (03CH08-KS)
Bilog Antenna	TESEQ& VGT	CBL 61110	59915	30MHz-1GHz	Aug. 12, 2023	May 09, 2024 ~Jun. 07, 2024	Aug. 11, 2024	Radiation (03CH08-KS)
Double Ridge Horn Antenna	ETS-Lindgren	3117	75959	1GHz~18GHz	Mar. 01, 2024	May 09, 2024 ~Jun. 07, 2024	Feb. 28, 2025	Radiation (03CH08-KS)
SHF-EHF Horn	Com-power	AH-840	101070	18GHz~40GHz	Jan. 05, 2024	May 09, 2024 ~Jun. 07, 2024	Jan. 04, 2025	Radiation (03CH08-KS)
Amplifier	SONOMA	310N	413741	9KHz-1GHz	Jan. 05, 2024	May 09, 2024 ~Jun. 07, 2024	Jan. 04, 2025	Radiation (03CH08-KS)
Amplifier	EM	EM01G18GA	060834	1Ghz-18Ghz	Oct. 10, 2023	May 09, 2024 ~Jun. 07, 2024	Oct. 09, 2024	Radiation (03CH08-KS)
high gain Amplifier	EM	EM01G18GA	060845	1Ghz-18Ghz	Jan. 05, 2024	May 09, 2024 ~Jun. 07, 2024	Jan. 04, 2025	Radiation (03CH08-KS)
Amplifier	MITEQ	EM18G40GGA	060728	18~40GHz	Jan. 04, 2024	May 09, 2024 ~Jun. 07, 2024	Jan. 03, 2025	Radiation (03CH08-KS)
AC Power Source	Chroma	61601	616010002473	N/A	NCR	May 09, 2024 ~Jun. 07, 2024	NCR	Radiation (03CH08-KS)
Turn Table	EM	EM 1000-T	N/A	0~360 degree	NCR	May 09, 2024 ~Jun. 07, 2024	NCR	Radiation (03CH08-KS)
Antenna Mast	EM	EM 1000-A	N/A	1 m~4 m	NCR	May 09, 2024 ~Jun. 07, 2024	NCR	Radiation (03CH08-KS)
EMI Receiver	R&S	ESC17	100768	9kHz~7GHz;	Apr. 18, 2024	Jun. 02, 2024	Apr. 17, 2025	Conduction (CO01-KS)
AC LISN (for auxiliary equipment)	MessTec	AN3016	060103	9kHz~30MHz	Oct. 11, 2023	Jun. 02, 2024	Oct. 10, 2024	Conduction (CO01-KS)
AC LISN	MessTec	AN3016	060105	9kHz~30MHz	Apr. 18, 2024	Jun. 02, 2024	Apr. 17, 2025	Conduction (CO01-KS)
AC Power Source	Chroma	61602	ABP000000811	AC 0V~300V, 45Hz~1000Hz	Oct. 11, 2023	Jun. 02, 2024	Oct. 10, 2024	Conduction (CO01-KS)

NCR: No Calibration Required

5 Measurement Uncertainty

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI 63.10-2013. All the measurement uncertainty value were shown with a coverage K=2 to indicate 95% level of confidence. The measurement data show herein meets or exceeds the CISPR measurement uncertainty values specified in CISPR 16-4-2 and can be compared directly to specified limit to determine compliance.

Uncertainty of Conducted Measurement

Conducted Spurious Emission & Bandedge	±2.26 dB
Occupied Channel Bandwidth	±0.1%
Conducted Power	±0.46 dB
Conducted Power Spectral Density	±0.88 dB
Frequency	±0.4 Hz

Uncertainty of AC Conducted Emission Measurement (0.15 MHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	2.84dB
---	--------

Uncertainty of Radiated Emission Measurement (9 KHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	3.30dB
---	--------

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	6.04dB
---	--------

Uncertainty of Radiated Emission Measurement (1 GHz ~ 18 GHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	5.26dB
---	--------

Uncertainty of Radiated Emission Measurement (18 GHz ~ 40 GHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	5.40dB
---	--------

----- THE END -----



Appendix A. Conducted Test Results

A1. Conducted Test Results

Test Engineer:	Jacob Zhang	Temperature:	21~25	°C
Test Date:	2024/5/17	Relative Humidity:	51~54	%

TEST RESULTS DATA
6dB and 26dB EBW and 99% OBW

U-NII-3 single antenna									
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	99% Bandwidth (MHz)	26dB Bandwidth (MHz)	6 dB Bandwidth (MHz)	6 dB Bandwidth Min. Limit (MHz)	Pass/Fail
11a	6Mbps	1	149	5745	16.733	22.228	15.098	0.5	Pass
11a	6Mbps	1	157	5785	16.733	22.927	15.450	0.5	Pass
11a	6Mbps	1	165	5825	16.733	21.528	15.300	0.5	Pass
HT20	MCS0	1	149	5745	17.882	23.826	16.000	0.5	Pass
HT20	MCS0	1	157	5785	17.882	22.977	15.100	0.5	Pass
HT20	MCS0	1	165	5825	17.932	22.827	15.100	0.5	Pass
HT40	MCS0	1	151	5755	36.663	41.269	35.100	0.5	Pass
HT40	MCS0	1	159	5795	36.563	41.538	35.280	0.5	Pass
VHT80	MCS0	1	155	5775	75.644	85.990	75.200	0.5	Pass

TEST RESULTS DATA
Average Power Table

U-NII-3 single antenna										Power Setting
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Duty Factor (dB)	Average Conducted Power with duty factor (dBm)	FCC Conducted Power Limit (dBm)	DG (dBi)	Pass/Fail	
11a	6Mbps	1	149	5745	0.08	16.79	30.00	-0.30	Pass	17
11a	6Mbps	1	157	5785	0.08	16.82	30.00	-0.30	Pass	17
11a	6Mbps	1	165	5825	0.08	16.21	30.00	-0.30	Pass	17
HT20	MCS0	1	149	5745	0.05	16.58	30.00	-0.30	Pass	17
HT20	MCS0	1	157	5785	0.05	16.71	30.00	-0.30	Pass	17
HT20	MCS0	1	165	5825	0.05	16.07	30.00	-0.30	Pass	17
HT40	MCS0	1	151	5755	0.17	16.46	30.00	-0.30	Pass	16
HT40	MCS0	1	159	5795	0.17	16.29	30.00	-0.30	Pass	16
VHT20	MCS0	1	149	5745	0.08	15.70	30.00	-0.30	Pass	16
VHT20	MCS0	1	157	5785	0.08	15.83	30.00	-0.30	Pass	16
VHT20	MCS0	1	165	5825	0.08	15.21	30.00	-0.30	Pass	16
VHT40	MCS0	1	151	5755	0.17	15.60	30.00	-0.30	Pass	15
VHT40	MCS0	1	159	5795	0.17	15.38	30.00	-0.30	Pass	15
VHT80	MCS0	1	155	5775	0.36	14.40	30.00	-0.30	Pass	14


TEST RESULTS DATA
Power Spectral Density

U-NII-3 single antenna										
Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	Duty Factor (dB)	10log (500kHz /RBW) Factor (dB)	Average Power Density with Duty Factor (dBm/500kHz)	Average PSD Limit (dBm/500kHz)	DG (dBi)	Pass /Fail
11a	6Mbps	1	149	5745	0.08	2.22	1.85	30.00	-0.30	Pass
11a	6Mbps	1	157	5785	0.08	2.22	1.95	30.00	-0.30	Pass
11a	6Mbps	1	165	5825	0.08	2.22	1.22	30.00	-0.30	Pass
HT20	MCS0	1	149	5745	0.05	2.22	1.38	30.00	-0.30	Pass
HT20	MCS0	1	157	5785	0.05	2.22	1.43	30.00	-0.30	Pass
HT20	MCS0	1	165	5825	0.05	2.22	0.67	30.00	-0.30	Pass
HT40	MCS0	1	151	5755	0.17	2.22	-1.82	30.00	-0.30	Pass
HT40	MCS0	1	159	5795	0.17	2.22	-2.29	30.00	-0.30	Pass
VHT80	MCS0	1	155	5775	0.36	2.22	-6.50	30.00	-0.30	Pass



Appendix B. AC Conducted Emission Test Results

Test Engineer :	Amos Zhang	Temperature :	25.3~26.2°C
		Relative Humidity :	38~40%
Test Voltage :	120Vac / 60Hz	Phase :	Line
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

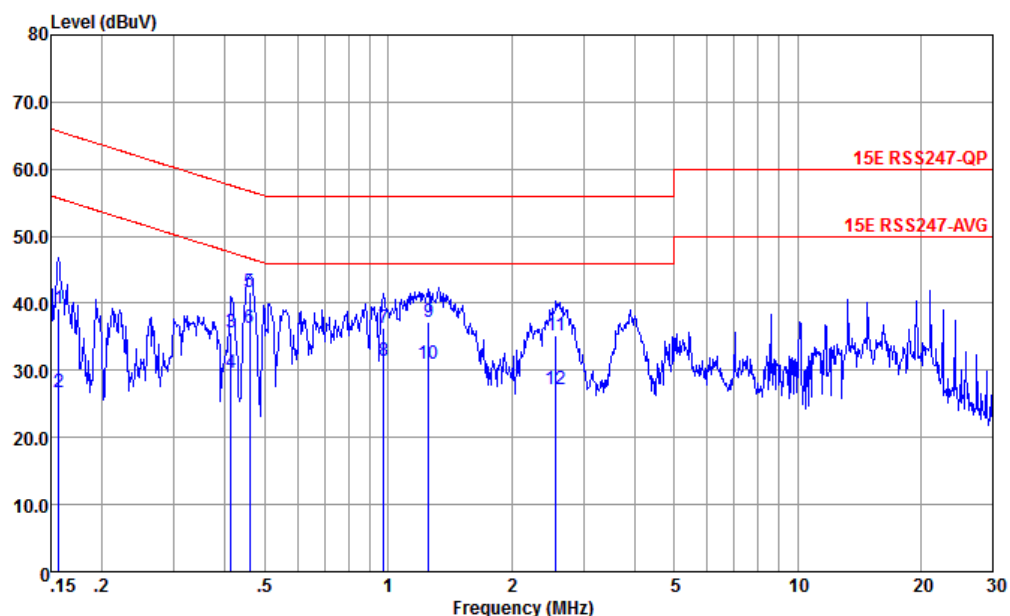


Site : CO01-KS
Condition : 15E RSS247-QP LISN-060105-L 2023 LINE

	Freq	Level	Over	Limit	Read	LISN	Cable	Remark
	MHz	dBuV	Limit	Line	Level	Factor	Loss	
			dB	dBuV	dBuV	dB	dB	
1	0.156	39.13	-26.52	65.65	28.66	0.05	10.42	QP
2	0.156	26.77	-28.88	55.65	16.30	0.05	10.42	Average
3	0.413	35.57	-22.02	57.59	25.30	0.00	10.27	QP
4	0.413	29.57	-18.02	47.59	19.30	0.00	10.27	Average
5	0.459	41.62	-15.09	56.71	31.40	-0.02	10.24	QP
6 *	0.459	36.42	-10.29	46.71	26.20	-0.02	10.24	Average
7	0.974	36.30	-19.70	56.00	26.31	-0.10	10.09	QP
8	0.974	31.50	-14.50	46.00	21.51	-0.10	10.09	Average
9	1.255	37.17	-18.83	56.00	27.19	-0.11	10.09	QP
10	1.255	31.07	-14.93	46.00	21.09	-0.11	10.09	Average
11	2.567	35.27	-20.73	56.00	25.30	-0.10	10.07	QP
12	2.567	27.27	-18.73	46.00	17.30	-0.10	10.07	Average



Test Engineer :	Amos Zhang	Temperature :	25.3~26.2°C
		Relative Humidity :	38~40%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

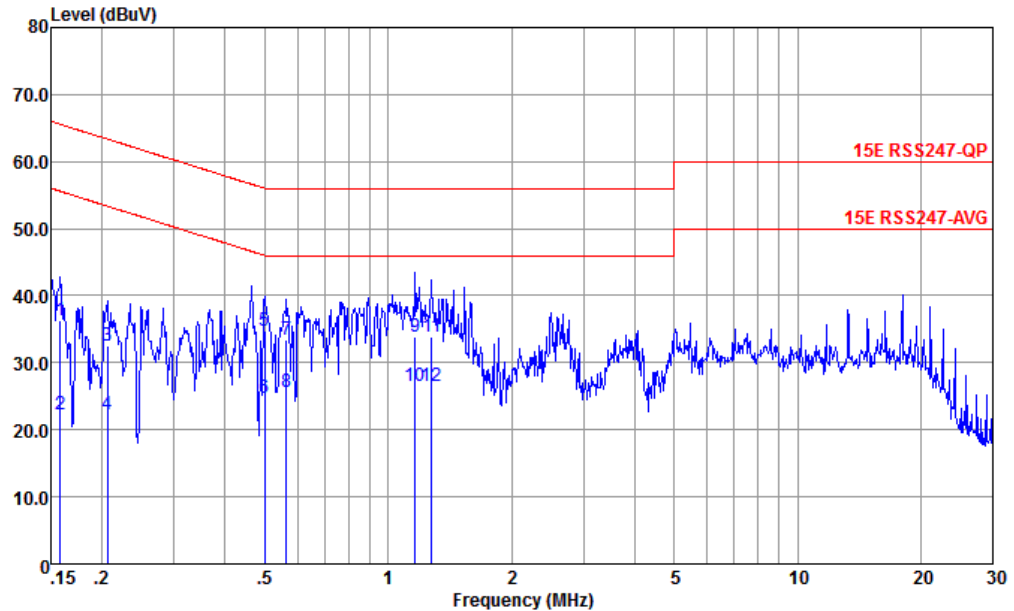

	Freq	Level	Over	Limit	Read	LISN	Cable	Remark
	MHz	dBuV	Limit	Line	Level	Factor	Loss	
			dB	dBuV	dBuV	dB	dB	
1	0.158	36.36	-29.20	65.56	25.90	0.04	10.42	QP
2	0.158	22.36	-33.20	55.56	11.90	0.04	10.42	Average
3	0.206	32.55	-30.81	63.36	22.11	0.04	10.40	QP
4	0.206	22.35	-31.01	53.36	11.91	0.04	10.40	Average
5	0.499	34.75	-21.26	56.01	24.60	-0.07	10.22	QP
6	0.499	24.75	-21.26	46.01	14.60	-0.07	10.22	Average
7	0.564	33.42	-22.58	56.00	23.30	-0.07	10.19	QP
8	0.564	25.72	-20.28	46.00	15.60	-0.07	10.19	Average
9	1.166	33.78	-22.22	56.00	23.79	-0.10	10.09	QP
10 *	1.166	26.58	-19.42	46.00	16.59	-0.10	10.09	Average
11	1.276	33.88	-22.12	56.00	23.90	-0.11	10.09	QP
12	1.276	26.58	-19.42	46.00	16.60	-0.11	10.09	Average

Note:

- Level(dBμV) = Read Level(dBμV) + LISN Factor(dB) + Cable Loss(dB)
- Over Limit(dB) = Level(dBμV) – Limit Line(dBμV)



Appendix C. Radiated Spurious Emission Test Data

Test Engineer :	Koi Ji	Relative Humidity :	41 ~ 42 %
		Temperature :	22 ~ 23 °C




Radiated Spurious Emission Test Modes

Mode	Band	Band (GHz)	Modulation	Channel	Frequency	Data Rate	Remark
Mode 1	U-NII-3	5.725-5.85	802.11a	149	5745	6Mbps	-
Mode 2	U-NII-3	5.725-5.85	802.11a	157	5785	6Mbps	-
Mode 3	U-NII-3	5.725-5.85	802.11a	165	5825	6Mbps	-
Mode 4	U-NII-3	5.725-5.85	802.11n HT20	149	5745	MCS0	-
Mode 5	U-NII-3	5.725-5.85	802.11n HT20	157	5785	MCS0	-
Mode 6	U-NII-3	5.725-5.85	802.11n HT20	165	5825	MCS0	-
Mode 7	U-NII-3	5.725-5.85	802.11n HT40	151	5755	MCS0	-
Mode 8	U-NII-3	5.725-5.85	802.11n HT40	159	5795	MCS0	-
Mode 9	U-NII-3	5.725-5.85	802.11ac VHT80	155	5775	MCS0	-




Summary of each worse mode

Mode	Modulation	Ch.	Freq. (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol.	Peak Avg.	Result	Remark
1	802.11a	149	5601.60	56.96	68.20	-11.24	V	PEAK	Pass	Band Edge
1	802.11a	149	11490.00	36.05	54.00	-17.95	H	AVERAGE	Pass	Harmonic
2	802.11a	157	-	-	-	-	-	-	-	Band Edge
2	802.11a	157	11570.00	45.18	74.00	-28.82	V	PEAK	Pass	Harmonic
3	802.11a	165	5935.60	57.44	68.20	-10.76	H	PEAK	Pass	Band Edge
3	802.11a	165	11650.00	35.97	54.00	-18.03	H	AVERAGE	Pass	Harmonic
4	802.11n HT20	149	5604.40	58.28	68.20	-9.92	V	PEAK	Pass	Band Edge
4	802.11n HT20	149	11490.00	36.15	54.00	-17.85	H	AVERAGE	Pass	Harmonic
5	802.11n HT20	157	-	-	-	-	-	-	-	Band Edge
5	802.11n HT20	157	11570.00	35.42	54.00	-18.58	H	AVERAGE	Pass	Harmonic
6	802.11n HT20	165	5999.60	57.77	68.20	-10.43	V	PEAK	Pass	Band Edge
6	802.11n HT20	165	11650.00	35.88	54.00	-18.12	H	AVERAGE	Pass	Harmonic
7	802.11n HT40	151	5942.98	58.35	68.20	-9.85	V	PEAK	Pass	Band Edge
7	802.11n HT40	151	11510.00	36.62	54.00	-17.38	H	AVERAGE	Pass	Harmonic
8	802.11n HT40	159	5986.40	57.73	68.20	-10.47	V	PEAK	Pass	Band Edge
8	802.11n HT40	159	11590.00	45.01	74.00	-28.99	V	PEAK	Pass	Harmonic
9	802.11ac VHT80	155	5926.40	56.92	68.20	-11.28	H	PEAK	Pass	Band Edge
9	802.11ac VHT80	155	11550.00	45.30	74.00	-28.70	V	PEAK	Pass	Harmonic

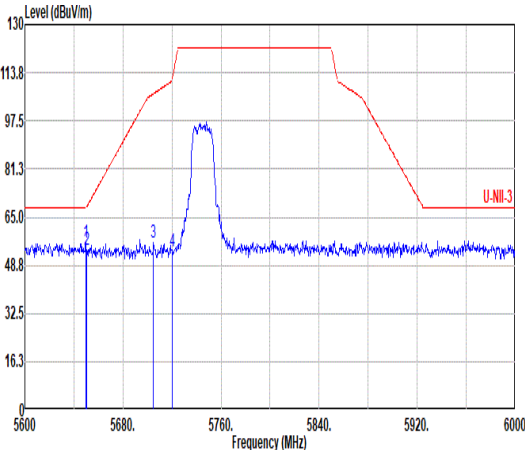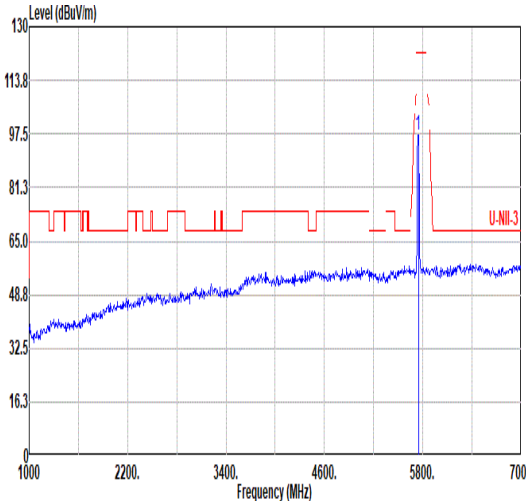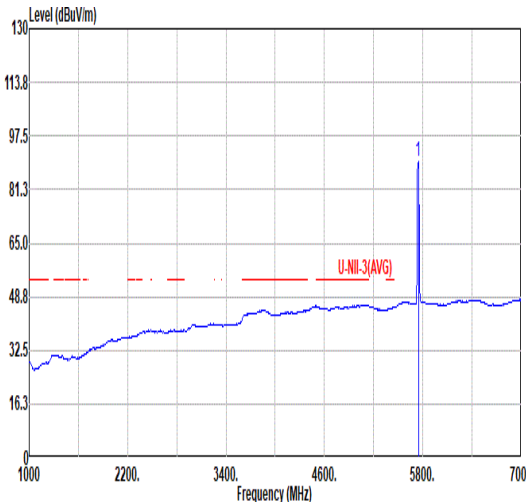

Mode	1																																																																																											
	Band Edge																																																																																											
	U-NII-3_5.725-5.85_802.11a_CH149_5745MHz																																																																																											
Pol.	Horizontal																																																																																											
Peak																																																																																												
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5649.60</td><td>56.18</td><td>68.20</td><td>-12.02</td><td>38.01</td><td>34.50</td><td>13.01</td><td>29.34</td><td>0.00</td><td>100</td><td>104 PEAK</td></tr><tr><td>2</td><td>5650.40</td><td>53.76</td><td>68.50</td><td>-14.74</td><td>35.59</td><td>34.50</td><td>13.01</td><td>29.34</td><td>0.00</td><td>100</td><td>104 PEAK</td></tr><tr><td>3</td><td>5704.80</td><td>56.28</td><td>106.65</td><td>-50.37</td><td>38.16</td><td>34.61</td><td>13.13</td><td>29.62</td><td>0.00</td><td>100</td><td>104 PEAK</td></tr><tr><td>4</td><td>5720.00</td><td>53.42</td><td>110.90</td><td>-57.48</td><td>35.21</td><td>34.64</td><td>13.26</td><td>29.69</td><td>0.00</td><td>100</td><td>104 PEAK</td></tr></table>												Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5649.60	56.18	68.20	-12.02	38.01	34.50	13.01	29.34	0.00	100	104 PEAK	2	5650.40	53.76	68.50	-14.74	35.59	34.50	13.01	29.34	0.00	100	104 PEAK	3	5704.80	56.28	106.65	-50.37	38.16	34.61	13.13	29.62	0.00	100	104 PEAK	4	5720.00	53.42	110.90	-57.48	35.21	34.64	13.26	29.69	0.00	100	104 PEAK
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																		
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																		
1	5649.60	56.18	68.20	-12.02	38.01	34.50	13.01	29.34	0.00	100	104 PEAK																																																																																	
2	5650.40	53.76	68.50	-14.74	35.59	34.50	13.01	29.34	0.00	100	104 PEAK																																																																																	
3	5704.80	56.28	106.65	-50.37	38.16	34.61	13.13	29.62	0.00	100	104 PEAK																																																																																	
4	5720.00	53.42	110.90	-57.48	35.21	34.64	13.26	29.69	0.00	100	104 PEAK																																																																																	
Fundamental																																																																																												
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5745.00</td><td>97.11</td><td>-----</td><td>-----</td><td>78.79</td><td>34.68</td><td>13.43</td><td>29.79</td><td>0.00</td><td>100</td><td>104 PEAK</td></tr></table>												Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5745.00	97.11	-----	-----	78.79	34.68	13.43	29.79	0.00	100	104 PEAK																																				
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																		
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																		
1	5745.00	97.11	-----	-----	78.79	34.68	13.43	29.79	0.00	100	104 PEAK																																																																																	
Avg	Blank																																																																																											
																																																																																												
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5745.00</td><td>89.57</td><td>-----</td><td>-----</td><td>71.21</td><td>34.69</td><td>13.49</td><td>29.82</td><td>0.00</td><td>100</td><td>104 AVERAGE</td></tr></table>												Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5745.00	89.57	-----	-----	71.21	34.69	13.49	29.82	0.00	100	104 AVERAGE																																				
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																		
1	5745.00	89.57	-----	-----	71.21	34.69	13.49	29.82	0.00	100	104 AVERAGE																																																																																	

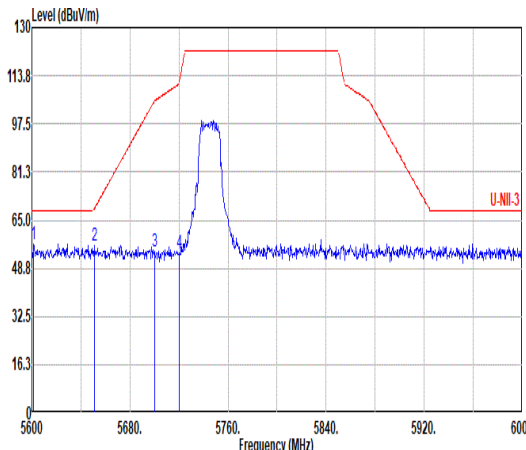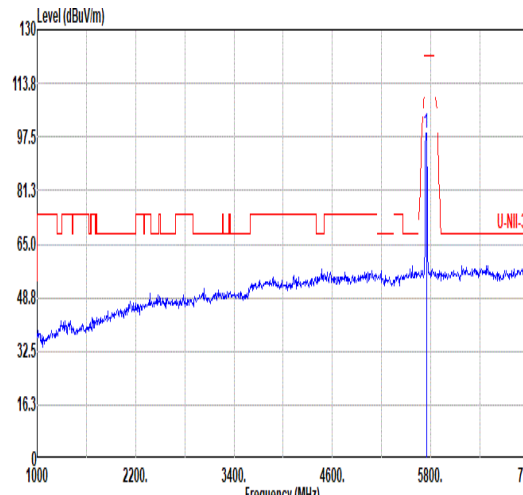
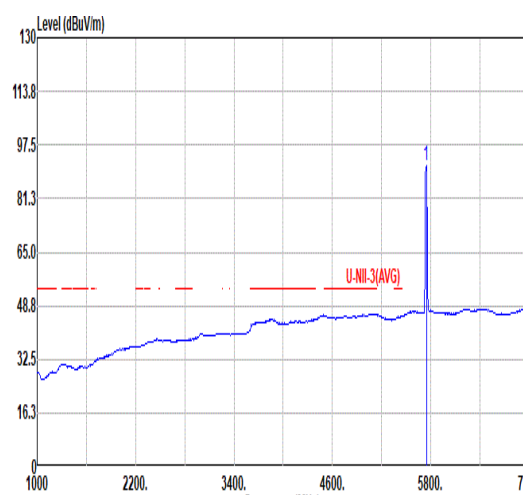


		1																																																																																																																
Mode	Band Edge																																																																																																																	
	U-NII-3_5.725-5.85_802.11a_CH149_5745MHz																																																																																																																	
Pol.	Vertical					Fundamental																																																																																																												
Peak																																																																																																																		
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg	1	5601.60	56.96	68.20	-11.24	38.66	34.50	13.15	29.35	0.00	230	360	PEAK	2	5658.80	56.63	68.80	-12.17	38.46	34.50	13.01	29.34	0.00	230	360	PEAK	3	5700.40	54.50	105.41	-50.91	36.40	34.60	13.09	29.59	0.00	230	360	PEAK	4	5720.00	54.14	110.90	-56.76	35.93	34.64	13.26	29.69	0.00	230	360	PEAK	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5745.00</td><td>98.75</td><td>-----</td><td>-----</td><td>80.43</td><td>34.68</td><td>13.43</td><td>29.79</td><td>0.00</td><td>230</td><td>360</td><td>PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg	1	5745.00	98.75	-----	-----	80.43	34.68	13.43	29.79	0.00	230	360
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg																																																																																																								
1	5601.60	56.96	68.20	-11.24	38.66	34.50	13.15	29.35	0.00	230	360	PEAK																																																																																																						
2	5658.80	56.63	68.80	-12.17	38.46	34.50	13.01	29.34	0.00	230	360	PEAK																																																																																																						
3	5700.40	54.50	105.41	-50.91	36.40	34.60	13.09	29.59	0.00	230	360	PEAK																																																																																																						
4	5720.00	54.14	110.90	-56.76	35.93	34.64	13.26	29.69	0.00	230	360	PEAK																																																																																																						
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg																																																																																																								
1	5745.00	98.75	-----	-----	80.43	34.68	13.43	29.79	0.00	230	360	PEAK																																																																																																						
Avg	Blank																																																																																																																	
						<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5745.00</td><td>91.31</td><td>-----</td><td>-----</td><td>72.95</td><td>34.69</td><td>13.49</td><td>29.82</td><td>0.00</td><td>230</td><td>360</td><td>AVERAGE</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg	1	5745.00	91.31	-----	-----	72.95	34.69	13.49	29.82	0.00	230	360	AVERAGE																																																																				
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg																																																																																																								
1	5745.00	91.31	-----	-----	72.95	34.69	13.49	29.82	0.00	230	360	AVERAGE																																																																																																						






Mode	1																																																																							
	Harmonic																																																																							
	U-NII-3_5.725-5.85_802.11a_CH149_5745MHz																																																																							
Pol.	Horizontal						Vertical																																																																	
Peak Avg																																																																								
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="3">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>11490.00</td><td>46.40</td><td>74.00</td><td>-27.60</td><td>53.25</td><td>38.30</td><td>18.74</td><td>63.89</td><td>0.00</td><td>300</td><td>0 PEAK</td></tr><tr><td>2</td><td>11490.00</td><td>36.05</td><td>54.00</td><td>-17.95</td><td>42.92</td><td>38.30</td><td>18.73</td><td>63.90</td><td>0.00</td><td>300</td><td>0 AVERAGE</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark			Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	11490.00	46.40	74.00	-27.60	53.25	38.30	18.74	63.89	0.00	300	0 PEAK	2	11490.00	36.05	54.00	-17.95	42.92	38.30	18.73	63.90	0.00	300	0 AVERAGE
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																													
1	11490.00	46.40	74.00	-27.60	53.25	38.30	18.74	63.89	0.00	300	0 PEAK																																																													
2	11490.00	36.05	54.00	-17.95	42.92	38.30	18.73	63.90	0.00	300	0 AVERAGE																																																													
<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="3">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>11490.00</td><td>46.59</td><td>74.00</td><td>-27.41</td><td>53.44</td><td>38.30</td><td>18.74</td><td>63.89</td><td>0.00</td><td>100</td><td>0 PEAK</td></tr><tr><td>2</td><td>11490.00</td><td>36.01</td><td>54.00</td><td>-17.99</td><td>42.86</td><td>38.30</td><td>18.74</td><td>63.89</td><td>0.00</td><td>100</td><td>0 AVERAGE</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark			Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	11490.00	46.59	74.00	-27.41	53.44	38.30	18.74	63.89	0.00	100	0 PEAK	2	11490.00	36.01	54.00	-17.99	42.86	38.30	18.74	63.89	0.00	100	0 AVERAGE	
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																													
1	11490.00	46.59	74.00	-27.41	53.44	38.30	18.74	63.89	0.00	100	0 PEAK																																																													
2	11490.00	36.01	54.00	-17.99	42.86	38.30	18.74	63.89	0.00	100	0 AVERAGE																																																													

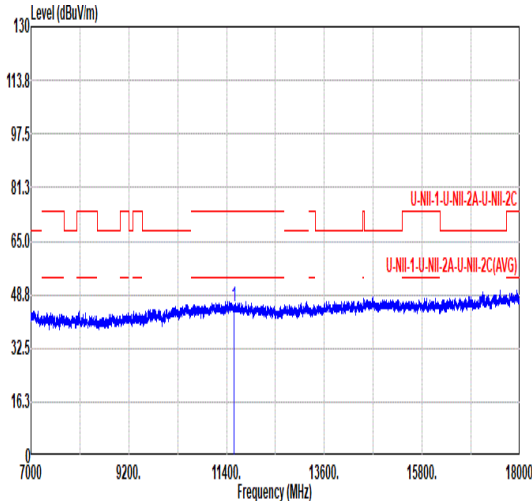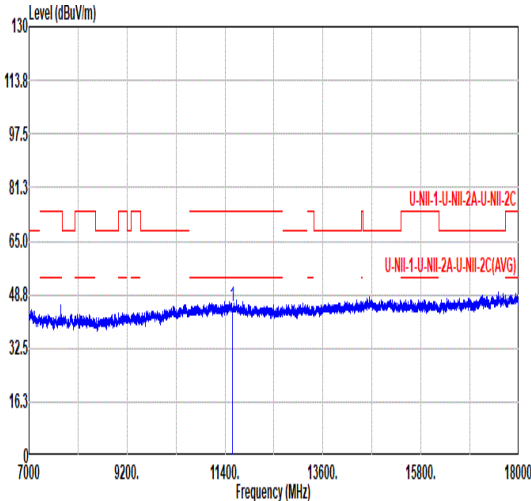

Mode	2																																																																																																										
	Harmonic																																																																																																										
	U-NII-3_5.725-5.85_802.11a_CH157_5785MHz																																																																																																										
Pol.	Horizontal						Vertical																																																																																																				
Peak Avg																																																																																																											
	<table><thead><tr><th colspan="2"></th><th colspan="2">Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th rowspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>11570.00</td><td>44.90</td><td>74.00</td><td>-29.10</td><td>51.89</td><td>38.44</td><td>18.63</td><td>64.06</td><td>0.00</td><td>--</td><td>--</td><td>PEAK</td></tr></tbody></table>								Limit		Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	11570.00	44.90	74.00	-29.10	51.89	38.44	18.63	64.06	0.00	--	--	PEAK	<table><thead><tr><th colspan="2"></th><th colspan="2">Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th rowspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>11570.00</td><td>45.18</td><td>74.00</td><td>-28.82</td><td>52.17</td><td>38.44</td><td>18.63</td><td>64.06</td><td>0.00</td><td>--</td><td>--</td><td>PEAK</td></tr></tbody></table>								Limit		Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	11570.00	45.18	74.00	-28.82	52.17	38.44	18.63	64.06	0.00	--	--
		Limit		Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																
1	11570.00	44.90	74.00	-29.10	51.89	38.44	18.63	64.06	0.00	--	--	PEAK																																																																																															
		Limit		Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																
1	11570.00	45.18	74.00	-28.82	52.17	38.44	18.63	64.06	0.00	--	--	PEAK																																																																																															

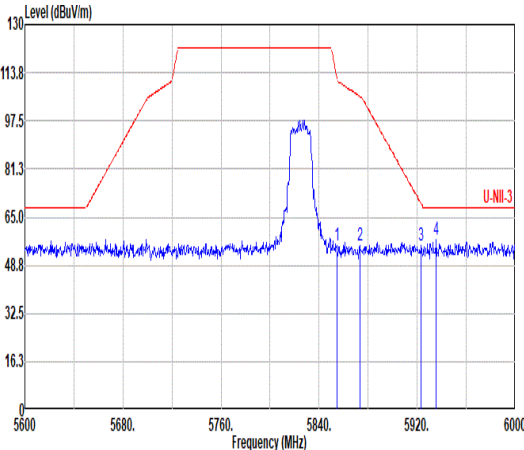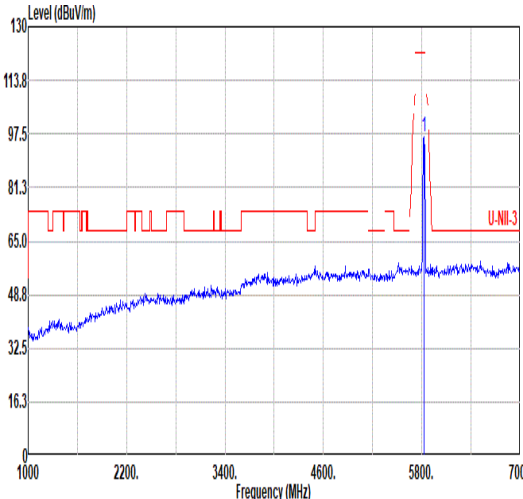
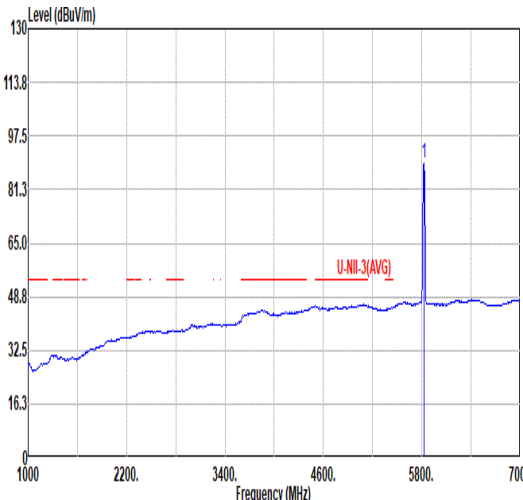


		3																																																																																																																																								
Mode	Band Edge																																																																																																																																									
	U-NII-3_5.725-5.85_802.11a_CH165_5825MHz																																																																																																																																									
Pol.	Horizontal					Fundamental																																																																																																																																				
Peak																																																																																																																																										
	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5854.40</td><td>55.45</td><td>112.27</td><td>-56.82</td><td>37.02</td><td>34.92</td><td>13.88</td><td>30.37</td><td>0.00</td><td>136</td><td>90</td><td>PEAK</td></tr><tr><td>2</td><td>5873.20</td><td>55.49</td><td>105.80</td><td>-50.31</td><td>37.03</td><td>34.99</td><td>13.85</td><td>30.38</td><td>0.00</td><td>136</td><td>90</td><td>PEAK</td></tr><tr><td>3</td><td>5923.20</td><td>55.53</td><td>69.53</td><td>-14.00</td><td>37.05</td><td>35.15</td><td>13.73</td><td>30.40</td><td>0.00</td><td>136</td><td>90</td><td>PEAK</td></tr><tr><td>4</td><td>5935.60</td><td>57.44</td><td>68.20</td><td>-10.76</td><td>38.99</td><td>35.17</td><td>13.69</td><td>30.41</td><td>0.00</td><td>136</td><td>90</td><td>PEAK</td></tr></tbody></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5854.40	55.45	112.27	-56.82	37.02	34.92	13.88	30.37	0.00	136	90	PEAK	2	5873.20	55.49	105.80	-50.31	37.03	34.99	13.85	30.38	0.00	136	90	PEAK	3	5923.20	55.53	69.53	-14.00	37.05	35.15	13.73	30.40	0.00	136	90	PEAK	4	5935.60	57.44	68.20	-10.76	38.99	35.17	13.69	30.41	0.00	136	90	PEAK	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5825.00</td><td>96.79</td><td>-----</td><td>-----</td><td>78.02</td><td>34.85</td><td>14.14</td><td>30.22</td><td>0.00</td><td>136</td><td>90</td><td>PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5825.00	96.79	-----	-----	78.02	34.85	14.14	30.22	0.00	136	90
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																	
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																
1	5854.40	55.45	112.27	-56.82	37.02	34.92	13.88	30.37	0.00	136	90	PEAK																																																																																																																														
2	5873.20	55.49	105.80	-50.31	37.03	34.99	13.85	30.38	0.00	136	90	PEAK																																																																																																																														
3	5923.20	55.53	69.53	-14.00	37.05	35.15	13.73	30.40	0.00	136	90	PEAK																																																																																																																														
4	5935.60	57.44	68.20	-10.76	38.99	35.17	13.69	30.41	0.00	136	90	PEAK																																																																																																																														
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																	
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																															
1	5825.00	96.79	-----	-----	78.02	34.85	14.14	30.22	0.00	136	90	PEAK																																																																																																																														
Avg	Blank																																																																																																																																									
						<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5825.00</td><td>89.37</td><td>-----</td><td>-----</td><td>70.60</td><td>34.85</td><td>14.14</td><td>30.22</td><td>0.00</td><td>136</td><td>90</td><td>AVERAGE</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5825.00	89.37	-----	-----	70.60	34.85	14.14	30.22	0.00	136	90	AVERAGE																																																																																		
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																	
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																															
1	5825.00	89.37	-----	-----	70.60	34.85	14.14	30.22	0.00	136	90	AVERAGE																																																																																																																														



Mode	3																																																																																																																																										
	Band Edge																																																																																																																																										
	U-NII-3_5.725-5.85_802.11a_CH165_5825MHz																																																																																																																																										
Pol.	Vertical						Fundamental																																																																																																																																				
Peak																																																																																																																																											
	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5854.80</td><td>52.78</td><td>111.36</td><td>-58.58</td><td>34.35</td><td>34.92</td><td>13.88</td><td>30.37</td><td>0.00</td><td>223</td><td>360</td><td>PEAK</td></tr><tr><td>2</td><td>5874.40</td><td>55.39</td><td>105.47</td><td>-50.08</td><td>36.92</td><td>35.00</td><td>13.85</td><td>30.38</td><td>0.00</td><td>223</td><td>360</td><td>PEAK</td></tr><tr><td>3</td><td>5924.80</td><td>54.50</td><td>68.35</td><td>-13.85</td><td>36.03</td><td>35.15</td><td>13.73</td><td>30.41</td><td>0.00</td><td>223</td><td>360</td><td>PEAK</td></tr><tr><td>4</td><td>5926.40</td><td>57.35</td><td>68.20</td><td>-10.85</td><td>38.89</td><td>35.15</td><td>13.72</td><td>30.41</td><td>0.00</td><td>223</td><td>360</td><td>PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5854.80	52.78	111.36	-58.58	34.35	34.92	13.88	30.37	0.00	223	360	PEAK	2	5874.40	55.39	105.47	-50.08	36.92	35.00	13.85	30.38	0.00	223	360	PEAK	3	5924.80	54.50	68.35	-13.85	36.03	35.15	13.73	30.41	0.00	223	360	PEAK	4	5926.40	57.35	68.20	-10.85	38.89	35.15	13.72	30.41	0.00	223	360	PEAK	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5825.00</td><td>97.70</td><td>-----</td><td>-----</td><td>78.93</td><td>34.85</td><td>14.14</td><td>30.22</td><td>0.00</td><td>223</td><td>360</td><td>PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5825.00	97.70	-----	-----	78.93	34.85	14.14	30.22	0.00	223	360
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																	
1	5854.80	52.78	111.36	-58.58	34.35	34.92	13.88	30.37	0.00	223	360	PEAK																																																																																																																															
2	5874.40	55.39	105.47	-50.08	36.92	35.00	13.85	30.38	0.00	223	360	PEAK																																																																																																																															
3	5924.80	54.50	68.35	-13.85	36.03	35.15	13.73	30.41	0.00	223	360	PEAK																																																																																																																															
4	5926.40	57.35	68.20	-10.85	38.89	35.15	13.72	30.41	0.00	223	360	PEAK																																																																																																																															
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																
1	5825.00	97.70	-----	-----	78.93	34.85	14.14	30.22	0.00	223	360	PEAK																																																																																																																															
Avg	Blank																																																																																																																																										
							<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5825.00</td><td>90.34</td><td>-----</td><td>-----</td><td>71.57</td><td>34.85</td><td>14.14</td><td>30.22</td><td>0.00</td><td>223</td><td>360</td><td>AVERAGE</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5825.00	90.34	-----	-----	71.57	34.85	14.14	30.22	0.00	223	360	AVERAGE																																																																																		
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																
1	5825.00	90.34	-----	-----	71.57	34.85	14.14	30.22	0.00	223	360	AVERAGE																																																																																																																															

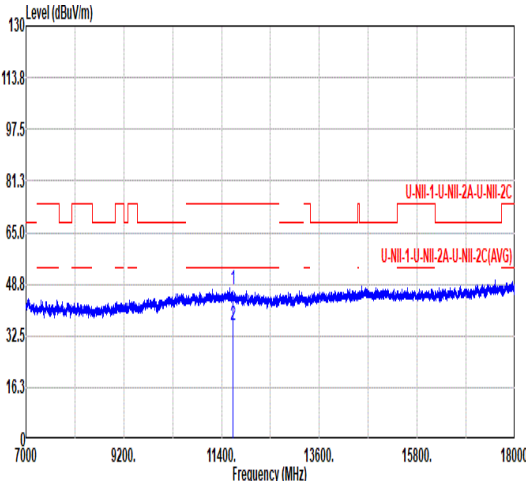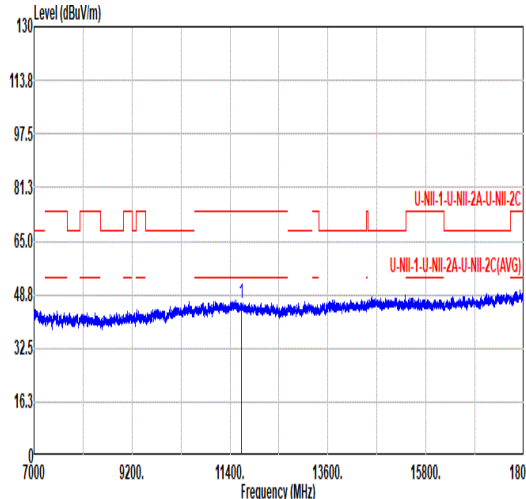

Mode	3																																																																							
	Harmonic																																																																							
	U-NII-3_5.725-5.85_802.11a_CH165_5825MHz																																																																							
Pol.	Horizontal						Vertical																																																																	
Peak Avg																																																																								
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="3">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1 11650.00</td><td>47.30</td><td>74.00 -26.70</td><td>54.40</td><td>38.50</td><td>18.67</td><td>64.27</td><td>0.00</td><td>0</td><td>0</td><td>0</td><td>PEAK</td></tr><tr><td>2 11650.00</td><td>35.97</td><td>54.00 -18.03</td><td>43.07</td><td>38.50</td><td>18.68</td><td>64.28</td><td>0.00</td><td>0</td><td>0</td><td>0</td><td>AVERAGE</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark			Freq	Level	Line Margin	Level Factor	Loss Factor	Factor							MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1 11650.00	47.30	74.00 -26.70	54.40	38.50	18.67	64.27	0.00	0	0	0	PEAK	2 11650.00	35.97	54.00 -18.03	43.07	38.50	18.68	64.28	0.00	0	0	0	AVERAGE
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																														
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																														
1 11650.00	47.30	74.00 -26.70	54.40	38.50	18.67	64.27	0.00	0	0	0	PEAK																																																													
2 11650.00	35.97	54.00 -18.03	43.07	38.50	18.68	64.28	0.00	0	0	0	AVERAGE																																																													
																																																																								
<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="3">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1 11650.00</td><td>45.95</td><td>74.00 -28.05</td><td>53.05</td><td>38.50</td><td>18.67</td><td>64.27</td><td>0.00</td><td>--</td><td>--</td><td>--</td><td>PEAK</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark			Freq	Level	Line Margin	Level Factor	Loss Factor	Factor							MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1 11650.00	45.95	74.00 -28.05	53.05	38.50	18.67	64.27	0.00	--	--	--	PEAK													
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																															
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																														
1 11650.00	45.95	74.00 -28.05	53.05	38.50	18.67	64.27	0.00	--	--	--	PEAK																																																													



4

Mode

Band Edge


U-NII-3_5.725-5.85_802.11n HT20_CH149_5745MHz

Pol.


Horizontal

Fundamental

Peak

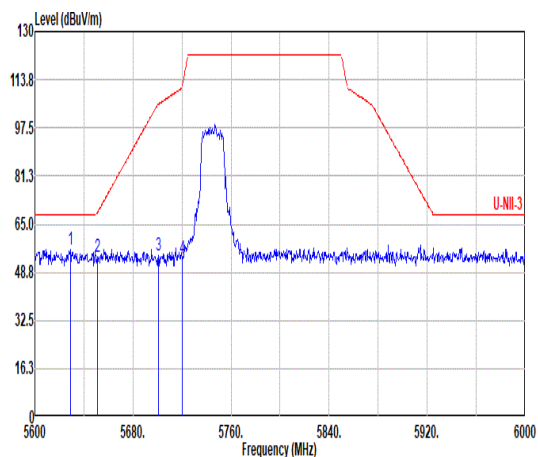


	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm
1	5628.80	56.60	68.20	-11.60	38.34	34.50	13.07	29.31	0.00
2	5658.80	53.90	68.80	-14.90	35.73	34.50	13.01	29.34	0.00
3	5700.80	54.40	105.52	-51.12	36.30	34.60	13.10	29.60	0.00
4	5720.80	53.58	110.90	-57.32	35.37	34.64	13.26	29.69	0.00

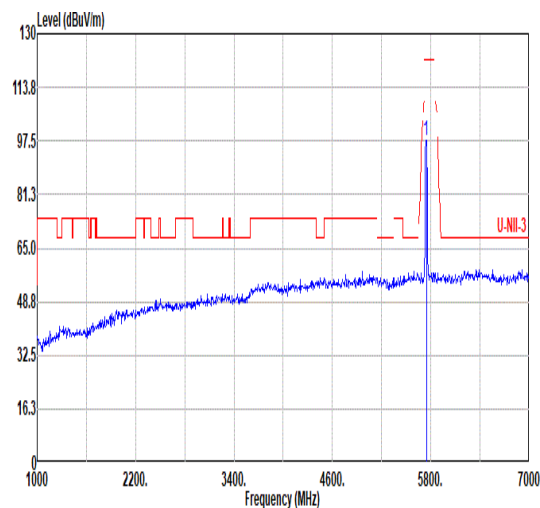

	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm
1	5745.00	97.82	-----	-----	79.50	34.68	13.43	29.79	0.00

Avg

Blank

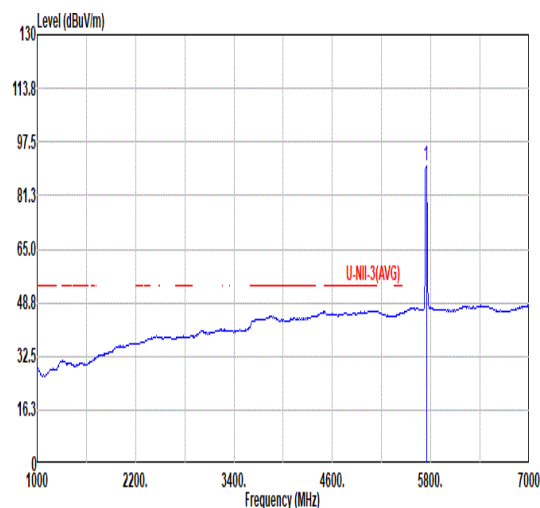

	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm
1	5745.00	90.33	-----	-----	71.97	34.69	13.49	29.82	0.00



4

Mode

Band Edge


U-NII-3_5.725-5.85_802.11n HT20_CH149_5745MHz

Pol.


Vertical

Fundamental

Peak

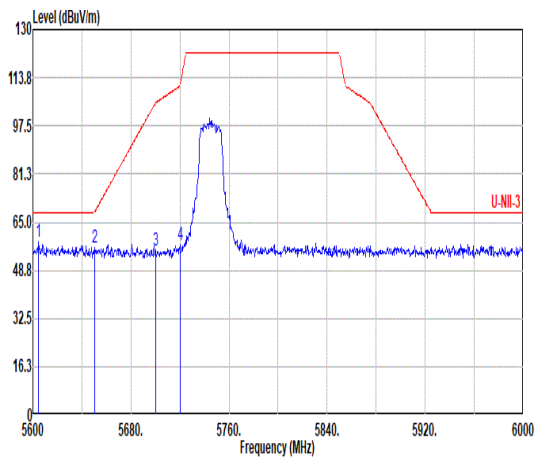


	Limit		Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		
	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		
1	5684.40	58.28	68.20	-9.92	39.99	34.50	13.14	29.35	0.00	253	107	PEAK
2	5658.40	56.40	68.50	-12.10	38.23	34.50	13.01	29.34	0.00	253	107	PEAK
3	5700.40	55.66	105.41	-49.75	37.56	34.60	13.09	29.59	0.00	253	107	PEAK
4	5720.00	57.49	110.90	-53.41	39.28	34.64	13.26	29.69	0.00	253	107	PEAK

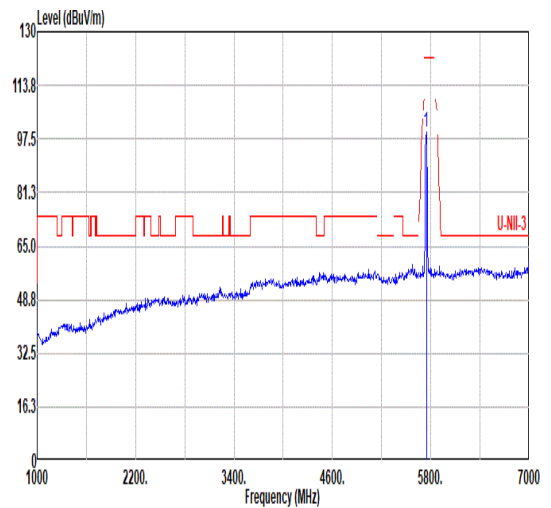

		Limit		Read	Ant	Cable	Preamp	Aux	APos	TPos	
	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor			Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg
1	5745.00	99.36	-----	-----	81.01	34.69	13.48	29.82	0.00	253	107 PEAK


Avg

Blank


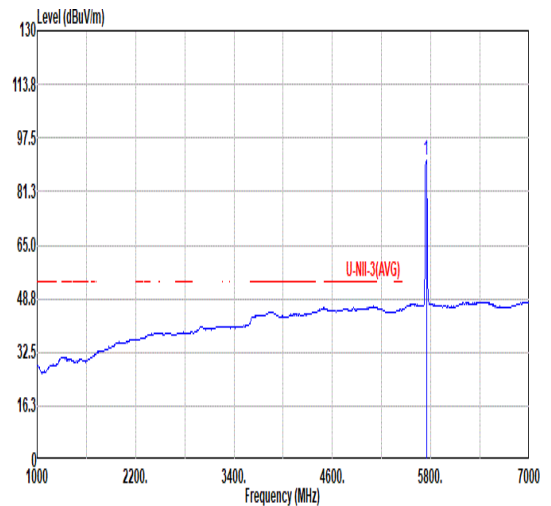


	Limit		Read	Ant	Cable	Preamp	Aux	APos	TPos			
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor			Remark		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	
1	5745.00	90.81	-----	-----	72.46	34.69	13.48	29.82	0.00	253	107	AVERAGE



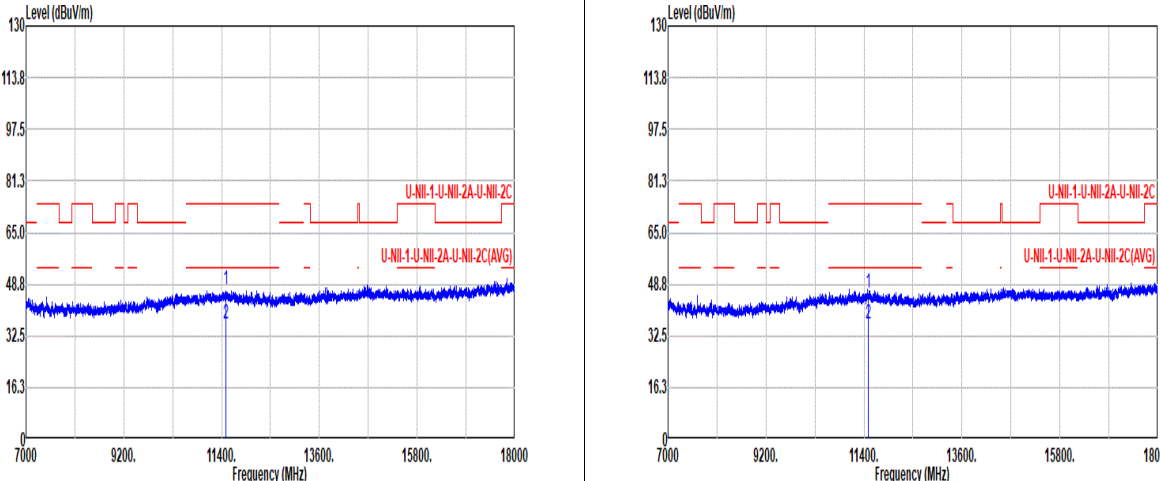


Mode	4																																																																											
	Harmonic																																																																											
	U-NII-3_5.725-5.85_802.11n HT20_CH149_5745MHz																																																																											
Pol.	Horizontal						Vertical																																																																					
Peak Avg																																																																												
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="3">Remark</th></tr><tr><th></th><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>11490.00</td><td>46.85</td><td>74.00</td><td>-27.15</td><td>53.70</td><td>38.30</td><td>18.74</td><td>63.89</td><td>0.00</td><td>100</td><td>360</td><td>PEAK</td></tr><tr><td>2</td><td>11490.00</td><td>36.15</td><td>54.00</td><td>-17.85</td><td>43.02</td><td>38.30</td><td>18.73</td><td>63.90</td><td>0.00</td><td>100</td><td>360</td><td>AVERAGE</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark				Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	11490.00	46.85	74.00	-27.15	53.70	38.30	18.74	63.89	0.00	100	360	PEAK	2	11490.00	36.15	54.00	-17.85	43.02	38.30	18.73	63.90	0.00	100	360	AVERAGE
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																		
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																	
1	11490.00	46.85	74.00	-27.15	53.70	38.30	18.74	63.89	0.00	100	360	PEAK																																																																
2	11490.00	36.15	54.00	-17.85	43.02	38.30	18.73	63.90	0.00	100	360	AVERAGE																																																																
<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="3">Remark</th></tr><tr><th></th><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>11490.00</td><td>46.32</td><td>74.00</td><td>-27.68</td><td>53.17</td><td>38.30</td><td>18.74</td><td>63.89</td><td>0.00</td><td>300</td><td>360</td><td>PEAK</td></tr><tr><td>2</td><td>11490.00</td><td>36.09</td><td>54.00</td><td>-17.91</td><td>42.96</td><td>38.30</td><td>18.73</td><td>63.90</td><td>0.00</td><td>300</td><td>360</td><td>AVERAGE</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark				Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	11490.00	46.32	74.00	-27.68	53.17	38.30	18.74	63.89	0.00	300	360	PEAK	2	11490.00	36.09	54.00	-17.91	42.96	38.30	18.73	63.90	0.00	300	360	AVERAGE	
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																			
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																	
1	11490.00	46.32	74.00	-27.68	53.17	38.30	18.74	63.89	0.00	300	360	PEAK																																																																
2	11490.00	36.09	54.00	-17.91	42.96	38.30	18.73	63.90	0.00	300	360	AVERAGE																																																																

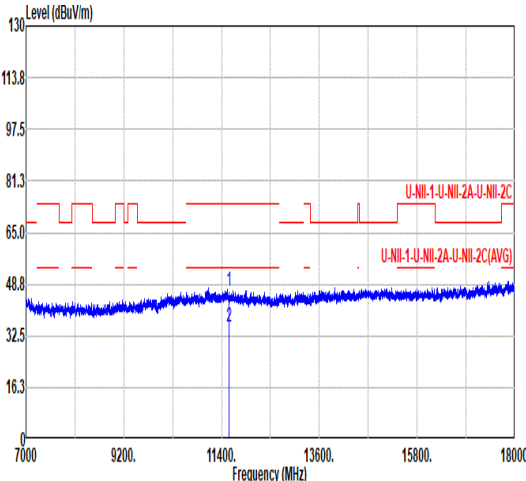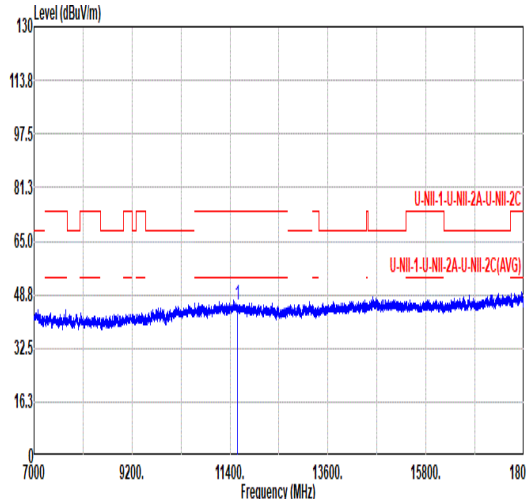

Mode	5																																																																				
	Harmonic																																																																				
	U-NII-3_5.725-5.85_802.11n HT20_CH157_5785MHz																																																																				
Pol.	Horizontal						Vertical																																																														
Peak Avg																																																																					
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>11570.00</td><td>46.50</td><td>74.00</td><td>-27.50</td><td>53.49</td><td>38.44</td><td>18.63</td><td>64.06</td><td>0.00</td><td>100</td><td>360</td><td>PEAK</td></tr><tr><td>2</td><td>11570.00</td><td>35.42</td><td>54.00</td><td>-18.58</td><td>42.40</td><td>38.43</td><td>18.64</td><td>64.05</td><td>0.00</td><td>100</td><td>360</td><td>AVERAGE</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	11570.00	46.50	74.00	-27.50	53.49	38.44	18.63	64.06	0.00	100	360	PEAK	2	11570.00	35.42	54.00	-18.58	42.40	38.43	18.64	64.05	0.00	100	360	AVERAGE
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																											
1	11570.00	46.50	74.00	-27.50	53.49	38.44	18.63	64.06	0.00	100	360	PEAK																																																									
2	11570.00	35.42	54.00	-18.58	42.40	38.43	18.64	64.05	0.00	100	360	AVERAGE																																																									
<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>11570.00</td><td>45.61</td><td>74.00</td><td>-28.39</td><td>52.60</td><td>38.44</td><td>18.63</td><td>64.06</td><td>0.00</td><td>--</td><td>--</td><td>PEAK</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	11570.00	45.61	74.00	-28.39	52.60	38.44	18.63	64.06	0.00	--	--	PEAK													
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																										
1	11570.00	45.61	74.00	-28.39	52.60	38.44	18.63	64.06	0.00	--	--	PEAK																																																									

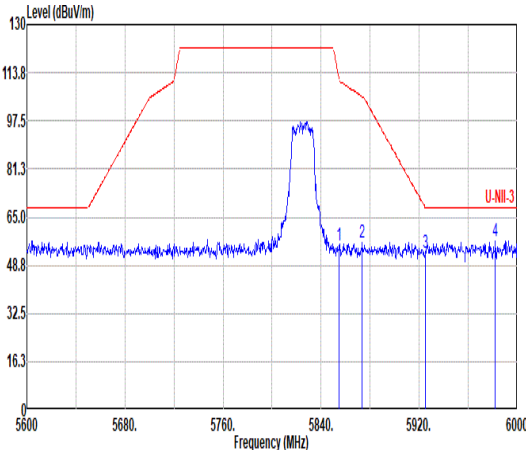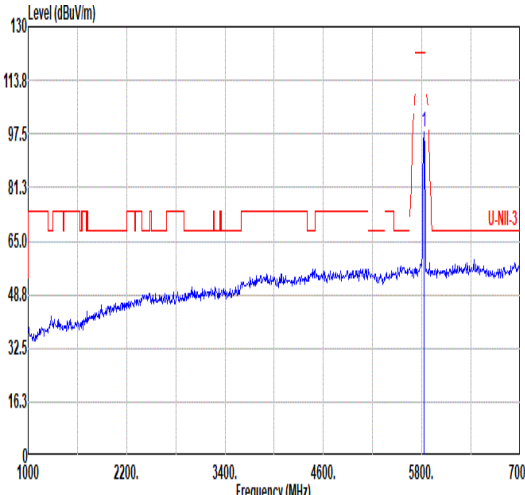
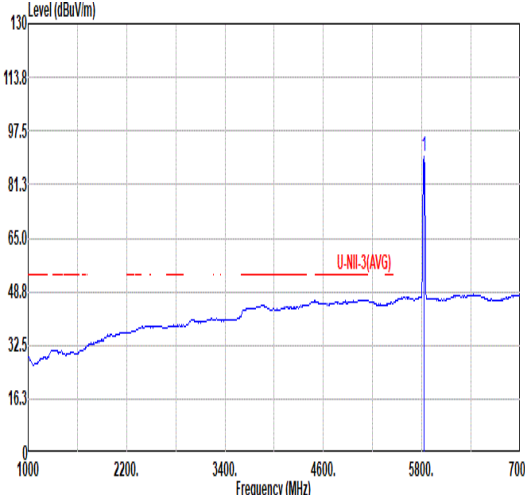


		6																																																																																					
Mode	Band Edge																																																																																						
	U-NII-3_5.725-5.85_802.11n HT20_CH165_5825MHz																																																																																						
Pol.	Horizontal																																																																																						
Peak																																																																																							
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5854.00</td><td>55.28</td><td>111.36</td><td>-56.08</td><td>36.85</td><td>34.92</td><td>13.88</td><td>30.37</td><td>0.00</td><td>149 90 PEAK</td></tr><tr><td>2</td><td>5873.60</td><td>56.46</td><td>105.69</td><td>-49.23</td><td>38.00</td><td>34.99</td><td>13.85</td><td>30.38</td><td>0.00</td><td>149 90 PEAK</td></tr><tr><td>3</td><td>5924.00</td><td>52.84</td><td>68.35</td><td>-15.51</td><td>34.37</td><td>35.15</td><td>13.73</td><td>30.41</td><td>0.00</td><td>149 90 PEAK</td></tr><tr><td>4</td><td>5982.00</td><td>56.98</td><td>68.20</td><td>-11.22</td><td>38.56</td><td>35.26</td><td>13.59</td><td>30.43</td><td>0.00</td><td>149 90 PEAK</td></tr></table>												Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5854.00	55.28	111.36	-56.08	36.85	34.92	13.88	30.37	0.00	149 90 PEAK	2	5873.60	56.46	105.69	-49.23	38.00	34.99	13.85	30.38	0.00	149 90 PEAK	3	5924.00	52.84	68.35	-15.51	34.37	35.15	13.73	30.41	0.00	149 90 PEAK	4	5982.00	56.98	68.20	-11.22	38.56	35.26	13.59	30.43	0.00
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																															
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																													
1	5854.00	55.28	111.36	-56.08	36.85	34.92	13.88	30.37	0.00	149 90 PEAK																																																																													
2	5873.60	56.46	105.69	-49.23	38.00	34.99	13.85	30.38	0.00	149 90 PEAK																																																																													
3	5924.00	52.84	68.35	-15.51	34.37	35.15	13.73	30.41	0.00	149 90 PEAK																																																																													
4	5982.00	56.98	68.20	-11.22	38.56	35.26	13.59	30.43	0.00	149 90 PEAK																																																																													
Fundamental																																																																																							
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5825.00</td><td>98.00</td><td>-----</td><td>-----</td><td>79.31</td><td>34.86</td><td>14.08</td><td>30.25</td><td>0.00</td><td>149 90 PEAK</td></tr></table>												Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5825.00	98.00	-----	-----	79.31	34.86	14.08	30.25	0.00	149 90 PEAK																															
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																															
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																												
1	5825.00	98.00	-----	-----	79.31	34.86	14.08	30.25	0.00	149 90 PEAK																																																																													
Avg	Blank																																																																																						
																																																																																							
<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5825.00</td><td>89.66</td><td>-----</td><td>-----</td><td>70.89</td><td>34.85</td><td>14.14</td><td>30.22</td><td>0.00</td><td>149 90 AVERAGE</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5825.00	89.66	-----	-----	70.89	34.85	14.14	30.22	0.00	149 90 AVERAGE																															
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																															
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																												
1	5825.00	89.66	-----	-----	70.89	34.85	14.14	30.22	0.00	149 90 AVERAGE																																																																													






		6																																																																																																																																											
Mode		Band Edge																																																																																																																																											
		U-NII-3_5.725-5.85_802.11n HT20_CH165_5825MHz																																																																																																																																											
Pol.		Fundamental																																																																																																																																											
Peak	Vertical	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5854.80</td><td>55.19</td><td>111.36</td><td>-56.17</td><td>36.76</td><td>34.92</td><td>13.88</td><td>30.37</td><td>0.00</td><td>223</td><td>360</td><td>PEAK</td></tr><tr><td>2</td><td>5874.40</td><td>55.87</td><td>105.47</td><td>-49.60</td><td>37.40</td><td>35.00</td><td>13.85</td><td>30.38</td><td>0.00</td><td>223</td><td>360</td><td>PEAK</td></tr><tr><td>3</td><td>5924.40</td><td>54.88</td><td>68.64</td><td>-13.76</td><td>36.40</td><td>35.15</td><td>13.73</td><td>30.40</td><td>0.00</td><td>223</td><td>360</td><td>PEAK</td></tr><tr><td>4</td><td>5999.60</td><td>57.77</td><td>68.20</td><td>-10.43</td><td>39.36</td><td>35.30</td><td>13.55</td><td>30.44</td><td>0.00</td><td>223</td><td>360</td><td>PEAK</td></tr></table>												Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5854.80	55.19	111.36	-56.17	36.76	34.92	13.88	30.37	0.00	223	360	PEAK	2	5874.40	55.87	105.47	-49.60	37.40	35.00	13.85	30.38	0.00	223	360	PEAK	3	5924.40	54.88	68.64	-13.76	36.40	35.15	13.73	30.40	0.00	223	360	PEAK	4	5999.60	57.77	68.20	-10.43	39.36	35.30	13.55	30.44	0.00	223	360	PEAK	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5825.00</td><td>90.22</td><td>-----</td><td>-----</td><td>79.45</td><td>34.85</td><td>14.14</td><td>30.22</td><td>0.00</td><td>223</td><td>360</td><td>PEAK</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5825.00	90.22	-----	-----	79.45	34.85	14.14	30.22	0.00	223	360	PEAK
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																					
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																			
1	5854.80	55.19	111.36	-56.17	36.76	34.92	13.88	30.37	0.00	223	360	PEAK																																																																																																																																	
2	5874.40	55.87	105.47	-49.60	37.40	35.00	13.85	30.38	0.00	223	360	PEAK																																																																																																																																	
3	5924.40	54.88	68.64	-13.76	36.40	35.15	13.73	30.40	0.00	223	360	PEAK																																																																																																																																	
4	5999.60	57.77	68.20	-10.43	39.36	35.30	13.55	30.44	0.00	223	360	PEAK																																																																																																																																	
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																					
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																		
1	5825.00	90.22	-----	-----	79.45	34.85	14.14	30.22	0.00	223	360	PEAK																																																																																																																																	
Avg	Blank	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5825.00</td><td>90.26</td><td>-----</td><td>-----</td><td>71.49</td><td>34.85</td><td>14.14</td><td>30.22</td><td>0.00</td><td>223</td><td>360</td><td>AVERAGE</td></tr></table>												Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5825.00	90.26	-----	-----	71.49	34.85	14.14	30.22	0.00	223	360	AVERAGE																																																																																				
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																					
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																		
1	5825.00	90.26	-----	-----	71.49	34.85	14.14	30.22	0.00	223	360	AVERAGE																																																																																																																																	

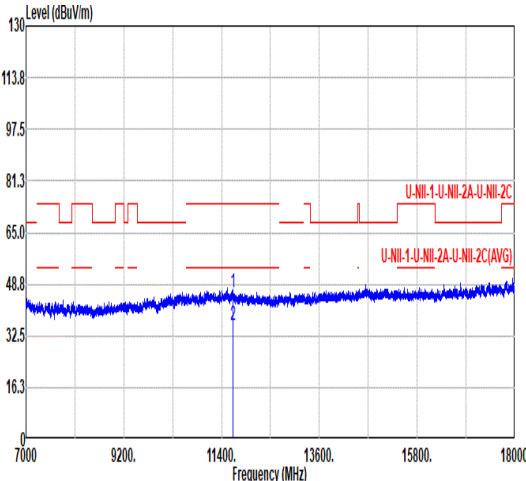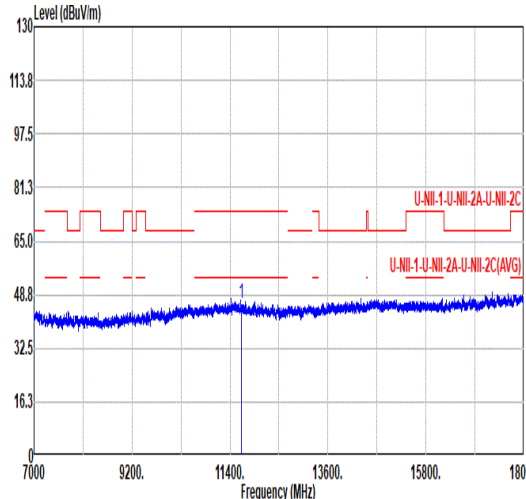


Mode	6																																																																				
	Harmonic																																																																				
	U-NII-3_5.725-5.85_802.11n HT20_CH165_5825MHz																																																																				
Pol.	Horizontal						Vertical																																																														
Peak Avg																																																																					
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>11650.00</td><td>46.10</td><td>74.00</td><td>-27.90</td><td>53.20</td><td>38.50</td><td>18.67</td><td>64.27</td><td>0.00</td><td>100</td><td>360</td><td>PEAK</td></tr><tr><td>2</td><td>11650.00</td><td>35.88</td><td>54.00</td><td>-18.12</td><td>42.98</td><td>38.50</td><td>18.67</td><td>64.27</td><td>0.00</td><td>100</td><td>360</td><td>AVERAGE</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	11650.00	46.10	74.00	-27.90	53.20	38.50	18.67	64.27	0.00	100	360	PEAK	2	11650.00	35.88	54.00	-18.12	42.98	38.50	18.67	64.27	0.00	100	360	AVERAGE
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																											
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor																																																															
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																											
1	11650.00	46.10	74.00	-27.90	53.20	38.50	18.67	64.27	0.00	100	360	PEAK																																																									
2	11650.00	35.88	54.00	-18.12	42.98	38.50	18.67	64.27	0.00	100	360	AVERAGE																																																									
<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>11650.00</td><td>45.91</td><td>74.00</td><td>-28.09</td><td>53.01</td><td>38.50</td><td>18.67</td><td>64.27</td><td>0.00</td><td>--</td><td>--</td><td>PEAK</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	11650.00	45.91	74.00	-28.09	53.01	38.50	18.67	64.27	0.00	--	--	PEAK													
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																												
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor																																																															
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																										
1	11650.00	45.91	74.00	-28.09	53.01	38.50	18.67	64.27	0.00	--	--	PEAK																																																									

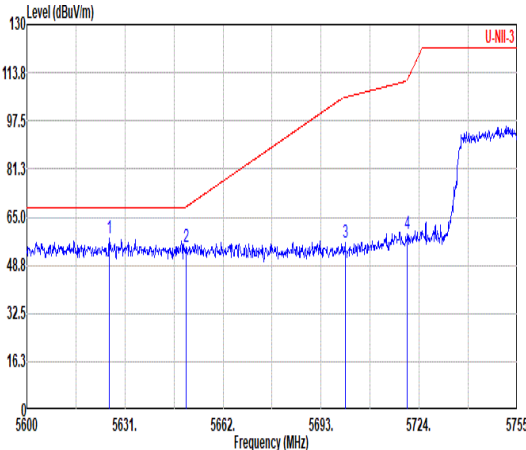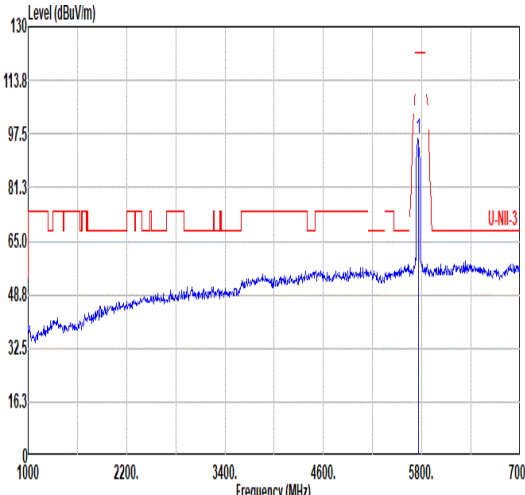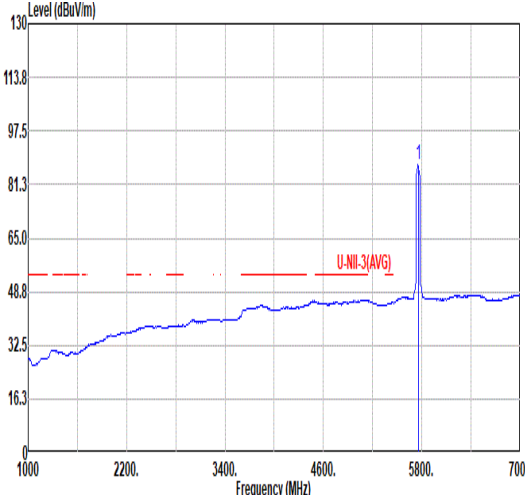

		7																																																																																					
Mode	Band Edge - L																																																																																						
	U-NII-3_5.725-5.85_802.11n HT40_CH151_5755MHz																																																																																						
Pol.	Horizontal																																																																																						
Peak																																																																																							
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5626.04</td><td>57.70</td><td>68.20</td><td>-10.50</td><td>39.43</td><td>34.50</td><td>13.08</td><td>29.31</td><td>0.00</td><td>141 93 PEAK</td></tr><tr><td>2</td><td>5658.22</td><td>54.76</td><td>68.36</td><td>-13.60</td><td>36.59</td><td>34.50</td><td>13.01</td><td>29.34</td><td>0.00</td><td>141 93 PEAK</td></tr><tr><td>3</td><td>5700.60</td><td>56.33</td><td>105.47</td><td>-49.14</td><td>38.22</td><td>34.60</td><td>13.10</td><td>29.59</td><td>0.00</td><td>141 93 PEAK</td></tr><tr><td>4</td><td>5728.28</td><td>59.24</td><td>111.54</td><td>-52.30</td><td>41.03</td><td>34.64</td><td>13.26</td><td>29.69</td><td>0.00</td><td>141 93 PEAK</td></tr></table>												Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5626.04	57.70	68.20	-10.50	39.43	34.50	13.08	29.31	0.00	141 93 PEAK	2	5658.22	54.76	68.36	-13.60	36.59	34.50	13.01	29.34	0.00	141 93 PEAK	3	5700.60	56.33	105.47	-49.14	38.22	34.60	13.10	29.59	0.00	141 93 PEAK	4	5728.28	59.24	111.54	-52.30	41.03	34.64	13.26	29.69	0.00
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																													
1	5626.04	57.70	68.20	-10.50	39.43	34.50	13.08	29.31	0.00	141 93 PEAK																																																																													
2	5658.22	54.76	68.36	-13.60	36.59	34.50	13.01	29.34	0.00	141 93 PEAK																																																																													
3	5700.60	56.33	105.47	-49.14	38.22	34.60	13.10	29.59	0.00	141 93 PEAK																																																																													
4	5728.28	59.24	111.54	-52.30	41.03	34.64	13.26	29.69	0.00	141 93 PEAK																																																																													
Fundamental																																																																																							
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5755.00</td><td>96.02</td><td>-----</td><td>-----</td><td>77.62</td><td>34.70</td><td>13.55</td><td>29.85</td><td>0.00</td><td>141 93 PEAK</td></tr></table>												Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5755.00	96.02	-----	-----	77.62	34.70	13.55	29.85	0.00	141 93 PEAK																																
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																													
1	5755.00	96.02	-----	-----	77.62	34.70	13.55	29.85	0.00	141 93 PEAK																																																																													
Avg	Blank																																																																																						
																																																																																							
<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5755.00</td><td>87.25</td><td>-----</td><td>-----</td><td>68.85</td><td>34.70</td><td>13.55</td><td>29.85</td><td>0.00</td><td>141 93 AVERAGE</td></tr></table>												Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5755.00	87.25	-----	-----	68.85	34.70	13.55	29.85	0.00	141 93 AVERAGE																																	
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																													
1	5755.00	87.25	-----	-----	68.85	34.70	13.55	29.85	0.00	141 93 AVERAGE																																																																													

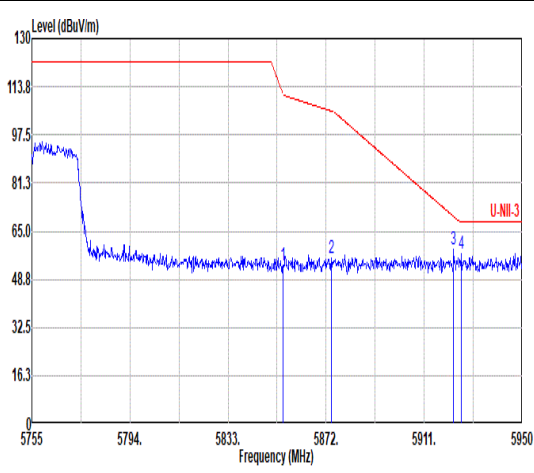

Mode	7																																																																																				
	Band Edge - R																																																																																				
	U-NII-3_5.725-5.85_802.11n HT40_CH151_5755MHz																																																																																				
Pol.	Horizontal	Fundamental																																																																																			
Peak	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5854.84</td><td>53.57</td><td>111.26</td><td>-57.69</td><td>35.14</td><td>34.92</td><td>13.88</td><td>30.37</td><td>0.00</td><td>141</td><td>93</td><td>PEAK</td></tr><tr><td>2</td><td>5873.95</td><td>56.15</td><td>105.59</td><td>-49.44</td><td>37.68</td><td>35.00</td><td>13.85</td><td>30.38</td><td>0.00</td><td>141</td><td>93</td><td>PEAK</td></tr><tr><td>3</td><td>5922.70</td><td>58.77</td><td>69.90</td><td>-11.13</td><td>40.29</td><td>35.15</td><td>13.73</td><td>30.40</td><td>0.00</td><td>141</td><td>93</td><td>PEAK</td></tr><tr><td>4</td><td>5925.82</td><td>57.33</td><td>68.20</td><td>-10.87</td><td>38.87</td><td>35.15</td><td>13.72</td><td>30.41</td><td>0.00</td><td>141</td><td>93</td><td>PEAK</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5854.84	53.57	111.26	-57.69	35.14	34.92	13.88	30.37	0.00	141	93	PEAK	2	5873.95	56.15	105.59	-49.44	37.68	35.00	13.85	30.38	0.00	141	93	PEAK	3	5922.70	58.77	69.90	-11.13	40.29	35.15	13.73	30.40	0.00	141	93	PEAK	4	5925.82	57.33	68.20	-10.87	38.87	35.15	13.72	30.41	0.00	141	93	PEAK	Blank
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																											
1	5854.84	53.57	111.26	-57.69	35.14	34.92	13.88	30.37	0.00	141	93	PEAK																																																																									
2	5873.95	56.15	105.59	-49.44	37.68	35.00	13.85	30.38	0.00	141	93	PEAK																																																																									
3	5922.70	58.77	69.90	-11.13	40.29	35.15	13.73	30.40	0.00	141	93	PEAK																																																																									
4	5925.82	57.33	68.20	-10.87	38.87	35.15	13.72	30.41	0.00	141	93	PEAK																																																																									



7

Mode

Band Edge - L



U-NII-3_5.725-5.85_802.11n HT40_CH151_5755MHz

Pol.

Vertical


Fundamental

Peak

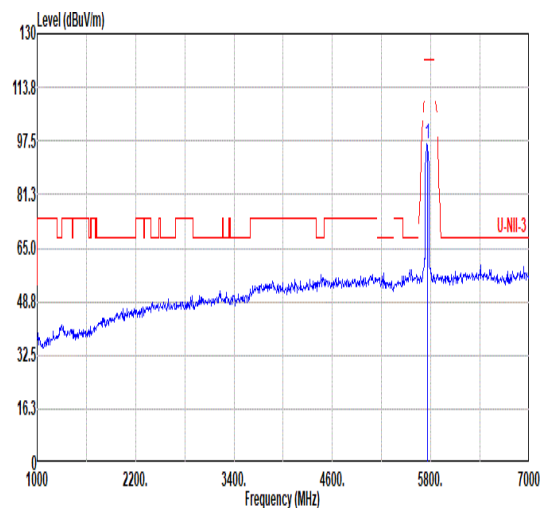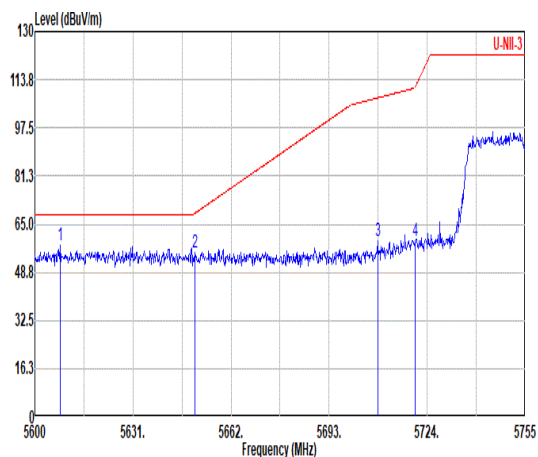


Avg

Blank

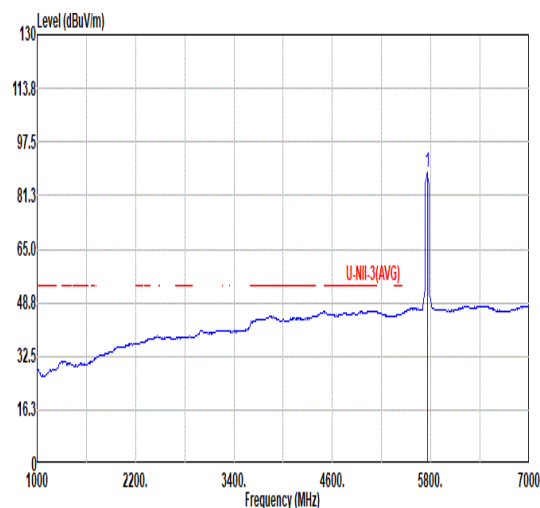

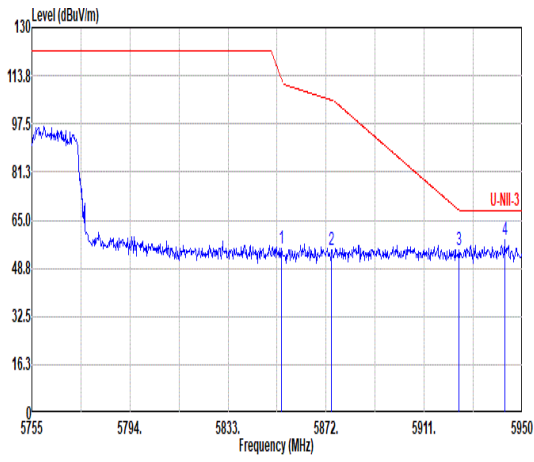

Mode	7																																																																																					
	Band Edge - R																																																																																					
	U-NII-3_5.725-5.85_802.11n HT40_CH151_5755MHz																																																																																					
Pol.	Vertical	Fundamental																																																																																				
Peak	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>5854.26</td><td>55.22</td><td>112.60</td><td>-57.38</td><td>36.79</td><td>34.92</td><td>13.88</td><td>30.37</td><td>0.00</td><td>228</td><td>360</td><td>PEAK</td></tr><tr><td>2</td><td>5874.15</td><td>55.18</td><td>105.54</td><td>-50.36</td><td>36.71</td><td>35.00</td><td>13.85</td><td>30.38</td><td>0.00</td><td>228</td><td>360</td><td>PEAK</td></tr><tr><td>3</td><td>5924.85</td><td>54.73</td><td>68.31</td><td>-13.58</td><td>36.26</td><td>35.15</td><td>13.73</td><td>30.41</td><td>0.00</td><td>228</td><td>360</td><td>PEAK</td></tr><tr><td>4</td><td>5942.98</td><td>58.35</td><td>68.20</td><td>-9.85</td><td>39.90</td><td>35.19</td><td>13.67</td><td>30.41</td><td>0.00</td><td>228</td><td>360</td><td>PEAK</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	5854.26	55.22	112.60	-57.38	36.79	34.92	13.88	30.37	0.00	228	360	PEAK	2	5874.15	55.18	105.54	-50.36	36.71	35.00	13.85	30.38	0.00	228	360	PEAK	3	5924.85	54.73	68.31	-13.58	36.26	35.15	13.73	30.41	0.00	228	360	PEAK	4	5942.98	58.35	68.20	-9.85	39.90	35.19	13.67	30.41	0.00	228	360	PEAK	Blank
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																												
1	5854.26	55.22	112.60	-57.38	36.79	34.92	13.88	30.37	0.00	228	360	PEAK																																																																										
2	5874.15	55.18	105.54	-50.36	36.71	35.00	13.85	30.38	0.00	228	360	PEAK																																																																										
3	5924.85	54.73	68.31	-13.58	36.26	35.15	13.73	30.41	0.00	228	360	PEAK																																																																										
4	5942.98	58.35	68.20	-9.85	39.90	35.19	13.67	30.41	0.00	228	360	PEAK																																																																										



7

Mode


Harmonic

U-NII-3_5.725-5.85_802.11n HT40_CH151_5755MHz


Pol.

Horizontal



Vertical

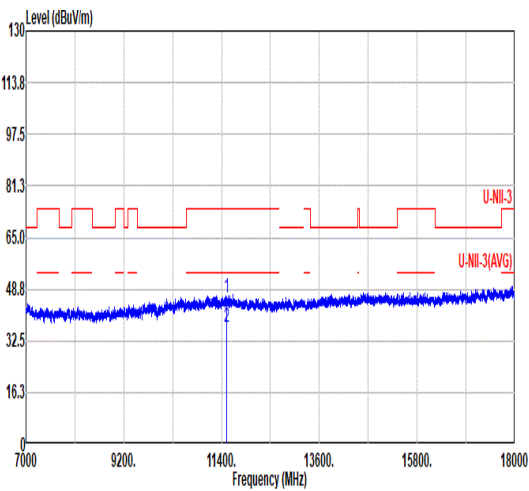Peak
Avg




	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm
1	11510.00	46.15	74.00	-27.85	52.99	38.32	18.75	63.91	0.00
2	11510.00	36.62	54.00	-17.38	43.47	38.33	18.74	63.92	0.00

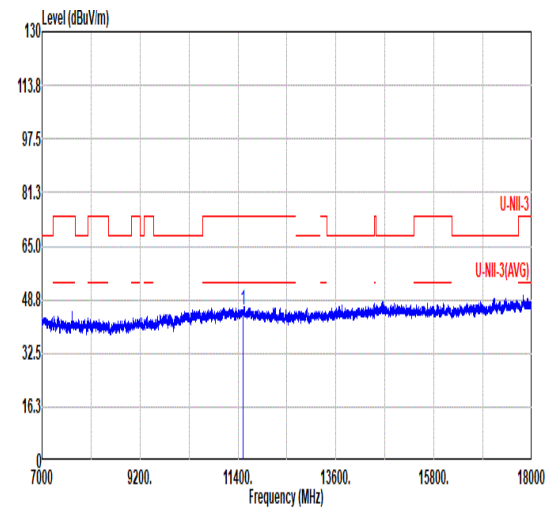


	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm
1	11510.00	45.76	74.00	-28.24	52.60	38.32	18.75	63.91	0.00
2	11510.00	36.62	54.00	-17.38	43.47	38.33	18.74	63.92	0.00

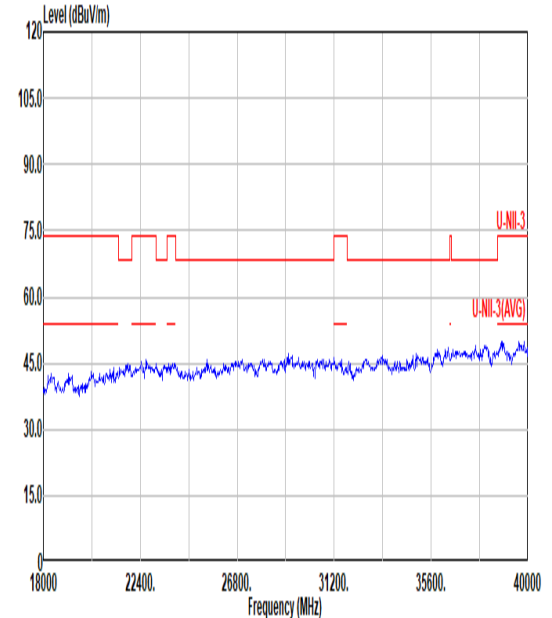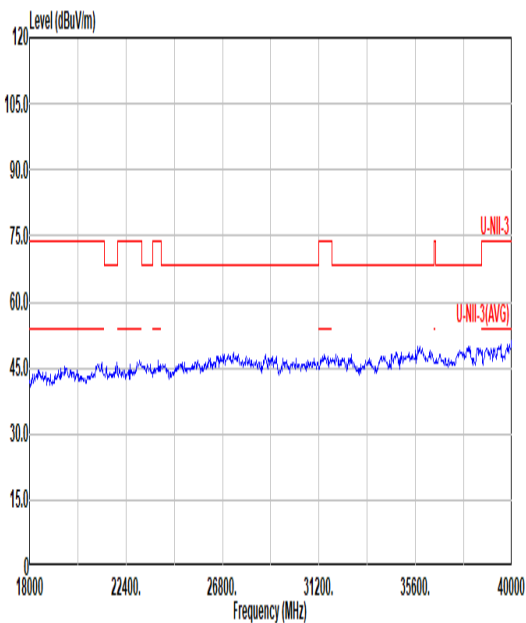Peak
Avg

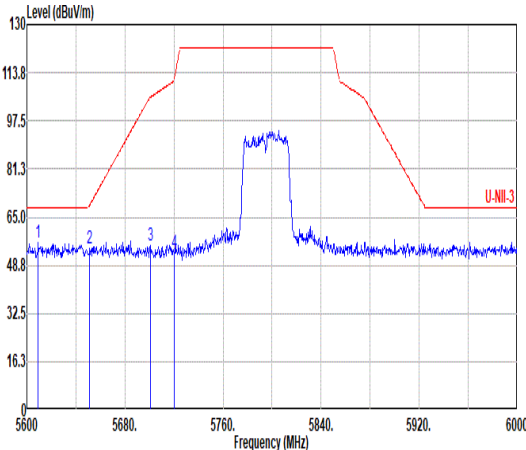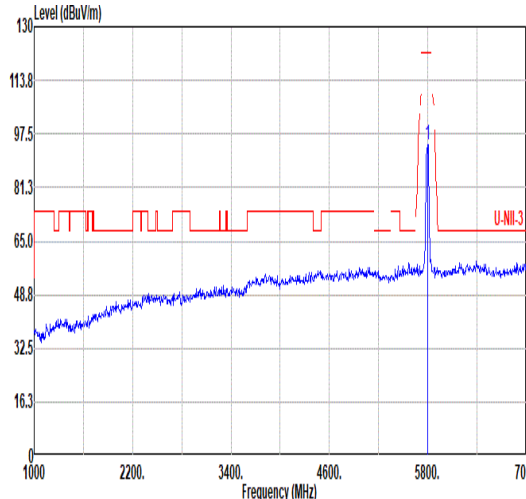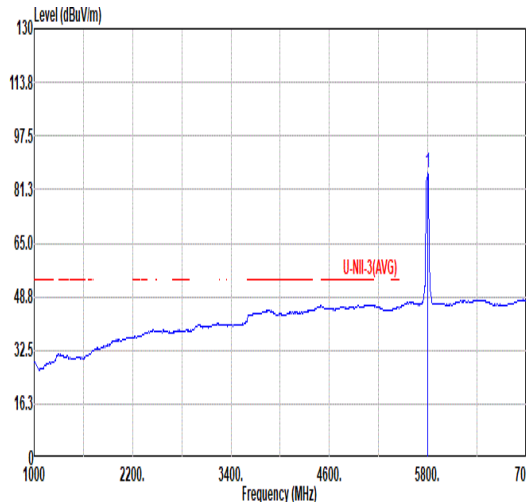

		8																																																																																											
Mode		Band Edge - L																																																																																											
		U-NII-3_5.725-5.85_802.11n HT40_CH159_5795MHz																																																																																											
Pol.		Horizontal					Fundamental																																																																																						
Peak																																																																																													
		<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5689.20</td><td>56.47</td><td>68.20</td><td>-11.73</td><td>38.19</td><td>34.50</td><td>13.12</td><td>29.34</td><td>0.00</td><td>260</td><td>112</td><td>PEAK</td></tr><tr><td>2</td><td>5651.20</td><td>54.55</td><td>69.09</td><td>-14.54</td><td>36.39</td><td>34.50</td><td>13.01</td><td>29.35</td><td>0.00</td><td>260</td><td>112</td><td>PEAK</td></tr><tr><td>3</td><td>5700.00</td><td>55.56</td><td>105.52</td><td>-49.96</td><td>37.46</td><td>34.60</td><td>13.10</td><td>29.60</td><td>0.00</td><td>260</td><td>112</td><td>PEAK</td></tr><tr><td>4</td><td>5720.00</td><td>53.18</td><td>110.90</td><td>-57.72</td><td>34.97</td><td>34.64</td><td>13.26</td><td>29.69</td><td>0.00</td><td>260</td><td>112</td><td>PEAK</td></tr></tbody></table>											Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5689.20	56.47	68.20	-11.73	38.19	34.50	13.12	29.34	0.00	260	112	PEAK	2	5651.20	54.55	69.09	-14.54	36.39	34.50	13.01	29.35	0.00	260	112	PEAK	3	5700.00	55.56	105.52	-49.96	37.46	34.60	13.10	29.60	0.00	260	112	PEAK	4	5720.00	53.18	110.90	-57.72	34.97	34.64	13.26	29.69	0.00	260	112
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																			
1	5689.20	56.47	68.20	-11.73	38.19	34.50	13.12	29.34	0.00	260	112	PEAK																																																																																	
2	5651.20	54.55	69.09	-14.54	36.39	34.50	13.01	29.35	0.00	260	112	PEAK																																																																																	
3	5700.00	55.56	105.52	-49.96	37.46	34.60	13.10	29.60	0.00	260	112	PEAK																																																																																	
4	5720.00	53.18	110.90	-57.72	34.97	34.64	13.26	29.69	0.00	260	112	PEAK																																																																																	
Avg																																																																																													
		<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5795.00</td><td>94.38</td><td>-----</td><td>-----</td><td>75.38</td><td>34.79</td><td>14.27</td><td>30.06</td><td>0.00</td><td>260</td><td>112</td><td>PEAK</td></tr></tbody></table>											Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5795.00	94.38	-----	-----	75.38	34.79	14.27	30.06	0.00	260	112	PEAK																																						
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																			
1	5795.00	94.38	-----	-----	75.38	34.79	14.27	30.06	0.00	260	112	PEAK																																																																																	
Blank																																																																																													
		<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5795.00</td><td>86.15</td><td>-----</td><td>-----</td><td>67.07</td><td>34.80</td><td>14.37</td><td>30.09</td><td>0.00</td><td>260</td><td>112</td><td>AVERAGE</td></tr></tbody></table>											Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5795.00	86.15	-----	-----	67.07	34.80	14.37	30.09	0.00	260	112	AVERAGE																																						
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																			
1	5795.00	86.15	-----	-----	67.07	34.80	14.37	30.09	0.00	260	112	AVERAGE																																																																																	

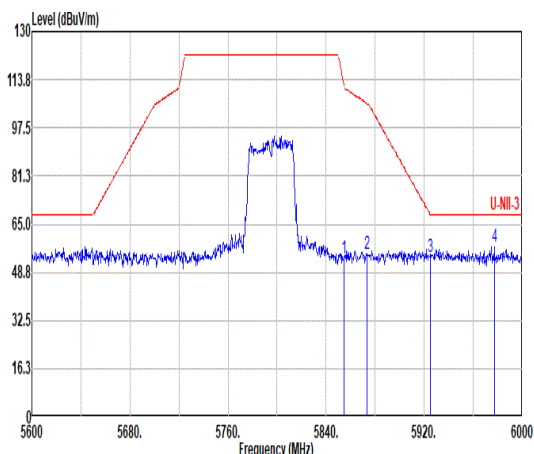

Mode	8																																																																																				
	Band Edge - R																																																																																				
	U-NII-3_5.725-5.85_802.11n HT40_CH159_5795MHz																																																																																				
Pol.	Horizontal	Fundamental																																																																																			
Peak	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5854.80</td><td>53.37</td><td>111.36</td><td>-57.99</td><td>34.94</td><td>34.92</td><td>13.88</td><td>30.37</td><td>0.00</td><td>260</td><td>112</td><td>PEAK</td></tr><tr><td>2</td><td>5873.60</td><td>55.04</td><td>105.69</td><td>-50.65</td><td>36.58</td><td>34.99</td><td>13.85</td><td>30.38</td><td>0.00</td><td>260</td><td>112</td><td>PEAK</td></tr><tr><td>3</td><td>5924.80</td><td>54.08</td><td>68.35</td><td>-14.27</td><td>35.61</td><td>35.15</td><td>13.73</td><td>30.41</td><td>0.00</td><td>260</td><td>112</td><td>PEAK</td></tr><tr><td>4</td><td>5977.20</td><td>57.54</td><td>68.20</td><td>-10.66</td><td>39.12</td><td>35.25</td><td>13.60</td><td>30.43</td><td>0.00</td><td>260</td><td>112</td><td>PEAK</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5854.80	53.37	111.36	-57.99	34.94	34.92	13.88	30.37	0.00	260	112	PEAK	2	5873.60	55.04	105.69	-50.65	36.58	34.99	13.85	30.38	0.00	260	112	PEAK	3	5924.80	54.08	68.35	-14.27	35.61	35.15	13.73	30.41	0.00	260	112	PEAK	4	5977.20	57.54	68.20	-10.66	39.12	35.25	13.60	30.43	0.00	260	112	PEAK	Blank
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																											
1	5854.80	53.37	111.36	-57.99	34.94	34.92	13.88	30.37	0.00	260	112	PEAK																																																																									
2	5873.60	55.04	105.69	-50.65	36.58	34.99	13.85	30.38	0.00	260	112	PEAK																																																																									
3	5924.80	54.08	68.35	-14.27	35.61	35.15	13.73	30.41	0.00	260	112	PEAK																																																																									
4	5977.20	57.54	68.20	-10.66	39.12	35.25	13.60	30.43	0.00	260	112	PEAK																																																																									



8

Mode

Band Edge - L


U-NII-3_5.725-5.85_802.11n HT40_CH159_5795MHz

Pol.


Vertical

Fundamental

Peak

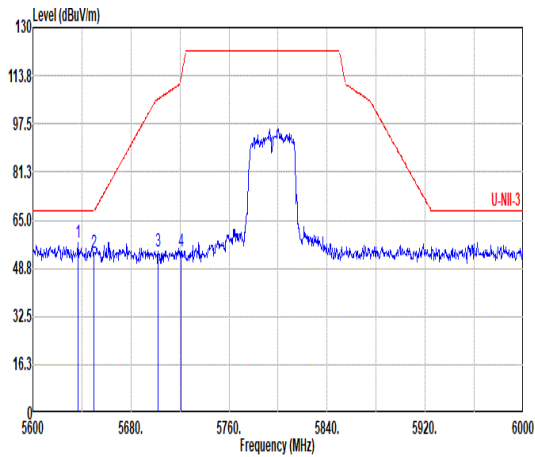


	Limit			Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark
	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg
1	5636.80	57.27	68.20	-10.93	39.01	34.50	13.05	29.29	0.00	222	360 PEAK
2	5658.00	53.98	68.20	-14.22	35.81	34.50	13.01	29.34	0.00	222	360 PEAK
3	5702.40	54.50	105.97	-51.47	36.39	34.60	13.11	29.60	0.00	222	360 PEAK
4	5728.80	54.58	112.72	-58.14	36.37	34.64	13.27	29.70	0.00	222	360 PEAK

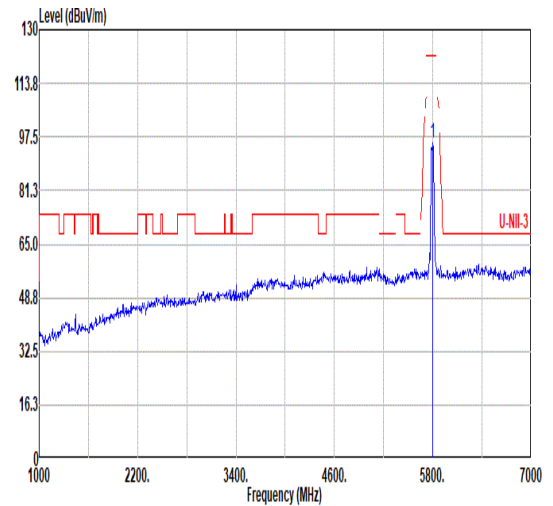

	Limit			Read	Ant	Cable	Preamp	Aux	APos	TPos	
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg
1	5795.00	95.80	-----	-----	76.72	34.80	14.37	30.09	0.00	222	360 PEAK


Avg

Blank


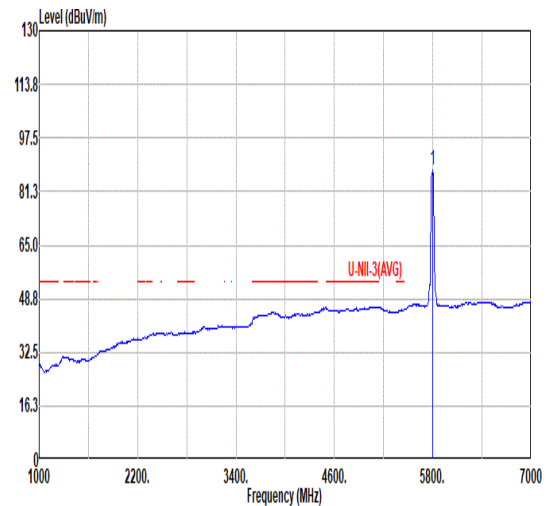


	Limit			Read	Ant	Cable	Preamp	Aux	APos	TPos	
	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor			Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg
1	5795.00	87.75	-----	-----	68.67	34.80	14.37	30.09	0.00	222	360 AVERAGE

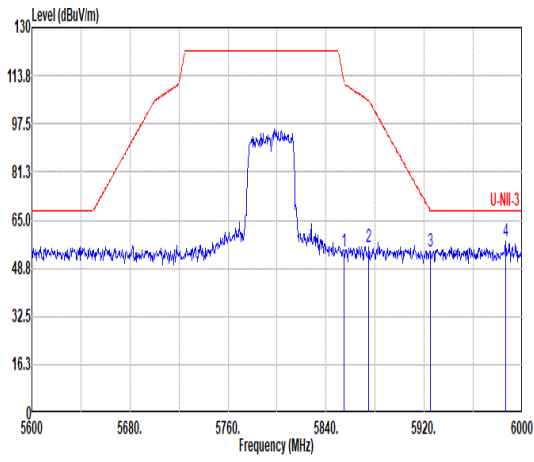

Mode	8																																																																																				
	Band Edge - R																																																																																				
	U-NII-3_5.725-5.85_802.11n HT40_CH159_5795MHz																																																																																				
Pol.	Vertical	Fundamental																																																																																			
Peak	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5854.80</td><td>54.47</td><td>111.36</td><td>-56.89</td><td>36.04</td><td>34.92</td><td>13.88</td><td>30.37</td><td>0.00</td><td>222</td><td>360</td><td>PEAK</td></tr><tr><td>2</td><td>5874.80</td><td>56.04</td><td>105.36</td><td>-49.32</td><td>37.57</td><td>35.00</td><td>13.85</td><td>30.38</td><td>0.00</td><td>222</td><td>360</td><td>PEAK</td></tr><tr><td>3</td><td>5924.80</td><td>54.26</td><td>68.35</td><td>-14.09</td><td>35.79</td><td>35.15</td><td>13.73</td><td>30.41</td><td>0.00</td><td>222</td><td>360</td><td>PEAK</td></tr><tr><td>4</td><td>5986.40</td><td>57.73</td><td>68.20</td><td>-10.47</td><td>39.32</td><td>35.27</td><td>13.58</td><td>30.44</td><td>0.00</td><td>222</td><td>360</td><td>PEAK</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5854.80	54.47	111.36	-56.89	36.04	34.92	13.88	30.37	0.00	222	360	PEAK	2	5874.80	56.04	105.36	-49.32	37.57	35.00	13.85	30.38	0.00	222	360	PEAK	3	5924.80	54.26	68.35	-14.09	35.79	35.15	13.73	30.41	0.00	222	360	PEAK	4	5986.40	57.73	68.20	-10.47	39.32	35.27	13.58	30.44	0.00	222	360	PEAK	Blank
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																											
1	5854.80	54.47	111.36	-56.89	36.04	34.92	13.88	30.37	0.00	222	360	PEAK																																																																									
2	5874.80	56.04	105.36	-49.32	37.57	35.00	13.85	30.38	0.00	222	360	PEAK																																																																									
3	5924.80	54.26	68.35	-14.09	35.79	35.15	13.73	30.41	0.00	222	360	PEAK																																																																									
4	5986.40	57.73	68.20	-10.47	39.32	35.27	13.58	30.44	0.00	222	360	PEAK																																																																									

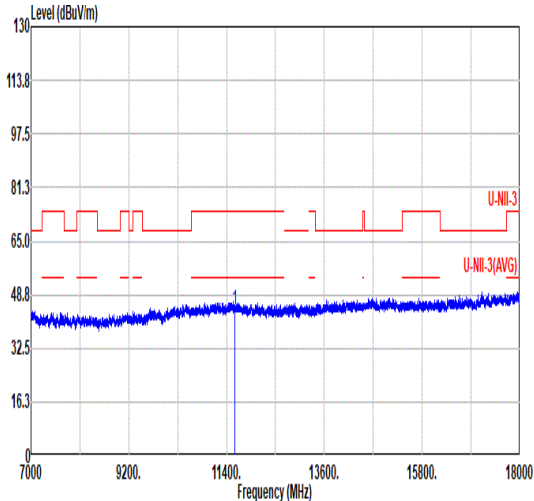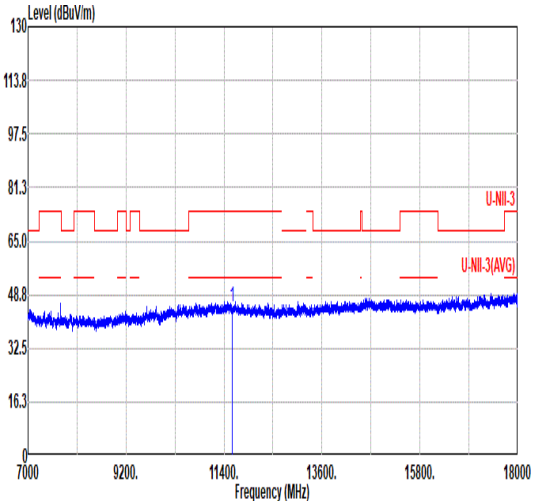

Mode	8																																																																																																										
	Harmonic																																																																																																										
	U-NII-3_5.725-5.85_802.11n HT40_CH159_5795MHz																																																																																																										
Pol.	Horizontal						Vertical																																																																																																				
Peak Avg																																																																																																											
	<table><tr><th colspan="2"></th><th colspan="2">Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th rowspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>11590.00</td><td>44.34</td><td>74.00</td><td>-29.66</td><td>51.39</td><td>38.48</td><td>18.58</td><td>64.11</td><td>0.00</td><td>--</td><td>--</td><td>PEAK</td></tr></table>								Limit		Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	11590.00	44.34	74.00	-29.66	51.39	38.48	18.58	64.11	0.00	--	--	PEAK	<table><tr><th colspan="2"></th><th colspan="2">Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th rowspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>11590.00</td><td>45.01</td><td>74.00</td><td>-28.99</td><td>52.06</td><td>38.48</td><td>18.58</td><td>64.11</td><td>0.00</td><td>--</td><td>--</td><td>PEAK</td></tr></table>								Limit		Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	11590.00	45.01	74.00	-28.99	52.06	38.48	18.58	64.11	0.00	--	--
		Limit		Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																
1	11590.00	44.34	74.00	-29.66	51.39	38.48	18.58	64.11	0.00	--	--	PEAK																																																																																															
		Limit		Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																
1	11590.00	45.01	74.00	-28.99	52.06	38.48	18.58	64.11	0.00	--	--	PEAK																																																																																															



9

Mode

Band Edge - L


U-NII-3_5.725-5.85_802.11ac VHT80_CH155_5775MHz

Pol.


Horizontal

Fundamental

Peak

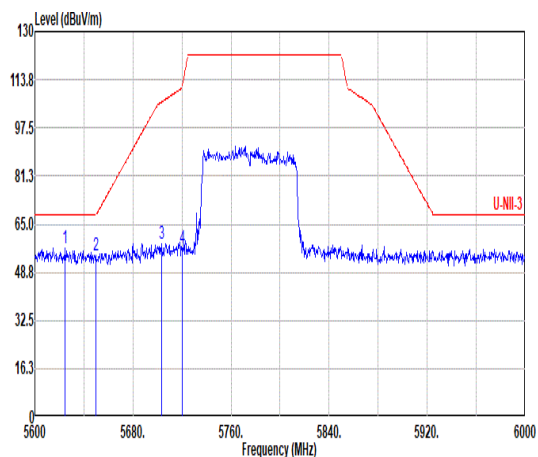


	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos				
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor		Remark			
MHz	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg			
1	5624.00	56.69	68.20	-11.51	38.42	34.50	13.08	29.31	0.00	155	91	PEAK
2	5658.00	54.38	68.20	-13.82	36.21	34.50	13.01	29.34	0.00	155	91	PEAK
3	5703.20	58.33	106.20	-47.87	40.21	34.61	13.12	29.61	0.00	155	91	PEAK
4	5728.00	56.67	110.90	-54.23	38.46	34.64	13.26	29.69	0.00	155	91	PEAK

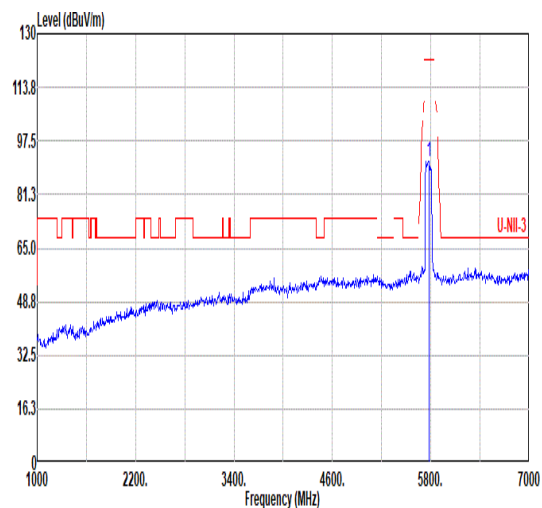

		Limit		Read	Ant	Cable	Preamp	Aux	APos	TPos	
Freq	Level	Line Margin		Level	Factor	Loss	Factor	Factor			Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg
1	5775.00	91.47	-----	72.81	34.74	13.86	29.94	0.00	155	91	PEAK


Avg

Blank


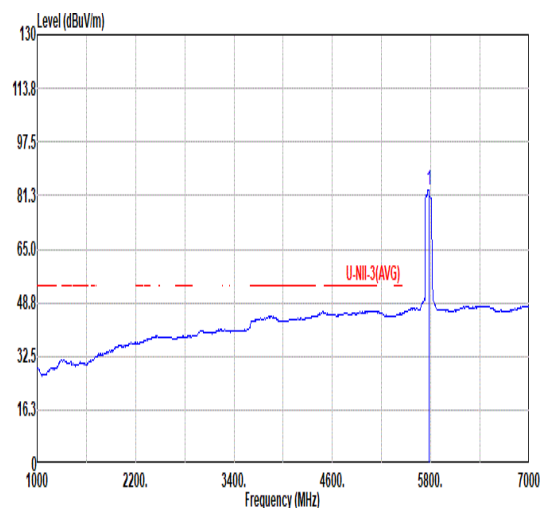


		Limit		Read	Ant	Cable	Preamp	Aux	APos	TPos	
Freq	Level	Line Margin		Level	Factor	Loss	Factor	Factor			Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg
1	5775.00	82.90	-----	64.24	34.74	13.86	29.94	0.00	155	91	AVERAGE

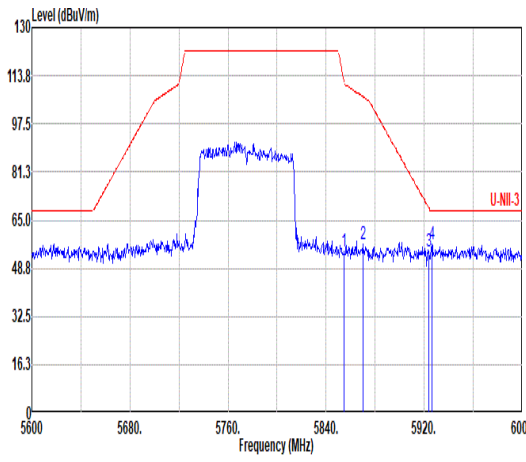


Mode	9																																																																																													
	Band Edge - R																																																																																													
	U-NII-3_5.725-5.85_802.11ac VHT80_CH155_5775MHz																																																																																													
Pol.	Horizontal						Fundamental																																																																																							
Peak																																																																																														
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5854.00</td><td>54.52</td><td>111.36</td><td>-56.84</td><td>36.09</td><td>34.92</td><td>13.88</td><td>30.37</td><td>0.00</td><td>155</td><td>91</td><td>PEAK</td></tr><tr><td>2</td><td>5870.00</td><td>57.05</td><td>106.70</td><td>-49.65</td><td>38.60</td><td>34.98</td><td>13.85</td><td>30.38</td><td>0.00</td><td>155</td><td>91</td><td>PEAK</td></tr><tr><td>3</td><td>5924.00</td><td>54.50</td><td>68.94</td><td>-14.44</td><td>36.02</td><td>35.15</td><td>13.73</td><td>30.40</td><td>0.00</td><td>155</td><td>91</td><td>PEAK</td></tr><tr><td>4</td><td>5926.40</td><td>56.92</td><td>68.20</td><td>-11.28</td><td>38.46</td><td>35.15</td><td>13.72</td><td>30.41</td><td>0.00</td><td>155</td><td>91</td><td>PEAK</td></tr></table>												Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5854.00	54.52	111.36	-56.84	36.09	34.92	13.88	30.37	0.00	155	91	PEAK	2	5870.00	57.05	106.70	-49.65	38.60	34.98	13.85	30.38	0.00	155	91	PEAK	3	5924.00	54.50	68.94	-14.44	36.02	35.15	13.73	30.40	0.00	155	91	PEAK	4	5926.40	56.92	68.20	-11.28	38.46	35.15	13.72	30.41	0.00	155	91	PEAK
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																				
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																					
		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																			
1	5854.00	54.52	111.36	-56.84	36.09	34.92	13.88	30.37	0.00	155	91	PEAK																																																																																		
2	5870.00	57.05	106.70	-49.65	38.60	34.98	13.85	30.38	0.00	155	91	PEAK																																																																																		
3	5924.00	54.50	68.94	-14.44	36.02	35.15	13.73	30.40	0.00	155	91	PEAK																																																																																		
4	5926.40	56.92	68.20	-11.28	38.46	35.15	13.72	30.41	0.00	155	91	PEAK																																																																																		
Blank																																																																																														

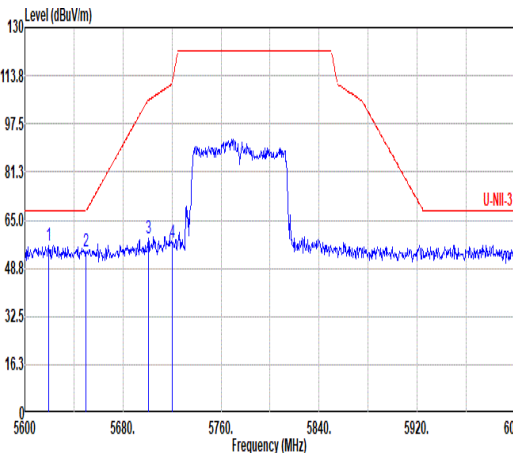
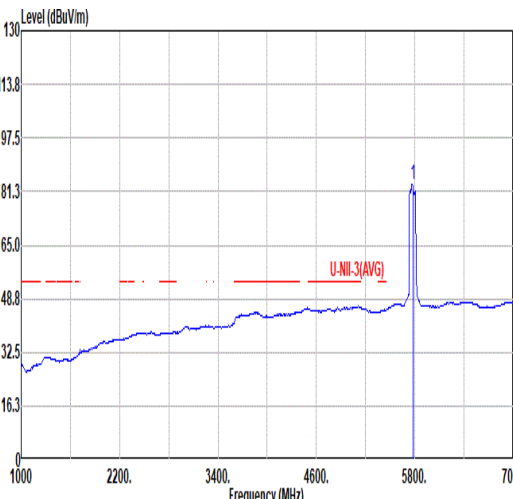



		9																																																																																											
Mode		Band Edge - L																																																																																											
		U-NII-3_5.725-5.85_802.11ac VHT80_CH155_5775MHz																																																																																											
Pol.		Fundamental																																																																																											
Peak	Vertical																																																																																												
	 Level (dBuV/m) Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5619.60</td><td>56.41</td><td>68.20</td><td>-11.79</td><td>38.13</td><td>34.50</td><td>13.10</td><td>29.32</td><td>0.00</td><td>188</td><td>360</td><td>PEAK</td></tr><tr><td>2</td><td>5658.00</td><td>54.42</td><td>68.20</td><td>-13.78</td><td>36.25</td><td>34.50</td><td>13.01</td><td>29.34</td><td>0.00</td><td>188</td><td>360</td><td>PEAK</td></tr><tr><td>3</td><td>5700.80</td><td>58.75</td><td>105.52</td><td>-46.77</td><td>40.65</td><td>34.60</td><td>13.10</td><td>29.60</td><td>0.00</td><td>188</td><td>360</td><td>PEAK</td></tr><tr><td>4</td><td>5720.40</td><td>57.46</td><td>111.81</td><td>-54.35</td><td>39.24</td><td>34.64</td><td>13.27</td><td>29.69</td><td>0.00</td><td>188</td><td>360</td><td>PEAK</td></tr></tbody></table>												Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5619.60	56.41	68.20	-11.79	38.13	34.50	13.10	29.32	0.00	188	360	PEAK	2	5658.00	54.42	68.20	-13.78	36.25	34.50	13.01	29.34	0.00	188	360	PEAK	3	5700.80	58.75	105.52	-46.77	40.65	34.60	13.10	29.60	0.00	188	360	PEAK	4	5720.40	57.46	111.81	-54.35	39.24	34.64	13.27	29.69	0.00	188	360
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																					
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																			
1	5619.60	56.41	68.20	-11.79	38.13	34.50	13.10	29.32	0.00	188	360	PEAK																																																																																	
2	5658.00	54.42	68.20	-13.78	36.25	34.50	13.01	29.34	0.00	188	360	PEAK																																																																																	
3	5700.80	58.75	105.52	-46.77	40.65	34.60	13.10	29.60	0.00	188	360	PEAK																																																																																	
4	5720.40	57.46	111.81	-54.35	39.24	34.64	13.27	29.69	0.00	188	360	PEAK																																																																																	
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																					
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																		
1	5775.00	91.49	-----	-----	72.91	34.73	13.76	29.91	0.00	188	360	PEAK																																																																																	
Avg	Blank																																																																																												
	 Level (dBuV/m) Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5775.00</td><td>83.46</td><td>-----</td><td>-----</td><td>64.80</td><td>34.74</td><td>13.86</td><td>29.94</td><td>0.00</td><td>188</td><td>360</td><td>AVERAGE</td></tr></tbody></table>												Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5775.00	83.46	-----	-----	64.80	34.74	13.86	29.94	0.00	188	360	AVERAGE																																					
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																					
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																		
1	5775.00	83.46	-----	-----	64.80	34.74	13.86	29.94	0.00	188	360	AVERAGE																																																																																	

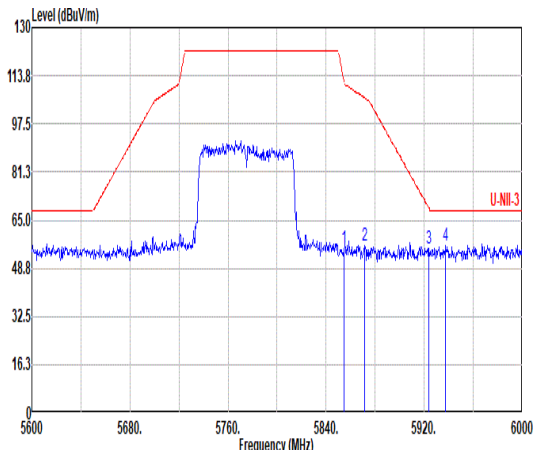

Mode	9																																																																																					
	Band Edge - R																																																																																					
	U-NII-3_5.725-5.85_802.11ac VHT80_CH155_5775MHz																																																																																					
Pol.	Vertical	Fundamental																																																																																				
Peak	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>5854.40</td><td>55.29</td><td>112.27</td><td>-56.98</td><td>36.86</td><td>34.92</td><td>13.88</td><td>30.37</td><td>0.00</td><td>188</td><td>360</td><td>PEAK</td></tr><tr><td>2</td><td>5871.20</td><td>56.55</td><td>106.36</td><td>-49.81</td><td>38.10</td><td>34.98</td><td>13.85</td><td>30.38</td><td>0.00</td><td>188</td><td>360</td><td>PEAK</td></tr><tr><td>3</td><td>5924.00</td><td>55.65</td><td>68.94</td><td>-13.29</td><td>37.17</td><td>35.15</td><td>13.73</td><td>30.40</td><td>0.00</td><td>188</td><td>360</td><td>PEAK</td></tr><tr><td>4</td><td>5937.60</td><td>56.27</td><td>68.20</td><td>-11.93</td><td>37.81</td><td>35.18</td><td>13.69</td><td>30.41</td><td>0.00</td><td>188</td><td>360</td><td>PEAK</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	5854.40	55.29	112.27	-56.98	36.86	34.92	13.88	30.37	0.00	188	360	PEAK	2	5871.20	56.55	106.36	-49.81	38.10	34.98	13.85	30.38	0.00	188	360	PEAK	3	5924.00	55.65	68.94	-13.29	37.17	35.15	13.73	30.40	0.00	188	360	PEAK	4	5937.60	56.27	68.20	-11.93	37.81	35.18	13.69	30.41	0.00	188	360	PEAK	Blank
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																												
1	5854.40	55.29	112.27	-56.98	36.86	34.92	13.88	30.37	0.00	188	360	PEAK																																																																										
2	5871.20	56.55	106.36	-49.81	38.10	34.98	13.85	30.38	0.00	188	360	PEAK																																																																										
3	5924.00	55.65	68.94	-13.29	37.17	35.15	13.73	30.40	0.00	188	360	PEAK																																																																										
4	5937.60	56.27	68.20	-11.93	37.81	35.18	13.69	30.41	0.00	188	360	PEAK																																																																										

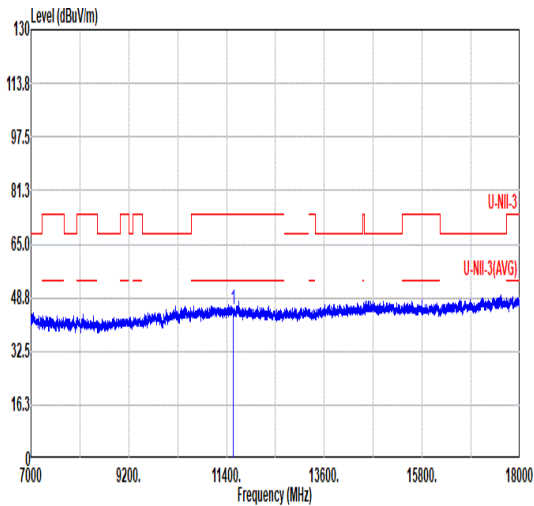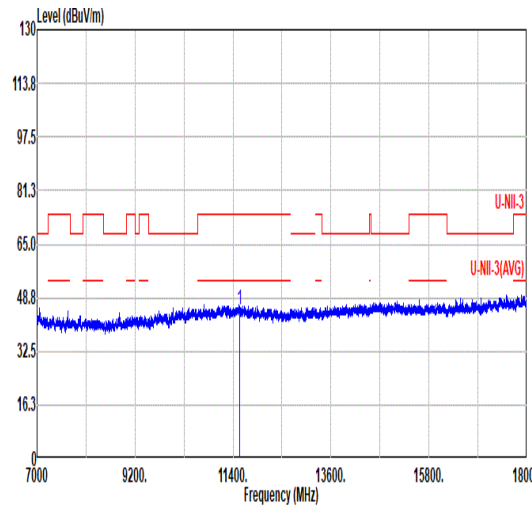

Mode		9																																																							
		Harmonic																																																							
		U-NII-3_5.725-5.85_802.11ac VHT80_CH155_5775MHz																																																							
Pol.	Horizontal						Vertical																																																		
Peak Avg																																																									
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBUV/m</th><th>dBUV/m</th><th>dB</th><th>dBUV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>11550.00</td><td>44.99</td><td>74.00</td><td>-29.01</td><td>51.93</td><td>38.40</td><td>18.67</td><td>64.01</td><td>0.00</td><td>--</td><td>--</td><td>PEAK</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBUV/m	dBUV/m	dB	dBUV	dB/m	dB	dB	dB	cm	deg		1	11550.00	44.99	74.00	-29.01	51.93	38.40	18.67	64.01	0.00	--	--
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																	
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																
	MHz	dBUV/m	dBUV/m	dB	dBUV	dB/m	dB	dB	dB	cm	deg																																														
1	11550.00	44.99	74.00	-29.01	51.93	38.40	18.67	64.01	0.00	--	--	PEAK																																													
						<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBUV/m</th><th>dBUV/m</th><th>dB</th><th>dBUV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>11550.00</td><td>45.30</td><td>74.00</td><td>-28.70</td><td>52.24</td><td>38.40</td><td>18.67</td><td>64.01</td><td>0.00</td><td>--</td><td>--</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBUV/m	dBUV/m	dB	dBUV	dB/m	dB	dB	dB	cm	deg		1	11550.00	45.30	74.00	-28.70	52.24	38.40	18.67	64.01	0.00	--	--	PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																	
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																
	MHz	dBUV/m	dBUV/m	dB	dBUV	dB/m	dB	dB	dB	cm	deg																																														
1	11550.00	45.30	74.00	-28.70	52.24	38.40	18.67	64.01	0.00	--	--	PEAK																																													

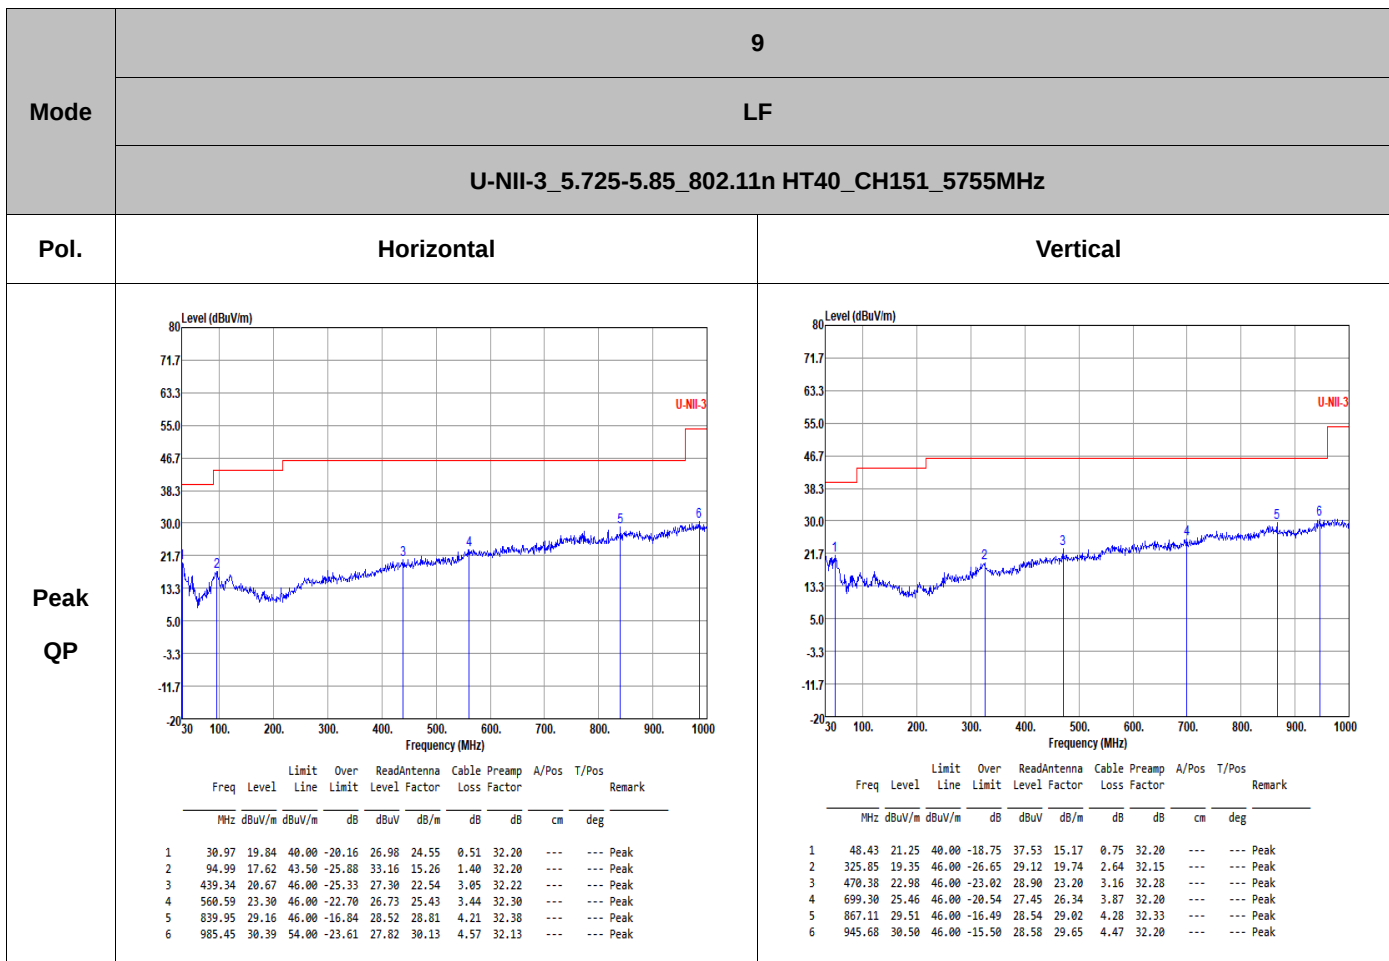




Appendix D. Duty Cycle Plots

Band	Duty Cycle(%)	T(ms)	1/T(kHz)	VBW Setting
802.11a	98.25	-	-	10Hz
802.11n HT20	98.87	-	-	10Hz
802.11n HT40	96.24	0.928	1.078	1.1KHz
802.11ac VHT80	92.06	0.454	2.204	2.4KHz


802.11a

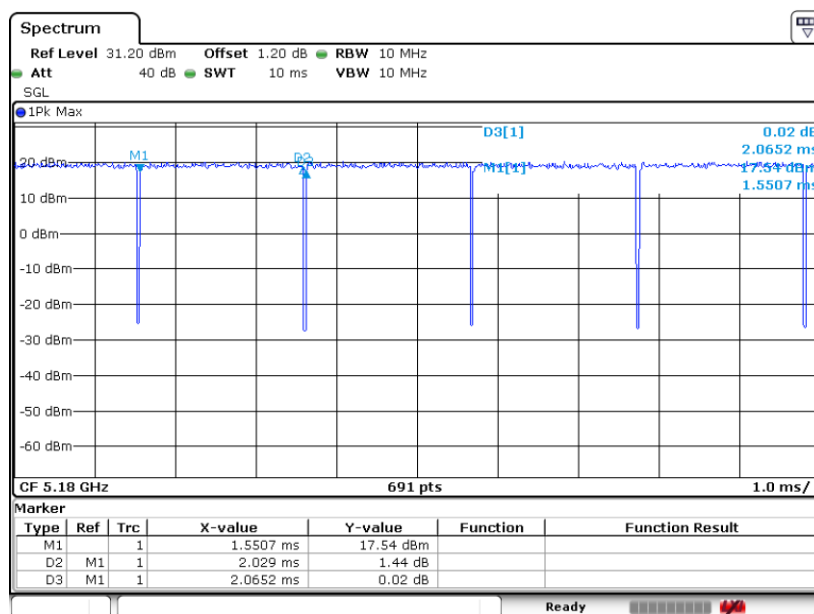

Date: 9.MAY.2024 11:51:14




802.11n HT20

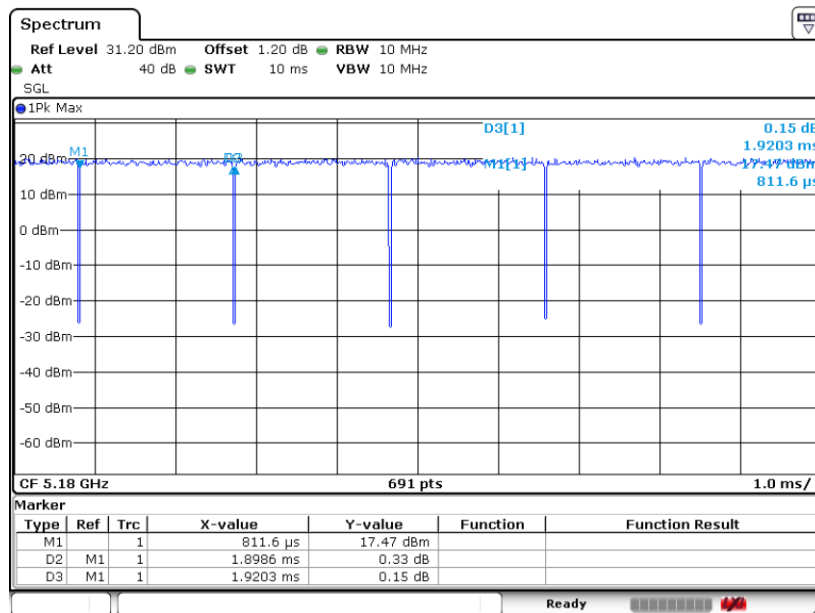

Date: 9.MAY.2024 11:52:26


802.11n HT40

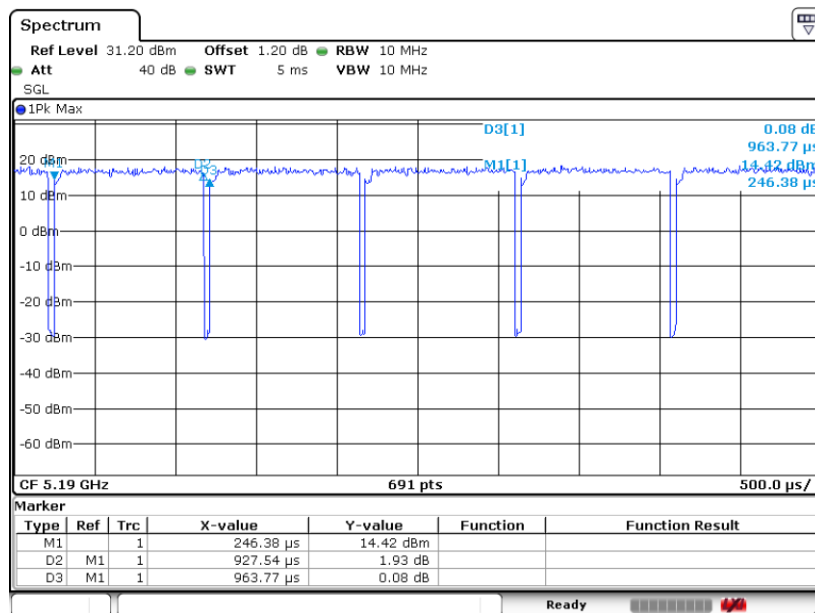

Date: 9.MAY.2024 11:54:16



802.11ac VHT80

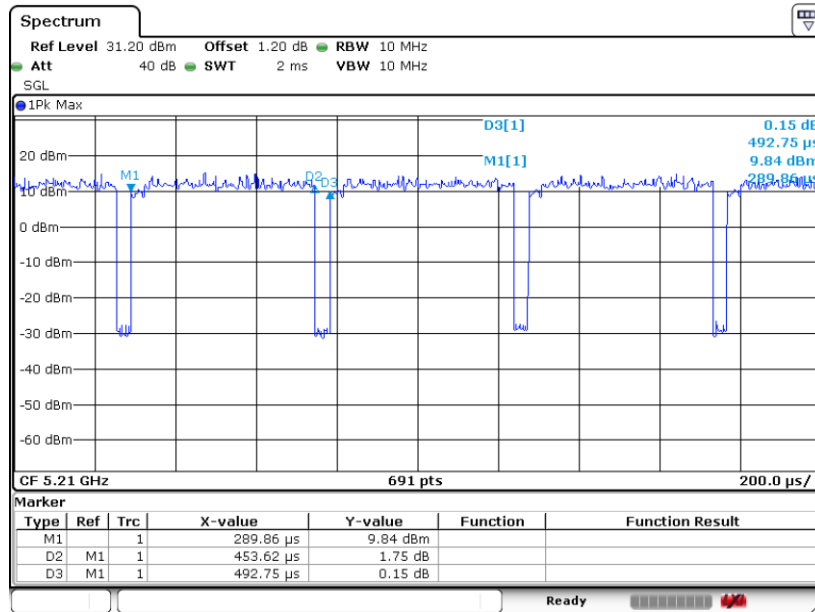

Date: 9.MAY.2024 12:00:17