


Page: 174 of 216

802.11n20B3 Test Date: Operation Mode: 2017/10/6

Fundamental Frequency: 5500 MHz Temp. / Humi. : 22.8deg\_C/59RH

Operation Band: BE CH LOW Test Engineer: Enzo EUT Pol.: E2 Measurement Antenna Pol. : Horizontal

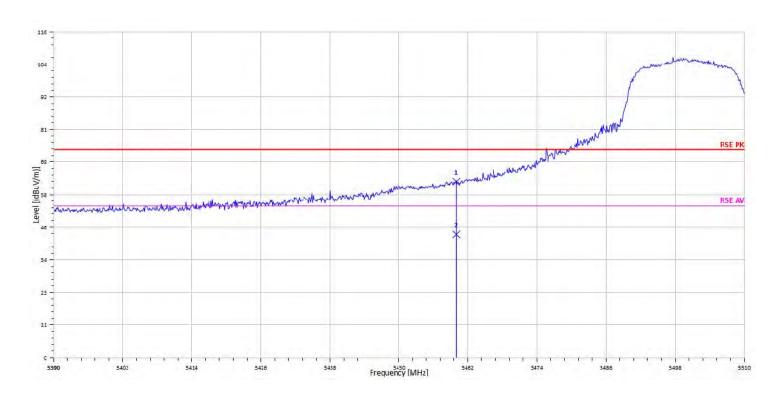

| Freq.   | Note    | Detector | Spectum       | Factor | Actual | Limit  | Margin |
|---------|---------|----------|---------------|--------|--------|--------|--------|
|         |         | Mode     | Reading Level |        | FS     | @3m    |        |
| MHz     | F/H/E/S | PK/QP/AV | dBµV          | dB     | dBµV/m | dBµV/m | dB     |
| 5460.00 | E       | Peak     | 62.56         | 0.06   | 62.62  | 74     | -11.38 |
| 5460.00 | Е       | Average  | 43.80         | 0.06   | 43.85  | 54     | -10.15 |

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Unless otherwise stated the results shown in this test report teer only to the sample(s) tested and such as a feet and the sample states are stated and such as the sample state and the sample states are stated and such as the sample state and sample state may be prosecuted to the fullest extent of the law.




Page: 175 of 216

Operation Mode: 802.11n20B3 Test Date: 2017/10/6

Fundamental Frequency: 5500 MHz Temp. / Humi. : 22.8deg\_C/59RH

Operation Band: BE CH LOW RSE Test Engineer: Enzo EUT Pol.: E2 Measurement Antenna Pol. : Vertical

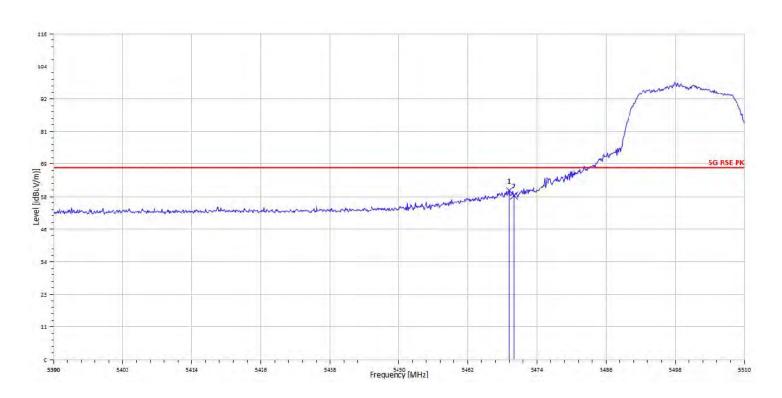

| Freq.   | Note    | Detector | Spectum       | Factor | Actual | Limit  | Margin |
|---------|---------|----------|---------------|--------|--------|--------|--------|
|         |         | Mode     | Reading Level |        | FS     | @3m    |        |
| MHz     | F/H/E/S | PK/QP/AV | dBµV          | dB     | dΒμV/m | dBµV/m | dB     |
| 5469.20 | S       | Peak     | 60.05         | 0.08   | 60.13  | 68.3   | -8.17  |
| 5470.00 | E       | Peak     | 58.29         | 0.08   | 58.37  | 68.3   | -9.93  |

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

t (886-2) 2299-3279

Unless otherwise stated the results shown in this test report teer only to the sample(s) tested and such as a feet and the sample states are stated and such as the sample state and the sample states are stated and such as the sample state and sample state may be prosecuted to the fullest extent of the law.

No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134 號

www.tw.sqs.com




Page: 176 of 216

Operation Mode: 802.11n20B3 Test Date: 2017/10/6

Fundamental Frequency: 5500 MHz Temp. / Humi. : 22.8deg\_C/59RH

Operation Band: BE CH LOW RSE Test Engineer: Enzo EUT Pol.: E2 Measurement Antenna Pol. : Horizontal

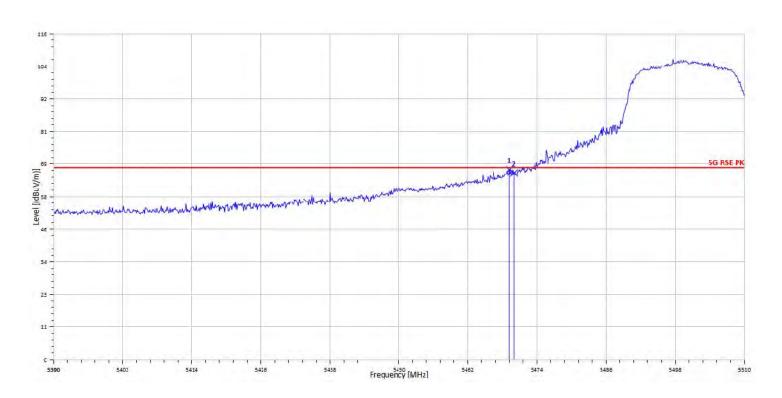

| Freq.   | Note    | Detector | Spectum       | Factor | Actual | Limit  | Margin |
|---------|---------|----------|---------------|--------|--------|--------|--------|
|         |         | Mode     | Reading Level |        | FS     | @3m    |        |
| MHz     | F/H/E/S | PK/QP/AV | dBµV          | dB     | dBµV/m | dBµV/m | dB     |
| 5469.20 | S       | Peak     | 67.50         | 0.08   | 67.58  | 68.3   | -0.72  |
| 5470.00 | Е       | Peak     | 66.30         | 0.08   | 66.38  | 68.3   | -1.92  |

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Unless otherwise stated the results shown in this test report teer only to the sample(s) tested and such as a feet and the sample states are stated and such as the sample state and the sample states are stated and such as the sample state and sample state may be prosecuted to the fullest extent of the law.

f (886-2) 2298-0488




Page: 177 of 216

Operation Mode: 802.11n20B3 Test Date: 2017/10/6

Fundamental Frequency: 5700 MHz Temp. / Humi.: 22.8deg\_C/59RH

Operation Band: Test Engineer: BE CH HIGH Enzo EUT Pol.: Measurement Antenna Pol.: Vertical E2

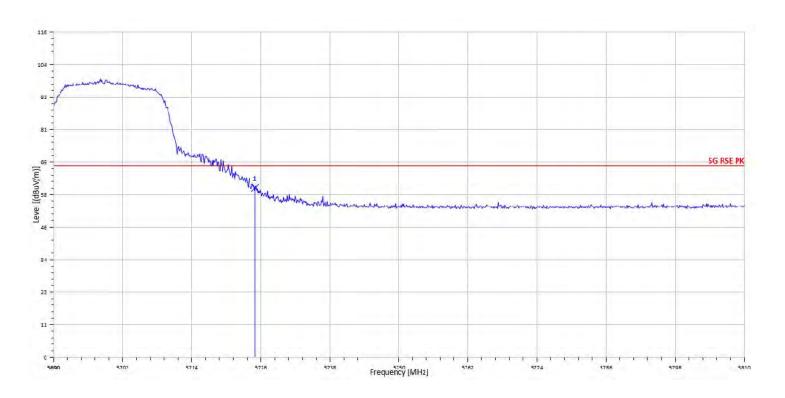

| Freq.  | Note    | Detector | Spectum       | Factor | Actual | Limit  | Margin |
|--------|---------|----------|---------------|--------|--------|--------|--------|
|        |         | Mode     | Reading Level |        | FS     | @3m    |        |
| MHz    | F/H/E/S | PK/QP/AV | dΒμV          | dB     | dBµV/m | dBµV/m | dB     |
| 5725.0 | 0 E     | Peak     | 59.73         | 0.69   | 60.41  | 68.3   | -7.89  |

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Unless otherwise stated the results shown in this test report teer only to the sample(s) tested and such as a feet and the sample states are stated and such as the sample state and the sample states are stated and such as the sample state and sample state may be prosecuted to the fullest extent of the law.




Page: 178 of 216

Operation Mode: 802.11n20B3 Test Date: 2017/10/6

Fundamental Frequency: 5700 MHz Temp. / Humi. : 22.8deg\_C/59RH

Operation Band: BE CH HIGH Test Engineer: Enzo EUT Pol.: E2 Measurement Antenna Pol. : Horizontal

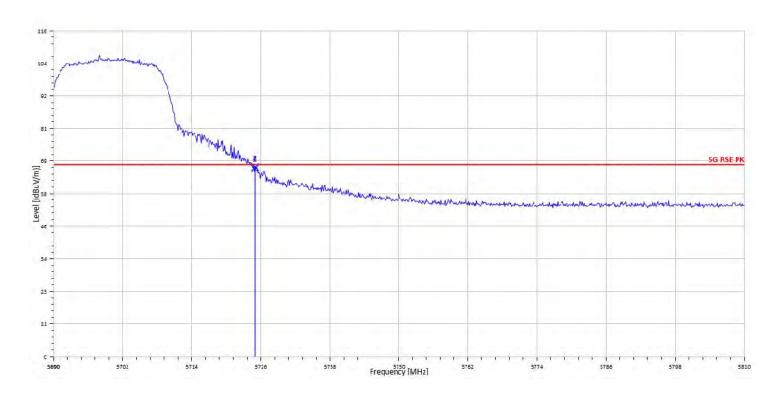

| Freq.   | Note    | Detector | Spectum       | Factor | Actual | Limit  | Margin |
|---------|---------|----------|---------------|--------|--------|--------|--------|
|         |         | Mode     | Reading Level |        | FS     | @3m    |        |
| MHz     | F/H/E/S | PK/QP/AV | dBµV          | dB     | dΒμV/m | dBµV/m | dB     |
| 5725.00 | E       | Peak     | 66.22         | 0.69   | 66.90  | 68.3   | -1.40  |
| 5725.04 | S       | Peak     | 66.80         | 0.69   | 67.48  | 68.3   | -0.82  |

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Unless otherwise stated the results shown in this test report teer only to the sample(s) tested and such as a feet and the sample states are stated and such as the sample state and the sample states are stated and such as the sample state and sample state may be prosecuted to the fullest extent of the law.




Page: 179 of 216

Operation Mode: 802.11n20B4 Test Date: 2017/10/13

Fundamental Frequency: 5745 MHz Temp. / Humi. : 22.8deg\_C/59RH

Operation Band: BE CH LOW Test Engineer: Enzo EUT Pol.: Measurement Antenna Pol.: E2 Vertical

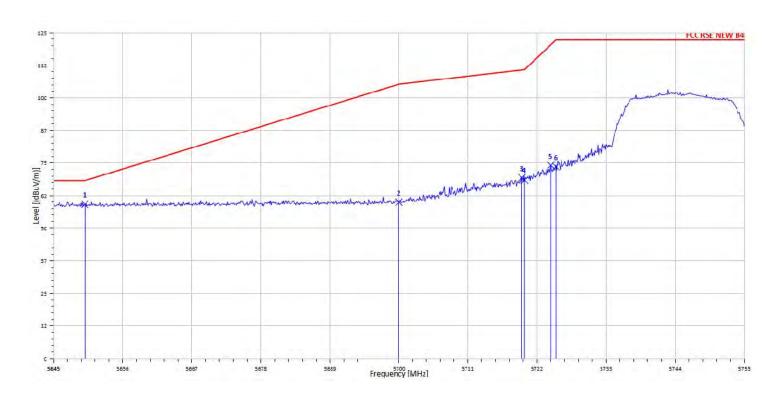

| Freq.   | Note    | Detector<br>Mode | Spectum<br>Reading Level | Factor | Actual<br>FS | Limit<br>@3m | Margin |
|---------|---------|------------------|--------------------------|--------|--------------|--------------|--------|
| MHz     | F/H/E/S | PK/QP/AV         | dΒμV                     | dB     | dBµV/m       | dBµV/m       | dB     |
| 5650.00 | S       | Peak             | 58.52                    | 0.63   | 59.15        | 68.23        | -9.08  |
| 5700.00 | S       | Peak             | 59.44                    | 0.56   | 60.00        | 105.23       | -45.23 |
| 5719.58 | S       | Peak             | 68.69                    | 0.66   | 69.35        | 110.7124     | -41.37 |
| 5720.00 | S       | Peak             | 67.83                    | 0.66   | 68.49        | 110.83       | -42.34 |
| 5724.20 | S       | Peak             | 73.44                    | 0.68   | 74.12        | 120.4064     | -46.29 |
| 5725.00 | E       | Peak             | 72.93                    | 0.69   | 73.62        | 122.23       | -48.61 |

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.


Unless otherwise stated the results shown in this test report teer only to the sample(s) tested and such as a feet and the sample states are stated and such as the sample state and the sample states are stated and such as the sample state and sample state may be prosecuted to the fullest extent of the law.



Page: 180 of 216

Operation Mode: 802.11n20B4 Test Date: 2017/10/13 Fundamental Frequency: Temp. / Humi. :

5745 MHz 22.8deg\_C/59RH Operation Band: BE CH LOW Test Engineer: Enzo EUT Pol.: Measurement Antenna Pol.: E2 Horizontal

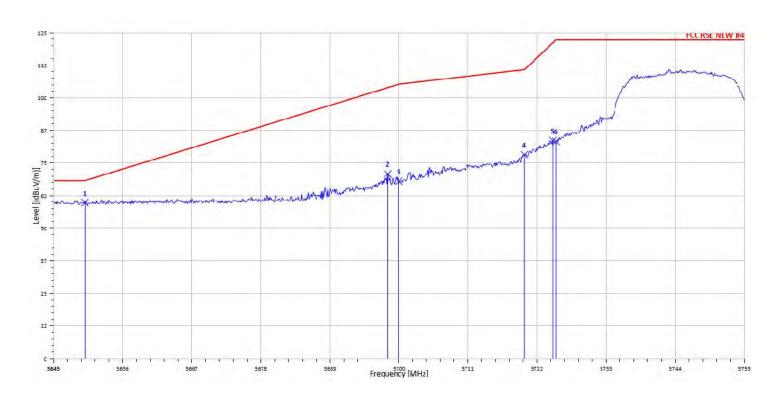

| Freq.   | Note    | Detector<br>Mode | Spectum<br>Reading Level | Factor | Actual<br>FS | Limit<br>@3m | Margin |
|---------|---------|------------------|--------------------------|--------|--------------|--------------|--------|
| MHz     | F/H/E/S | PK/QP/AV         | dΒμV                     | dB     | dBµV/m       | dBµV/m       | dB     |
| 5650.00 | S       | Peak             | 59.17                    | 0.63   | 59.80        | 68.23        | -8.43  |
| 5698.24 | S       | Peak             | 70.28                    | 0.56   | 70.84        | 103.9278     | -33.09 |
| 5700.00 | S       | Peak             | 67.49                    | 0.56   | 68.05        | 105.23       | -37.18 |
| 5720.00 | S       | Peak             | 77.52                    | 0.66   | 78.18        | 110.83       | -32.65 |
| 5724.53 | S       | Peak             | 82.94                    | 0.68   | 83.62        | 121.1579     | -37.54 |
| 5725.00 | E       | Peak             | 82.62                    | 0.69   | 83.30        | 122.23       | -38.93 |

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Unless otherwise stated the results shown in this test report teer only to the sample(s) tested and such as a feet and the sample states are stated and such as the sample state and the sample states are stated and such as the sample state and sample state may be prosecuted to the fullest extent of the law.




Page: 181 of 216

Operation Mode: 802.11n20B4 Test Date: 2017/10/13

Fundamental Frequency: 5825 MHz Temp. / Humi. : 22.8deg\_C/59RH

Operation Band: Test Engineer: BE CH HIGH Enzo EUT Pol.: Measurement Antenna Pol.: Vertical E2

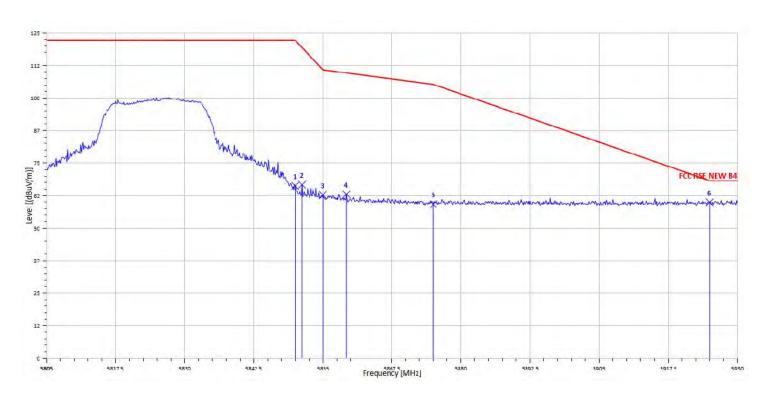

| Freq.   | Note    | Detector<br>Mode | Spectum<br>Reading Level | Factor | Actual<br>FS | Limit<br>@3m | Margin |
|---------|---------|------------------|--------------------------|--------|--------------|--------------|--------|
| MHz     | F/H/E/S | PK/QP/AV         | dΒμV                     | dB     | dBµV/m       | dBµV/m       | dB     |
| 5850.00 | E       | Peak             | 65.17                    | 1.01   | 66.18        | 122.23       | -56.05 |
| 5851.25 | S       | Peak             | 65.65                    | 1.01   | 66.66        | 119.38       | -52.72 |
| 5855.00 | S       | Peak             | 61.82                    | 1.01   | 62.83        | 110.83       | -48.00 |
| 5859.25 | S       | Peak             | 62.05                    | 1.00   | 63.05        | 109.64       | -46.59 |
| 5875.00 | S       | Peak             | 58.17                    | 0.99   | 59.16        | 105.23       | -46.07 |
| 5925.00 | S       | Peak             | 58.85                    | 1.04   | 59.89        | 68.23        | -8.34  |

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Unless otherwise stated the results shown in this test report teer only to the sample(s) tested and such as a feet and the sample states are stated and such as the sample state and the sample states are stated and such as the sample state and sample state may be prosecuted to the fullest extent of the law.

No.134, WuKungRoad, New TaipeiIndustrial Park, WukuDistrict, New TaipeiCity, Taiwan 24803/新北市五股區新北產業園區五工路 134 號

www.tw.sqs.com




Page: 182 of 216

802.11n20B4 Test Date: Operation Mode: 2017/10/13

Fundamental Frequency: 5825 MHz Temp. / Humi. : 22.8deg\_C/59RH

Operation Band: BE CH HIGH Test Engineer: Enzo EUT Pol.: E2 Measurement Antenna Pol.: Horizontal

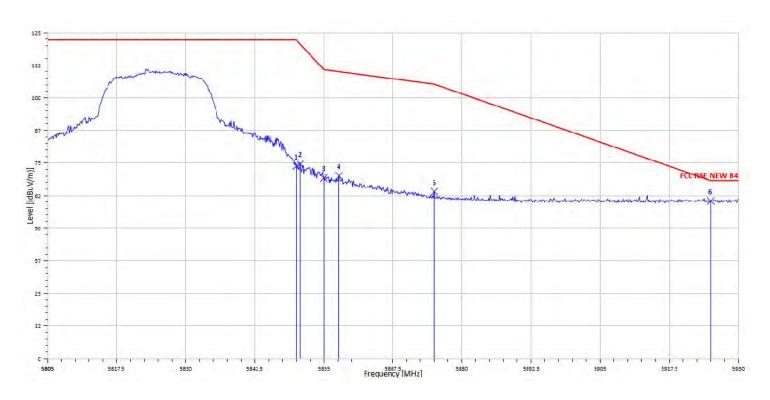

| Freq.   | Note    | Detector<br>Mode | Spectum<br>Reading Level | Factor | Actual<br>FS | Limit<br>@3m | Margin |
|---------|---------|------------------|--------------------------|--------|--------------|--------------|--------|
| MHz     | F/H/E/S | PK/QP/AV         | dΒμV                     | dB     | dBµV/m       | dBµV/m       | dB     |
| 5850.00 | E       | Peak             | 72.85                    | 1.01   | 73.86        | 122.23       | -48.37 |
| 5850.75 | S       | Peak             | 73.67                    | 1.01   | 74.68        | 120.52       | -45.84 |
| 5855.00 | S       | Peak             | 68.22                    | 1.01   | 69.22        | 110.83       | -41.61 |
| 5857.75 | S       | Peak             | 69.05                    | 1.00   | 70.06        | 110.06       | -40.00 |
| 5875.00 | S       | Peak             | 62.99                    | 0.99   | 63.98        | 105.23       | -41.25 |
| 5925.00 | S       | Peak             | 59.42                    | 1.04   | 60.46        | 68.23        | -7.77  |

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Unless otherwise stated the results shown in this test report teer only to the sample(s) tested and such as a feet and the sample states are stated and such as the sample state and the sample states are stated and such as the sample state and sample state may be prosecuted to the fullest extent of the law.




Page: 183 of 216

## 802.11n40 HT mode

Operation Mode: 802.11n40B1 Test Date: 2017/10/6

Fundamental Frequency: 5190 MHz Temp. / Humi. : 22.8deg\_C/59RH

Operation Band: BE CH LOW Test Engineer: Enzo EUT Pol.: Measurement Antenna Pol.: E2 Vertical

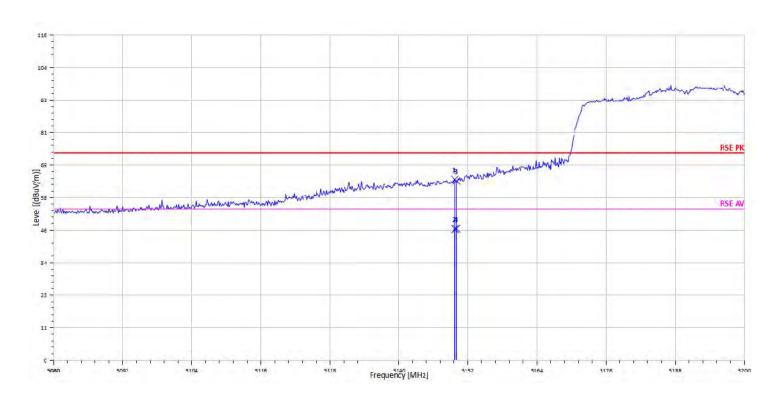

| Freq.   | Note    | Detector | Spectum       | Factor | Actual | Limit  | Margin |
|---------|---------|----------|---------------|--------|--------|--------|--------|
|         |         | Mode     | Reading Level |        | FS     | @3m    |        |
| MHz     | F/H/E/S | PK/QP/AV | dΒμV          | dB     | dBµV/m | dBµV/m | dB     |
| 5149.72 | S       | Peak     | 64.64         | -0.17  | 64.47  | 74     | -9.53  |
| 5149.72 | S       | Average  | 46.95         | -0.17  | 46.78  | 54     | -7.22  |
| 5150.00 | E       | Peak     | 64.13         | -0.17  | 63.96  | 74     | -10.04 |
| 5150.00 | Ε       | Average  | 47.07         | -0.17  | 46.90  | 54     | -7.11  |

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Unless otherwise stated the results shown in this test report teer only to the sample(s) tested and such as a feet and the sample states are stated and such as the sample state and the sample states are stated and such as the sample state and sample state may be prosecuted to the fullest extent of the law.




Page: 184 of 216

Test Date: Operation Mode: 802.11n40B1 2017/10/6

Fundamental Frequency: 5190 MHz Temp. / Humi. : 22.8deg\_C/59RH

Operation Band: BE CH LOW Test Engineer: Enzo EUT Pol.: E2 Measurement Antenna Pol.: Horizontal

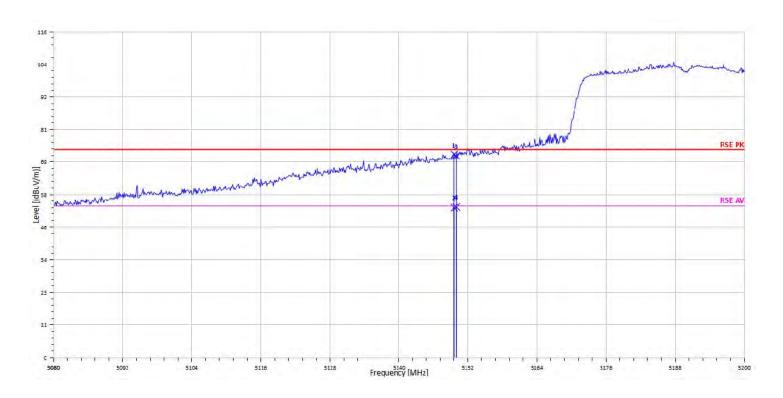

| Freq.   | Note    | Detector | Spectum       | Factor | Actual | Limit  | Margin |
|---------|---------|----------|---------------|--------|--------|--------|--------|
|         |         | Mode     | Reading Level |        | FS     | @3m    |        |
| MHz     | F/H/E/S | PK/QP/AV | dΒμV          | dB     | dBµV/m | dBµV/m | dB     |
| 5149.60 | S       | Peak     | 72.44         | -0.17  | 72.27  | 74     | -1.73  |
| 5149.60 | S       | Average  | 53.57         | -0.17  | 53.40  | 54     | -0.60  |
| 5150.00 | E       | Peak     | 71.97         | -0.17  | 71.80  | 74     | -2.20  |
| 5150.00 | E       | Average  | 53.75         | -0.17  | 53.58  | 54     | -0.42  |

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Unless otherwise stated the results shown in this test report teer only to the sample(s) tested and such as a feet and the sample states are stated and such as the sample state and the sample states are stated and such as the sample state and sample state may be prosecuted to the fullest extent of the law.




Page: 185 of 216

802.11n40B2 Operation Mode: Test Date: 2017/10/6

Fundamental Frequency: 5310 MHz Temp. / Humi. : 22.8deg\_C/59RH

Operation Band: BE CH HIGH Test Engineer: Enzo EUT Pol.: E2 Measurement Antenna Pol.: Vertical

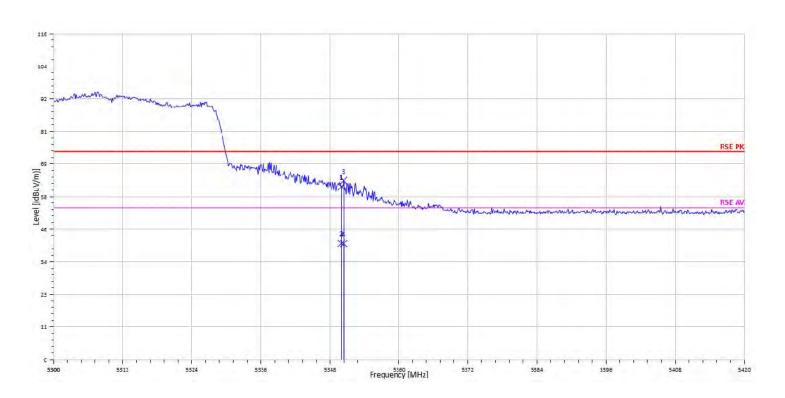

| Freq.   | Note    | Detector | Spectum       | Factor | Actual | Limit  | Margin |
|---------|---------|----------|---------------|--------|--------|--------|--------|
|         |         | Mode     | Reading Level |        | FS     | @3m    |        |
| MHz     | F/H/E/S | PK/QP/AV | dΒμV          | dB     | dBµV/m | dBµV/m | dB     |
| 5350.00 | Е       | Peak     | 61.63         | -0.15  | 61.48  | 74     | -12.52 |
| 5350.00 | E       | Average  | 41.48         | -0.15  | 41.33  | 54     | -12.67 |
| 5350.40 | S       | Peak     | 63.87         | -0.15  | 63.72  | 74     | -10.28 |
| 5350.40 | S       | Average  | 41.39         | -0.15  | 41.24  | 54     | -12.76 |

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Unless otherwise stated the results shown in this test report teer only to the sample(s) tested and such as a feet and the sample states are stated and such as the sample state and the sample states are stated and such as the sample state and sample state may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.




Page: 186 of 216

802.11n40B2 Test Date: Operation Mode: 2017/10/6

Fundamental Frequency: 5310 MHz Temp. / Humi. : 22.8deg\_C/59RH

Operation Band: BE CH HIGH Test Engineer: Enzo EUT Pol.: E2 Measurement Antenna Pol.: Horizontal

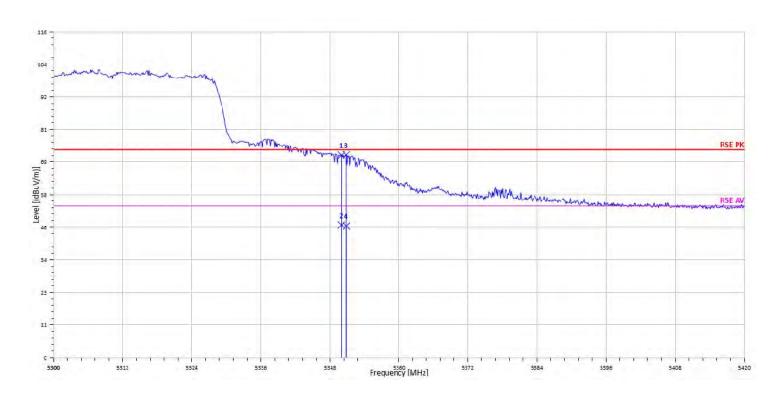

| Freq.   | Note    | Detector | Spectum       | Factor | Actual | Limit  | Margin |
|---------|---------|----------|---------------|--------|--------|--------|--------|
|         |         | Mode     | Reading Level |        | FS     | @3m    |        |
| MHz     | F/H/E/S | PK/QP/AV | dBµV          | dB     | dBµV/m | dBµV/m | dB     |
| 5350.00 | Е       | Peak     | 72.25         | -0.15  | 72.09  | 74     | -1.91  |
| 5350.00 | E       | Average  | 47.35         | -0.15  | 47.19  | 54     | -6.81  |
| 5350.88 | S       | Peak     | 72.34         | -0.15  | 72.18  | 74     | -1.82  |
| 5350.88 | S       | Average  | 46.95         | -0.15  | 46.80  | 54     | -7.20  |

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

t (886-2) 2299-3279

Unless otherwise stated the results shown in this test report teer only to the sample(s) tested and such as a feet and the sample states are stated and such as the sample state and the sample states are stated and such as the sample state and sample state may be prosecuted to the fullest extent of the law.




Page: 187 of 216

802.11n40B3 Test Date: Operation Mode: 2017/10/6

Fundamental Frequency: 5510 MHz Temp. / Humi. : 22.8deg\_C/59RH

Operation Band: BE CH LOW Test Engineer: Enzo EUT Pol.: E2 Measurement Antenna Pol.: Vertical

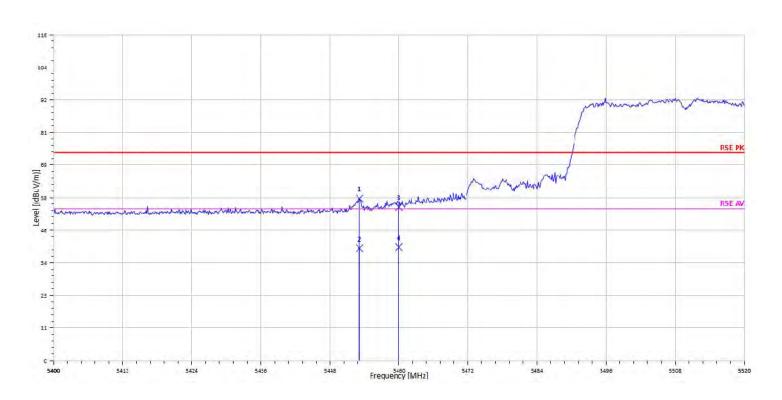

| Freq.   | Note    | Detector | Spectum       | Factor | Actual | Limit  | Margin |
|---------|---------|----------|---------------|--------|--------|--------|--------|
|         |         | Mode     | Reading Level |        | FS     | @3m    |        |
| MHz     | F/H/E/S | PK/QP/AV | dΒμV          | dB     | dBµV/m | dBµV/m | dB     |
| 5453.16 | S       | Peak     | 57.64         | 0.04   | 57.68  | 74     | -16.32 |
| 5453.16 | S       | Average  | 39.91         | 0.04   | 39.95  | 74     | -34.05 |
| 5460.00 | E       | Peak     | 54.56         | 0.06   | 54.62  | 74     | -19.38 |
| 5460.00 | E       | Average  | 40.26         | 0.06   | 40.32  | 74     | -33.68 |

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Unless otherwise stated the results shown in this test report teer only to the sample(s) tested and such as a feet and the sample states are stated and such as the sample state and the sample states are stated and such as the sample state and sample state may be prosecuted to the fullest extent of the law.




Page: 188 of 216

802.11n40B3 Test Date: Operation Mode: 2017/10/6

Fundamental Frequency: 5510 MHz Temp. / Humi. : 22.8deg\_C/59RH

Operation Band: BE CH LOW Test Engineer: Enzo EUT Pol.: E2 Measurement Antenna Pol.: Horizontal

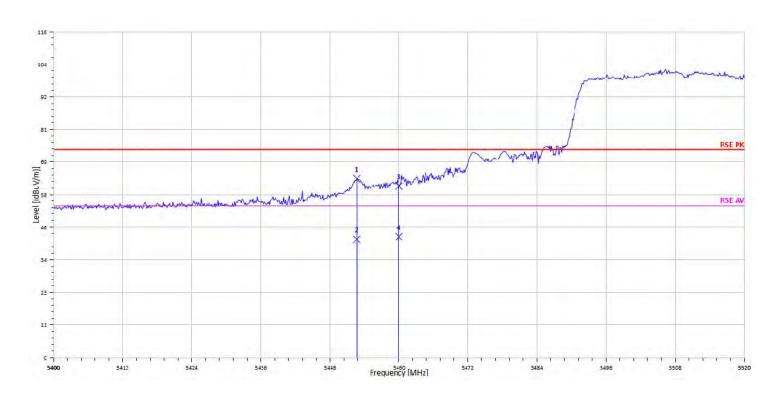

| Freq.   | Note    | Detector | Spectum       | Factor | Actual | Limit  | Margin |
|---------|---------|----------|---------------|--------|--------|--------|--------|
|         |         | Mode     | Reading Level |        | FS     | @3m    |        |
| MHz     | F/H/E/S | PK/QP/AV | dΒμV          | dB     | dBµV/m | dBµV/m | dB     |
| 5452.68 | S       | Peak     | 63.57         | 0.04   | 63.61  | 74     | -10.39 |
| 5452.68 | S       | Average  | 42.02         | 0.04   | 42.06  | 54     | -11.94 |
| 5460.00 | E       | Peak     | 60.96         | 0.06   | 61.02  | 74     | -12.98 |
| 5460.00 | E       | Average  | 42.93         | 0.06   | 42.99  | 54     | -11.01 |

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Unless otherwise stated the results shown in this test report teer only to the sample(s) tested and such as a feet and the sample states are stated and such as the sample state and the sample states are stated and such as the sample state and sample state may be prosecuted to the fullest extent of the law.




Page: 189 of 216

Test Date: Operation Mode: 802.11n40B3 2017/10/6

Fundamental Frequency: 5510 MHz Temp. / Humi. : 22.8deg\_C/59RH

Operation Band: BE CH LOW RSE Test Engineer: Enzo EUT Pol.: E2 Measurement Antenna Pol.: Vertical

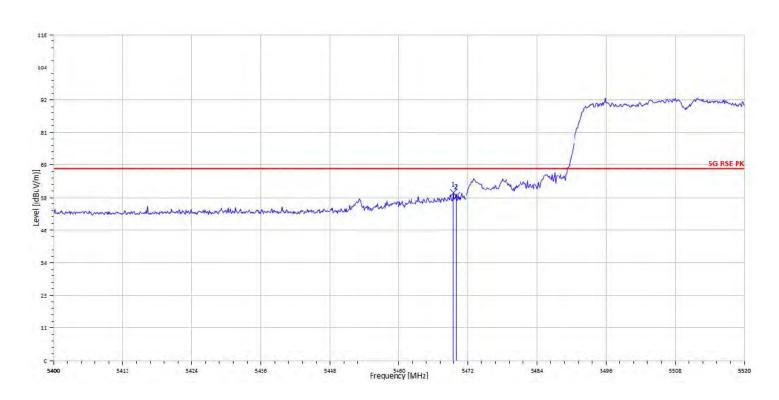

| Freq.   | Note    | Detector | Spectum       | Factor | Actual | Limit  | Margin |
|---------|---------|----------|---------------|--------|--------|--------|--------|
|         |         | Mode     | Reading Level |        | FS     | @3m    |        |
| MHz     | F/H/E/S | PK/QP/AV | dBµV          | dB     | dΒμV/m | dBµV/m | dB     |
| 5469.48 | S       | Peak     | 59.52         | 0.08   | 59.60  | 68.3   | -8.70  |
| 5470.00 | E       | Peak     | 58.50         | 0.08   | 58.58  | 68.3   | -9.72  |

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Unless otherwise stated the results shown in this test report teer only to the sample(s) tested and such as a feet and the sample states are stated and such as the sample state and the sample states are stated and such as the sample state and sample state may be prosecuted to the fullest extent of the law.




Page: 190 of 216

Test Date: Operation Mode: 802.11n40B3 2017/10/6

Fundamental Frequency: 5510 MHz Temp. / Humi. : 22.8deg\_C/59RH

Operation Band: BE CH LOW RSE Test Engineer: Enzo EUT Pol.: Measurement Antenna Pol.: E2 Horizontal

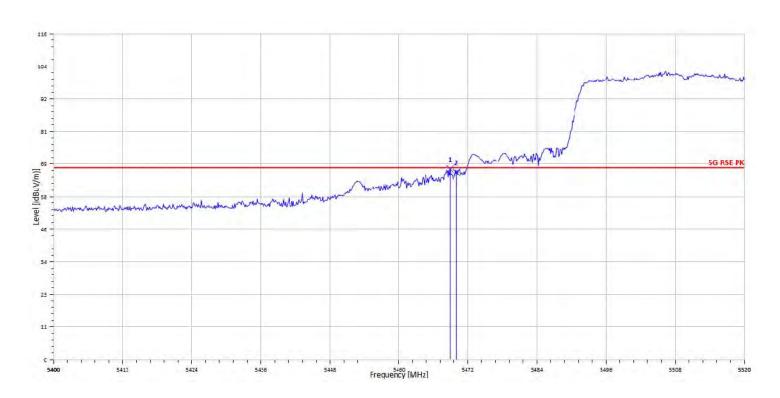

| Freq.   | Note    | Detector | Spectum       | Factor | Actual | Limit  | Margin |
|---------|---------|----------|---------------|--------|--------|--------|--------|
|         |         | Mode     | Reading Level |        | FS     | @3m    |        |
| MHz     | F/H/E/S | PK/QP/AV | dBµV          | dB     | dΒμV/m | dΒμV/m | dB     |
| 5468.88 | S       | Peak     | 67.68         | 0.08   | 67.76  | 68.3   | -0.54  |
| 5470.00 | E       | Peak     | 66.55         | 0.08   | 66.63  | 68.3   | -1.67  |

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Unless otherwise stated the results shown in this test report teer only to the sample(s) tested and such as a feet and the sample states are stated and such as the sample state and the sample states are stated and such as the sample state and sample state may be prosecuted to the fullest extent of the law.




Page: 191 of 216

802.11n40B3 Operation Mode: Test Date: 2017/10/6

Fundamental Frequency: 5670 MHz Temp. / Humi. : 22.8deg\_C/59RH

Operation Band: BE CH HIGH Test Engineer: Enzo EUT Pol.: E2 Measurement Antenna Pol.: Vertical

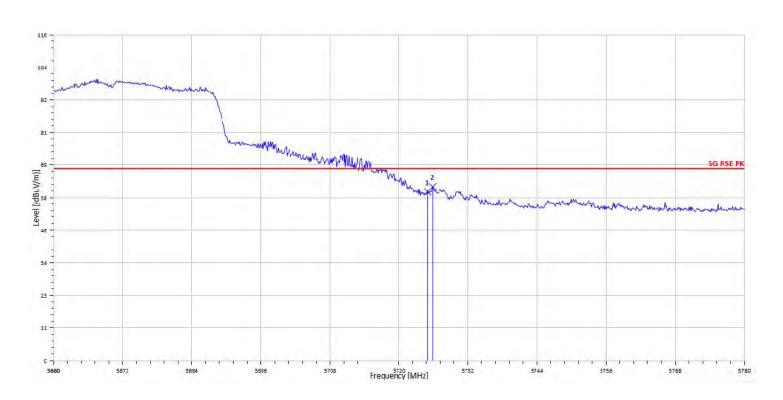

| Freq.   | Note    | Detector | Spectum       | Factor | Actual | Limit  | Margin |
|---------|---------|----------|---------------|--------|--------|--------|--------|
|         |         | Mode     | Reading Level |        | FS     | @3m    |        |
| MHz     | F/H/E/S | PK/QP/AV | dBµV          | dB     | dBµV/m | dBµV/m | dB     |
| 5725.00 | E       | Peak     | 59.37         | 0.69   | 60.05  | 68.3   | -8.25  |
| 5725.88 | S       | Peak     | 61.17         | 0.69   | 61.86  | 68.3   | -6.44  |

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Unless otherwise stated the results shown in this test report teer only to the sample(s) tested and such as a feet and the sample states are stated and such as the sample state and the sample states are stated and such as the sample state and sample state may be prosecuted to the fullest extent of the law.




Page: 192 of 216

802.11n40B3 Operation Mode: Test Date: 2017/10/6

Fundamental Frequency: 5670 MHz Temp. / Humi. : 22.8deg\_C/59RH

Operation Band: BE CH HIGH Test Engineer: Enzo EUT Pol.: E2 Measurement Antenna Pol.: Horizontal

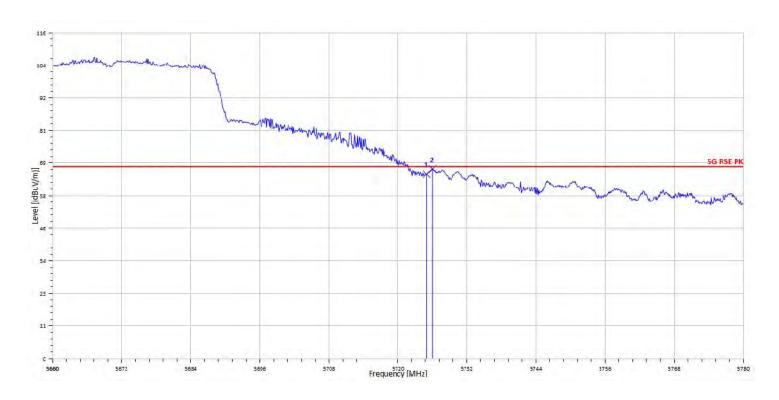

| Freq.   | Note    | Detector | Spectum       | Factor | Actual | Limit  | Margin |
|---------|---------|----------|---------------|--------|--------|--------|--------|
|         |         | Mode     | Reading Level |        | FS     | @3m    |        |
| MHz     | F/H/E/S | PK/QP/AV | dBµV          | dB     | dBµV/m | dBµV/m | dB     |
| 5725.00 | Е       | Peak     | 64.94         | 0.69   | 65.62  | 68.3   | -2.68  |
| 5726.00 | S       | Peak     | 66.79         | 0.69   | 67.48  | 68.3   | -0.82  |

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

t (886-2) 2299-3279

Unless otherwise stated the results shown in this test report teer only to the sample(s) tested and such as a feet and the sample states are stated and such as the sample state and the sample states are stated and such as the sample state and sample state may be prosecuted to the fullest extent of the law.




Page: 193 of 216

Operation Mode: 802.11n40B4 Test Date: 2017/10/13

Fundamental Frequency: 5755 MHz Temp. / Humi. : 22.8deg\_C/59RH

Operation Band: BE CH LOW Test Engineer: Enzo EUT Pol.: Measurement Antenna Pol.: E2 Vertical

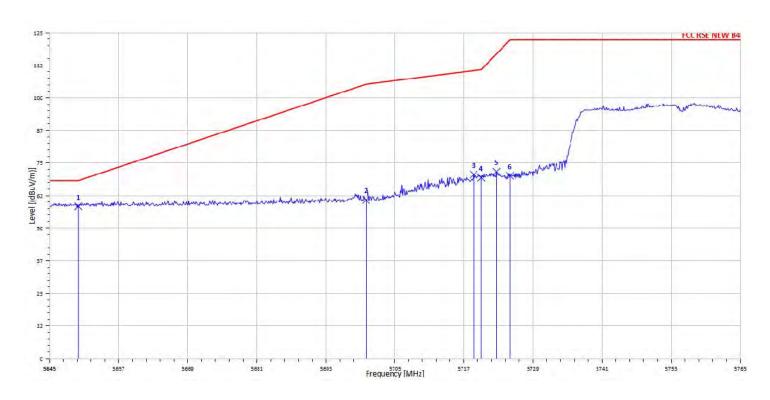

| Freq.   | Note    | Detector<br>Mode | Spectum<br>Reading Level | Factor | Actual<br>FS | Limit<br>@3m | Margin |
|---------|---------|------------------|--------------------------|--------|--------------|--------------|--------|
| MHz     | F/H/E/S | PK/QP/AV         | dΒμV                     | dB     | dBµV/m       | dBµV/m       | dB     |
| 5650.00 | S       | Peak             | 57.75                    | 0.63   | 58.37        | 68.23        | -9.86  |
| 5700.00 | S       | Peak             | 60.25                    | 0.56   | 60.81        | 105.23       | -44.42 |
| 5718.68 | S       | Peak             | 69.94                    | 0.65   | 70.59        | 110.4604     | -39.87 |
| 5720.00 | S       | Peak             | 68.73                    | 0.66   | 69.39        | 110.83       | -41.44 |
| 5722.64 | S       | Peak             | 71.04                    | 0.67   | 71.71        | 116.8495     | -45.14 |
| 5725.00 | E       | Peak             | 69.43                    | 0.69   | 70.12        | 122.23       | -52.11 |

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Unless otherwise stated the results shown in this test report teer only to the sample(s) tested and such as a feet and the sample states are stated and such as the sample state and the sample states are stated and such as the sample state and sample state may be prosecuted to the fullest extent of the law.




Page: 194 of 216

Operation Mode: 802.11n40B4 Test Date: 2017/10/13

Fundamental Frequency: 5755 MHz Temp. / Humi. : 22.8deg\_C/59RH

Operation Band: BE CH LOW Test Engineer: Enzo EUT Pol.: Measurement Antenna Pol.: E2 Horizontal

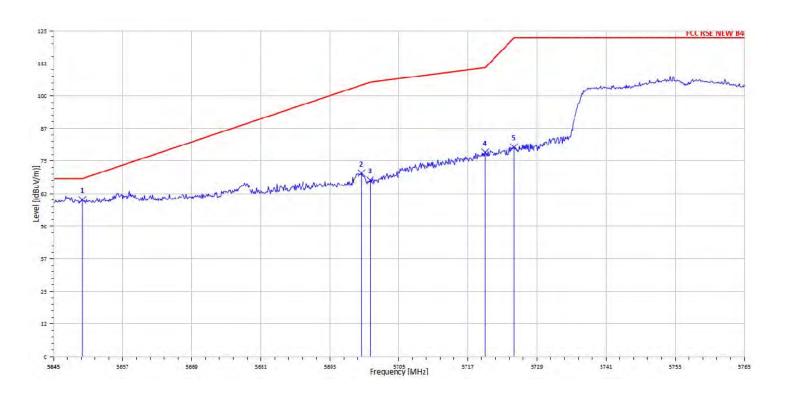

| Freq.   | Note    | Detector<br>Mode | Spectum<br>Reading Level | Factor | Actual<br>FS | Limit<br>@3m | Margin |
|---------|---------|------------------|--------------------------|--------|--------------|--------------|--------|
| MHz     | F/H/E/S | PK/QP/AV         | dΒμV                     | dB     | dBµV/m       | dBµV/m       | dB     |
| 5650.00 | S       | Peak             | 59.47                    | 0.63   | 60.09        | 68.23        | -8.14  |
| 5698.52 | S       | Peak             | 69.80                    | 0.56   | 70.36        | 104.1348     | -33.77 |
| 5700.00 | S       | Peak             | 67.03                    | 0.56   | 67.59        | 105.23       | -37.64 |
| 5720.00 | S       | Peak             | 77.70                    | 0.66   | 78.36        | 110.83       | -32.47 |
| 5725.00 | E       | Peak             | 79.59                    | 0.69   | 80.28        | 122.23       | -41.95 |

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Unless otherwise stated the results shown in this test report teer only to the sample(s) tested and such as a feet and the sample states are stated and such as the sample state and the sample states are stated and such as the sample state and sample state may be prosecuted to the fullest extent of the law.




Page: 195 of 216

802.11n40B4 Operation Mode: Test Date: 2017/10/13

Fundamental Frequency: 5795 MHz Temp. / Humi. : 22.8deg\_C/59RH

Operation Band: BE CH HIGH Test Engineer: Enzo EUT Pol.: E2 Measurement Antenna Pol. : Vertical

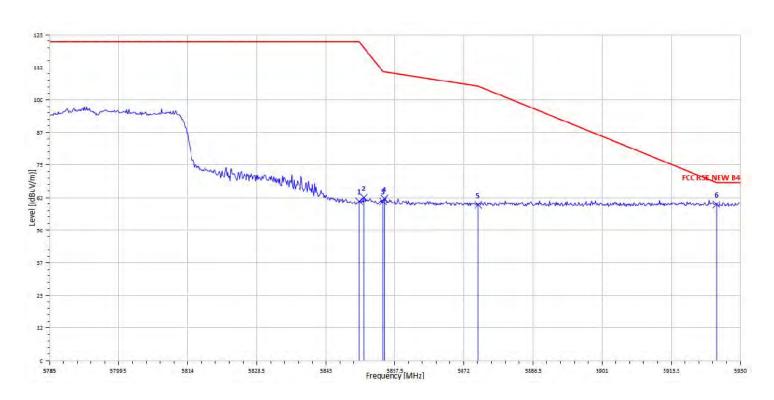

| Freq.   | Note    | Detector<br>Mode | Spectum<br>Reading Level | Factor | Actual<br>FS | Limit<br>@3m | Margin |
|---------|---------|------------------|--------------------------|--------|--------------|--------------|--------|
| MHz     | F/H/E/S | PK/QP/AV         | dΒμV                     | dB     | dBµV/m       | dBµV/m       | dB     |
| 5850.00 | E       | Peak             | 60.10                    | 1.01   | 61.11        | 122.23       | -61.12 |
| 5850.98 | S       | Peak             | 61.53                    | 1.01   | 62.54        | 120.0068     | -57.47 |
| 5855.00 | S       | Peak             | 60.02                    | 1.01   | 61.02        | 110.83       | -49.81 |
| 5855.33 | S       | Peak             | 61.13                    | 1.00   | 62.13        | 110.7389     | -48.61 |
| 5875.00 | S       | Peak             | 58.75                    | 0.99   | 59.73        | 105.23       | -45.50 |
| 5925.00 | S       | Peak             | 58.83                    | 1.04   | 59.87        | 68.23        | -8.36  |

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Unless otherwise stated the results shown in this test report teer only to the sample(s) tested and such as a feet and the sample states are stated and such as the sample state and the sample states are stated and such as the sample state and sample state may be prosecuted to the fullest extent of the law.




Page: 196 of 216

802.11n40B4 Operation Mode: Test Date: 2017/10/13

Fundamental Frequency: 5795 MHz Temp. / Humi. : 22.8deg\_C/59RH

Operation Band: BE CH HIGH Test Engineer: Enzo EUT Pol.: E2 Measurement Antenna Pol.: Horizontal

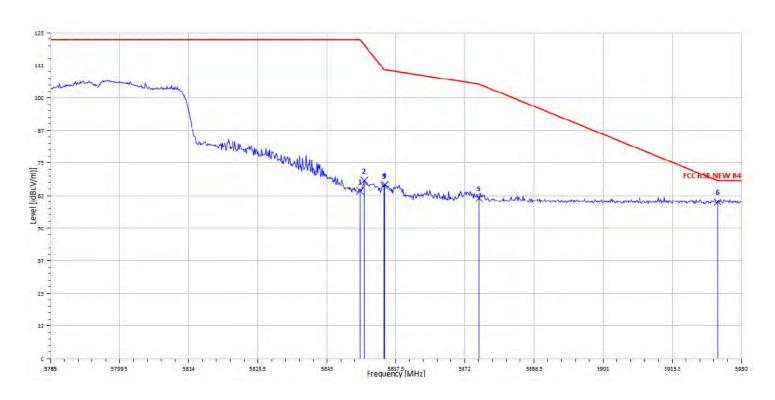

| Freq.   | Note    | Detector<br>Mode | Spectum<br>Reading Level | Factor | Actual<br>FS | Limit<br>@3m | Margin |
|---------|---------|------------------|--------------------------|--------|--------------|--------------|--------|
| MHz     | F/H/E/S | PK/QP/AV         | dΒμV                     | dB     | dBµV/m       | dBµV/m       | dB     |
| 5850.00 | Е       | Peak             | 63.23                    | 1.01   | 64.24        | 122.23       | -57.99 |
| 5850.83 | S       | Peak             | 67.28                    | 1.01   | 68.29        | 120.3374     | -52.05 |
| 5855.00 | S       | Peak             | 65.32                    | 1.01   | 66.33        | 110.83       | -44.50 |
| 5855.18 | S       | Peak             | 65.76                    | 1.00   | 66.76        | 110.7796     | -44.02 |
| 5875.00 | S       | Peak             | 60.54                    | 0.99   | 61.52        | 105.23       | -43.71 |
| 5925.00 | S       | Peak             | 59.00                    | 1.04   | 60.04        | 68.23        | -8.19  |

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Unless otherwise stated the results shown in this test report teer only to the sample(s) tested and such as a feet and the sample states are stated and such as the sample state and the sample states are stated and such as the sample state and sample state may be prosecuted to the fullest extent of the law.




Page: 197 of 216

## 802.11ac80 VHT mode

Operation Mode: 802.11ac80B1 Test Date: 2017/10/13

Fundamental Frequency: 5210 MHz Temp. / Humi. : 22.8deg\_C/59RH

Operation Band: Test Engineer: BE CH LOW Enzo EUT Pol.: Vertical Measurement Antenna Pol. : E2

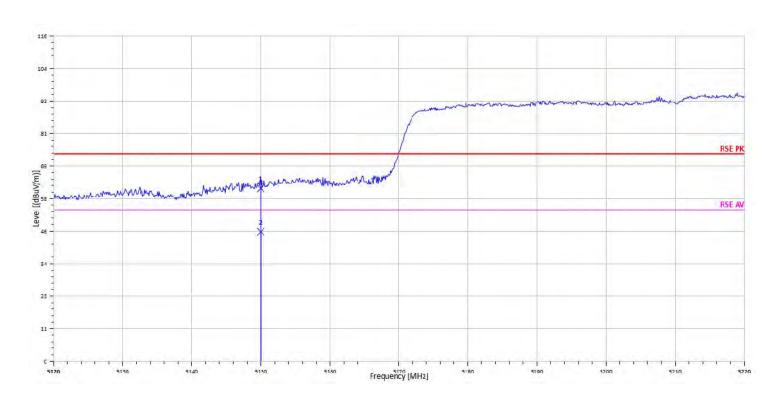

| Freq.   | Note    | Detector | Spectum       | Factor | Actual | Limit  | Margin |
|---------|---------|----------|---------------|--------|--------|--------|--------|
|         |         | Mode     | Reading Level |        | FS     | @3m    |        |
| MHz     | F/H/E/S | PK/QP/AV | dBµV          | dB     | dBµV/m | dΒμV/m | dB     |
| 5150.00 | Е       | Peak     | 61.80         | -0.17  | 61.63  | 74     | -12.37 |
| 5150.00 | Е       | Average  | 46.36         | -0.17  | 46.19  | 54     | -7.81  |

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Unless otherwise stated the results shown in this test report teer only to the sample(s) tested and such as a feet and the sample states are stated and such as the sample state and the sample states are stated and such as the sample state and sample state may be prosecuted to the fullest extent of the law.




Page: 198 of 216

Operation Mode: 802.11ac80B1 Test Date: 2017/10/13

Fundamental Frequency: 5210 MHz Temp. / Humi. : 22.8deg\_C/59RH

Operation Band: BE CH LOW Test Engineer: Enzo EUT Pol.: E2 Measurement Antenna Pol.: Horizontal

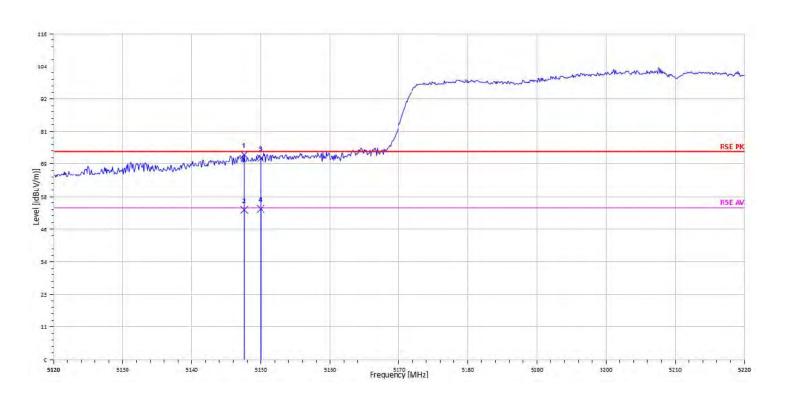

| Freq.   | Note    | Detector | Spectum       | Factor | Actual | Limit  | Margin |
|---------|---------|----------|---------------|--------|--------|--------|--------|
|         |         | Mode     | Reading Level |        | FS     | @3m    |        |
| MHz     | F/H/E/S | PK/QP/AV | dΒμV          | dB     | dBµV/m | dBµV/m | dB     |
| 5147.60 | S       | Peak     | 73.08         | -0.17  | 72.91  | 74     | -1.09  |
| 5147.60 | S       | Average  | 53.47         | -0.17  | 53.30  | 54     | -0.70  |
| 5150.00 | E       | Peak     | 71.80         | -0.17  | 71.63  | 74     | -2.37  |
| 5150.00 | Е       | Average  | 53.78         | -0.17  | 53.61  | 54     | -0.39  |

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Unless otherwise stated the results shown in this test report teer only to the sample(s) tested and such as a feet and the sample states are stated and such as the sample state and the sample states are stated and such as the sample state and sample state may be prosecuted to the fullest extent of the law.




Page: 199 of 216

Operation Mode: 802.11ac80B2 Test Date: 2017/10/13

Fundamental Frequency: 5290 MHz Temp. / Humi. : 22.8deg\_C/59RH

Operation Band: BE CH HIGH Test Engineer: Enzo EUT Pol.: Measurement Antenna Pol.: E2 Vertical

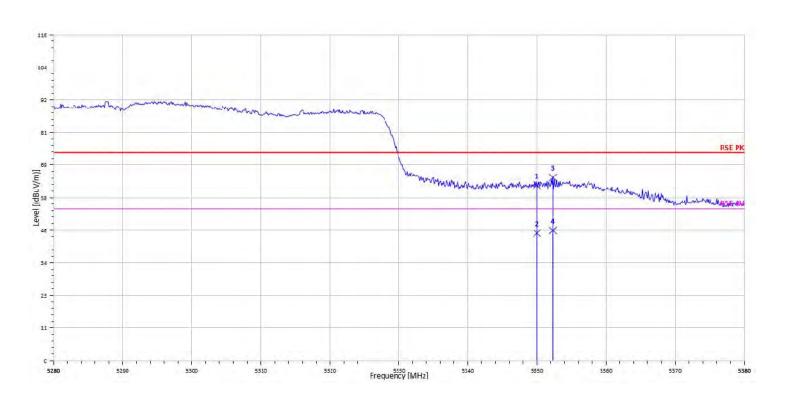

| Freq.   | Note    | Detector | Spectum       | Factor | Actual | Limit  | Margin |
|---------|---------|----------|---------------|--------|--------|--------|--------|
|         |         | Mode     | Reading Level |        | FS     | @3m    |        |
| MHz     | F/H/E/S | PK/QP/AV | dΒμV          | dB     | dBµV/m | dBµV/m | dB     |
| 5350.00 | Е       | Peak     | 62.55         | -0.15  | 62.39  | 74     | -11.61 |
| 5350.00 | E       | Average  | 45.48         | -0.15  | 45.33  | 54     | -8.67  |
| 5352.30 | S       | Peak     | 65.29         | -0.15  | 65.14  | 74     | -8.86  |
| 5352.30 | S       | Average  | 46.49         | -0.15  | 46.33  | 54     | -7.67  |

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

t (886-2) 2299-3279

Unless otherwise stated the results shown in this test report teer only to the sample(s) tested and such as a feet and the sample states are stated and such as the sample state and the sample states are stated and such as the sample state and sample state may be prosecuted to the fullest extent of the law.

f (886-2) 2298-0488




Page: 200 of 216

Operation Mode: 802.11ac80B2 Test Date: 2017/10/13

Fundamental Frequency: 5290 MHz Temp. / Humi. : 22.8deg\_C/59RH

Operation Band: BE CH HIGH Test Engineer: Enzo EUT Pol.: Measurement Antenna Pol.: E2 Horizontal

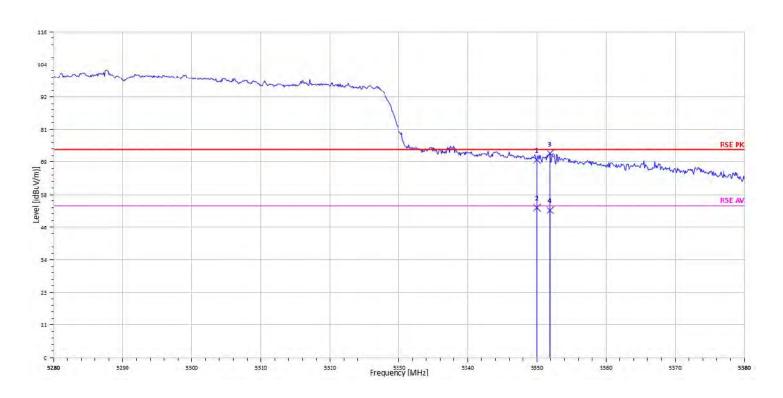

| Freq.   | Note    | Detector | Spectum       | Factor | Actual | Limit  | Margin |
|---------|---------|----------|---------------|--------|--------|--------|--------|
|         |         | Mode     | Reading Level |        | FS     | @3m    |        |
| MHz     | F/H/E/S | PK/QP/AV | dΒμV          | dB     | dBµV/m | dBµV/m | dB     |
| 5350.00 | Е       | Peak     | 70.47         | -0.15  | 70.32  | 74     | -3.68  |
| 5350.00 | E       | Average  | 53.51         | -0.15  | 53.36  | 54     | -0.64  |
| 5351.90 | S       | Peak     | 72.85         | -0.15  | 72.70  | 74     | -1.30  |
| 5351.90 | S       | Average  | 52.60         | -0.15  | 52.45  | 54     | -1.55  |

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Unless otherwise stated the results shown in this test report teer only to the sample(s) tested and such as a feet and the sample states are stated and such as the sample state and the sample states are stated and such as the sample state and sample state may be prosecuted to the fullest extent of the law.




Page: 201 of 216

Operation Mode: 802.11ac80B3 Test Date: 2017/10/13

Fundamental Frequency: 5530 MHz Temp. / Humi. : 22.8deg\_C/59RH

Operation Band: BE CH LOW Test Engineer: Enzo EUT Pol.: Measurement Antenna Pol.: E2 Vertical

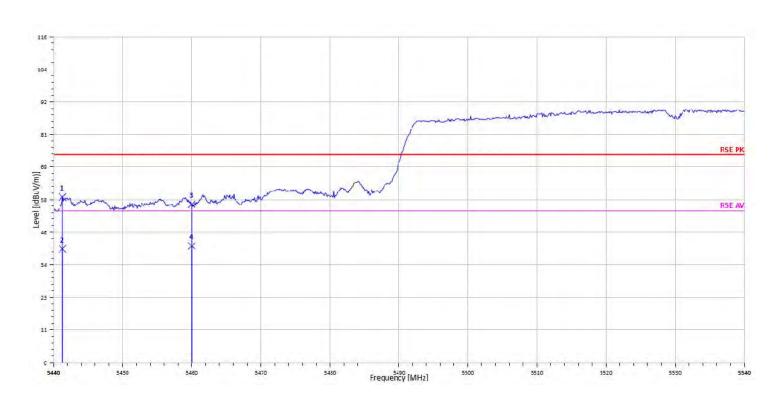

| Freq.   | Note    | Detector | Spectum       | Factor | Actual | Limit  | Margin |
|---------|---------|----------|---------------|--------|--------|--------|--------|
|         |         | Mode     | Reading Level |        | FS     | @3m    |        |
| MHz     | F/H/E/S | PK/QP/AV | dΒμV          | dB     | dBµV/m | dBµV/m | dB     |
| 5441.30 | S       | Peak     | 58.87         | 0.01   | 58.89  | 74     | -15.11 |
| 5441.30 | S       | Average  | 40.39         | 0.01   | 40.41  | 54     | -13.59 |
| 5460.00 | E       | Peak     | 56.24         | 0.06   | 56.30  | 74     | -17.70 |
| 5460.00 | Е       | Average  | 41.44         | 0.06   | 41.50  | 54     | -12.50 |

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Unless otherwise stated the results shown in this test report teer only to the sample(s) tested and such as a feet and the sample states are stated and such as the sample state and the sample states are stated and such as the sample state and sample state may be prosecuted to the fullest extent of the law.




Page: 202 of 216

Operation Mode: 802.11ac80B3 Test Date: 2017/10/13

Fundamental Frequency: 5530 MHz Temp. / Humi. : 22.8deg\_C/59RH

Operation Band: BE CH LOW Test Engineer: Enzo EUT Pol.: E2 Measurement Antenna Pol.: Horizontal

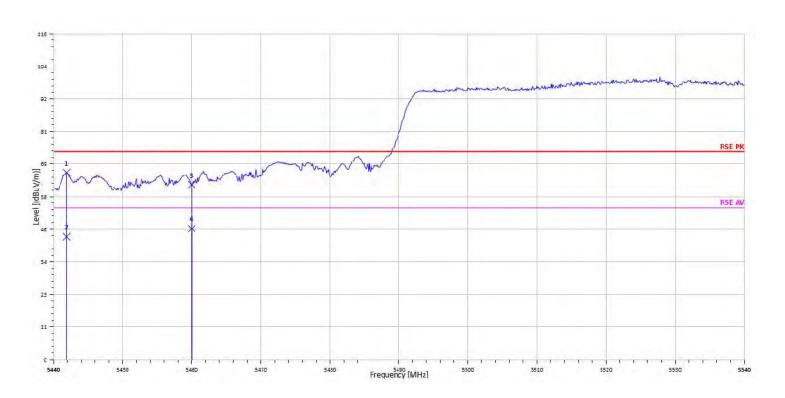

| Freq.   | Note    | Detector | Spectum       | Factor | Actual | Limit  | Margin |
|---------|---------|----------|---------------|--------|--------|--------|--------|
|         |         | Mode     | Reading Level |        | FS     | @3m    |        |
| MHz     | F/H/E/S | PK/QP/AV | dΒμV          | dB     | dBµV/m | dBµV/m | dB     |
| 5441.90 | S       | Peak     | 66.53         | 0.02   | 66.55  | 74     | -7.45  |
| 5441.90 | S       | Average  | 43.71         | 0.02   | 43.73  | 54     | -10.27 |
| 5460.00 | E       | Peak     | 62.18         | 0.06   | 62.24  | 74     | -11.76 |
| 5460.00 | E       | Average  | 46.53         | 0.06   | 46.59  | 54     | -7.41  |

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Unless otherwise stated the results shown in this test report teer only to the sample(s) tested and such as a feet and the sample states are stated and such as the sample state and the sample states are stated and such as the sample state and sample state may be prosecuted to the fullest extent of the law.




Page: 203 of 216

Operation Mode: 802.11ac80B3 Test Date: 2017/10/13

Fundamental Frequency: 5530 MHz Temp. / Humi. : 22.8deg\_C/59RH

Operation Band: BE CH LOW RSE Test Engineer: Enzo EUT Pol.: E2 Measurement Antenna Pol. : Vertical

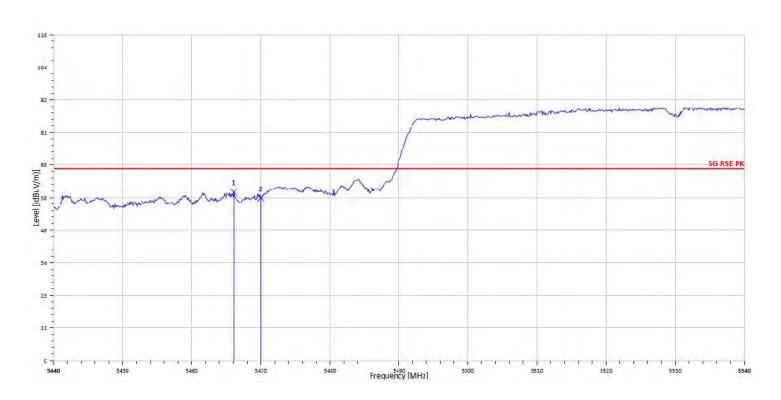

| Freq.   | Note    | Detector | Spectum       | Factor | Actual | Limit  | Margin |
|---------|---------|----------|---------------|--------|--------|--------|--------|
|         |         | Mode     | Reading Level |        | FS     | @3m    |        |
| MHz     | F/H/E/S | PK/QP/AV | dBµV          | dB     | dBµV/m | dBµV/m | dB     |
| 5466.10 | S       | Peak     | 59.87         | 0.07   | 59.94  | 68.3   | -8.36  |
| 5470.00 | E       | Peak     | 57.76         | 0.08   | 57.84  | 68.3   | -10.46 |

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Unless otherwise stated the results shown in this test report teer only to the sample(s) tested and such as a feet and the sample states are stated and such as the sample state and the sample states are stated and such as the sample state and sample state may be prosecuted to the fullest extent of the law.




Page: 204 of 216

Operation Mode: 802.11ac80B3 Test Date: 2017/10/13

Fundamental Frequency: 5530 MHz Temp. / Humi. : 22.8deg\_C/59RH

Operation Band: BE CH LOW RSE Test Engineer: Enzo EUT Pol.: E2 Measurement Antenna Pol. : Horizontal

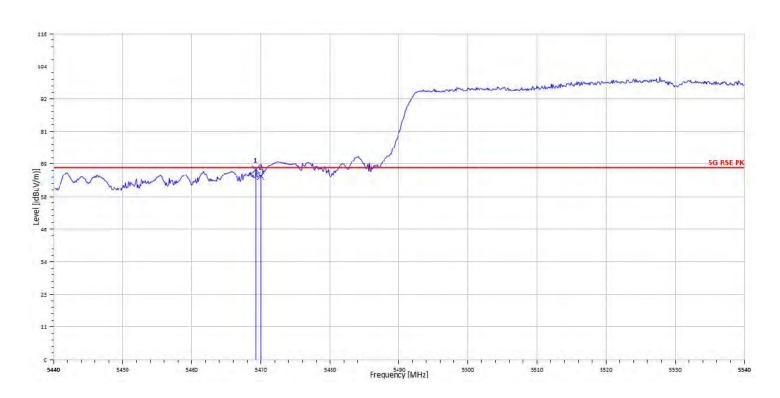

| Freq.   | Note    | Detector | Spectum       | Factor | Actual | Limit  | Margin |
|---------|---------|----------|---------------|--------|--------|--------|--------|
|         |         | Mode     | Reading Level |        | FS     | @3m    |        |
| MHz     | F/H/E/S | PK/QP/AV | dBµV          | dB     | dΒμV/m | dBµV/m | dB     |
| 5469.30 | S       | Peak     | 67.57         | 0.08   | 67.65  | 68.3   | -0.65  |
| 5470.00 | E       | Peak     | 65.15         | 0.08   | 65.23  | 68.3   | -3.07  |

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Unless otherwise stated the results shown in this test report teer only to the sample(s) tested and such as a feet and the sample states are stated and such as the sample state and the sample states are stated and such as the sample state and sample state may be prosecuted to the fullest extent of the law.

No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134 號

t (886-2) 2299-3279

www.tw.sqs.com




Page: 205 of 216

Operation Mode: 802.11ac80B4 Test Date: 2017/10/13

Fundamental Frequency: 5775 MHz Temp. / Humi. : 22.8deg\_C/59RH

Operation Band: BE CH LOW Test Engineer: Enzo EUT Pol.: Measurement Antenna Pol.: E2 Vertical

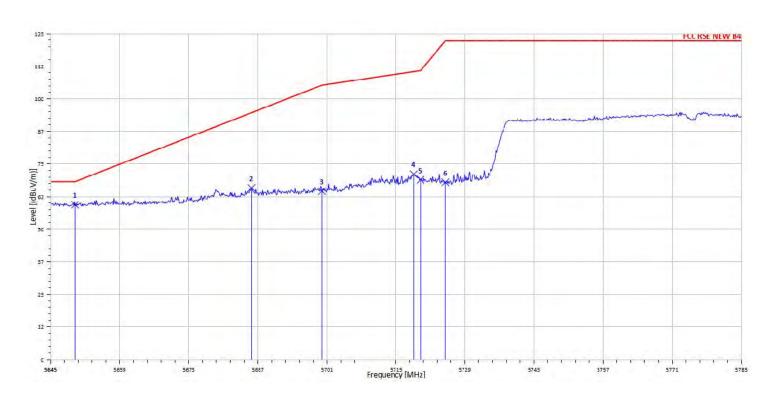

| Freq.   | Note    | Detector<br>Mode | Spectum<br>Reading Level | Factor | Actual<br>FS | Limit<br>@3m | Margin |
|---------|---------|------------------|--------------------------|--------|--------------|--------------|--------|
| MHz     | F/H/E/S | PK/QP/AV         | dΒμV                     | dB     | dBµV/m       | dBµV/m       | dB     |
| 5650.00 | S       | Peak             | 58.77                    | 0.63   | 59.40        | 68.23        | -8.83  |
| 5685.74 | S       | Peak             | 65.26                    | 0.58   | 65.84        | 94.67778     | -28.84 |
| 5700.00 | S       | Peak             | 64.01                    | 0.56   | 64.57        | 105.23       | -40.66 |
| 5718.64 | S       | Peak             | 70.43                    | 0.65   | 71.08        | 110.4492     | -39.36 |
| 5720.00 | S       | Peak             | 68.30                    | 0.66   | 68.96        | 110.83       | -41.87 |
| 5725.00 | E       | Peak             | 67.31                    | 0.69   | 67.99        | 122.23       | -54.24 |

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Unless otherwise stated the results shown in this test report teer only to the sample(s) tested and such as a feet and the sample states are stated and such as the sample state and the sample states are stated and such as the sample state and sample state may be prosecuted to the fullest extent of the law.

No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134 號

www.tw.sqs.com




Page: 206 of 216

Operation Mode: 802.11ac80B4 Test Date: 2017/10/13

Fundamental Frequency: 5775 MHz Temp. / Humi. : 22.8deg\_C/59RH

Operation Band: BE CH LOW Test Engineer: Enzo EUT Pol.: Measurement Antenna Pol.: E2 Horizontal

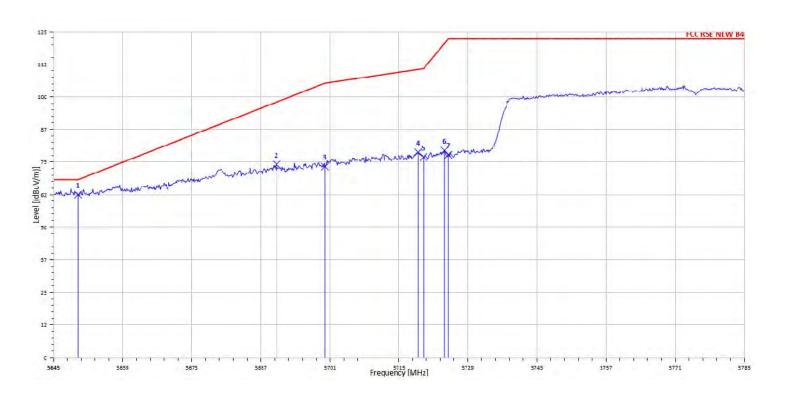

| Freq.   | Note    | Detector | Spectum       | Factor | Actual | Limit    | Margin |
|---------|---------|----------|---------------|--------|--------|----------|--------|
|         |         | Mode     | Reading Level |        | FS     | @3m      |        |
| MHz     | F/H/E/S | PK/QP/AV | dΒμV          | dB     | dBµV/m | dBµV/m   | dB     |
| 5650.00 | S       | Peak     | 61.87         | 0.63   | 62.49  | 68.23    | -5.74  |
| 5690.22 | S       | Peak     | 73.51         | 0.57   | 74.08  | 97.99297 | -23.91 |
| 5700.00 | S       | Peak     | 72.69         | 0.56   | 73.25  | 105.23   | -31.98 |
| 5718.92 | S       | Peak     | 78.09         | 0.65   | 78.74  | 110.5276 | -31.79 |
| 5720.00 | S       | Peak     | 76.23         | 0.66   | 76.89  | 110.83   | -33.94 |
| 5724.24 | S       | Peak     | 78.76         | 0.68   | 79.44  | 120.4977 | -41.06 |
| 5725.00 | Е       | Peak     | 77.04         | 0.69   | 77.73  | 122.23   | -44.50 |

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Unless otherwise stated the results shown in this test report teer only to the sample(s) tested and such as a feet and the sample states are stated and such as the sample state and the sample states are stated and such as the sample state and sample state may be prosecuted to the fullest extent of the law.

No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134 號

f (886-2) 2298-0488




Page: 207 of 216

Operation Mode: 802.11ac80B4 Test Date: 2017/10/13

Fundamental Frequency: 5775 MHz Temp. / Humi. : 22.8deg\_C/59RH

Operation Band: BE CH HIGH Test Engineer: Enzo EUT Pol.: E2 Measurement Antenna Pol.: Vertical

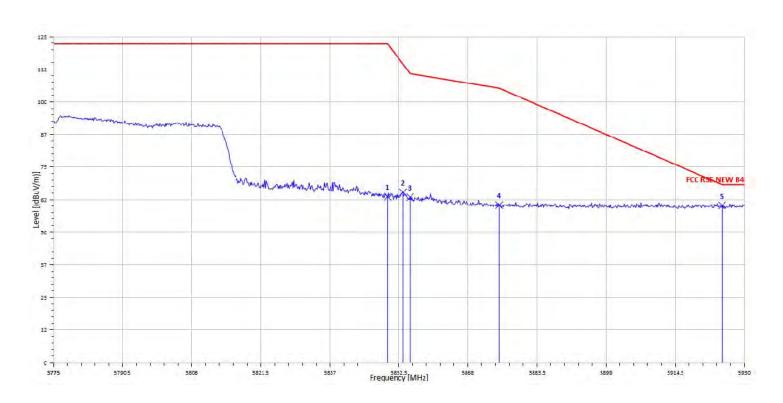

| Freq.   | Note    | Detector<br>Mode | Spectum<br>Reading Level | Factor | Actual<br>FS | Limit<br>@3m | Margin |
|---------|---------|------------------|--------------------------|--------|--------------|--------------|--------|
| MHz     | F/H/E/S | PK/QP/AV         | dΒμV                     | dB     | dBµV/m       | dBµV/m       | dB     |
| 5850.00 | E       | Peak             | 62.58                    | 1.01   | 63.59        | 122.23       | -58.64 |
| 5853.43 | S       | Peak             | 64.31                    | 1.01   | 65.32        | 114.4092     | -49.09 |
| 5855.00 | S       | Peak             | 62.39                    | 1.01   | 63.39        | 110.83       | -47.44 |
| 5875.00 | S       | Peak             | 59.41                    | 0.99   | 60.39        | 105.23       | -44.84 |
| 5925.00 | S       | Peak             | 59.23                    | 1.04   | 60.27        | 68.23        | -7.96  |

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Unless otherwise stated the results shown in this test report teer only to the sample(s) tested and such as a feet and the sample states are stated and such as the sample state and the sample states are stated and such as the sample state and sample state may be prosecuted to the fullest extent of the law.




Page: 208 of 216

Operation Mode: 802.11ac80B4 Test Date: 2017/10/13

Fundamental Frequency: 5775 MHz Temp. / Humi. : 22.8deg\_C/59RH

Operation Band: BE CH HIGH Test Engineer: Enzo EUT Pol.: Measurement Antenna Pol.: E2 Horizontal

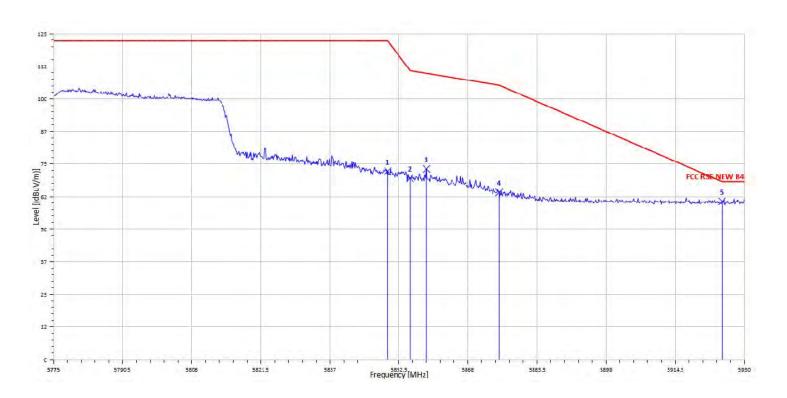

| Freq.   | Note    | Detector<br>Mode | Spectum<br>Reading Level | Factor | Actual<br>FS | Limit<br>@3m | Margin |
|---------|---------|------------------|--------------------------|--------|--------------|--------------|--------|
| MHz     | F/H/E/S | PK/QP/AV         | dBµV                     | dB     | dBµV/m       | dBµV/m       | dB     |
| 5850.00 | E       | Peak             | 71.23                    | 1.01   | 72.24        | 122.23       | -49.99 |
| 5855.00 | S       | Peak             | 68.56                    | 1.01   | 69.57        | 110.83       | -41.26 |
| 5858.70 | S       | Peak             | 72.12                    | 1.00   | 73.12        | 109.7939     | -36.67 |
| 5875.00 | S       | Peak             | 63.12                    | 0.99   | 64.10        | 105.23       | -41.13 |
| 5925.00 | S       | Peak             | 59.61                    | 1.04   | 60.65        | 68.23        | -7.58  |

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Unless otherwise stated the results shown in this test report teer only to the sample(s) tested and such as a feet and the sample states are stated and such as the sample state and the sample states are stated and such as the sample state and sample state may be prosecuted to the fullest extent of the law.



Page: 209 of 216

## 12 TRANSMISSION IN THE ABSENCE OF DATA

### Standard Applicable 12.1

According to §15.407(c)

The device shall automatically discontinue transmission in case of either absence of information to transmit or operational failure. These provisions are not intended to preclude the transmission of control or signaling information or the use of repetitive codes used by certain digital technologies to complete frame or burst intervals. Applicants shall include in their application for equipment authorization a description of how this requirement is met.

#### 12.2 Result

While the EUT is not transmitting any information, the EUT can automatically discontinue transmission and become standby mode for power saving. The EUT can detect the controlling signal of ASK message transmitting from remote device and verify whether it shall resend or discontinue transmission.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Unless otherwise stated the results shown in this less report efter only to the sample(s) tested and such as an piets). Re #B a fixed and such as may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134, WuKungRoad, NewTaipeilndustrialPark, WukuDistrict, NewTaipeiCity, Taiwan 24803/新北市五股區新北產業園區五工路 134 號



Page: 210 of 216

## 13 FREQUENCY STABILITY


# Standard Applicable

Manufacturers of U-NII devices are responsible for ensuring frequency stability such that an emission is maintained within the band of operation under all conditions of normal operation as specified in the user's manual.

#### 13.2 **Measurement Procedure**

- 1. The EUT was placed inside temperature chamber and powered and powered by nominal DC voltage.
- 2. Set EUT as normal operation.
- 3. Turn the EUT on and couple its output to spectrum.
- 4. Turn the EUT off and set the chamber to the highest temperature specified.
- 5. Allow sufficient time (approximately 30 min) for the temperature of the chamber to stabilize, turn the EUT and measure the operating frequency.
- 6. Repeat step with the temperature chamber set to the lowest temperature.

## 13.3 Test SET-UP

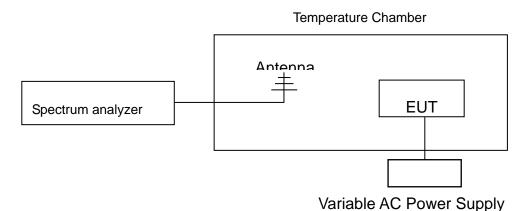

#### 13.4 **Measurement Equipment Used:**

| SGS Conducted Room     |              |                |                  |                     |                    |  |  |  |  |  |
|------------------------|--------------|----------------|------------------|---------------------|--------------------|--|--|--|--|--|
| Name of Equip-<br>ment | Manufacturer | Model          | Serial<br>Number | Calibration<br>Date | Calibration<br>Due |  |  |  |  |  |
| Spectrum Analyzer      | KEYSIGHT     | N9010A         | MY51440113       | 06/20/2017          | 06/19/2018         |  |  |  |  |  |
| Coaxial Cable 30cm     | WOKEN        | 00100A1F1A195C | RF01             | 12/12/2016          | 12/11/2017         |  |  |  |  |  |
| DC Block               | PASTERNACK   | PE8210         | RF29             | 12/12/2016          | 12/11/2017         |  |  |  |  |  |
| Attenuator             | WOKEN        | 218FS-10       | RF23             | 12/12/2016          | 12/11/2017         |  |  |  |  |  |
| DC Power Supply        | Agilent      | E3640A         | MY53140006       | 05/02/2017          | 05/01/2018         |  |  |  |  |  |

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留印天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="https://www.sgs.com/terms">www.sgs.com/terms</a> and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="https://www.sgs.com/terms">www.sgs.com/terms</a> e-document.htm.

Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134, WuKung Road, New Taipeilndustrial Park, Wuku District, New TaipeiCity, Taiwan 24803/新北市五股區新北產業園區五工路 134 號



Page: 211 of 216

## 13.5Measurement Result

## Startup:

| Operation Mode | 802.11 a | Test Date | 2017.10.17 |
|----------------|----------|-----------|------------|
| Temperature    | :23 ℃    | Test By   | Anthony    |
| Humidity       | :68 %    |           |            |

| Test Temp. | Test Voltage | Channel | Measured<br>Frequency<br>(MHz) | Spectrum<br>Frequency<br>(MHz) | <b>Δ</b> Frequency<br>(MHz) |
|------------|--------------|---------|--------------------------------|--------------------------------|-----------------------------|
|            |              | 36      | 5180                           | 5,179.93994                    | 0.00001159                  |
|            |              | 44      | 5220                           | 5,219.93994                    | 0.00001151                  |
|            |              | 48      | 5240                           | 5,239.93994                    | 0.00001146                  |
|            |              | 52      | 5260                           | 5,259.93994                    | 0.00001142                  |
|            |              | 60      | 5300                           | 5,299.93994                    | 0.00001133                  |
|            | 3.63V        | 64      | 5320                           | 5,319.93994                    | 0.00001129                  |
|            |              | 100     | 5500                           | 5,499.93994                    | 0.00001092                  |
|            |              | 116     | 5580                           | 5,579.92481                    | 0.00001348                  |
|            |              | 140     | 5700                           | 5,699.92481                    | 0.00001319                  |
|            |              | 149     | 5745                           | 5,744.92481                    | 0.00001309                  |
|            |              | 157     | 5785                           | 5,784.92481                    | 0.00001300                  |
|            |              | 165     | 5825                           | 5,824.92481                    | 0.00001291                  |
| -20 °C     | 2.97V        | 36      | 5180                           | 5,179.93994                    | 0.00001159                  |
|            |              | 44      | 5220                           | 5,219.93994                    | 0.00001151                  |
|            |              | 48      | 5240                           | 5,239.93994                    | 0.00001146                  |
|            |              | 52      | 5260                           | 5,259.93994                    | 0.00001142                  |
|            |              | 60      | 5300                           | 5,299.93994                    | 0.00001133                  |
|            |              | 64      | 5320                           | 5,319.93994                    | 0.00001129                  |
|            |              | 100     | 5500                           | 5,499.93994                    | 0.00001092                  |
|            |              | 116     | 5580                           | 5,579.92481                    | 0.00001348                  |
|            |              | 140     | 5700                           | 5,699.92481                    | 0.00001319                  |
|            |              | 149     | 5745                           | 5,744.92481                    | 0.00001309                  |
|            |              | 157     | 5785                           | 5,784.92481                    | 0.00001300                  |
|            |              | 165     | 5825                           | 5,824.92481                    | 0.00001291                  |

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="https://www.sgs.com/terms">www.sgs.com/terms</a> and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="https://www.sgs.com/terms">www.sgs.com/terms</a> e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issue defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders with the fulled extent of the falled may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134, WuKung Road, New Taipeilndustrial Park, Wuku District, New TaipeiCity, Taiwan 24803/新北市五股區新北產業園區五工路 134 號



Page: 212 of 216

|       | 1     |     |      | _           |            |
|-------|-------|-----|------|-------------|------------|
|       |       | 36  | 5180 | 5,179.93994 | 0.00001159 |
|       |       | 44  | 5220 | 5,219.95508 | 0.00000861 |
|       |       | 48  | 5240 | 5,239.93994 | 0.00001146 |
|       |       | 52  | 5260 | 5,259.93994 | 0.00001142 |
|       |       | 60  | 5300 | 5,299.93994 | 0.00001133 |
| 25 ℃  | 3.3V  | 64  | 5320 | 5,319.93994 | 0.00001129 |
|       |       | 100 | 5500 | 5,499.93994 | 0.00001092 |
|       |       | 116 | 5580 | 5,579.92481 | 0.00001348 |
|       |       | 140 | 5700 | 5,699.92481 | 0.00001319 |
|       |       | 149 | 5745 | 5,744.92481 | 0.00001309 |
|       |       | 157 | 5785 | 5,784.92481 | 0.00001300 |
|       |       | 165 | 5825 | 5,824.92481 | 0.00001291 |
|       |       |     |      |             |            |
|       |       | 36  | 5180 | 5,179.93994 | 0.00001159 |
|       |       | 44  | 5220 | 5,219.93994 | 0.00001151 |
|       |       | 48  | 5240 | 5,239.93994 | 0.00001146 |
|       |       | 52  | 5260 | 5,259.93994 | 0.00001142 |
|       |       | 60  | 5300 | 5,299.93994 | 0.00001133 |
|       |       | 64  | 5320 | 5,319.93994 | 0.00001129 |
|       | 3.63V | 100 | 5500 | 5,499.93994 | 0.00001092 |
|       |       | 116 | 5580 | 5,579.92481 | 0.00001348 |
|       |       | 140 | 5700 | 5,699.92481 | 0.00001319 |
|       |       | 149 | 5745 | 5,744.92481 | 0.00001309 |
|       |       | 157 | 5785 | 5,784.92481 | 0.00001300 |
|       |       | 165 | 5825 | 5,824.92481 | 0.00001291 |
| 75 °C |       | 36  | 5180 | 5,179.93994 | 0.00001159 |
|       |       | 44  | 5220 | 5,219.93994 | 0.00001151 |
|       |       | 48  | 5240 | 5,239.93994 | 0.00001146 |
|       |       | 52  | 5260 | 5,259.93994 | 0.00001142 |
|       |       | 60  | 5300 | 5,299.93994 | 0.00001133 |
|       | 2.97V | 64  | 5320 | 5,319.93994 | 0.00001129 |
|       |       | 100 | 5500 | 5,499.93994 | 0.00001092 |
|       |       | 116 | 5580 | 5,579.92481 | 0.00001348 |
|       |       | 140 | 5700 | 5,699.92481 | 0.00001319 |
|       |       | 149 | 5745 | 5,744.92481 | 0.00001309 |
|       |       | 157 | 5785 | 5,784.92481 | 0.00001300 |
|       |       | 165 | 5825 | 5,824.92481 | 0.00001291 |
|       |       |     |      |             |            |

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留卯天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms">www.sgs.com/terms</a> and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms">www.sgs.com/terms</a> e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders was the preserved the full between the full and offenders. may be prosecuted to the fullest extent of the law.



Page: 213 of 216

| Operation Mode | 802.11 n_HT40 | Test Date | 2017.10.17 |
|----------------|---------------|-----------|------------|
| Temperature    | :23 ℃         | Test By   | Anthony    |
| Humidity       | :68 %         |           |            |

| Test Temp. | Test Voltage | Channel | Measured<br>Frequency<br>(MHz) | Spectrum<br>Frequency<br>(MHz) | <b>Δ</b> Frequency (MHz) |
|------------|--------------|---------|--------------------------------|--------------------------------|--------------------------|
|            |              | 38      | 5190                           | 5,189.94995                    | 0.00000964               |
|            |              | 46      | 5230                           | 5,229.94995                    | 0.00000957               |
|            |              | 54      | 5270                           | 5,269.94995                    | 0.00000950               |
|            |              | 62      | 5310                           | 5,309.94995                    | 0.00000943               |
|            | 3.63V        | 102     | 5510                           | 5,509.94995                    | 0.00000908               |
|            |              | 110     | 5550                           | 5,549.94995                    | 0.00000902               |
|            |              | 134     | 5670                           | 5,669.94995                    | 0.00000883               |
|            |              | 151     | 5755                           | 5,754.92505                    | 0.00001302               |
| -20 °C     |              | 159     | 5795                           | 5,794.92505                    | 0.00001293               |
|            | 2.97V        | 38      | 5190                           | 5,189.94995                    | 0.00000964               |
|            |              | 46      | 5230                           | 5,229.94995                    | 0.00000957               |
|            |              | 54      | 5270                           | 5,269.94995                    | 0.00000950               |
|            |              | 62      | 5310                           | 5,309.94995                    | 0.00000943               |
|            |              | 102     | 5510                           | 5,509.94995                    | 0.00000908               |
|            |              | 110     | 5550                           | 5,549.94995                    | 0.00000902               |
|            |              | 134     | 5670                           | 5,669.94995                    | 0.00000883               |
|            |              | 151     | 5755                           | 5,754.92505                    | 0.00001302               |
|            |              | 159     | 5795                           | 5,794.92505                    | 0.00001293               |

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="https://www.sgs.com/terms">www.sgs.com/terms</a> and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="https://www.sgs.com/terms">www.sgs.com/terms</a> e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issue defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders with the fulled extent of the falled may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134, WuKung Road, New Taipeilndustrial Park, Wuku District, New TaipeiCity, Taiwan 24803/新北市五股區新北產業園區五工路 134 號

www.tw.sqs.com



Page: 214 of 216

|               |       | 38  | 5190 | 5,189.94995 | 0.00000964 |
|---------------|-------|-----|------|-------------|------------|
|               |       | 46  | 5230 | 5,229.94995 | 0.00000957 |
|               |       | 54  | 5270 | 5,269.94995 | 0.00000950 |
|               |       | 62  | 5310 | 5,309.94995 | 0.00000943 |
| 25 <b>℃</b>   | 3.3V  | 102 | 5510 | 5,509.94995 | 0.00000908 |
|               |       | 110 | 5550 | 5,549.94995 | 0.00000902 |
|               |       | 134 | 5670 | 5,669.94995 | 0.00000883 |
|               |       | 151 | 5755 | 5,754.92505 | 0.00001302 |
|               |       | 159 | 5795 | 5,794.92505 | 0.00001293 |
|               |       | 38  | 5190 | 5,189.94995 | 0.00000964 |
|               |       | 46  | 5230 | 5,229.94995 | 0.00000957 |
|               | 3.63V | 54  | 5270 | 5,269.94995 | 0.00000950 |
|               |       | 62  | 5310 | 5,309.94995 | 0.00000943 |
|               |       | 102 | 5510 | 5,509.94995 | 0.00000908 |
|               |       | 110 | 5550 | 5,549.94995 | 0.00000902 |
|               |       | 134 | 5670 | 5,669.94995 | 0.00000883 |
|               |       | 151 | 5755 | 5,754.92505 | 0.00001302 |
|               |       | 159 | 5795 | 5,794.92505 | 0.00001293 |
| 75 <b>°</b> C | 2.97V | 38  | 5190 | 5,189.94995 | 0.00000964 |
|               |       | 46  | 5230 | 5,229.94995 | 0.00000957 |
|               |       | 54  | 5270 | 5,269.94995 | 0.00000950 |
|               |       | 62  | 5310 | 5,309.94995 | 0.00000943 |
|               |       | 102 | 5510 | 5,509.94995 | 0.00000908 |
|               |       | 110 | 5550 | 5,549.94995 | 0.00000902 |
|               |       | 134 | 5670 | 5,669.94995 | 0.00000883 |
|               |       | 151 | 5755 | 5,754.92505 | 0.00001302 |
|               |       | 159 | 5795 | 5,794.92505 | 0.00001293 |

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留卯天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms">www.sgs.com/terms</a> and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms">www.sgs.com/terms</a> e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders was the preserved the full between the full and offenders. may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134, WuKung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號



Page: 215 of 216

| Operation Mode | 802.11 ac_VHT80 | Test Date | 2017.10.17 |
|----------------|-----------------|-----------|------------|
| Temperature    | :23 ℃           | Test By   | Anthony    |
| Humidity       | :68 %           |           |            |

| Test Temp.    | Test Voltage | Channel | Measured<br>Frequency<br>(MHz) | Spectrum<br>Frequency<br>(MHz) | <b>Δ</b> Frequency<br>(MHz) |
|---------------|--------------|---------|--------------------------------|--------------------------------|-----------------------------|
|               |              | 42      | 5210                           | 5,209.89990                    | 0.00001921                  |
|               |              | 58      | 5290                           | 5,289.89990                    | 0.00001892                  |
|               | 3.63V        | 106     | 5530                           | 5,529.89990                    | 0.00001810                  |
|               |              | 122     | 5610                           | 5,609.89990                    | 0.00001784                  |
| -20 °C        |              | 155     | 5775                           | 5,774.89990                    | 0.00001733                  |
|               |              | 42      | 5210                           | 5,209.89990                    | 0.00001921                  |
|               |              | 58      | 5290                           | 5,289.89990                    | 0.00001892                  |
|               | 2.97V        | 106     | 5530                           | 5,529.89990                    | 0.00001810                  |
|               |              | 122     | 5610                           | 5,609.89990                    | 0.00001784                  |
|               |              | 155     | 5775                           | 5,774.89990                    | 0.00001733                  |
|               | 3.3V         | 42      | 5210                           | 5,209.89990                    | 0.00001921                  |
|               |              | 58      | 5290                           | 5,289.89990                    | 0.00001892                  |
| 25 <b>℃</b>   |              | 106     | 5530                           | 5,529.89990                    | 0.00001810                  |
|               |              | 122     | 5610                           | 5,609.89990                    | 0.00001784                  |
|               |              | 155     | 5775                           | 5,774.89990                    | 0.00001733                  |
|               | 3.63V        | 42      | 5210                           | 5,209.89990                    | 0.00001921                  |
|               |              | 58      | 5290                           | 5,289.89990                    | 0.00001892                  |
|               |              | 106     | 5530                           | 5,529.89990                    | 0.00001810                  |
|               |              | 122     | 5610                           | 5,609.89990                    | 0.00001784                  |
| 75 <b>°</b> C |              | 155     | 5775                           | 5,774.89990                    | 0.00001733                  |
|               |              | 42      | 5210                           | 5,209.89990                    | 0.00001921                  |
|               |              | 58      | 5290                           | 5,289.89990                    | 0.00001892                  |
|               | 2.97V        | 106     | 5530                           | 5,529.89990                    | 0.00001810                  |
|               |              | 122     | 5610                           | 5,609.89990                    | 0.00001784                  |
|               |              | 155     | 5775                           | 5,774.89990                    | 0.00001733                  |

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留卯天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms">www.sgs.com/terms</a> and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms">www.sgs.com/terms</a> e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders was the preserved the full between the full and offenders. may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134, WuKung Road, New Taipeilndustrial Park, Wuku District, New TaipeiCity, Taiwan 24803/新北市五股區新北產業園區五工路 134 號



Page: 216 of 216

## 14 ANTENNA REQUIREMENT

# Standard Applicable

According to §15.203, an intentional radiator shall be designed to ensure that no antenna other than furnished by the responsible party shall be used with the device.

According to §15.407, If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

## According to RSS-GEN 8.3

The applicant for equipment certification, as per RSP-100, must provide a list of all antenna types that may be used with the licence-exempt transmitter, indicating the maximum permissible antenna gain (in dBi) and the required impedance for each antenna.

Licence-exempt transmitters that have received equipment certification may operate with different types of antennas. However, it is not permissible to exceed the maximum equivalent isotropically radiated power (e.i.r.p.) limits specified in the applicable standard (RSS) for the licence-exempt apparatus.

Testing shall be performed using the highest gain antenna of each combination of licence-exempt transmitter and antenna type, with the transmitter output power set at the maximum level.9 When a measurement at the antenna connector is used to determine RF output power, the effective gain of the device's antenna shall be stated, based on a measurement or on data from the antenna manufacturer.

### 14.2 Antenna Connected Construction

An embedded-in antenna design is used.

The antenna is designed with unique type RF connector and no consideration of replacement. Please see EUT photo and antenna spec. for details.

The antenna gain is less than 6dBi. Therefore, it is not necessary to reduce maximum output power limit.

~ End of Report ~

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Unless otherwise stated the results shown in this less report efter only to the sample(s) tested and such as an piets). Re #B a fixed and such as may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134, WuKung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號