

DATA OF SPURIOUS EMISSIONS(1GHz to 25GHz)

UL Apex Co., Ltd.
EMC HEAD OFFICE DIVISION No.2 SEMI ANECHOIC CHAMBER

COMPANY	: Brother	REPORT NO	: 24BE0174-HO-1
EQUIPMENT	: Wireless LAN Card	REGULATION	: Fcc Part15 Subpart C 15.247(c)
MODEL	: NC-7100	TEST DISTANCE	: 3m(1 to 10GHz) and 1 m(10 to 25GHz)
S/ N	: BR1-009	DATE	: 2003/12/05
POWER	: AC120V/60Hz	TEMPERATURE	: 22℃
MODE	: Tx 2462MHz(802.11g 36MHz)	HUMIDITY	: 39%
Remarks	: In Antenna		
		Engineer :	Naoki Sakamoto

PK DETECT : RBW 1MHz VBW 1MHz

PK DETECT : RBW 1MHZ VBW 1MHZ												
No.	FREQ [MHz]	T/R READING HOR VER [dBuV/m]		ANT Factor [dB/m]	AMP GAIN [dB]	CABLE LOSS [dB]	High-Pass or Atten [dB]	RESULT HOR VER [dBuV/m]		Limit PK [dBuV/m]	MARGIN HOR VER [dB]	
Test distance 3meters RESULT=Reading + ANT Factor - Amp Gain + CABLE LOSS + High Pass(Atten).												
1	1401.8	45.4	47.8	24.3	37.3	5.0	10.0	47.4	49.8	74.0	26.6	24.2
2	1909.0	45.4	47.0	30.7	36.9	5.7	10.0	54.9	56.5	74.0	19.1	17.5
3	2258.0	46.1	50.0	30.7	36.9	6.0	10.0	55.9	59.8	74.0	18.1	14.2
4	2483.9	59.8	61.0	30.7	36.9	6.3	10.0	69.9	71.1	74.0	4.1	2.9
5	2687.9	48.9	50.0	30.7	36.9	6.4	10.0	59.1	60.2	74.0	14.9	13.8
6	4924.0	48.4	50.2	36.3	36.8	9.0	1.0	57.9	59.7	74.0	16.1	14.3
7	7386.0	41.8	41.9	37.9	36.6	11.1	0.5	54.7	54.8	74.0	19.3	19.2
8	9848.0	42.2	42.4	36.6	37.3	13.1	0.5	55.1	55.3	74.0	18.9	18.7
Test distance 1meters RESULT=Reading + ANT Factor - Amp Gain + CABLE LOSS + High Pass - Dfac												
9	12310.0	43.0	42.0	41.6	36.6	14.6	0.5	53.6	52.6	74.0	20.4	21.4
10	14772.0	41.8	41.6	43.3	35.6	15.9	0.6	56.5	56.3	74.0	17.5	17.7
11	17234.0	42.9	42.5	45.2	36.2	17.5	0.3	60.2	59.8	74.0	13.8	14.2
12	19696.0	43.5	42.9	40.6	36.0	18.8	1.3	58.7	58.1	74.0	15.3	15.9
13	22158.0	44.0	44.0	40.6	35.7	19.9	1.4	60.7	60.7	74.0	13.3	13.3
14	24620.0	43.3	43.4	40.4	36.9	21.1	2.6	61.0	61.1	74.0	13.0	12.9

AV DETECT : RBW1MHz VBW10Hz

AV DETECT : RBW 1MHz VBW 10Hz												
No.	FREQ [MHz]	T/R READING HOR VER [dBuV/m]		ANT Factor [dB/m]	AMP GAIN [dB]	CABLE LOSS [dB]	High-Pass or Atten [dB]	RESULT HOR VER [dBuV/m]		Limit AV [dBuV/m]	MARGIN HOR VER [dB]	
Test distance 3meters RESULT=Reading + ANT Factor - Amp Gain + CABLE LOSS + High Pass(Atten).												
1	1401.8	33.6	34.1	24.3	37.3	5.0	10.0	35.6	36.1	54.0	18.4	17.9
2	1909.0	33.4	34.0	30.7	36.9	5.7	10.0	42.9	43.5	54.0	11.1	10.5
3	2258.0	35.7	38.1	30.7	36.9	6.0	10.0	45.5	47.9	54.0	8.5	6.1
4	2483.9	42.6	43.5	30.7	36.9	6.3	10.0	52.7	53.6	54.0	1.3	0.4
5	2687.9	39.6	41.3	30.7	36.9	6.4	10.0	49.8	51.5	54.0	4.2	2.5
6	4924.0	35.2	38.1	36.3	36.8	9.0	1.0	44.7	47.6	54.0	9.3	6.4
7	7386.0	31.5	31.8	37.9	36.6	11.1	0.5	44.4	44.7	54.0	9.6	9.3
8	9848.0	32.3	32.3	36.6	37.3	13.1	0.5	45.2	45.2	54.0	8.8	8.8
Test distance 1meters RESULT=Reading + ANT Factor - Amp Gain + CABLE LOSS + High Pass - Dfac												
9	12310.0	32.3	31.9	41.6	36.6	14.6	0.5	42.9	42.5	54.0	11.1	11.5
10	14772.0	31.8	31.3	43.3	35.6	15.9	0.6	46.5	46.0	54.0	7.5	8.0
11	17234.0	33.0	32.5	45.2	36.2	17.5	0.3	50.3	49.8	54.0	3.7	4.2
12	19696.0	33.6	32.4	40.6	36.0	18.8	1.3	48.8	47.6	54.0	5.2	6.4
13	22158.0	33.9	32.9	40.6	35.7	19.9	1.4	50.6	49.6	54.0	3.4	4.4
14	24620.0	33.5	33.4	40.4	36.9	21.1	2.6	51.2	51.1	54.0	2.8	2.9

Test Distance 1.0m : Distance Factor(Dfac) = $20\log(3/1.0)$ = 9.5 dB

Atten : 1GHz to 3.5GHz

High Pass Filter : 3.5GHz to 25GHz(3.5GHz Pass)

*Except for the above table : All other spurious emissions were less than 20dB for the limit.

UL Apex Co., Ltd.
Head Office EMC Lab.
4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN
Telephone : +81 596 24 8116
Facsimile : +81 596 24 8124

MF060b(10.04.03)

DATA OF SPURIOUS EMISSIONS(1GHz to 25GHz)

UL Apex Co., Ltd.
EMC HEAD OFFICE DIVISON No.2 SEMI ANECHOIC CHAMBER

COMPANY : Brother	REPORT NO : 24BE0174-HO-1
EQUIPMENT : Wireless LAN Card	REGULATION : Fcc Part15 Subpart C 15.247(c)
MODEL : NC-7100	TEST DISTANCE : 3m(1 to 10GHz) and 1 m(10 to 25GHz)
S/ N : BR1-009	DATE : 2003/12/05
POWER : AC120V/60Hz	TEMPERATURE : 22℃
MODE : Tx 2412MHz(802.11g 54MHz)	HUMIDITY : 39%
Remarks : In Antenna	

Engineer : Naoki Sakamoto

PK DETECT : RBW 1MHz VBW 1MHz

No.	FREQ [MHz]	T/R READING		ANT Factor [dB/m]	AMP GAIN [dB]	CABLE LOSS [dB]	High-Pass or Atten [dB]	RESULT		Limit PK [dBuV/m]	MARGIN	
		HOR	VER					HOR	VER		HOR	VER
		[dBuV/m]	[dBuV/m]					[dBuV/m]	[dBuV/m]		[dB]	[dB]
Test distance 3meters RESULT=Reading + ANT Factor - Amp Gain + CABLE LOSS + High Pass(Atten).												
1	1401.8	45.2	47.9	24.3	37.3	5.0	10.0	47.2	49.9	74.0	26.8	24.1
2	1909.0	45.0	48.3	30.7	36.9	5.7	10.0	54.5	57.8	74.0	19.5	16.2
3	2261.0	47.8	48.5	30.7	36.9	6.0	10.0	57.6	58.3	74.0	16.4	15.7
4	2390.0	44.6	48.3	30.5	36.9	6.3	10.0	54.5	58.2	74.0	19.5	15.8
5	2687.9	48.0	50.8	30.7	36.9	6.4	10.0	58.2	61.0	74.0	15.8	13.0
6	4824.0	43.2	42.6	35.7	36.8	8.9	1.0	52.0	51.4	74.0	22.0	22.6
7	7236.0	43.3	43.5	37.7	36.5	11.0	0.5	56.0	56.2	74.0	18.0	17.8
8	9648.0	43.1	43.4	37.2	37.2	12.9	0.5	56.5	56.8	74.0	17.5	17.2
Test distance 1meters RESULT=Reading + ANT Factor - Amp Gain + CABLE LOSS + High Pass - Dfac												
9	12060.0	44.4	44.3	40.3	36.8	14.4	0.5	53.3	53.2	74.0	20.7	20.8
10	14472.0	43.9	44.2	43.0	35.3	15.7	0.6	58.4	58.7	74.0	15.6	15.3
11	16884.0	43.7	43.8	44.7	36.4	17.3	0.4	60.2	60.3	74.0	13.8	13.7
12	19296.0	43.8	43.3	40.8	35.9	18.6	0.9	58.7	58.2	74.0	15.3	15.8
13	21708.0	44.2	44.2	40.5	36.6	19.7	0.6	58.9	58.9	74.0	15.1	15.1
14	24120.0	44.1	44.1	40.2	36.5	20.9	1.7	60.9	60.9	74.0	13.1	13.1

AV DETECT : RBW1MHz VBW10Hz

No.	FREQ [MHz]	T/R READING		ANT Factor [dB/m]	AMP GAIN [dB]	CABLE LOSS [dB]	High-Pass or Atten [dB]	RESULT		Limit AV [dBuV/m]	MARGIN	
		HOR	VER					HOR	VER		HOR	VER
		[dBuV/m]	[dBuV/m]					[dBuV/m]	[dBuV/m]		[dB]	[dB]
Test distance 3meters RESULT=Reading + ANT Factor - Amp Gain + CABLE LOSS + High Pass(Atten).												
1	1401.8	33.8	34.6	24.3	37.3	5.0	10.0	35.8	36.6	54.0	18.2	17.4
2	1909.0	33.3	33.9	30.7	36.9	5.7	10.0	42.8	43.4	54.0	11.2	10.6
3	2260.1	36.0	38.3	30.7	36.9	6.0	10.0	45.8	48.1	54.0	8.2	5.9
4	2390.0	33.5	36.2	30.5	36.9	6.3	10.0	43.4	46.1	54.0	10.6	7.9
5	2687.9	40.0	41.3	30.7	36.9	6.4	10.0	50.2	51.5	54.0	3.8	2.5
6	4824.0	31.2	31.8	35.7	36.8	8.9	1.0	40.0	40.6	54.0	14.0	13.4
7	7236.0	32.2	32.3	37.7	36.5	11.0	0.5	44.9	45.0	54.0	9.1	9.0
8	9648.0	31.9	32.4	37.2	37.2	12.9	0.5	45.3	45.8	54.0	8.7	8.2
Test distance 1meters RESULT=Reading + ANT Factor - Amp Gain + CABLE LOSS + High Pass - Dfac												
9	12060.0	32.2	32.3	40.3	36.8	14.4	0.5	41.1	41.2	54.0	12.9	12.8
10	14472.0	32.2	32.1	43.0	35.3	15.7	0.6	46.7	46.6	54.0	7.3	7.4
11	16884.0	32.6	32.0	44.7	36.4	17.3	0.4	49.1	48.5	54.0	4.9	5.5
12	19296.0	33.3	32.1	40.8	35.9	18.6	0.9	48.2	47.0	54.0	5.8	7.0
13	21708.0	33.4	32.7	40.5	36.6	19.7	0.6	48.1	47.4	54.0	5.9	6.6
14	24120.0	33.7	33.2	40.2	36.5	20.9	1.7	50.5	50.0	54.0	3.5	4.0

Test Distance 1.0m : Distance Factor(Dfac) = 20log(3/1.0) = 9.5 dB

Atten : 1GHz to 3.5GHz

High Pass Filter : 3.5GHz to 25GHz(3.5GHz Pass)

*Except for the above table : All other spurious emissions were less than 20dB for the limit.

DATA OF SPURIOUS EMISSIONS(1GHz to 25GHz)

UL Apex Co., Ltd.
EMC HEAD OFFICE DIVISON No.2 SEMI ANECHOIC CHAMBER

COMPANY : Brother
EQUIPMENT : Wireless LAN Card
MODEL : NC-7100
S/N : BR1-009
POWER : AC120V/60Hz
MODE : Tx 2437MHz(802.11g 54MI
Remarks : In Antenna

REPORT NO : 24BE0174-HO-1
REGULATION : Fcc Part15 Subpart C 15.247(c)
TEST DISTANCE : 3m(1 to 10GHz) and 1 m(10 to 25GHz)
DATE : 2003/12/05
TEMPERATURE : 22℃
HUMIDITY : 39%

Engineer : Naoki Sakamoto

PK DETECT : RBW 1MHz VBW 1MHz

No.	FREQ [MHz]	T/R READING		ANT Factor [dB/m]	AMP GAIN [dB]	CABLE LOSS [dB]	High-Pass or Atten [dB]	RESULT		Limit PK [dBuV/m]	MARGIN	
		HOR	VER					HOR	VER		HOR	VER
		[dBuV/m]	[dBuV/m]					[dBuV/m]	[dBuV/m]		[dB]	[dB]
Test distance 3meters RESULT=Reading + ANT Factor - Amp Gain + CABLE LOSS + High Pass(Atten).												
1	1402.0	44.5	47.4	24.3	37.3	5.0	10.0	46.5	49.4	74.0	27.5	24.6
2	1909.0	44.8	48.0	30.7	36.9	5.7	10.0	54.3	57.5	74.0	19.7	16.5
3	2266.7	46.0	46.8	30.7	36.9	6.0	10.0	55.8	56.6	74.0	18.2	17.4
4	2687.9	48.0	49.6	30.7	36.9	6.4	10.0	58.2	59.8	74.0	15.8	14.2
5	4874.0	43.5	43.2	36.0	36.8	9.0	1.0	52.7	52.4	74.0	21.3	21.6
6	7311.0	43.0	43.4	37.8	36.6	11.1	0.5	55.8	56.2	74.0	18.2	17.8
7	9748.0	43.5	43.9	36.9	37.2	13.0	0.5	56.7	57.1	74.0	17.3	16.9
Test distance 1meters RESULT=Reading + ANT Factor - Amp Gain + CABLE LOSS + High Pass - Dfac												
8	12185.0	43.4	43.9	41.0	36.7	14.3	0.5	53.0	53.5	74.0	21.0	20.5
9	14622.0	44.0	44.3	43.2	35.5	15.9	0.6	58.7	59.0	74.0	15.3	15.0
10	17059.0	43.7	43.7	44.8	36.2	17.8	0.4	61.0	61.0	74.0	13.0	13.0
11	19496.0	43.3	43.4	40.5	36.2	19.0	1.0	58.1	58.2	74.0	15.9	15.8
12	21933.0	43.8	43.7	40.6	36.0	19.6	0.9	59.4	59.3	74.0	14.6	14.7
13	24370.0	43.9	44.0	40.3	36.9	21.0	2.2	61.0	61.1	74.0	13.0	12.9

AV DETECT : RBW1MHz VBW10Hz

No.	FREQ [MHz]	T/R READING		ANT Factor [dB/m]	AMP GAIN [dB]	CABLE LOSS [dB]	High-Pass or Atten [dB]	RESULT		Limit AV [dBuV/m]	MARGIN	
		HOR	VER					HOR	VER		HOR	VER
		[dBuV/m]	[dBuV/m]					[dBuV/m]	[dBuV/m]		[dB]	[dB]
Test distance 3meters RESULT=Reading + ANT Factor - Amp Gain + CABLE LOSS + High Pass(Atten).												
1	1402.0	33.4	34.5	24.3	37.3	5.0	10.0	35.4	36.5	54.0	18.6	17.5
2	1909.0	33.6	34.0	30.7	36.9	5.7	10.0	43.1	43.5	54.0	10.9	10.5
3	2266.7	35.8	37.9	30.7	36.9	6.0	10.0	45.6	47.7	54.0	8.4	6.3
4	2687.9	40.6	41.8	30.7	36.9	6.4	10.0	50.8	52.0	54.0	3.2	2.0
5	4874.0	31.4	31.6	36.0	36.8	9.0	1.0	40.6	40.8	54.0	13.4	13.2
6	7311.0	31.9	31.9	37.8	36.6	11.1	0.5	44.7	44.7	54.0	9.3	9.3
7	9748.0	31.8	32.0	36.9	37.2	13.0	0.5	45.0	45.2	54.0	9.0	8.8
Test distance 1meters RESULT=Reading + ANT Factor - Amp Gain + CABLE LOSS + High Pass - Dfac												
8	12185.0	32.2	32.0	41.0	36.7	14.3	0.5	41.8	41.6	54.0	12.2	12.4
9	14622.0	32.3	32.0	43.2	35.5	15.9	0.6	47.0	46.7	54.0	7.0	7.3
10	17059.0	33.4	32.2	44.8	36.2	17.8	0.4	50.7	49.5	54.0	3.3	4.5
11	19496.0	33.1	32.8	40.5	36.2	19.0	1.0	47.9	47.6	54.0	6.1	6.4
12	21933.0	33.3	32.9	40.6	36.0	19.6	0.9	48.9	48.5	54.0	5.1	5.5
13	24370.0	33.4	33.3	40.3	36.9	21.0	2.2	50.5	50.4	54.0	3.5	3.6

Test Distance 1.0m : Distance Factor(Dfac) = $20\log(3/1.0) = 9.5$ dB
Atten : 1GHz to 3.5GHz
High Pass Filter : 3.5GHz to 25GHz(3.5GHz Pass)
*Except for the above table : All other spurious emissions were less than 20dB for the limit.

DATA OF SPURIOUS EMISSIONS(1GHz to 25GHz)

UL Apex Co., Ltd.
EMC HEAD OFFICE DIVISION No.2 SEMI ANECHOIC CHAMBER

COMPANY	: Brother	REPORT NO	: 24BE0174-HO-1
EQUIPMENT	: Wireless LAN Card	REGULATION	: Fcc Part15 Subpart C 15.247(c)
MODEL	: NC-7100	TEST DISTANCE	: 3m(1 to 10GHz) and 1 m(10 to 25GHz)
S/ N	: BR1-009	DATE	: 2003/12/05
POWER	: AC120V/60Hz	TEMPERATURE	: 22℃
MODE	: Tx 2462MHz(802.11g 54MHz)	HUMIDITY	: 39%
Remarks	: In Antenna	Engineer	: Naoki Sakamoto

PK DETECT : RBW 1MHz VBW 1MHz

PK DETECT : RBW 150Hz VBW 150Hz												
No.	FREQ [MHz]	T/R READING HOR VER [dBuV/m]		ANT Factor [dB/m]	AMP GAIN [dB]	CABLE LOSS [dB]	High-Pass or Atten [dB]	RESULT HOR VER [dBuV/m]		Limit PK [dBuV/m]	MARGIN HOR VER [dB]	
Test distance 3meters RESULT=Reading + ANT Factor - Amp Gain + CABLE LOSS + High Pass(Atten).												
1	1401.8	44.7	48.0	24.3	37.3	5.0	10.0	46.7	50.0	74.0	27.3	24.0
2	1909.0	45.1	47.5	30.7	36.9	5.7	10.0	54.6	57.0	74.0	19.4	17.0
3	2258.0	46.8	47.0	30.7	36.9	6.0	10.0	56.6	56.8	74.0	17.4	17.2
4	2483.9	47.3	52.0	30.7	36.9	6.3	10.0	57.4	62.1	74.0	16.6	11.9
5	2687.9	47.5	49.7	30.7	36.9	6.4	10.0	57.7	59.9	74.0	16.3	14.1
6	4924.0	43.0	43.6	36.3	36.8	9.0	1.0	52.5	53.1	74.0	21.5	20.9
7	7386.0	42.0	42.0	37.9	36.6	11.1	0.5	54.9	54.9	74.0	19.1	19.1
8	9848.0	43.4	43.8	36.6	37.3	13.1	0.5	56.3	56.7	74.0	17.7	17.3
Test distance 1meters RESULT=Reading + ANT Factor - Amp Gain + CABLE LOSS + High Pass - Dfac												
9	12310.0	43.0	43.6	41.6	36.6	14.6	0.5	53.6	54.2	74.0	20.4	19.8
10	14772.0	43.6	43.1	43.3	35.6	15.9	0.6	58.3	57.8	74.0	15.7	16.2
11	17234.0	44.0	43.0	45.2	36.2	17.5	0.3	61.3	60.3	74.0	12.7	13.7
12	19696.0	43.2	42.9	40.6	36.0	18.8	1.3	58.4	58.1	74.0	15.6	15.9
13	22158.0	44.0	44.1	40.6	35.7	19.9	1.4	60.7	60.8	74.0	13.3	13.2
14	24620.0	44.0	43.9	40.4	36.9	21.1	2.6	61.7	61.6	74.0	12.3	12.4

AV DETECT : RBW1MHz VBW10Hz

No.	FREQ [MHz]	T/R READING		ANT Factor [dB/m]	AMP GAIN [dB]	CABLE LOSS [dB]	High-Pass or Atten [dB]	RESULT		Limit AV [dBuV/m]	MARGIN	
		HOR	VER					HOR	VER		HOR	VER
		[dBuV/m]	[dBuV/m]					[dB]	[dB]		[dB]	[dB]
Test distance 3meters RESULT=Reading + ANT Factor - Amp Gain + CABLE LOSS + High Pass(Atten).												
1	1401.8	33.3	34.8	24.3	37.3	5.0	10.0	35.3	36.8	54.0	18.7	17.2
2	1909.0	33.5	33.8	30.7	36.9	5.7	10.0	43.0	43.3	54.0	11.0	10.7
3	2258.0	36.2	38.3	30.7	36.9	6.0	10.0	46.0	48.1	54.0	8.0	5.9
4	2483.9	34.2	37.8	30.7	36.9	6.3	10.0	44.3	47.9	54.0	9.7	6.1
5	2687.9	40.1	41.6	30.7	36.9	6.4	10.0	50.3	51.8	54.0	3.7	2.2
6	4924.0	31.8	33.1	36.3	36.8	9.0	1.0	41.3	42.6	54.0	12.7	11.4
7	7386.0	31.8	32.0	37.9	36.6	11.1	0.5	44.7	44.9	54.0	9.3	9.1
8	9848.0	31.9	32.0	36.6	37.3	13.1	0.5	44.8	44.9	54.0	9.2	9.1
Test distance 1meters RESULT=Reading + ANT Factor - Amp Gain + CABLE LOSS + High Pass - Dfac												
9	12310.0	32.3	32.1	41.6	36.6	14.6	0.5	42.9	42.7	54.0	11.1	11.3
10	14772.0	32.3	31.7	43.3	35.6	15.9	0.6	47.0	46.4	54.0	7.0	7.6
11	17234.0	33.2	32.0	45.2	36.2	17.5	0.3	50.5	49.3	54.0	3.5	4.7
12	19696.0	33.5	32.7	40.6	36.0	18.8	1.3	48.7	47.9	54.0	5.3	6.1
13	22158.0	33.5	32.7	40.6	35.7	19.9	1.4	50.2	49.4	54.0	3.8	4.6
14	24620.0	33.3	33.4	40.4	36.9	21.1	2.6	51.0	51.1	54.0	3.0	2.9

Test Distance 1.0m : Distance Factor(Dfac) = 20log(3/1.0) =

9.5 dB

Atten : 1GHz to 3.5GHz


High Pass Filter : 3.5GHz to 25GHz(3.5GHz Pass)

*Except for the above table : All other spurious emissions were less than 20dB for the limit.


Out of Band Emission : Restricted Band Edges (Radiated)

IEEE802.11b 11Mbps Ext - Antenna Ch1:2412MHz


Frequency:2390MHz Hor (Pk)

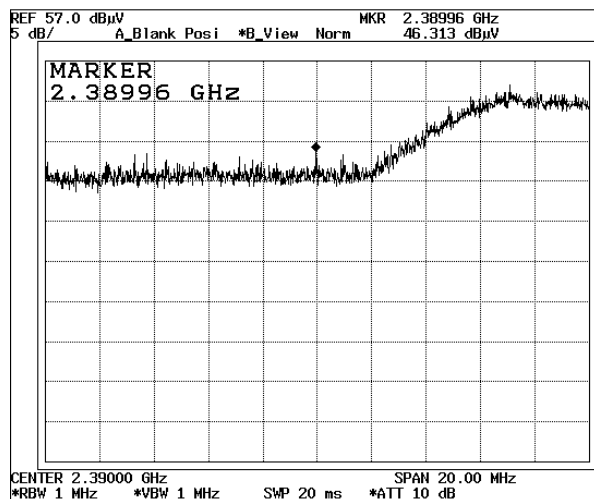

Frequency:2390MHz Hor (Av)

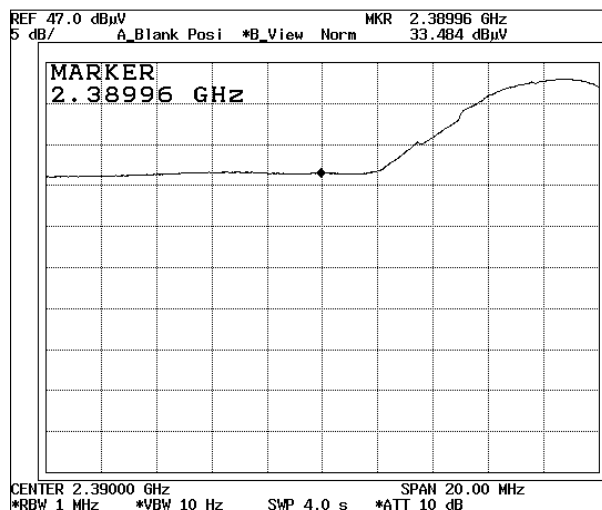

Frequency:2390MHz Ver (Pk)

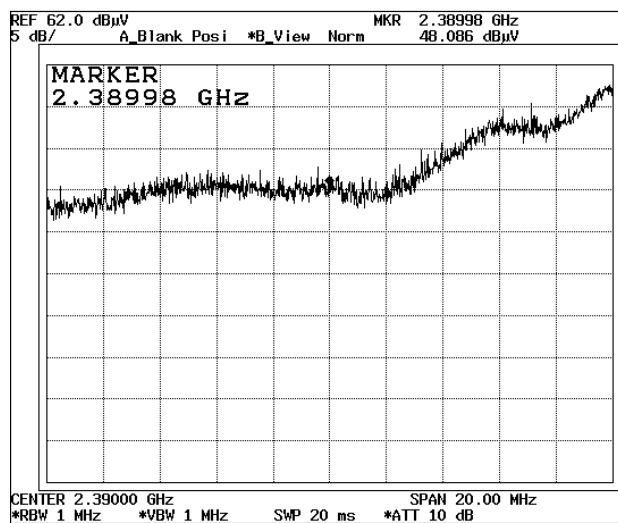

Frequency:2390MHz Ver (Av)



UL Apex Co., Ltd.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8116


Facsimile : +81 596 24 8124

MF060b(10.04.03)


Out of Band Emission : Restrictd Band Edges (Radiated)

IEEE802.11b 11Mbps In - Antenna Ch1:2412MHz


Frequency:2390MHz Hor (Pk)

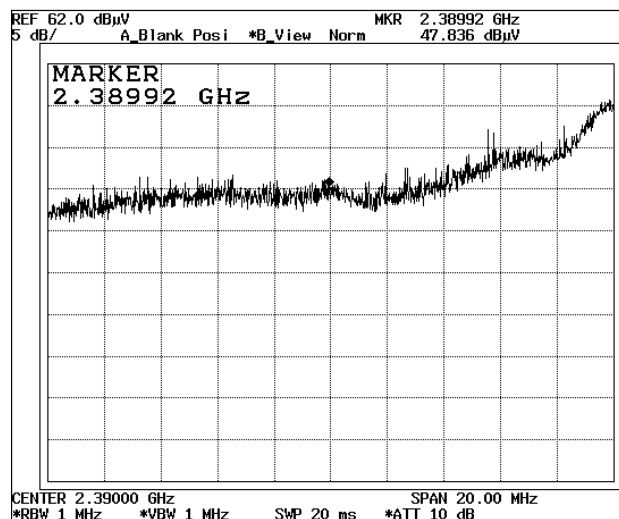


Frequency:2390MHz Hor (Av)

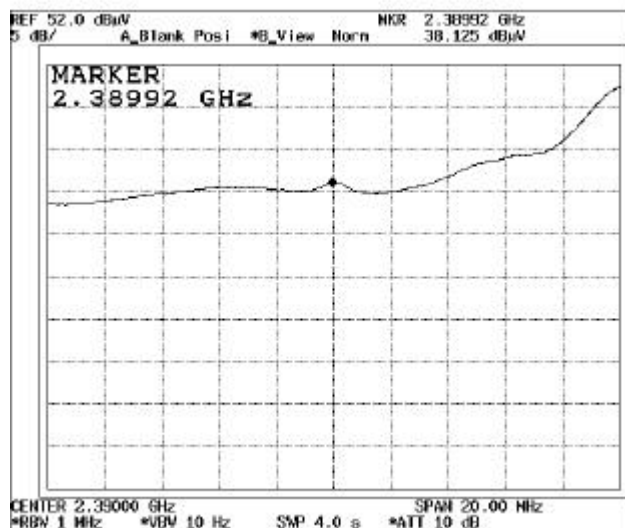

Frequency:2390MHz Ver (Pk)

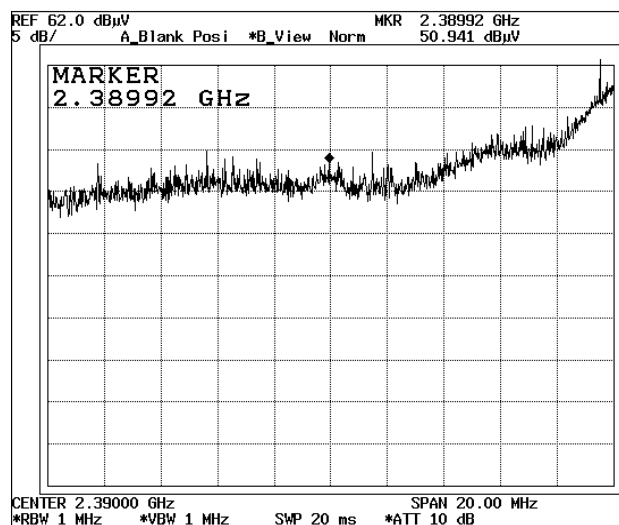


Frequency:2390MHz Ver (Av)

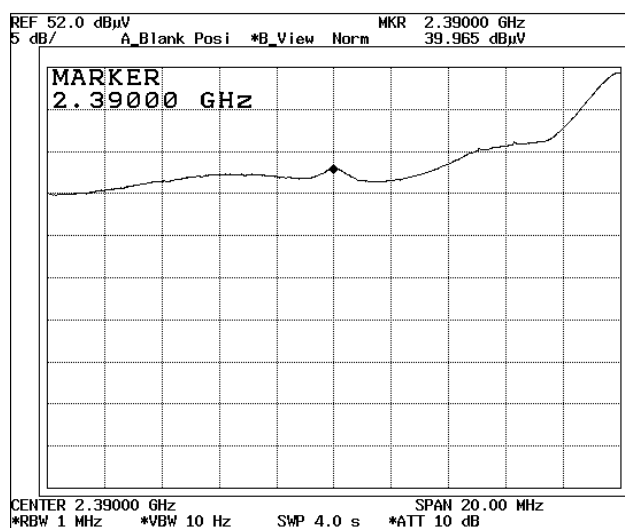


Out of Band Emission : Restricted Band Edges (Radiated)
IEEE802.11g 36Mbps Ext - Antenna Ch1:2412MHz


Frequency:2390MHz Hor (Pk)

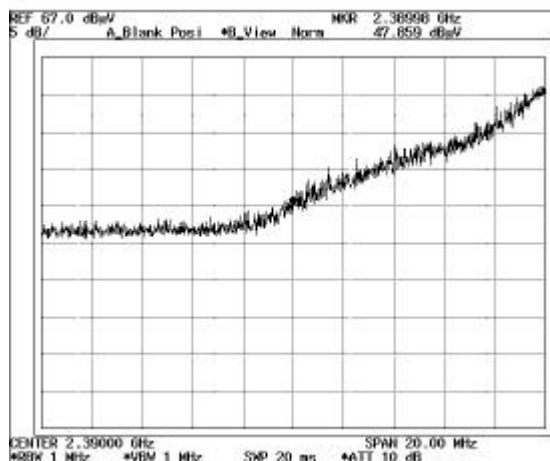


Frequency:2390MHz Hor (Av)

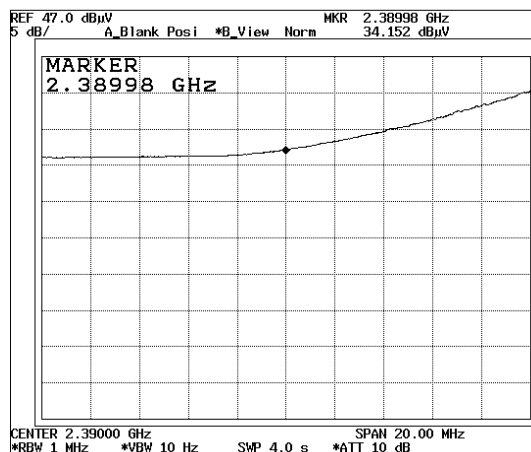

Frequency:2390MHz Ver (Pk)

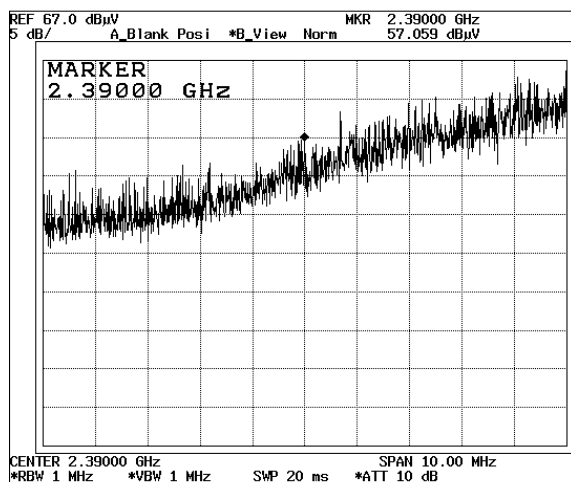


Frequency:2390MHz Ver (Av)

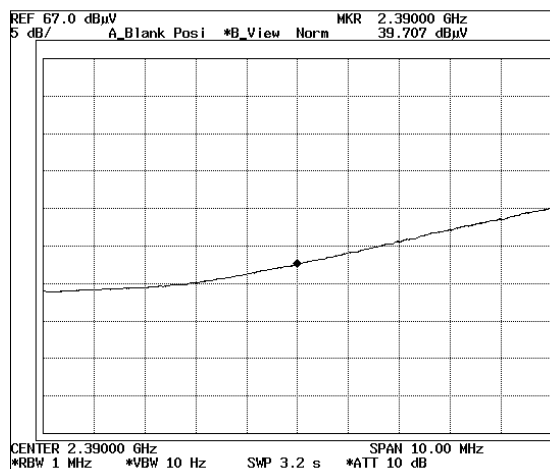


Out of Band Emission : Restrictd Band Edges (Radiated)
IEEE802.11g 36Mbps In - Antenna Ch1:2412MHz


Frequency:2390MHz Hor (Pk)

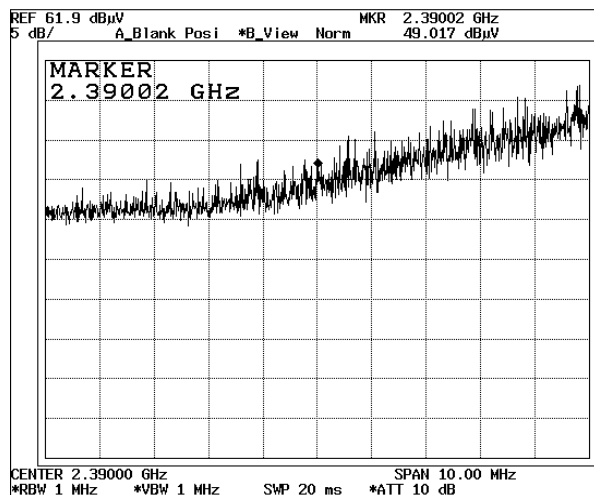


Frequency:2390MHz Hor (Av)

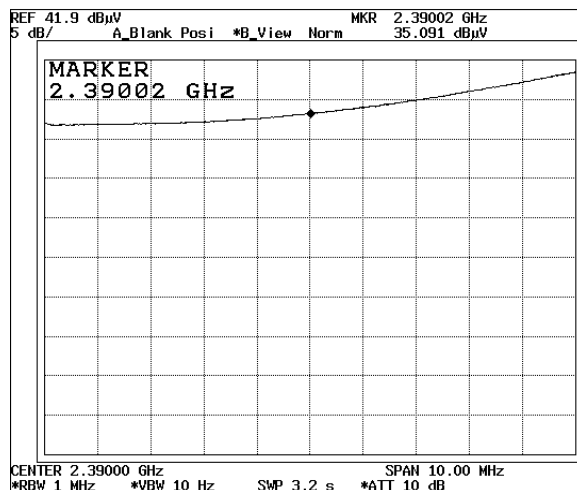

Frequency:2390MHz Ver (Pk)

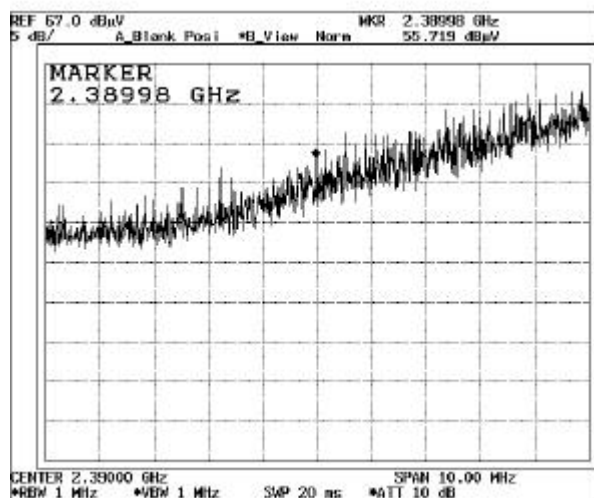


Frequency:2390MHz Ver (Av)

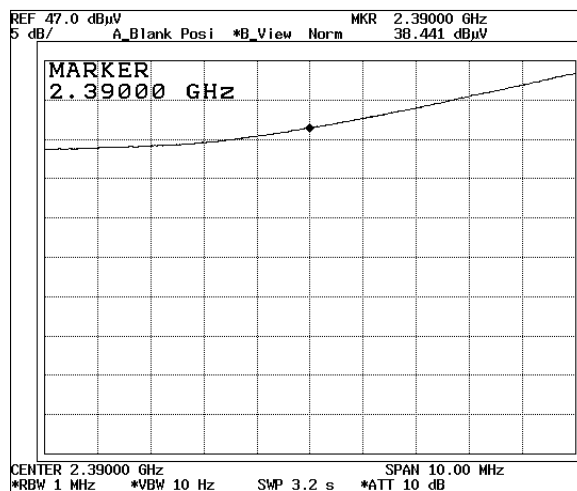


Out of Band Emission : Restricted Band Edges (Radiated)
IEEE802.11g 54Mbps Ext - Antenna Ch1:2412MHz


Frequency:2390MHz Hor (Pk)

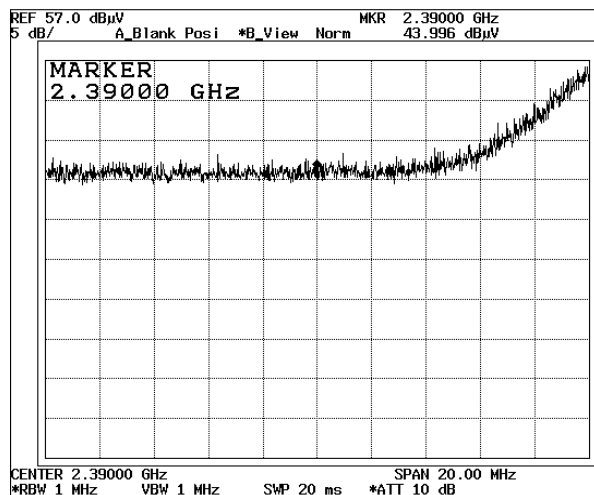


Frequency:2390MHz Hor (Av)

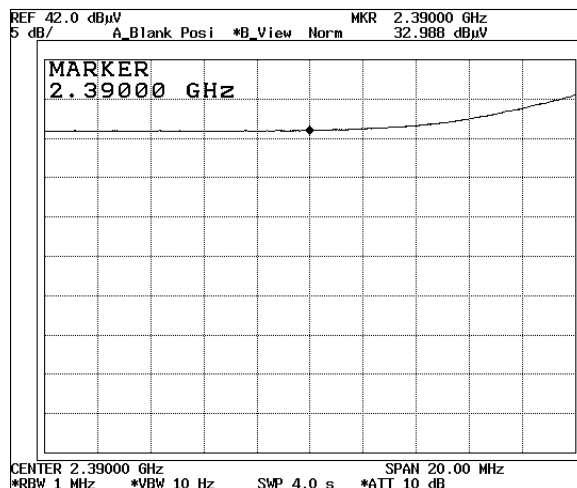

Frequency:2390MHz Ver (Pk)

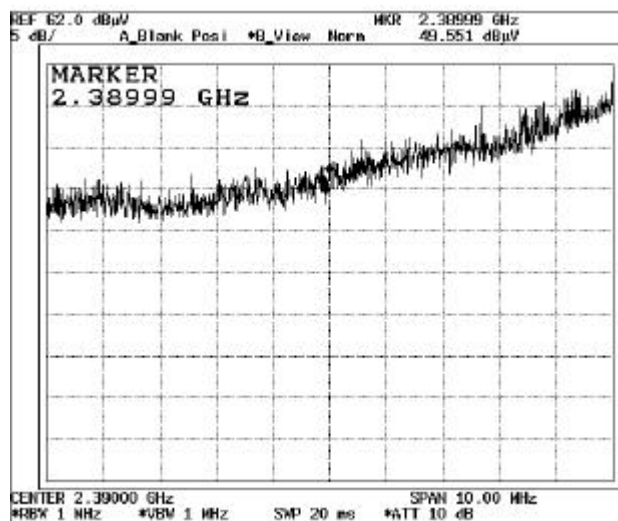


Frequency:2390MHz Ver (Av)

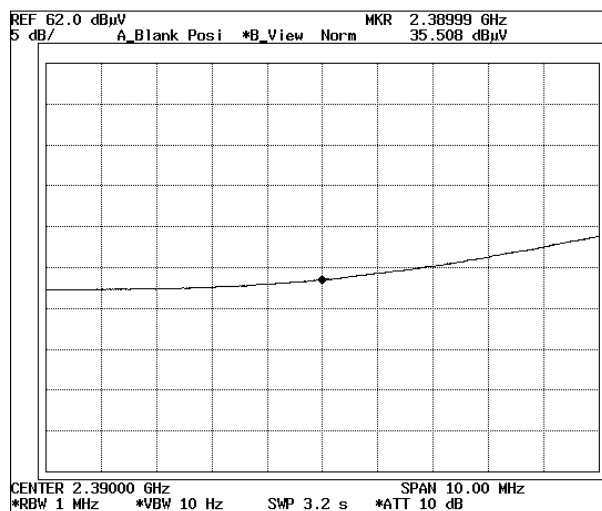


Out of Band Emission : Restricted Band Edges (Radiated)
IEEE802.11g 54Mbps In - Antenna Ch1:2412MHz


Frequency:2390MHz Hor (Pk)

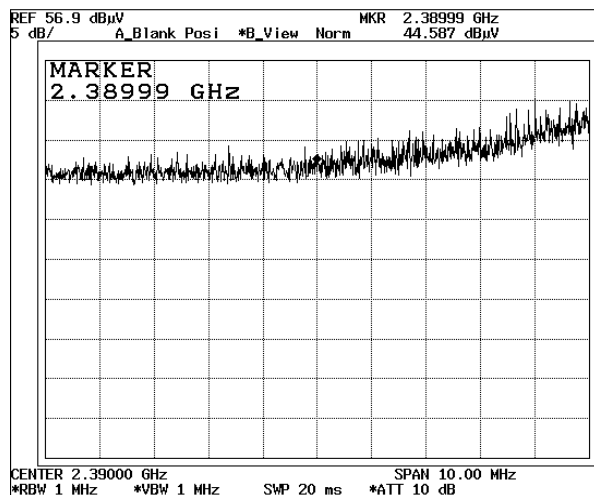


Frequency:2390MHz Hor (Av)

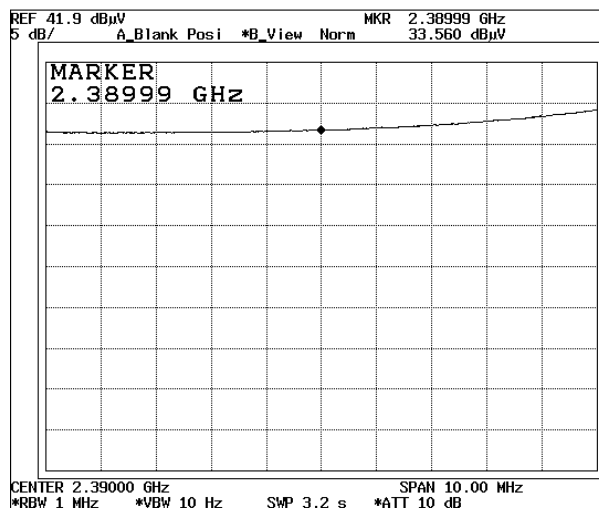

Frequency:2390MHz Ver (Pk)

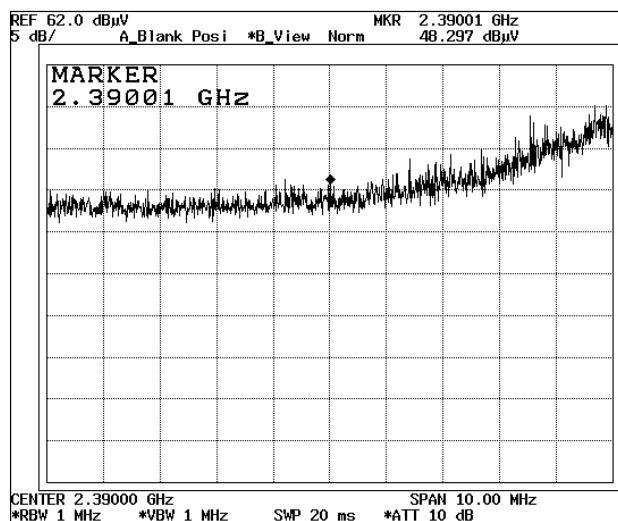


Frequency:2390MHz Ver (Av)

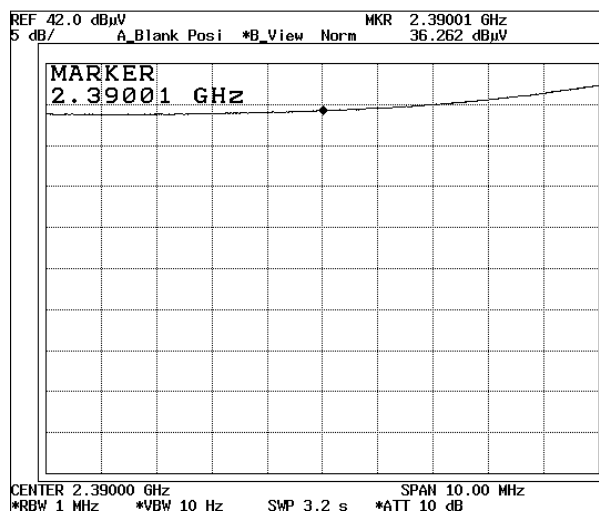


Out of Band Emission : Restrictd Band Edges (Radiated)
IEEE802.11b 11Mbps Ext - Antenna Ch11:2462MHz


Frequency:2483.5MHz Hor (Pk)

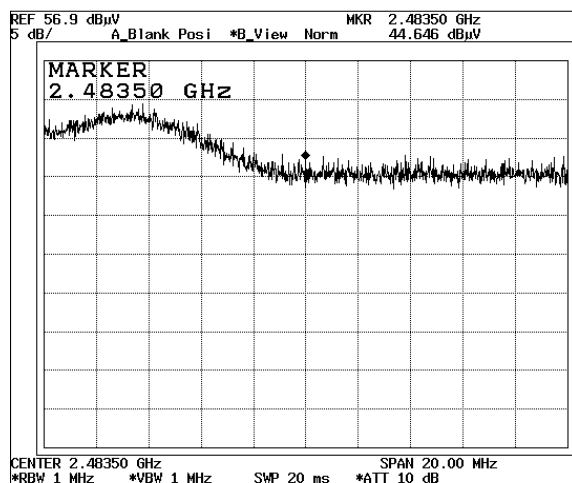


Frequency:2483.5MHz Hor (Av)

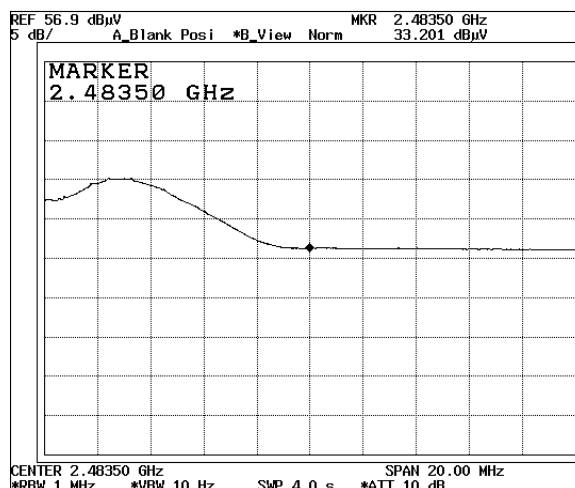

Frequency:2483.5MHz Ver (Pk)

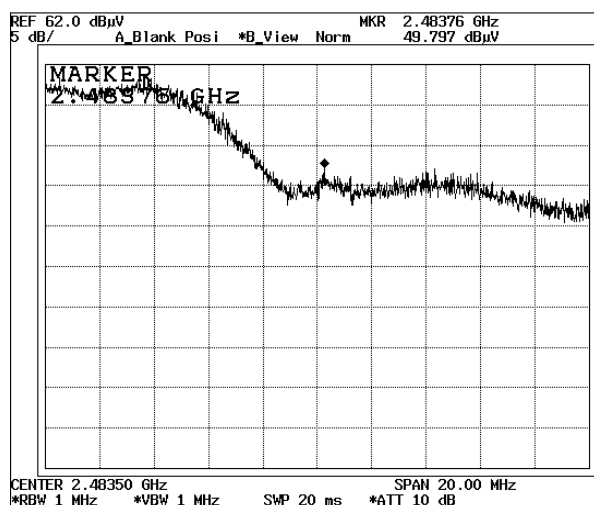


Frequency:2483.5MHz Ver (Av)

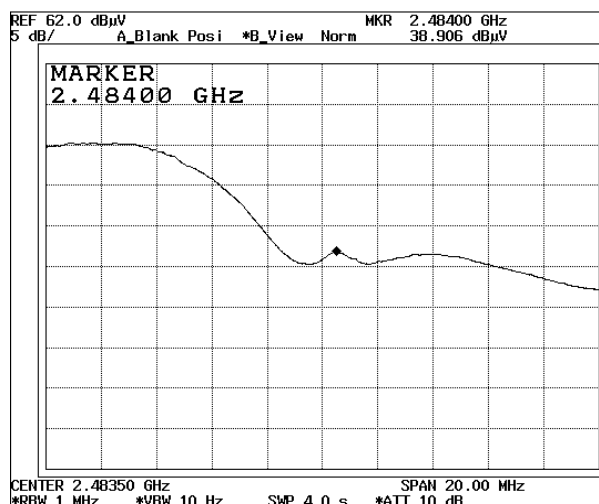


Out of Band Emission : Restricted Band Edges (Radiated)
IEEE802.11b 11Mbps In - Antenna Ch11:2462MHz

Frequency:2483.5MHz Hor (Pk)

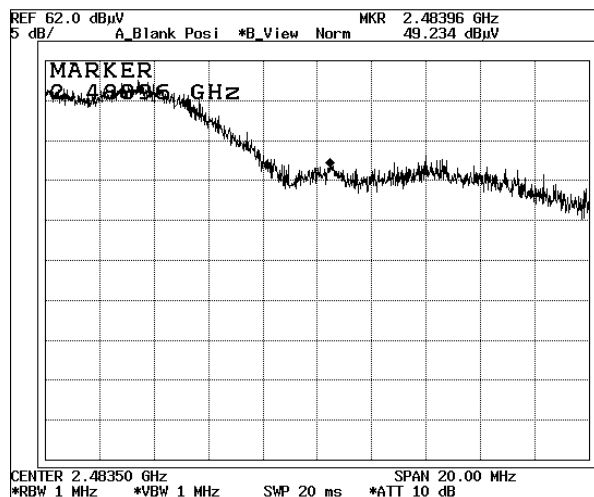

Frequency:2483.5MHz Hor (Av)

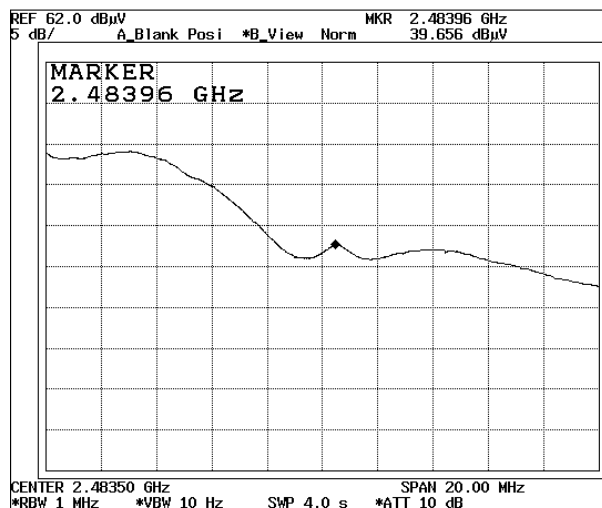

Frequency:2483.5MHz Ver (Pk)




Frequency:2483.5MHz Ver (Av)




Out of Band Emission : Restricted Band Edges (Radiated)
IEEE802.11g 36Mbps Ext - Antenna Ch11:2462MHz


Frequency:2483.5MHz Hor (Pk)

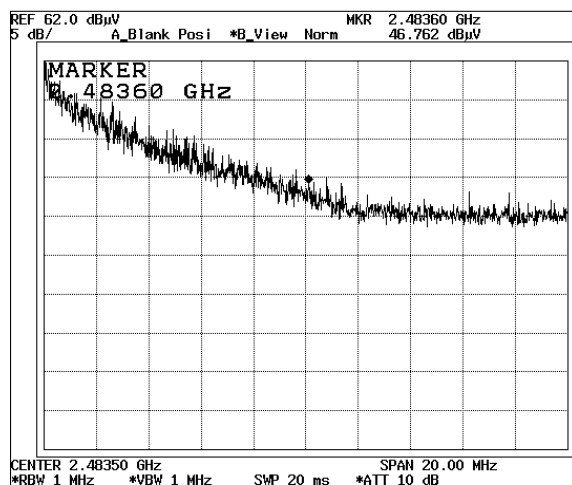


Frequency:2483.5MHz Hor (Av)

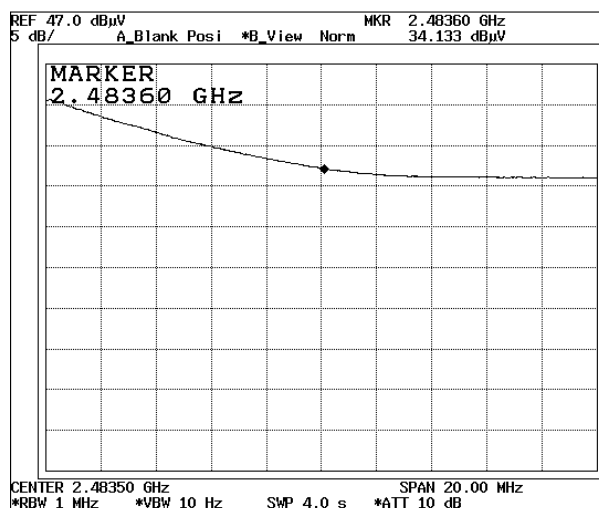

Frequency:2483.5MHz Ver (Pk)

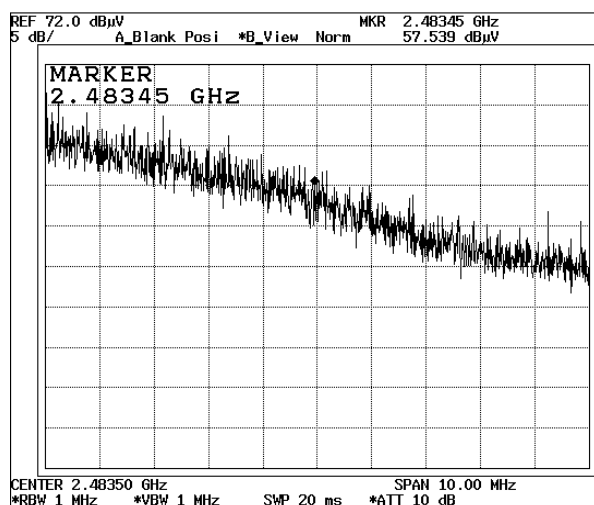


Frequency:2483.5MHz Ver (Av)

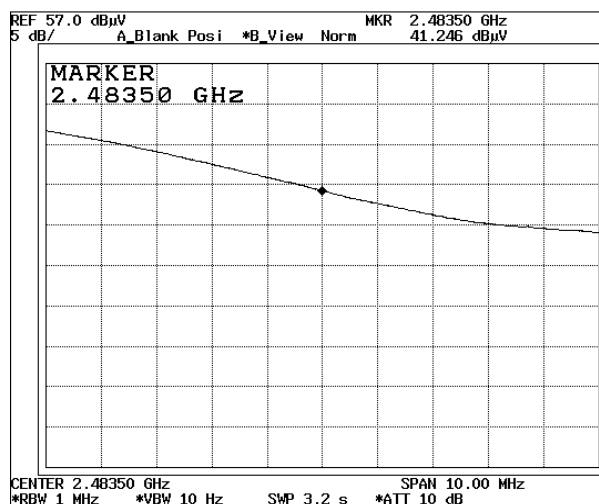

Out of Band Emission : Restrictd Band Edges (Radiated)
IEEE802.11g 36Mbps In - Antenna Ch11:2462MHz


Frequency:2483.5MHz Hor (Pk)

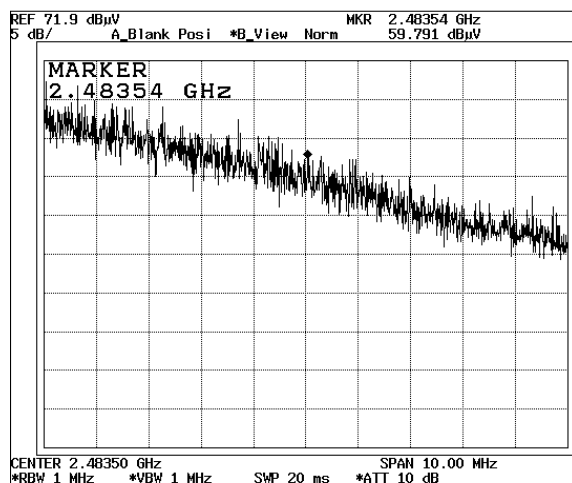


Frequency:2483.5MHz Hor (Av)



Frequency:2483.5MHz Ver (Pk)

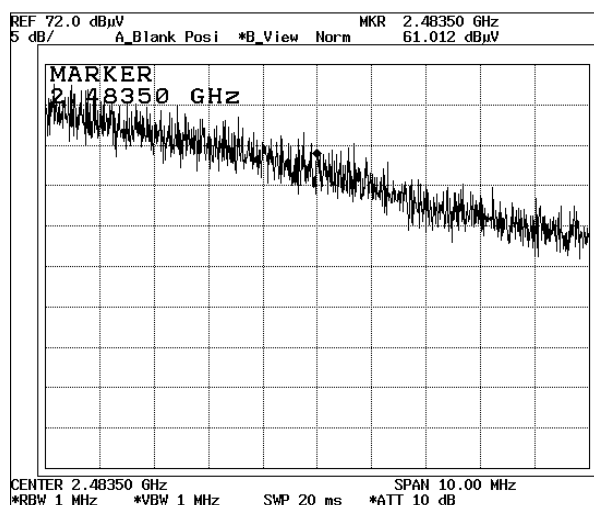


Frequency:2483.5MHz Ver (Av)

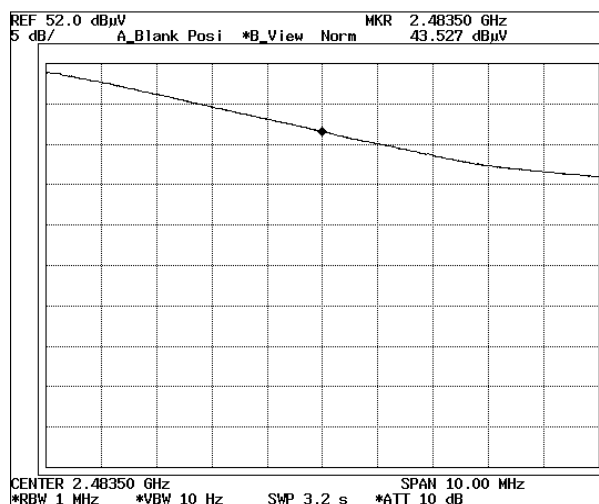


Out of Band Emission : Restrictd Band Edges (Radiated)
IEEE802.11g 54Mbps Ext - Antenna Ch11:2462MHz


Frequency:2483.5MHz Hor (Pk)

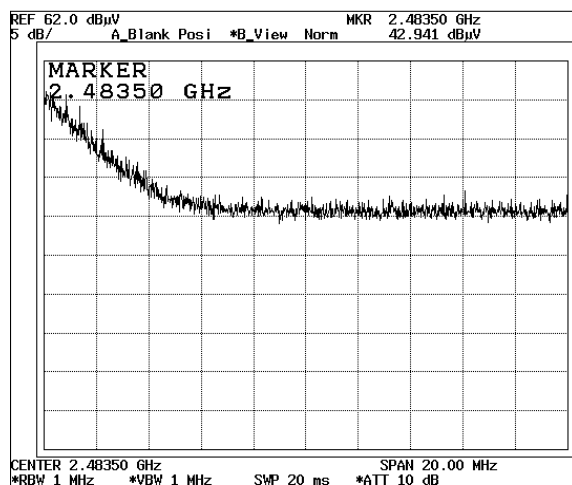

Frequency:2483.5MHz Hor (Av)

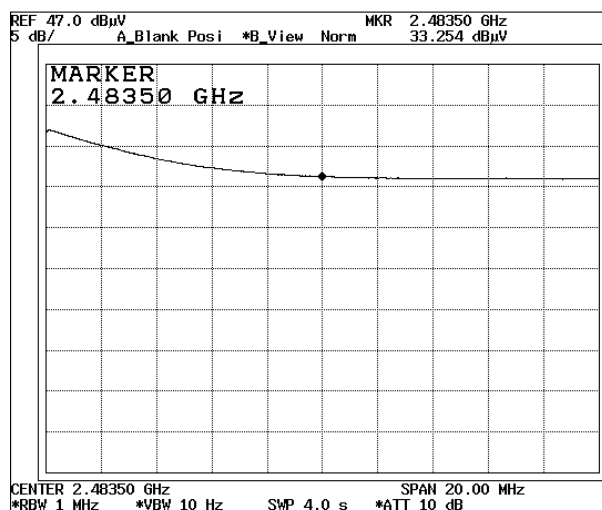

Frequency:2483.5MHz Ver (Pk)

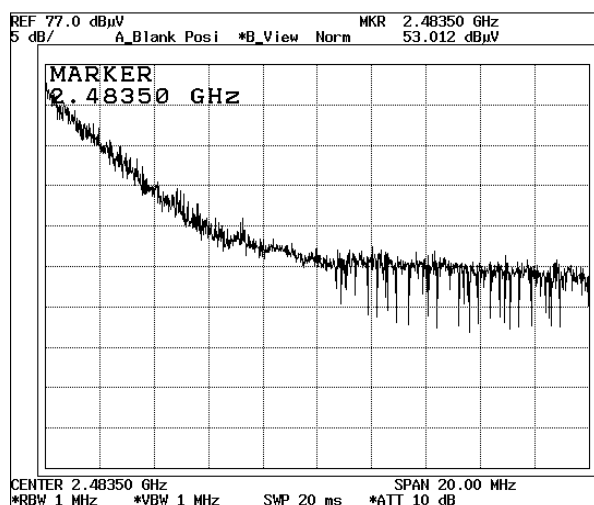

Frequency:2483.5MHz Ver (Av)

