



FCC PART 15.247

TEST REPORT

For

Porta Phone Company Inc

145 Dean Knauss Drive Narragansett Rhode Island 02882 United States

FCC ID: B4HTD900HDR

Report Type: Original Report	Product Type: FULL DUPLEX, HIGH DEFINITION, 900MHZ TRANSCEIVER-REMOTE
Report Number: <u>RSZ180419831-00</u>	
Report Date: <u>2018-05-25</u> Rocky Kang	<i>Rocky Kang</i>
Reviewed By: <u>RF Engineer</u>	
Prepared By: Bay Area Compliance Laboratories Corp. (Shenzhen) 6/F., West Wing, Third Phase of Wanli Industrial Building, Shihua Road, Futian Free Trade Zone, Shenzhen, Guangdong, China Tel: +86-755-33320018 Fax: +86-755-33320008 www.baclcorp.com.cn	

Note: This report must not be used by the customer to claim product certification, approval, or endorsement by A2LA* or any agency of the Federal Government. * This report may contain data that are not covered by the A2LA accreditation and are marked with an asterisk “*”.

TABLE OF CONTENTS

GENERAL INFORMATION	4
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT).....	4
OBJECTIVE.....	4
RELATED SUBMITTAL(S)/GRANT(S).....	4
TEST METHODOLOGY.....	4
MEASUREMENT UNCERTAINTY.....	5
TEST FACILITY.....	5
SYSTEM TEST CONFIGURATION	6
DESCRIPTION OF TEST CONFIGURATION.....	6
EUT EXERCISE SOFTWARE.....	6
SPECIAL ACCESSORIES.....	6
EQUIPMENT MODIFICATIONS.....	6
BLOCK DIAGRAM OF TEST SETUP.....	7
SUMMARY OF TEST RESULTS	8
TEST EQUIPMENT LIST	9
FCC§15.247 (i), §1.1307 (b) (1) & §2.1093 – RF EXPOSURE	10
APPLICABLE STANDARD.....	10
TEST RESULT.....	10
FCC §15.203 - ANTENNA REQUIREMENT	11
APPLICABLE STANDARD.....	11
ANTENNA CONNECTOR CONSTRUCTION.....	11
FCC §15.205, §15.209 & §15.247(d) - SPURIOUS EMISSIONS	12
APPLICABLE STANDARD.....	12
EUT SETUP.....	12
EMI TEST RECEIVER & SPECTRUM ANALYZER SETUP.....	13
TEST PROCEDURE.....	13
CORRECTED AMPLITUDE & MARGIN CALCULATION.....	13
TEST RESULTS SUMMARY.....	13
TEST DATA.....	14
FCC §15.247(a) (1)-CHANNEL SEPARATION TEST	21
APPLICABLE STANDARD.....	21
TEST PROCEDURE.....	21
TEST DATA.....	21
FCC §15.247(a) (1) (i) – 20 dB EMISSION BANDWIDTH	24
APPLICABLE STANDARD.....	24
TEST PROCEDURE.....	24
TEST DATA.....	24
FCC §15.247(a) (1) (i)-QUANTITY OF HOPPING CHANNEL TEST	27
APPLICABLE STANDARD.....	27
TEST PROCEDURE.....	27
TEST DATA.....	27
FCC §15.247(a) (1) (i) - TIME OF OCCUPANCY (DWELL TIME)	29

APPLICABLE STANDARD29
TEST PROCEDURE29
TEST DATA29

FCC §15.247(b) (2) - MAXIMUM CONDUCTED OUTPUT POWER.....32
APPLICABLE STANDARD32
TEST PROCEDURE32
TEST DATA32

FCC §15.247(d) – 100 kHz BANDWIDTH OF FREQUENCY BAND EDGE.....33
APPLICABLE STANDARD33
TEST PROCEDURE33
TEST DATA33

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

The *Porta Phone Company Inc*'s product, model number: *TD900HD-SR (FCC ID: B4HTD900HDR)* in this report is a *FULL DUPLEX, HIGH DEFINITION, 900MHZ TRANSCEIVER-REMOTE* which was measured approximately: 20.5 cm (L) * 20 cm (W) * 8.2 cm (H), rated with input voltage: DC 3.7 V battery.

Notes: This series products model: TD900HD SR-SW, TD900HD-DR, TD900HD DR-SW and TD900HD-SR are identical; they have the identical schematics. Model TD900HD-SR was selected for fully testing, the detailed information can be referred to the declaration which was stated and guaranteed by the applicant.

**All measurement and test data in this report was gathered from production sample serial number: 20180419 (Assigned by BAACL, Shenzhen). The EUT supplied by the applicant was received on 2018-04-19.*

Objective

This report is prepared on behalf of *Porta Phone Company Inc* in accordance with Part 2-Subpart J, Part 15-Subparts A and C of the Federal Communication Commission's rules.

The tests were performed in order to determine compliance with FCC Part 15, Subpart C, and section 15.203, 15.205, 15.209 and 15.247 rules.

Related Submittal(s)/Grant(s)

FCC Part 15.247 DSS submissions with FCC ID: B4HTD900HDM.

Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2013, American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices.

All emissions measurement was performed at Bay Area Compliance Laboratories Corp. (Shenzhen). The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

Measurement Uncertainty

Parameter		Uncertainty
Occupied Channel Bandwidth		±5%
RF Output Power with Power meter		±0.5dB
RF conducted test with spectrum		±1.5dB
AC Power Lines Conducted Emissions		±1.95dB
Emissions, Radiated	Below 1GHz	±4.75dB
	Above 1GHz	±4.88dB
Temperature		±3°C
Humidity		±6%
Supply voltages		±0.4%

Test Facility

The Test site used by Bay Area Compliance Laboratories Corp. (Shenzhen) to collect test data is located on the 6/F., West Wing, Third Phase of Wanli Industrial Building, Shihua Road, Futian Free Trade Zone, Shenzhen, Guangdong, China.

The test site has been approved by the FCC under the KDB 974614 D01 and is listed in the FCC Public Access Link (PAL) database, FCC Registration No.: 342867, the FCC Designation No.: CN1221.

The test site has been registered with ISED Canada under ISED Canada Registration Number 3062B.

SYSTEM TEST CONFIGURATION

Description of Test Configuration

The system was configured for testing in engineering mode.

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	903.0	2	903.5	3	904.0	4	904.5
5	905.0	6	905.5	7	906.0	8	906.5
9	907.0	10	907.5	11	908.0	12	908.5
13	909.0	14	909.5	15	910.0	16	910.5
17	911.0	18	911.5	19	912.0	20	912.5
21	913.0	22	913.5	23	914.0	24	914.5
25	915.0	26	915.5	27	916.0	28	916.5
29	917.0	30	917.5	31	918.0	32	918.5
33	919.0	34	919.5	35	920.0	36	920.5
37	921.0	38	921.5	39	922.0	40	922.5
41	923.0	42	923.5	43	924.0	44	924.5
45	925.0	46	925.0	47	926.0	48	926.5
49	927.0						

EUT Exercise Software

No Exercise software was used

Special Accessories


No special accessory.

Equipment Modifications

No modification was made to the EUT tested.

Block Diagram of Test Setup

For radiated emissions:

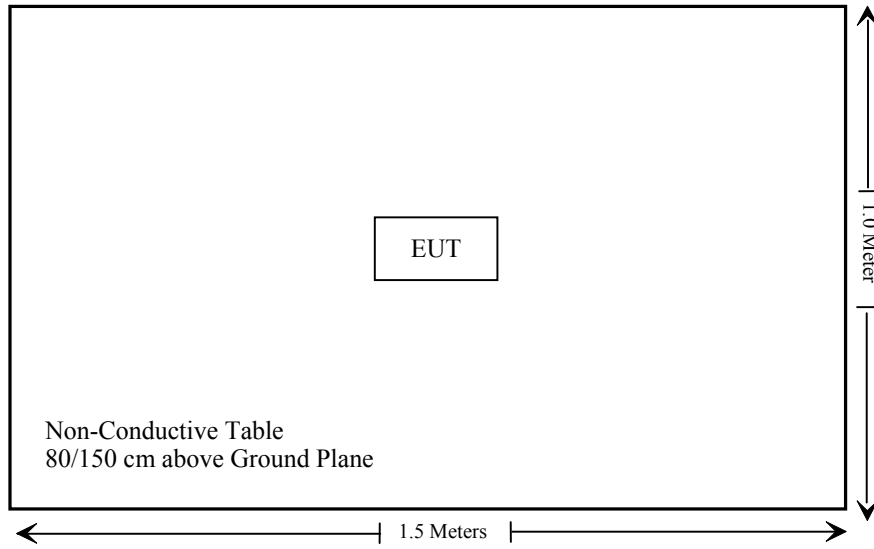

SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Result
§15.247 (i), §2.1093	RF Exposure	Compliance
§15.203	Antenna Requirement	Compliance
§15.207(a)	AC Line Conducted Emissions	Not Applicable
§15.205, §15.209 & §15.247(d)	Radiated Emissions	Compliance
§15.247(a)(1)	20 dB Emission Bandwidth	Compliance
§15.247(a)(1)(i)	Channel Separation Test	Compliance
§15.247(a)(1)(i)	Time of Occupancy (Dwell Time)	Compliance
§15.247(a)(1)(i)	Quantity of hopping channel Test	Compliance
§15.247(b)(2)	Peak Output Power Measurement	Compliance
§15.247(d)	Band edges	Compliance

Not Applicable: The EUT is powered by battery and the battery can be removed to a charger while it's charging

TEST EQUIPMENT LIST

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Radiated Emission Test					
A.H.System	Horn Antenna	SAS-200/571	135	2015-08-18	2018-08-17
Rohde & Schwarz	Signal Analyzer	FSEM	845987/005	2018-04-24	2019-04-24
Mini	Pre-amplifier	ZVA-183-S+	5969001149	2017-05-21	2018-05-21
HP	Amplifier	HP8447E	1937A01046	2017-11-19	2018-05-21
Sunol Sciences	Broadband Antenna	JB1	A040904-1	2017-12-22	2020-12-21
Rohde & Schwarz	EMI Test Receiver	ESCI	101120	2018-01-11	2019-01-11
UTIFLEX MICRO-C0AX	RF Cable	UFA147A- 2362-100100	MFR64639 231029-003	2018-04-01	2018-10-01
Ducommun technologies	RF Cable	104PEA	218124002	2017-11-19	2018-05-21
Ducommun technologies	RF Cable	RG-214	1	2017-11-19	2018-05-21
Ducommun technologies	RF Cable	RG-214	2	2017-11-22	2018-05-22
Ducommun Technologies	Horn Antenna	ARH-4223- 02	1007726-04	2017-12-29	2020-12-28
Ducommun Technologies	Pre-amplifier	ALN- 22093530-01	991373-01	2017-08-03	2018-08-03
N/A	High pass filter	1.3GHz	N/A	2017-05-21	2018-05-21
Rohde & Schwarz	Auto test software	EMC 32	V9.10	NCR	NCR
RF Conducted Test					
Agilent	P-Series Power Meter	N1912A	MY5000448	2018-01-02	2019-01-02
Agilent	Wideband Power Sensor	N1921A	MY54210016	2018-01-02	2019-01-02
WEINSCHEL	10dB Attenuator	5324	AU 3842	2017-11-22	2018-05-22
Rohde & Schwarz	SPECTRUM ANALYZER	FSU26	200120	2017-12-24	2018-12-24
Ducommun technologies	RF Cable	RG-214	3	2017-11-22	2018-05-22

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

FCC§15.247 (i), §1.1307 (b) (1) & §2.1093 – RF EXPOSURE

Applicable Standard

FCC§1.1310 and §2.1093.

Test Result

Compliance, please refer to the SAR report: RSZ180419831-20A.

FCC §15.203 - ANTENNA REQUIREMENT

Applicable Standard

According to § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the user of a standard antenna jack or electrical connector is prohibited. The structure and application of the EUT were analyzed to determine compliance with section §15.203 of the rules. §15.203 state that the subject device must meet the following criteria:

- a. Antenna must be permanently attached to the unit.
- b. Antenna must use a unique type of connector to attach to the EUT.

Unit must be professionally installed, and installer shall be responsible for verifying that the correct antenna is employed with the unit.

And according to FCC 47 CFR section 15.247 (b), if the transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

Antenna Connector Construction

The EUT has an internal antenna arrangement, which was permanently attached and the antenna gain is 0 dBi, fulfill the requirement of this section. Please refer to the EUT photos.

Result: Compliance.


FCC §15.205, §15.209 & §15.247(d) - SPURIOUS EMISSIONS

Applicable Standard


FCC §15.247 (d); §15.209; §15.205;

EUT Setup

Below 1 GHz:

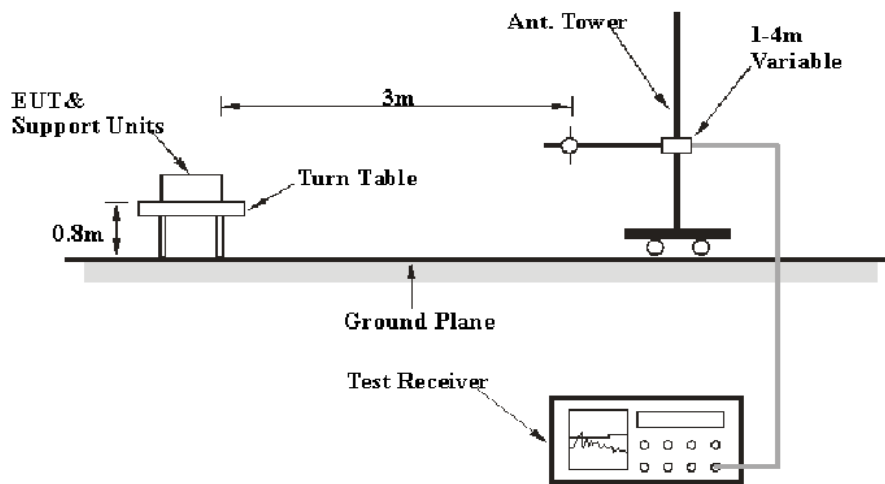

Above 1GHz:

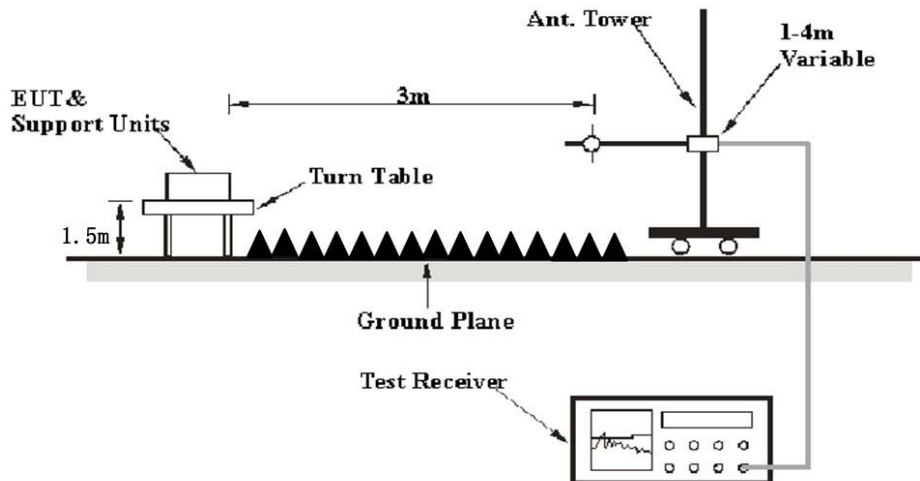

The radiated emission tests were performed in the 3 meters test site, using the setup accordance with the ANSI C63.10-2013. The specification used was the FCC 15.209, and FCC 15.247 limits.

EMI Test Receiver & Spectrum Analyzer Setup

The system was investigated from 30 MHz to 10 GHz.

During the radiated emission test, the EMI test receiver & Spectrum Analyzer Setup were set with the following configurations:

Frequency Range	RBW	Video B/W	IF B/W	Measurements
30 MHz – 1000 MHz	100 kHz	300 kHz	120 kHz	QP
Above 1 GHz	1MHz	3 MHz	/	PK
	1MHz	10 Hz	/	Ave.

Test Procedure

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

Data was recorded in Quasi-peak detection mode for frequency range of 30 MHz-1 GHz, peak and Average detection modes for frequencies above 1 GHz.

Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain from the Meter Reading. The basic equation is as follows:

$$\text{Corrected Amplitude} = \text{Meter Reading} + \text{Antenna Factor} + \text{Cable Loss} - \text{Amplifier Gain}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

Test Results Summary

According to the recorded data in following table, the EUT complied with the FCC Title 47, Part 15, Subpart C, section 15.205, 15.209 and 15.247.

Refer to CISPR16-4-2:2011 and CISPR 16-4-1:2009, the measured level complies with the limit if

$$L_m + U_{(L_m)} \leq L_{\text{lim}} + U_{\text{cispr}}$$

In BACL, $U_{(L_m)}$ is less than U_{cispr} , if L_m is less than L_{lim} , it implies that the EUT complies with the limit.

Test Data

Environmental Conditions


Temperature:	25 °C
Relative Humidity:	54 %
ATM Pressure:	101.0 kPa

The testing was performed by Hill He on 2018-04-26.

EUT operation mode: Transmitting

For Single Speaker:

30 MHz-1 GHz:

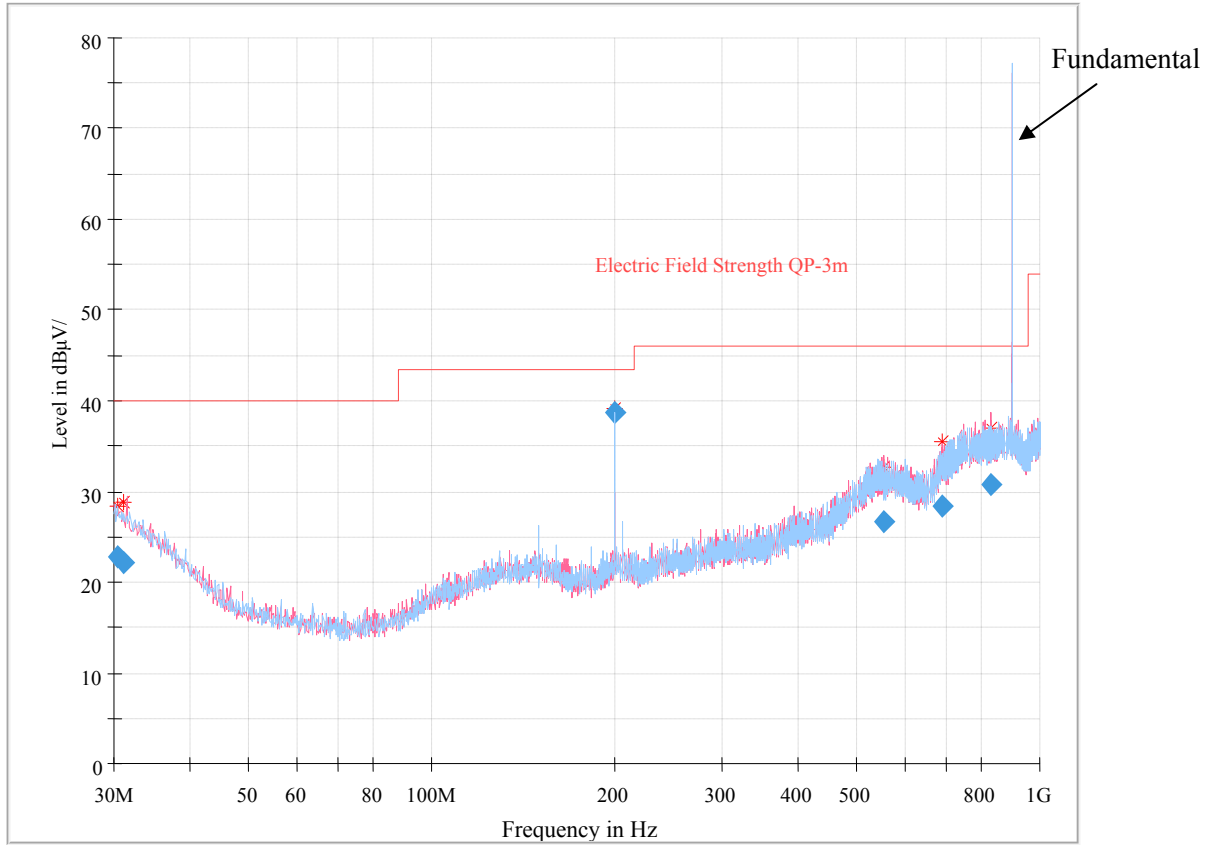

Frequency (MHz)	Corrected Amplitude (dBµV/m)	Antenna height (cm)	Antenna Polarity	Turntable position (degree)	Correction Factor (dB/m)	Limit (dBµV/m)	Margin (dB)
30.363750	22.76	109.0	H	123.0	0.5	40.00	17.24
31.129375	22.16	120.0	V	138.0	0.0	40.00	17.84
199.988750	38.78	144.0	H	266.0	-4.0	43.50	4.72
555.708125	26.61	270.0	V	141.0	5.2	46.00	19.39
691.510875	28.48	336.0	V	276.0	6.4	46.00	17.52
833.612625	30.86	400.0	V	227.0	9.4	46.00	15.14

Frequency (MHz)	Receiver		Turntable Degree	Rx Antenna		Corrected Factor (dB/m)	Corrected Amplitude (dBµV/m)	FCC Part 15.247/205/209	
	Reading (dBµV)	PK/QP/Ave.		Height (m)	Polar (H/V)			Limit (dBµV/m)	Margin (dB)
Low Channel (903MHz)									
903.00	80.47	PK	76	2.1	H	37.57	118.04	/	/
903.00	80.67	PK	169	2.2	V	37.57	118.24	/	/
1806.00	76.64	PK	329	1.8	V	-5.22	71.42	98.24	26.82
2709.00	68.91	PK	56	1.8	V	-0.65	68.26	74	5.74
2709.00	34.12	Ave.	56	1.8	V	-0.65	33.47	54	20.53
6321.00	49.73	PK	174	1.6	V	8.75	58.48	98.24	39.76
Middle Channel (915MHz)									
915.00	81.00	PK	216	2.3	H	37.16	118.16	/	/
915.00	81.43	PK	298	1.2	V	37.16	118.59	/	/
1830.00	79.48	PK	272	2.2	V	-5.22	74.26	98.59	24.33
2745.00	65.41	PK	328	1.4	V	-0.65	64.76	74	9.24
2745.00	34.18	Ave.	328	1.4	V	-0.65	33.53	54	20.47
6405.00	53.52	PK	283	1.5	V	8.93	62.45	98.59	36.14
High Channel (927 MHz)									
927.00	81.34	PK	203	1.8	H	36.75	118.09	/	/
927.00	81.98	PK	113	1.7	V	36.75	118.73	/	/
1854.00	81.12	PK	113	1.6	V	-5.17	75.95	98.73	22.78
2781.00	60.87	PK	116	1.0	V	-0.57	60.30	74	13.7
2781.00	33.26	Ave.	116	1.0	V	-0.57	32.69	54	21.31
6489.00	52.57	PK	265	1.4	V	9.93	62.50	98.73	36.23

Note:


Corrected Factor = Antenna factor (RX) + Cable Loss – Amplifier Factor

Corrected Amplitude = Corrected Factor + Reading


Margin = Limit - Corrected. Amplitude

The other spurious emission which is 20dB to the limit was not recorded.

Pre-scan for Peak Horizontal

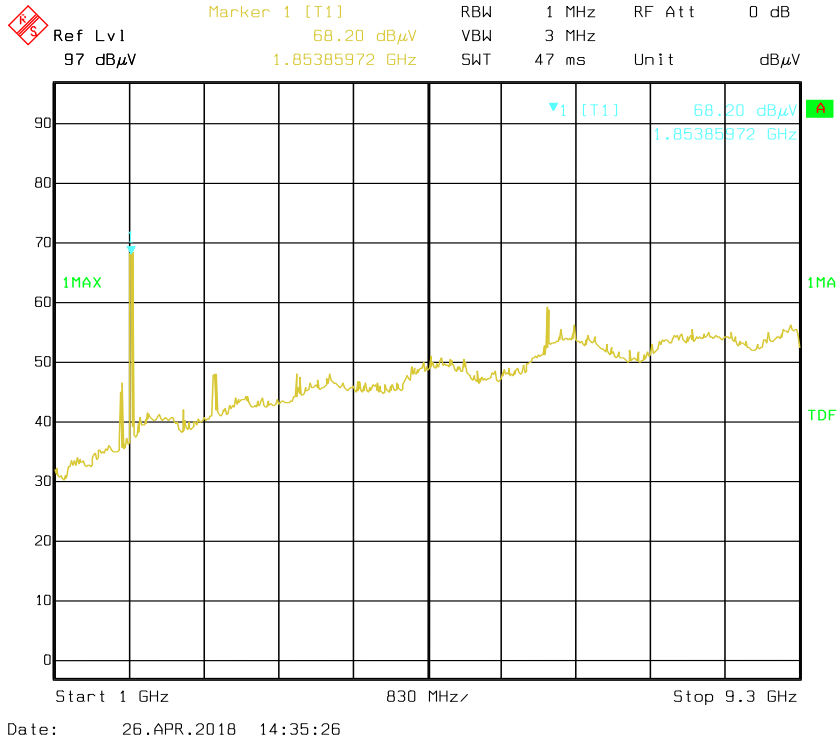


Vertical

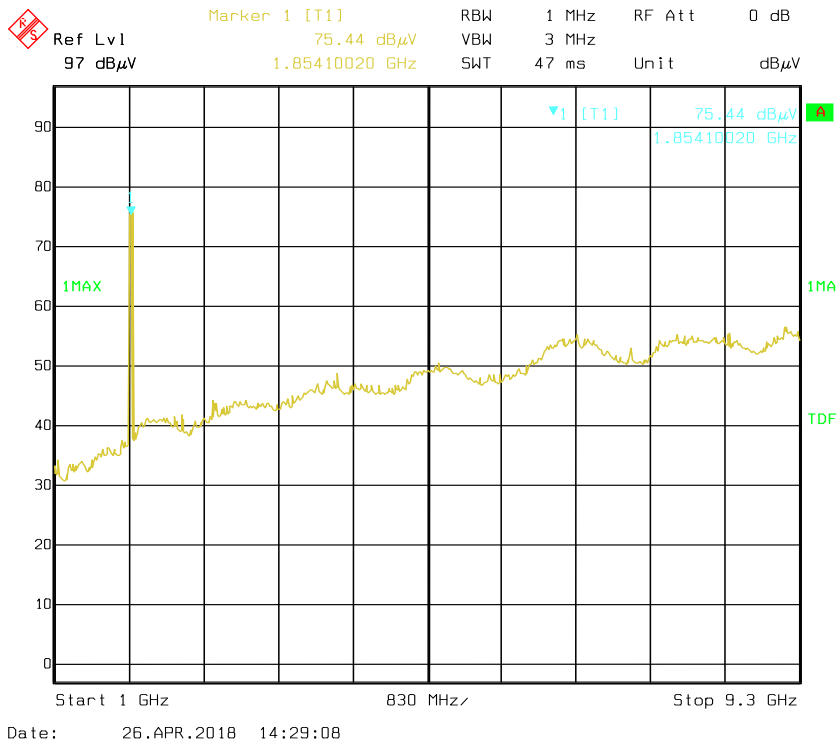

For Dual Speaker:

30 MHz-1 GHz:

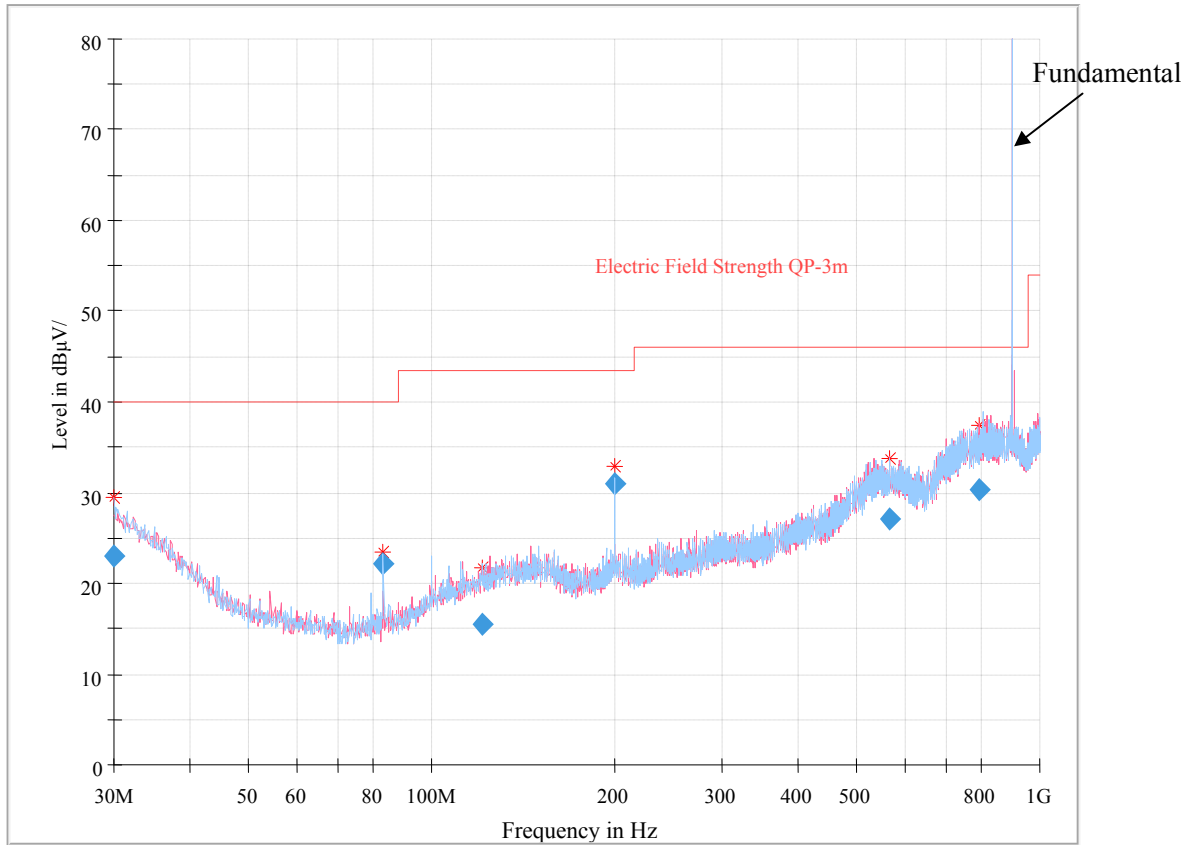

Frequency (MHz)	Corrected Amplitude (dBµV/m)	Antenna height (cm)	Antenna Polarity	Turntable position (degree)	Correction Factor (dB/m)	Limit (dBµV/m)	Margin (dB)
30.004375	23.07	346.0	H	251.0	0.7	40.00	16.93
83.343875	22.16	400.0	H	167.0	-11.2	40.00	17.84
120.691750	15.49	231.0	H	216.0	-6.3	43.50	28.01
200.002000	31.00	160.0	H	105.0	-4.0	43.50	12.50
566.325500	27.18	392.0	V	356.0	5.1	46.00	18.82
797.740500	30.43	372.0	V	284.0	9.1	46.00	15.57

Frequency (MHz)	Receiver		Turntable Degree	Rx Antenna		Corrected Factor (dB/m)	Corrected Amplitude (dBµV/m)	FCC Part 15.247/205/209	
	Reading (dBµV)	PK/QP/Ave.		Height (m)	Polar (H/V)			Limit (dBµV/m)	Margin (dB)
Low Channel (903MHz)									
903	80.2	PK	255	1.1	H	37.57	117.77	/	/
903	80.48	PK	241	1.0	V	37.57	118.05	/	/
1806	77.47	PK	254	2.4	V	-5.22	72.25	98.05	25.8
2709	68.92	PK	94	2.2	V	-0.65	68.27	74	5.73
2709	35.02	Ave.	94	2.2	V	-0.65	34.37	54	19.63
6321.00	52.36	PK	3	1.5	V	8.75	61.11	98.05	36.94
Middle Channel (915MHz)									
915	81.21	PK	109	1.6	H	37.16	118.37	/	/
915	80.79	PK	97	1.7	V	37.16	117.95	/	/
1830	78.32	PK	99	1.7	V	-5.22	73.10	98.37	25.27
2745	67.48	PK	155	1.8	V	-0.65	66.83	74	7.17
2745	34.13	Ave.	155	1.8	V	-0.65	33.48	54	20.52
6405.00	48.44	PK	46	2.2	V	8.93	57.37	98.37	41.00
High Channel (927 MHz)									
927	81.16	PK	101	2.4	V	36.75	117.91	/	/
927	81.53	PK	135	2.2	H	36.75	118.28	/	/
1854	80.06	PK	13	2.3	V	-5.17	74.89	98.28	23.39
2781	59.05	PK	254	2.0	V	-0.57	58.48	74	15.52
2781	32.27	Ave.	254	2.0	V	-0.57	31.70	54	22.3
6489.00	47.19	PK	14	1.7	V	9.93	57.12	98.28	41.16

Note:


Corrected Factor = Antenna factor (RX) + Cable Loss – Amplifier Factor

Corrected Amplitude = Corrected Factor + Reading


Margin = Limit - Corrected. Amplitude

The other spurious emission which is 20dB to the limit was not recorded.

Pre-scan for Peak Horizontal

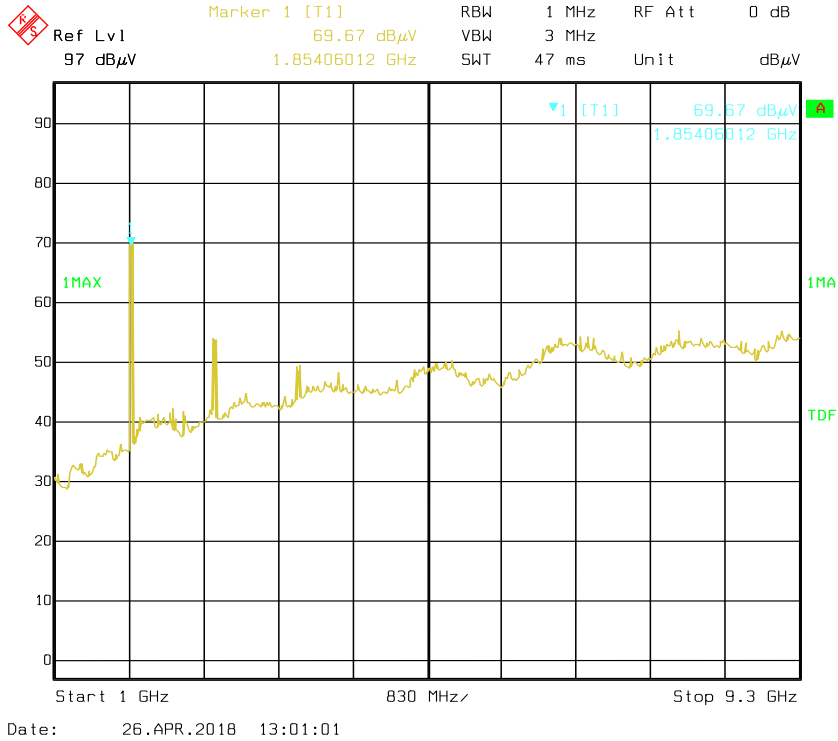

Vertical

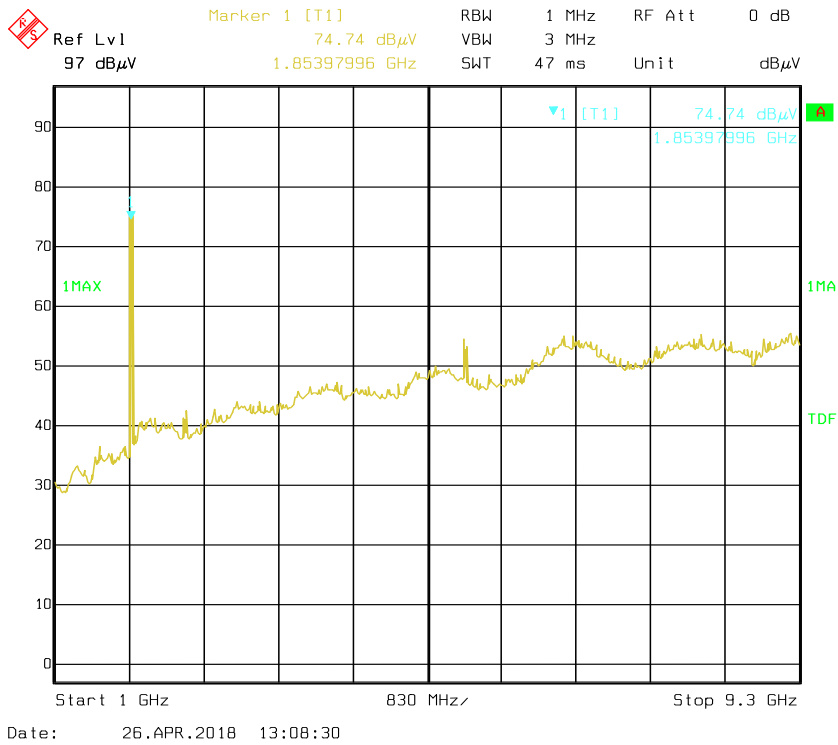

FCC §15.247(a) (1)-CHANNEL SEPARATION TEST

Applicable Standard

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater provided the systems operate with an output power no greater than 125 mW.

Test Procedure

1. Set the EUT in transmitting mode, maxhold the channel.
2. Set the adjacent channel of the EUT and maxhold another trace.
3. Measure the channel separation.

Test Data

Environmental Conditions

Temperature:	26 °C
Relative Humidity:	53 %
ATM Pressure:	101.0 kPa

The testing was performed by Hill He on 2018-04-24.


EUT operation mode: Transmitting

Test Result: Compliance. Please refer to following table and plots

Mode	Channel	Frequency (MHz)	Channel Separation (MHz)	≥Limit (MHz)	Result
GFSK	Low	903	0.502	0.309	Pass
	Adjacent	903.5			
	Middle	915	0.498	0.290	Pass
	Adjacent	915.5			
	High	927	0.500	0.288	Pass
	Adjacent	926.5			


Note: Limit = 20 dB bandwidth

Low Channel

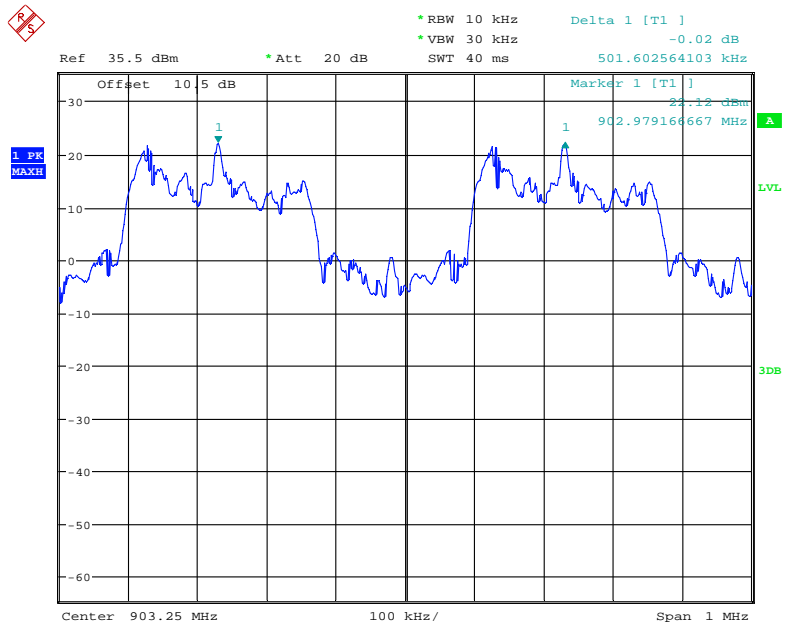


Date: 24.APR.2018 15:39:11

Middle Channel

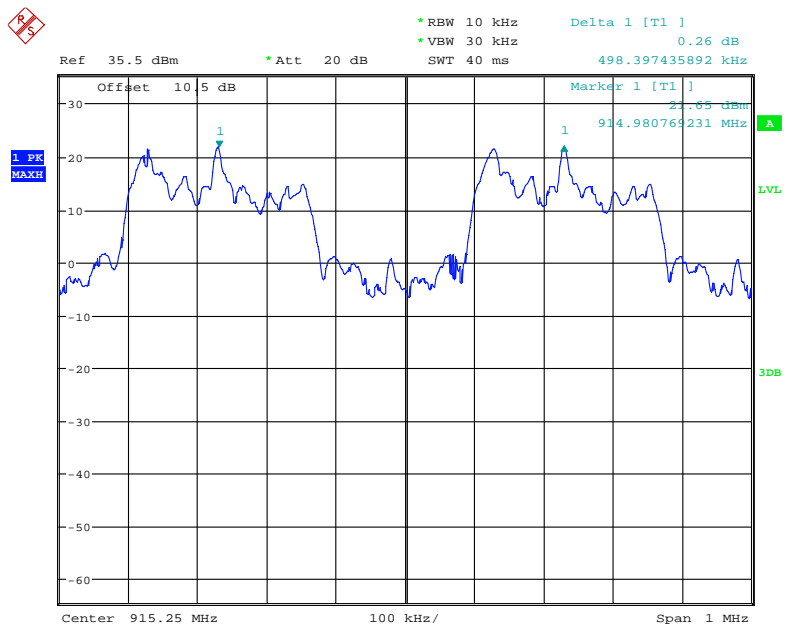

Date: 24.APR.2018 15:50:19

High Channel

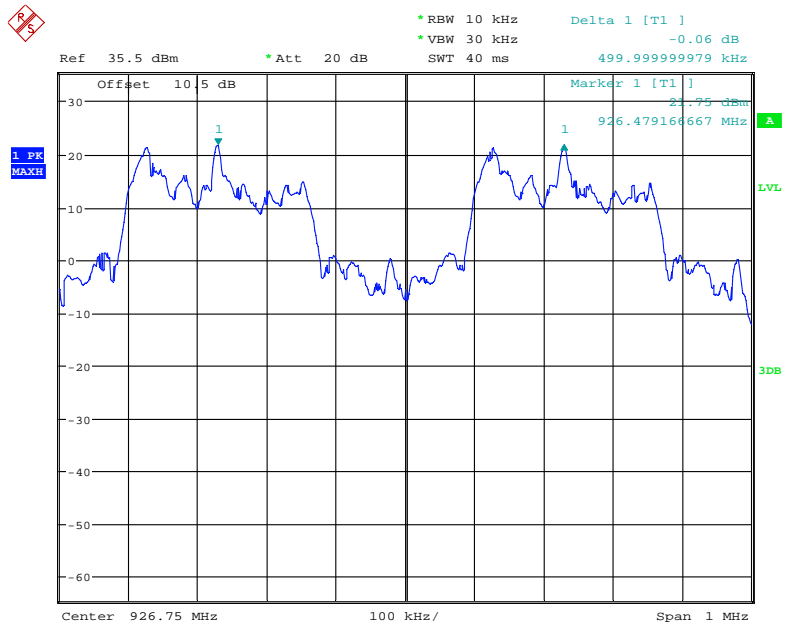

Date: 24.APR.2018 16:01:10

FCC §15.247(a) (1) (i) – 20 dB EMISSION BANDWIDTH

Applicable Standard

According to §15.247(a) (1) (i) For frequency hopping systems operating in the 902-928 MHz band: if the 20 dB bandwidth of the hopping channel is less than 250 kHz, the system shall use at least 50 hopping frequencies and the average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 20 second period; if the 20 dB bandwidth of the hopping channel is 250 kHz or greater, the system shall use at least 25 hopping frequencies and the average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 10 second period. The maximum allowed 20 dB bandwidth of the hopping channel is 500 kHz.

Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
3. Measure the frequency difference of two frequencies that were attenuated 20 dB from the reference level. Record the frequency difference as the emission bandwidth.
4. Repeat above procedures until all frequencies measured were complete.

Test Data

Environmental Conditions

Temperature:	26 °C
Relative Humidity:	51 %
ATM Pressure:	101.0 kPa

The testing was performed by Hill He on 2018-04-24.

EUT operation mode: Transmitting

Test Result: Compliance. Please refer to following table and plots.


Channel	Frequency (MHz)	20 dB Emission Bandwidth (MHz)	Limit (MHz)
Low	903	0.309	0.25-0.5
Middle	915	0.290	0.25-0.5
High	927	0.288	0.25-0.5

Low Channel




Date: 24.APR.2018 14:08:34

Middle Channel

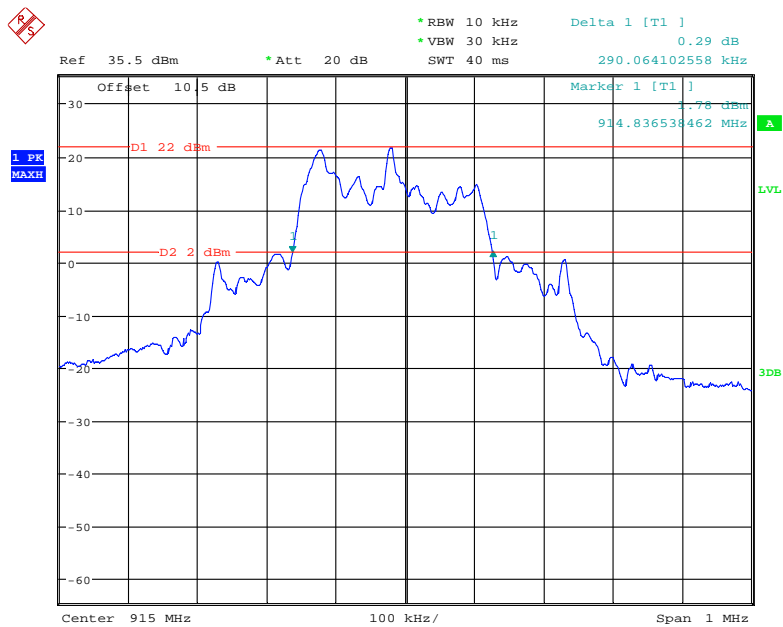

Date: 24.APR.2018 14:10:32

High Channel

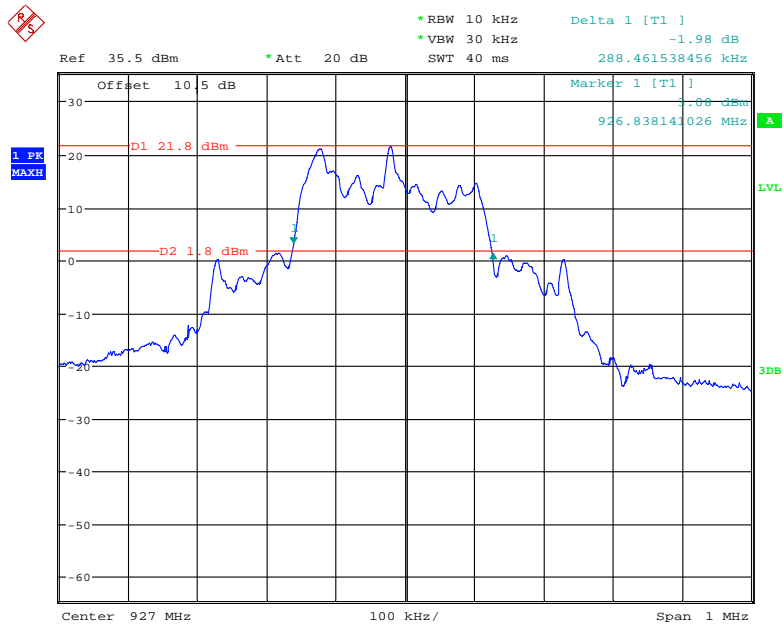

Date: 24.APR.2018 14:12:05

FCC §15.247(a) (1) (i)-QUANTITY OF HOPPING CHANNEL TEST

Applicable Standard

According to §15.247(a) (1) (i) For frequency hopping systems operating in the 902-928 MHz band: if the 20 dB bandwidth of the hopping channel is less than 250 kHz, the system shall use at least 50 hopping frequencies and the average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 20 second period; if the 20 dB bandwidth of the hopping channel is 250 kHz or greater, the system shall use at least 25 hopping frequencies and the average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 10 second period. The maximum allowed 20 dB bandwidth of the hopping channel is 500 kHz.

Test Procedure

1. Check the calibration of the measuring instrument (SA) using either an internal calibrator or a known signal from an external generator.
2. Set the EUT in hopping mode from first channel to last.
3. By using the max-hold function record the quantity of the channel.

Test Data

Environmental Conditions

Temperature:	26 °C
Relative Humidity:	51 %
ATM Pressure:	101.0 kPa


The testing was performed by Hill He on 2018-04-24.

EUT operation mode: Transmitting

Test Result: Compliance. Please refer to following table and plots.

Mode	Frequency Range (MHz)	Number of Hopping Channel (CH)	Limit (CH)
GFSK	903-927	49	25

GFSK: Number of Hopping Channels

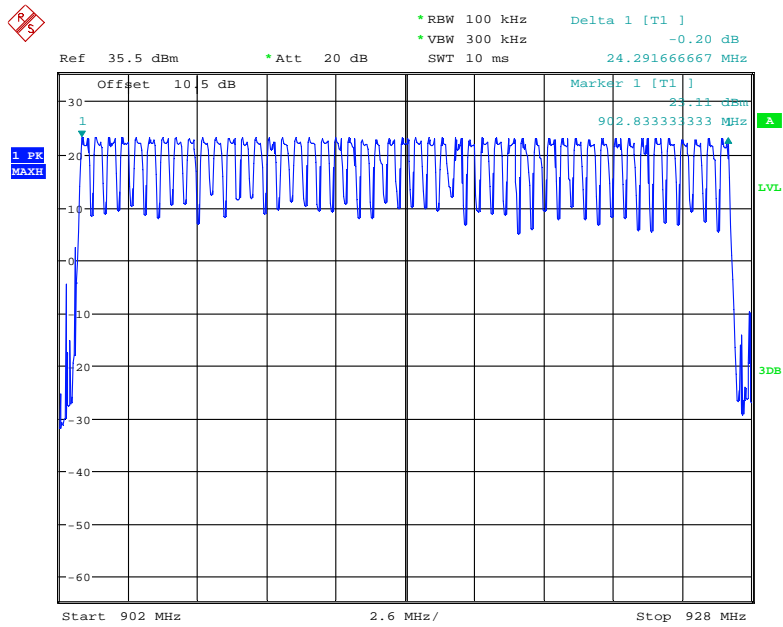

Date: 24.APR.2018 14:19:43

FCC §15.247(a) (1) (i) - TIME OF OCCUPANCY (DWELL TIME)

Applicable Standard

According to §15.247(a) (1) (i) For frequency hopping systems operating in the 902-928 MHz band: if the 20 dB bandwidth of the hopping channel is less than 250 kHz, the system shall use at least 50 hopping frequencies and the average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 20 second period; if the 20 dB bandwidth of the hopping channel is 250 kHz or greater, the system shall use at least 25 hopping frequencies and the average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 10 second period. The maximum allowed 20 dB bandwidth of the hopping channel is 500 kHz.

Test Procedure

The EUT was worked in channel hopping; Spectrum SPAN was set as 0. The quantity of pulse was get from single sweep. In addition, the time of single pulses was tested.

Test Data

Environmental Conditions

Temperature:	21~25 °C
Relative Humidity:	49~52 %
ATM Pressure:	100~101.0 kPa


The testing was performed by Hill He on 2018-04-24 and 2018-05-25.

EUT operation mode: Transmitting


Test Result: Compliance. Please refer to following table and plots.

Mode	Number of hops in the period	Pulse Width (ms)	Dwell Time (S)	Limit (S)	Result
GFSK	21	3.816	0.080136	0.4	PASS
Note: Pulse time = 1.272*3=3.816ms Dwell time = Pulse time*(Number of hops in the period) = 3.816*21=80.136ms					

Pulse time

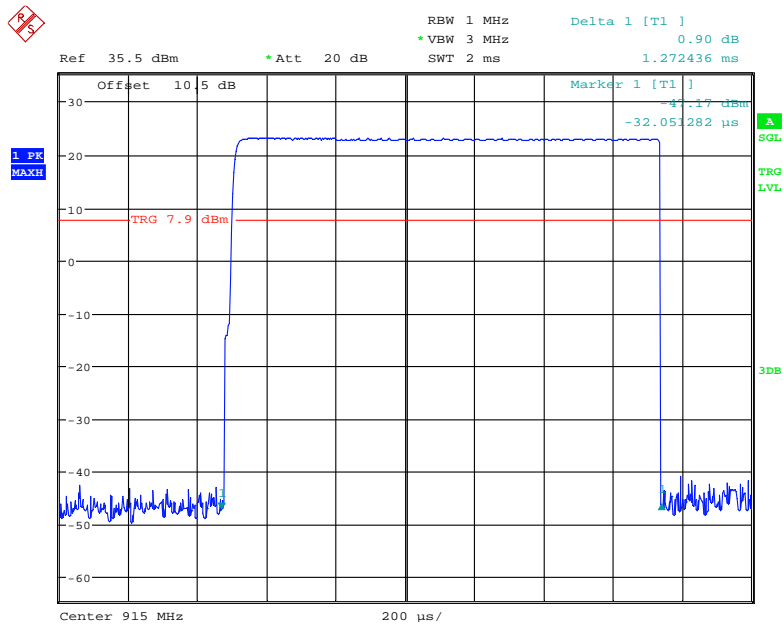


Date: 24.APR.2018 14:26:09

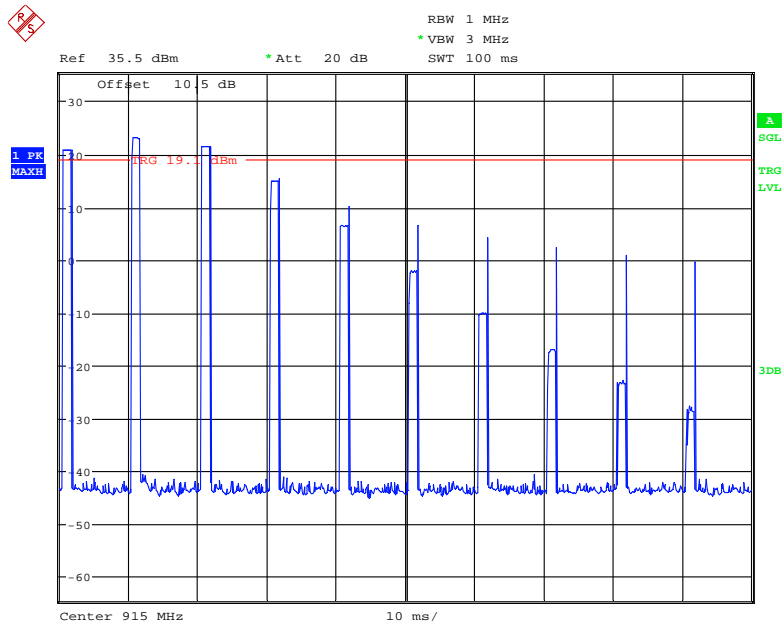

Date: 24.APR.2018 14:29:10

Number of hops on spectrum analyzer

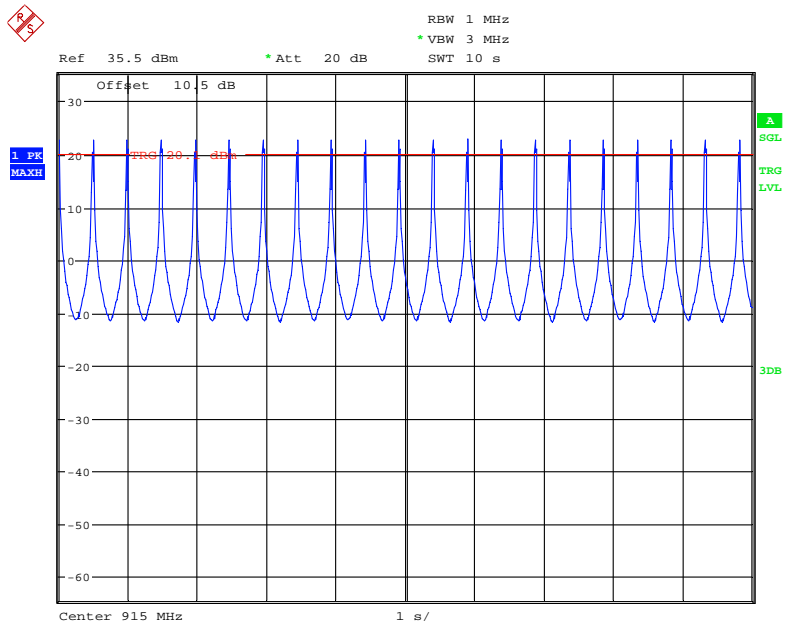

Date: 25.MAY.2018 14:57:15


FCC §15.247(b) (2) - MAXIMUM CONDUCTED OUTPUT POWER

Applicable Standard

According to FCC §15.247(b) (2), For frequency hopping systems operating in the 902-928 MHz band: 1 watt for systems employing at least 50 hopping channels; and, 0.25 watts for systems employing less than 50 hopping channels, but at least 25 hopping channels, as permitted under paragraph (a)(1)(i) of this section.

Test Procedure

1. Place the EUT on a bench and set it in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to one test equipment.
3. Add a correction factor to the display.



Test Data

Environmental Conditions

Temperature:	26 °C
Relative Humidity:	51 %
ATM Pressure:	101.0 kPa

The testing was performed by Hill He on 2018-04-24.

Test Result: Compliance. Please refer to following table.

EUT operation mode: Transmitting

Channel	Frequency (MHz)	Peak Output Power (dBm)	Peak Output Power (mW)	Limit (mW)
Low	903	23.32	214.783	250
Middle	915	23.20	208.930	250
High	927	23.03	200.909	250


FCC §15.247(d) – 100 kHz BANDWIDTH OF FREQUENCY BAND EDGE

Applicable Standard

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
3. Set RBW to 100 kHz and VBW of spectrum analyzer to 300 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.



Test Data

Environmental Conditions


Temperature:	26 °C
Relative Humidity:	51 %
ATM Pressure:	101.0 kPa

The testing was performed by Hill He on 2018-04-24 and 2018-04-26.

Test Result: Compliance. Please refer to following plots.


EUT operation mode: Transmitting

Band Edge, Left Side

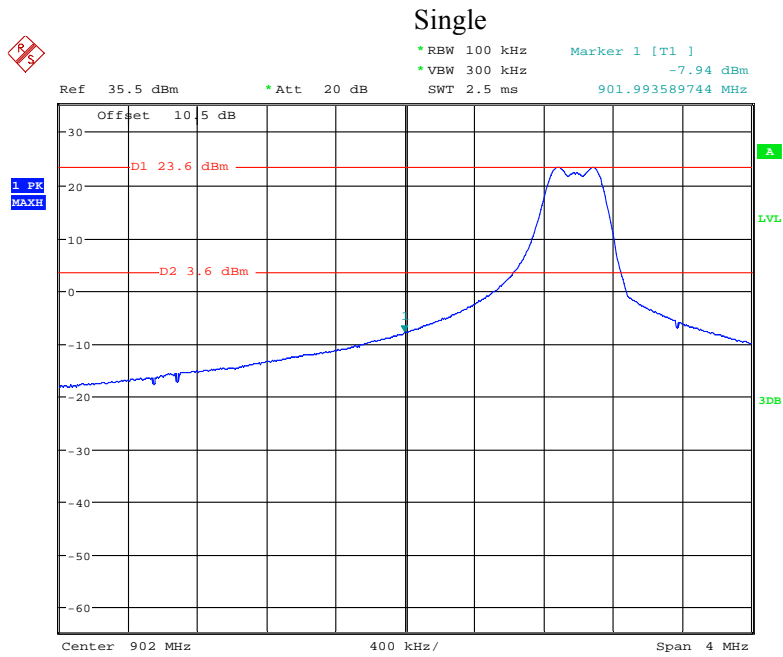


Date: 24.APR.2018 16:10:18

Hopping

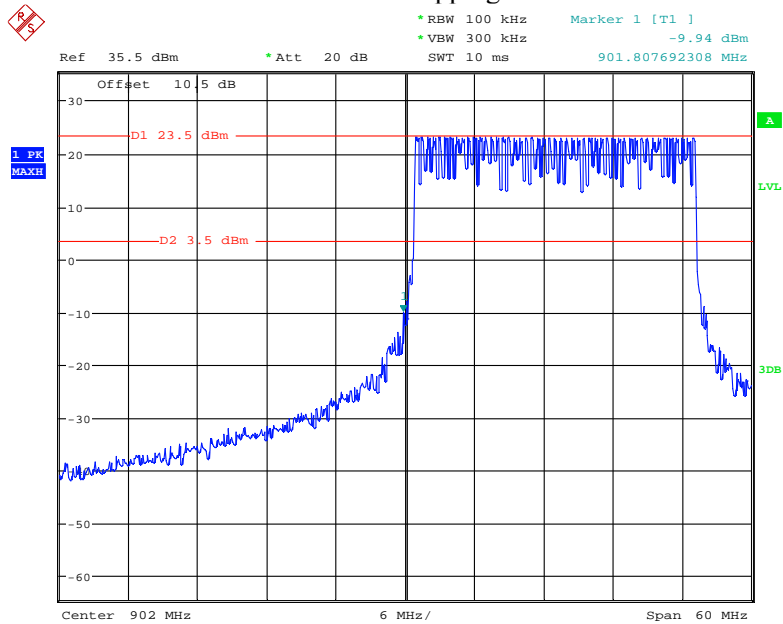


Date: 26.APR.2018 13:39:15

Band Edge, Right Side

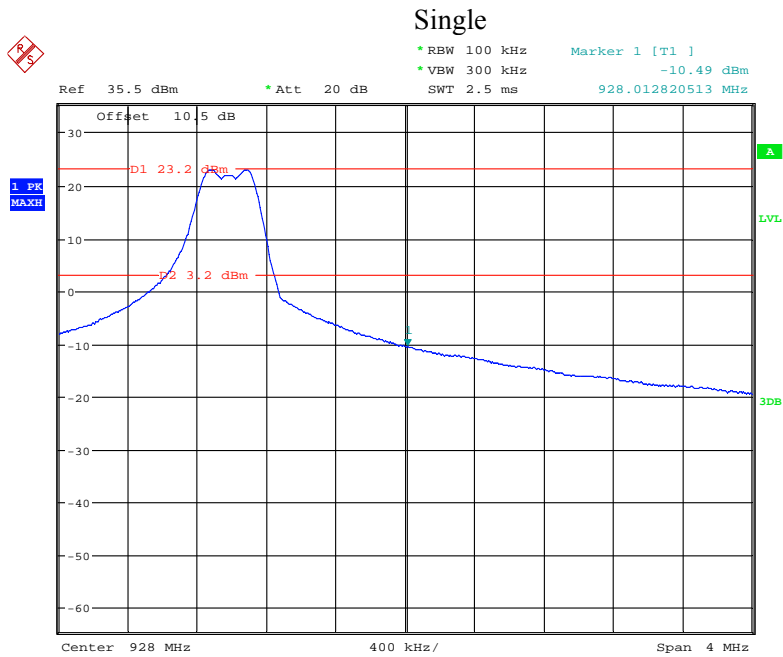

Date: 24.APR.2018 16:18:19

Hopping

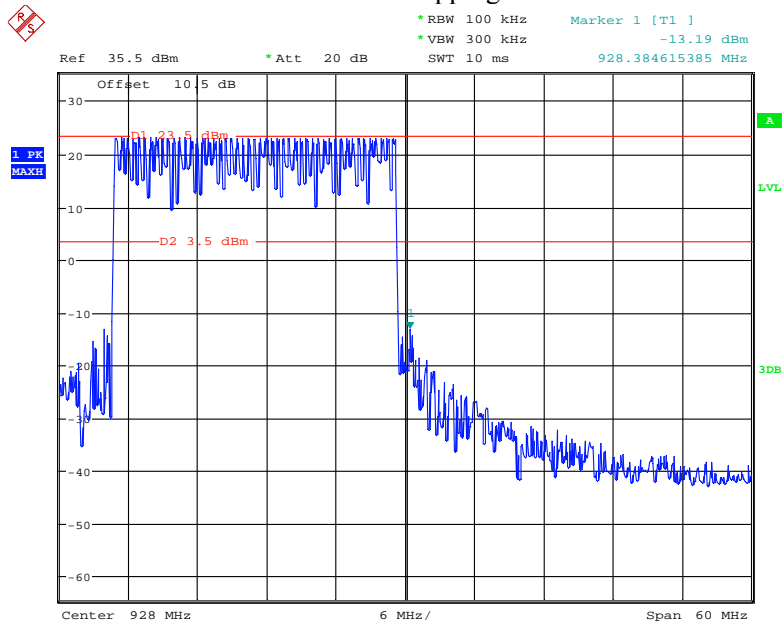

Date: 26.APR.2018 13:41:58

***** END OF REPORT *****