

Technical Information

APPLICANT		MANUFACTURER	
Name:	X10 (USA), Inc.	Name:	X-10 Electronics (Shenzhen) Co. Ltd.
Address:	Blackriver Corporate Park	Together Rich Industrial Park B	
	620 Naches Ave SW, Building A	Sanwei Industrial District,	
City, State, Zip:		Xixiang Town	
		Baoan County,	
		Shenzhen, China	

Test Specification: FCC Rules and Regulations Part 15, Subpart C, Para. 15.231

Test Procedure: ANSI C63.4:2003

Test Sample Description

Test Sample: 433.8 MHz Pulsed Transmitter

Brandname(s): X10 (USA)

Model Number: VR50A

FCC ID: B4SVR50A

Type: Pulsed Transmitter

Power Requirements: 6 VDC derived from external AC Adapter

Frequency of Operation: 433.8 MHz

Applicable Rule Section: Part 15, Subpart C, Section 15.231

Tests Performed

Para. 15.207(a), Conducted Emissions

Para. 15.231(a), Radiated Emissions, Fundamental and Harmonics

Para. 15.231(b), Radiated Emissions, Spurious Case

Para. 15.231(b), Duty Cycle Determination

Para. 15.231(c), Occupied Bandwidth

Test Results

- 15.207(a): The radio frequency voltage that was conducted back on to the AC power line on any frequency/frequencies within the bandwidth of 150 kHz to 30 MHz did not exceed Class B limits as specified in CISPR 22.
- 15.231 (a): This device transmits a control signal and is used as an: remote control transmitter.
- 15.231 (a)(1) The transmitter is manually operated. Transmission ends within 5 seconds of deactivation.
- 15.231 (a)(3): The transmitter does not perform periodic transmissions or the transmitter performs periodic transmissions at predetermined intervals greater than 1 hour apart and are shorter than 1 second in duration.
- 15.231 (b): The fundamental field strength did not exceed 10991.7 $\mu\text{V/M}$ (Average) at a test distance of 3 meters. In addition, the requirements of section 15.35 for averaging pulsed emissions and for limiting peak emissions were met. The field strength of harmonic and spurious emissions did not exceed 1099.1 $\mu\text{V/M}$ (AVERAGE).
- 15.231 (c) The Bandwidth of the emission was no wider than 0.25% of the center frequency (233.0 kHz) as measured 20 db down from the modulated carrier.

Determination of Field Strength Limits

The field strength limits shown below are found in Section 15.231:

Frequency		Limit	
F1 =	260	3750 =	L1
Fo =	<u>433.8 MHz</u>		Lo
F2 =	470	12500 =	L2

The formula below was utilized to determine the limits:

$$\text{Limit} = L1 + [(Fo-F1)(L2-L1)/(F2-F1)]$$

Solving Yields

$$\text{Fundamental Limit} = \underline{10991.7} \text{ } \mu\text{V/M (AVERAGE) @ 3 Meters}$$

$$\text{Harmonic Limit} = \underline{1099.7} \text{ } \mu\text{V/M (AVERAGE) @ 3 Meters}$$

Duty Cycle Determination

The unit's RF output was directly coupled to the input of the spectrum analyzer. The analyzer was set for a frequency span of 0 Hz. The sweep time was then adjusted in order to display one full pulse train. The transmitter on time was then summed and compared to the time for one full cycle in order to obtain the duty cycle. (See plots for additional information.)

$$\text{Transmitter On Time} = \underline{27.32} \text{ milliseconds (maximum per cycle)}$$

$$\text{Transmitter Cycle Time} = \underline{102.0} \text{ milliseconds (100 ms maximum)}$$

$$\text{Transmitter Duty Cycle} = \underline{27.0} \%$$

Calculation

$$\underline{33.0} \times \underline{560} \text{ } \mu\text{s (small pulse)} = \underline{18.84} \text{ milliseconds}$$

$$\underline{8.84} + \underline{18.84} = \underline{27.32} \text{ milliseconds}$$

$$\text{Duty Cycle (27.32/100)} = \underline{0.27} \%$$

$$\text{Correction Factor} = 20 \log \underline{(0.27)} = \underline{-11.3} \text{ dB}$$

Spectrum Analyzer Desensitization Considerations


Due to the nature of the emissions being measured, care was taken to ensure that the resolution bandwidth of the spectrum analyzer was adequate to provide accurate measurements. The following formula was utilized: $\text{minimum bandwidth} = 1 / \{\text{minimum pulse width (in seconds)} \times 1.5\} = \text{Hz}$. Setting pulse desensitization equal to zero and utilizing the minimum observed pulse width of 560 μs yields a minimum required bandwidth of 1190 Hz. FCC specified bandwidths of 100 kHz and 1 MHz were utilized below and above 1 GHz, respectively.

General Notes

1. All readings were taken utilizing a peak detector function at a test distance of 3 meters.
2. The duty cycle was applied to the peak readings in order to determine the average value of the emissions.
3. The frequency range was scanned from 30 MHz to 4.3 GHz. All emissions not reported were more than 20 dB below the specified limit.
4. The device was tested with the following accessories:
 - AC Switching power supply model: S002CU0720020
 - 1 S-Video cable, 1.5 meters long
 - Panasonic VCR, Model: PV-V4020

Certification and Signatures

We certify that this report is a true representation of the results obtained from the tests of the equipment stated. We further certify that the measurements shown in this report were made in accordance with the procedures indicated and vouch for the qualifications of all Retlif Testing Laboratories personnel taking them.

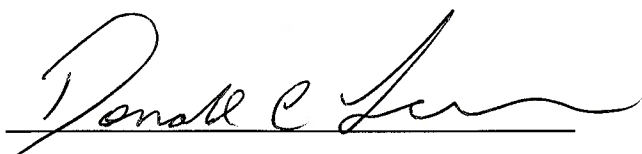A handwritten signature in black ink, appearing to read "Donald C. Lerner", written over a horizontal line.

Donald C. Lerner
EMC Test Engineer

A handwritten signature in black ink, appearing to read "Nicholas Dragotta", written over a horizontal line.

Nicholas Dragotta
EMC Laboratory Supervisor

Non-Warranty Provision

The testing services have been performed, findings obtained and reports prepared in accordance with generally accepted laboratory principles and practices. This warranty is in lieu of all others, either expressed or implied.

Non-Endorsement

This test report contains only findings and results arrived at after employing the specific test procedures and standards listed herein. It is not intended to constitute a recommendation, endorsement or certification of the product or material tested. This test report must not be used by the client to claim product endorsement by NVLAP or any agency of the U.S. Government.

Equipment List

FCC Part 15, Subpart B, Conducted Emissions, 150 kHz to 30 MHz

EN	Type	Manufacturer	Description	Model No.	Cal Date	Due
078	LISN	Solar Electronics	10 kHz - 30 MHz	8028-50-TS24BNC	7/5/2007	7/5/2008
079	LISN	Solar Electronics	10 kHz - 30 MHz	8028-50-TS24BNC	7/5/2007	7/5/2008
333	Attenuator	Narda	DC - 11 GHz	768-10	8/10/2007	8/10/2008
456	LISN	Solar Electronics	DC - 60 Hz	9409-50-R-24	12/4/2006	12/4/2007
7016	EMC Analyzer	Hewlett Packard	9kHz - 1.8GHz	8591EM	7/25/2007	7/25/2008
762	AM/FM Signal Generator	Marconi Instru.	10 kHz - 1.2 GHz	2023	7/24/2007	7/24/2008

FCC Part 15 Subpart C, Radiated Emissions, Fundamental and Harmonics

EN	Type	Manufacturer	Description	Model No.	Cal Date	Due Date
067	Open Area Test Site	Retlif	3/10 Meter	RNY	9/12/2006	9/12/2009
128	Double Ridged Guide	Electro-Mechanics	1 GHz - 18 GHz	3105	3/27/2007	3/27/2008
133	Broadband Pre-Amplifier	Electro-Metrics	10 kHz - 1 GHz, 26dB	BPA-1000	6/27/2007	6/27/2008
141	Spectrum Analyzer	Hewlett Packard	100 Hz - 40 GHz	8566B	4/27/2007	4/27/2008
141A	Graphics Plotter	Hewlett Packard	N/A	7470A	3/12/2007	3/12/2008
206B	6.0 dB Attenuator	Texscan	0 - 1.0 GHz	FP-50 - 6 dB	6/27/2007	6/27/2008
512	Graphics Plotter	Hewlett Packard	N/A	7470A	10/18/2006	10/18/2007
543	Preamplifier	Hewlett Packard	1.0 GHz - 26.5 GHz	8449B	9/9/2005	9/21/2007
723	H.P. Filter	Mini-Circuits	1 GHz	BHP-1000	8/13/2007	8/13/2008
767	Biconilog	EMCO	26 - 2000 MHz	3142B	10/12/2006	10/12/2007


FCC Part 15, Subpart C, Duty Cycle Determination and Occupied Bandwidth

EN	Type	Manufacturer	Description	Model No.	Cal Date	Due Date
067	Open Area Test Site	Retlif	3/10 Meter	RNY	9/12/2006	9/12/2009
141	Spectrum Analyzer	Hewlett Packard	100 Hz - 40 GHz	8566B	4/27/2007	4/27/2008
141A	Graphics Plotter	Hewlett Packard	N/A	7470A	3/12/2007	3/12/2008
512	Graphics Plotter	Hewlett Packard	N/A	7470A	10/18/2006	10/18/2007

**FCC Part 15, Subpart C, Section 15.207(a), Conducted Emissions, Power Leads,
150 kHz to 30 MHz
Test Data
Transmit Mode**


FCC Part 15 Subpart C, Conducted Emissions, 150 kHz to 30 MHz.

Customer: X10 (USA), Inc.
Test Sample: 5.8 GHz Wireless Audio/Video Receiver
Model Number: VR50A
FCC ID.: B4SVR50A
Test Specification: FCC Part 15 Subpart C, 15.207(a)
Mode of Operation: Continuously transmitting a pulsed 433.8 MHz signal (channel A).
Lead Tested: 120 VAC / 60 Hz hot input to AC adapter.
Technician: M. Kubik
Date: September 10, 2007.
Detector / Note: Peak / Peak emissions passed Quasi-peak limit. Average detector required.
Detector / Note: Average / Average emissions passed average limit.

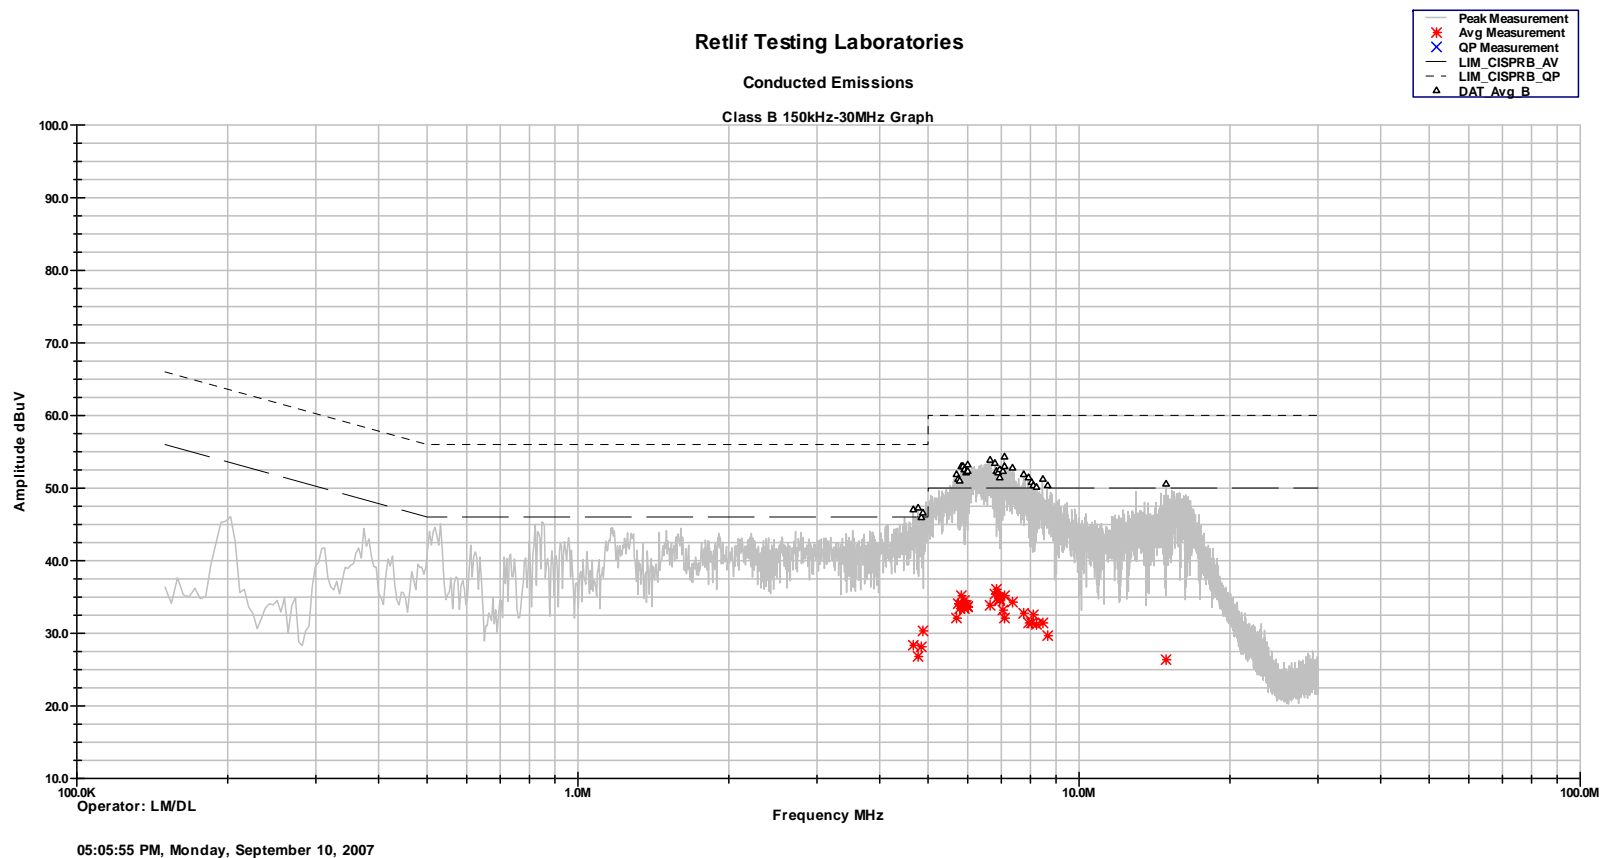

FCC Part 15 Subpart C, Conducted Emissions, 150 kHz to 30 MHz.

Customer: X10 (USA), Inc.
Test Sample: 5.8 GHz Wireless Audio/Video Receiver
Model Number: VR50A
FCC ID.: B4SVR50A
Test Specification: FCC Part 15 Subpart C, 15.207(a)
Mode of Operation: Continuously transmitting a pulsed 433.8 MHz signal (channel A).
Lead Tested: 120 VAC / 60 Hz neutral input to AC adapter.
Technician: M. Kubik
Date: September 10, 2007.
Detector / Note: Peak / Peak emissions passed Quasi-peak limit. Average detector required.
Detector / Note: Average / Average emissions passed average limit.

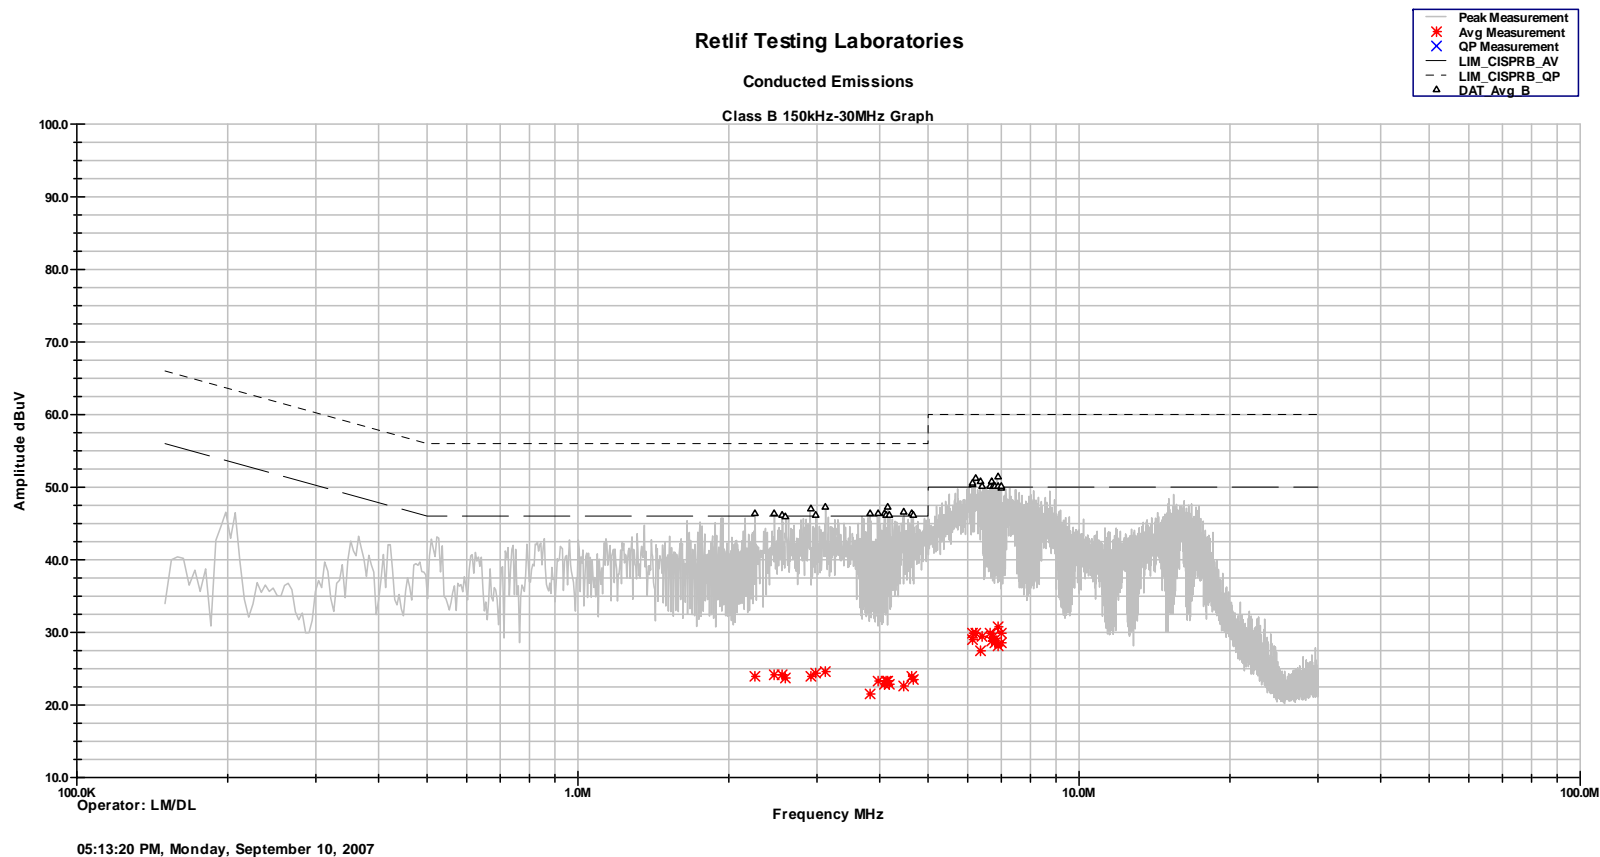

**FCC Part 15, Subpart C, Section 15.207(a), Radiated Emissions, Spurious Case
Test Data**

Test Method:	FCC Part 15 Subpart C, Radiated Emissions, Fundamental & Harmonic						
Customer:	X-10 (USA), Inc.				Job No.	R-12106-3	
Test Sample:	5.8 GHz Wireless Audio / Video Receiver.						
Model No.:	VR50A				FCC ID:	B4SVR50A	
Operating	Continuously transmitting a Pulsed 433.8 MHz signal.						
Technician:	R. Soodoo				Date:	September 11, 2007.	
Notes:	Test Distance: 3 Meters Detector: Peak, Unless otherwise specified						
Test Freq.	Antenna Pol./Height	EUT Orientation	Meter Reading	Correction Factor	Corrected Reading	Converted Reading	Peak Limit
MHz	(V/H)/Meters	X / Y / Z	dBµV	dB	dBµV/m	uV/m	uV/m
433.8	V / 1.0	X	84.7	-0.2	84.5	16788.0	109917.
	V / 1.0	Y	84.5	-0.2	84.3	16405.9	
	V / 1.0	Z	85.8	-0.2	85.6	19054.6	
	H / 1.0	X	83.4	-0.2	83.2	14454.4	
	H / 1.0	Y	83.2	-0.2	83.0	14125.4	
433.8	H / 1.3	Z	83.4	-0.2	83.2	14454.4	109917.
867.6	V / 2.6	X	34.2	8.5	42.7	136.5	10991.7
	V / 1.0	Y	31.8	8.5	40.3	103.5	
	V / 1.4	Z	35.3	8.5	43.8	154.9	
	H / 1.0	X	41.2	8.5	49.7	305.5	
	H / 1.0	Y	39.2	8.5	47.7	242.7	
867.6	H / 1.0	Z	39.5	8.5	48.0	251.2	10991.7
1301.4	V / 1.0	X	43.6	1.5	45.1	179.9	5000.0
	V / 1.0	Y	44.2	1.5	45.7	192.8	
	V / 1.0	Z	37.0	1.5	38.5	84.1	
	H / 1.0	X	43.6	1.5	45.1	179.9	
	H / 1.0	Y	43.8	1.5	45.3	184.1	
1301.4	H / 1.0	Z	41.7	1.5	43.2	*144.5	5000.0
1735.2	V / 1.0	X	41.7	2.1	43.8	*154.9	10991.7
	V / 1.0	Y	41.7	2.1	43.8	*154.9	
	V / 1.0	Z	41.7	2.1	43.8	*154.9	
	H / 1.0	X	41.7	2.1	43.8	*154.9	
	H / 1.0	Y	41.7	2.1	43.8	*154.9	
1735.2	H / 1.0	Z	41.7	2.1	43.8	*154.9	10991.7
2169.0	V / 1.0	X	41.7	4.0	45.7	*192.8	10991.7
	V / 1.0	Y	41.7	4.0	45.7	*192.8	
	V / 1.0	Z	41.7	4.0	45.7	*192.8	
	H / 1.0	X	41.7	4.0	45.7	*192.8	
	H / 1.0	Y	41.7	4.0	45.7	*192.8	
2169.0	H / 1.0	Z	41.7	4.0	45.7	*192.8	10991.7
	The frequency range was scanned from 30 MHz to 4.34 GHz. All emissions not recorded were more than 20 dB below the specified limit. Emissions from the EUT do not exceed the specified limits.						
	*= Noise Floor Measurements (minimum sensitivity).						

Test Method:	FCC Part 15 Subpart C. Radiated Emissions. Fundamental & Harmonic						
Customer:	X-10 (USA), Inc.				Job No.	R-12106-3	
Test Sample:	5.8 GHz Wireless Audio / Video Receiver.						
Model No.:	VR50A				FCC ID:	B4SVR50A	
Operating	Continuously transmitting a Pulsed 433.8 MHz signal.						
Technician:	R. Soodoo				Date:	September 11, 2007.	
Notes:	Test Distance: 3 Meters Detector: Peak, unless otherwise specified						
Test Freq.	Antenna Pol./Height	EUT Orientation	Meter Reading	Correction Factor	Corrected Reading	Converted Reading	Peak Limit
MHz	(V/H)-Meters	X / Y / Z	dBμV	dB	dBμV/m	uV/m	uV/m
2602.8	V / 1.0	X	42.8	5.0	47.8	*245.5	10991.7
	V / 1.0	Y	42.8	5.0	47.8	*245.5	
	V / 1.0	Z	42.8	5.0	47.8	*245.5	
	H / 1.0	X	42.8	5.0	47.8	*245.5	
	H / 1.0	Y	42.8	5.0	47.8	*245.5	
2602.8	H / 1.0	Z	42.8	5.0	47.8	*245.5	10991.7
3036.6	V / 1.0	X	42.8	7.2	50.0	*316.2	10991.7
	V / 1.0	Y	42.8	7.2	50.0	*316.2	
	V / 1.0	Z	42.8	7.2	50.0	*316.2	
	H / 1.0	X	42.8	7.2	50.0	*316.2	
	H / 1.0	Y	42.8	7.2	50.0	*316.2	
3036.6	H / 1.0	Z	42.8	7.2	50.0	*316.2	10991.7
3470.4	V / 1.0	X	41.6	9.6	51.2	*363.1	10991.7
	V / 1.0	Y	41.6	9.6	51.2	*363.1	
	V / 1.0	Z	41.6	9.6	51.2	*363.1	
	H / 1.0	X	41.6	9.6	51.2	*363.1	
	H / 1.0	Y	41.6	9.6	51.2	*363.1	
3470.4	H / 1.0	Z	41.6	9.6	51.2	*363.1	10991.7
3904.2	V / 1.0	X	41.6	12.8	54.4	*524.8	5000.0
	V / 1.0	Y	41.6	12.8	54.4	*524.8	
	V / 1.0	Z	41.6	12.8	54.4	*524.8	
	H / 1.0	X	41.6	12.8	54.4	*524.8	
	H / 1.0	Y	41.6	12.8	54.4	*524.8	
3904.2	H / 1.0	Z	41.6	12.8	54.4	*524.8	5000.0
4338.0	V / 1.0	X	41.6	13.2	54.8	*549.5	5000.0
	V / 1.0	Y	41.6	13.2	54.8	*549.5	
	V / 1.0	Z	41.6	13.2	54.8	*549.5	
	H / 1.0	X	41.6	13.2	54.8	*549.5	
	H / 1.0	Y	41.6	13.2	54.8	*549.5	
4338.0	H / 1.0	Z	41.6	13.2	54.8	*549.5	5000.0
	The frequency range was scanned from 30 MHz to 4.34 GHz. All emissions not recorded were more than 20 dB below the specified limit. Emissions from the EUT do not exceed the specified limits.						
	*=Noise Floor Measurements (Minimum system sensitivity)						


Test Method:	FCC Part 15 Subpart C. Radiated Emissions. Fundamental & Harmonic						
Customer:	X-10 (USA), Inc.				Job No.	R-12106-3	
Test Sample:	5.8 GHz Wireless Audio / Video Receiver.						
Model No.:	VR50A				FCC ID:	B4SVR50A	
Operating	Continuously transmitting a Pulsed 433.8 MHz signal.						
Technician:	R. Soodoo				Date:	September 11, 2007.	
Notes:	Test Distance: 3 Meters Detector: Peak, unless otherwise specified				Duty Cycle: 27% Duty Cycle Correction: -11.3 dB		
Test Freq.	Antenna Pol./Height	EUT Orientation	Peak Reading	Correction Factor	Corrected Reading	Converted Reading	Avg. Limit
MHz	(V/H)-Meters	X / Y / Z	dBμV	dB	dBμV/m	uV/m	uV/m
433.8	V / 1.0	X	84.5	-11.3	73.2	4570.9	10991.7
	V / 1.0	Y	84.3	-11.3	73.0	4466.8	
	V / 1.0	Z	85.6	-11.3	74.3	5188.0	
	H / 1.0	X	83.2	-11.3	71.9	3935.5	
	H / 1.0	Y	83.0	-11.3	71.7	3845.9	
433.8	H / 1.3	Z	83.2	-11.3	71.9	3935.5	10991.7
867.6	V / 2.6	X	42.7	-11.3	31.4	37.2	1099.1
	V / 1.0	Y	40.3	-11.3	29.0	28.2	
	V / 1.4	Z	43.8	-11.3	32.5	42.2	
	H / 1.0	X	49.7	-11.3	38.4	83.2	
	H / 1.0	Y	47.7	-11.3	36.4	66.1	
867.6	H / 1.0	Z	48.0	-11.3	36.7	68.4	1099.1
1301.4	V / 1.0	X	45.1	-11.3	33.8	49.0	500.0
	V / 1.0	Y	45.7	-11.3	34.4	52.5	
	V / 1.0	Z	38.5	-11.3	27.2	22.9	
	H / 1.0	X	45.1	-11.3	33.8	49.0	
	H / 1.0	Y	45.3	-11.3	34.0	50.1	
1301.4	H / 1.0	Z	43.2	-11.3	31.9	*39.4	500.0
1735.2	V / 1.0	X	43.8	-11.3	32.5	*42.2	1099.1
	V / 1.0	Y	43.8	-11.3	32.5	*42.2	
	V / 1.0	Z	43.8	-11.3	32.5	*42.2	
	H / 1.0	X	43.8	-11.3	32.5	*42.2	
	H / 1.0	Y	43.8	-11.3	32.5	*42.2	
1735.2	H / 1.0	Z	43.8	-11.3	32.5	*42.2	1099.1
2169.0	V / 1.0	X	45.7	-11.3	34.4	*52.5	1099.1
	V / 1.0	Y	45.7	-11.3	34.4	*52.5	
	V / 1.0	Z	45.7	-11.3	34.4	*52.5	
	H / 1.0	X	45.7	-11.3	34.4	*52.5	
	H / 1.0	Y	45.7	-11.3	34.4	*52.5	
2169.0	H / 1.0	Z	45.7	-11.3	34.4	*52.5	1099.1
	The frequency range was scanned from 30 MHz to 4.34 GHz. All emissions not recorded were more Than 20 dB below the specified limit. Emissions from the EUT do not exceed the specified limits.						
	*=Noise Floor Measurements (Minimum system sensitivity)						

Test Method:	FCC Part 15 Subpart C. Radiated Emissions. Fundamental & Harmonic						
Customer:	X-10 (USA), Inc.				Job No.	R-12106-3	
Test Sample:	5.8 GHz Wireless Audio / Video Receiver.						
Model No.:	VR50A				FCC ID:	B4SVR50A	
Operating	Continuously transmitting a Pulsed 433.8 MHz signal.						
Technician:	R. Soodoo				Date:	September 11, 2007.	
Notes:	Test Distance: 3 Meters Detector: Peak, unless otherwise specified				Duty Cycle: 27% Duty Cycle Correction: -11.3 dB		
Test Freq.	Antenna Pol./Height	EUT Orientation	Peak Reading	Correction Factor	Corrected Reading	Converted Reading	Avg. Limit
MHz	(V/H)-Meters	X / Y / Z	dBμV	dB	dBμV/m	uV/m	uV/m
2602.8	V / 1.0	X	47.8	-11.3	36.5	*66.8	1099.1
	V / 1.0	Y	47.8	-11.3	36.5	*66.8	
	V / 1.0	Z	47.8	-11.3	36.5	*66.8	
	H / 1.0	X	47.8	-11.3	36.5	*66.8	
	H / 1.0	Y	47.8	-11.3	36.5	*66.8	
2602.8	H / 1.0	Z	47.8	-11.3	36.5	*66.8	1099.1
3036.6	V / 1.0	X	50.0	-11.3	38.7	*86.1	1099.1
	V / 1.0	Y	50.0	-11.3	38.7	*86.1	
	V / 1.0	Z	50.0	-11.3	38.7	*86.1	
	H / 1.0	X	50.0	-11.3	38.7	*86.1	
	H / 1.0	Y	50.0	-11.3	38.7	*86.1	
3036.6	H / 1.0	Z	50.0	-11.3	38.7	*86.1	1099.1
3470.4	V / 1.0	X	51.2	-11.3	39.9	*98.9	1099.1
	V / 1.0	Y	51.2	-11.3	39.9	*98.9	
	V / 1.0	Z	51.2	-11.3	39.9	*98.9	
	H / 1.0	X	51.2	-11.3	39.9	*98.9	
	H / 1.0	Y	51.2	-11.3	39.9	*98.9	
3470.4	H / 1.0	Z	51.2	-11.3	39.9	*98.9	1099.1
3904.2	V / 1.0	X	54.4	-11.3	43.1	*142.9	500.0
	V / 1.0	Y	54.4	-11.3	43.1	*142.9	
	V / 1.0	Z	54.4	-11.3	43.1	*142.9	
	H / 1.0	X	54.4	-11.3	43.1	*142.9	
	H / 1.0	Y	54.4	-11.3	43.1	*142.9	
3904.2	H / 1.0	Z	54.4	-11.3	43.1	*142.9	500.0
4338.0	V / 1.0	X	54.8	-11.3	43.5	*149.6	500.0
	V / 1.0	Y	54.8	-11.3	43.5	*149.6	
	V / 1.0	Z	54.8	-11.3	43.5	*149.6	
	H / 1.0	X	54.8	-11.3	43.5	*149.6	
	H / 1.0	Y	54.8	-11.3	43.5	*149.6	
4338.0	H / 1.0	Z	54.8	-11.3	43.5	*149.6	500.0
	The frequency range was scanned from 30 MHz to 4.34 GHz. All emissions not recorded were more						
	Than 20 dB below the specified limit. Emissions from the EUT do not exceed the specified limits.						
	*=Noise Floor Measurements (Minimum system sensitivity)						

**FCC Part 15, Subpart C, Radiated Emissions Spurious Case, 30 MHz to 4.34 GHz,
Paragraph 15.231(b)
Test Data**

Test Method:	FCC Part 15, Subpart C, Radiated Emissions Spurious Case, 30 MHz to 1 GHz, Para:15.23(b)						
Customer:	X-10 (USA), Inc.				Job No.:	R-12106-3	
Test Sample:	5.8 GHz Wireless Audio / Video Receiver.						
Model No.:	VR50A				FCC ID:	B4SVR50A	
Operating Mode:	Continuously transmitting a Pulsed 433.8 MHz signal.						
Technician:	R. Soodoo				Date:	September 11, 2007.	
Notes:	Test Distance: 3 Meters Temp: 22.8°C Humidity: 86% Detector: Quasi-Peak Below 1 GHz, Peak above 1 GHz						
Frequency	Antenna Position	EUT Orientation	Meter Readings	Correction Factor	Corrected Reading	Converted Reading	Limit
MHz	(V/H) / Meters	Degrees	dBuV	dB	dBuV/m	uV/m	uV/m
30.00							100
88.00							100
88.00							150
No emissions observed at the specified test distance							
216.0							150
216.0							200
960.00							200
960.00							500
4340.0							500
The frequency range was scanned from 30 MHz to 4.34 GHz.							
The emissions observed from the EUT do not exceed the specified limits.							
Emissions not recorded were more than 20dB under the specified limit.							

**FCC Part 15.35, Duty Cycle Determination
Test Data**

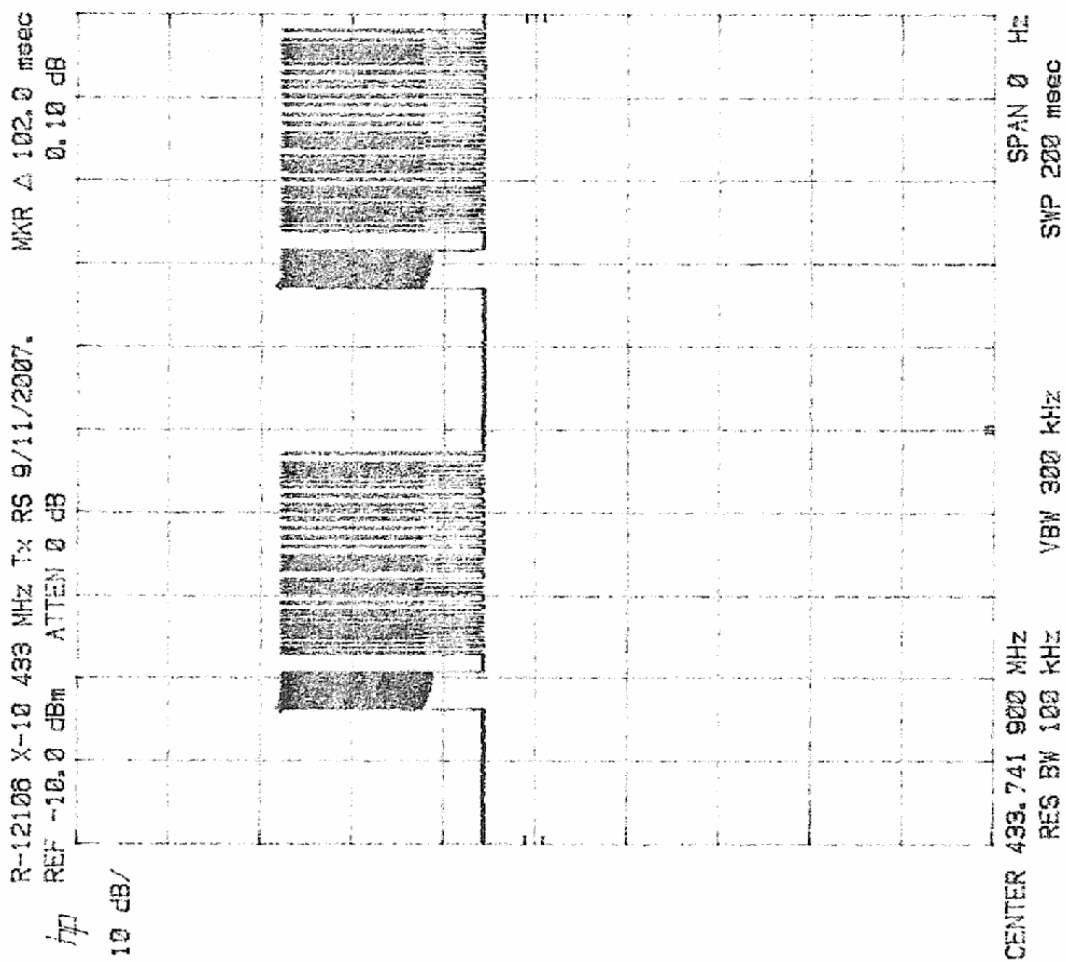


Test Method: FCC Part 15.35, Duty Cycle Determination.

Notes: Measurement of cycle time = 102.0mSec.

FCC ID.: B4SVR50A

Customer	X-10 (USA), Inc.	
Test Sample	5.8 GHz Wireless Audio / Video Receiver.	
Model No.:	VR50A	
Date: 9-11-2007.	Tech: R.S.	Sheet 1 of 4

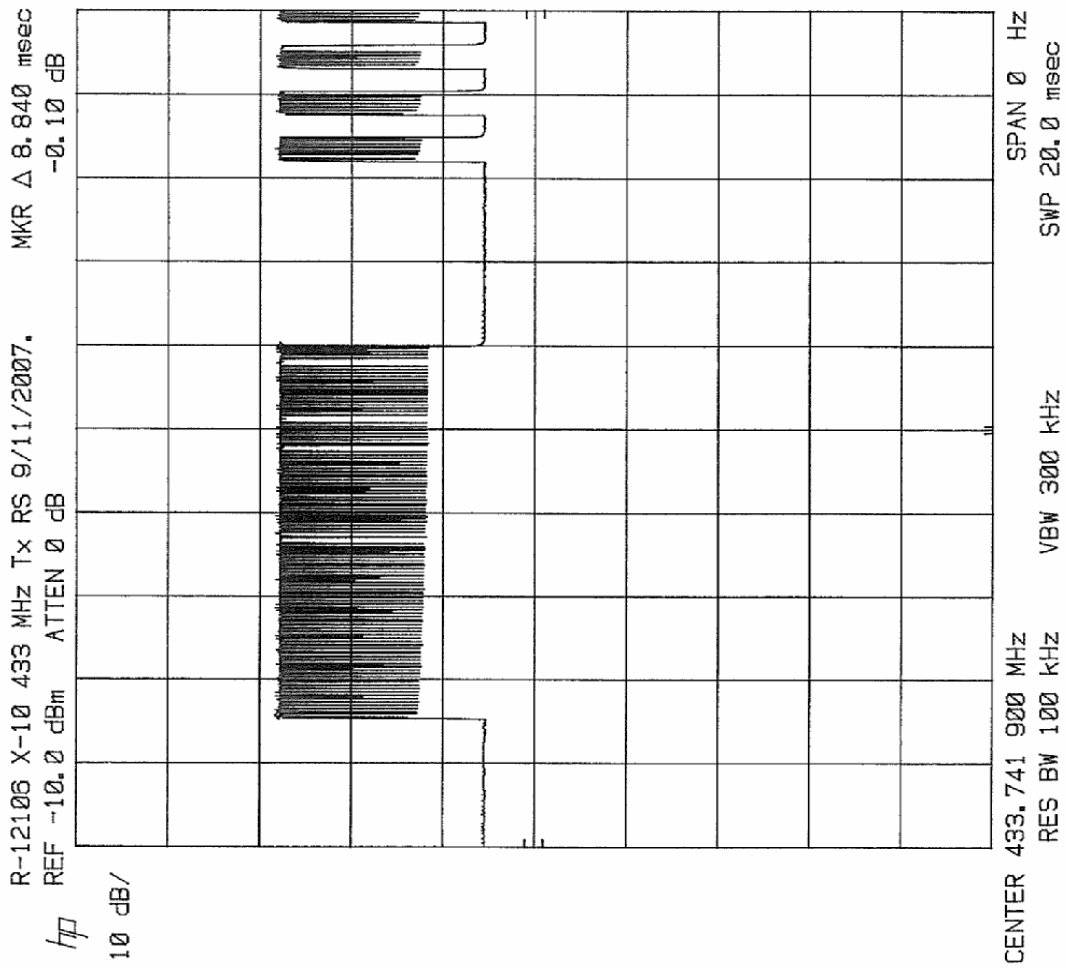


Test Method: FCC Part 15.35, Duty Cycle Determination.

Notes: Measurement of 1 large pulse = 8.84mSec.

FCC ID.: B4SVR50A

Customer	X-10 (USA), Inc.	
Test Sample	5.8 GHz Wireless Audio / Video Receiver.	
Model No.:	VR50A	
Date: 9-11-2007.	Tech: R.S.	Sheet 2 of 4

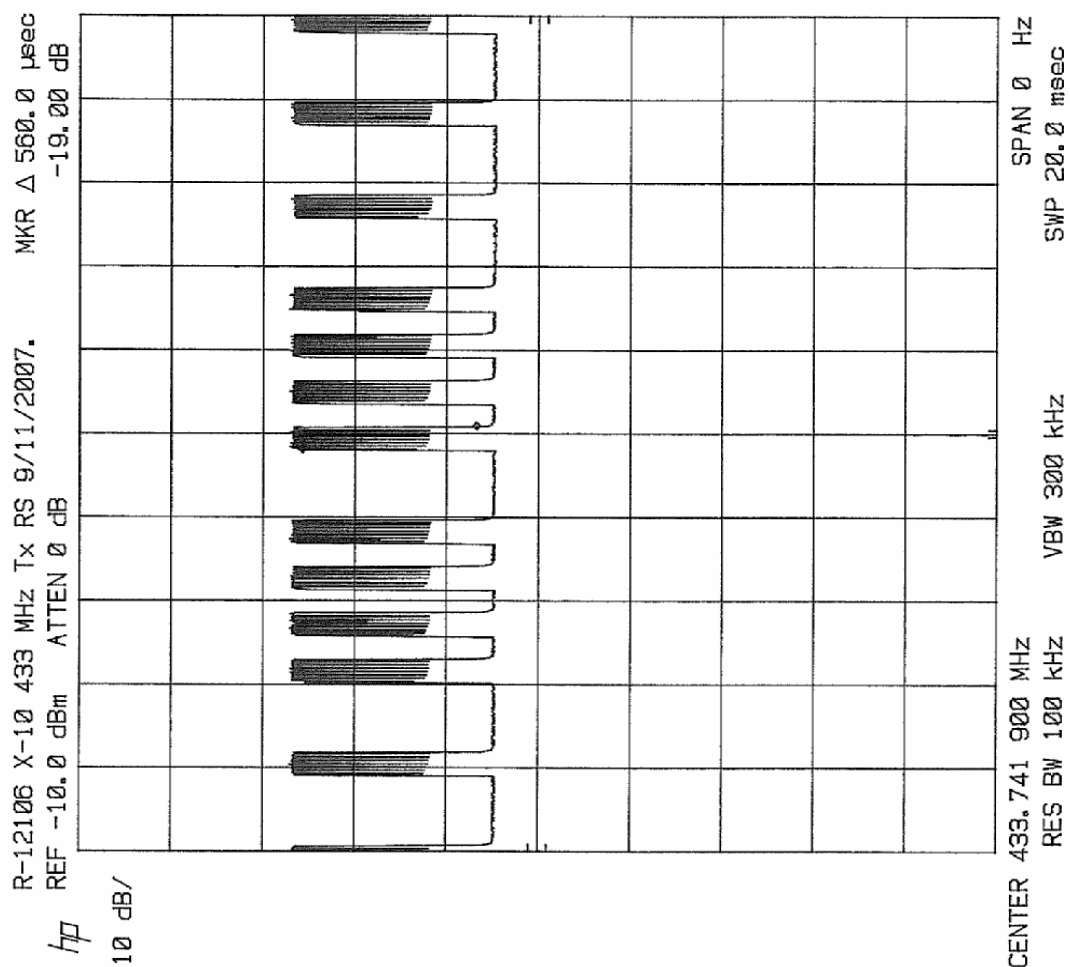


Test Method: FCC Part 15.35, Duty Cycle Determination.

Notes: Measurement of 1 small pulse = 560 μ Sec.

Measurements of 33small pulses = 19(560 μ Sec) = 18.48mSec.

FCC ID.: B4SVR50A

Customer	X-10 (USA), Inc.	
Test Sample	5.8 GHz Wireless Audio / Video Receiver.	
Model No.:	VR50A	
Date: 9-11-2007.	Tech: R.S.	Sheet 3 of 4

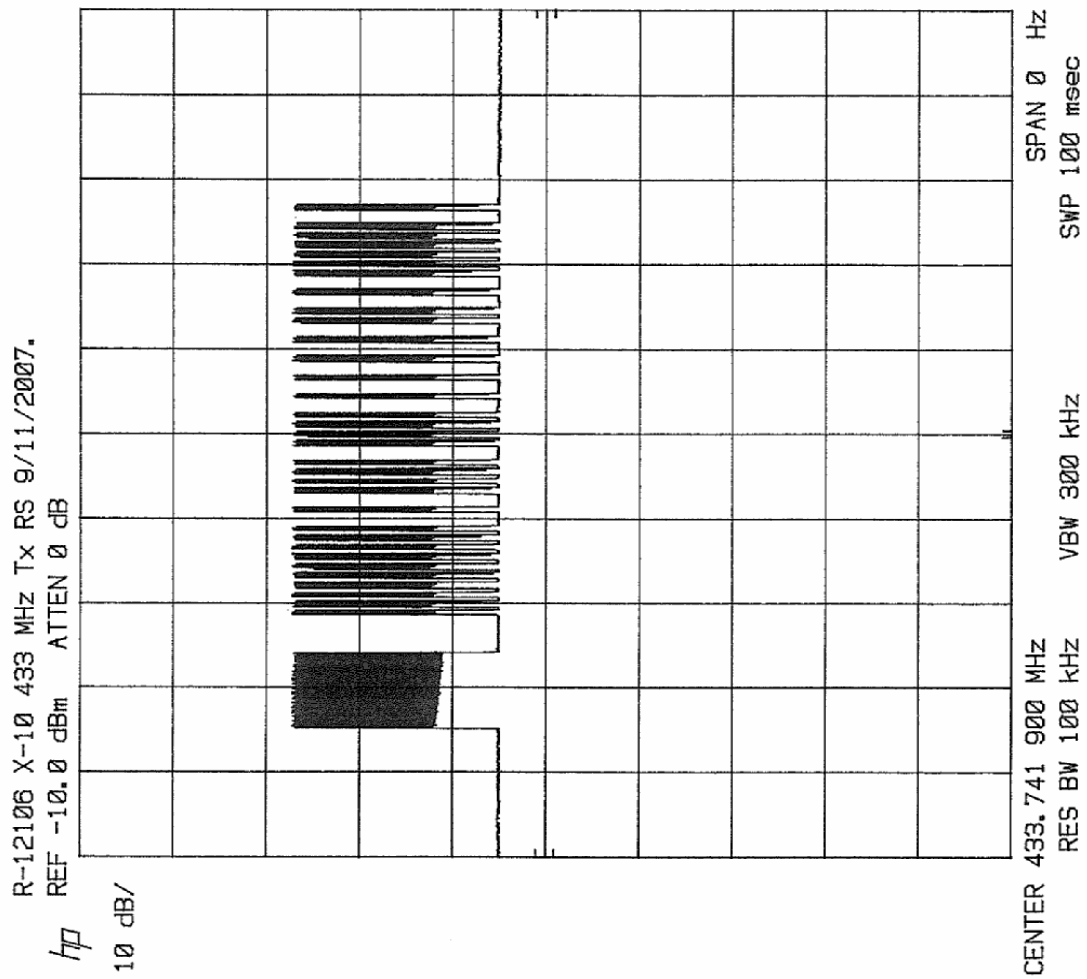

Test Method: FCC Part 15.35, Duty Cycle Determination.


Notes: Duty cycle = (1)(8.84mSec) + (33) (560μSec) = 27.32 mSec.

Duty cycle = (27.32mSec / 100=0.27) $20 \log 0.27 = -11.3 \text{ dB}$

FCC ID.: B4SVR50A

Customer	X-10 (USA), Inc.	
Test Sample	5.8 GHz Wireless Audio / Video Receiver.	
Model No.:	VR50A	
Date: 9-11-2007.	Tech: R.S.	Sheet 4 of 4

**FCC Part 15, Subpart C, 15.231(c), Occupied Bandwidth
Test Data**

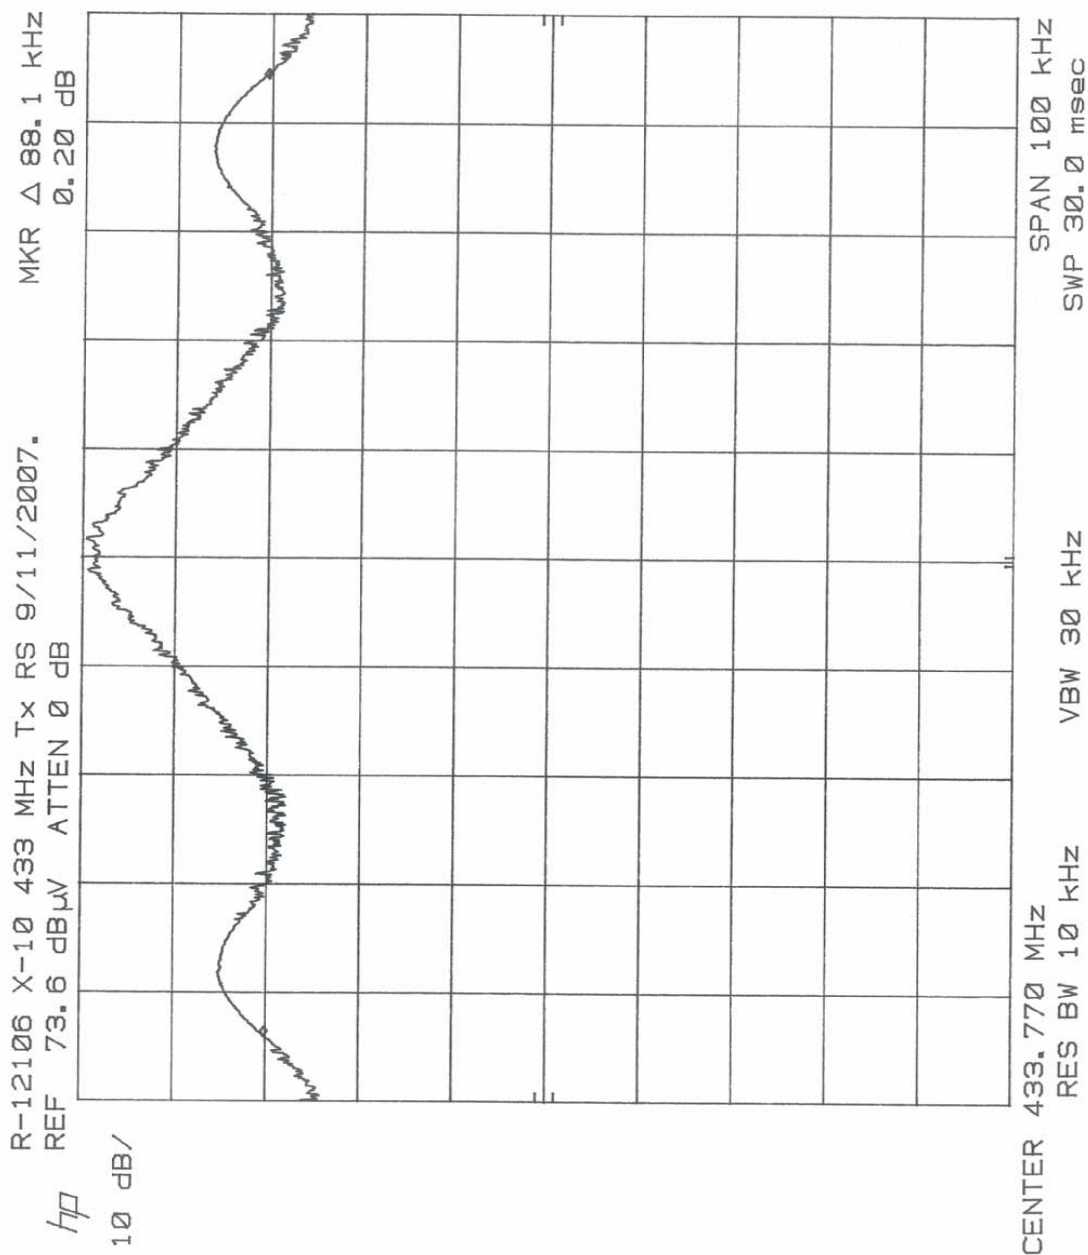


Test Method: FCC Part 15, Subpart C, 15.231(c), Occupied Bandwidth.

Notes: Occupied Bandwidth measured 88.1 kHz, does not exceed 0.25% of center frequency at the 20 dBc points (1.08 MHz)

FCC ID.: B4SVR50A

Customer	X-10 (USA), Inc.	
Test Sample	5.8 GHz Wireless Audio / Video Receiver.	
Model No.:	VR50A	
Date: 9-11-2007.	Tech: R.S.	Sheet 1 of 2

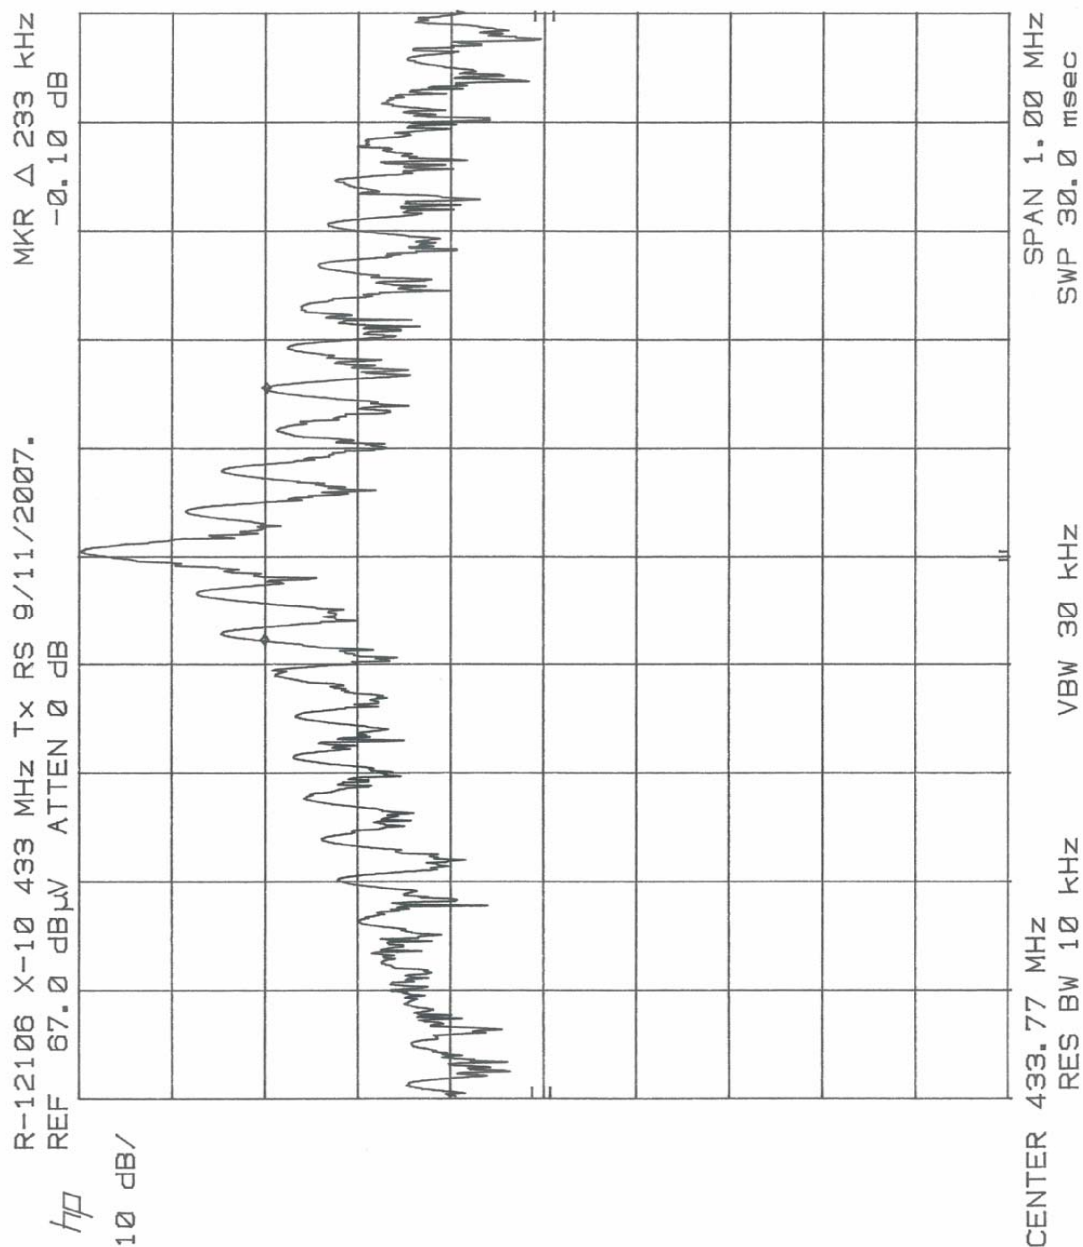

Test Method: FCC Part 15, Subpart C, 15.231(c), Occupied Bandwidth.

Notes: Occupied Bandwidth measured 233.0 kHz, does not exceed 0.25% of center frequency at the 20 dBc points (1.08 MHz)

FCC ID.: B4SVR50A

Customer	X-10 (USA), Inc.	
Test Sample	5.8 GHz Wireless Audio / Video Receiver.	
Model No.:	VR50A	
Date: 9-11-2007.	Tech: R.S.	Sheet 2 of 2