


R-7684 VT30A CONDUCTED EMISSIONS 12/22/98 LEAD-HOT
 REF 85.0 dBμV ATTEN 10 dB

10 dB/

10 dB/

OFFSET
 10.0
 dB

DL
 48.0
 dBμV

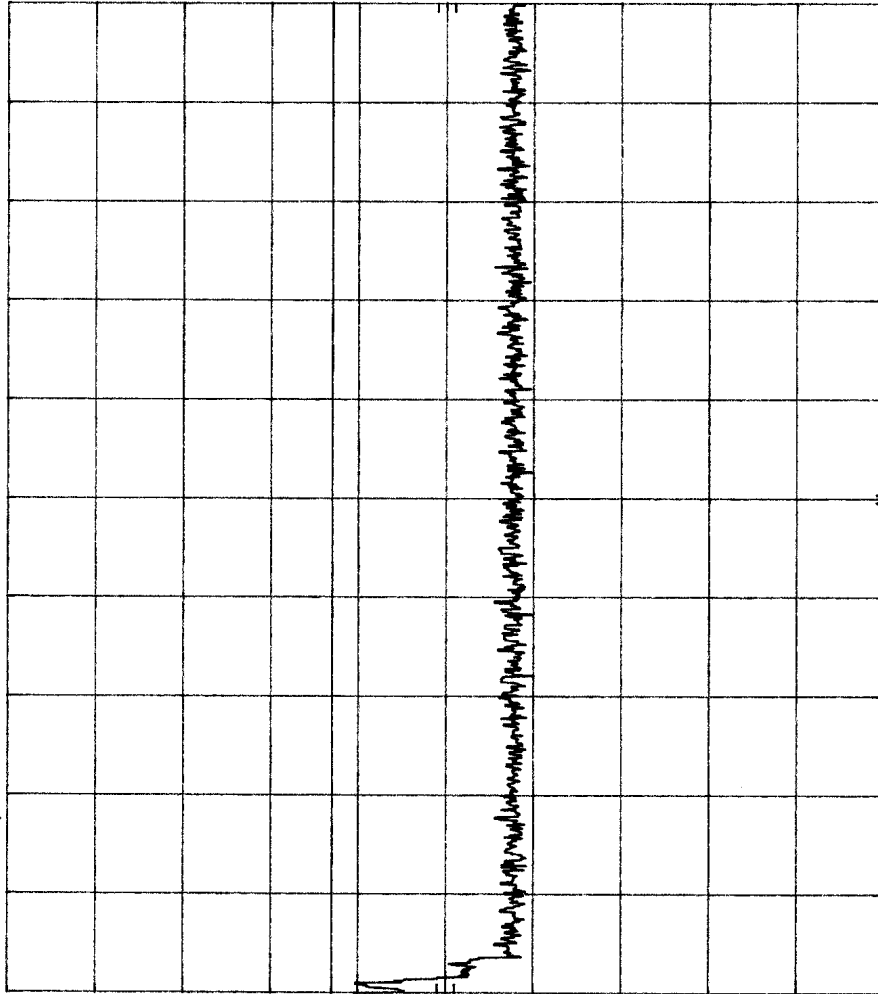

START 450 kHz RES BW 10 kHz VBW 30 kHz SWP 20.0 sec STOP 30.0 MHz

Customer:	X-10 (USA) Inc.
Test Sample:	310 Mhz Superregenerative Receiver
Model No:	VT30A
Test Method:	FCC 15.107(a) Conducted Emissions
Notes:	Lead Tested: Hot
	Detector: Peak
Date:	December 22, 1998
Tech:	Dennis Cortes
Sheet:	1 of 2



Retlif Testing Laboratories

Report No. R-7684-1


R-7684 VT30A CONDUCTED EMISSIONS 12/22/98 LEAD-NEUTRAL
 REF 85.0 dBμV ATTEN 10 dB

hp

10 dB/

OFFSET
 10.0
 dB

DL
 48.0
 dBμV

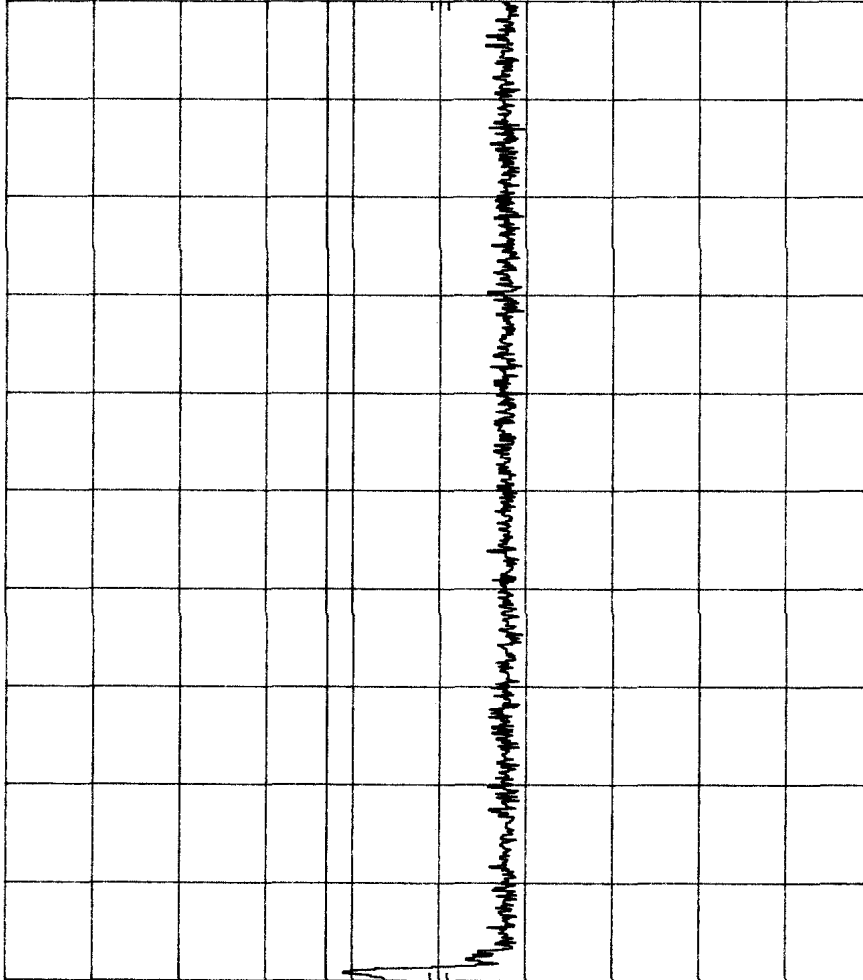

Customer:	X-10 (USA) Inc.
Test Sample:	310 Mhz Superregenerative Receiver
Model No:	VT30A
Test Method:	FCC 15.107(a) Conducted Emissions
Notes:	Lead Tested: Neutral
	Detector: Peak
Date:	December 22, 1998
Tech:	Dennis Cortes
Sheet:	2 of 2



Retlif Testing Laboratories

Report No. R-7684-1