



element[®]

UTC Fire and Security

Water Proof Panic Module (PN: 60-578)

FCC 15.231:2018

Low Power Periodic Transmitter

Report # UTCF0088



NVLAP LAB CODE: 200676-0



This report must not be used to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government of the United States of America. This Report shall not be reproduced, except in full without written approval of the laboratory.



2017-1-25

CERTIFICATE OF TEST

Last Date of Test: March 8, 2018
UTC Fire and Security
Model: Water Proof Panic Module (PN: 60-578)

Radio Equipment Testing

Standards

| Specification | Method |
|-----------------|------------------|
| FCC 15.231:2018 | ANSI C63.10:2013 |

Results

| Method Clause | Test Description | Applied | Results | Comments |
|---------------|-------------------------------|---------|---------|---|
| 6.2 | Powerline Conducted Emissions | No | N/A | Not required for a battery powered EUT. |
| 6.5, 6.6 | Field Strength of Fundamental | Yes | Pass | |
| 6.5, 6.6 | Spurious Radiated Emissions | Yes | Pass | |
| 6.9.2 | Occupied Bandwidth | Yes | Pass | |
| 7.5 | Duty Cycle | Yes | Pass | |

Deviations From Test Standards

None

Approved By:

Victor Ratinoff, Operations Manager

Product compliance is the responsibility of the client; therefore, the tests and equipment modes of operation represented in this report were agreed upon by the client, prior to testing. The results of this test pertain only to the sample(s) tested. The specific description is noted in each of the individual sections of the test report supporting this certificate of test. This report reflects only those tests from the referenced standards shown in the certificate of test. It does not include inspection or verification of labels, identification, marking or user information.

REVISION HISTORY



| Revision Number | Description | Date | Page Number |
|-----------------|-------------|------|-------------|
| 00 | None | | |

ACCREDITATIONS AND AUTHORIZATIONS



United States

FCC - Designated by the FCC as a Telecommunications Certification Body (TCB). Certification chambers, Open Area Test Sites, and conducted measurement facilities are listed with the FCC.

A2LA - Accredited by A2LA to ISO / IEC 17065 as a product certifier. This allows Element to certify transmitters to FCC and IC specifications.

NVLAP - Each laboratory is accredited by NVLAP to ISO 17025

Canada

ISED - Recognized by Innovation, Science and Economic Development Canada as a Certification Body (CB). Certification chambers and Open Area Test Sites are filed with ISED.

European Union

European Commission – Within Element, we have a EU Notified Body validated for the EMCD and RED Directives.

Australia/New Zealand

ACMA - Recognized by ACMA as a CAB for the acceptance of test data.

Korea

MSIT / RRA - Recognized by KCC's RRA as a CAB for the acceptance of test data.

Japan

VCCI - Associate Member of the VCCI. Conducted and radiated measurement facilities are registered.

Taiwan

BSMI – Recognized by BSMI as a CAB for the acceptance of test data.

NCC - Recognized by NCC as a CAB for the acceptance of test data.

Singapore

IDA – Recognized by IDA as a CAB for the acceptance of test data.

Israel

MOC – Recognized by MOC as a CAB for the acceptance of test data.

Hong Kong

OFCA – Recognized by OFCA as a CAB for the acceptance of test data.

Vietnam

MIC – Recognized by MIC as a CAB for the acceptance of test data.

SCOPE

For details on the Scopes of our Accreditations, please visit:


<http://portlandcustomer.element.com/ts/scope/scope.htm>

<http://gsi.nist.gov/global/docs/cabs/designations.html>

FACILITIES



| | | | | | |
|---|---|--|---|--|---|
| California Labs OC01-17 41 Tesla Irvine, CA 92618 (949) 861-8918 | Minnesota Labs MN01-10 9349 W Broadway Ave. Brooklyn Park, MN 55445 (612)-638-5136 | New York Labs NY01-04 4939 Jordan Rd. Elbridge, NY 13060 (315) 554-8214 | Oregon Labs EV01-12 6775 NE Evergreen Pkwy #400 Hillsboro, OR 97124 (503) 844-4066 | Texas Labs TX01-09 3801 E Plano Pkwy Plano, TX 75074 (469) 304-5255 | Washington Labs NC01-05 19201 120 th Ave NE Bothell, WA 98011 (425)984-6600 |
| NVLAP | | | | | |
| NVLAP Lab Code: 200676-0 | NVLAP Lab Code: 200881-0 | NVLAP Lab Code: 200761-0 | NVLAP Lab Code: 200630-0 | NVLAP Lab Code:201049-0 | NVLAP Lab Code: 200629-0 |
| Innovation, Science and Economic Development Canada | | | | | |
| 2834B-1, 2834B-3 | 2834E-1, 2834E-3 | N/A | 2834D-1, 2834D-2 | 2834G-1 | 2834F-1 |
| BSMI | | | | | |
| SL2-IN-E-1154R | SL2-IN-E-1152R | N/A | SL2-IN-E-1017 | SL2-IN-E-1158R | SL2-IN-E-1153R |
| VCCI | | | | | |
| A-0029 | A-0109 | N/A | A-0108 | A-0201 | A-0110 |
| Recognized Phase I CAB for ACMA, BSMI, IDA, KCC/RRA, MIC, MOC, NCC, OFCA | | | | | |
| US0158 | US0175 | N/A | US0017 | US0191 | US0157 |

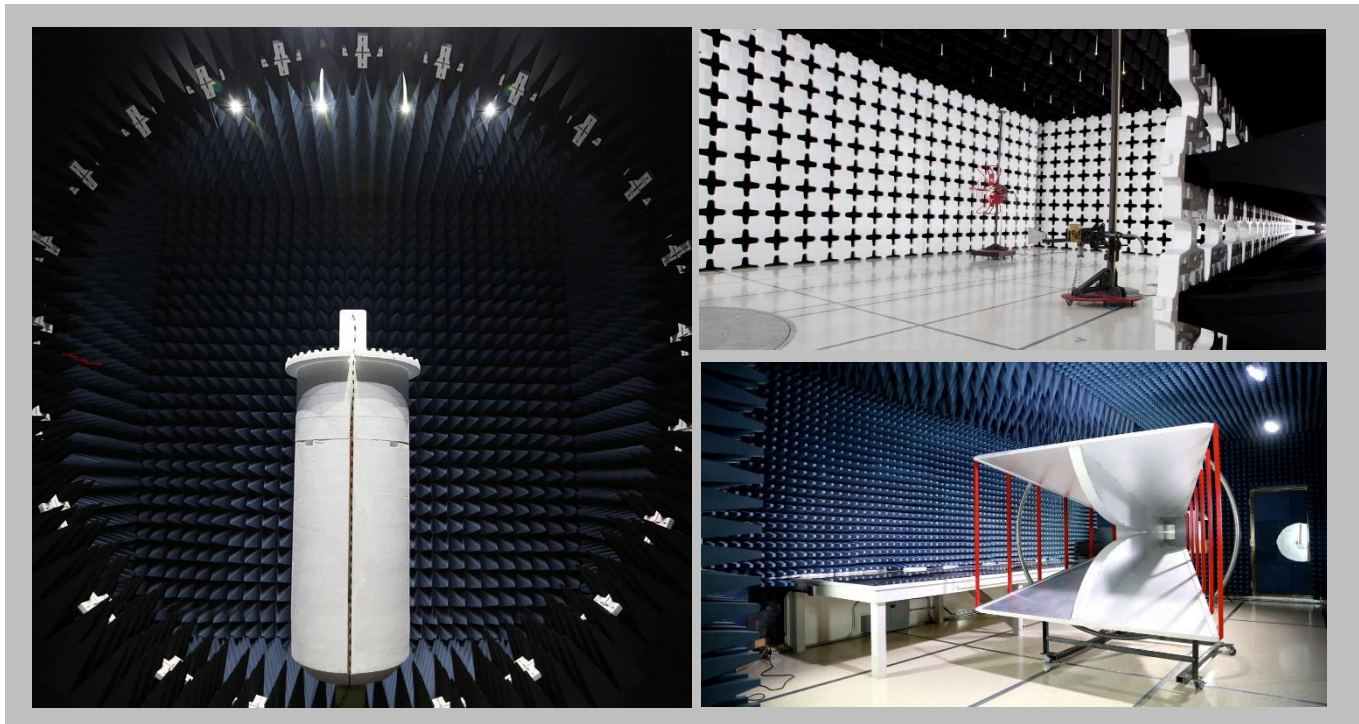

MEASUREMENT UNCERTAINTY



Measurement Uncertainty

When a measurement is made, the result will be different from the true or theoretically correct value. The difference is the result of tolerances in the measurement system that cannot be completely eliminated. To the extent that technology allows us, it has been our aim to minimize this error. Measurement uncertainty is a statistical expression of measurement error qualified by a probability distribution.

A measurement uncertainty estimation has been performed for each test per our internal quality document QM205.4.6. The estimation is used to compare the measured result with its "true" or theoretically correct value. The expanded measurement uncertainty (K=2) can be found included as part of the applicable test description page. Our measurement data meets or exceeds the measurement uncertainty requirements of the applicable specification; therefore, the test data can be compared directly to the specification limit to determine compliance. The calculations for estimating measurement uncertainty are based upon ETSI TR 100 028 (or CISPR 16-4-2 as applicable), and are available upon request.

The following table represents the Measurement Uncertainty (MU) budgets for each of the tests that may be contained in this report.


| Test | + MU | - MU |
|---------------------------------------|-------------|-------------|
| Frequency Accuracy (Hz) | 0.0007% | -0.0007% |
| Amplitude Accuracy (dB) | 1.2 dB | -1.2 dB |
| Conducted Power (dB) | 0.3 dB | -0.3 dB |
| Radiated Power via Substitution (dB) | 0.7 dB | -0.7 dB |
| Temperature (degrees C) | 0.7°C | -0.7°C |
| Humidity (% RH) | 2.5% RH | -2.5% RH |
| Voltage (AC) | 1.0% | -1.0% |
| Voltage (DC) | 0.7% | -0.7% |
| Field Strength (dB) | 5.2 dB | -5.2 dB |
| AC Powerline Conducted Emissions (dB) | 2.4 dB | -2.4 dB |

Test Setup Block Diagrams




2017.1.25


Antenna Port Conducted Measurements

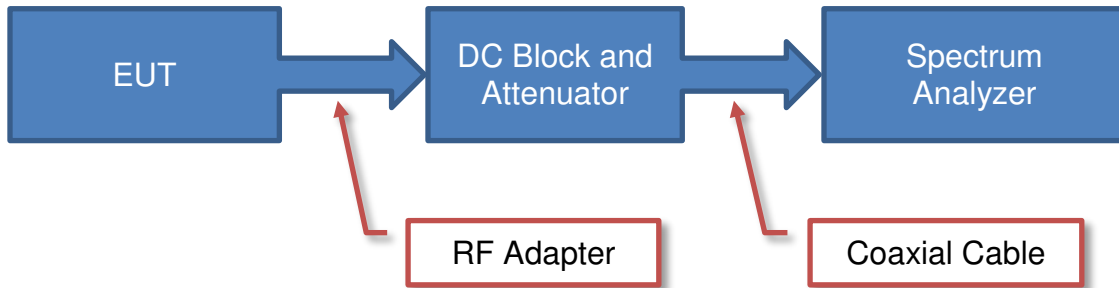

Near Field Test Fixture Measurements

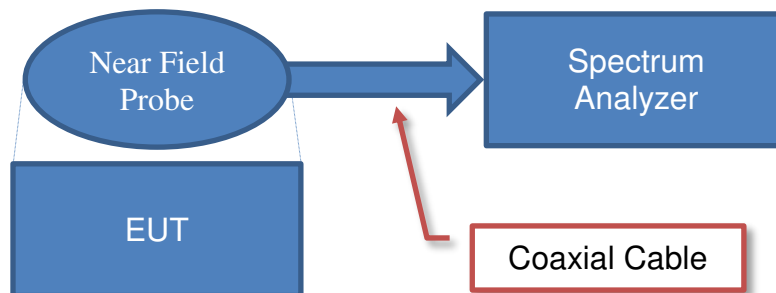

Spurious Radiated Emissions

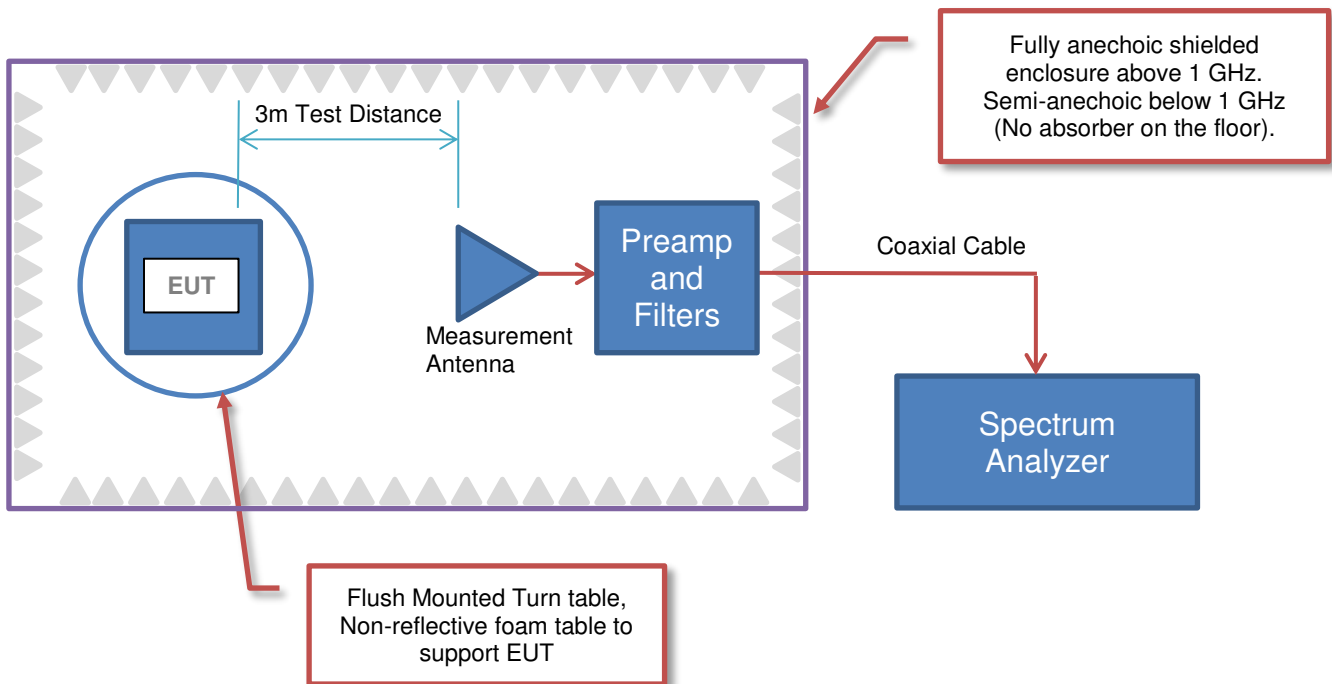



PRODUCT DESCRIPTION

Client and Equipment Under Test (EUT) Information

| | |
|---------------------------------|---------------------------------------|
| Company Name: | UTC Fire and Security |
| Address: | 9 Farm Springs Road |
| City, State, Zip: | Farmington, CT 06034 |
| Test Requested By: | Konstantin Khrustov |
| Model: | Water Proof Panic Module (PN: 60-578) |
| First Date of Test: | March 7, 2018 |
| Last Date of Test: | March 8, 2018 |
| Receipt Date of Samples: | March 7, 2018 |
| Equipment Design Stage: | Production |
| Equipment Condition: | No Damage |
| Purchase Authorization: | Verified |

Information Provided by the Party Requesting the Test

Functional Description of the EUT:

Water Resistant Pendant Panic. Low power transmitter operating at 319.5 MHz

Testing Objective:

To demonstrate compliance to FCC 15.231 specifications.

CONFIGURATIONS



Configuration UTCF0088- 1

| EUT | | | |
|--------------------------|-----------------------|-------------------|---------------------------|
| Description | Manufacturer | Model/Part Number | Serial Number |
| Water Proof Panic Module | UTC Fire and Security | 60-578 | Sample 26 (TX ID 03BA274) |

Configuration UTCF0088- 2

| EUT | | | |
|--------------------------|-----------------------|-------------------|---------------------------|
| Description | Manufacturer | Model/Part Number | Serial Number |
| Water Proof Panic Module | UTC Fire and Security | 60-578 | Sample 10 (TX ID 036841D) |

MODIFICATIONS



Equipment Modifications

| Item | Date | Test | Modification | Note | Disposition of EUT |
|------|----------|-------------------------------|--------------------------------------|---|---|
| 1 | 3/7/2018 | Field Strength of Fundamental | Tested as delivered to Test Station. | No EMI suppression devices were added or modified during this test. | EUT remained at Element following the test. |
| 2 | 3/7/2018 | Occupied Bandwidth | Tested as delivered to Test Station. | No EMI suppression devices were added or modified during this test. | EUT remained at Element following the test. |
| 3 | 3/7/2018 | Spurious Radiated Emissions | Tested as delivered to Test Station. | No EMI suppression devices were added or modified during this test. | EUT remained at Element following the test. |
| 4 | 3/8/2018 | Duty Cycle | Tested as delivered to Test Station. | No EMI suppression devices were added or modified during this test. | Scheduled testing was completed. |

FIELD STRENGTH OF FUNDAMENTAL



PSA/ESCI 2017.12.19

Testing was performed using the mode(s) of operation and configuration(s) noted within the report. The individuals and/or the organization requesting the test provided the modes, configurations and settings used to complete the evaluation. The actual test parameters are specified in the test data, this includes items such as investigated frequency range (scanned) and test levels. The testing methods and performance specifications, as well as the test site used for the evaluation are indicated in the test data. The test data represents the configuration / operating mode/ model that produced the highest emission levels as compared to the specification limit.

MODES OF OPERATION

Continuously Transmitting Unmodulated at 319.5 MHz

POWER SETTINGS INVESTIGATED

Battery

CONFIGURATIONS INVESTIGATED

UTCF0088 - 1

FREQUENCY RANGE INVESTIGATED

| | | | |
|-----------------|--------|----------------|----------|
| Start Frequency | 30 MHz | Stop Frequency | 1000 MHz |
|-----------------|--------|----------------|----------|

SAMPLE CALCULATIONS

Radiated Emissions: Field Strength = Measured Level + Antenna Factor + Cable Factor - Amplifier Gain + Distance Adjustment Factor + External Attenuation

TEST EQUIPMENT

| Description | Manufacturer | Model | ID | Last Cal. | Interval |
|------------------------------|--------------|----------------------|-----|-------------|----------|
| Cable | Element | 10kHz-1GHz RE Cables | OCH | 1-Aug-2017 | 12 mo |
| Antenna - Biconilog | Teseq | CBL 6141A | AYE | 7-Nov-2017 | 24 mo |
| Analyzer - Spectrum Analyzer | Agilent | E4446A | AAY | 21-Nov-2017 | 12 mo |

TEST DESCRIPTION

The antennas to be used with the EUT were tested. The EUT was configured for continuous un-modulated CW operation at its single transmit frequency. The field strength of the transmit frequency was maximized by rotating the EUT, adjusting the measurement antenna height and polarization, and manipulating the EUT in 3 orthogonal planes (per ANSI C63.10:2013).

To derive average emission measurements, a duty cycle correction factor was utilized:

Duty Cycle = On time/100 milliseconds (or the period, whichever is less)

Where "On time" = $N1L1 + N2L2 + \dots$

Where N1 is the number of type 1 pulses, L1 is length of type 1 pulses, N2 is the number of type 2 pulses, L2 is the length of type 2 pulses, etc.

Therefore, Duty Cycle = $(N1L1 + N2L2 + \dots)/100\text{mS}$ or T, whichever is less. (Where T is the period of the pulse train.)

The measured values for the EUT's pulse train are as follows:

Period = 100 mSec
 Pulsewidth of Type 1 Pulse = 0.9792 mSec
 Pulsewidth of Type 2 Pulse = 0.1251 mSec
 Pulsewidth of Type 3 Pulse = 0.4909 mSec
 Number of Type 1 Pulses = 1
 Number of Type 2 Pulses = 58
 Number of Type 3 Pulses = 1


Duty Cycle = $20 \log \left[\frac{(1)(0.9792) + (58)(0.1251) + (1)(0.4909)}{100} \right] = -21.18 \text{ dB}$

The duty cycle correction factor of -21.18 dB was added to the peak readings to mathematically derive the average levels. Peak measurements were made with a resolution bandwidth of 100kHz and a video bandwidth of 300kHz.

FIELD STRENGTH OF FUNDAMENTAL




EmiRS 2018.02.06 PSA-ESCI2017.12.19

| | | | | |
|------------------------|--|--------------------------|------------|--|
| Work Order: | UTCF0088 | Date: | 7-Mar-2018 |  |
| Project: | None | Temperature: | 21 °C | |
| Job Site: | OC10 | Humidity: | 45% RH | |
| Serial Number: | Sample 28 | Barometric Pres.: | 1015 mbar | |
| Tested by: | Johnny Candelas | | | |
| EUT: | Water Proof Panic Module (PN: 60-578) | | | |
| Configuration: | 1 | | | |
| Customer: | UTC Fire and Security | | | |
| Attendees: | Konstantin Khrustov | | | |
| EUT Power: | Battery | | | |
| Operating Mode: | Continuously Transmitting Unmodulated at 319.5 MHz | | | |
| Deviations: | None | | | |
| Comments: | None | | | |

| | |
|----------------------------|--------------------|
| Test Specifications | Test Method |
| FCC 15.231:2018 | ANSI C63.10:2013 |

| Run # | 1 | Test Distance (m) | 3 | Antenna Height(s) | 1 to 4(m) | Results | Pass |
|-------|---|-------------------|---|-------------------|-----------|---------|------|
|-------|---|-------------------|---|-------------------|-----------|---------|------|

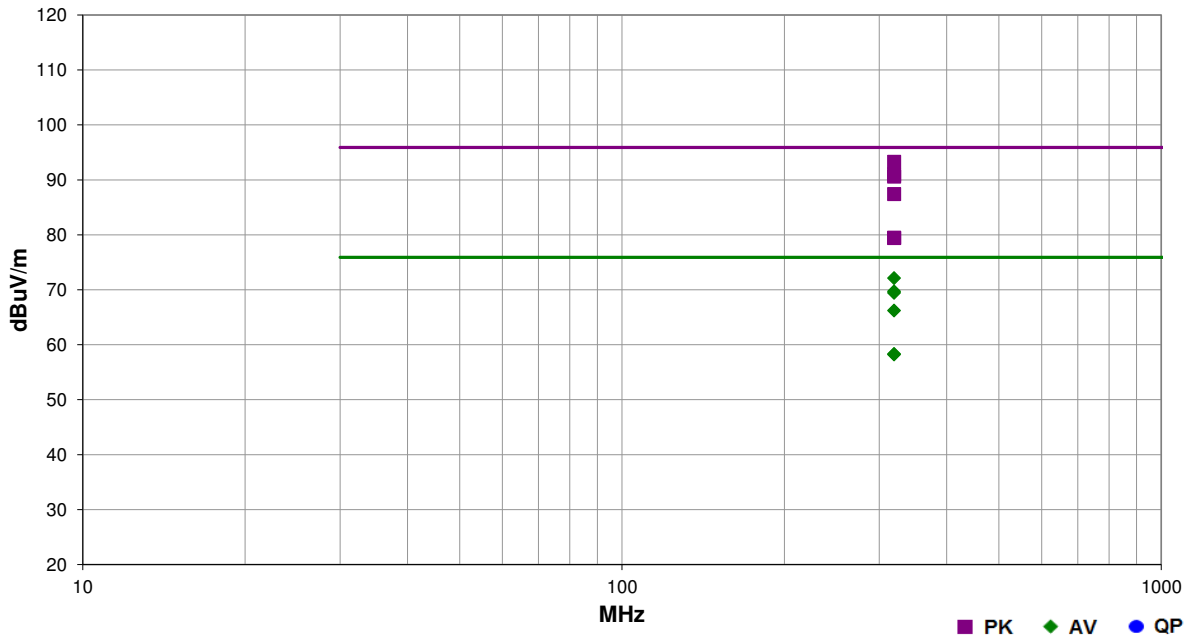

| Freq (MHz) | Amplitude (dBuV) | Factor (dB) | Antenna Height (meters) | Azimuth (degrees) | Duty Cycle Correction Factor (dB) | External Attenuation (dB) | Polarity/Transducer Type | Detector | Distance Adjustment (dB) | Adjusted (dBuV/m) | Spec. Limit (dBuV/m) | Compared to Spec. (dB) | Comments |
|------------|------------------|-------------|-------------------------|-------------------|-----------------------------------|---------------------------|--------------------------|----------|--------------------------|-------------------|----------------------|------------------------|-------------|
| 319.498 | 70.5 | 22.8 | 1.1 | 107.0 | | 0.0 | Horz | PK | 0.0 | 93.3 | 95.9 | -2.6 | EUT Horiz |
| 319.500 | 70.5 | 22.8 | 1.0 | 121.0 | -21.18 | 0.0 | Horz | AV | 0.0 | 72.1 | 75.9 | -3.8 | EUT Horiz |
| 319.498 | 68.1 | 22.8 | 2.3 | 109.0 | | 0.0 | Vert | PK | 0.0 | 90.9 | 95.9 | -5.0 | EUT Vert |
| 319.500 | 67.8 | 22.8 | 1.0 | 7.0 | | 0.0 | Horz | PK | 0.0 | 90.6 | 95.9 | -5.3 | EUT on Side |
| 319.498 | 68.1 | 22.8 | 2.3 | 109.0 | -21.18 | 0.0 | Vert | AV | 0.0 | 69.7 | 75.9 | -6.2 | EUT Vert |
| 319.500 | 67.8 | 22.8 | 1.0 | 7.0 | -21.18 | 0.0 | Horz | AV | 0.0 | 69.4 | 75.9 | -6.5 | EUT on Side |
| 319.500 | 64.6 | 22.8 | 2.9 | 295.0 | | 0.0 | Vert | PK | 0.0 | 87.4 | 95.9 | -8.5 | EUT on Side |
| 319.500 | 64.6 | 22.8 | 2.9 | 295.0 | -21.18 | 0.0 | Vert | AV | 0.0 | 66.2 | 75.9 | -9.7 | EUT on Side |
| 319.503 | 56.7 | 22.8 | 4.0 | 203.0 | | 0.0 | Vert | PK | 0.0 | 79.5 | 95.9 | -16.4 | EUT Horiz |
| 319.502 | 56.6 | 22.8 | 1.0 | 134.0 | | 0.0 | Horz | PK | 0.0 | 79.4 | 95.9 | -16.5 | EUT Vert |
| 319.503 | 56.7 | 22.8 | 4.0 | 203.0 | -21.18 | 0.0 | Vert | AV | 0.0 | 58.3 | 75.9 | -17.6 | EUT Horiz |
| 319.502 | 56.6 | 22.8 | 1.0 | 134.0 | -21.18 | 0.0 | Horz | AV | 0.0 | 58.2 | 75.9 | -17.7 | EUT Vert |

SPURIOUS RADIATED EMISSIONS



PSA-ESCI 2017.12.19

Testing was performed using the mode(s) of operation and configuration(s) noted within the report. The individuals and/or the organization requesting the test provided the modes, configurations and settings used to complete the evaluation. The actual test parameters are specified in the test data, this includes items such as investigated frequency range (scanned) and test levels. The testing methods and performance specifications, as well as the test site used for the evaluation are indicated in the test data. The test data represents the configuration / operating mode/ model that produced the highest emission levels as compared to the specification limit.

MODES OF OPERATION

Continuously Transmitting Unmodulated at 319.5 MHz

POWER SETTINGS INVESTIGATED

Battery

CONFIGURATIONS INVESTIGATED

UTCF0088 - 1

FREQUENCY RANGE INVESTIGATED

| | | | |
|-----------------|--------|----------------|----------|
| Start Frequency | 30 MHz | Stop Frequency | 4000 MHz |
|-----------------|--------|----------------|----------|

SAMPLE CALCULATIONS

Radiated Emissions: Field Strength = Measured Level + Antenna Factor + Cable Factor - Amplifier Gain + Distance Adjustment Factor + External Attenuation

TEST EQUIPMENT

| Description | Manufacturer | Model | ID | Last Cal. | Interval |
|------------------------------|--------------------|------------------------|-----|-------------|----------|
| Attenuator | Fairview Microwave | SA18H-10 | TKP | NCR | 0 mo |
| Amplifier - Pre-Amplifier | Miteq | AM-1402 | AOZ | 1-Aug-2017 | 12 mo |
| Cable | Element | 10kHz-1GHz RE Cables | OCH | 1-Aug-2017 | 12 mo |
| Antenna - Biconilog | Teseq | CBL 6141A | AYE | 7-Nov-2017 | 24 mo |
| Amplifier - Pre-Amplifier | Miteq | AMF-4D-010120-30-10P-1 | AOP | 13-Jul-2017 | 12 mo |
| Cable | Element | 1-8GHz RE Cables | OCJ | 13-Jul-2017 | 12 mo |
| Antenna - Double Ridge | ETS Lindgren | 3117 | AHQ | 28-Sep-2017 | 24 mo |
| Analyzer - Spectrum Analyzer | Agilent | E4446A | AAY | 21-Nov-2017 | 12 mo |

TEST DESCRIPTION

The highest gain antenna of each type to be used with the EUT was tested. The EUT was configured for the required transmit frequency in each operational band and the modes as showed in the data sheets.

For each configuration, the spectrum was scanned throughout the specified range as part of the exploratory investigation of the emissions. These "pre-scans" are not included in the report. Final measurements on individual emissions were then made and included in this test report.

The individual emissions from the EUT were maximized by rotating the EUT on a turntable, adjusting the position of the EUT and EUT antenna in three orthogonal axis, and adjusting the measurement antenna height and polarization (per ANSI C63.10). A preamp and high pass filter (and notch filter) were used for this test in order to provide sufficient measurement sensitivity.

Measurements were made with the required detectors and annotated on the data for each individual point using the following annotation:

QP = Quasi-Peak Detector
PK = Peak Detector
AV = RMS Detector

To derive average emission measurements, a duty cycle correction factor was utilized:

Duty Cycle = On time/100 milliseconds (or the period, whichever is less)

Where "On time" = $N1L1 + N2L2 + \dots$

Where N1 is the number of type 1 pulses, L1 is length of type 1 pulses, N2 is the number of type 2 pulses, L2 is the length of type 2 pulses, etc.

Therefore, Duty Cycle = $(N1L1 + N2L2 + \dots)/100\text{mS}$ or T, whichever is less. Where T is the period of the pulse train.

The measured values for the EUT's pulse train are as follows:

Period = 100 mSec
Pulsewidth of Type 1 Pulse = 0.9792 mSec
Pulsewidth of Type 2 Pulse = 0.1251 mSec
Pulsewidth of Type 3 Pulse = 0.4909 mSec
Number of Type 1 Pulses = 1
Number of Type 2 Pulses = 58
Number of Type 3 Pulses = 1

Duty Cycle = $20 \log [((1)(0.9792) + (58)(0.1251) + (1)(0.4909))/100]$ -21.18 dB

The duty cycle correction factor of -21.18 dB was added to the peak readings to mathematically derive the average levels. Peak measurements were made with a resolution bandwidth of 100kHz and a video bandwidth of 300kHz for measurements at or below 1GHz. Above 1GHz, a resolution bandwidth of 1MHz and a video bandwidth of 3MHz was used.

SPURIOUS RADIATED EMISSIONS




EmiR5 2018.02.06

PSA-ESCI 2017.12.19

| | | | | |
|------------------------|--|--------------------------|------------|-----------------------------------|
| Work Order: | UTCF0088 | Date: | 8-Mar-2018 | |
| Project: | None | Temperature: | 20.5 °C | |
| Job Site: | OC10 | Humidity: | 38.2% RH | |
| Serial Number: | Sample 26 | Barometric Pres.: | 1019 mbar | Tested by: Johnny Candelas |
| EUT: | Water Proof Panic Module (PN: 60-578) | | | |
| Configuration: | 1 | | | |
| Customer: | UTC Fire and Security | | | |
| Attendees: | Konstantin Khurstov | | | |
| EUT Power: | Battery | | | |
| Operating Mode: | Continuously Transmitting Unmodulated at 319.5 MHz | | | |
| Deviations: | None | | | |
| Comments: | None | | | |

| Test Specifications | Test Method |
|---------------------|------------------|
| FCC 15.231:2018 | ANSI C63.10:2013 |

| Run # | 1 | Test Distance (m) | 3 | Antenna Height(s) | 1 to 4(m) | Results | Pass |
|-------|---|-------------------|---|-------------------|-----------|---------|------|
|-------|---|-------------------|---|-------------------|-----------|---------|------|

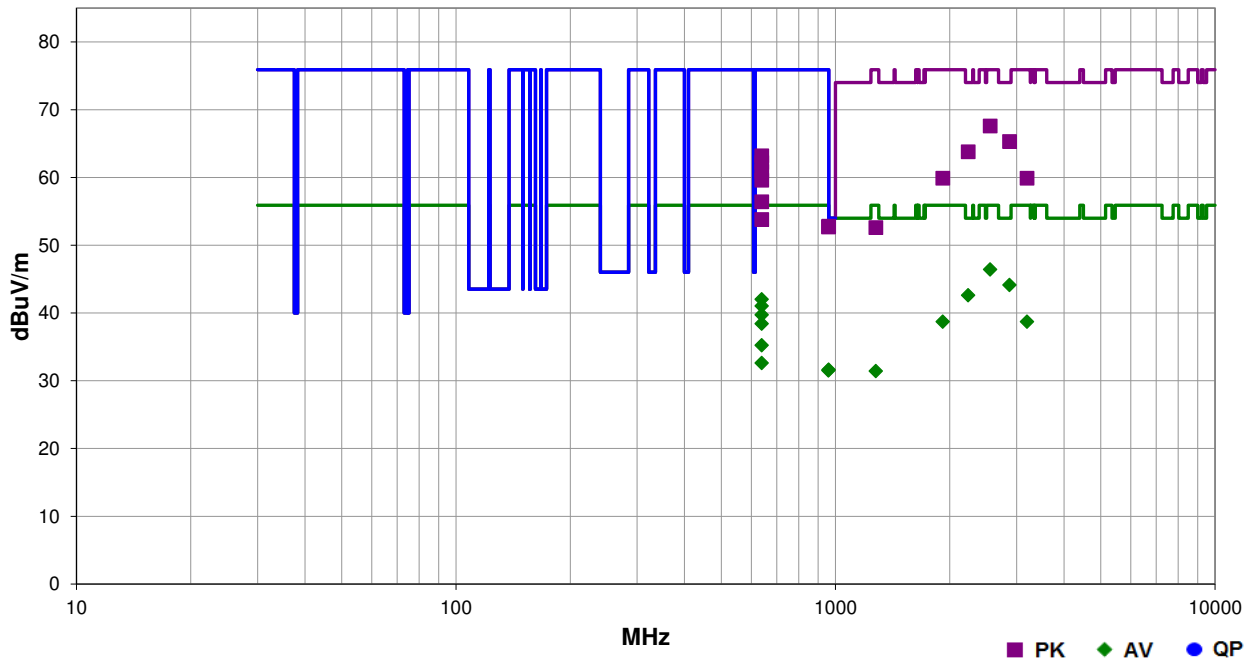

| Freq (MHz) | Amplitude (dBuV) | Factor (dB) | Antenna Height (meters) | Azimuth (degrees) | Duty Cycle Correction (meters) | External Attenuation (dB) | Polarity/Transducer Type | Detector | Distance Adjustment (dB) | Adjusted (dBuV/m) | Spec. Limit (dBuV/m) | Compared to Spec. (dB) | Comments |
|------------|------------------|-------------|-------------------------|-------------------|--------------------------------|---------------------------|--------------------------|----------|--------------------------|-------------------|----------------------|------------------------|-------------|
| 2555.967 | 60.7 | 6.9 | 2.3 | 329.0 | | 0.0 | Horz | PK | 0.0 | 67.6 | 75.9 | -8.3 | EUT Horiz |
| 2875.450 | 57.0 | 8.3 | 1.9 | 315.0 | | 0.0 | Horz | PK | 0.0 | 65.3 | 74.0 | -8.7 | EUT Horiz |
| 2555.967 | 60.7 | 6.9 | 2.3 | 329.0 | -21.2 | 0.0 | Horz | AV | 0.0 | 46.4 | 55.9 | -9.5 | EUT Horiz |
| 2875.450 | 57.0 | 8.3 | 1.9 | 315.0 | -21.2 | 0.0 | Horz | AV | 0.0 | 44.1 | 54.0 | -9.9 | EUT Horiz |
| 2236.608 | 57.7 | 6.1 | 1.2 | 257.0 | | 0.0 | Vert | PK | 0.0 | 63.8 | 74.0 | -10.2 | EUT Vert |
| 2236.608 | 57.7 | 6.1 | 1.2 | 257.0 | -21.2 | 0.0 | Vert | AV | 0.0 | 42.6 | 54.0 | -11.4 | EUT Vert |
| 639.012 | 40.0 | 13.2 | 1.0 | 300.0 | | 10.0 | Vert | PK | 0.0 | 63.2 | 75.9 | -12.7 | EUT Vert |
| 639.012 | 39.0 | 13.2 | 1.4 | 149.0 | | 10.0 | Horz | PK | 0.0 | 62.2 | 75.9 | -13.7 | EUT Horiz |
| 639.012 | 40.0 | 13.2 | 1.0 | 300.0 | -21.2 | 10.0 | Vert | AV | 0.0 | 42.0 | 55.9 | -13.9 | EUT Vert |
| 639.012 | 39.0 | 13.2 | 1.4 | 149.0 | -21.2 | 10.0 | Horz | AV | 0.0 | 41.0 | 55.9 | -14.9 | EUT Horiz |
| 638.983 | 37.7 | 13.2 | 1.6 | 57.0 | | 10.0 | Horz | PK | 0.0 | 60.9 | 75.9 | -15.0 | EUT on Side |
| 3194.950 | 51.1 | 8.8 | 1.1 | 325.0 | | 0.0 | Vert | PK | 0.0 | 59.9 | 75.9 | -16.0 | EUT Vert |
| 1916.958 | 54.8 | 5.1 | 1.1 | 70.0 | | 0.0 | Vert | PK | 0.0 | 59.9 | 75.9 | -16.0 | EUT Vert |
| 638.983 | 37.7 | 13.2 | 1.6 | 57.0 | -21.2 | 10.0 | Horz | AV | 0.0 | 39.7 | 55.9 | -16.2 | EUT on Side |

| Freq (MHz) | Amplitude (dBuV) | Factor (dB) | Antenna Height (meters) | Azimuth (degrees) | Duty Cycle Correction (meters) | External Attenuation (dB) | Polarity/ Transducer Type | Detector | Distance Adjustment (dB) | Adjusted (dBuV/m) | Spec. Limit (dBuV/m) | Compared to Spec. (dB) | Comments |
|------------|------------------|-------------|-------------------------|-------------------|--------------------------------|---------------------------|---------------------------|----------|--------------------------|-------------------|----------------------|------------------------|-------------|
| 639.012 | 36.4 | 13.2 | 1.0 | 103.0 | | 10.0 | Vert | PK | 0.0 | 59.6 | 75.9 | -16.3 | EUT on Side |
| 3194.950 | 51.1 | 8.8 | 1.1 | 325.0 | -21.2 | 0.0 | Vert | AV | 0.0 | 38.7 | 55.9 | -17.2 | EUT Vert |
| 1916.958 | 54.8 | 5.1 | 1.1 | 70.0 | -21.2 | 0.0 | Vert | AV | 0.0 | 38.7 | 55.9 | -17.2 | EUT Vert |
| 639.012 | 36.4 | 13.2 | 1.0 | 103.0 | -21.2 | 10.0 | Vert | AV | 0.0 | 38.4 | 55.9 | -17.5 | EUT on Side |
| 639.008 | 33.2 | 13.2 | 1.5 | 201.0 | | 10.0 | Horz | PK | 0.0 | 56.4 | 75.9 | -19.5 | EUT Vert |
| 639.008 | 33.2 | 13.2 | 1.5 | 201.0 | -21.2 | 10.0 | Horz | AV | 0.0 | 35.2 | 55.9 | -20.7 | EUT Vert |
| 639.012 | 30.6 | 13.2 | 1.6 | 209.0 | | 10.0 | Vert | PK | 0.0 | 53.8 | 75.9 | -22.1 | EUT Horiz |
| 959.835 | 22.3 | 20.5 | 3.3 | 3.0 | | 10.0 | Horz | PK | 0.0 | 52.8 | 75.9 | -23.1 | EUT Horiz |
| 957.775 | 22.3 | 20.4 | 1.0 | 246.0 | | 10.0 | Vert | PK | 0.0 | 52.7 | 75.9 | -23.2 | EUT Vert |
| 639.012 | 30.6 | 13.2 | 1.6 | 209.0 | -21.2 | 10.0 | Vert | AV | 0.0 | 32.6 | 55.9 | -23.3 | EUT Horiz |
| 1277.983 | 51.7 | 0.9 | 1.4 | 58.0 | | 0.0 | Vert | PK | 0.0 | 52.6 | 75.9 | -23.3 | EUT Vert |
| 959.835 | 22.3 | 20.5 | 3.3 | 3.0 | -21.2 | 10.0 | Horz | AV | 0.0 | 31.6 | 55.9 | -24.3 | EUT Horiz |
| 957.775 | 22.3 | 20.4 | 1.0 | 246.0 | -21.2 | 10.0 | Vert | AV | 0.0 | 31.5 | 55.9 | -24.4 | EUT Vert |
| 1277.983 | 51.7 | 0.9 | 1.4 | 58.0 | -21.2 | 0.0 | Vert | AV | 0.0 | 31.4 | 55.9 | -24.5 | EUT Vert |

OCCUPIED BANDWIDTH



XMIT 2017.12.13

Testing was performed using the mode(s) of operation and configuration(s) noted within the report. The individuals and/or the organization requesting the test provided the modes, configurations and settings used to complete the evaluation. The actual test parameters are specified in the test data, this includes items such as investigated frequency range (scanned) and test levels. The testing methods and performance specifications, as well as the test site used for the evaluation are indicated in the test data.

TEST EQUIPMENT

| Description | Manufacturer | Model | ID | Last Cal. | Cal. Due |
|------------------------------|--------------|--------|-----|-----------|-----------|
| Probe - Near Field Set | Com-Power | PS-400 | IPF | NCR | NCR |
| Analyzer - Spectrum Analyzer | Agilent | E4446A | AAY | 21-Nov-17 | 21-Nov-18 |

TEST DESCRIPTION


A near-field probe was placed near the transmitter. A low-loss coaxial cable was used to connect the near-field probe to the spectrum analyzer. The EUT was transmitting at its maximum data rate.

The 20 dB occupied bandwidth is required to be no wider than 0.25% of the center frequency for devices operating above 70 MHz and below 900 MHz.

OCCUPIED BANDWIDTH



XMI 2017.12.13


| | | | |
|---|----------------|---|-----------------------------|
| EUT: Water Proof Panic Module (PN: 60-578) | | Work Order: UTCF0088 | |
| Serial Number: Sample 10 | | | Date: 7-Mar-18 |
| Customer: UTC Fire and Security | | | Temperature: 21.9 °C |
| Attendees: Konstantin Khrustov | | | Humidity: 38.1% RH |
| Project: None | | | Barometric Pres.: 1018 mbar |
| Tested by: Johnny Candelas | Power: Battery | Job Site: OC10 | |
| TEST SPECIFICATIONS | | Test Method | |
| FCC 15.231:2018 | | ANSI C63.10:2013 | |
| COMMENTS | | | |
| Limit based on center frequency: 319.5 MHz * 0.25% = 0.79875 MHz. | | | |
| DEVIATIONS FROM TEST STANDARD | | | |
| None | | | |
| Configuration # | 2 | Signature  | |
| | | Value | Limit |
| 319.5 MHz | | 26.485 kHz | 798.75 kHz |
| | | | Result |
| | | | Pass |

OCCUPIED BANDWIDTH



XMI 2017.12.13

| 319.5 MHz | | | |
|-----------|------------|------------|--------|
| | Value | Limit | Result |
| | 26.485 kHz | 798.75 kHz | Pass |

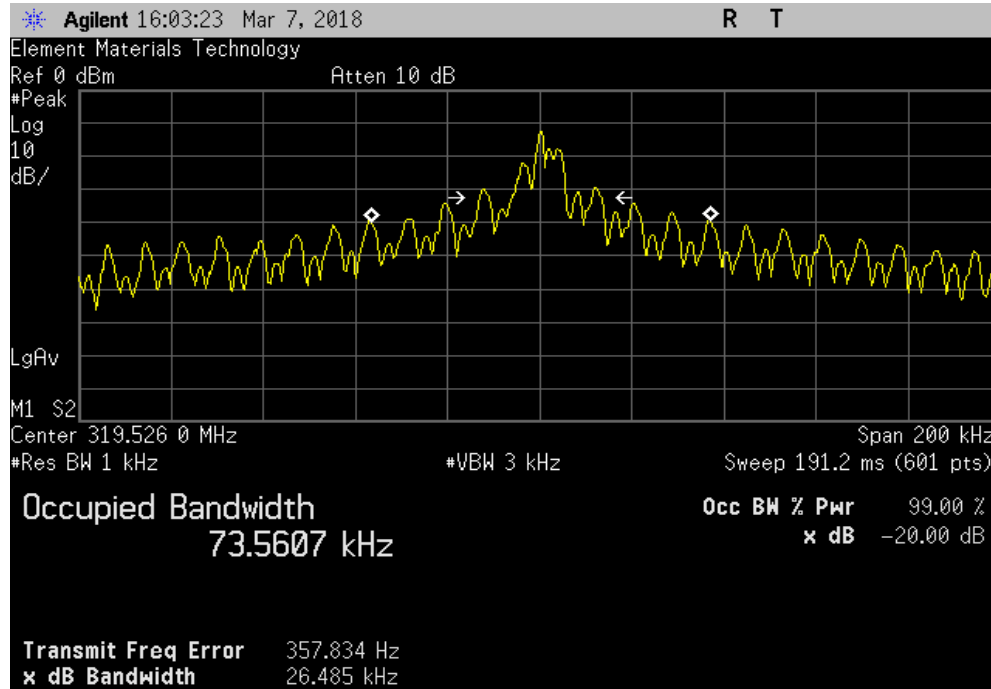

DUTY CYCLE



XMI 2017.12.13

Testing was performed using the mode(s) of operation and configuration(s) noted within the report. The individuals and/or the organization requesting the test provided the modes, configurations and settings used to complete the evaluation. The actual test parameters are specified in the test data, this includes items such as investigated frequency range (scanned) and test levels. The testing methods and performance specifications, as well as the test site used for the evaluation are indicated in the test data.

TEST EQUIPMENT

| Description | Manufacturer | Model | ID | Last Cal. | Cal. Due |
|------------------------------|--------------|--------|-----|-----------|-----------|
| Probe - Near Field Set | Com-Power | PS-400 | IPF | NCR | NCR |
| Analyzer - Spectrum Analyzer | Agilent | E4446A | AAY | 21-Nov-17 | 21-Nov-18 |

TEST DESCRIPTION

A near-field probe was placed near the transmitter. A low-loss coaxial cable was used to connect the near-field probe to the spectrum analyzer. The EUT was transmitting at its maximum data rate.

For software controlled or pre-programmed devices, the manufacturer shall declare the duty cycle class or classes for the equipment under test. For manually operated or event dependant devices, with or without software controlled functions, the manufacturer shall declare whether the device once triggered, follows a pre-programmed cycle, or whether the transmission is constant until the trigger is released or manually reset. The manufacturer shall also give a description of the application for the device and include a typical usage pattern. The typical usage pattern as declared by the manufacturer shall be used to determine the duty cycle and hence the duty class.

Where an acknowledgement is required, the additional transmitter on-time shall be included and declared by the manufacturer.

To derive average emission measurements, a duty cycle correction factor was utilized:

Duty Cycle = On time/100 milliseconds (or the period, whichever is less)

Where "On time" = $N1L1 + N2L2 + \dots$

Where $N1$ is the number of type 1 pulses, $L1$ is length of type 1 pulses, $N2$ is the number of type 2 pulses, $L2$ is the length of type 2 pulses, etc.

Therefore, Duty Cycle = $(N1L1 + N2L2 + \dots)/100\text{mS}$ or T , whichever is less. (Where T is the period of the pulse train.)
The measured values for the EUT's pulse train are as follows:

Period = 100 mSec
Pulsewidth of Type 1 Pulse = 0.9792 mSec
Pulsewidth of Type 2 Pulse = 0.1251 mSec
Pulsewidth of Type 3 Pulse = 0.4909 mSec
Number of Type 1 Pulses = 1
Number of Type 2 Pulses = 58
Number of Type 3 Pulses = 1


Duty Cycle = $20 \log [(1)(0.9792) + (58)(0.1251) + (1)(0.4909)]/100 = -21.18 \text{ dB}$

The duty cycle correction factor of -21.18 dB was added to the peak readings to mathematically derive the average levels. Peak measurements were made with a resolution bandwidth of 100kHz and a video bandwidth of 300kHz.

DUTY CYCLE



XMI 2017.12.13


| | | | | | | |
|--|---|---|-------------------------|-------------------------|-------|--------|
| EUT: Water Proof Panic Module (PN: 60-578) | | Work Order: UTCF0088 | | | | |
| Serial Number: Sample 10 | | Date: 8-Mar-18 | | | | |
| Customer: UTC Fire and Security | | Temperature: 21.8 °C | | | | |
| Attendees: Konstantin Khrustov | | Humidity: 37.3% RH | | | | |
| Project: None | | Barometric Pres.: 1018 mbar | | | | |
| Tested by: Johnny Candelas | | Power: Battery | | | | |
| Job Site: OC10 | | | | | | |
| TEST SPECIFICATIONS | | Test Method | | | | |
| FCC 15.231:2018 | | ANSI C63.10:2013 | | | | |
| COMMENTS | | | | | | |
| Period between bursts is greater than 100 mS. Initial amplitude increase on the 30 mS screen capture is due to the system becoming active and is below the spurious limits, so this was excluded from the "on time" of the duty cycle calculation. | | | | | | |
| DEVIATIONS FROM TEST STANDARD | | | | | | |
| None | | | | | | |
| Configuration # | 2 | Signature  | | | | |
| | | Pulse Width Type 1 (ms) | Pulse Width Type 2 (ms) | Pulse Width Type 3 (ms) | Limit | Result |
| 30ms Interval | | 0.9792 | 0.1251 | 0.4909 | N/A | N/A |
| 100ms Interval | | N/A | N/A | N/A | N/A | N/A |
| 1s Interval | | N/A | N/A | N/A | N/A | N/A |
| 5s Interval | | N/A | N/A | N/A | N/A | N/A |
| 10s Interval | | N/A | N/A | N/A | N/A | N/A |

DUTY CYCLE




XMM 2017.12.13

| 30ms Interval | | | | | | |
|---------------|----------------------------|----------------------------|----------------------------|-------|--------|--|
| | Pulse Width Type 1 (ms) | Pulse Width Type 2 (ms) | Pulse Width Type 3 (ms) | Limit | Result | |
| | 0.9792 | 0.1251 | 0.4909 | N/A | N/A | |

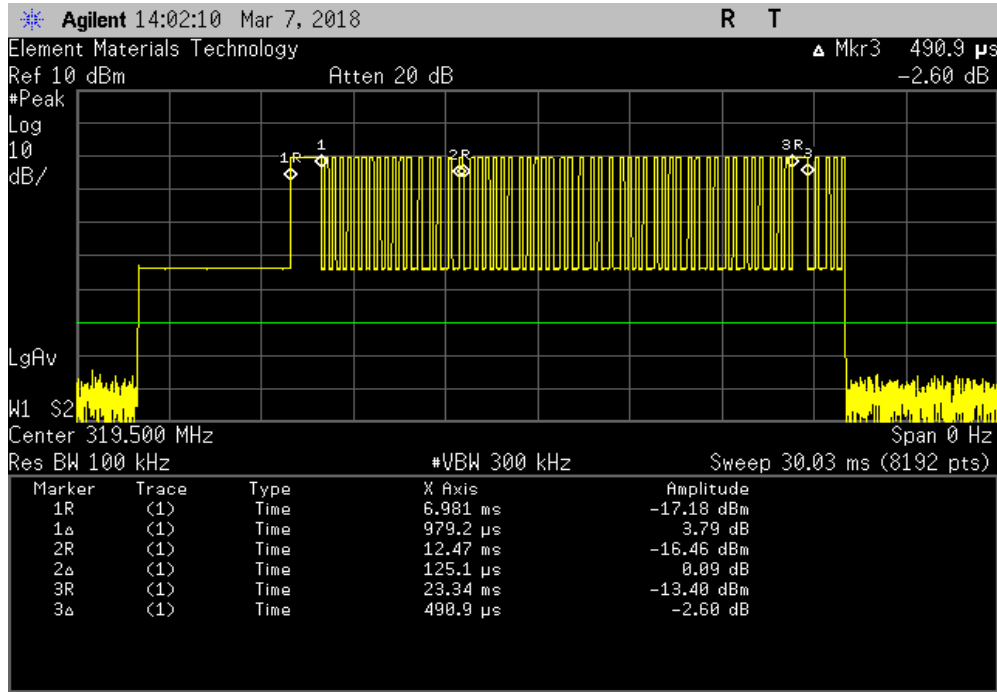

| 100ms Interval | | | | | | |
|----------------|----------------------------|----------------------------|----------------------------|-------|--------|--|
| | Pulse Width Type 1 (ms) | Pulse Width Type 2 (ms) | Pulse Width Type 3 (ms) | Limit | Result | |
| | N/A | N/A | N/A | N/A | N/A | |

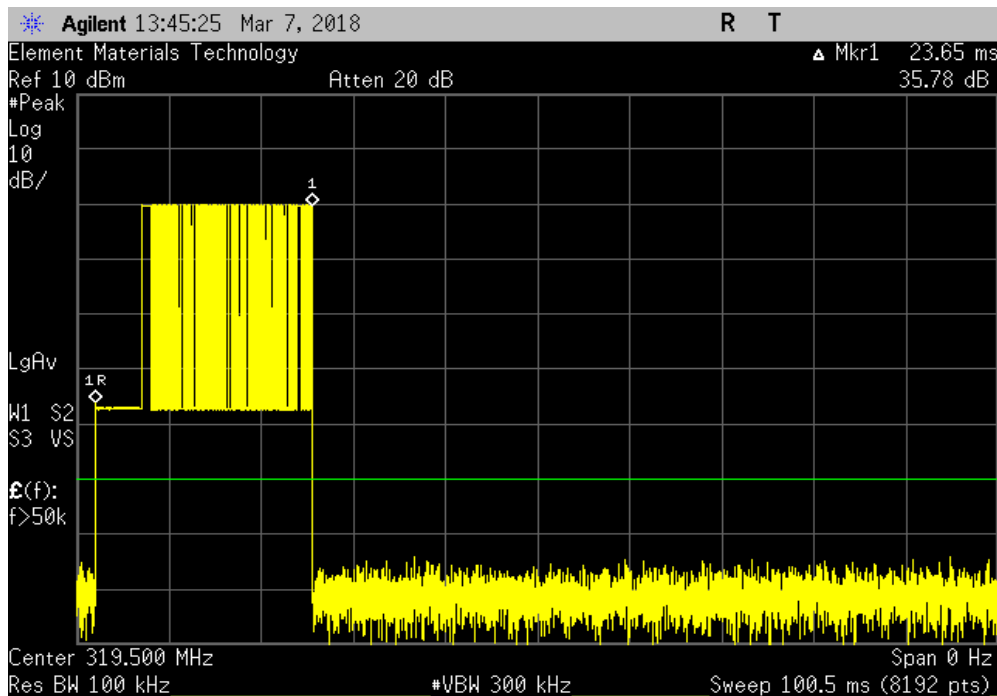


DUTY CYCLE




XMI 2017.12.13

| 1s Interval | | | | | | |
|-------------|----------------------------|----------------------------|----------------------------|-------|--------|--|
| | Pulse Width Type 1 (ms) | Pulse Width Type 2 (ms) | Pulse Width Type 3 (ms) | Limit | Result | |
| | N/A | N/A | N/A | N/A | N/A | |

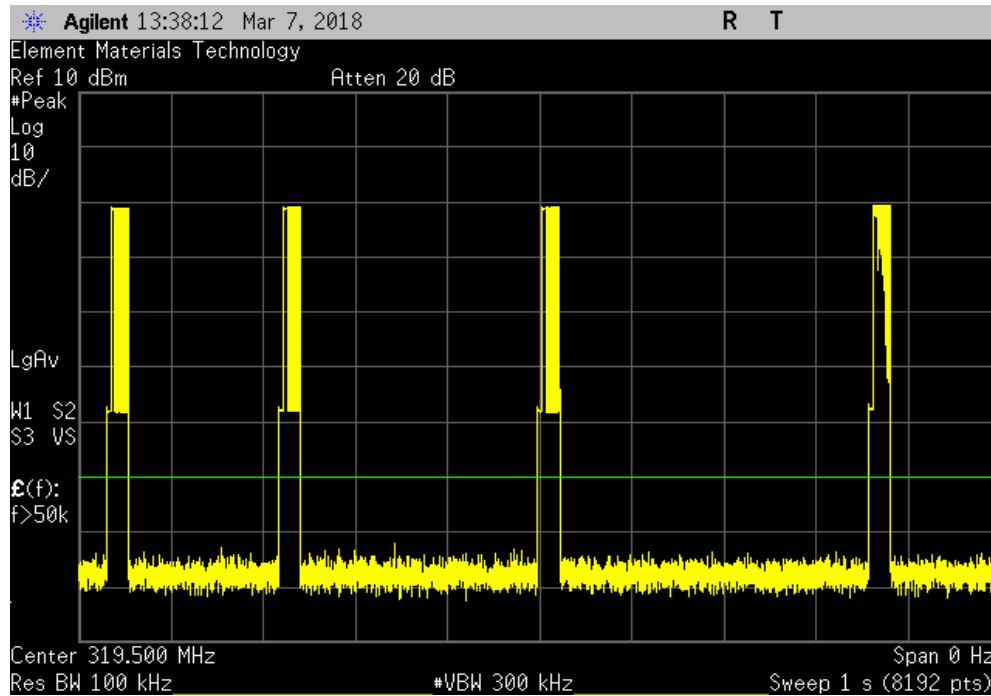

| 5s Interval | | | | | | |
|-------------|----------------------------|----------------------------|----------------------------|-------|--------|--|
| | Pulse Width Type 1 (ms) | Pulse Width Type 2 (ms) | Pulse Width Type 3 (ms) | Limit | Result | |
| | N/A | N/A | N/A | N/A | N/A | |

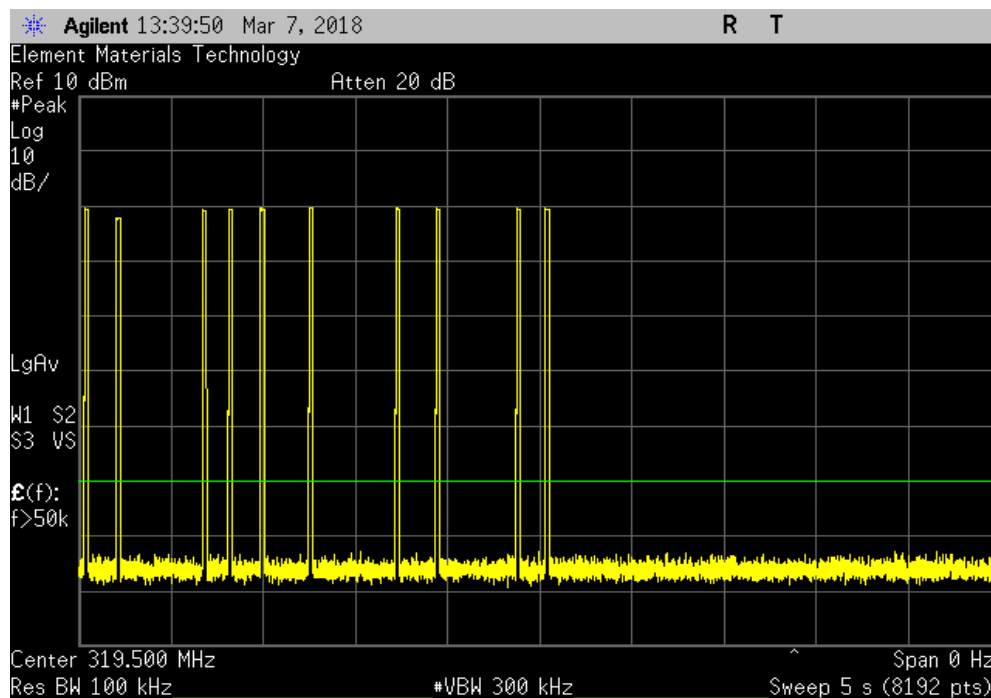

DUTY CYCLE



XMI 2017.12.13

| 10s Interval | | | | | | |
|--------------|----------------------------|----------------------------|----------------------------|-------|--------|--|
| | Pulse Width Type 1 (ms) | Pulse Width Type 2 (ms) | Pulse Width Type 3 (ms) | Limit | Result | |
| | N/A | N/A | N/A | N/A | N/A | |

