



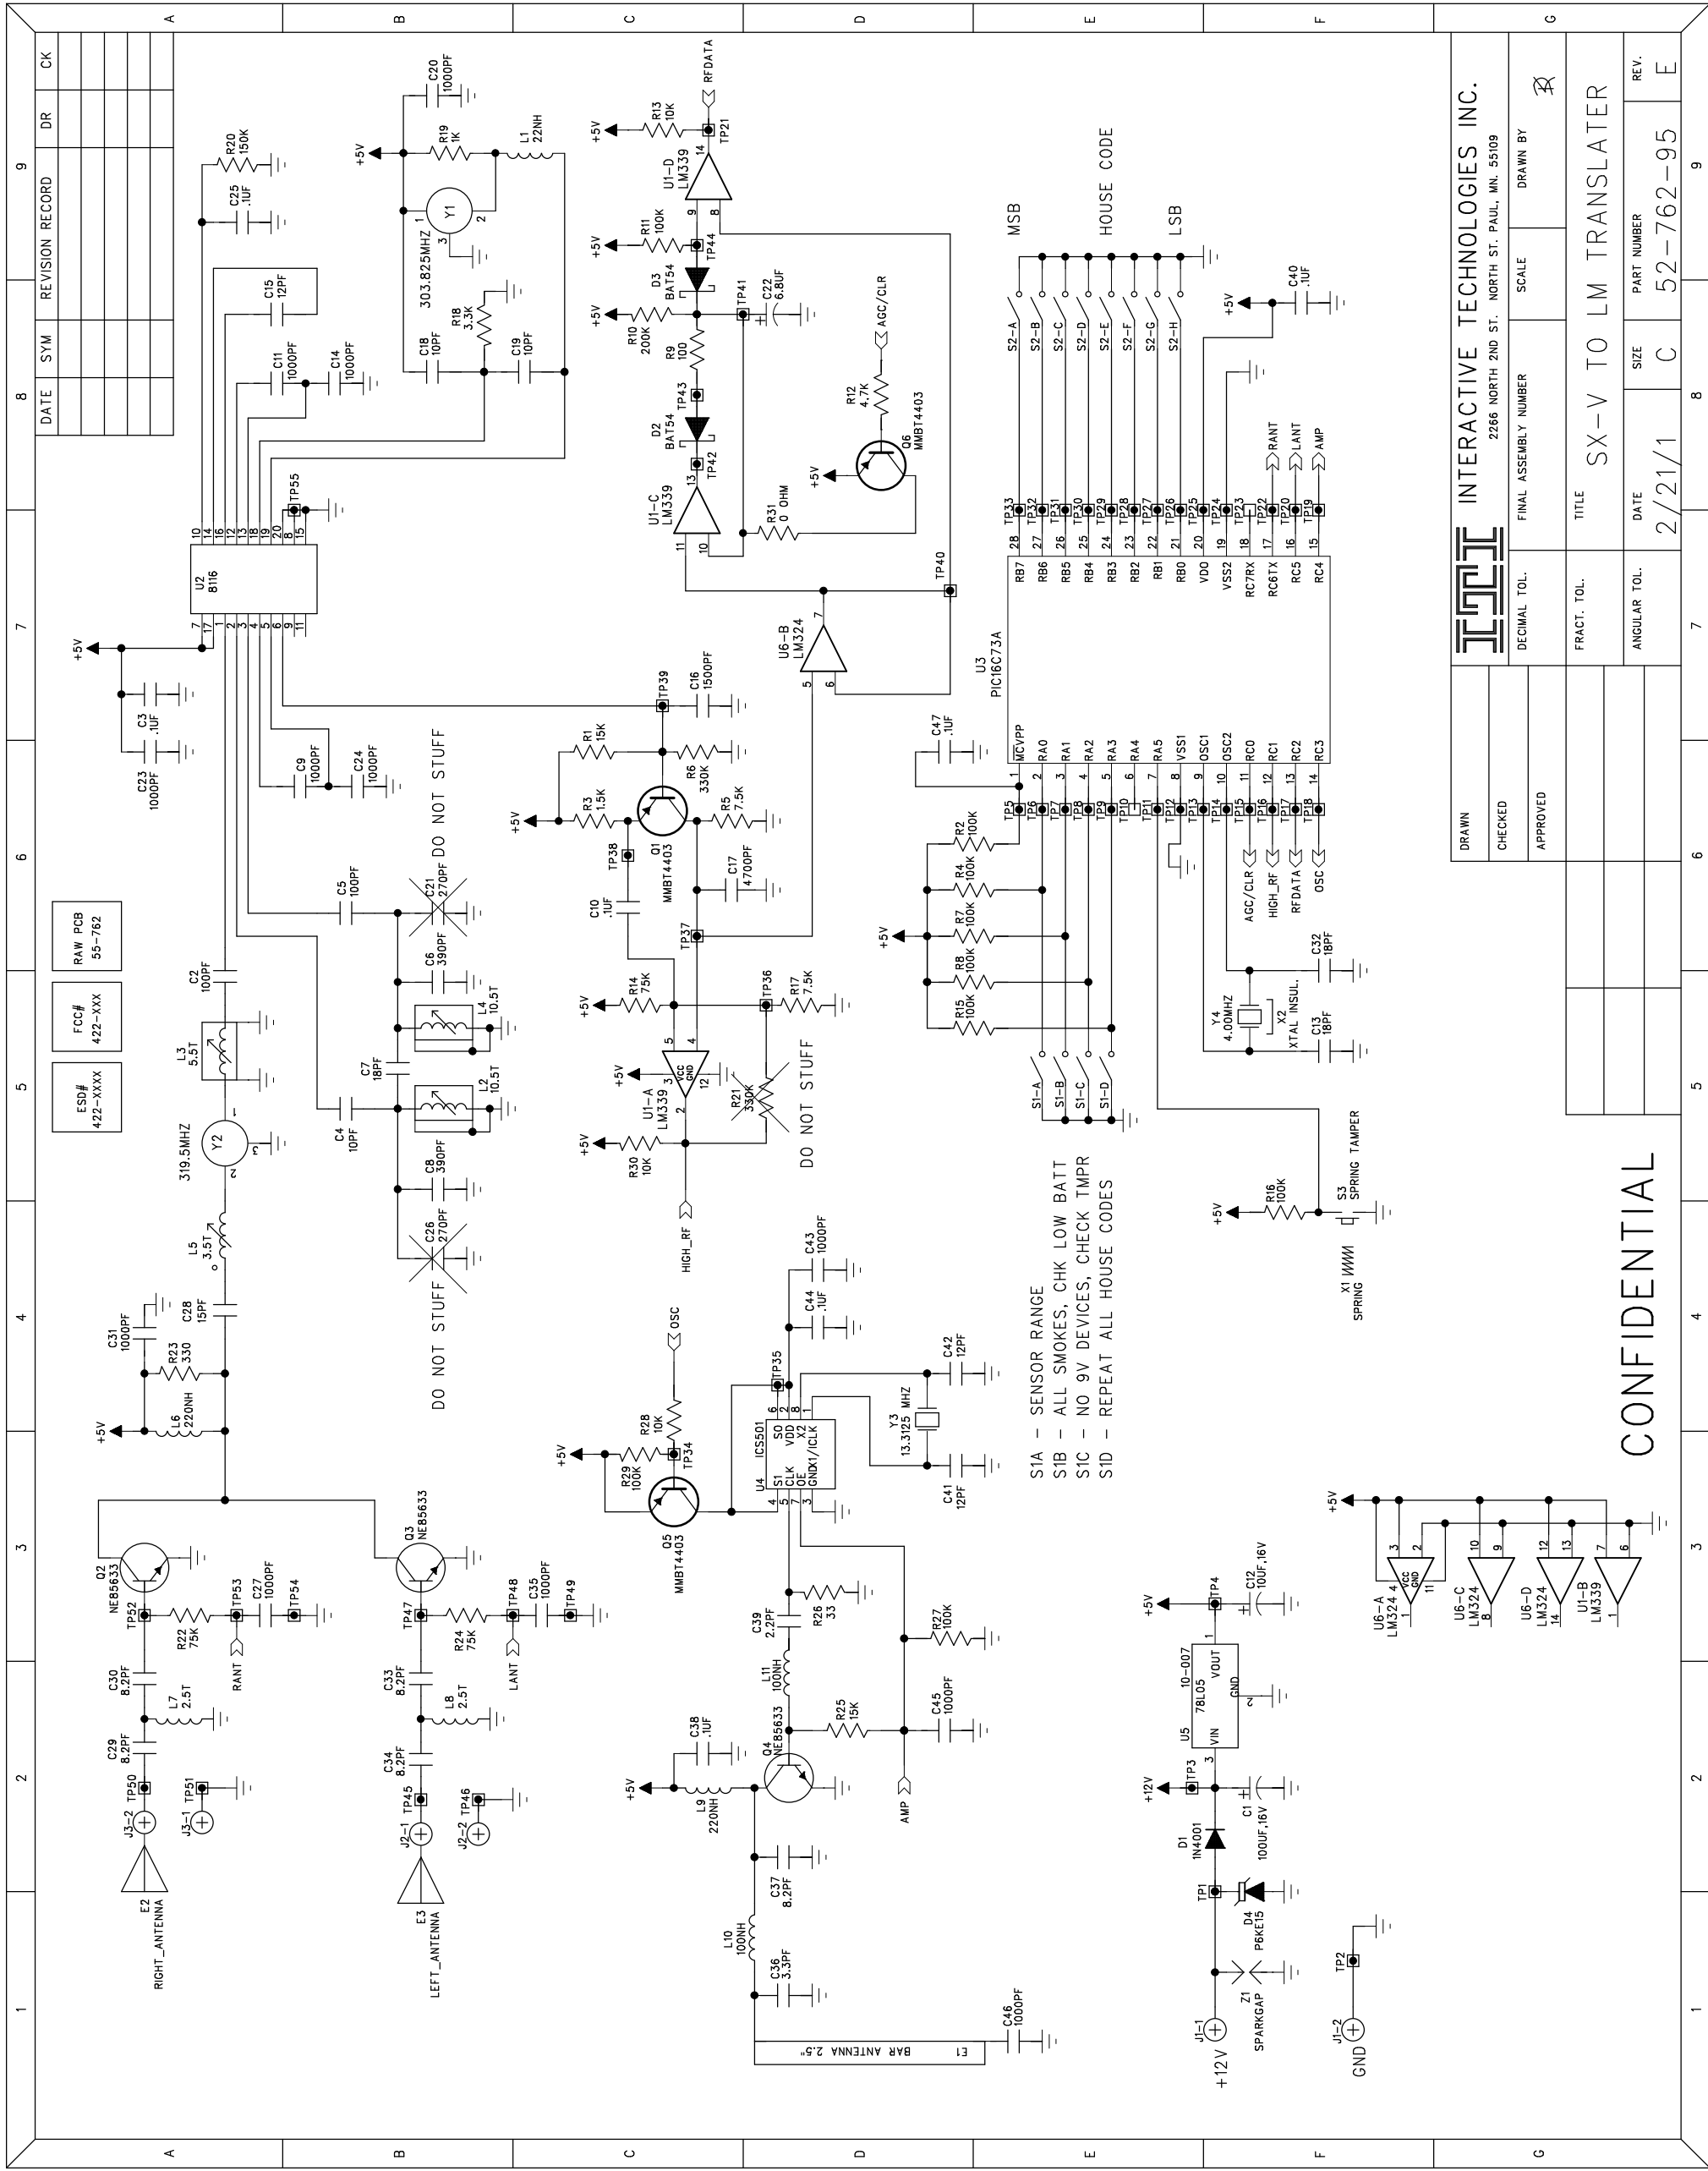


CONFIDENTIAL

REV.	ECO#	DATE	CHANGED BY



WIRE ENTRY

WIRE ENTRY

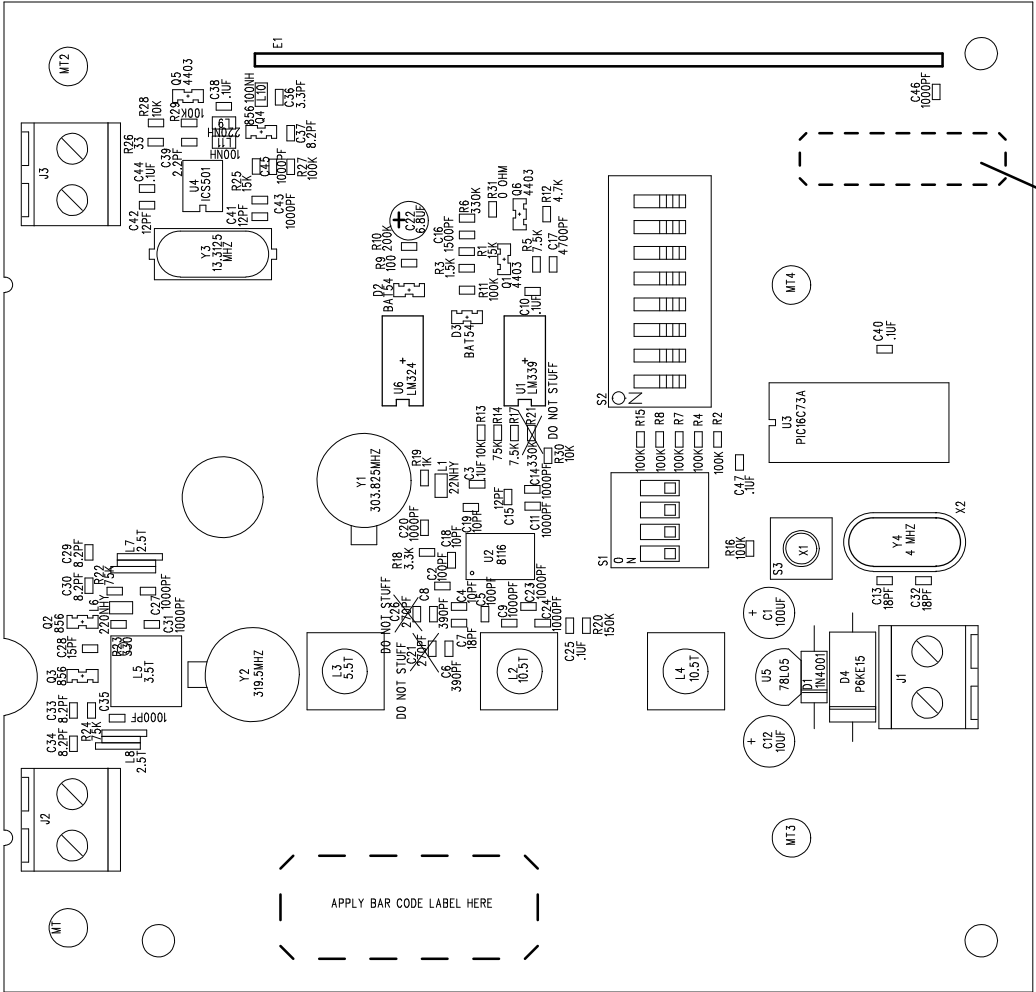

NOTE:

- 1) DO NOT CRIMP OR BEND LEADS OF Y1,Y2,Y4.
- 2) 56-762 CONTAINS EVERYTHING SHOWN EXCEPT X1 (TAMPER SPRING)
- 3) MAXIMUM FINISHED LEAD LENGTH OF .062", EXCEPT J1-3.
- 4) ALL COMPONENTS TO BE MOUNTED AS FLUSH AS POSSIBLE TO BOARD
- 5) DOT ON ADJUSTABLE COILS DENOTES START OF WINDING.
- 6) S3 TO BE SECONDARY SOLDERED USING SMT SOLDER, DO NOT WASH.

CONFIDENTIAL

DRAWN BY	INTERACTIVE TECHNOLOGIES INC.
CHECKED BY	
APPROVED BY	
DEC. TOL.	N/A
TOP LEVEL ASSY. #	60-
SCALE	
DRAWN BY	
FRAC. TOL.	N/A
TITLE	SX-V TO LM TRANSLATER PARTS PLACEMENT
ANG. TOL.	N/A
DATE	2/21/1
PART NUMBER	C
REV.	57-762 -95 E