

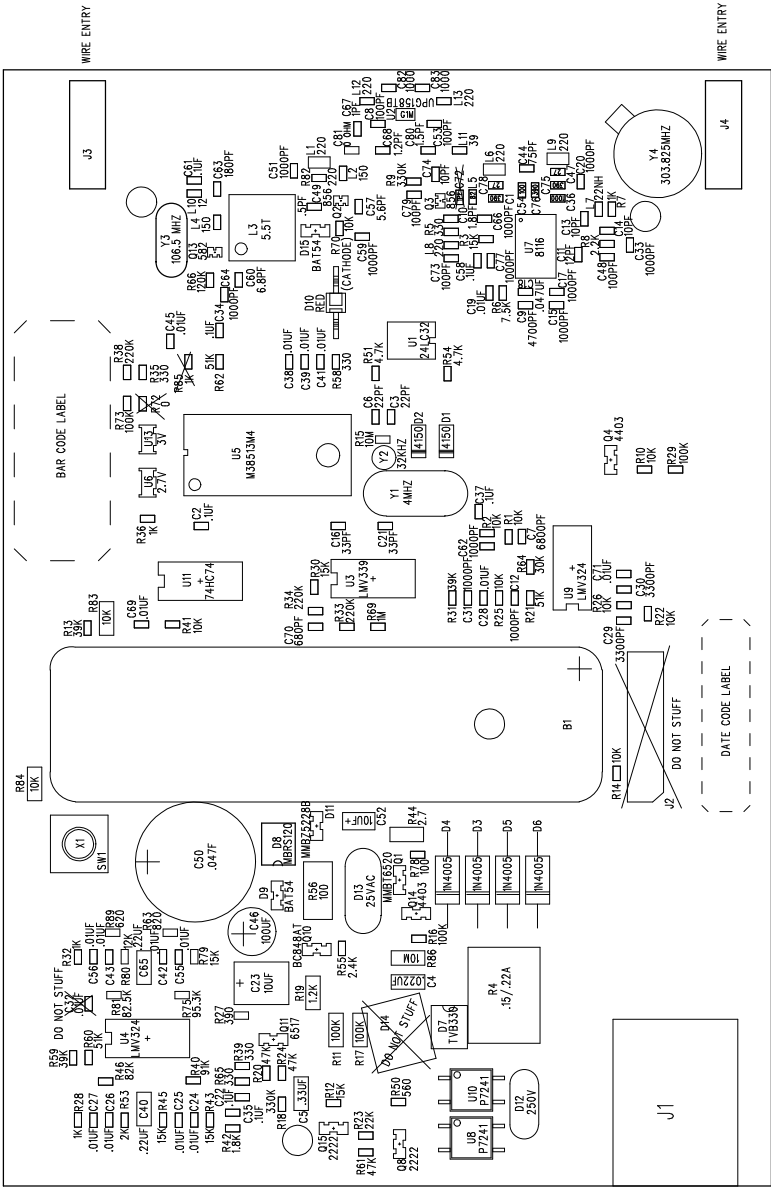



REV.	ECO#	DATE	CHANGED BY
A2	210380	10/1/1	DK
A3	210468	12/12/1	DK
A4	210175	3/25/2	DK
A5	220147	4/3/2	DK
B		7/9/2	DK
C	220289	7/31/2	DK
D		9/9/2	DK
E	220324	10/2/2	DK

LED insertion detail

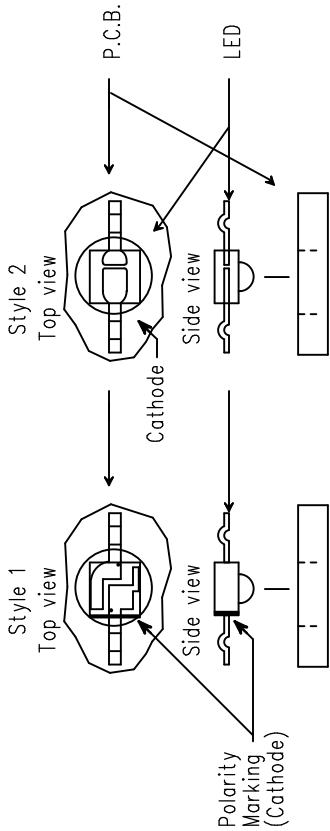

NOTE:

- 1) 56-786 CONTAINS EVERYTHING SHOWN.
- 2) SW1 TO BE SECONDARY SOLDERED USING NO-CLEAN FLUX, DO NOT WASH
- 3) MAXIMUM FINISHED LEAD LENGTH OF .062".
- 4) ALL COMPONENTS TO BE MOUNTED AS FLUSH AS POSSIBLE TO BOARD
- 5) DOT ON ADJUSTABLE COILS DENOTES START OF WINDING.

CONFIDENTIAL

DRAWN BY	INTERACTIVE TECHNOLOGIES INC.			
CHECKED BY				
APPROVED BY	DEC. TOL.	TOP LEVEL ASSY. #	SCALE	DRAWN BY
	N/A			
	FRAC. TOL.	TITLE (top side)		
	N/A	T.I.M. PARTS PLACEMENT		
	ANG. TOL.	DATE	SIZE	PART NUMBER
	N/A	10/2/2	B	57-786
				REV. E