


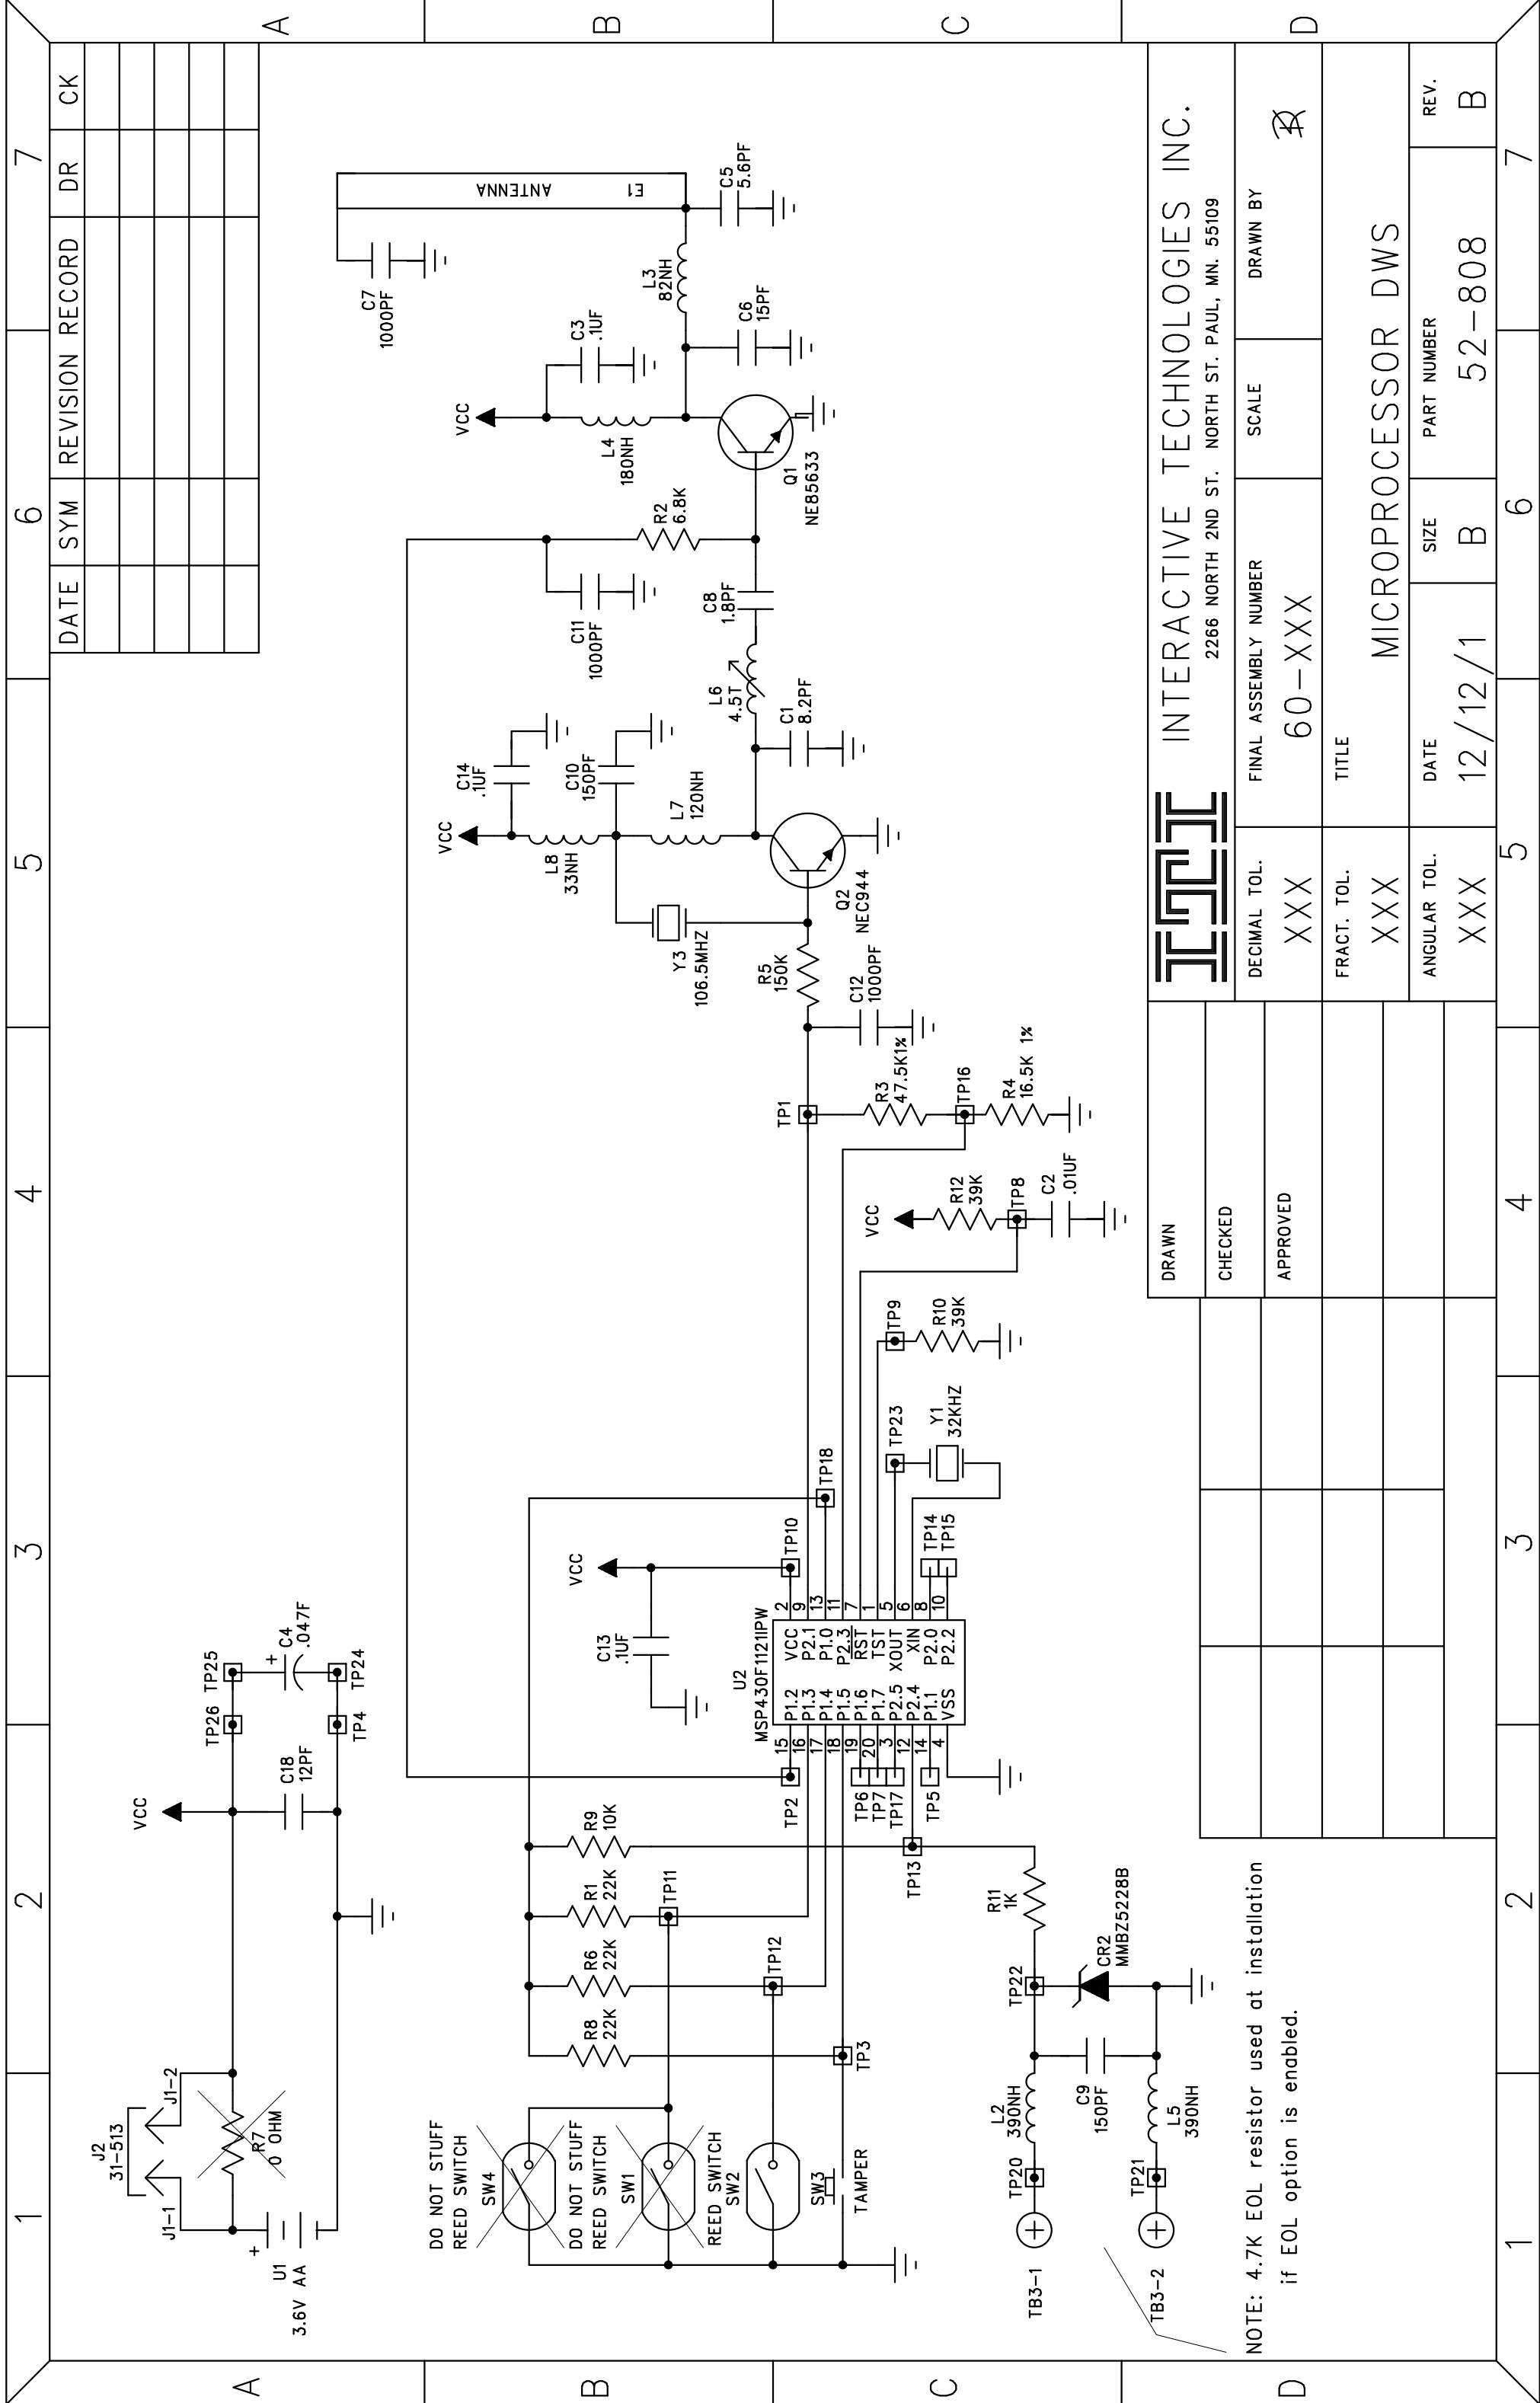

1		2		3		4		5		6		7						
DATE STAMP LOCATION PLACE ON SIDE OF BATTERY														DATE	SYM	REVISION RECORD	DR	CK

NOTES:

- 1) ALL COMPONENTS TO BE MOUNTED AS FLUSH AS POSSIBLE TO PCB.
- 2) DOT ON ADJUSTABLE COILS DENOTES START OF WINDING.
- 3) DO NOT CRIMP OR BEND LEADS OF Y3.
- 4) SW3 TO BE SECONDARY SOLDERED USING SMT SOLDER, DO NOT WASH.

*FREQ CHART *		DRAWN		INTERACTIVE TECHNOLOGIES INC.		
319.5	106.500	CHECKED		2266 NORTH 2ND ST. NORTH ST. PAUL, MN. 55109		
319.4	106.467	APPROVED		FINAL ASSEMBLY NUMBER	SCALE	DRAWN BY
319.0	106.333			60-	2:1	✕
317.0	105.667			TITLE MICROPROCESSOR DWS		
FREQ.	Y2 (MHZ)			PARTS PLACEMENT DIAGRAM		
		ANGULAR TOL.	DATE	SIZE	PART NUMBER	REV.
		XXX	12/12/1	B	57 -808	B
1	2	3	4	5	6	7