

**M. Flom Associates, Inc. - Global Compliance Center**

3356 North San Marcos Place, Suite 107, Chandler, Arizona 85225-7176

www.mflom.com general@mflom.com (480) 926-3100, FAX: 926-3598

Date of Report: June 22, 2001
Date of Submission: August 1, 2001

Federal Communications Commission
Via: Electronic Filing

Attention: Authorization & Evaluation Division

Applicant: Telex Communications, Inc.
Equipment: BTR-700
FCC ID: B5DM516
FCC Rules: 74H

Gentlemen:

On behalf of the Applicant, enclosed please find Application Form 731, Engineering Test Report and all pertinent documentation, the whole for approval of the referenced equipment as shown.

Filing fees are attached.

We trust the same is in order. Should you need any further information, kindly contact the writer who is authorized to act as agent.

Sincerely yours,

A handwritten signature in black ink, reading 'M. Flom P. Eng.' with a stylized flourish at the end.

Morton Flom, P. Eng.

enclosure(s)
cc: Applicant
MF/cvr

LIST OF EXHIBITS
(FCC **CERTIFICATION** (TRANSMITTERS) - REVISED 9/28/98)

APPLICANT: Telex Communications, Inc.

FCC ID: B5DM516

BY APPLICANT:

1. LETTER OF AUTHORIZATION
2. IDENTIFICATION DRAWINGS, 2.1033(c)(11)
 - x LABEL
 - x LOCATION OF LABEL
 - x COMPLIANCE STATEMENT
 - x LOCATION OF COMPLIANCE STATEMENT
3. PHOTOGRAPHS, 2.1033(c)(12) x
4. DOCUMENTATION: 2.1033(c)
 - (3) USER MANUAL x
 - (9) TUNE UP INFO x
 - (10) SCHEMATIC DIAGRAM x
 - (10) CIRCUIT DESCRIPTION x
 - BLOCK DIAGRAM x
 - PARTS LIST x
 - ACTIVE DEVICES x

BY M.F.A. INC.

- A. TESTIMONIAL & STATEMENT OF CERTIFICATION
- B. STATEMENT OF QUALIFICATIONS



M. Flom Associates, Inc. - Global Compliance Center

3356 North San Marcos Place, Suite 107, Chandler, Arizona 85225-7176

www.mflom.com general@mflom.com (480) 926-3100, FAX: 926-3598

T R A N S M I T T E R C E R T I F I C A T I O N

of

FCC ID: B5DM516

MODEL: BTR-700

to

FEDERAL COMMUNICATIONS COMMISSION

Rule Part(s) 74H

DATE OF REPORT: June 22, 2001

ON THE BEHALF OF THE APPLICANT:

Telex Communications, Inc.

AT THE REQUEST OF:

P.O.

Telex Communications, Inc.
8601 E. Cornhusker Highway
P.O. Box 5579
Lincoln, NE 68505-5579

Attention of:

Charles E. Conner, Project Engineer
(402) 467-5321; FAX: -3279
E-mail: charlie.conner@telex.com

SUPERVISED BY:

A handwritten signature in black ink, reading 'Morton Flom P. Eng.', is positioned above the printed name.

Morton Flom, P. Eng.

THE APPLICANT HAS BEEN CAUTIONED AS TO THE FOLLOWING:

15.21 INFORMATION TO USER.

The users manual or instruction manual for an intentional radiator shall caution the user that changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

15.27(a) SPECIAL ACCESSORIES.

Equipment marketed to a consumer must be capable of complying with the necessary regulations in the configuration in which the equipment is marketed. Where special accessories, such as shielded cables and/or special connectors are required to enable an unintentional or intentional radiator to comply with the emission limits in this part, the equipment must be marketed with, i.e. shipped and sold with, those special accessories. However, in lieu of shipping or packaging the special accessories with the unintentional or intentional radiator, the responsible party may employ other methods of ensuring that the special accessories are provided to the consumer, without additional charge.

Information detailing any alternative method used to supply the special accessories for a grant of equipment authorization or retained in the verification records, as appropriate. The party responsible for the equipment, as detailed in § 2.909 of this chapter, shall ensure that these special accessories are provided with the equipment. The instruction manual for such devices shall include appropriate instructions on the first page of text concerned with the installation of the device that these special accessories must be used with the device. It is the responsibility of the user to use the needed special accessories supplied with the equipment.

TABLE OF CONTENTS

<u>RULE</u>	<u>DESCRIPTION</u>	<u>PAGE</u>
	Test Report	1
2.1033(c)	General Information Required	2
2.1033(c)(14)	Rule Summary	5
	Standard Test Conditions and Engineering Practices	6
2.1046(a)	Carrier Output Power (Conducted)	7
2.1046(a)	R. F. Power Output (Radiated)	9
2.1051	Unwanted Emissions (Transmitter Conducted)	11
2.1053(a)	Field Strength of Spurious Radiation	14
2.1049(c)(1)	Emission Masks (Occupied Bandwidth)	18
2.1047(a)	Audio Frequency Response	37
2.1047(b)	Modulation Limiting	39
2.1055(a)(1)	Frequency Stability (Temperature Variation)	41
2.1055(b)(1)	Frequency Stability (Voltage Variation)	44
2.202(g)	Necessary Bandwidth and Emission Bandwidth	45

PAGE NO. 1 of 45.

Required information per ISO/IEC Guide 25-1990, paragraph 13.2:

a) TEST REPORT

b) Laboratory: M. Flom Associates, Inc.
(FCC: 31040/SIT) 3356 N. San Marcos Place, Suite 107
(Canada: IC 2044) Chandler, AZ 85225

c) Report Number: d0160016

d) Client: Telex Communications, Inc.
8601 E. Cornhusker Highway
P.O. Box 5579
Lincoln, NE 68505-5579

e) Identification: BTR-700
FCC ID: B5DM516
EUT Description: Wireless Intercom

f) EUT Condition: Not required unless specified in individual tests.

g) Report Date: June 22, 2001
EUT Received: 2001-Jun-08

h, j, k): As indicated in individual tests.

i) Sampling method: No sampling procedure used.

l) Uncertainty: In accordance with MFA internal quality manual.

m) Supervised by:



Morton Flom, P. Eng.

n) Results: The results presented in this report relate only to the item tested.

o) Reproduction: This report must not be reproduced, except in full, without written permission from this laboratory.

PAGE NO. 2 of 45.

LIST OF GENERAL INFORMATION REQUIRED FOR CERTIFICATIONIN ACCORDANCE WITH FCC RULES AND REGULATIONS,
VOLUME II, PART 2 AND TO

74H

Sub-part 2.1033(c)(1): NAME AND ADDRESS OF APPLICANT:Telex Communications, Inc.
8601 E. Cornhusker Highway
P.O. Box 5579
Lincoln, NE 68505-5579MANUFACTURER:

Applicant

(c)(2): FCC ID: B5DM516MODEL NO: BTR-700(c)(3): INSTRUCTION MANUAL(S):

PLEASE SEE ATTACHED EXHIBITS

(c)(4): TYPE OF EMISSION: 92K0F3E(c)(5): FREQUENCY RANGE, MHz: 518 to 608(c)(6): POWER RATING, Watts: 0.100 Conducted,
0.0649 Radiated
 Switchable Variable x N/A


FCC GRANT NOTE:

BC - The output power is
continuously variable from
the value listed in this
entry to 5%-10% of the
value listed.(c)(7): MAXIMUM POWER RATING, Watts: 0.250DUT RESULTS:Passes x Fails

PAGE NO.

3 of 45.

M. Flom Associates, Inc. is accredited by the American Association for Laboratory Accreditation (A2LA) as shown in the scope below.



**THE AMERICAN
ASSOCIATION
FOR LABORATORY
ACCREDITATION**

ACCREDITED LABORATORY

A2LA has accredited


M. FLOM ASSOCIATES, INC.
Chandler, AZ

for technical competence in the field of

Electrical (EMC) Testing


The accreditation covers the specific tests and types of tests listed on the agreed scope of accreditation. This laboratory meets the requirements of ISO/IEC 17025 - 1999 "General Requirements for the Competence of Testing and Calibration Laboratories" and any additional program requirements in the identified field of testing. Testing and calibration laboratories that comply with this International Standard also operate in accordance with ISO 9001 or ISO 9002.

Presented this 2nd day of March, 2001.



President
For the Accreditation Council
Certificate Number 1008.01
Valid to December 31, 2002

For tests or types of tests to which this accreditation applies, please refer to the laboratory's Electrical (EMC) Scope of Accreditation



American Association for Laboratory Accreditation

SCOPE OF ACCREDITATION TO ISO/IEC 17025:1999


M. FLOM ASSOCIATES, INC.
Electronic Testing Laboratory
3356 North San Marcos Place, Suite 107
Chandler, AZ 85225
Morton Flom Phone: 480 926 3100

ELECTRICAL (EMC)

Valid to: December 31, 2002 Certificate Number: 1008-01

In recognition of the successful completion of the A2LA evaluation process, accreditation is granted to this laboratory to perform the following electromagnetic compatibility tests:

Tests	Standard(s)
RF Emissions	FCC Part 15 (Subparts B and C) using ANSI C63.4-1992; CISPR 11; CISPR 13; CISPR 14; CISPR 22; EN 55011; EN 55013; EN 55014; EN 55022; EN 50081-1; EN 50081-2; ICES-003; AS/NZS 1044; AS/NZS 1053; AS/NZS 3548; AS/NZS 4251.1; CNS 13438
Harmonic Currents	EN 61000-3-2
Fluctuation and Flicker	EN 61000-3-3
RF Immunity	EN: 50082-1, 50082-2 (both excluding "Power Frequency Magnetic Field Immunity" and "Voltage Dips, Short Interruptions, and Line Voltage Variations"); AS/NZS 4251.1
Radiated Susceptibility	EN 61000-4-3; ENV 50140; ENV 50204; IEC 1000-4-3; IEC 801-3
EFT	EN 61000-4-4; IEC 1000-4-4; IEC 801-4
Surge	EN 61000-4-5; ENV 50142; IEC 1000-4-5; IEC 801-5
47 CFR (FCC)	2, 21, 22, 23, 24, 74, 80, 87, 90, 95, 97



5301 Buckeystown Pike, Suite 350 • Frederick, MD 21704-8373 • Phone: 301-644 3248 • Fax: 301-662 2974

"This laboratory is accredited by the American Association for Laboratory Accreditation (A2LA) and the results shown in this report have been determined in accordance with the laboratory's terms of accreditation unless stated otherwise in the report."

Should this report contain any data for tests for which we are not accredited, or which have been undertaken by a subcontractor that is not A2LA accredited, such data would not covered by this laboratory's A2LA accreditation.

PAGE NO. 4 of 45.

Subpart 2.1033 (continued)

(c)(8): VOLTAGES & CURRENTS IN ALL ELEMENTS IN FINAL R. F. STAGE,
INCLUDING FINAL TRANSISTOR OR SOLID STATE DEVICE:

COLLECTOR CURRENT, A = per manual
COLLECTOR VOLTAGE, Vdc = per manual
SUPPLY VOLTAGE, Vac = 115

(c)(9): TUNE-UP PROCEDURE:

PLEASE SEE ATTACHED EXHIBITS

(c)(10): CIRCUIT DIAGRAM/CIRCUIT DESCRIPTION:

Including description of circuitry & devices provided for determining and stabilizing frequency, for suppression of spurious radiation, for limiting modulation and limiting power.

PLEASE SEE ATTACHED EXHIBITS

(c)(11): LABEL INFORMATION:

PLEASE SEE ATTACHED EXHIBITS

(c)(12): PHOTOGRAPHS:

PLEASE SEE ATTACHED EXHIBITS

(c)(13): DIGITAL MODULATION DESCRIPTION:

 ATTACHED EXHIBITS
 x N/A

(c)(14): TEST AND MEASUREMENT DATA:

FOLLOWS

PAGE NO.

5 of 45.

Sub-part
2.1033(c)(14):TEST AND MEASUREMENT DATA

All tests and measurement data shown were performed in accordance with FCC Rules and Regulations, Volume II; Part 2, Sub-part J, Sections 2.947, 2.1033(c), 2.1041, 2.1046, 2.1047, 2.1079, 2.1051, 2.1053, 2.1055, 2.1057 and the following individual Parts:

- _____ 21 - Domestic Public Fixed Radio Services
- _____ 22 - Public Mobile Services
- _____ 22 Subpart H - Cellular Radiotelephone Service
- _____ 22.901(d) - Alternative technologies and auxiliary services
- _____ 23 - International Fixed Public Radiocommunication services
- _____ 24 - Personal Communications Services
- x 74 Subpart H - Low Power Auxiliary Stations
- _____ 80 - Stations in the Maritime Services
- _____ 80 Subpart E - General Technical Standards
- _____ 80 Subpart F - Equipment Authorization for Compulsory Ships
- _____ 80 Subpart K - Private Coast Stations and Marine Utility
Stations
- _____ 80 Subpart S - Compulsory Radiotelephone Installations for
Small Passenger Boats
- _____ 80 Subpart T - Radiotelephone Installation Required for
Vessels on the Great Lakes
- _____ 80 Subpart U - Radiotelephone Installations Required by the
Bridge-to-Bridge Act
- _____ 80 Subpart V - Emergency Position Indicating Radiobeacons
(EPIRB'S)
- _____ 80 Subpart W - Global Maritime Distress and Safety System
(GMDSS)
- _____ 80 Subpart X - Voluntary Radio Installations
- _____ 87 - Aviation Services
- _____ 90 - Private Land Mobile Radio Services
- _____ 94 - Private Operational-Fixed Microwave Service
- _____ 95 Subpart A - General Mobile Radio Service (GMRS)
- _____ 95 Subpart C - Radio Control (R/C) Radio Service
- _____ 95 Subpart D - Citizens Band (CB) Radio Service
- _____ 95 Subpart E - Family Radio Service
- _____ 95 Subpart F - Interactive Video and Data Service (IVDS)
- _____ 97 - Amateur Radio Service
- _____ 101 - Fixed Microwave Services

PAGE NO.

6 of 45.

STANDARD TEST CONDITIONS
and
ENGINEERING PRACTICES

Except as noted herein, the following conditions and procedures were observed during the testing:

In accordance with ANSI C63.4-1992/2000 Draft, section 6.1.9, and unless otherwise indicated in the specific measurement results, the ambient temperature of the actual EUT was maintained within the range of 10° to 40°C (50° to 104 °F) unless the particular equipment requirements specify testing over a different temperature range. Also, unless otherwise indicated, the humidity levels were in the range of 10% to 90% relative humidity.

Prior to testing, the EUT was tuned up in accordance with the manufacturer's alignment procedures. All external gain controls were maintained at the position of maximum and/or optimum gain throughout the testing.

Measurement results, unless otherwise noted, are worst case measurements.

PAGE NO. 7 of 45.
NAME OF TEST: Carrier Output Power (Conducted)
SPECIFICATION: 47 CFR 2.1046(a)
GUIDE: ANSI/TIA/EIA-603-1992, Paragraph 2.2.1
TEST EQUIPMENT: As per attached page

MEASUREMENT PROCEDURE


1. The EUT was connected to a resistive coaxial attenuator of normal load impedance, and the unmodulated output power was measured by means of an R. F. Power Meter.
2. Measurement accuracy is $\pm 3\%$.

MEASUREMENT RESULTS
(Worst case)

FREQUENCY OF CARRIER, MHz = 563.0, 554.2, 571.8


POWER SETTING	R. F. POWER, WATTS
Conducted	0.100

PERFORMED BY:


 Doug Noble, B.A.S. E.E.T.

TRANSMITTER POWER CONDUCTED MEASUREMENTS

TEST 1: R. F. POWER OUTPUT
TEST 2: FREQUENCY STABILITY

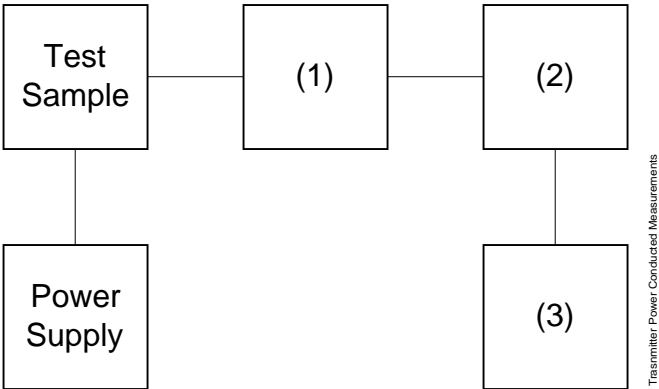

Asset	Description (as applicable)	s/n
(1)	<u>COAXIAL ATTENUATOR</u>	
i00122	Narda 766-10	7802
i00123	Narda 766-10	7802A
i00069	Bird 8329 (30 dB)	1006
i00113	Sierra 661A-3D	1059
(2)	<u>POWER METERS</u>	
i00014	HP 435A	1733A05836
i00039	HP 436A	2709A26776
i00020	HP 8901A POWER MODE	2105A01087
(3)	<u>FREQUENCY COUNTER</u>	
i00042	HP 5383A	1628A00959
i00019	HP 5334B	2704A00347
i00020	HP 8901A FREQUENCY MODE	2105A01087

PAGE NO. 9 of 45.

NAME OF TEST: R. F. Power Output (Radiated)

SPECIFICATION: 47 CFR 2.1046(a)

TEST EQUIPMENT: As per attached page

MEASUREMENT PROCEDURE (RADIATED)

1. The EUT was placed on an open-field site and its radiated field strength at a known distance was measured by means of a spectrum analyzer. Equivalent loading was calculated from the equation $P_t = ((E \times R)^2 / 49.2)$ watts, where $R = 3m$.
2. Measurement accuracy is ± 1.5 dB.

MEASUREMENT RESULTS


g0160067: 2001-Jun-14 Thu 15:33:00
STATE: 2:High Power

FREQUENCY TUNED, MHz	FREQUENCY EMISSION, MHz	METER, dBuV	CF, dB	ERP, dBm	ERP, Watts
554.100000	554.097500	90.49	24.74	17.9	≤ 0.0649
563.000000	563.000000	90.45	25.04	18.1	≤ 0.0649
571.900000	571.897500	88.73	25.34	16.7	≤ 0.0649

SUPERVISED BY:


Doug Noble, B.A.S. E.E.T.

TRANSMITTER RADIATED MEASUREMENTS

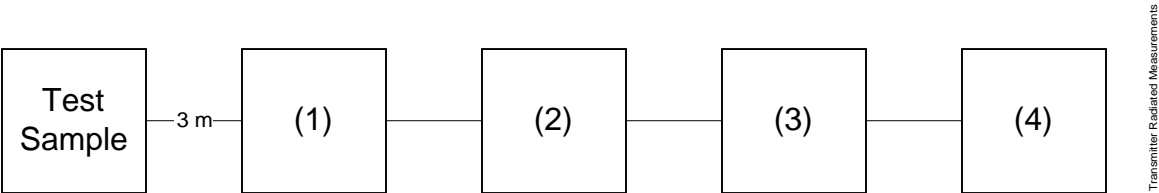

Asset	Description	s/n
	(as applicable)	
(1)	<u>TRANSDUCER</u>	
i00091	Emco 3115	001469
i00089	Aprcl Log Periodic	001500
(2)	<u>HIGH PASS FILTER</u>	
i00	Narda μ PAD (In-Band Only)	
i00	Trilithic	
	(Out-Of-Band Only)	
(3)	<u>PREAMP</u>	
i00028	HP 8449 (+30 dB)	2749A00121
(4)	<u>SPECTRUM ANALYZER</u>	
i00048	HP 8566B	2511A01467
i00057	HP 8557A	1531A00191
i00029	HP 8563E	3213A00104


PAGE NO. 11 of 45.
NAME OF TEST: Unwanted Emissions (Transmitter Conducted)
SPECIFICATION: 47 CFR 2.1051
GUIDE: ANSI/TIA/EIA-603-1992, Paragraph 2.2.13
TEST EQUIPMENT: As per attached page

MEASUREMENT PROCEDURE

1. The emissions were measured for the worst case as follows:
(a): within a band of frequencies defined by the carrier frequency plus and minus one channel.
(b): from the lowest frequency generated in the EUT and to at least the 10th harmonic of the carrier frequency, or 40 GHz, whichever is lower.
2. The magnitude of spurious emissions that are attenuated more than 20 dB below the permissible value need not be specified.
3. MEASUREMENT RESULTS: ATTACHED FOR WORST CASE

FREQUENCY OF CARRIER, MHz = 563.0, 554.2, 571.8
SPECTRUM SEARCHED, GHz = 0 to 10 x F_c
MAXIMUM RESPONSE, Hz = 6310
ALL OTHER EMISSIONS = ≥ 20 dB BELOW LIMIT

PERFORMED BY:


Doug Noble, B.A.S. E.E.T.


PAGE NO.

12 of 45.

TRANSMITTER SPURIOUS EMISSION

TEST A. OCCUPIED BANDWIDTH (IN-BAND SPURIOUS)

TEST B. OUT-OF-BAND SPURIOUS

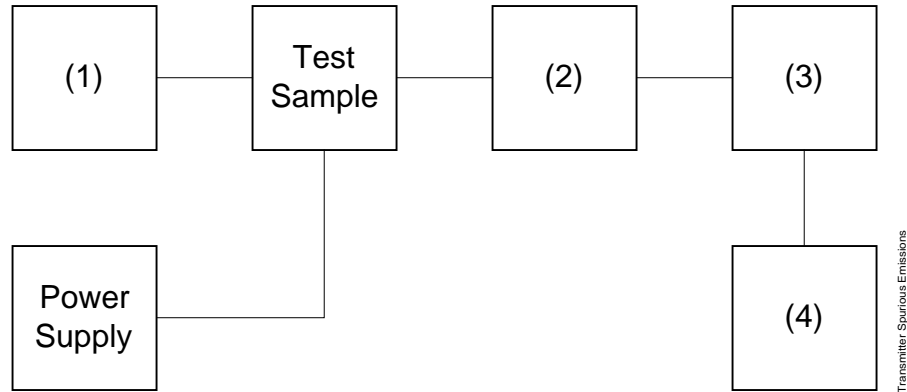

Asset Description (as applicable)	s/n
(1) <u>AUDIO OSCILLATOR/GENERATOR</u>	
i00010 HP 204D	1105A04683
i00017 HP 8903A	2216A01753
i00012 HP 3312A	1432A11250
(2) <u>COAXIAL ATTENUATOR</u>	
i00122 Narda 766-10	7802
i00123 Narda 766-10	7802A
i00069 Bird 8329 (30 dB)	1006
i00113 Sierra 661A-3D	1059
(3) <u>FILTERS; NOTCH, HP, LP, BP</u>	
i00126 Eagle TNF-1	100-250
i00125 Eagle TNF-1	50-60
i00124 Eagle TNF-1	250-850
(4) <u>SPECTRUM ANALYZER</u>	
i00048 HP 8566B	2511A01467
i00029 HP 8563E	3213A00104

PAGE NO. 13 of 45.

NAME OF TEST: Unwanted Emissions (Transmitter Conducted)

LIMIT(S), dBc: $-(43+10 \times \text{LOG } P) = -33$ (0.1 Watt)
 $-(43+10 \times \text{LOG } P) = -23$ (0.01 Watt)

Low Power g0160065: 2001-Jun-11 Mon 16:09:00

FREQUENCY TUNED, MHz	FREQUENCY EMISSION, MHz	LEVEL, dBm	LEVEL, dBc	MARGIN, dB
563.000000	1125.926000	-34.3	-42	-21.3
563.000000	1689.115000	-61.8	-69.5	-48.8
563.000000	2251.844000	-66.4	-74.1	-53.4
563.000000	2814.808000	-58.6	-66.3	-45.6
563.000000	3378.045000	-73.4	-81.1	-60.4
563.000000	3940.733000	-71.8	-79.5	-58.8
563.000000	4503.689000	-69.8	-77.5	-56.8
563.000000	5067.151000	-74.4	-82.1	-61.4
563.000000	5630.179000	-75.1	-82.8	-62.1
563.000000	6193.346000	-69.2	-76.9	-56.2
563.000000	6756.478000	-69.3	-77	-56.3
563.000000	7318.587000	-68.6	-76.3	-55.6
563.000000	7882.177000	-69.4	-77.1	-56.4
563.000000	8444.921000	-69.4	-77.1	-56.4

High Power g0160064: 2001-Jun-11 Mon 16:07:00

FREQUENCY TUNED, MHz	FREQUENCY EMISSION, MHz	LEVEL, dBm	LEVEL, dBc	MARGIN, dB
563.000000	1126.079000	-21.5	-39.6	-8.5
563.000000	1689.115000	-45.4	-63.5	-32.4
563.000000	2252.154000	-43.1	-61.2	-30.1
563.000000	2815.194000	-38.5	-56.6	-25.5
563.000000	3377.765000	-45.2	-63.3	-32.2
563.000000	3941.267000	-51.8	-69.9	-38.8
563.000000	4504.317000	-51.5	-69.6	-38.5
563.000000	5067.306000	-65	-83.1	-52
563.000000	5630.165000	-63.6	-81.7	-50.6
563.000000	6193.177000	-57.7	-75.8	-44.7
563.000000	6756.236000	-57.9	-76	-44.9
563.000000	7319.215000	-59.2	-77.3	-46.2
563.000000	7882.029000	-58.4	-76.5	-45.4
563.000000	8444.606000	-60.3	-78.4	-47.3



PERFORMED BY:

Doug Noble, B.A.S. E.E.T.

PAGE NO. 14 of 45.

NAME OF TEST: Field Strength of Spurious Radiation

SPECIFICATION: 47 CFR 2.1053(a)


GUIDE: ANSI/TIA/EIA-603-1992, Paragraph 1.2.12

MEASUREMENT PROCEDURE

1.2.12.1 Definition: Radiated spurious emissions are emissions from the equipment when transmitting into a non-radiating load on a frequency or frequencies which are outside an occupied band sufficient to ensure transmission of information of required quality for the class of communications desired.

1.2.12.2 Method of Measurement


- A) Connect the equipment as illustrated
- B) Adjust the spectrum analyzer for the following settings:
 - 1) Resolution Bandwidth ≤ 3 kHz.
 - 2) Video Bandwidth ≥ 10 kHz
 - 3) Sweep Speed ≤ 2000 Hz/second
 - 4) Detector Mode = Positive Peak
- C) Place the transmitter to be tested on the turntable in the standard test site. The transmitter is transmitting into a non-radiating load which is placed on the turntable. The RF cable to this load should be of minimum length.

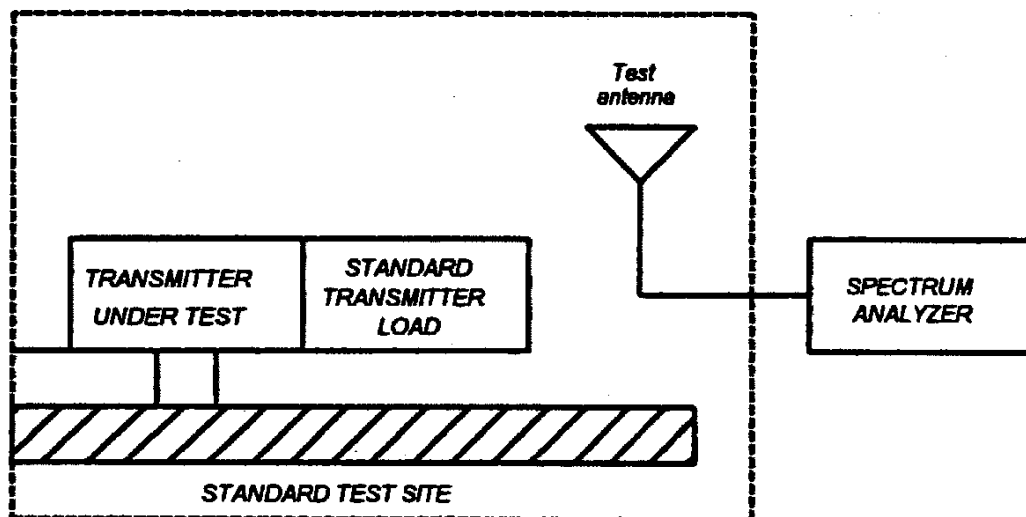

PAGE NO. 15 of 45.

NAME OF TEST: Field Strength of Spurious Radiation (Cont.)

- D) For each spurious measurement the test antenna should be adjusted to the correct length for the frequency involved. This length may be determined from a calibration ruler supplied with the equipment. Measurements shall be made from the lowest radio frequency generated in the equipment to the tenth harmonic of the carrier, except for the region close to the carrier equal to \pm the test bandwidth (see section 1.3.4.4).
- E) For each spurious frequency, raise and lower the test antenna from 1 m to 4 m to obtain a maximum reading on the spectrum analyzer with the test antenna at horizontal polarity. Repeat this procedure to obtain the highest possible reading. Record this maximum reading.
- F) Repeat step E) for each spurious frequency with the test antenna polarized vertically.

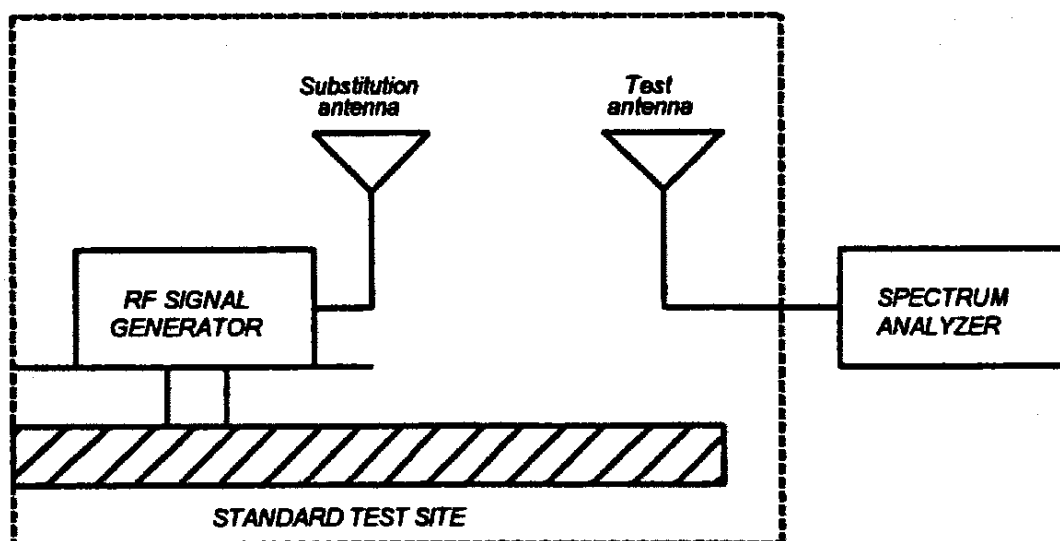

- G) Reconnect the equipment as illustrated.
- H) Keep the spectrum analyzer adjusted as in step B).
- I) Remove the transmitter and replace it with a substitution antenna (the antenna should be half-wavelength for each frequency involved). The center of the substitution antenna should be approximately at the same location as the center of the transmitter. At lower frequencies, where the substitution antenna is very long, this will be impossible to achieve when the antenna is polarized vertically. In such case the lower end of the antenna should be 0.3 m above the ground.

PAGE NO. 16 of 45.

NAME OF TEST: Field Strength of Spurious Radiation (Cont.)

- J) Feed the substitution antenna at the transmitter end with a signal generator connected to the antenna by means of a non-radiating cable. With the antennas at both ends horizontally polarized and with the signal generator tuned to a particular spurious frequency, raise and lower the test antenna to obtain a maximum reading at the spectrum analyzer. Adjust the level of the signal generator output until the previously recorded maximum reading for this set of conditions is obtained. This should be done carefully repeating the adjustment of the test antenna and generator output.
- K) Repeat step J) with both antennas vertically polarized for each spurious frequency.
- L) Calculate power in dBm into a reference ideal half-wave dipole antenna by reducing the readings obtained in steps J) and K) by the power loss in the cable between the generator and the antenna and further corrected for the gain of the substitution antenna used relative to an ideal half-wave dipole antenna.
- M) The levels recorded in step L) are absolute levels of radiated spurious emissions in dBm. The radiated spurious emissions in dB can be calculated by the following:

Radiated spurious emissions dB =
 $10\log_{10}(\text{TX power in watts}/0.001) - \text{the levels in step l)}$

NOTE: It is permissible that other antennas provided can be referenced to a dipole.

Test Equipment:

Asset Description (as applicable)	s/n	Cycle	Last Cal
<u>TRANSDUCER</u>			
i00088 EMCO 3109-B 25MHz-300MHz	2336	12 mo.	Sep-00
i00065 EMCO 3301-B Active Monopole	2635	12 mo.	Sep-00
i00089 Aprel 2001 200MHz-1GHz	001500	12 mo.	Sep-00
i00103 EMCO 3115 1GHz-18GHz	9208-3925	12 mo.	Sep-00
<u>AMPLIFIER</u>			
i00028 HP 8449A	2749A00121	12 mo.	Mar-01
<u>SPECTRUM ANALYZER</u>			
i00029 HP 8563E	3213A00104	12 mo.	Aug-00
i00033 HP 85462A	3625A00357	12 mo.	May-01
i00048 HP 8566B	2511AD1467	6 mo.	May-01

PAGE NO.

17 of 45.

NAME OF TEST: Field Strength of Spurious Radiation
 g0160066: 2001-Jun-14 Thu 12:53:00
 STATE: 1:Low Power

FREQUENCY TUNED, MHz	FREQUENCY EMISSION, MHz	METER, dBuV	CF, dB	ERP, dBm	ERP, dBc
563.000000	1125.991667	70.5	-2.96	-29.8	≤-47.9
563.000000	1688.999167	48.17	-0.31	-49.5	≤-47.9
563.000000	2251.999167	41.5	1.98	-53.9	≤-47.9
563.000000	2815.005833	59.5	4.21	-33.7	≤-47.9
563.000000	3378.010833	53.33	5.78	-38.3	≤-47.9
563.000000	3941.005000	44.5	6.98	-45.9	≤-47.9
563.000000	4504.007500	41	8.23	-48.1	≤-47.9
563.000000	5067.006667	36.5	9.35	-51.5	≤-47.9
563.000000	5629.992500	36.83	10.39	-50.2	≤-47.9

PAGE NO. 18 of 45.

NAME OF TEST: Emission Masks (Occupied Bandwidth)

SPECIFICATION: 47 CFR 2.1049(c)(1)

GUIDE: ANSI/TIA/EIA-603-1992, Paragraph 2.2.11


TEST EQUIPMENT: As per previous page

MEASUREMENT PROCEDURE

1. The EUT and test equipment were set up as shown on the following page, with the Spectrum Analyzer connected.
2. For EUTs supporting audio modulation, the audio signal generator was adjusted to the frequency of maximum response and with output level set for $\pm 2.5/\pm 1.25$ kHz deviation (or 50% modulation). With level constant, the signal level was increased 16 dB.
3. For EUTs supporting digital modulation, the digital modulation mode was operated to its maximum extent.
4. The Occupied Bandwidth was measured with the Spectrum Analyzer controls set as shown on the test results.
5. MEASUREMENT RESULTS: ATTACHED

PAGE NO. 19 of 45.

NAME OF TEST: Emission Masks (Occupied Bandwidth)
g0160054: 2001-Jun-11 Mon 15:40:00
STATE: 1:Low Power

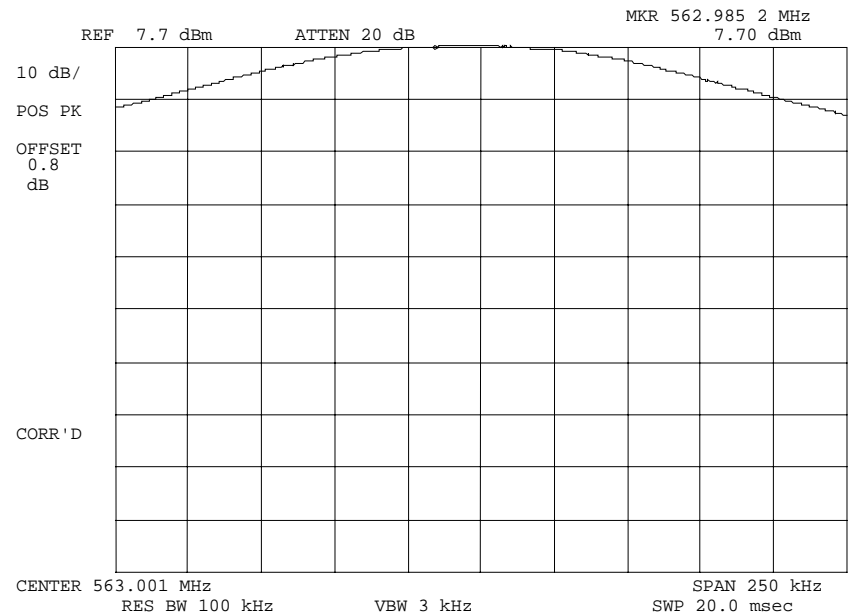


POWER: LOW
MODULATION: NONE

PERFORMED BY: Doug Noble, B.A.S. E.E.T.

PAGE NO.

20 of 45.

NAME OF TEST: Emission Masks (Occupied Bandwidth)
g0160055: 2001-Jun-11 Mon 15:42:00
STATE: 1:Low Power

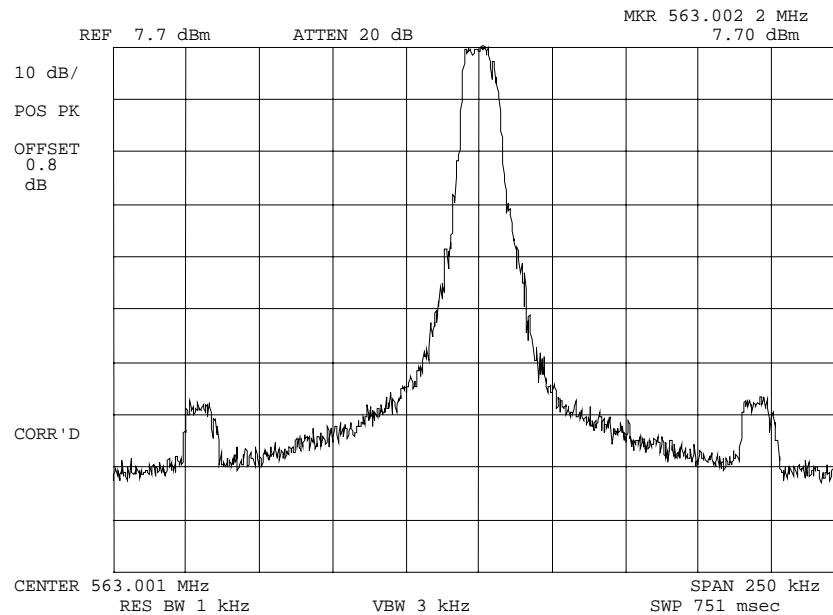

POWER: LOW
MODULATION: NONE


PERFORMED BY:

Doug Noble, B.A.S. E.E.T.

PAGE NO.

21 of 45.

NAME OF TEST: Emission Masks (Occupied Bandwidth)
g0160056: 2001-Jun-11 Mon 15:44:00
STATE: 1:Low Power

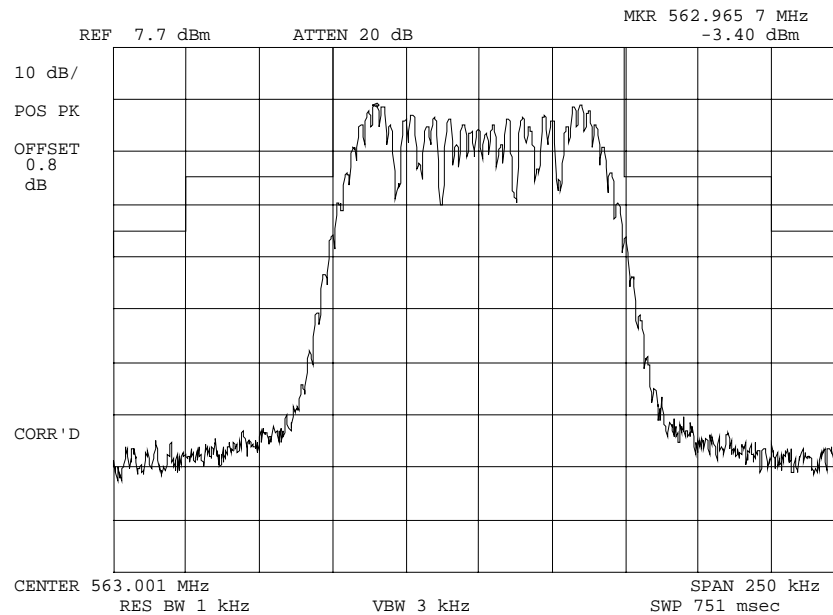

POWER:

LOW

MODULATION:

2500 HZ @ 20 DB ABOVE
REFERENCE LEVEL

MASK: Wireless Mic, 74.861


PERFORMED BY:

Doug Noble, B.A.S. E.E.T.

PAGE NO.

22 of 45.

NAME OF TEST: Emission Masks (Occupied Bandwidth)
g0160057: 2001-Jun-11 Mon 15:45:00
STATE: 1:Low Power

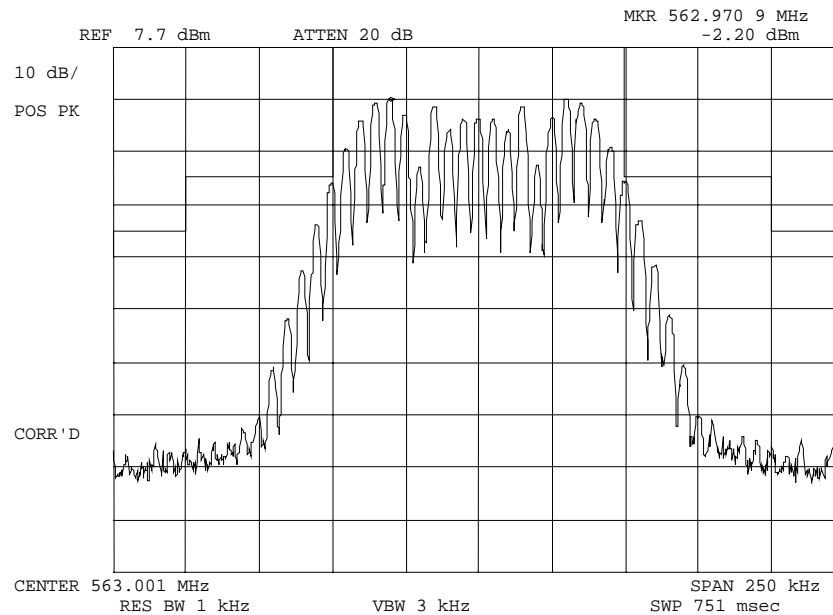

POWER:

LOW

MODULATION:

5 KHZ @ 20 DB ABOVE

REFERENCE LEVEL

MASK: Wireless Mic, 74.861


PERFORMED BY:

Doug Noble, B.A.S. E.E.T.

PAGE NO.

23 of 45.

NAME OF TEST: Emission Masks (Occupied Bandwidth)
g0160058: 2001-Jun-11 Mon 15:47:00
STATE: 1:Low Power

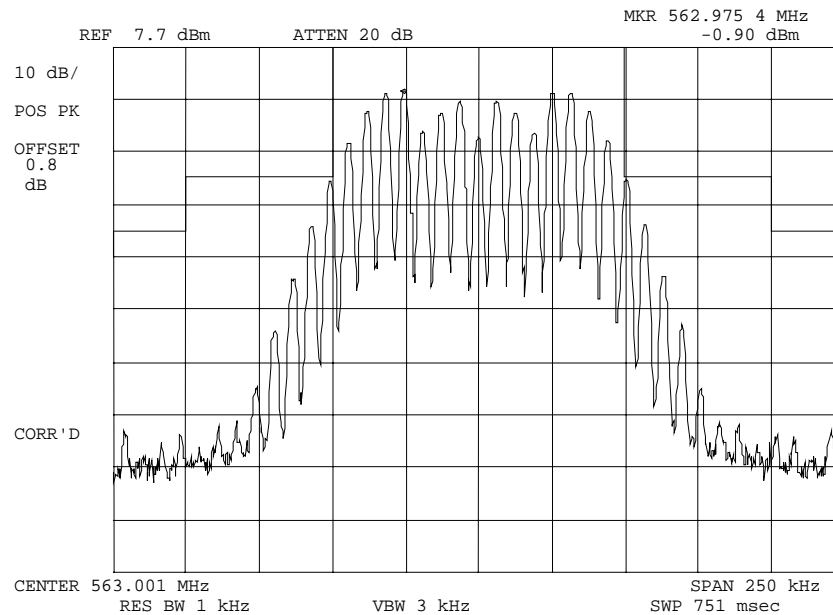

POWER:

LOW

MODULATION:

6310 HZ @ 20 DB ABOVE
REFERENCE LEVEL

MASK: Wireless Mic, 74.861


PERFORMED BY:

Doug Noble, B.A.S. E.E.T.

PAGE NO.

24 of 45.

NAME OF TEST: Emission Masks (Occupied Bandwidth)
g0160059: 2001-Jun-11 Mon 15:48:00
STATE: 1:Low Power

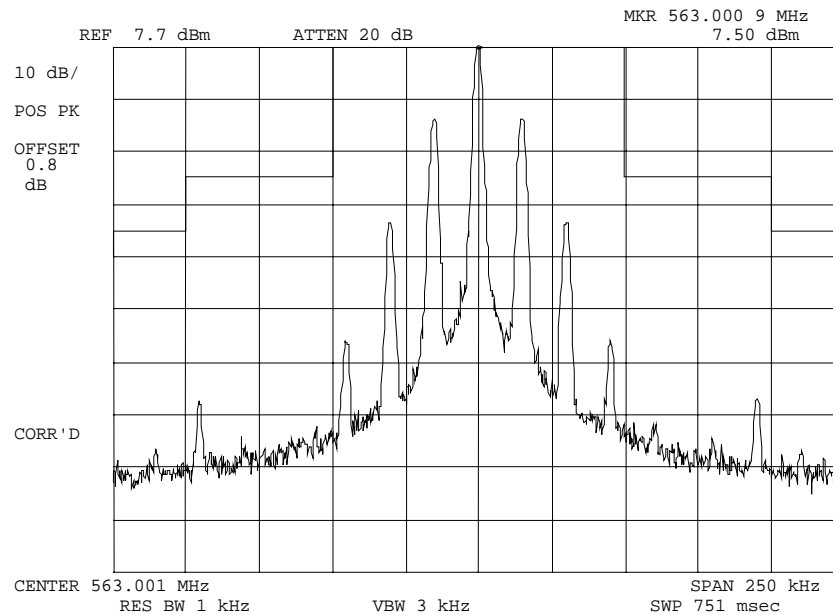

POWER:

LOW

MODULATION:

15 KHZ @ 20 DB ABOVE

REFERENCE LEVEL

MASK: Wireless Mic, 74.861


PERFORMED BY:

Doug Noble, B.A.S. E.E.T.

PAGE NO.

25 of 45.

NAME OF TEST: Emission Masks (Occupied Bandwidth)
g0160062: 2001-Jun-11 Mon 15:53:00
STATE: 1:Low Power

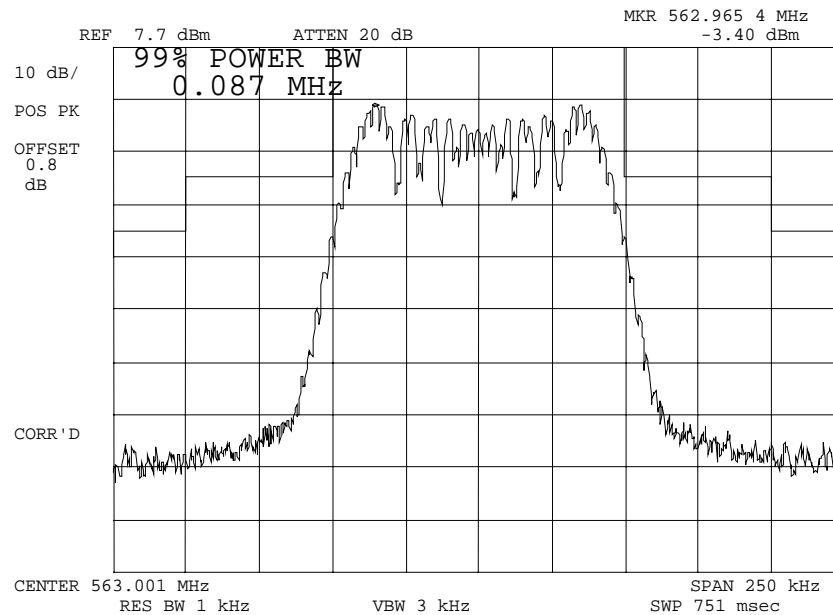

POWER:

LOW

MODULATION:

2.5 KHZ 99 % POWER

BANDWIDTH

MASK: WIRELESS MIC, 74.861


PERFORMED BY:

Doug Noble, B.A.S. E.E.T.

PAGE NO.

26 of 45.

NAME OF TEST: Emission Masks (Occupied Bandwidth)
g0160061: 2001-Jun-11 Mon 15:51:00
STATE: 1:Low Power

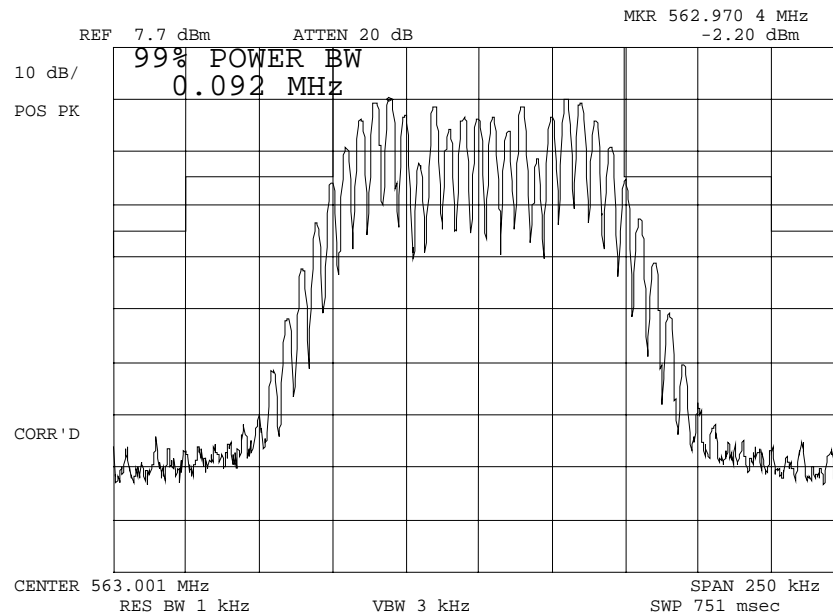

POWER:
MODULATION:

LOW
5 KHZ 99 % POWER BANDWIDTH
MASK: WIRELESS MIC, 74.861


PERFORMED BY:

Doug Noble, B.A.S. E.E.T.

PAGE NO.

27 of 45.

NAME OF TEST: Emission Masks (Occupied Bandwidth)
g0160060: 2001-Jun-11 Mon 15:50:00
STATE: 1:Low Power

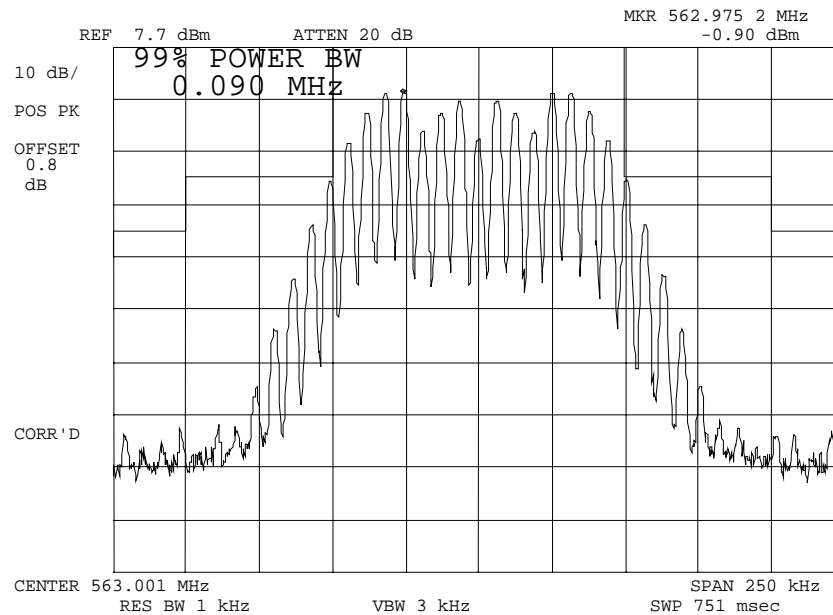

POWER:

LOW

MODULATION:

6310 HZ 99 % POWER

BANDWIDTH

MASK: WIRELESS MIC, 74.861


PERFORMED BY:

Doug Noble, B.A.S. E.E.T.

PAGE NO.

28 of 45.


NAME OF TEST: Emission Masks (Occupied Bandwidth)
 g0160046: 2001-Jun-11 Mon 15:19:00
 STATE: 2:High Power

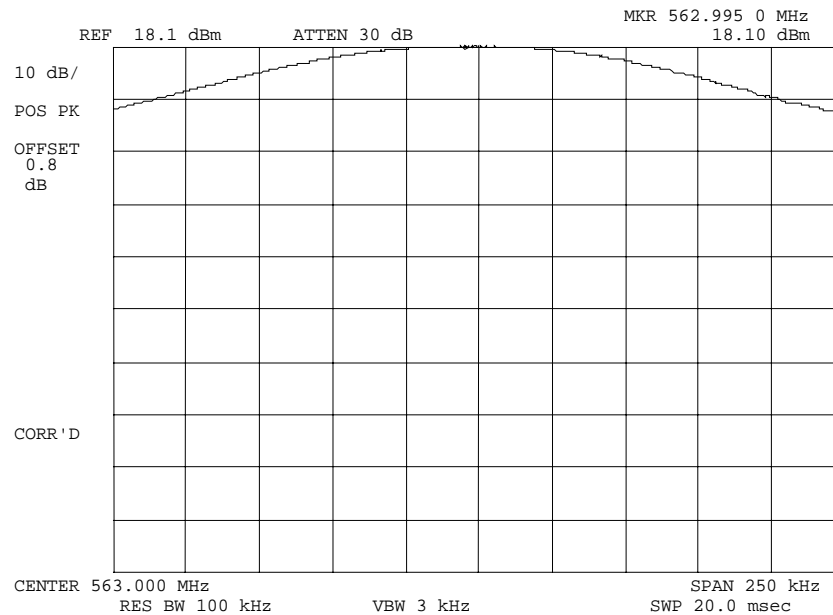

POWER:
 MODULATION:

HIGH
 NONE


PERFORMED BY:


 Doug Noble, B.A.S. E.E.T.

PAGE NO.

29 of 45.

NAME OF TEST: Emission Masks (Occupied Bandwidth)
g0160047: 2001-Jun-11 Mon 15:20:00
STATE: 2:High Power

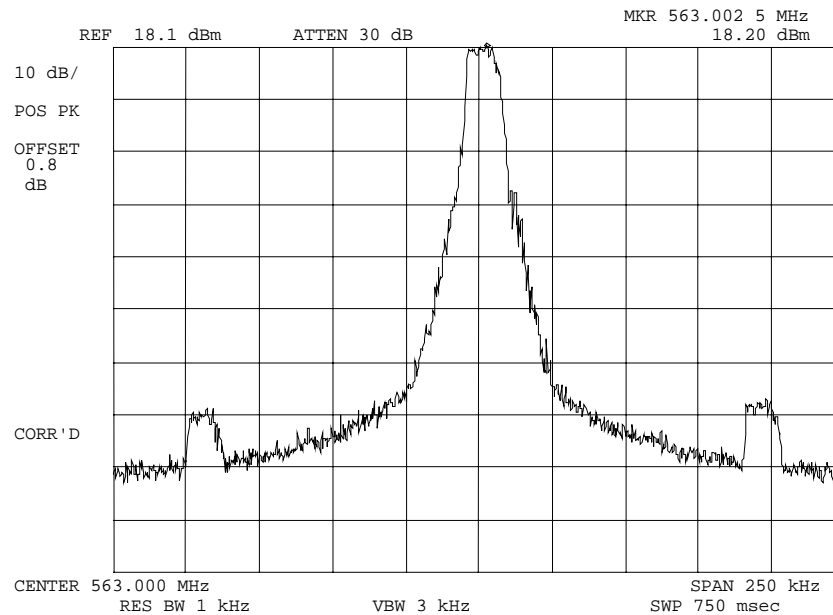

POWER: HIGH
MODULATION: NONE


PERFORMED BY:

Doug Noble, B.A.S. E.E.T.

PAGE NO.

30 of 45.

NAME OF TEST: Emission Masks (Occupied Bandwidth)
g0160048: 2001-Jun-11 Mon 15:25:00
STATE: 2:High Power

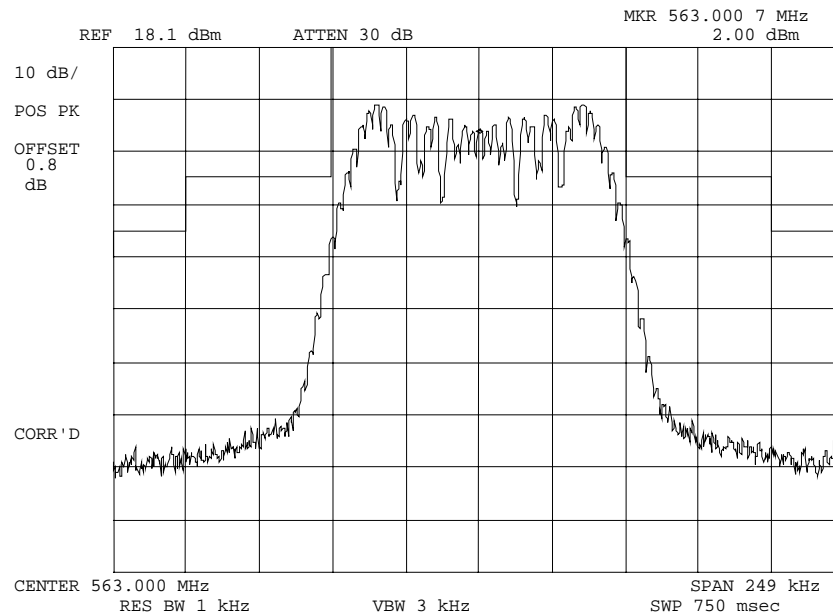

POWER:

HIGH

MODULATION:

2500 HZ @ 20 DB ABOVE
REFERENCE LEVEL

MASK: Wireless Mic, 74.861


PERFORMED BY:

Doug Noble, B.A.S. E.E.T.

PAGE NO.

31 of 45.

NAME OF TEST: Emission Masks (Occupied Bandwidth)
 g0160049: 2001-Jun-11 Mon 15:29:00
 STATE: 2:High Power

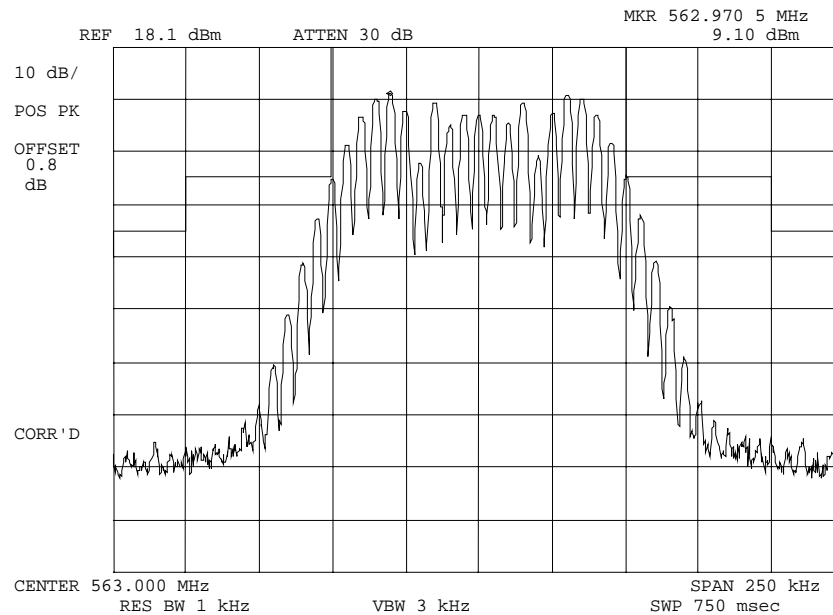

POWER:

HIGH

MODULATION:

5 KHZ @ 20 DB ABOVE
 REFERENCE LEVEL

MASK: Wireless Mic, 74.861


PERFORMED BY:

Doug Noble, B.A.S. E.E.T.

PAGE NO.

32 of 45.

NAME OF TEST: Emission Masks (Occupied Bandwidth)
 g0160050: 2001-Jun-11 Mon 15:31:00
 STATE: 2:High Power

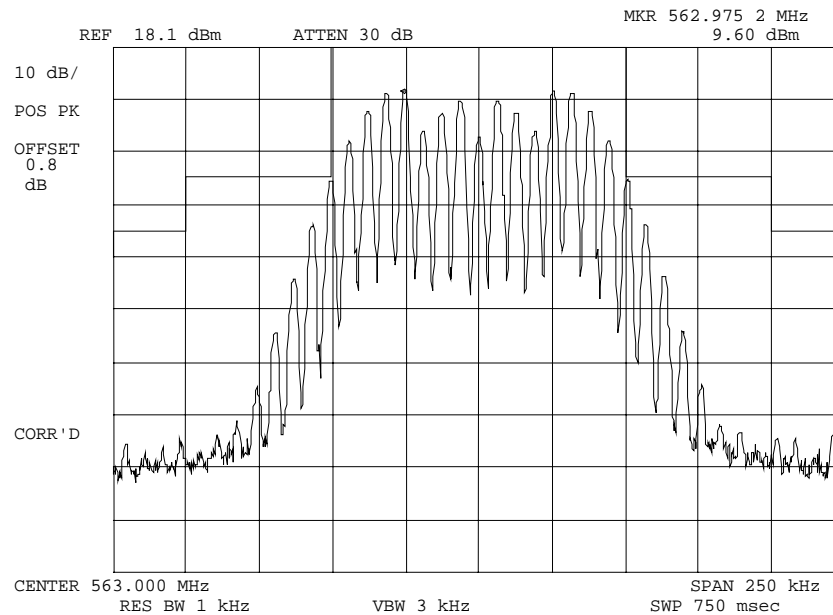

POWER:

HIGH

MODULATION:

6310 KHZ @ 20 DB ABOVE
 REFERENCE LEVEL

MASK: Wireless Mic, 74.861


PERFORMED BY:

Doug Noble, B.A.S. E.E.T.

PAGE NO.

33 of 45.

NAME OF TEST: Emission Masks (Occupied Bandwidth)
g0160051: 2001-Jun-11 Mon 15:32:00
STATE: 2:High Power

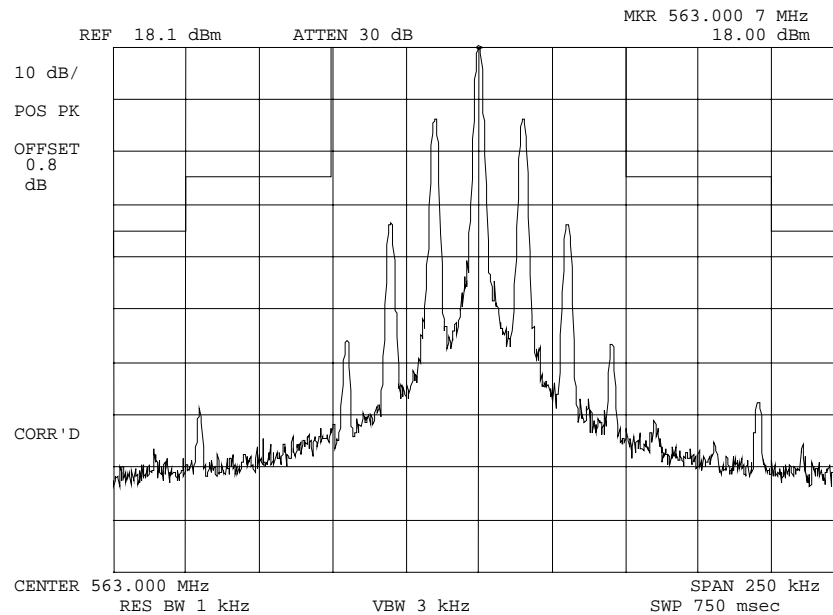

POWER:

HIGH

MODULATION:

15 KHZ @ 20 DB ABOVE

REFERENCE LEVEL

MASK: Wireless Mic, 74.861




PERFORMED BY:

Doug Noble, B.A.S. E.E.T.

PAGE NO.

34 of 45.

NAME OF TEST: Emission Masks (Occupied Bandwidth)
g0160063: 2001-Jun-11 Mon 16:00:00
STATE: 2:High Power

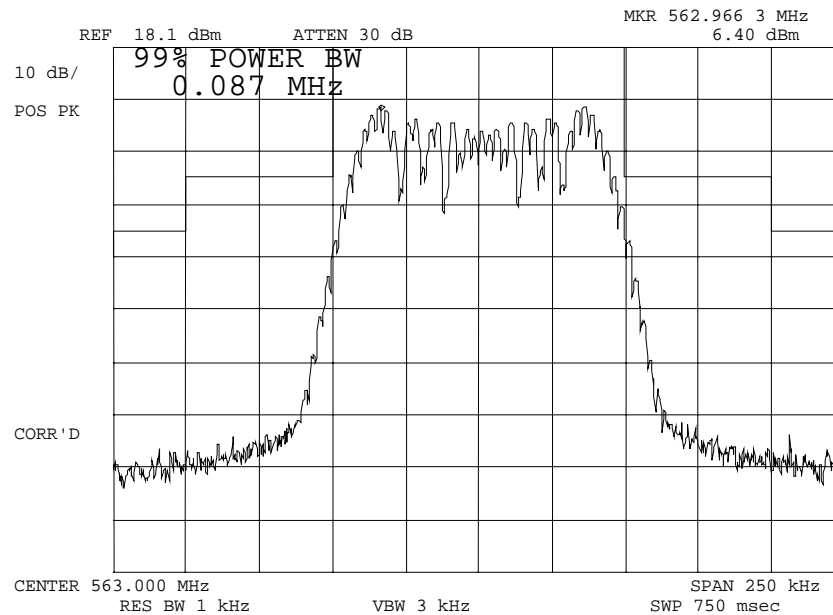

POWER:

HIGH

MODULATION:

2.5 KHZ 99 % POWER

BANDWIDTH

MASK: WIRELESS MIC, 74.861


PERFORMED BY:

Doug Noble, B.A.S. E.E.T.

PAGE NO.

35 of 45.

NAME OF TEST: Emission Masks (Occupied Bandwidth)
g0160053: 2001-Jun-11 Mon 15:36:00
STATE: 2:High Power

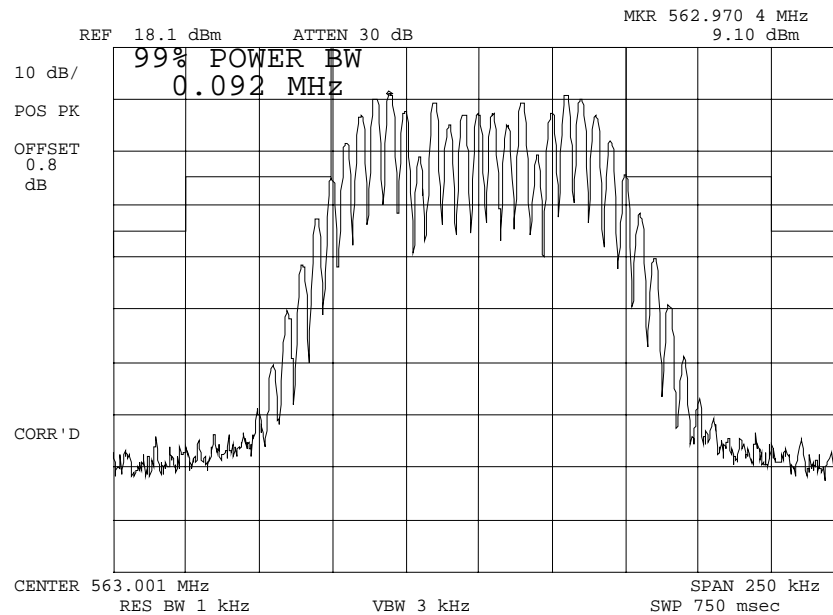

POWER:

HIGH

MODULATION:

5 KHZ 99 % POWER BANDWIDTH

MASK: WIRELESS MIC, 74.861


PERFORMED BY:

Doug Noble, B.A.S. E.E.T.

PAGE NO.

36 of 45.

NAME OF TEST: Emission Masks (Occupied Bandwidth)
g0160052: 2001-Jun-11 Mon 15:34:00
STATE: 2:High Power

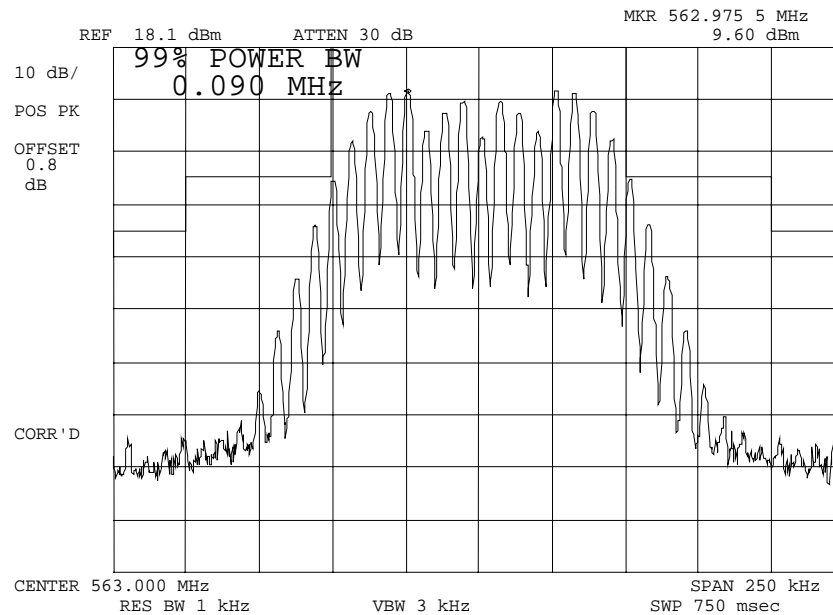

POWER:

HIGH

MODULATION:

6310 HZ 99 % POWER

BANDWIDTH

MASK: WIRELESS MIC, 74.861

PERFORMED BY:

Doug Noble, B.A.S. E.E.T.

PAGE NO. 37 of 45.
NAME OF TEST: Audio Frequency Response
SPECIFICATION: 47 CFR 2.1047(a)
GUIDE: ANSI/TIA/EIA-603-1992, Paragraph 2.2.6
TEST EQUIPMENT: As per previous page


MEASUREMENT PROCEDURE

1. The EUT and test equipment were set up as shown on the following page.
2. The audio signal generator was connected to the audio input circuit/microphone of the EUT.
3. The audio signal input was adjusted to obtain 20% modulation at 1 kHz, and this point was taken as the 0 dB reference level.
4. With input levels held constant and below limiting at all frequencies, the audio signal generator was varied from 100 Hz to 50 kHz.
5. The response in dB relative to 1 kHz was then measured, using the HP 8901A Modulation Analyzer.
6. MEASUREMENT RESULTS: ATTACHED

PAGE NO.

38 of 45.

NAME OF TEST: Audio Frequency Response
 g0160026: 2001-Jun-11 Mon 14:25:00
 STATE: 0:General

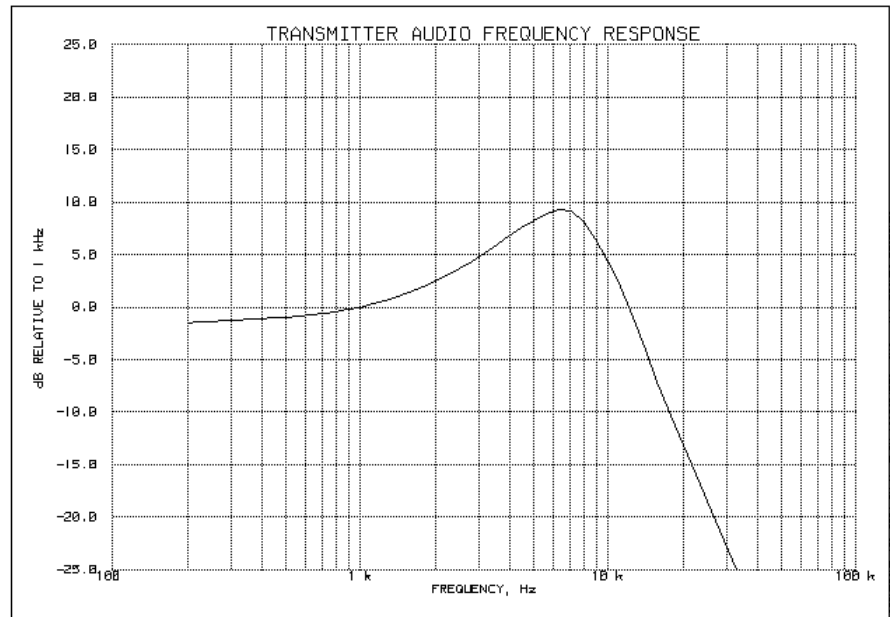


Frequency of Maximum Audio Response, Hz = 6310

Additional points:

FREQUENCY, Hz	LEVEL, dB
300	-1.29
20000	-13.05
30000	-18.33
50000	-14.16

PERFORMED BY:


 Doug Noble, B.A.S. E.E.T.

PAGE NO. 39 of 45.
NAME OF TEST: Modulation Limiting
SPECIFICATION: 47 CFR 2.1047(b)
GUIDE: ANSI/TIA/EIA-603-1992, Paragraph 2.2.3
TEST EQUIPMENT: As per previous page

MEASUREMENT PROCEDURE


1. The signal generator was connected to the input of the EUT as for "Frequency Response of the Modulating Circuit."
2. The modulation response was measured for each of three frequencies (one of which was the frequency of maximum response), and the input voltage was varied and was observed on an HP 8901A Modulation Analyzer.
3. The input level was varied from 30% modulation (± 1.5 kHz deviation) to at least 20 dB higher than the saturation point.
4. Measurements were performed for both negative and positive modulation and the respective results were recorded.
5. MEASUREMENT RESULTS: ATTACHED

PAGE NO.


40 of 45.

NAME OF TEST: Modulation Limiting
g0160027: 2001-Jun-11 Mon 14:36:00
STATE: 0:General

Positive
Peaks:

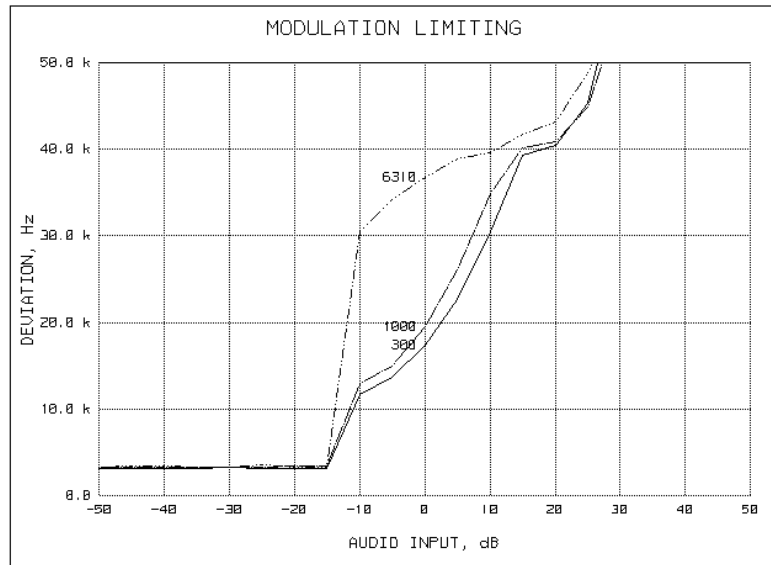

Negative
Peaks:

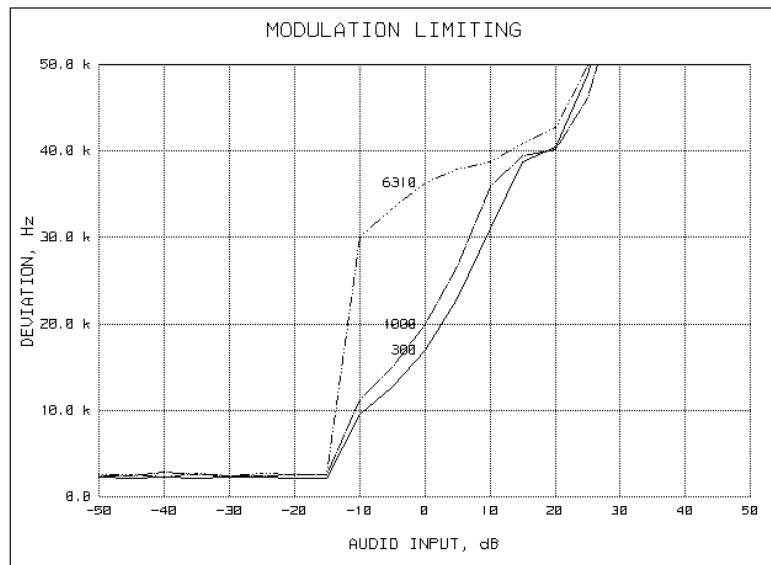

PERFORMED BY:

Doug Noble, B.A.S. E.E.T.

PAGE NO. 41 of 45.

NAME OF TEST: Frequency Stability (Temperature Variation)

SPECIFICATION: 47 CFR 2.1055(a)(1)

GUIDE: ANSI/TIA/EIA-603-1992, Paragraph 2.2.2

TEST CONDITIONS: As Indicated


TEST EQUIPMENT: As per previous page

MEASUREMENT PROCEDURE

1. The EUT and test equipment were set up as shown on the following page.
2. With all power removed, the temperature was decreased to -30°C and permitted to stabilize for three hours. Power was applied and the maximum change in frequency was noted within one minute.
3. With power OFF, the temperature was raised in 10°C steps. The sample was permitted to stabilize at each step for at least one-half hour. Power was applied and the maximum frequency change was noted within one minute.
4. The temperature tests were performed for the worst case.
5. MEASUREMENT RESULTS: ATTACHED

TRANSMITTER TEST SET-UP

TEST A. OPERATIONAL STABILITY
TEST B. CARRIER FREQUENCY STABILITY
TEST C. OPERATIONAL PERFORMANCE STABILITY
TEST D. HUMIDITY
TEST E. VIBRATION
TEST F. ENVIRONMENTAL TEMPERATURE
TEST G. FREQUENCY STABILITY: TEMPERATURE VARIATION
TEST H. FREQUENCY STABILITY: VOLTAGE VARIATION

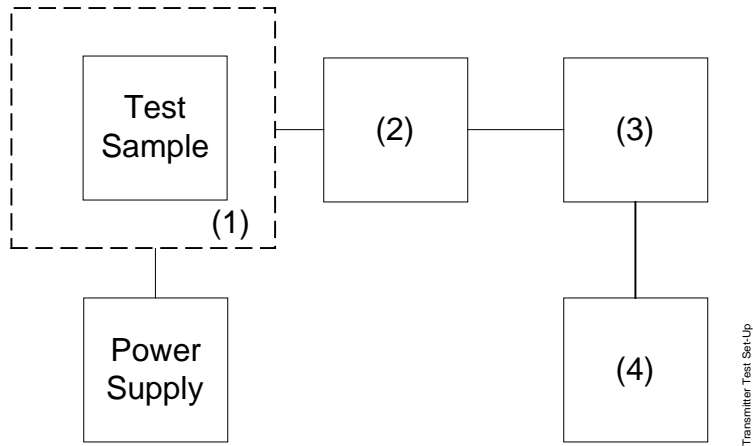

Asset	Description	s/n
-------	-------------	-----

- | | | |
|--------|---|--------------|
| (1) | <u>TEMPERATURE, HUMIDITY, VIBRATION</u> | |
| i00027 | Tenney Temp. Chamber | 9083-765-234 |
| i00 | Weber Humidity Chamber | |
| i00 | L.A.B. RVH 18-100 | |
| (2) | <u>COAXIAL ATTENUATOR</u> | |
| i00122 | NARDA 766-10 | 7802 |
| i00123 | NARDA 766-10 | 7802A |
| i00113 | SIERRA 661A-3D | 1059 |
| i00069 | BIRD 8329 (30 dB) | 10066 |
| (3) | <u>R.F. POWER</u> | |
| i00014 | HP 435A POWER METER | 1733A05839 |
| i00039 | HP 436A POWER METER | 2709A26776 |
| i00020 | HP 8901A POWER MODE | 2105A01087 |
| (4) | <u>FREQUENCY COUNTER</u> | |
| i00042 | HP 5383A | 1628A00959 |
| i00019 | HP 5334B | 2704A00347 |
| i00020 | HP 8901A | 2105A01087 |

PAGE NO.


43 of 45.

NAME OF TEST:

Frequency Stability (Temperature Variation)

<u>°C</u>	<u>Change, Hz</u>	<u>PPM</u>
-30	9,427	17
-20	10,537	19
-10	11,646	21
0	9,982	18
10	4,436	8
20	2,218	4
25	0	0
30	-1,664	-3
40	-2,773	-5
50	-2,773	-5

SUPERVISED BY:


Doug Noble, B.A.S. E.E.T.

PAGE NO. 44 of 45.

NAME OF TEST: Frequency Stability (Voltage Variation)

SPECIFICATION: 47 CFR 2.1055(b)(1)

GUIDE: ANSI/TIA/EIA-603-1992, Paragraph 2.2.2

TEST EQUIPMENT: As per previous page

MEASUREMENT PROCEDURE


1. The EUT was placed in a temperature chamber at 25±5°C and connected as for "Frequency Stability - Temperature Variation" test.
2. The power supply voltage to the EUT was varied from 85% to 115% of the nominal value measured at the input to the EUT.
3. The variation in frequency was measured for the worst case.

RESULTS: Frequency Stability (Voltage Variation)

LIMIT, ppm = 50
 LIMIT, Hz = 27,700

% of STV	Voltage	Frequency, MHz	Change, Hz	Change, ppm
85	97.75	554.569160	-40	-0.072
100	115	554.569200	0	0.00
115	132.25	554.569190	-10	0.018

PERFORMED BY:


 Doug Noble, B.A.S. E.E.T.

PAGE NO. 45 of 45.

NAME OF TEST: Necessary Bandwidth and Emission Bandwidth


SPECIFICATION: 47 CFR 2.202(g)

MODULATION = 92K0F3E

NECESSARY BANDWIDTH CALCULATION:

MAXIMUM MODULATION (M), kHz	= 5.0
MAXIMUM DEVIATION (D), kHz	= 41.0
CONSTANT FACTOR (K)	= 1.0
NECESSARY BANDWIDTH (B_N), kHz	= $(2 \times M) + (2 \times D \times K)$
	= 92.0

PERFORMED BY:


Doug Noble, B.A.S. E.E.T.

END OF TEST REPORT

TESTIMONIAL
AND
STATEMENT OF CERTIFICATION

THIS IS TO CERTIFY THAT:

1. THAT the application was prepared either by, or under the direct supervision of, the undersigned.
2. THAT the technical data supplied with the application was taken under my direction and supervision.
3. THAT the data was obtained on representative units, randomly selected.
4. THAT, to the best of my knowledge and belief, the facts set forth in the application and accompanying technical data are true and correct.

CERTIFYING ENGINEER:

A handwritten signature in black ink, reading "M. Flom P. Eng." with a horizontal line drawn underneath the signature.

Morton Flom, P. Eng.