



# REPORT

issued by an FCC listed Laboratory Reg. no. 93866  
The test site complies with RSS 212, Issue 1, Industry Canada file no. :IC 3482.



ERICSSON AB  
Larry Lindström  
Färögatan 2, Kista  
164 80 STOCKHOLM

Handläggare, enhet/Handled by, department  
Jonas Bremholt  
Electronics  
Tel +46 (0) 33 16 54 38

Datum/Date                      Beteckning/Reference                      Sida/Page  
2003-12-19                      F326326-F24                      1(1)

## Equipment Authorization measurements on WCDMA Base station Amplifier unit with FCC ID: B5KAKRB101112-2 in cabinet RBS 3202

(8 enclosures)

### Test objects

Amplifier unit KRB 101 1112/2, R1A  
Antenna interface unit KRC 101 1451/3, R1B

### Summary

Standard	Compliant	Enclosure	Remarks
<b>FCC CFR 47</b>			
2.1046 RF Power output	Yes	2	
2.1049 Occupied bandwidth	Yes	3	
2.1049 Band edge	Yes	4	
2.1051 Spurious emission at antenna	Yes	5	
2.1053 Field strength of spurious radiation	Yes	6	

### SP Swedish National Testing and Research Institute Electronics - EMC

  
Jan Welinder  
Technical Manager

  
Jonas Bremholt  
Technical Officer

SP Sveriges Provnings- och Forskningsinstitut, Box 857, 501 15 BORÅS, Tel 033-16 50 00, Telefax 033-13 55 02, E-mail info@sp.se, Org.nr 556464-6874  
SP Swedish National Testing and Research Institute, Box 857, S-501 15 BORÅS, SWEDEN, Telephone + 46 33 16 50 00, Telefax + 46 33 13 55 02, E-mail info@sp.se, Reg.No 556464-6874

Laboratorium ackrediteras av Styrelsen för ackreditering och teknisk kontroll (SWEDAC) enligt lag. Verksamheten vid de svenska ackrediterade laboratorerna uppfyller kraven enligt SS-EN 45001 (1989), SS-EN 45002 (1989) och ISO/IEC Guide 25 (1990:E). Denna rapport får endast återges i sin helhet, om inte SWEDAC och SP i förväg skriftligen godkänt annat.

Laboratories are accredited by the Swedish Board for Accreditation and Conformity Assessment (SWEDAC) under the terms of the Act. The Swedish accredited laboratories meet the requirements set up in SS-EN 45001 (1989), SS-EN 45002 (1989) and ISO/IEC Guide 25 (1990:E). This report may not be reproduced other than in full, except with the prior written approval of SWEDAC and SP.

# REPORT

Datum/Date  
2003-12-19

Beteckning/Reference  
F326326-F24

Sida/Page  
1 (1)  
Encl. 1

FCC ID: B5KAKRB1011112-2

## Description - Equipment Under Test (EUT)

Equipment: WCDMA Base station amplifier unit used in single carrier configuration.

Frequency range: 1930 MHz to 1970 MHz

Tested channels: 1932.5 MHz, 1947.5 MHz, and 1967.5 MHz.

Product number: KRB 101 1112/2, R1A  
Serial numbers: See Hardware list in enclosure 7

The RF conducted measurements were done at the output connectors on top of the base station.

TRXB ROJ 119 2233/1 WCDMA transceiver units were used to generate the carrier channels. The identities of the units used can be found in the hardware list on encl. 7.

### Configuration:

The transmitters were set-up according to 3GPP TS 25.141 V6.3.0 (2003-09) Test model 1. 16 DPCH:s at 30 ksps (SF=128) distributed randomly across the code space, at random power levels and random timing offsets are defined so as to simulate a realistic scenario which may have high PAR (Peak to Average ratio).

Manufacturer's representative: Larry Lindström, Ericsson AB

## Purpose of test

The purpose of the tests is to verify compliance with the performance characteristics specified in FCC CFR47.

## Reservation

The test results in this report apply only to the particular Equipment Under Test (EUT) as declared in the report.

## Delivery of test object

The test object was delivered: 2003-11-11

## Test engineers

Peter Grahn  
Jonas Bremholt  
Fredrik Isaksson

## Test witnesses

Larry Lindström, Ericsson AB  
Mats Iregren, Ericsson AB (partly present)

Sign:.....

# REPORT

Datum/Date  
2003-12-29

Beteckning/Reference  
F326326-F24

Sida/Page  
1 (1)  
Encl. 2

FCC ID: B5KAKRB1011112-2

## RF Power output measurements according to 47CFR 2.1046

Date 2003-11-13	Temperature 21 °C ± 3 °C	Humidity 26 % ± 5 %
--------------------	-----------------------------	------------------------

### Test set-up and Procedure

The measurements were made per 3GPP TS 25.141. Measurements were made at output connectors J1, J2, and J3. The output was connected to a Peak power analyzer via a 50 ohm attenuator. The RF power was measured with variation in supply voltage at the highest power level. Test was performed on -48 V DC supply voltage system. The transmitters used during the measurement were set up according to Test Model 1 in 3GPP TS 25.141 during the measurements.

Measurement equipment	Calibration Due	SP number
Boonton RF Peak power meter/analyzer	2004-01	503 144
Boonton Power sensor 56518-S/4	2004-01	503 145
Attenuator 40 dB	2004-04	503 173
Multimeter Fluke 83	2004-10	501 521
Testo 615, Temperature and humidity meter	2005-09	503 505

### Results

Nominal power -48 V DC

Max input level at AIU input: +8.5 dBm

Rated output power level at output connector J1, J2, and J3: +43 dBm

Test conditions		Transmitter power (dBm)		
		Average		
		J1 1932.5 MHz	J2 1947.5 MHz	J3 1967.5 MHz
T <sub>nom</sub> 21°C	V <sub>nom</sub> -48 V	43.2	43.2	43.1
T <sub>nom</sub> 21°C	V <sub>min</sub> -43.2 V	43.2	43.1	43.1
	V <sub>max</sub> -52.8 V	43.2	43.1	43.1
Measurement uncertainty		0.5 dB		

### Limits (according to §24.232)

The maximum output power shall not be greater than 100 W (50 dBm).

Complies?	Yes
-----------	-----

Sign:.....

# REPORT

Datum/Date  
2003-12-19

Beteckning/Reference  
F326326-F24

Sida/Page  
1 (3)  
Encl. 3

FCC ID: B5KAKRB1011112-2

## Occupied bandwidth measurements according to 47CFR 2.1049

Date 2003-11-14	Temperature 22 °C ± 3 °C	Humidity 28 % ± 5 %
--------------------	-----------------------------	------------------------

### Test set-up and Procedure

The measurement test set-up was made per 3GPP TS 25.141. The output was connected to a spectrum analyzer. The spectrum analyzer was connected to an external 10 MHz reference standard during the measurements. The transmitter was set up according to Test Model 1 in 3GPP TS 25.141 during the measurements.

Measurement equipment	Calibration Due	SP number
R&S FSIQ 40	2004-03	503 738
Attenuator	2004-04	503 173
Testo 610, Temperature and humidity meter	2004-12	502 658

**Measurement uncertainty:** 3.7 dB

### Results

Input vs. output measurements

#### Input signal

Diagram 1 1947.5 MHz, OBW Reference level, +7.5 dBm output power

Diagram 2 1947.5 MHz, OBW 26 dB points, +7.5 dBm output power

#### Output signal

##### Output J2:

Diagram 3 1947.5 MHz, OBW Reference level, +43 dBm output power

Diagram 4 1947.5 MHz, OBW 26 dB points, +43 dBm output power

Complies?	Yes
-----------	-----

Sign:.....

# REPORT


Datum/Date  
2003-12-19

Beteckning/Reference  
F326326-F24

Sida/Page  
2 (3)  
Encl. 3


FCC ID: B5KAKRB1011112-2

## Diagram 1

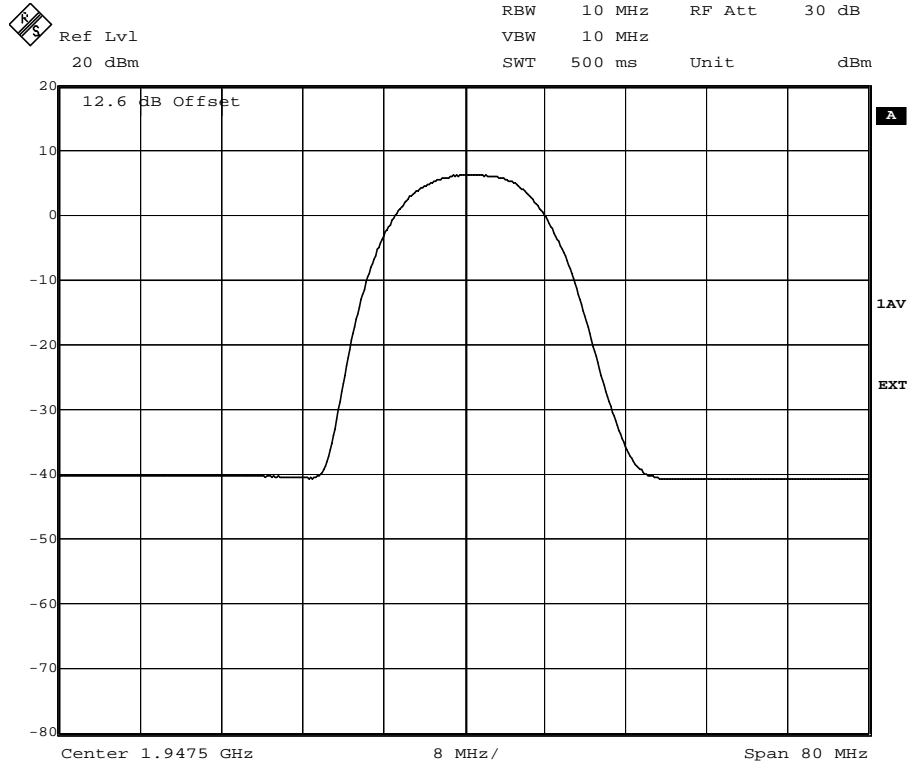

Date: 21.NOV.2003 10:37:51

## Diagram 2

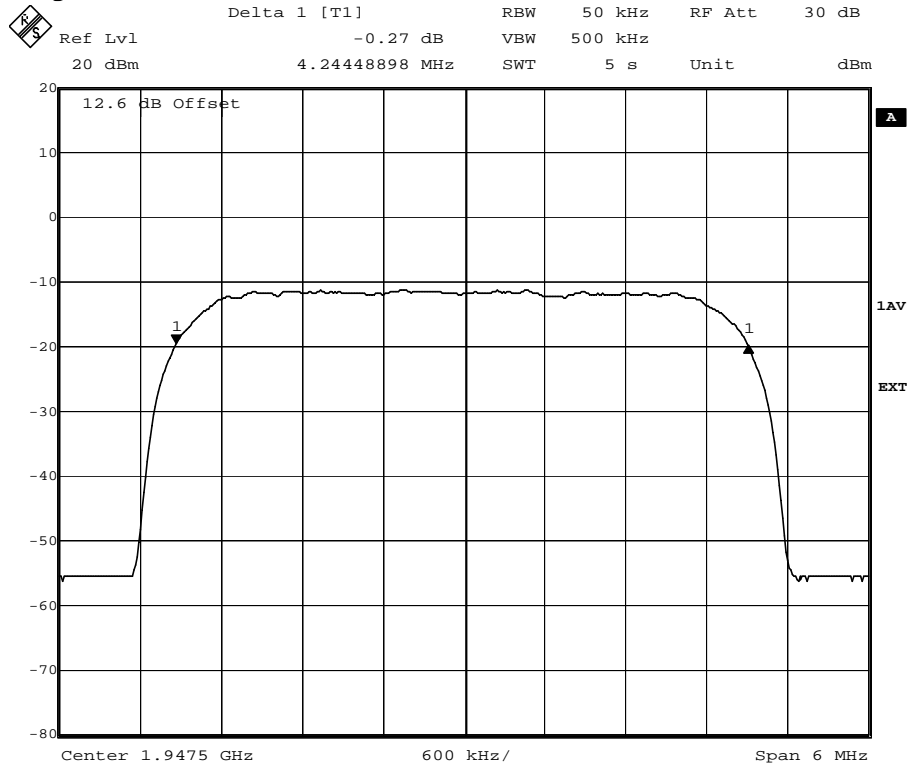

Date: 21.NOV.2003 10:39:37

Sign:.....

# REPORT


Datum/Date  
2003-12-19

Beteckning/Reference  
F326326-F24


Sida/Page  
3 (3)  
Encl. 3

FCC ID: B5KAKRB1011112-2

### Diagram 3

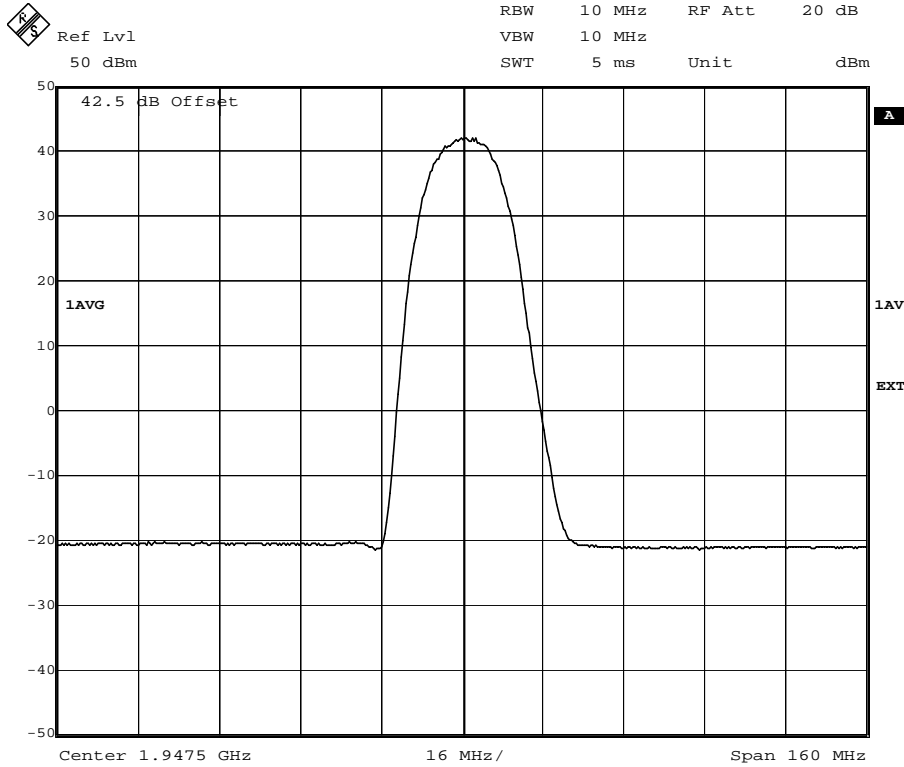

### Diagram 4

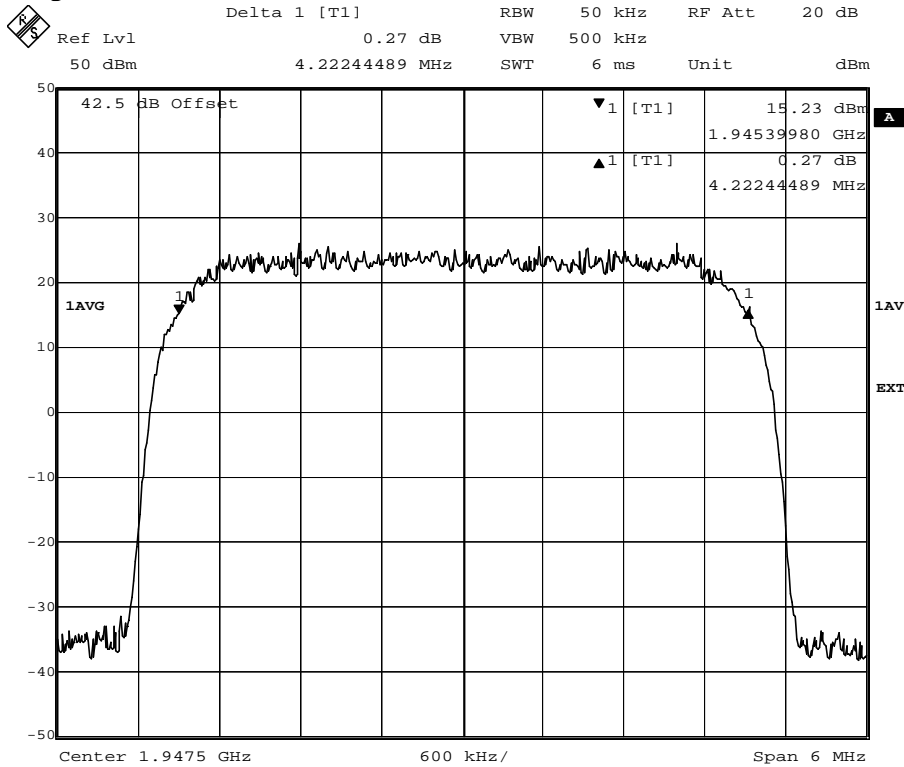

Sign:.....

# REPORT

Datum/Date  
2003-12-19

Beteckning/Reference  
F326326-F24

Sida/Page  
1 (3)  
Encl. 4

FCC ID: B5KAKRB1011112-2

## Band edge measurements according to 47CFR 2.1049

Date 2003-11-14	Temperature 22 °C ± 3 °C	Humidity 28 % ± 5 %
--------------------	-----------------------------	------------------------

### Test set-up and Procedure

The output was connected to a spectrum analyzer. The spectrum analyzer was connected to an external 10 MHz reference standard during the measurements. According to §24.238 a resolution bandwidth of 1% of the emission bandwidth was used in the 1 MHz band adjacent to the block edge. At frequencies more than 1 MHz away from the block edge the spectrum was integrated over 1MHz bandwidth. The transmitter was set up according to Test Model 1 in 3GPP TS 25.141 during the measurements.

Measurement equipment	Calibration Due	SP number
R&S FSIQ 40	2004-03	503 738
Attenuator 40 dB	2004-04	503 173
Testo 615, Temperature and humidity meter	2005-09	503 505

**Measurement uncertainty:** 3.7 dB

### Results

#### Output J1:

- Diagram 1 Carrier 1932.5 Band edge +43 dBm output power
- Diagram 2 Carrier 1932.5 Band edge +43 dBm output power

#### Output J3:

- Diagram 3 Carrier 1967.5 Band edge +43 dBm output power
- Diagram 4 Carrier 1967.5 Band edge +43 dBm output power

### Limits

The power of any emission outside the frequency band shall be attenuated below the transmitter power (P) by at least  $43 + 10 \log P$  dB.

Complies?	Yes
-----------	-----

Sign:.....

# REPORT


Datum/Date  
2003-12-19

Betekning/Reference  
F326326-F24

Sida/Page  
2 (3)  
Encl. 4


FCC ID: B5KAKRB1011112-2

## Diagram 1

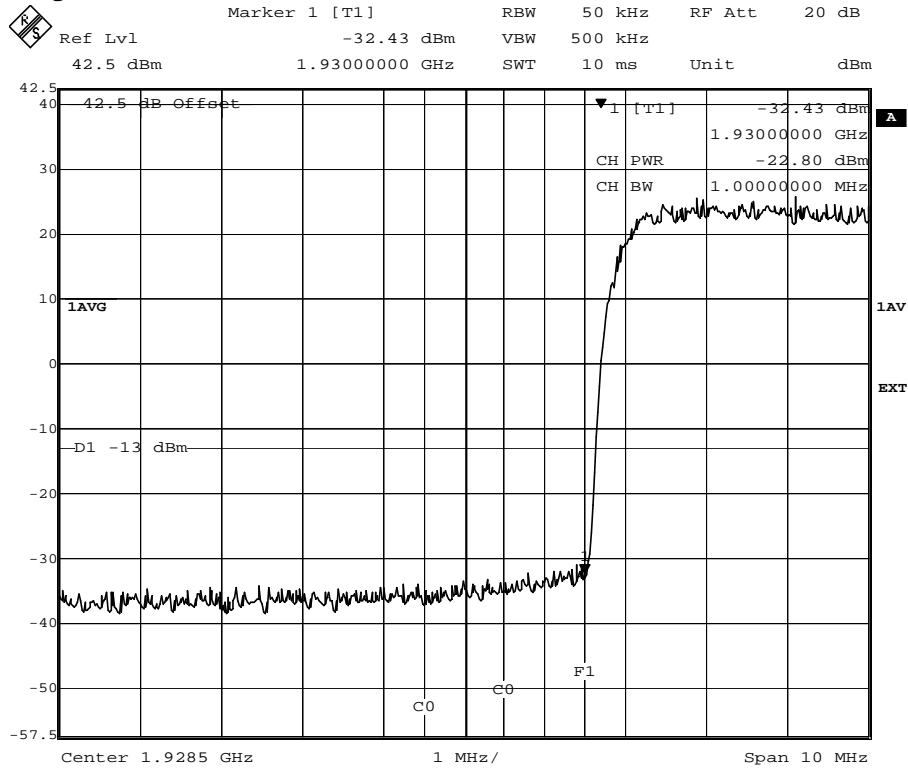

Date: 14.NOV.2003 16:05:44

## Diagram 2

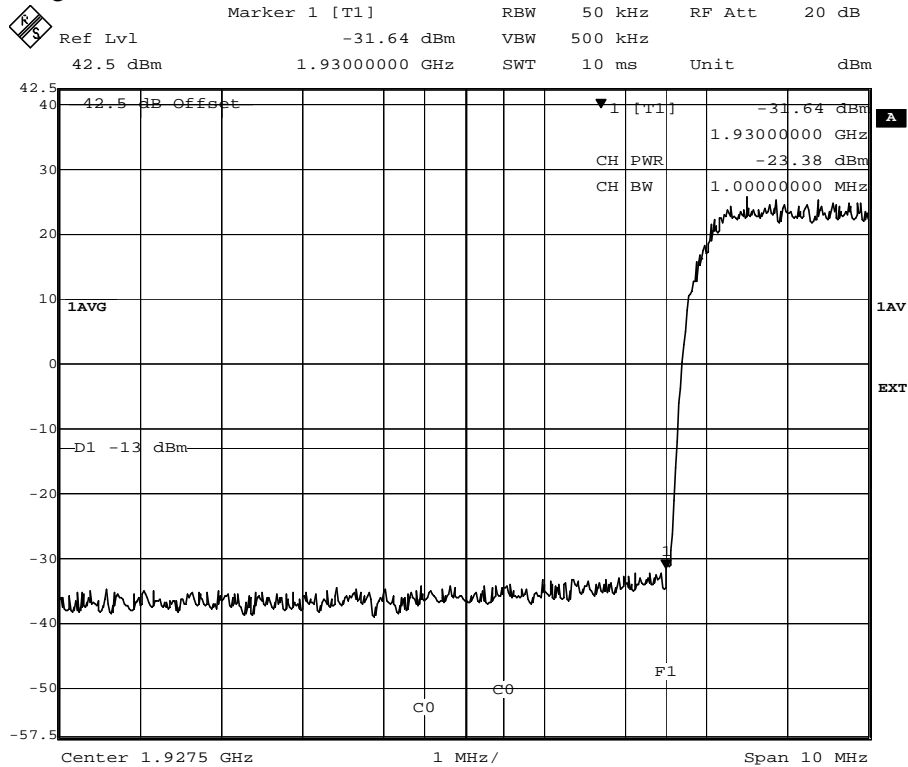

Date: 14.NOV.2003 16:06:22

Sign:.....



# REPORT


Datum/Date  
2003-12-19

Betekning/Reference  
F326326-F24


Sida/Page  
3 (3)  
Encl. 4

FCC ID: B5KAKRB1011112-2

### Diagram 3

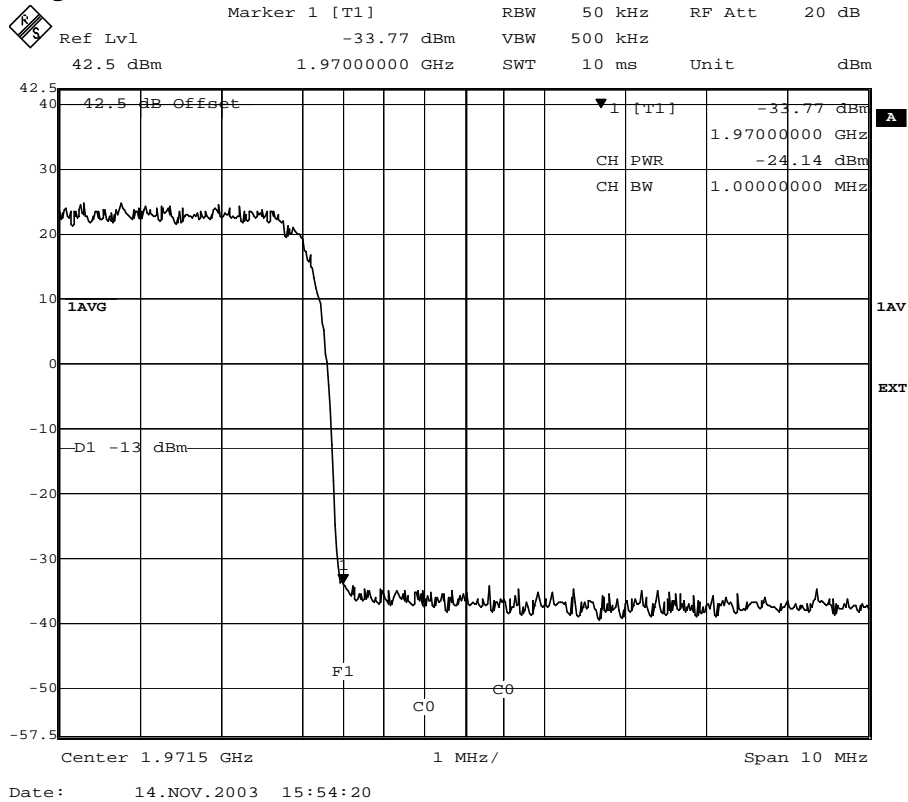

### Diagram 4

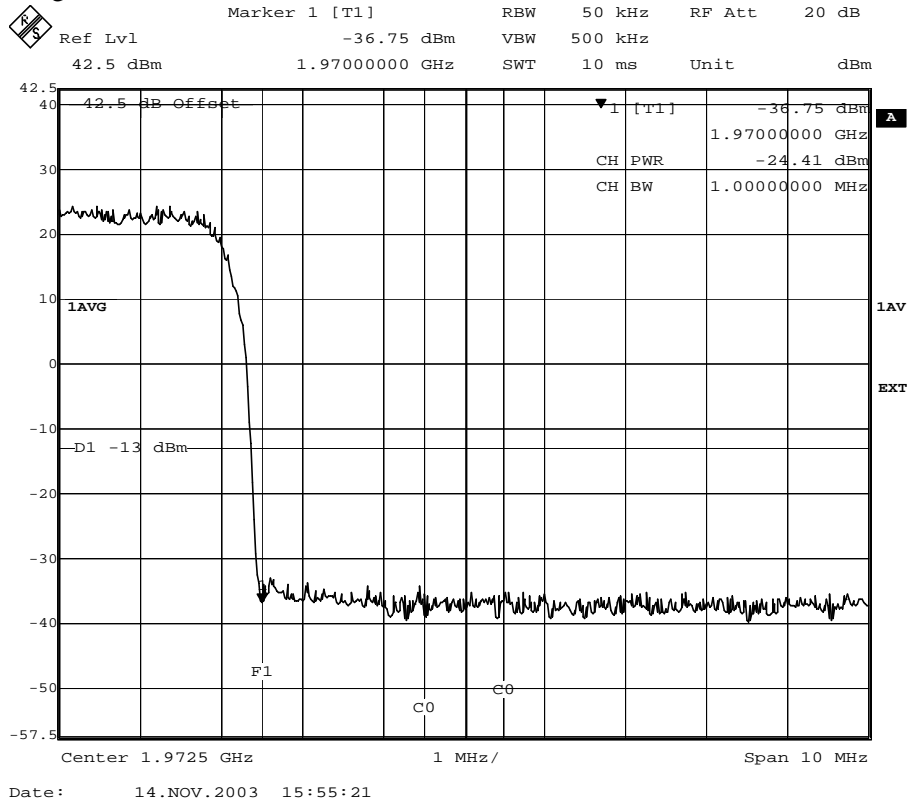

Sign:.....

# REPORT

Datum/Date  
2003-12-19

Beteckning/Reference  
F326326-F24

Sida/Page  
1 (3)  
Encl. 5

FCC ID: B5KAKRB1011112-2

## Conducted spurious emission measurements according to 47CFR 2.1051

Date 2003-11-14	Temperature 22 °C ± 3 °C	Humidity 28 % ± 5 %
--------------------	-----------------------------	------------------------

### Test set-up and Procedure

The measurement was made per ANSI/TIA/EIA-603-2001. The output was connected to a spectrum analyzer. The spectrum analyzer was connected to an external 10 MHz reference standard during the measurements. The transmitter was set up according to Test Model 1 in 3GPP TS 25.141 during the measurements.

Measurement equipment	Calibration Due	SP number
R&S FSIQ 40	2004-03	503 738
Attenuator 10 dB	2004-04	503 720
Band reject filter	2004-04	503 636
High pass filter	2004-04	503 739
Attenuator 10 dB	2004-04	503 096
Testo 615, Temperature and humidity meter	2005-09	503 505

**Measurement uncertainty:** 3.7 dB

### Results

#### Output J1:

- Diagram 1: 1932.5 MHz, +43 dBm, 9kHz – 3 GHz  
Diagram 2: 1932.5 MHz, +43 dBm, 3GHz – 20 GHz

#### Output J3:

- Diagram 3: 1967.5 MHz, +43 dBm, 9kHz – 3 GHz  
Diagram 4: 1967.5 MHz, +43 dBm, 3GHz – 20 GHz

### Limits

The power of any emission outside the frequency band shall be attenuated below the transmitter power (P) by at least  $43 + 10 \log P$  dB.

Complies?	Yes
-----------	-----

Sign:.....

# REPORT


Datum/Date  
2003-12-19

Beteckning/Reference  
F326326-F24

Sida/Page  
2 (3)  
Encl. 5


FCC ID: B5KAKRB1011112-2

### Diagram 1

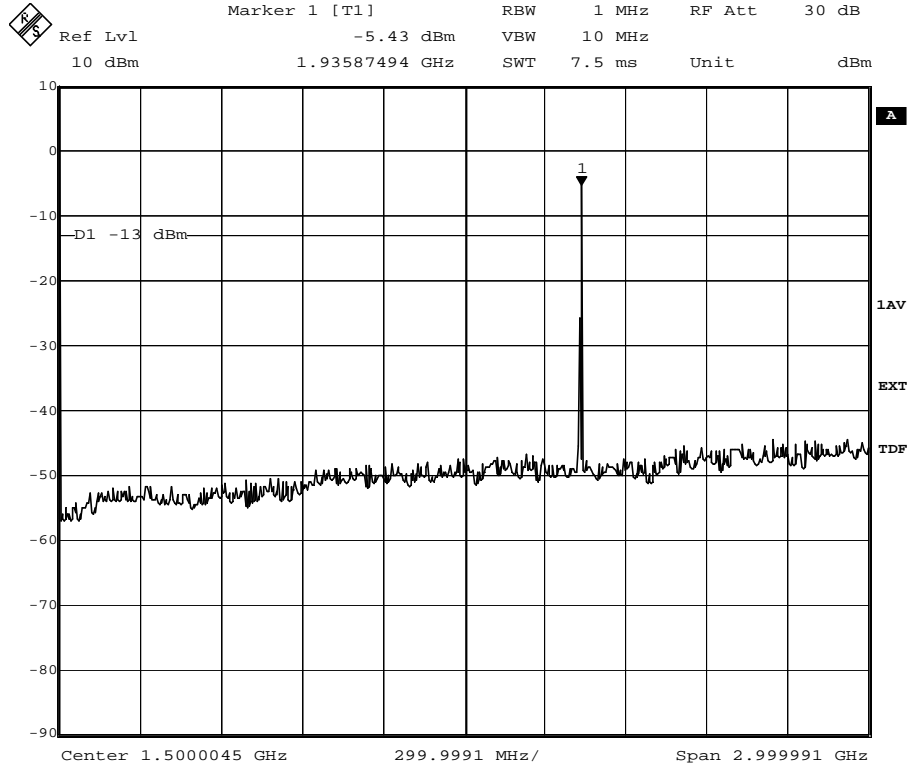

Date: 14.NOV.2003 14:15:14

### Diagram 2

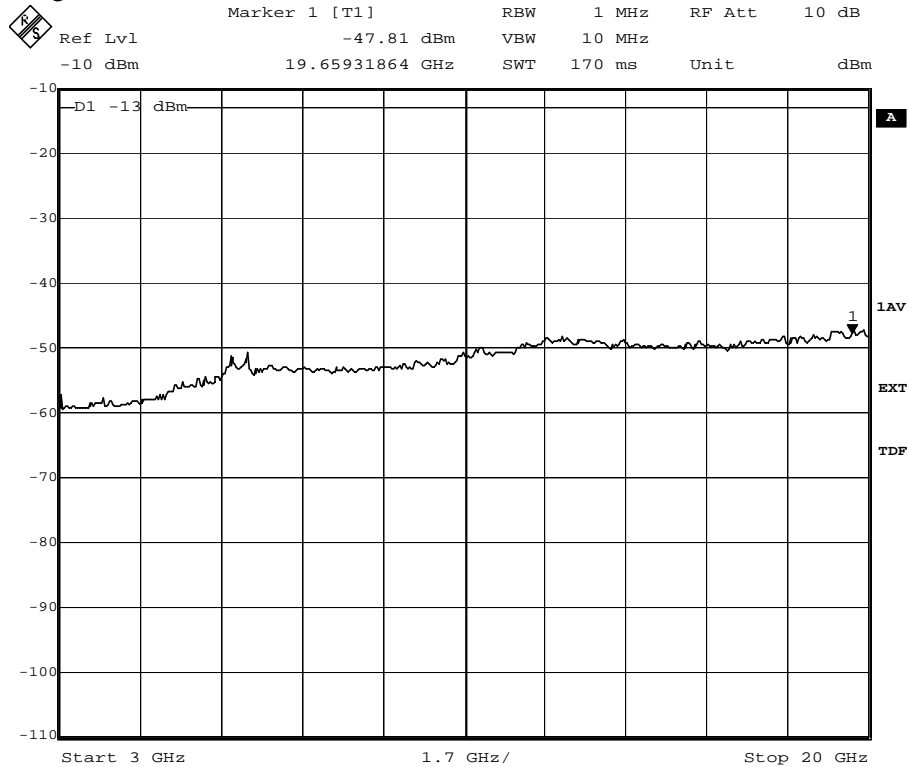

Date: 14.NOV.2003 14:24:17

Sign:.....

# REPORT


Datum/Date  
2003-12-19

Beteckning/Reference  
F326326-F24

Sida/Page  
3 (3)  
Encl. 5


FCC ID: B5KAKRB1011112-2

### Diagram 3

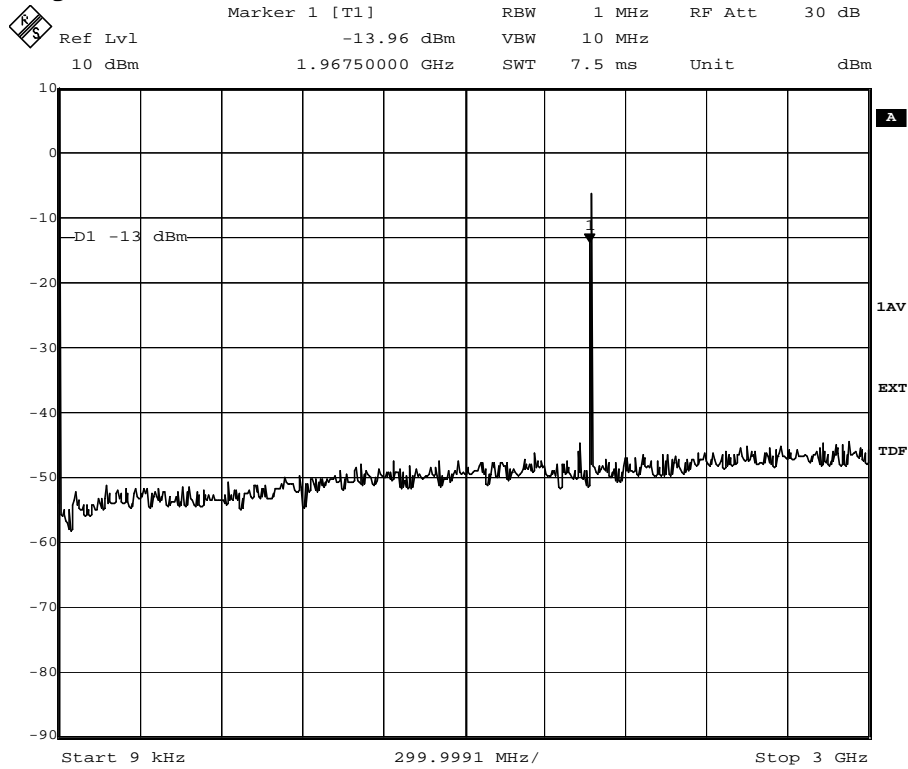

Date: 14.NOV.2003 15:42:22

### Diagram 4

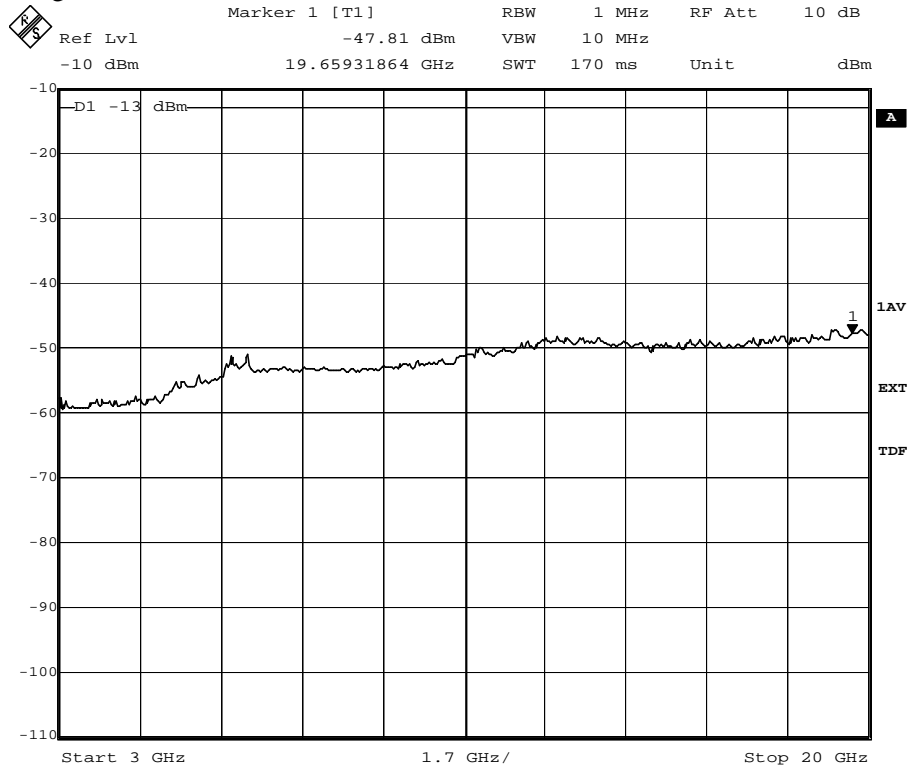

Date: 14.NOV.2003 15:30:10

Sign:.....

**Field strength of spurious radiation measurements according to 47CFR 2.1053**

Date	Temperature	Humidity
2003-11-11	22 °C ± 3 °C	31 % ± 5 %
2003-11-12	21 °C ± 3 °C	35 % ± 5 %
2003-11-13	22 °C ± 3 °C	36 % ± 5 %

**Test set-up and Procedure**

The measurement procedure is per ANSI/TIA/EIA-603-2001. The semi anechoic chamber is listed at FCC, Columbia with registration number: 93866. The test site also complies with RSS 212, Issue 1, Industry Canada file no. :IC 3482.

All 3 TRXes in the cabinet were activated and the output connectors J1, J2, and J3 were terminated with 50 ohm attenuators with termination. The transmitters were set up according to Test Model 1 in 3GPP TS 25.141 during the measurements.

The measurements were performed with both horizontal and vertical polarisation of the antenna. The antenna distance was 3 m and above 18 GHz the antenna distance was 1 m.

A pre-measurement was first performed:

In the frequency range 30 M-20 GHz the measurement was performed in power. A propagation loss in free space was calculated and used as a transducer. The used formula, was, propagation loss =  $20 \log(4\pi x \text{antenna distance} / \lambda)$ .

The measurement procedure was as the following:

1. The pre-measurement was first performed with peak detector. The EUT was measured in eight directions and with the antenna at three heights, 1.0 m, 1.5 m and 2.0 m.
2. Spurious radiation on frequencies closer than 20 dB to the limit was measured with the substitution method according to the standard.

Measurement equipment	Calibration Due	SP number
Anechoic chamber	-	15:115
R&S ESI 40	2004-07	503 125
Control computer	-	503 479
Software: R&S ES-K1, ver. 1.60	-	-
Chase Bilog antenna CBL 6111A	2003-12	503 182
EMCO Horn Antenna 3115	2004-11	502 175
EMCO Horn Antenna 3116	2004-09	503 279
MITEQ Low Noise Amplifier	2004-04	503 277
Testo 615, Temperature and humidity meter	2005-09	503 505

The test set-up during the spurious radiation measurements can be seen in the picture below.



# REPORT

Datum/Date  
2003-12-19

Beteckning/Reference  
F326326-F24

Sida/Page  
3 (3)  
Encl. 6

FCC ID: B5KAKRB1011112-2

## Results

Nominal Voltage -48 V DC

Output power: +43 dBm

The spurious radiation measured with the substitution method can be found in the table below:

		Spurious emission level (dBm)	
Frequency (MHz)	RBW	Vertical	Horizontal
30-20 000	1 MHz	All emission > 20 dB below limit	All emission > 20 dB below limit
Measurement uncertainty		4.7 dB	

## Limits

The power of any emission outside the frequency band shall be attenuated below the transmitter power (P) by at least  $43 + 10 \log P$  dB.

Complies?	Yes
-----------	-----

Sign:.....

# REPORT

Datum/Date  
2003-12-19

Beteckning/Reference  
F326326-F24

Sida/Page  
1 (2)  
Encl. 7

FCC ID: B5KAKRB1011112-2

## EUT Hardware configuration list RBS 3202

Position	Product name	Product number	R-state	Serial number
	RBS 3202 cab	3/BFE 401 1001	R2A	X891004463
	Door	SXK 109 4358/1650	R1B	X89
	CU Unit	BMF 904 31/1	R4A	SA22612164
	<b>BB Subrack, 26 slots</b>	BFX 901 11/1	R2A	X891007440
	BB subrack fan unit	BKV 301 487/1	R3A	TH4CE02099
1	SCB2	ROJ 119 2108/3	R2G/A	T012627119
2	ET-MC1	ROJ 119 2163/1	R5A	T012573806
3	ET-M1	ROJ 119 2101/2	R7E	TU80751941
4	TUB	ROJ 119 2104/4	R2B/A	T012510158
5	Dummy board	SXK 107 8896/1	R3B	X54
6	BBIFB	ROJ 119 2114/2	R2B	TU81743132
7	Dummy board	SXK 107 8896/1	R3B	X54
8	RAX3	ROJ 119 2187/2	R1A/A	AE50365898
9	RAX3	ROJ 119 2187/1	R4E	AE50115319
10	Dummy board	SXK 107 8896/1	R3B	X54
11	Dummy board	SXK 107 8896/1	R3B	X54
12	Dummy board	SXK 107 8896/1	R3B	X54
13	Dummy board	SXK 107 8896/1	R3B	X54
14	Dummy board	SXK 107 8896/1	R3B	X54
15	Dummy board	SXK 107 8896/1	R3B	X54
16	Dummy board	SXK 107 8896/1	R3B	X54
17	TXB	ROJ 119 2124/3	R1M	AE50194776
18	Dummy board	SXK 107 8896/1	R3B	X54
19	Dummy board	SXK 107 8896/1	R3B	X54
20	GPB31	ROJ 119 2106/31	R1H	TU81884067
21	Dummy board	SXK 107 8896/1	R3B	X54
22	Dummy board	SXK 107 8896/1	R3B	X54
23	Dummy board	SXK 107 8896/1	R3B	X54
24	Dummy board	SXK 107 8896/1	R3B	X54
25	Dummy board	SXK 107 8896/1	R3B	X54
26	Dummy board	SXK 107 8896/1	R3B	X54
27	Dummy board	SXK 107 8896/1	R3B	X54
28	Dummy board	SXK 107 8896/1	R3B	X54

Sign:.....



# REPORT

Datum/Date  
2003-12-19

Beteckning/Reference  
F326326-F24

Sida/Page  
2 (2)  
Encl. 7

FCC ID: B5KAKRB1011112-2

Position	Product name	Product number	R-state	Serial number
	<b>RF Subrack, 16 slots</b>	BFX 901 12/1	R1A	X891007441
	RF subrack fan unit	BKV 301 487/1	R3A	TH4CE02093
1	SCB2	ROJ 119 2108/3	R2G/A	TO12627249
2	RFIF	ROJ 119 2115/4	R1C/B	TO12050233
3	Dummy	SXX 107 8896/1	R3B	X54
4	TRXB	ROJ 119 2233/1	R1A	AE50400171
5	Dummy	SXX 107 8896/1	R3B	X54
6	AIU	KRC 101 1451/3	R1B	A4004BXZKQ
7	TRXB	ROJ 119 2233/1	R1A	AE50400152
8	Dummy	SXX 107 8896/1	R3B	X54
9	AIU	KRC 101 1451/3	R1B	A4004BZKK
10	TRXB	ROJ 119 2233/1	R1A	AE50400116
11	Dummy	SXX 107 8896/1	R3B	X54
12	AIU	KRC 101 1451/3	R1B	A4004CJRS
13	Dummy	SXX 107 8896/1	R3B	X54
14	Dummy	SXX 107 8896/1	R3B	X54
15	Dummy	SXX 107 8896/1	R3B	X54
16	Dummy	SXX 107 8896/1	R3B	X54
	<b>AMP Subrack, 6 slots</b>	BFL 119 414/1	R1B	X89
	MCPA hub	--	--	--
1	Amplifier unit / MCPA	KRB 101 1112/2	R1A	A57003D8SE
2	Dummy	--		
3	Amplifier unit / MCPA	KRB 101 1112/2	R1A	A57003DAAH
4	Dummy	--		
5	Amplifier unit / MCPA	KRB 101 1112/2	R1A	A57003DAAF
6	Dummy	--		
	AMP subrack fan unit	BKV 301 488/1	R3A	TH4D909560

Note1: The TRXB unit in the RF Subrack position 4 and amplifier unit in AMP subrack position 1 were used for the measurements on antenna port J1 (1932.5 MHz)

Note2: The TRXB unit in the RF Subrack position 7 and amplifier unit in AMP subrack position 3 were used for the measurements on antenna port J2 (1947.5 MHz)

Note3: The TRXB unit in the RF Subrack position 10 and amplifier unit in AMP subrack position 5 were used for the measurements on antenna port J3 (1967.5 MHz)

Software	Revision
WEGA	INC 3.10

## Description of EUT

The EUT is an amplifier unit intended to be used in a WCDMA Base station designed to provide mobile telephone users with a connection to a mobile network or the PSTN.

Sign:.....

# REPORT

Datum/Date  
2003-12-19

Beteckning/Reference  
F326326-F24

Sida/Page  
1 (22)  
Encl. 8

FCC ID: B5KAKRB1011112-2

## Photos

Amplifier Unit, KRB 101 1112/2, R1A

FCC ID



Front side



Back side



Sign:.....

# REPORT


FCC ID: B5KAKRB1011112-2

Datum/Date  
2003-12-19

Beteckning/Reference  
F326326-F24

Sida/Page  
2 (22)  
Encl. 8

Top side

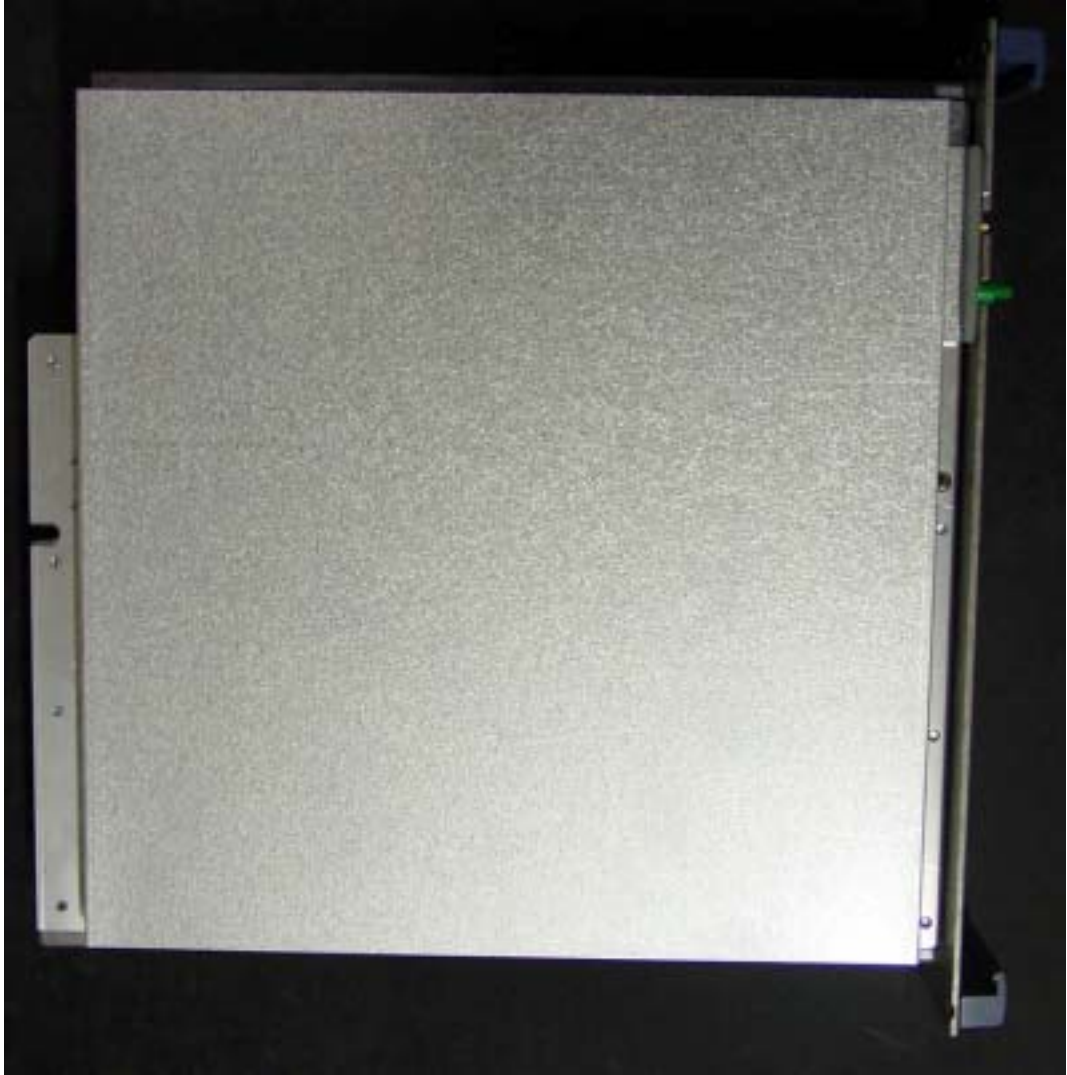

Sign:.....

# REPORT


FCC ID: B5KAKRB1011112-2

Datum/Date  
2003-12-19

Beteckning/Reference  
F326326-F24

Sida/Page  
3 (22)  
Encl. 8

Bottom side

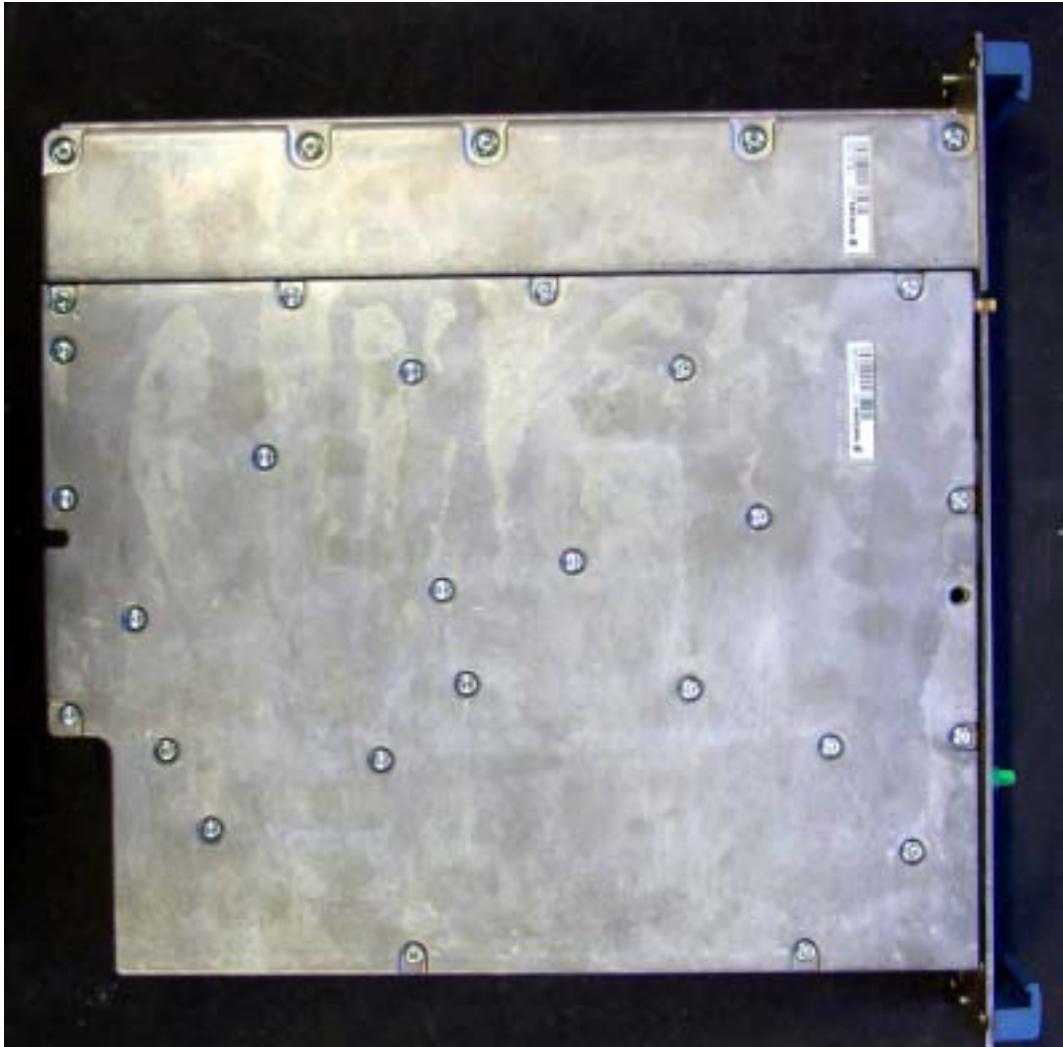

Sign:.....

# REPORT


FCC ID: B5KAKRB1011112-2

Datum/Date  
2003-12-19


Beteckning/Reference  
F326326-F24

Sida/Page  
4 (22)  
Encl. 8

Board 1 component side

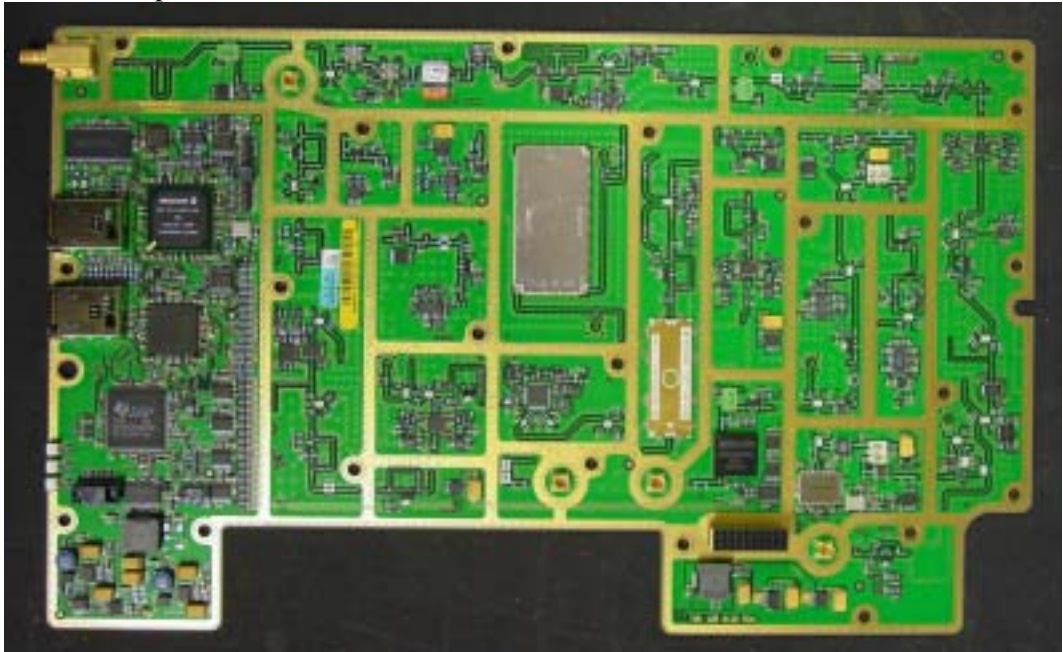

Board 1 back side

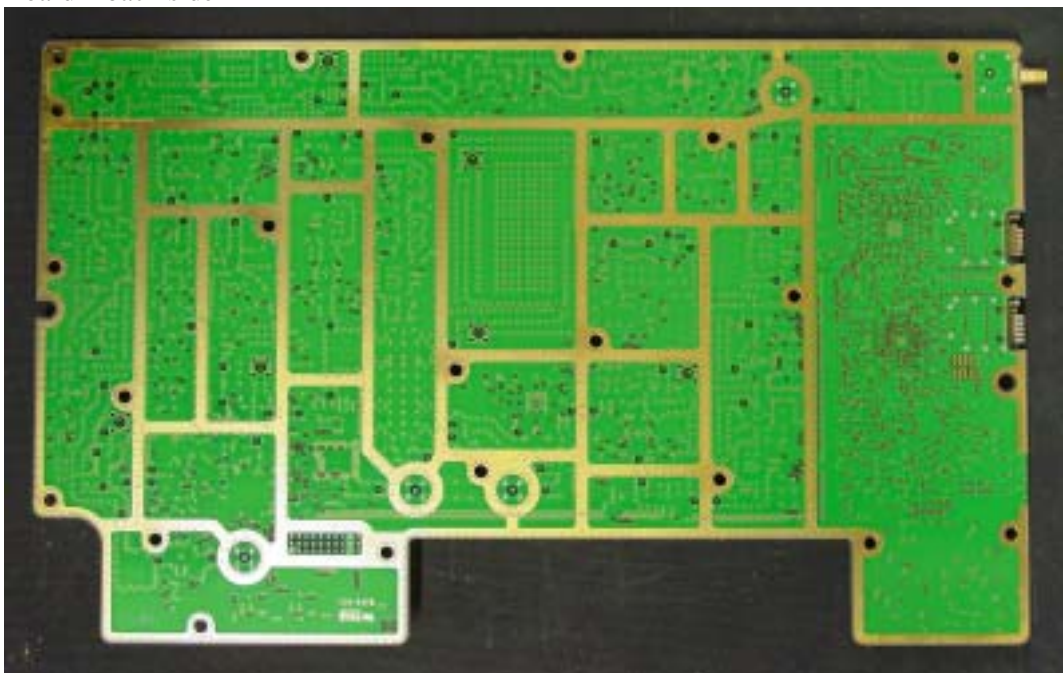

Sign:.....

# REPORT

FCC ID: B5KAKRB1011112-2

Datum/Date  
2003-12-19

Beteckning/Reference  
F326326-F24

Sida/Page  
5 (22)  
Encl. 8

Board 1 removed



Sign:.....

# REPORT

FCC ID: B5KAKRB1011112-2

Datum/Date  
2003-12-19

Beteckning/Reference  
F326326-F24

Sida/Page  
6 (22)  
Encl. 8

Board 2, component side



Sign:.....

# REPORT


FCC ID: B5KAKRB1011112-2

Datum/Date  
2003-12-19

Beteckning/Reference  
F326326-F24

Sida/Page  
7 (22)  
Encl. 8

Board 2, component side with transistor holdings and filter removed

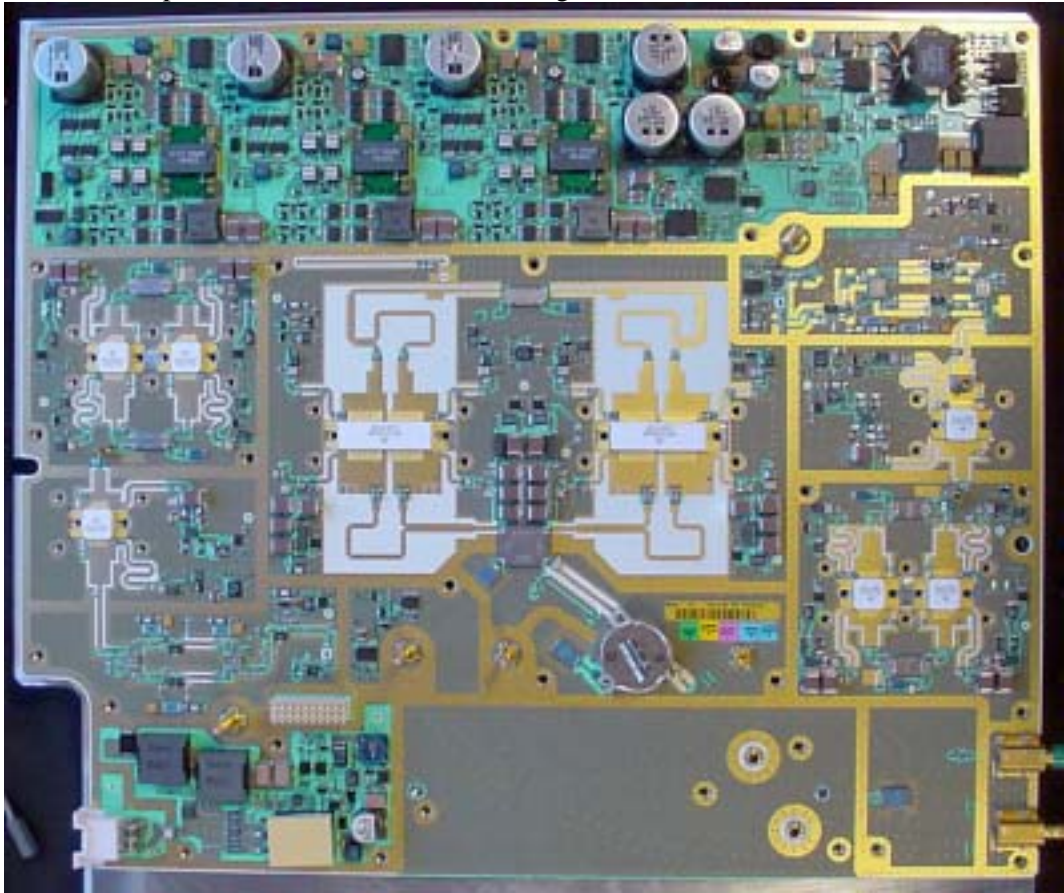

Sign:.....



# REPORT


FCC ID: B5KAKRB1011112-2

Datum/Date  
2003-12-19

Beteckning/Reference  
F326326-F24

Sida/Page  
8 (22)  
Encl. 8

Board 2, back side

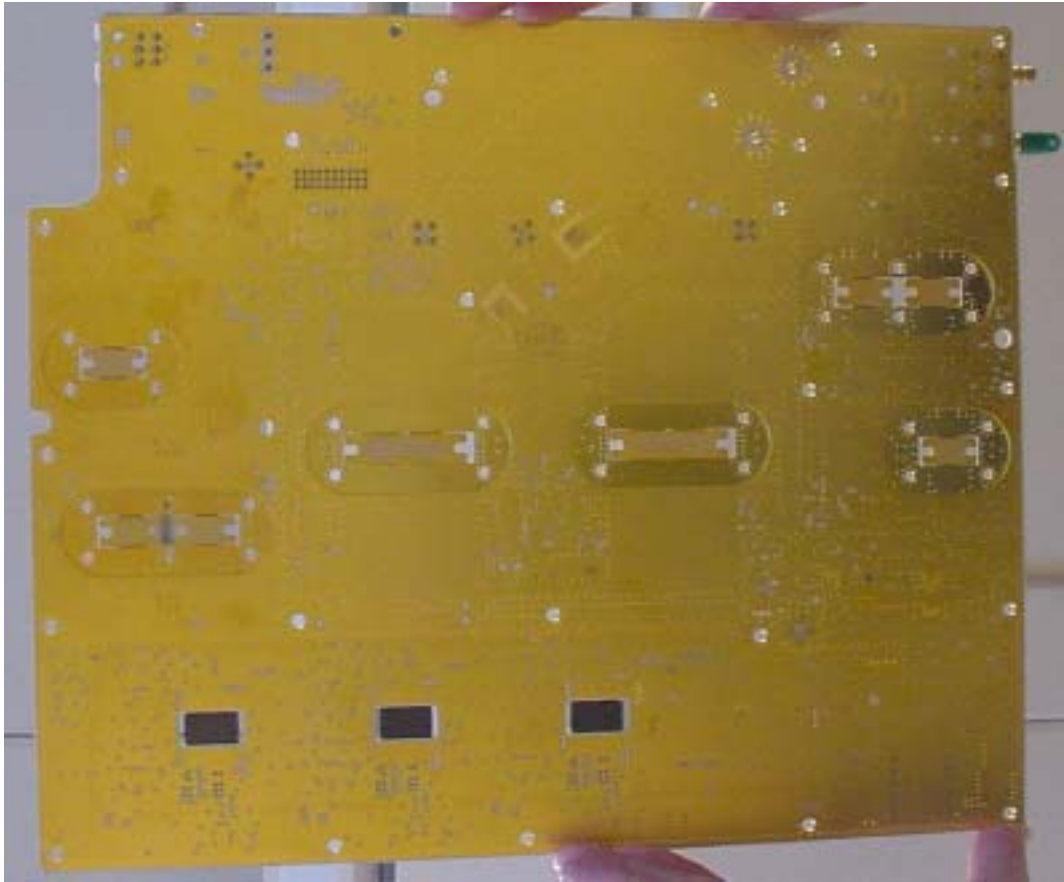

Sign:.....

# REPORT

Datum/Date  
2003-12-19

Beteckning/Reference  
F326326-F24

Sida/Page  
9 (22)  
Encl. 8

FCC ID: B5KAKRB1011112-2

## Antenna interface unit, KRC 101 1451/3, R1B

FCC ID



Front side



Back side



Sign:.....

# REPORT

FCC ID: B5KAKRB1011112-2

Datum/Date  
2003-12-19

Beteckning/Reference  
F326326-F24

Sida/Page  
10 (22)  
Encl. 8

Top side



Sign:.....

# REPORT

FCC ID: B5KAKRB1011112-2

Datum/Date  
2003-12-19

Beteckning/Reference  
F326326-F24

Sida/Page  
11 (22)  
Encl. 8

Bottom side



Sign:.....

# REPORT


FCC ID: B5KAKRB1011112-2

Datum/Date  
2003-12-19

Beteckning/Reference  
F326326-F24

Sida/Page  
12 (22)  
Encl. 8

Board 1 component side

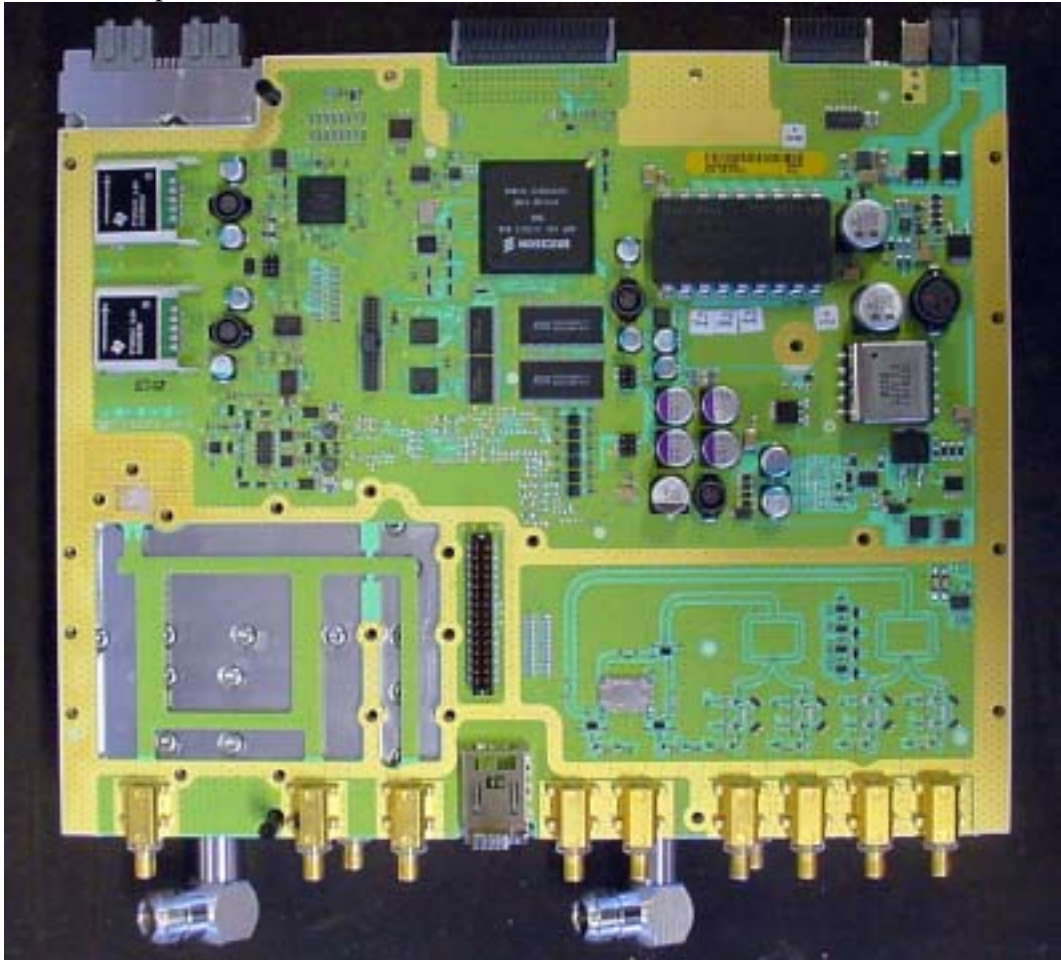

Sign:.....

# REPORT


FCC ID: B5KAKRB1011112-2

Datum/Date  
2003-12-19

Beteckning/Reference  
F326326-F24

Sida/Page  
13 (22)  
Encl. 8

Board 1 back side

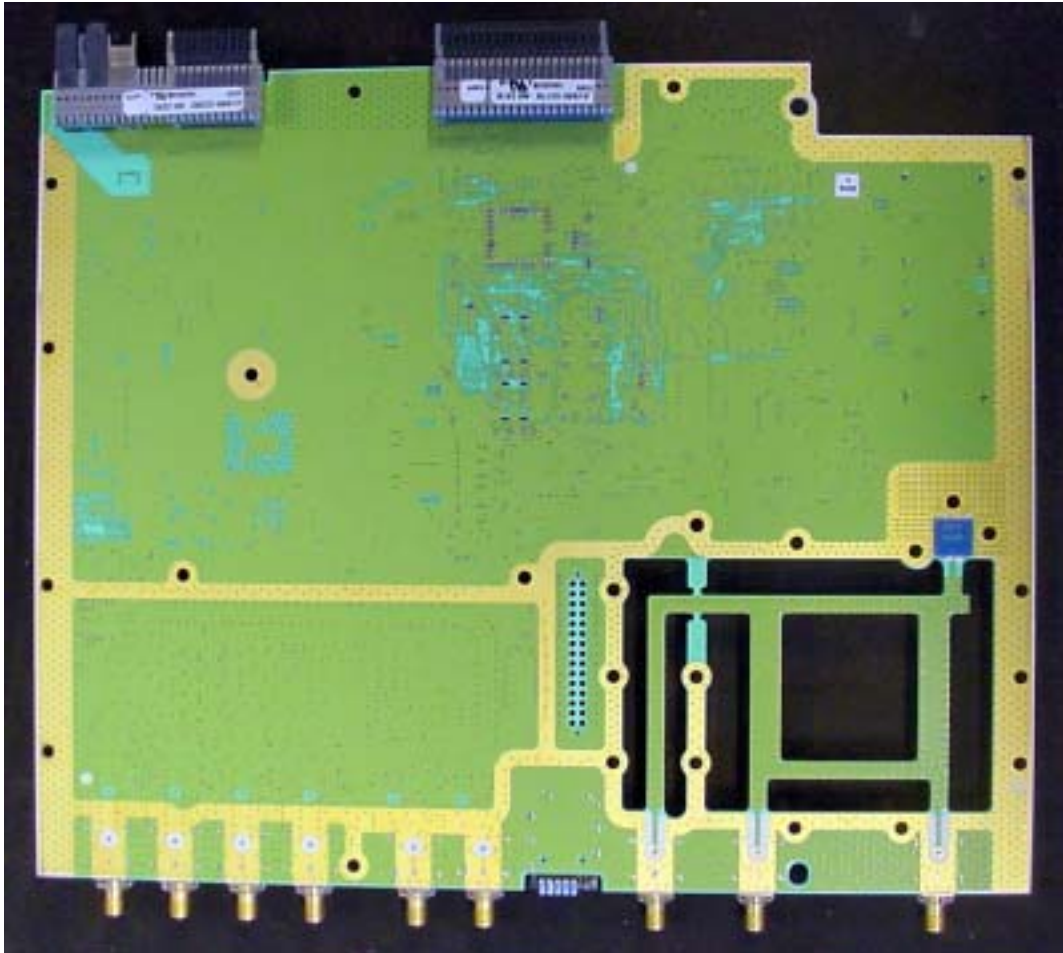

Sign:.....

# REPORT


FCC ID: B5KAKRB1011112-2

Datum/Date  
2003-12-19

Beteckning/Reference  
F326326-F24

Sida/Page  
14 (22)  
Encl. 8

Board 1 removed

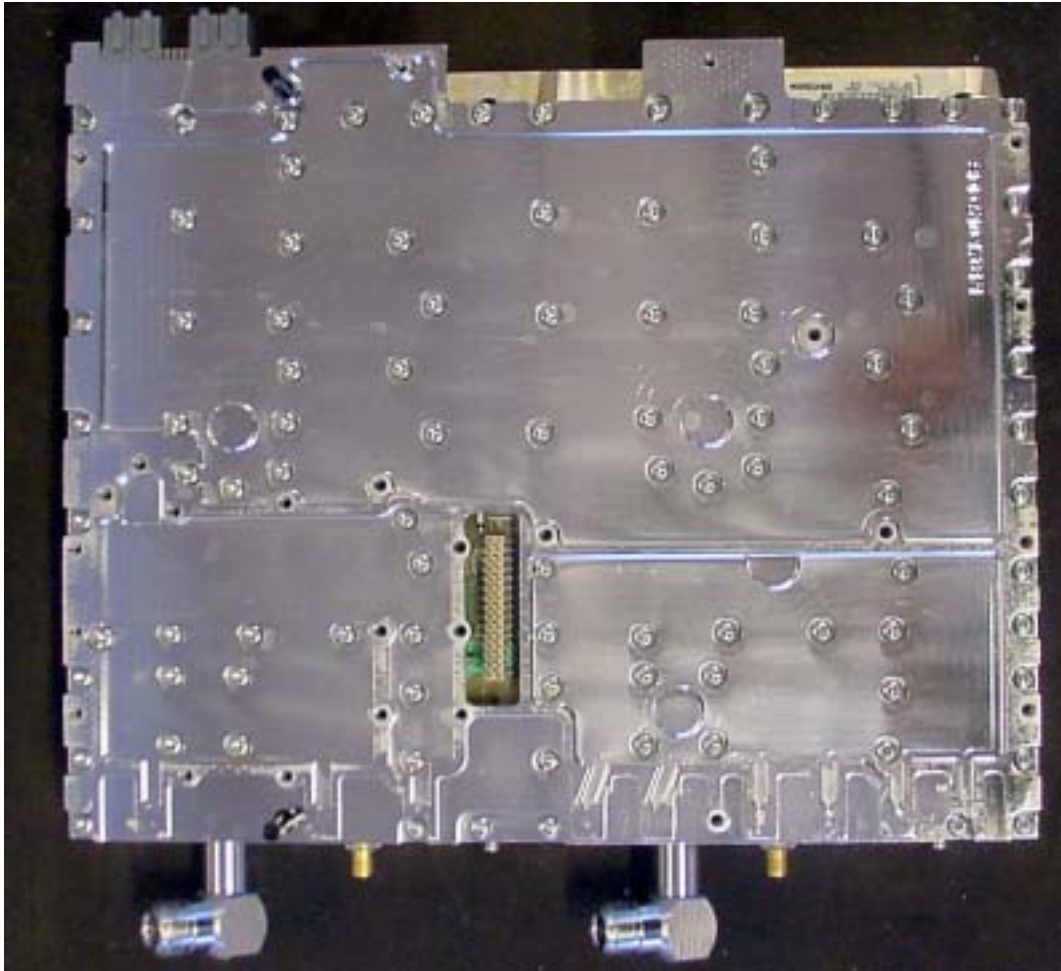

Sign:.....

# REPORT


FCC ID: B5KAKRB1011112-2

Datum/Date  
2003-12-19

Betekning/Reference  
F326326-F24

Sida/Page  
15 (22)  
Encl. 8

Board 2 component side

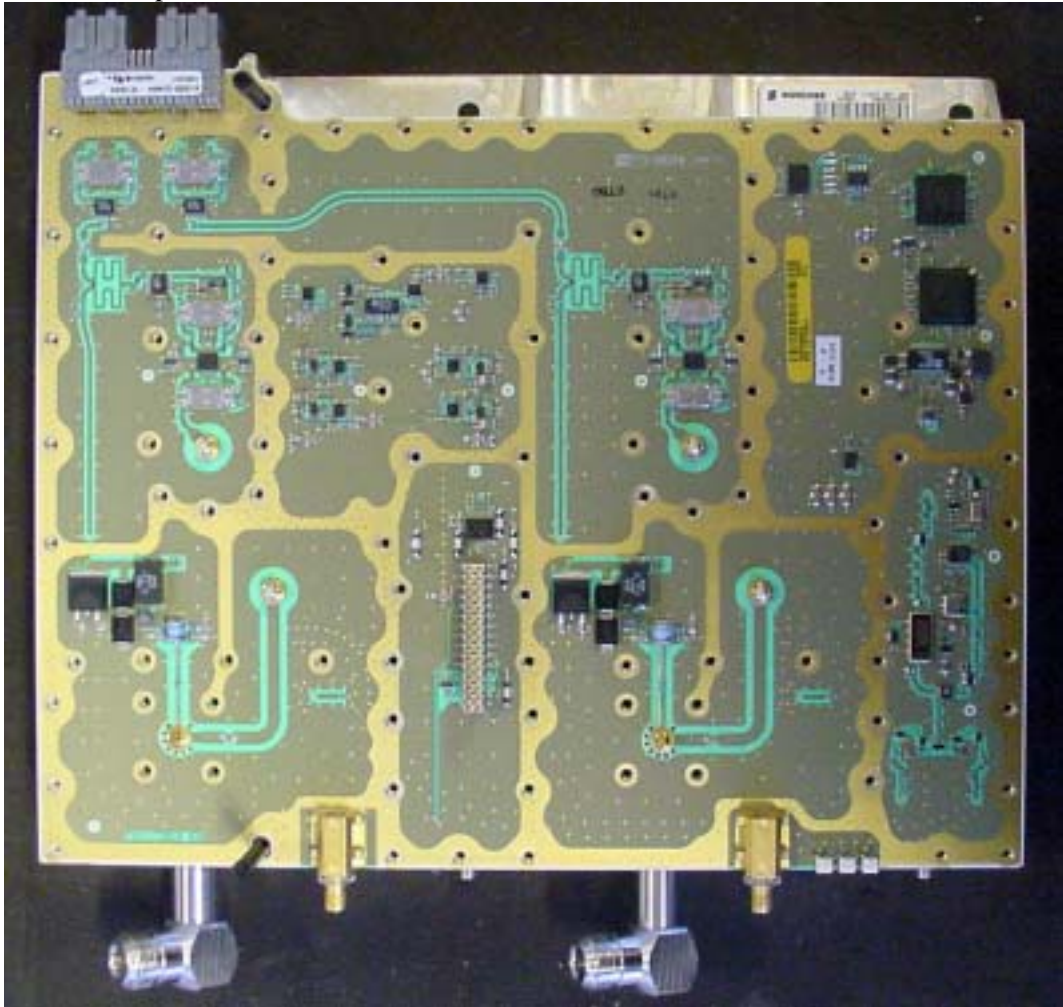

Sign:.....



# REPORT


FCC ID: B5KAKRB1011112-2

Datum/Date  
2003-12-19

Beteckning/Reference  
F326326-F24

Sida/Page  
16 (22)  
Encl. 8

Board 2 back side

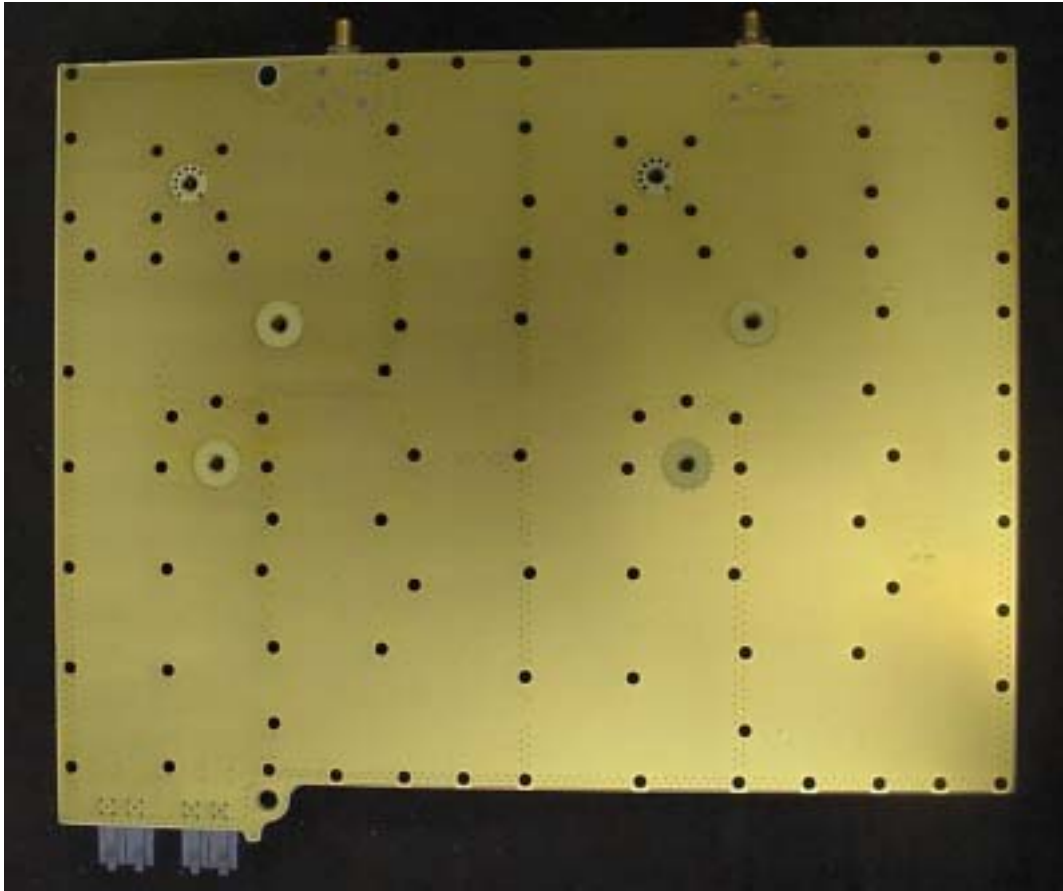

Sign:.....

# REPORT


FCC ID: B5KAKRB1011112-2

Datum/Date  
2003-12-19

Betekning/Reference  
F326326-F24

Sida/Page  
17 (22)  
Encl. 8

Filter

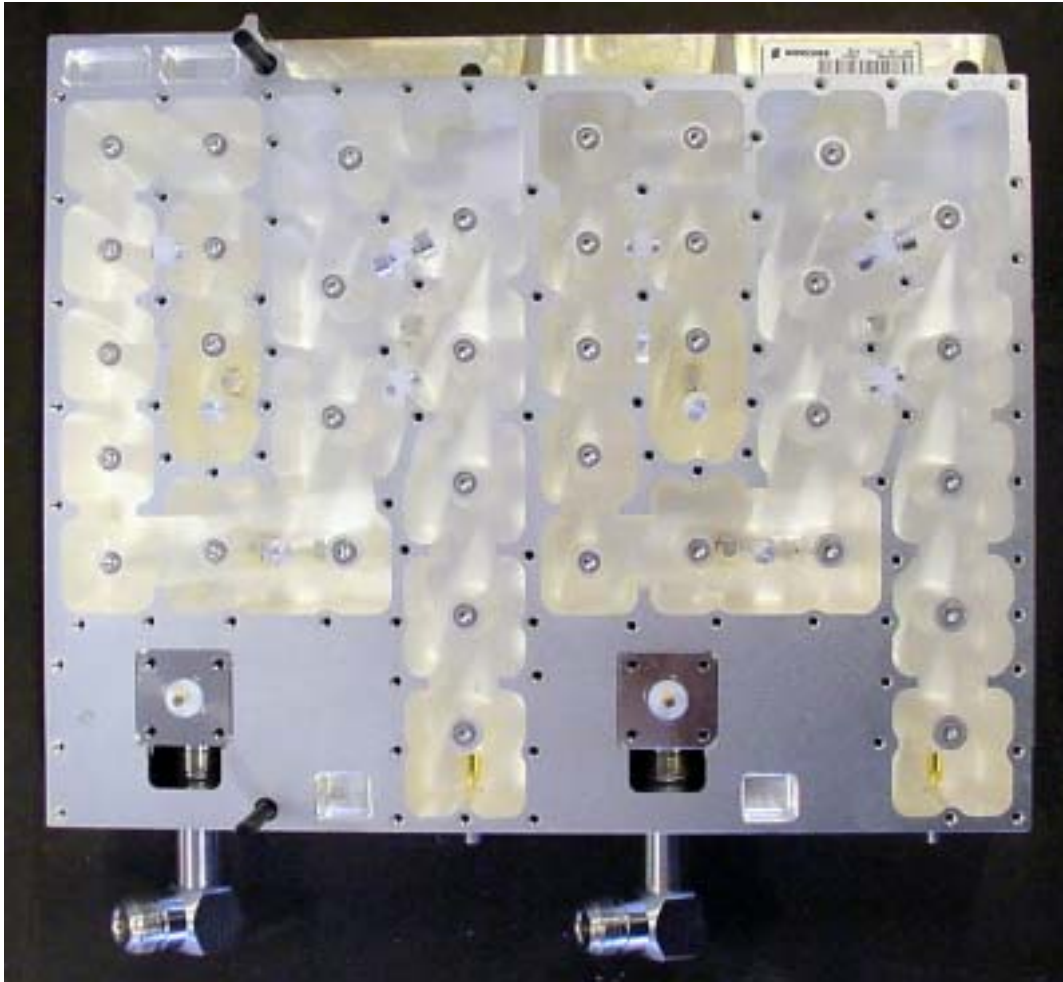

Sign:.....

# REPORT

FCC ID: B5KAKRB1011112-2


Datum/Date  
2003-12-19

Beteckning/Reference  
F326326-F24

Sida/Page  
18 (22)  
Encl. 8

## RBS 3202 Cabinet, -48 Volt DC system

Front view

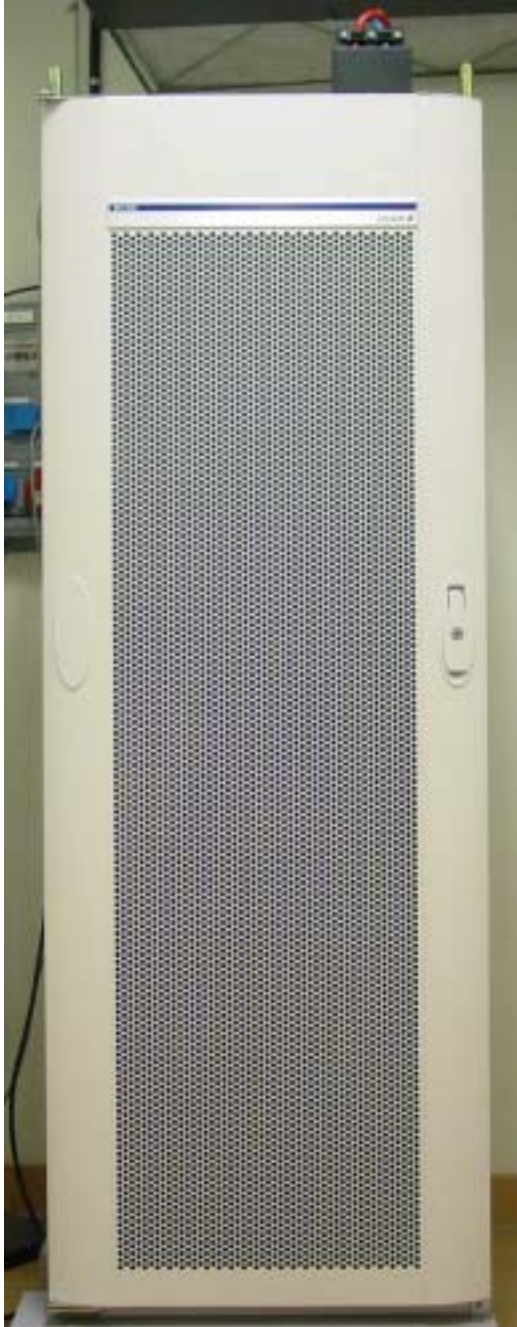

Rear view



Sign:.....

# REPORT

FCC ID: B5KAKRB1011112-2

Datum/Date  
2003-12-19

Betekning/Reference  
F326326-F24

Sida/Page  
19 (22)  
Encl. 8

Internal view



Sign:.....

# REPORT

FCC ID: B5KAKRB1011112-2

Datum/Date  
2003-12-19

Betekning/Reference  
F326326-F24

Sida/Page  
20 (22)  
Encl. 8

CU unit and BB Subrack



Sign:.....

# REPORT

FCC ID: B5KAKRB1011112-2

Datum/Date  
2003-12-19

Beteckning/Reference  
F326326-F24

Sida/Page  
21 (22)  
Encl. 8

## RF Subrack



Sign:.....

# REPORT

FCC ID: B5KAKRB1011112-2

Datum/Date  
2003-12-19

Beteckning/Reference  
F326326-F24

Sida/Page  
22 (22)  
Encl. 8

AMP Subrack



Sign:.....