



REPORT

issued by an Accredited Testing Laboratory, FCC listed with Reg. no. 93866 and IC recognized pursuant IC file no. 3482A.

Contact person
Reinhold Reul
Electronics
+46 10 516 55 84
Reinhold.Reul@sp.se

Date
2012-02-29

Reference
FX108941-9 Rev 1

Page
1 (2)



Ericsson (China) Communications Company Ltd
Att. Hua Yang
Ericsson Tower
No. 5 Lize East Street
Chaoyang District, Beijing 100102
P. R. China

Class II Permissive Change measurements on GSM Base station Transceiver Unit with FCC ID: B5KDKRC1311004-2

(8 appendices)

Revision 1 uses updated client information in appendix 1 regarding the declared nominal output power.

Test object

Transceiver Unit dTRU-19, product KRC 131 1004/2, revision R3A

Summary

| Standard | Compliant | Appendix | Remarks |
|---|-----------|----------|---------|
| FCC CFR 47 | | | |
| 2.1046 RF Power output | Yes | 2 | - |
| 2.1049 Occupied bandwidth | Yes | 3 | - |
| 2.1051 Band Edge | Yes | 4 | - |
| 2.1051 Spurious emission at antenna port | Yes | 5 | - |
| 2.1053 Field strength of spurious radiation | Yes | 6 | - |

SP Technical Research Institute of Sweden Electronics - EMC

Performed by

Reinhold Reul

Examined by

Christer Karlsson

SP Technical Research Institute of Sweden

Postal address

SP
Box 857
SE-501 15 BORÅS
Sweden

Office location

Västeråsen
Brinellgatan 4
SE-504 62 BORÅS

Phone / Fax / E-mail

+46 10 516 50 00
+46 33 13 55 02
info@sp.se

Laboratories are accredited by the Swedish Board for Accreditation and Conformity Assessment (SWEDAC) under the terms of Swedish legislation. This report may not be reproduced other than in full, except with the prior written approval of the issuing laboratory.

Table of contents

| | |
|--|------------|
| Description of the test object | Appendix 1 |
| Purpose of test | Appendix 1 |
| Summary of results | Appendix 1 |
| Tested configurations | Appendix 1 |
| RF power output | Appendix 2 |
| Occupied bandwidth | Appendix 3 |
| Band edge | Appendix 4 |
| Spurious emission at antenna terminals | Appendix 5 |
| Field strength of spurious radiation | Appendix 6 |
| Hardware list and software | Appendix 7 |
| Photos of the test object | Appendix 8 |

Appendix 1

Description of the test object

Equipment: GSM Base station transceiver unit (dTRU) 1900 MHz

TX frequency band: 1930 - 1990 MHz

Modulations: GMSK, 8PSK, 16QAM, 32QAM, AQPSK

| Declared maximum output power, RMS value in [dBm] | Modulations | | | | |
|---|-------------|------|-------|-------|-------|
| | GMSK | 8PSK | 16QAM | 32QAM | AQPSK |
| Hybrid combined (HC) mode | 40.7 | 37.4 | 36.0 | 35.6 | 37.3 |
| Uncombined (UC) mode | 44.0 | 41.0 | 39.3 | 38.9 | 40.6 |
| TCC mode | 46.0 | 43.0 | 41.3 | 40.9 | 42.6 |

Supply voltage 24 V DC

Purpose of test

The purpose of this test is to justify a Class II Permissive Change of the test object to include the use of AQPSK modulation with SCPIR 0 dB. This report verifies maintained performance characteristics of affected items according FCC CFR47 by re-testing the updated equipment and comparing results for GMSK reference modulation with AQPSK modulation in SCPIR 0 dB. For band-edge performance the acceptable settings for the new implemented AQPSK modulation were determined.

Summary of results

Measurement results are similar for all tested modulations, apart from output power, where GMSK modulation results in the highest RMS output power, and for band-edge performance, where specific restrictions apply as described in appendix 4. Where several modulations were compared, GMSK modulation shall be considered a worst case set-up.

Tested configurations

All measurements were performed with the test object installed in a RBS 2206 V2 cabinet. The hardware list for radiated and conducted measurements is shown in appendix 7. Unless noted otherwise the test object was activated at maximum power, configured for TCC mode with RBS master 2E setting 49, resulting in the highest achievable RF output power. In all used configurations random data was transmitted by the activated TX in all time slots with the various tested modulations being activated one at a time.



Appendix 1

Conducted measurements

Conducted measurements were done at the output connector TX/RX 1 of CDU-G19.

Radiated measurements

During radiated emission measurements the TX/RX 1 output of CDU-G19 was via a 50 ohm attenuator connected to a spectrum analyser to monitor the transmitted signal level. For the scope of this test it was deemed sufficient to measure radiated spurious emission at the TX band centre frequency for GMSK modulation as worst case reference modulation with the highest RMS power and compare it with results for the AQPSK modulation with SCPIR 0 dB.

Frequencies used

| Channel | ARFCN | Frequency | Comment |
|---------|-------|------------|--|
| B | 512 | 1930.2 MHz | TX frequency adjacent lower frequency band edge |
| B+1 | 513 | 1930.4 MHz | TX low alternate frequency, 1 channel inside band |
| M | 661 | 1960.0 MHz | TX band centre frequency |
| T-1 | 809 | 1989.6 MHz | TX high alternate frequency, 1 channel inside band |
| T | 810 | 1989.8 MHz | TX frequency adjacent higher frequency band edge |

Manufacturer's representative

Hua Yang, Ericsson (China) Communications Company Ltd

References

Measurements were done according to relevant parts of the following standards:

ANSI C63.4-2009

ANSI/TIA/EIA-603-C-2004

ANSI/TIA/EIA 136-280-D-2002

CFR 47 part 2, October 1st, 2010

CFR 47 part 24, October 1st, 2010

Reservation

The test results in this report apply only to the particular Equipment Under Test (EUT) as declared in the report.

Delivery of test object

The test object was delivered on 13th June 2011.

Appendix 1

Test equipment

| Measurement equipment | Calibration Due | SP number |
|--|-----------------|-----------|
| Anechoic chamber, Hertz | 2013-10 | 15:116 |
| Boonton 4500A RF Peak power meter/analyser | 2012-11 | 503 144 |
| Boonton Power sensor 56518-S/4 | 2012-11 | 503 146 |
| Rohde & Schwarz FSIQ40 | 2012-07 | 503 738 |
| Rohde & Schwarz ESI40 | 2012-07 | 503 125 |
| Rohde & Schwarz Vector Network Analyser | 2012-07 | 503 687 |
| Chase bilog antenna CBL 6121A | 2014-10 | 502 460 |
| Schaffner Reference Dipole BSRD6500 | 2012-03 | 502 181 |
| EMCO Horn Antenna 3115 | 2014-01 | 502 175 |
| EMCO Horn Antenna 3115 | 2014-01 | 501 548 |
| MITEQ Low Noise Amplifier | 2012-08 | 503 277 |
| Flann Std gain horn 20240-20 | 2014-03 | 503 674 |
| Attenuator 40 dB | 2012-08 | 504 159 |
| High pass filter | 2012-08 | 504 200 |
| High pass filter | 2012-08 | 503 739 |
| Multimeter Fluke 87 | 2012-05 | 502 190 |
| Testo 615 temperature and humidity meter | 2012-03 | 503 498 |
| Testo 635 temperature and humidity meter | 2013-05 | 504 203 |

Uncertainties

Measurement and test instrument uncertainties are described in the quality assurance documentation "SP-QD 10885". The uncertainties are calculated with a coverage factor $k=2$ (95% level of confidence).

Test engineers


Jörgen Wassholm, Fredrik Isaksson, Martin Nilsson, Martin Forsberg and Reinhold Reul, SP

Test witness

-

Appendix 1

Test set-up, conducted measurements

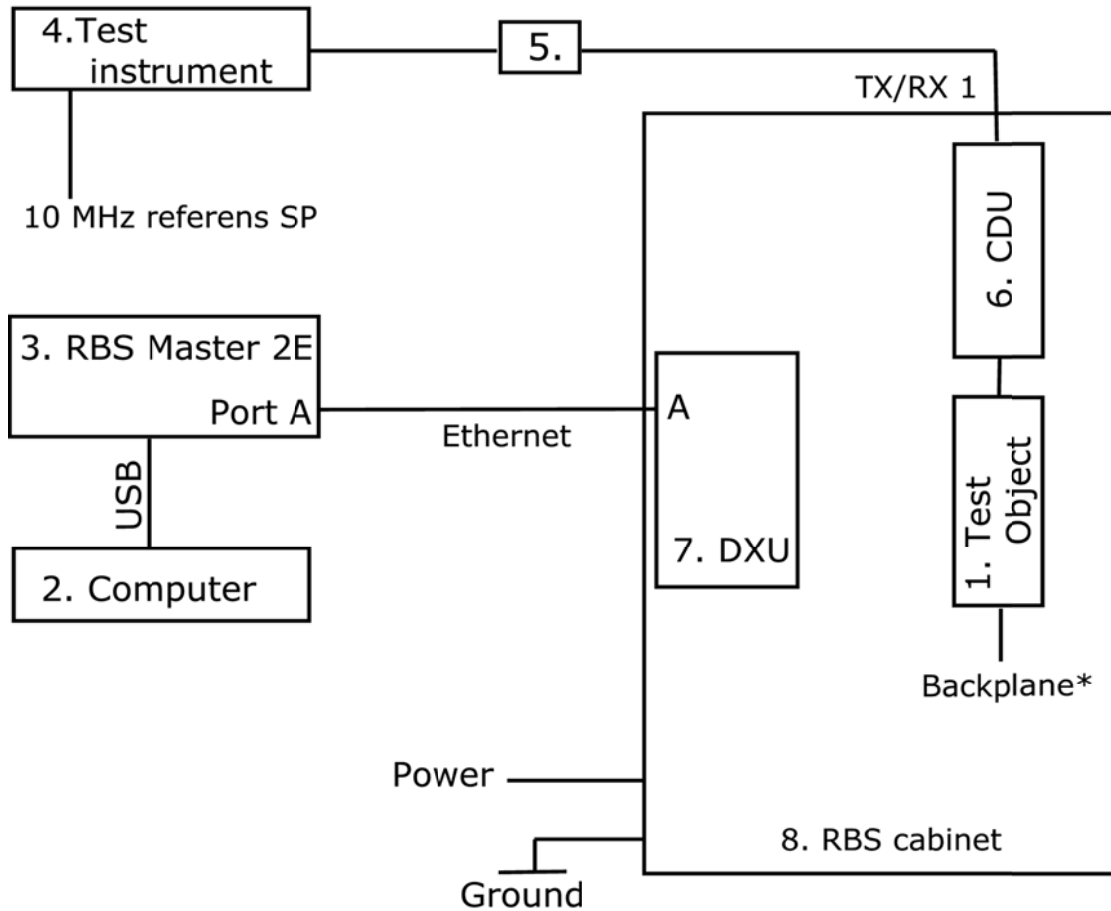

*) Power and data communication via backplane

Test object


1. Transceiver Unit dTRU-19, product KRC 131 1004/2, revision R3A, SN AE52476769 with FCC ID: B5KDKRC1311004-2

Functional test equipment

2. HP laptop computer Compaq nc6000, product PM307ES#AB2, SN CNU51206GT, with RBS Master2 control software
3. Ericsson RBS Master 2E hardware, product LBY 107 1007/3, revision R1C BAMS 1000878365
4. Agilent MXA Signal Analyser model N9020A 20 Hz – 3.6 GHz, BAMS 1000785533, used to verify the modulation schemes and SP test equipment according respective appendix
5. Attenuator / filter listed as test equipment in respective appendix
6. CDU-G19, product BFL 119 153/1, revision R5F, serial number A40003X4CF
- 7./8. DXU and remaining RBS cabinet according hardware list in appendix 7

Appendix 1

Test set-up, radiated emission

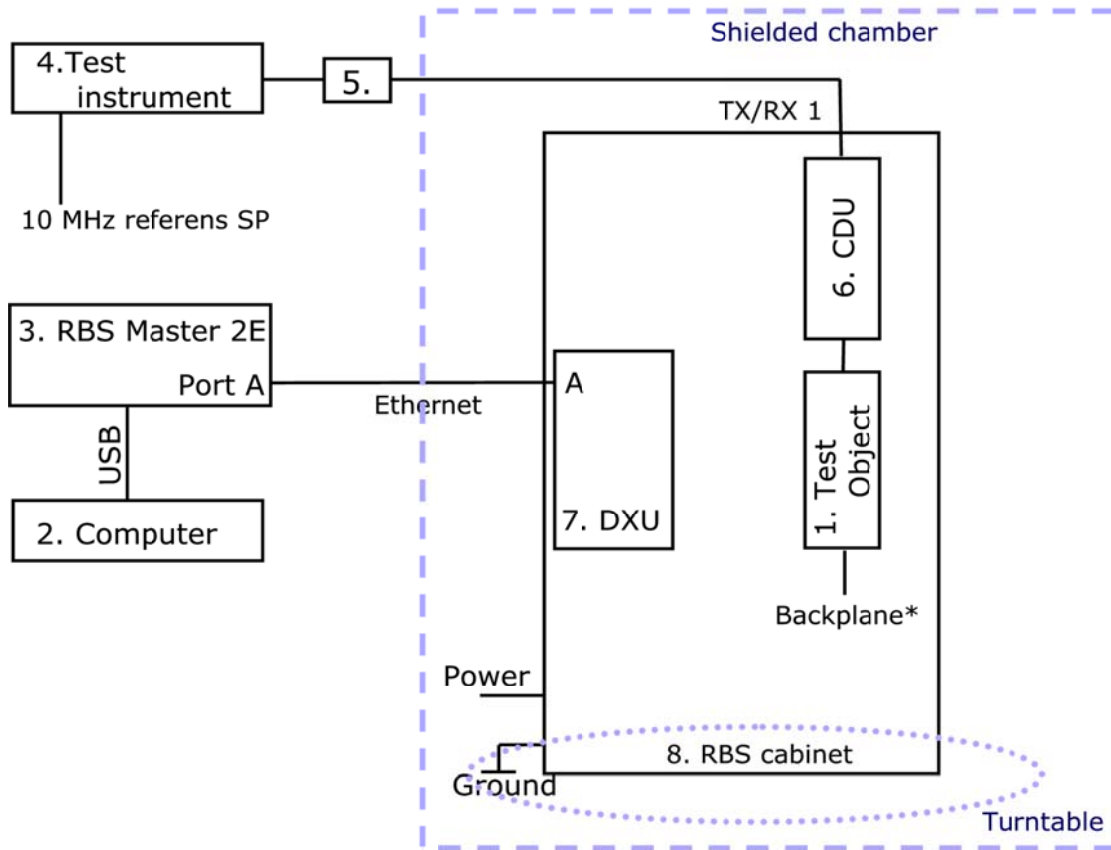

*) Power and data communication via backplane

Test object

1. Transceiver Unit dTRU-19, product KRC 131 1004/2, revision R3A, SN AE52476769 with FCC ID: B5KDKRC1311004-2

Functional test equipment

2. HP laptop computer model Compaq NC6400 SN CND72717JP with RBS Master2 control software
3. Ericsson RBS Master 2E hardware, product LBY 107 1007/3, revision R1C, BAMS 1000735211
4. Rohde & Schwarz ESI40 for signal verification or 50 ohm termination
5. Attenuator 40 dB, SP 504 159
6. CDU-G19, product BFL 119 153/1, revision R5F, serial number A40003X4CF
- 7./8. DXU and RBS cabinet according hardware list in appendix 7



Appendix 1

Test object connections**Interface**

Power via RBS backplane

TX 1 + TX 2 interconnection to CDU in TCC/HC mode

Interconnection TX 1 to CDU in UC mode

Interconnection TX 2 to CDU in UC mode

RX 1 to CXU10

RX 2 to CXU10

RX 3 not connected

RX 4 not connected

Type of port

DC power

RF interconnect

RF interconnect

RF interconnect

RF interconnect

RF interconnect

RF interconnect

RBS cabinet external connections**Interface**

External supply 24 V DC

Active CDU TX/RX 1, used for measurement and monitoring

Active CDU TX/RX 2 and inactive CDU's outputs unconnected

Ethernet shielded multi-wire with RJ-45 connector to RBS master

2E, port A, mode E1

External alarm not connected

ESB not connected

GPS not connected

OMT interface for configuration not connected

Type of port:

DC power

RF/Antenna

RF/Antenna

Telecom

Signal

Signal

Signal

O/M

Appendix 2

RF Power output measurements according to CFR 47 2.1046

| | | |
|--------------------|-----------------------------|------------------------|
| Date 2011-12-02 | Temperature 23 °C ± 3 °C | Humidity 30 % ± 5 % |
|--------------------|-----------------------------|------------------------|

Test set-up and procedure

Measurements were made with the CDU output connected to a peak power analyser via a 50 ohm attenuator.

| Measurement equipment | SP number |
|--|-----------|
| Boonton 4500A RF Peak power meter/analyser | 503 144 |
| Boonton Power sensor 56518-S/4 | 503 146 |
| Attenuator | 504 159 |
| Multimeter Fluke 87 | 502 190 |
| Testo 635 temperature and humidity meter | 504 203 |

Measurement uncertainty: 0.7 dB

Results

Configuration TCC mode, RBS master 2E setting 49.

| Transmitter power (dBm) | | | |
|-------------------------|------------|------|------|
| Channel | Modulation | Peak | RMS |
| M | GMSK | 47.2 | 46.2 |
| M | AQPSK | 46.9 | 42.8 |

The maximum PAR measured above was 4.1 dB.

Limits

According to CFR § 24 there are no conducted limits at the antenna connector.

§ 24.232: The peak-to-average (PAR) ratio shall not exceed 13 dB. Base stations with an emission bandwidth of 1 MHz or less are limited to 1640 watts equivalent isotropically radiated power (EIRP).

| | |
|-----------|-----|
| Complies? | Yes |
|-----------|-----|

Appendix 3

Occupied bandwidth measurements according to 47CFR 2.1049

| | | |
|------------|--------------|------------|
| Date | Temperature | Humidity |
| 2011-12-02 | 23 °C ± 3 °C | 30 % ± 5 % |

Test set-up and procedure

The measurements were made per definition in §24.238 with the output of the CDU connected to a spectrum analyser with activated RMS detector. The spectrum analyser was connected to an external 10 MHz reference standard during the measurements.

| Measurement equipment | SP number |
|--|-----------|
| R&S FSIQ | 503 738 |
| Attenuator | 504 159 |
| Multimeter Fluke 87 | 502 190 |
| Testo 635 temperature and humidity meter | 504 203 |

Measurement uncertainty: 3.7 dB, 1.33 kHz

Results


Configuration: TCC mode, RBS master 2E setting 49.

| Diagram | Channel | Modulation | OBW |
|---------|---------|------------|---------|
| 1 | M | GMSK | 241 kHz |
| 2 | M | AQPSK | 237 kHz |

The diagrams are shown on the following page.


Appendix 3

Diagram 1:

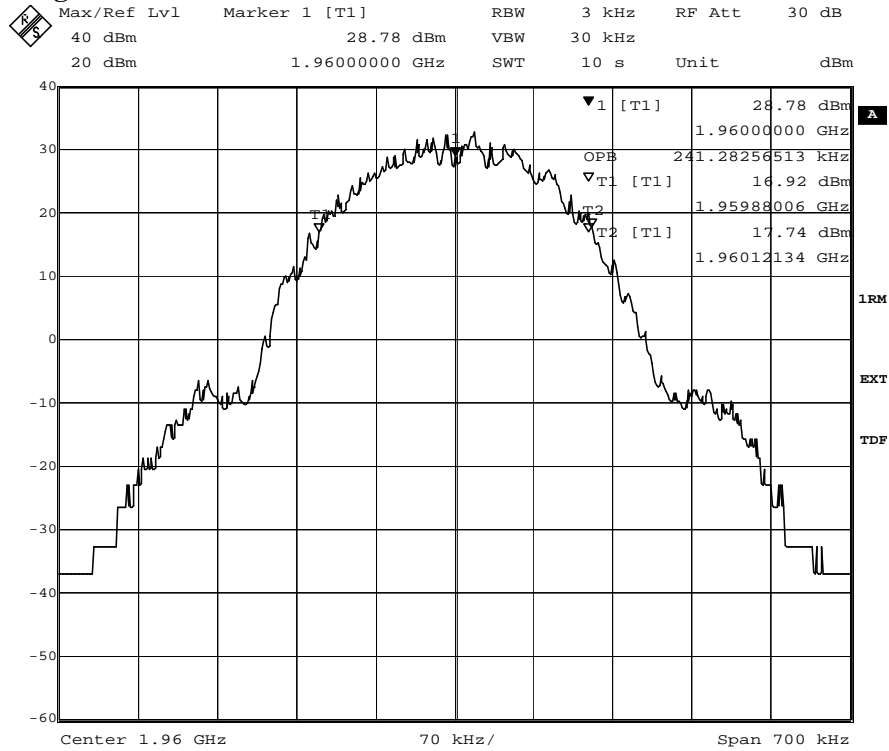

Date: 2.DEC.2011 09:36:16

Diagram 2:

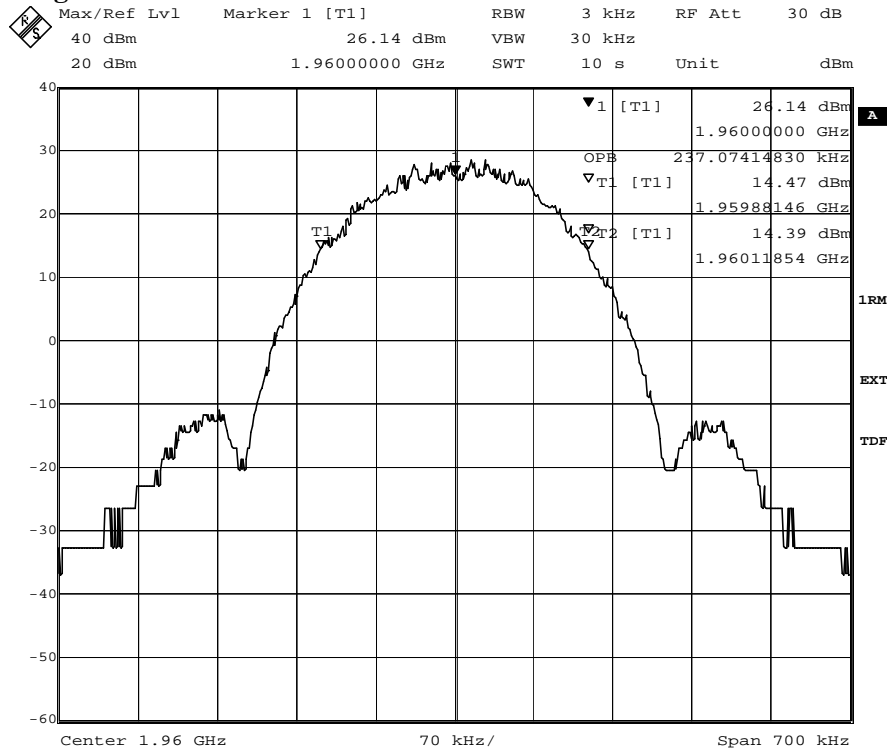

Date: 2.DEC.2011 09:48:30

Appendix 4

Band edge measurements according to 47CFR 2.1051

| Date | Temperature | Humidity |
|------------|--------------|------------|
| 2011-12-02 | 23 °C ± 3 °C | 30 % ± 5 % |
| 2011-12-05 | 23 °C ± 3 °C | 23 % ± 5 % |

Test set-up and procedure

The measurements were made per definition in §24.238, with the CDU output connected to a spectrum analyser with the RMS detector activated. The spectrum analyser was connected to an external 10 MHz reference standard during the measurements.

FCC rules allow a resolution bandwidth of one per cent of the emission bandwidth of the fundamental emission within the first 1 MHz off the band edge. FCC rules require a resolution bandwidth of 1 MHz for measurements of emissions with band edge offsets exceeding 1 MHz.

Measurement bandwidths of 3 kHz, 50 kHz and 1MHz were used and the respective limit was adapted by $[10 * \log(\text{RBW}_{\text{used}}/\text{RBW}_{\text{required}})]$ dB.

| Measurement equipment | SP number |
|--|-----------|
| R&S FSIQ | 503 738 |
| Attenuator | 504 159 |
| Multimeter Fluke 87 | 502 190 |
| Testo 635 temperature and humidity meter | 504 203 |

Measurement uncertainty: 3.7 dB

Results

| Diagram | Channel | Combiner configuration | RBS master 2E setting | Measured RMS power / [dBm] |
|-----------|---------|------------------------|-----------------------|----------------------------|
| 1 a, b, c | B | UC mode | 43 | 40.2 |
| 2 a, b, c | T | UC mode | 45 | 40.3 |
| 3 a, b, c | B+1 | TCC mode | 49 | 42.5 |
| 4 a, b, c | T-1 | TCC mode | 49 | 42.6 |

The diagrams are shown on the following pages.

Remark

For channels B and T the above documented RMS output powers were found to represent maximum usable settings for AQPSK modulation using SCPIR 0 dB.


Limits

The power of any emission outside the frequency band shall be attenuated below the transmitter power (P) by at least $43 + 10 \log P$ dB.

| | |
|-----------|-----|
| Complies? | Yes |
|-----------|-----|


Appendix 4

Diagram 1 a:

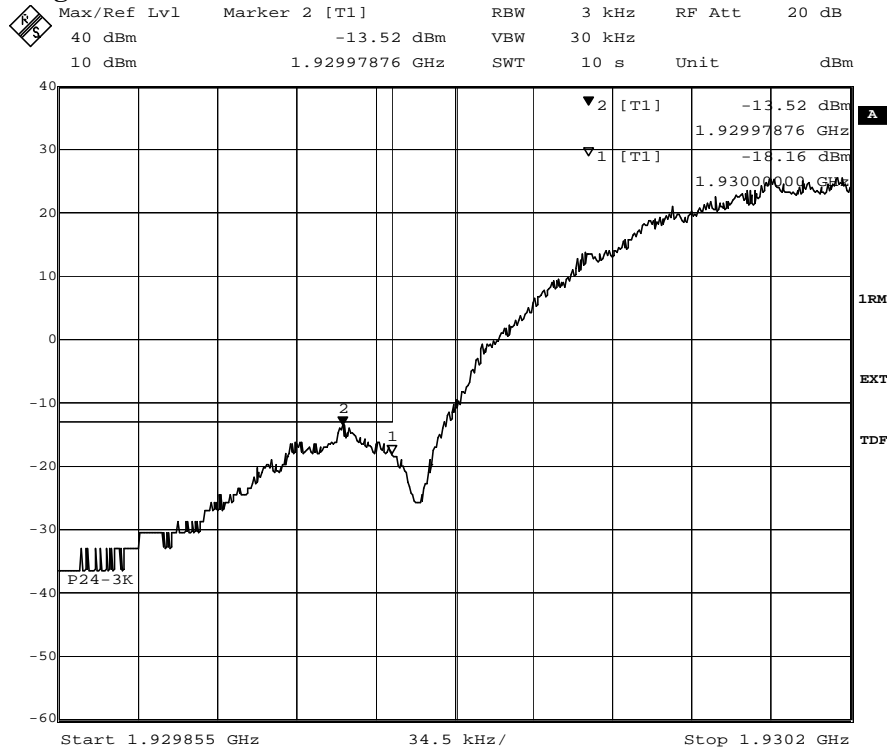

Date: 5.DEC.2011 11:38:06

Diagram 1 b:

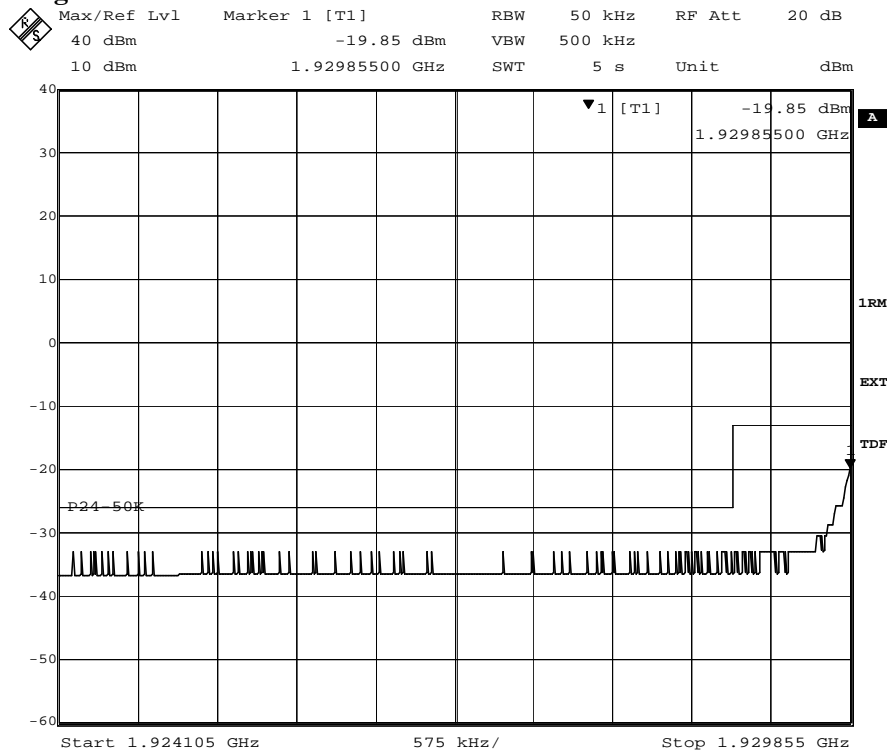


Date: 5.DEC.2011 11:38:57



Appendix 4

Diagram 1 c:

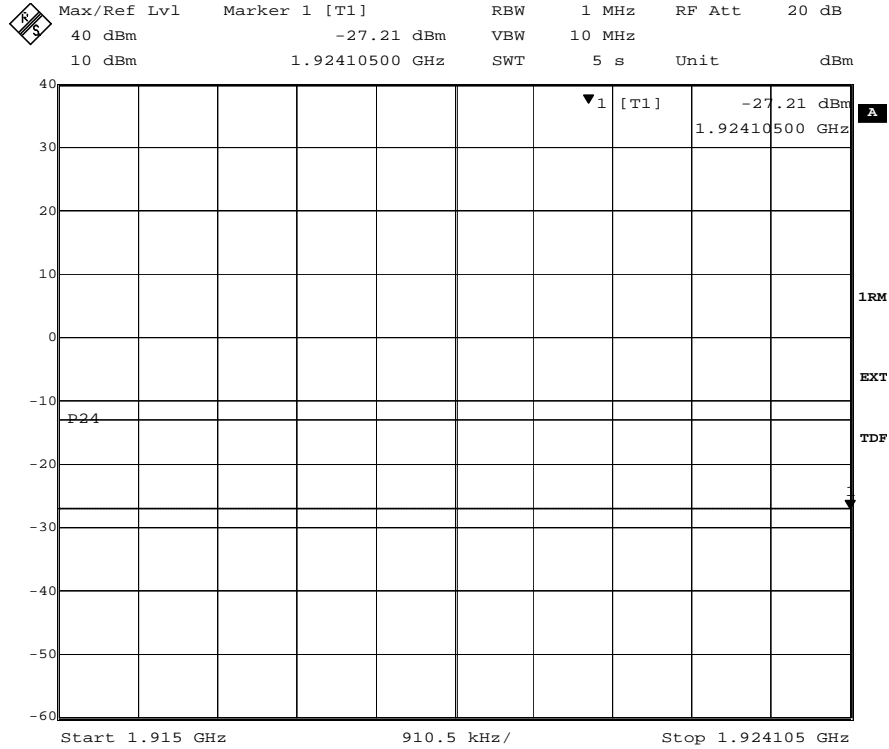

Date: 5.DEC.2011 11:39:32

Appendix 4

Diagram 2 a:


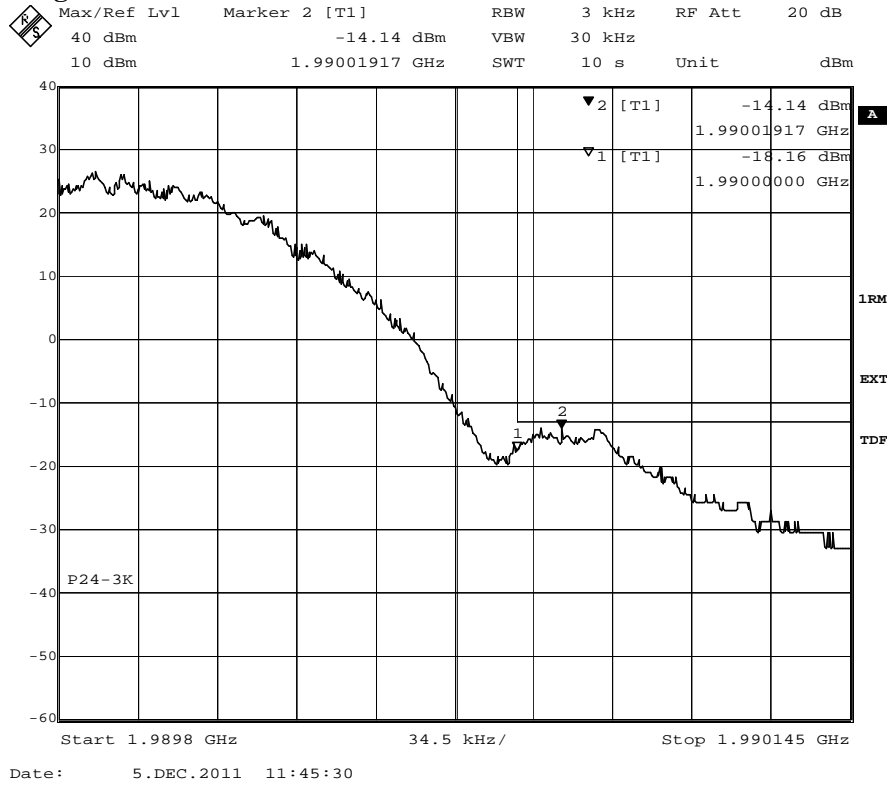



Diagram 2 b:



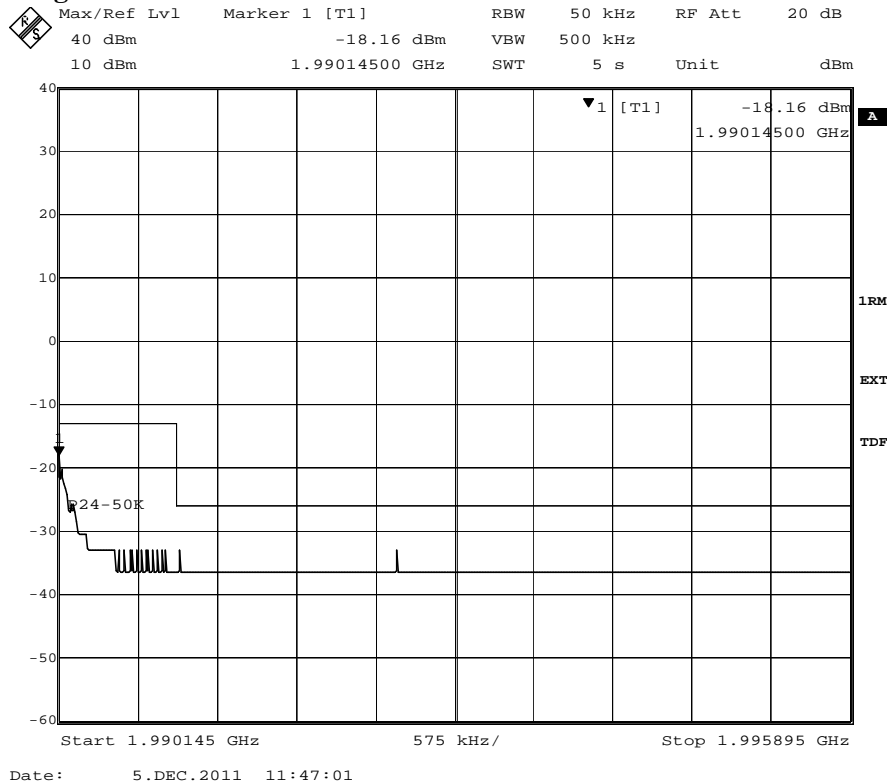

Appendix 4


Diagram 2 c:

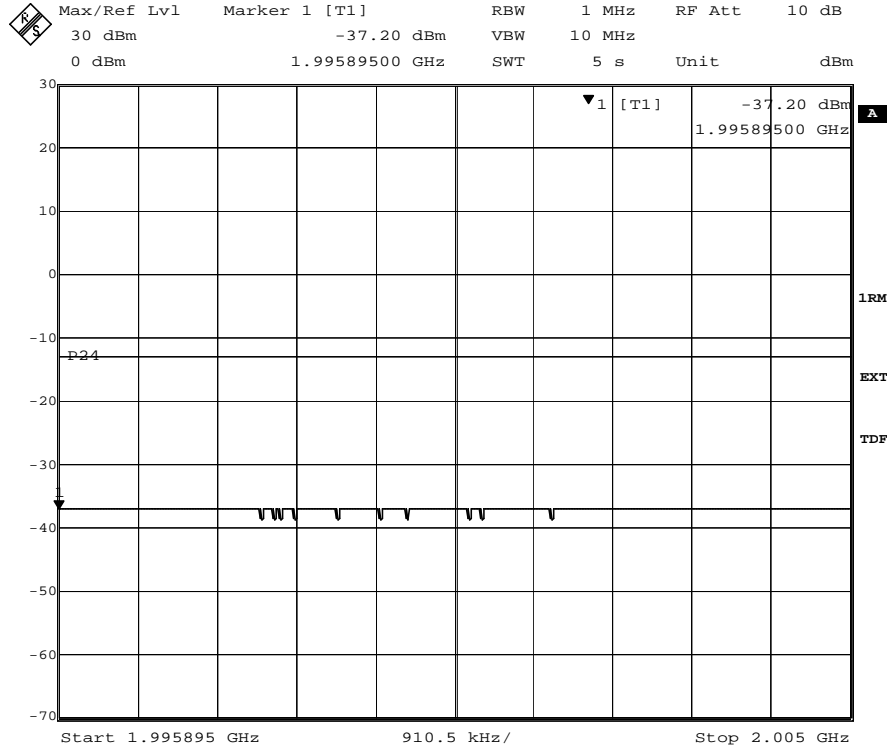

Date: 5.DEC.2011 11:48:38


Appendix 4

Diagram 3 a:

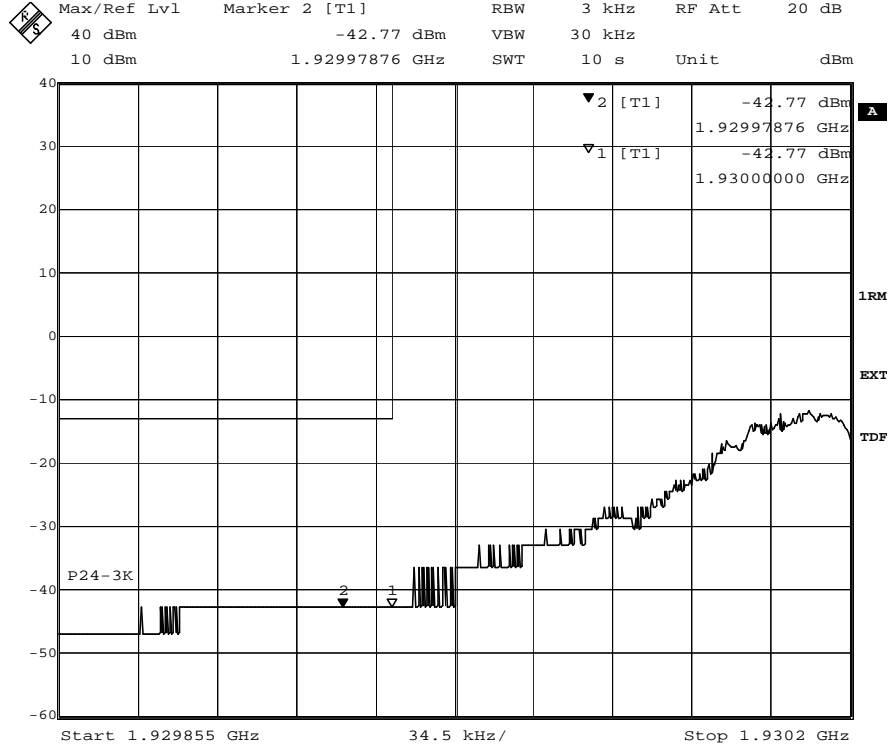

Date: 2.DEC.2011 10:11:40

Diagram 3 b:

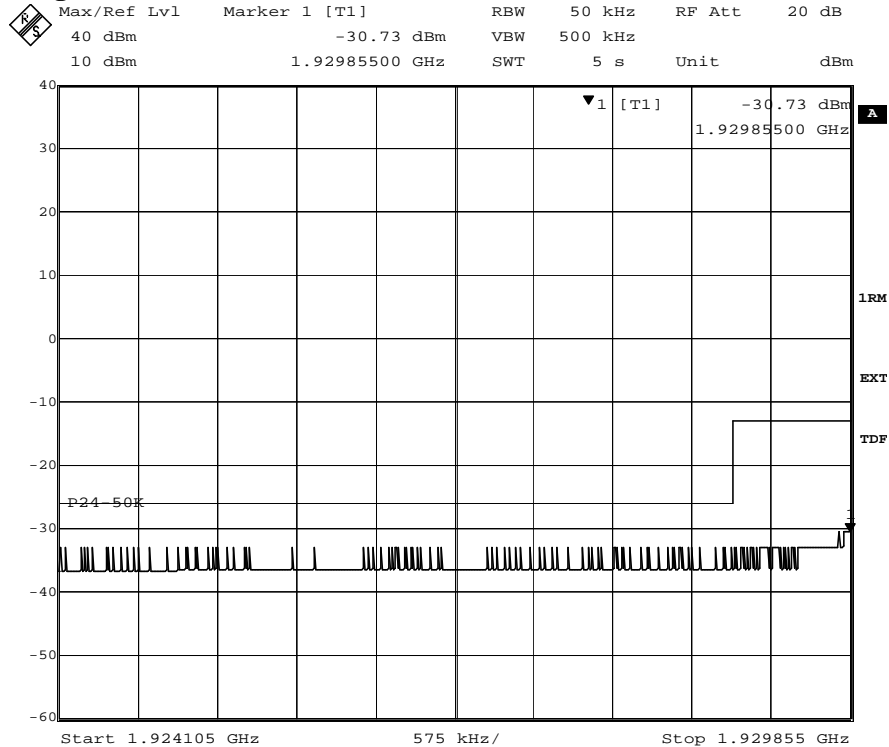


Date: 2.DEC.2011 10:13:35



Appendix 4

Diagram 3 c:

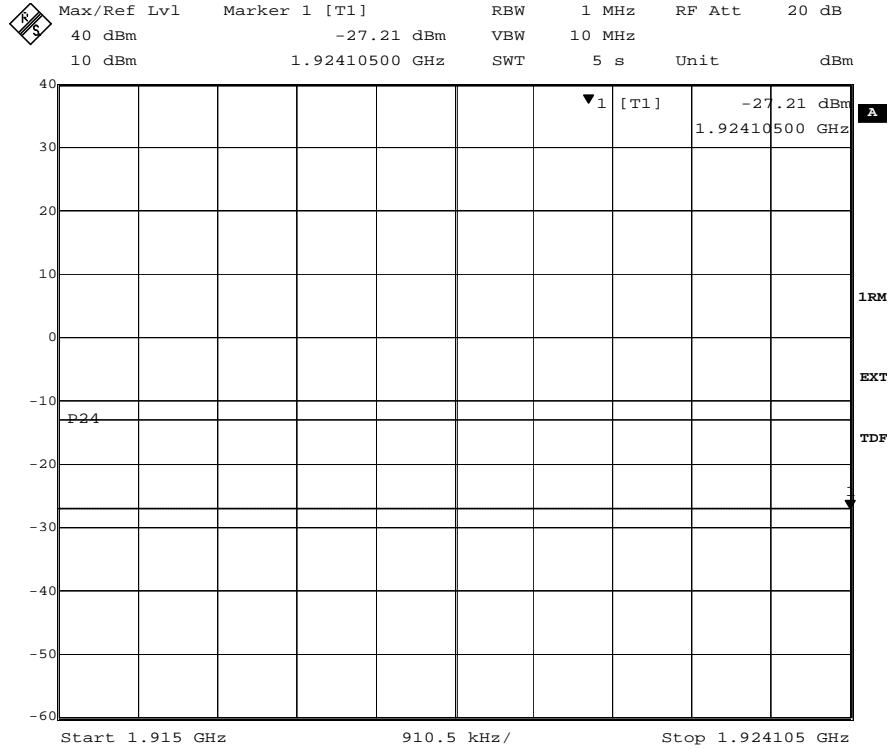

Appendix 4

Diagram 4 a:


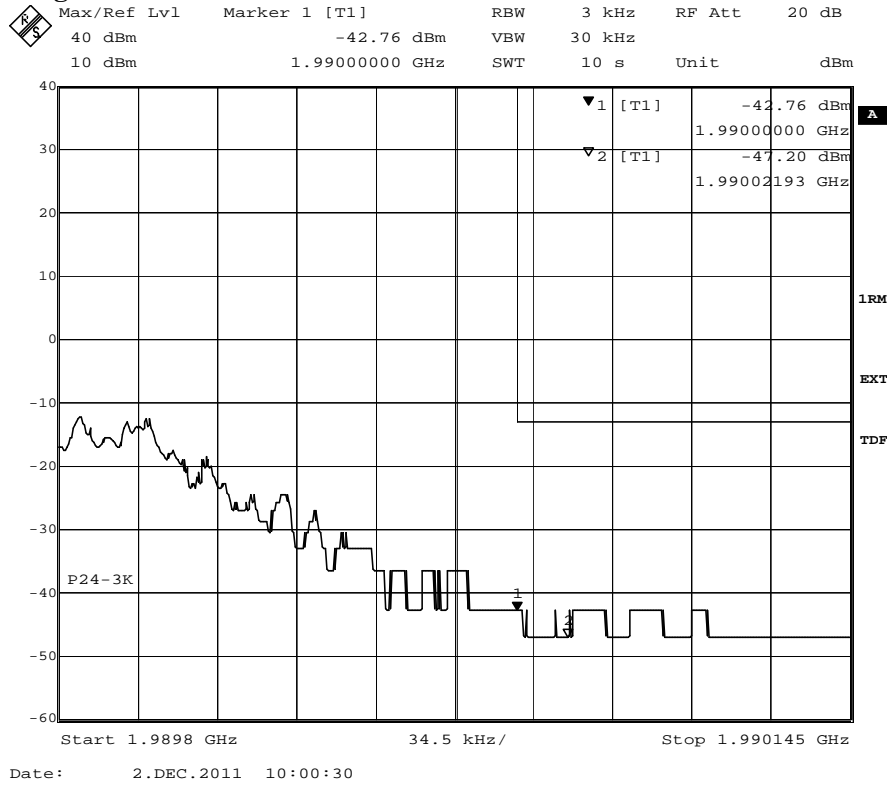



Diagram 4 b:



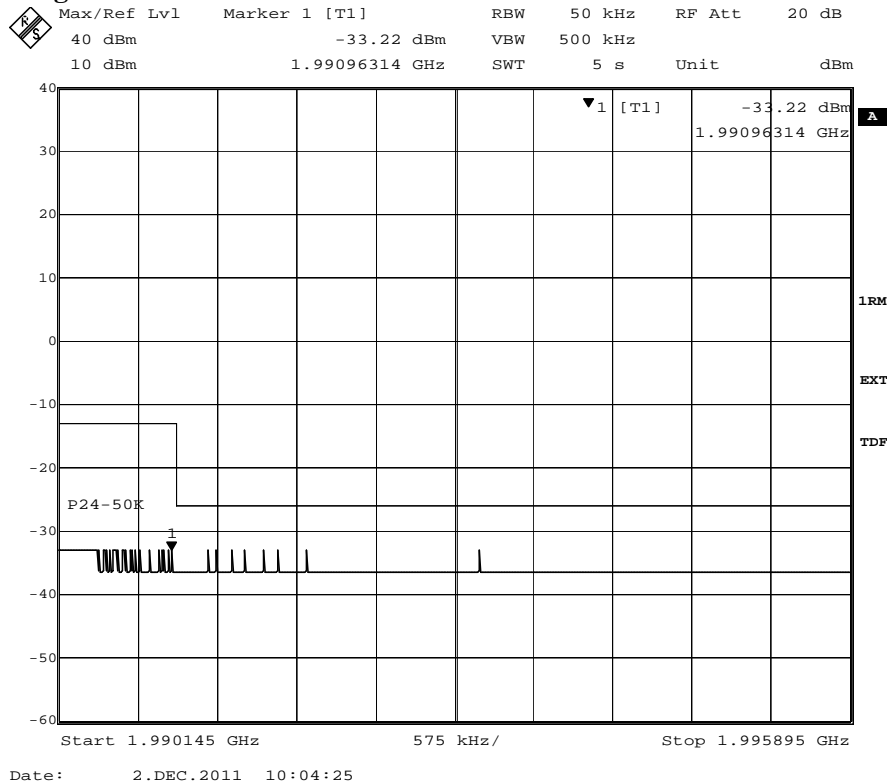

Appendix 4

Diagram 4 c:

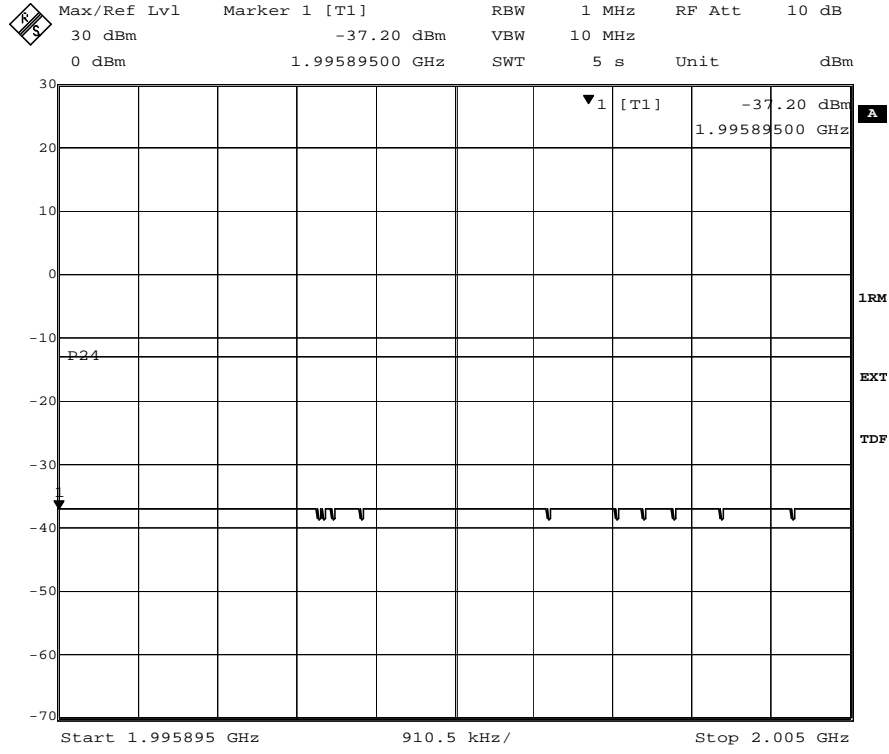

Date: 2.DEC.2011 10:05:06

Appendix 5

Conducted spurious emission measurements according to 47CFR 2.1051

| | | |
|------------|--------------|------------|
| Date | Temperature | Humidity |
| 2011-12-02 | 23 °C ± 3 °C | 30 % ± 5 % |

Test set-up and procedure

The measurements were made per definition in §24.238, with the CDU output connected to a spectrum analyser. A pre-measurement was performed with the PEAK detector activated. Emission close to or above the limit with the PEAK detector is measured with the RMS detector activated. The spectrum analyser was connected to an external 10 MHz reference standard during the measurements.

| Measurement equipment | SP number |
|--|-----------|
| R&S FSIQ | 503 738 |
| Attenuator | 504 159 |
| High pass filter | 504 200 |
| Testo 635 temperature and humidity meter | 504 203 |

Measurement uncertainty: 3.7 dB

Results

The results are shown in the diagrams below.

Configuration: TCC mode, RBS master 2E setting 49, ARFCN 661 (1960.0 MHz).

- Diagram 1 a: GMSK, 9 KHz – 3 GHz
- Diagram 1 b: GMSK, 3 GHz – 20 GHz

- Diagram 2 a: AQPSK, 9 KHz – 3 GHz
- Diagram 2 b: AQPSK, 3 GHz – 20 GHz

The diagrams are shown on the following pages.

Limits

The power of any emission outside the frequency band shall be attenuated below the transmitter power (P) by at least 43 + 10 log P dB.

| | |
|-----------|-----|
| Complies? | Yes |
|-----------|-----|

Appendix 5

Diagram 2 a:


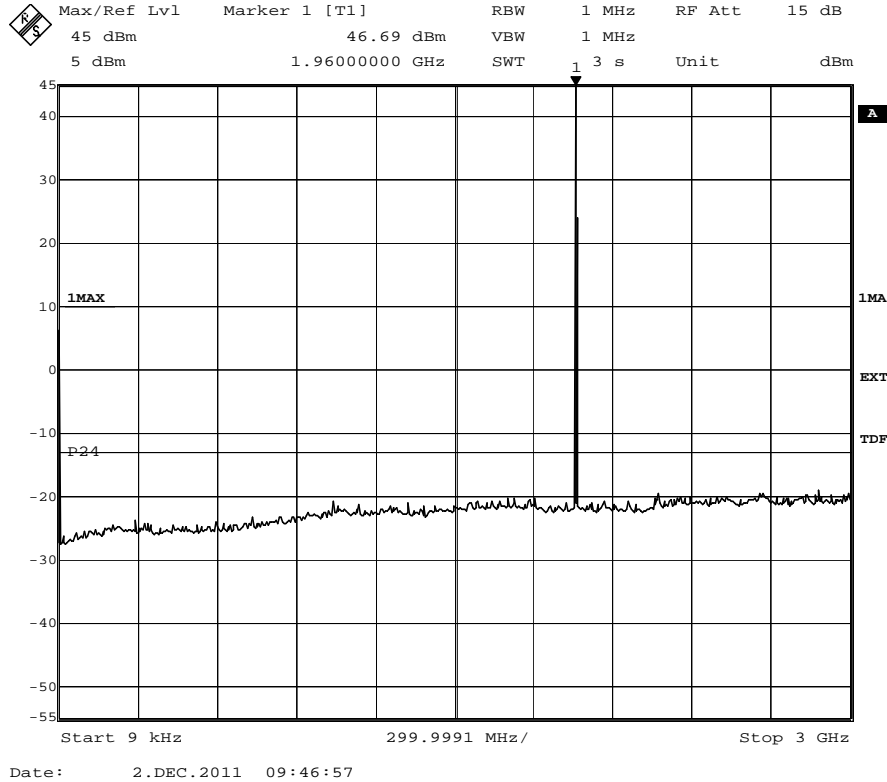


Diagram 2 b:

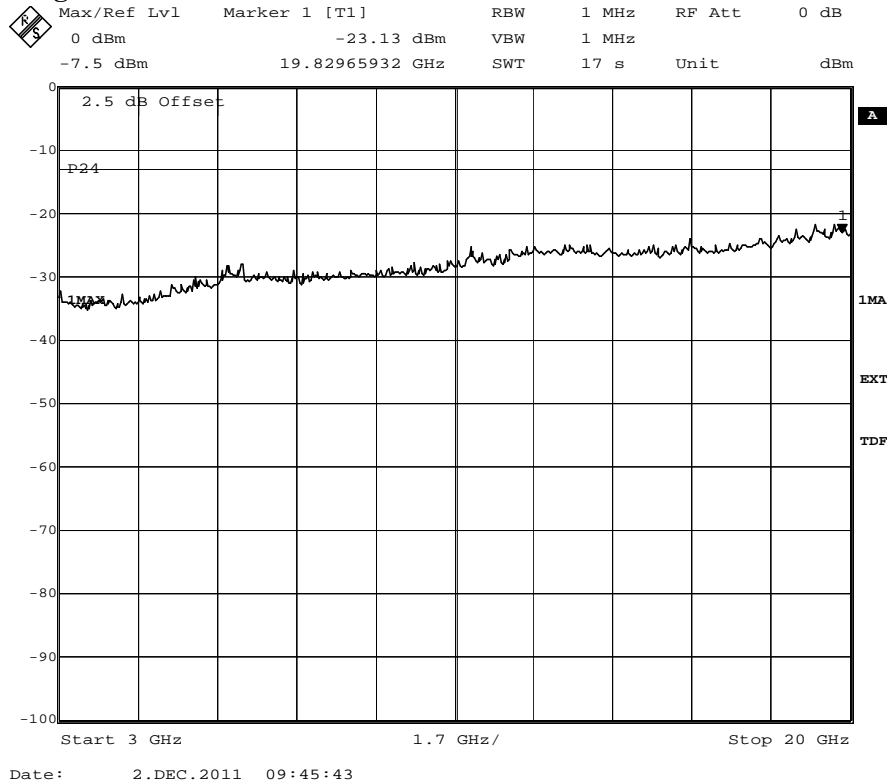

Appendix 6

Field strength of spurious radiation measurements according to 47CFR 2.1053

| | | |
|------------|--------------|------------|
| Date | Temperature | Humidity |
| 2011-06-23 | 22 °C ± 3 °C | 52 % ± 5 % |

Test set-up and procedure

The measurements were performed with both horizontal and vertical polarization of the antenna. The antenna distance was 3 m in the frequency range 30 MHz – 18 GHz and 1m in the frequency range 18-20 GHz.

The measurements were performed in Effective Radiated Power (ERP). A fully anechoic chamber was used during the measurements. The chamber is regularly calibrated with the substitution method and from that calibration an ERP correction factor is derived. The correction factor was used as a transducer to get the readings in ERP.

The measurement procedure was as the following:


1. A pre-measurement was first performed with peak detector. The EUT was continuously measured in 360 degrees.
2. Spurious radiation on frequencies closer than 6 dB to the limit was re-measured with RMS detector and with the substitution method according to the standard.

The test object was configured in TCC mode. TX ARFCN 661 (1960.0 MHz) was used.

| Measurement equipment | SP number |
|--|-----------|
| Anechoic chamber, Hertz | 15:116 |
| Rohde & Schwarz FSIQ40 Signal Analyser | 503 738 |
| Rohde & Schwarz EMI Test Receiver ESI40 | 503 125 |
| Chase bilog antenna CBL 6121A | 502 460 |
| Schaffner Reference Dipole BSRD6500 | 503 649 |
| EMCO Horn Antenna 3115 | 502 175 |
| EMCO Horn Antenna 3115 | 501 548 |
| Flann Std gain horn 20240-20 | 503 674 |
| MITEQ Low Noise Amplifier | 503 277 |
| Rohde & Schwarz Vector Network Analyser | 503 687 |
| Attenuator | 504 159 |
| High pass filter | 503 739 |
| Testo 615 temperature and humidity meter | 503 498 |

Appendix 6

The test set-up is shown in the picture below:

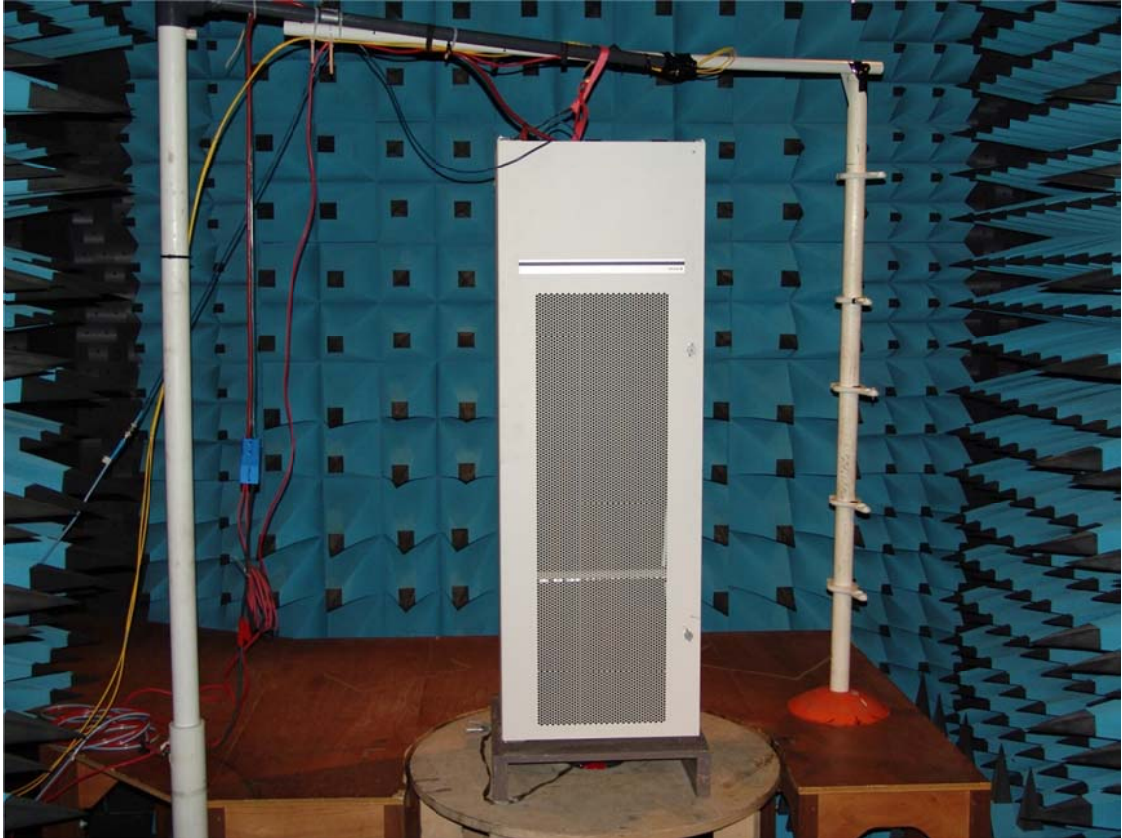

Appendix 6

Results

Modulation GMSK

| Frequency (MHz) | Spurious emission level (dBm) | |
|-----------------|----------------------------------|----------------------------------|
| | Vertical | Horizontal |
| 30-20 000 | All emission > 20 dB below limit | All emission > 20 dB below limit |

Modulation AQPSK

| Frequency (MHz) | Spurious emission level (dBm) | |
|-----------------|----------------------------------|----------------------------------|
| | Vertical | Horizontal |
| 30-20 000 | All emission > 20 dB below limit | All emission > 20 dB below limit |

Measurement uncertainty: 3.1 dB

Limits

The power of any emission outside the frequency band shall be attenuated below the transmitter power (P) by at least $43 + 10 \log P$ dB.

| | |
|-----------|-----|
| Complies? | Yes |
|-----------|-----|

Appendix 7

Hardware list RBS 2206 V2 used for conducted and radiated measurements

| Pos. | Unit | Product Number | Revision | Serial Number |
|------|--------------------------|----------------|----------|---------------|
| | Cabinet RBS 2206 V2 | SEB 112 1154/1 | R2A | AB2050402 |
| | Door | SXK 109 7157/1 | R1B | - |
| | DCCU-13 | BMG 980 07/11 | R1D | BH41057603 |
| | ACCU-11 | BMG 980 07/9 | R1C | BH41113778 |
| | | | | |
| | Subrack | BFL 119 424/1 | R2C | - |
| 1 | CDU-G19 | BFL 119 153/1 | R5F | A40003K3WX |
| 2 | CDU-G19 | BFL 119 153/1 | R5F | A40003X4CF |
| 3 | CDU-G19 | BFL 119 153/1 | R5F | TR40264562 |
| | | | | |
| | Dummy | SXK 107 5031/2 | R1C | - |
| | CXU-10 | KRY 101 1856/1 | R4A | TR47918902 |
| | Dummy | SXK 107 5031/1 | R1C | - |
| | | | | |
| | TRU subrack | BFL 119 425/1 | R1C | - |
| | Backplane | BFX 101 107/3 | R1B | - |
| 1 | dTRU-19 | KRC 131 1004/2 | R1G | AE50094077 |
| 2 | dTRU-19 | KRC 131 1004/2 | R2F | AE51181689 |
| 3 | dTRU-19 | KRC 131 1004/2 | R3A | AE52476769 |
| 4 | dTRU-19 | KRC 131 1004/2 | R4A | AE54155371 |
| 5 | dTRU-19 | KRC 131 1004/2 | R4E | AE55467552 |
| 6 | dTRU-19 | KRC 131 1004/2 | R1G | AE50094075 |
| | | | | |
| | IDM-11 | BMG 980 327/2 | R1D | BH54675507 |
| | | | | |
| | PSU/DXU subrack | BFL 119 453/1 | R1A | - |
| | Backplane | BFX 101 109/1 | R1A | - |
| 1 | PSU-AC-32 | BML 353 206/2 | R1D | BW91030688 |
| 2 | PSU-AC-32 | BML 353 206/2 | R1D | BW91030922 |
| 3 | Dummy PSU | SXK 107 9314/1 | R3A | - |
| 4 | Dummy PSU | SXK 107 9314/1 | R3A | - |
| 5 | Metal cover plate 1 slot | - | - | - |
| 6a | TMA-CM-02 | SDK 107 881/1 | R4A | BR60174802 |
| 6b | Metal cover plate ½ slot | - | - | - |
| 7 | DXU-23 | BOE 602 21/1 | R1C/B | TU8D486189 |

Test object software during conducted and radiated measurements

| Software | Revision |
|-----------------|----------|
| CXP 104 0007/05 | R31E |

Appendix 8

Photos of the test object

Front side



Rear side



Appendix 8

Left side



Right side

