

EXHIBIT 6

B5KKRC12110-3

Ericsson Radio System AB.

SECTION 3

OCCUPIED BANDWIDTH DATA PACKET MODE

2.989 (c,i) (h) Occupied Bandwidth

The measurements methods per TIA/IS-136/IS-138 and TIA/EIA-553 were used to obtain the results in the following exhibits:

10.3.1 A to J Modulated with 19.2 kbs
PSEUDORANDOM DATA channel 991

10.3.2 A to J Modulated with 19.2 kbs
PSEUDORANDOM DATA channel 799

Equipment used:

HP 89441A Vector Signal Analyzer, DC - 2.65 GHz

Radio Frequency 50 ohm load attached to the output.

EXHIBIT 6


B5KKRC12110-3

Ericsson Radio System AB.

SECTION 3

OCCUPIED BANDWIDTH DATA PACKET MODE

Modulation Sideband Spectrum
Measured Per TIA/IS-136/IS-138
and TIA/EIA-553

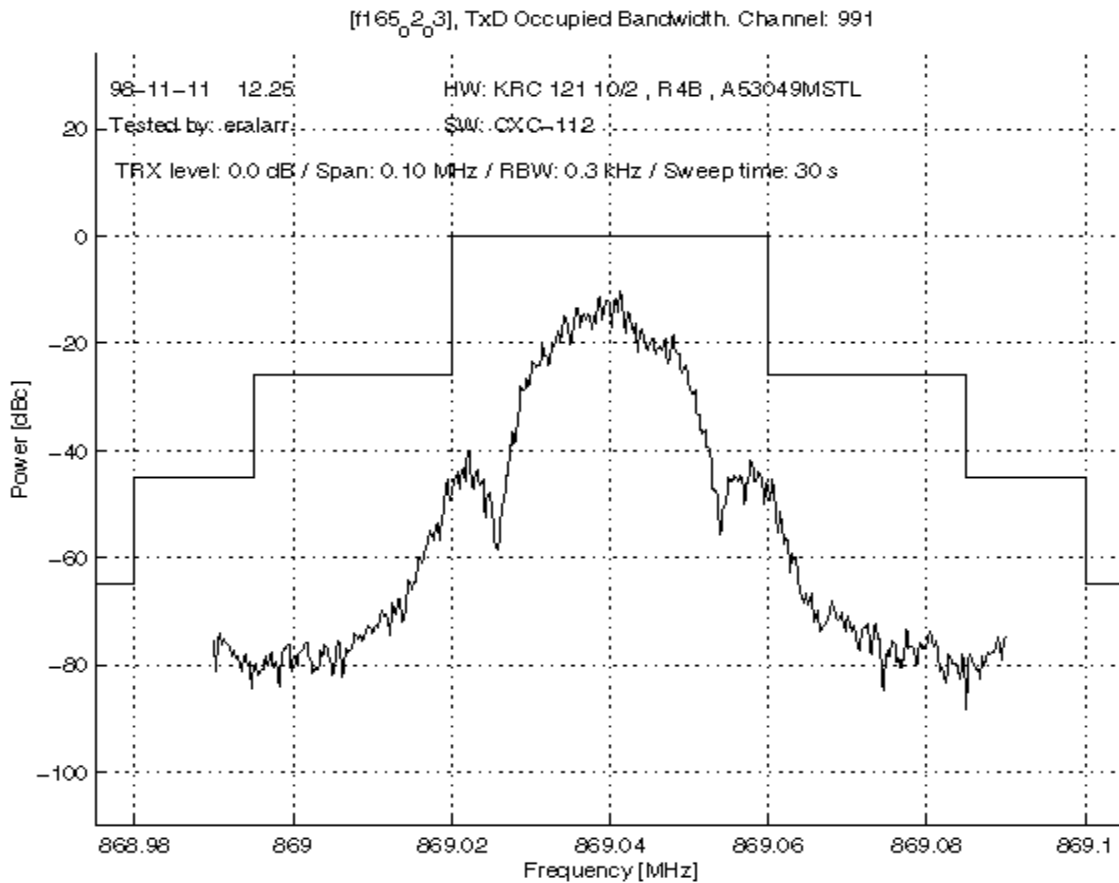

Section 3 3.1A

Referenced to the Rated Power Output
Modulated with 19.2 kbs PSEUDORANDOM DATA

EXHIBIT 6


B5KKRC12110-3

Ericsson Radio System AB.

SECTION 3

OCCUPIED BANDWIDTH DATA PACKET MODE

Modulation Sideband Spectrum
Measured Per TIA/IS-136/IS-138
and TIA/EIA-553

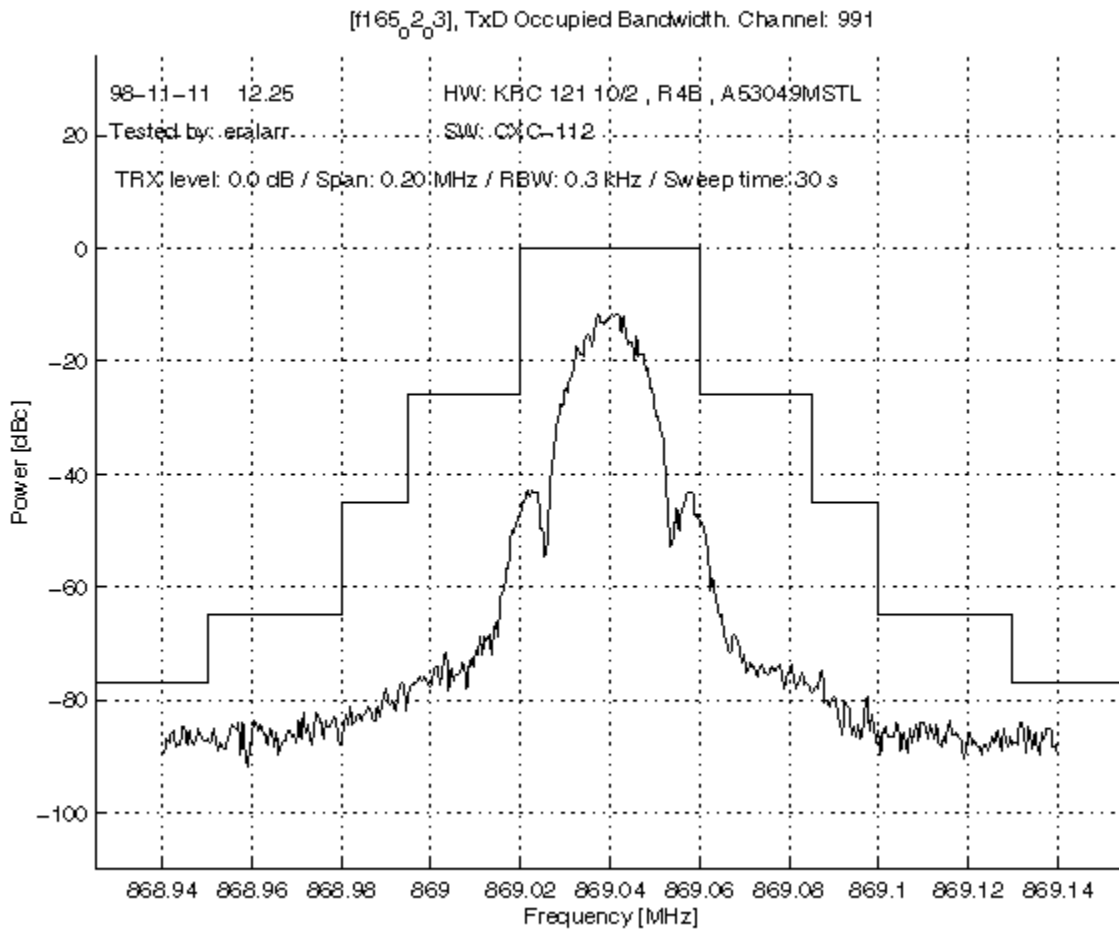

Section 3 3.1B

Referenced to the Rated Power Output
Modulated with 19.2 kbs PSEUDORANDOM DATA

EXHIBIT 6


B5KKRC12110-3

Ericsson Radio System AB.

SECTION 3

OCCUPIED BANDWIDTH DATA PACKET MODE

Modulation Sideband Spectrum
Measured Per TIA/IS-136/IS-138
and TIA/EIA-553

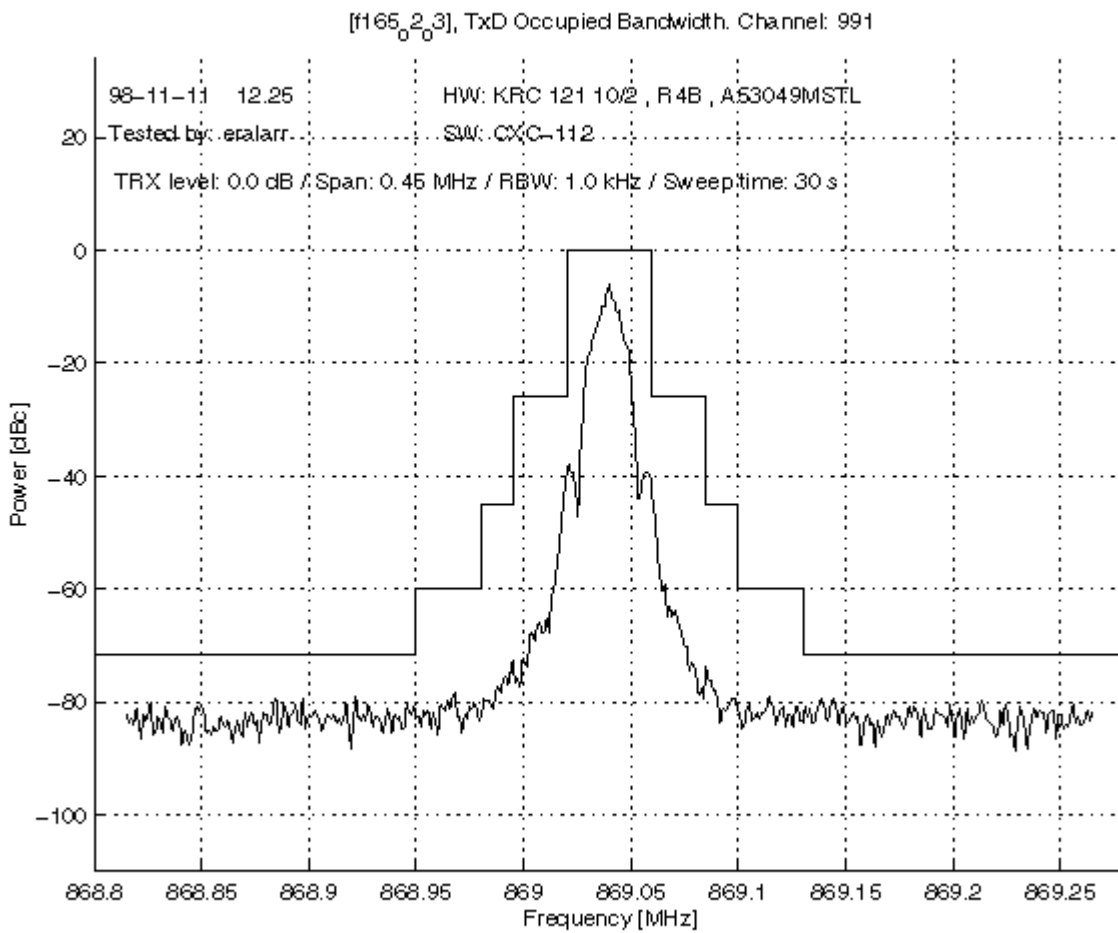

Section 3 3.1C

Referenced to the Rated Power Output
Modulated with 19.2 kbs PSEUDORANDOM DATA

EXHIBIT 6


B5KKRC12110-3

Ericsson Radio System AB.

SECTION 3

OCCUPIED BANDWIDTH DATA PACKET MODE

Modulation Sideband Spectrum
Measured Per TIA/IS-136/IS-138
and TIA/EIA-553

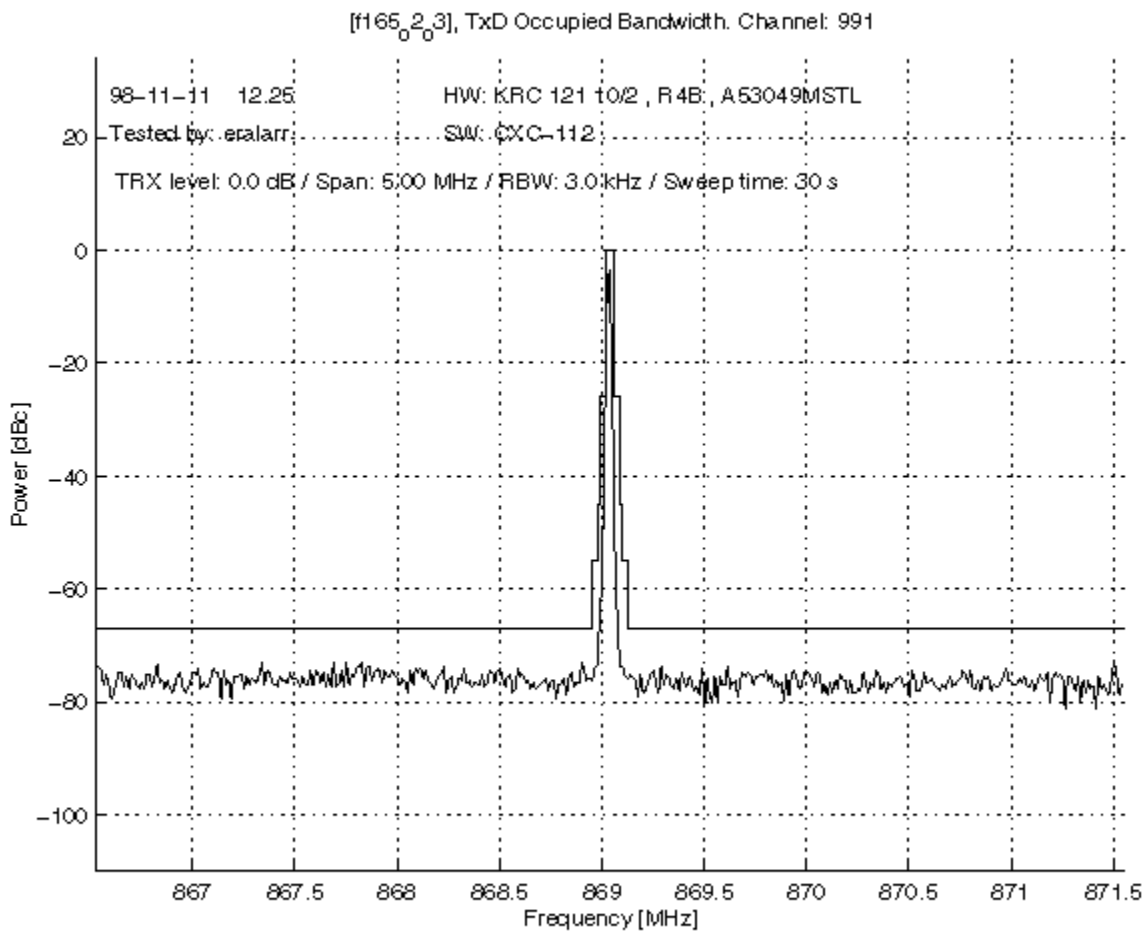

Section 3 3.1D

Referenced to the Rated Power Output
Modulated with 19.2 kbs PSEUDORANDOM DATA

EXHIBIT 6


B5KKRC12110-3

Ericsson Radio System AB.

SECTION 3

OCCUPIED BANDWIDTH DATA PACKET MODE

Modulation Sideband Spectrum
Measured Per TIA/IS-136/IS-138
and TIA/EIA-553

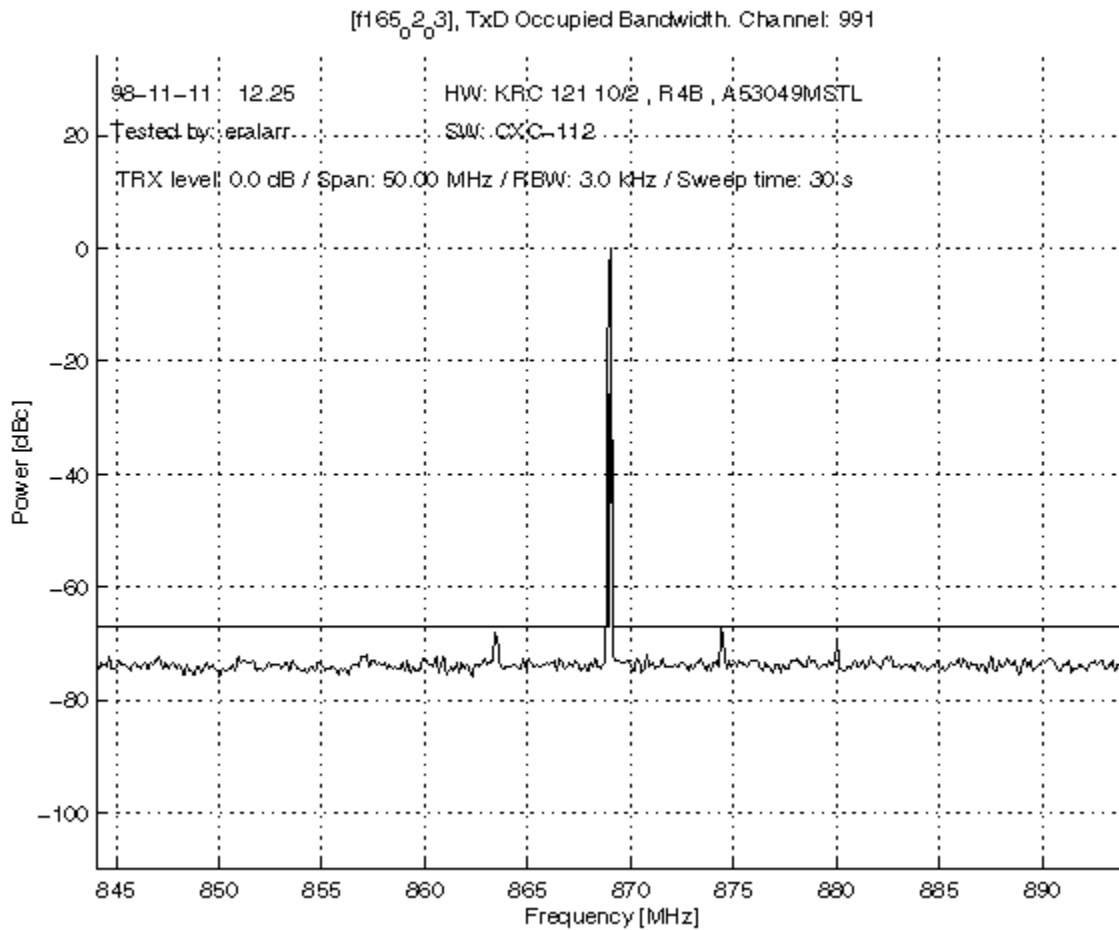

Section 3 3.1E

Referenced to the Rated Power Output
Modulated with 19.2 kbs PSEUDORANDOM DATA

EXHIBIT 6


B5KKRC12110-3

Ericsson Radio System AB.

SECTION 3

OCCUPIED BANDWIDTH DATA PACKET MODE

Modulation Sideband Spectrum
Measured Per TIA/IS-136/IS-138
and TIA/EIA-553

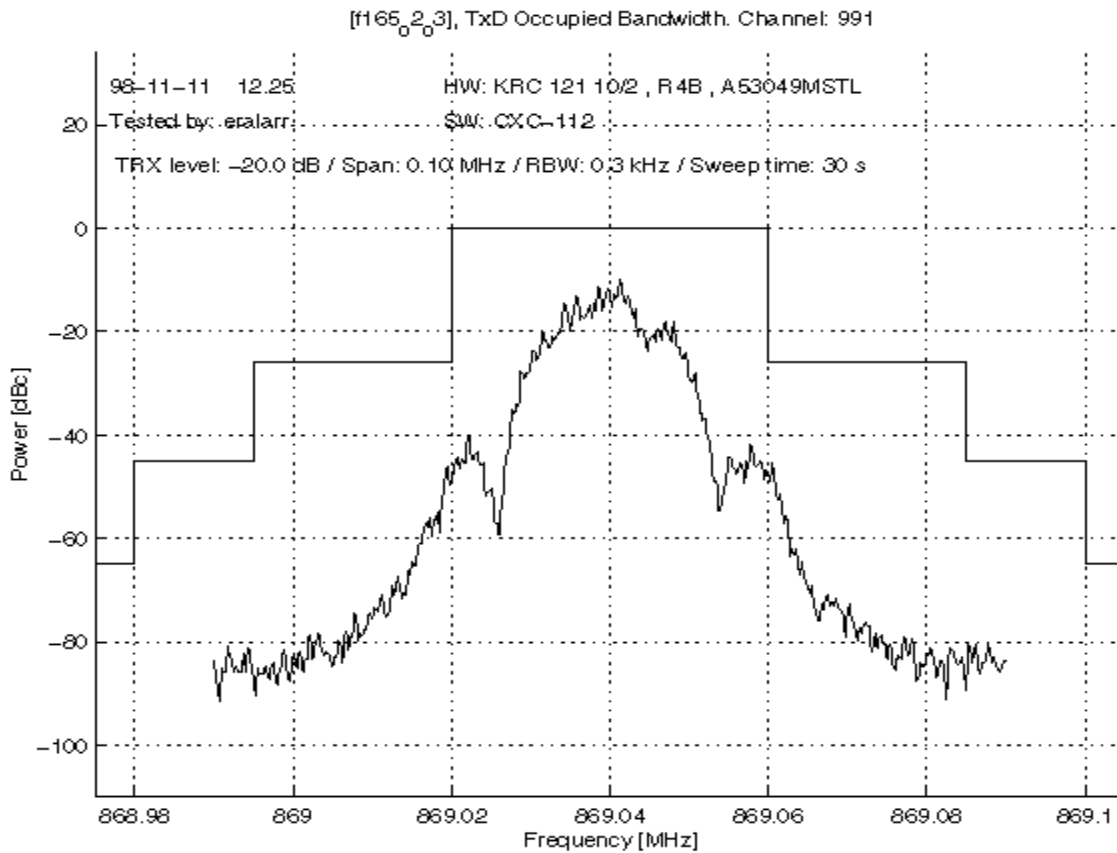

Section 3 3.1F

Referenced to the Rated Power Output at Lowest Level (- 20 dB)
Modulated with 19.2 kbs PSEUDORANDOM DATA

EXHIBIT 6


B5KKRC12110-3

Ericsson Radio System AB.

SECTION 3

OCCUPIED BANDWIDTH DATA PACKET MODE

Modulation Sideband Spectrum
Measured Per TIA/IS-136/IS-138
and TIA/EIA-553

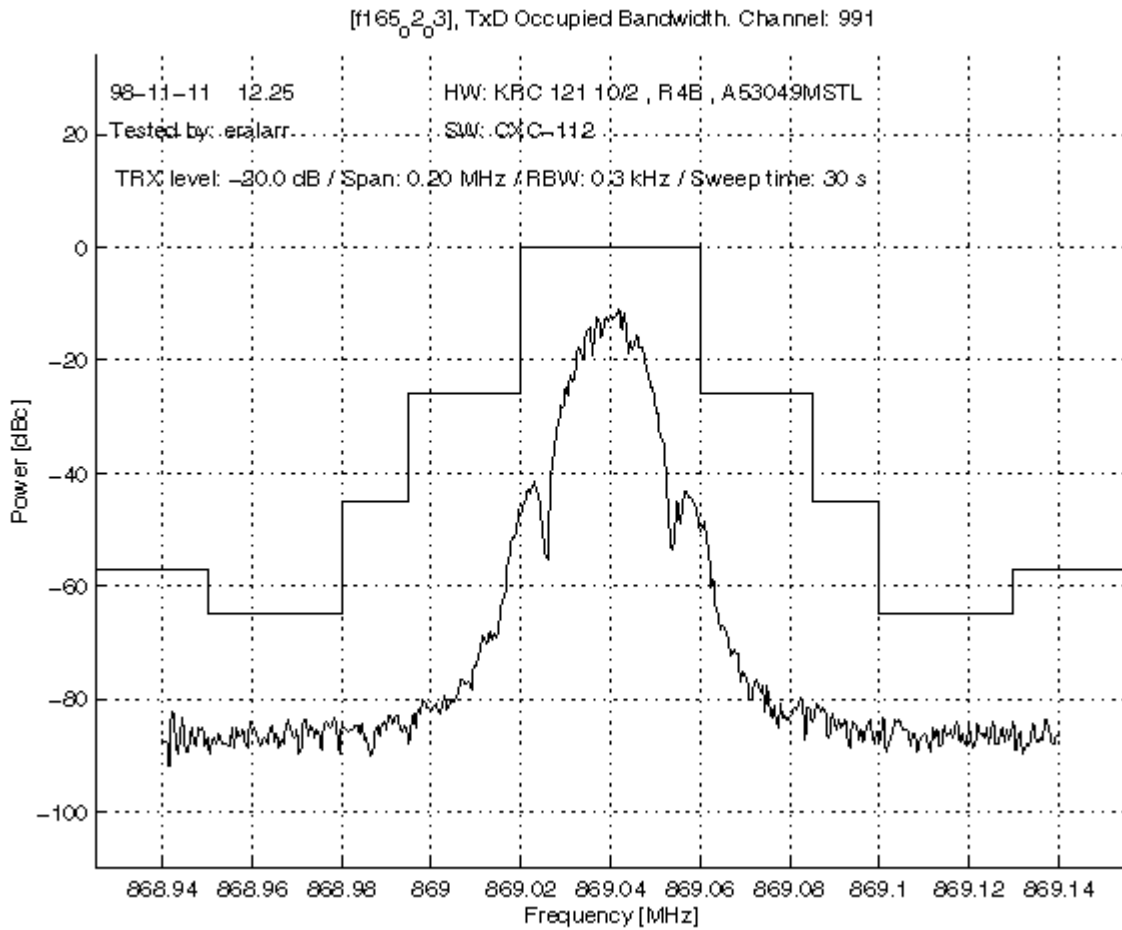

Referenced to the Rated Power Output at Lowest Level (- 20 dB)
Modulated with 19.2 kbs PSEUDORANDOM DATA

Section 3 3.1G

EXHIBIT 6


B5KKRC12110-3

Ericsson Radio System AB.

SECTION 3

OCCUPIED BANDWIDTH DATA PACKET MODE

Modulation Sideband Spectrum
Measured Per TIA/IS-136/IS-138
and TIA/EIA-553

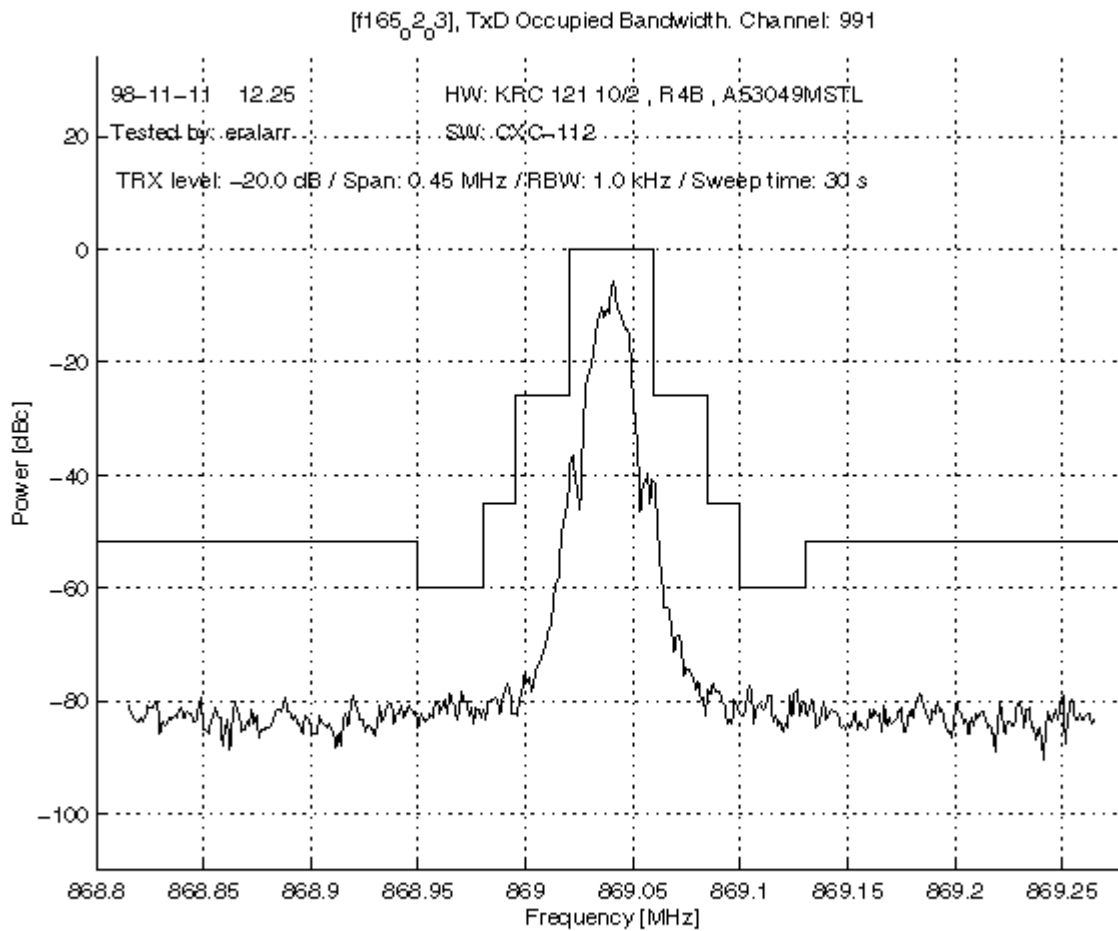

Section 3 3.1H

Referenced to the Rated Power Output at Lowest Level (- 20 dB)
Modulated with 19.2 kbs PSEUDORANDOM DATA

EXHIBIT 6


B5KKRC12110-3

Ericsson Radio System AB.

SECTION 3

OCCUPIED BANDWIDTH DATA PACKET MODE

Modulation Sideband Spectrum
Measured Per TIA/IS-136/IS-138
and TIA/EIA-553

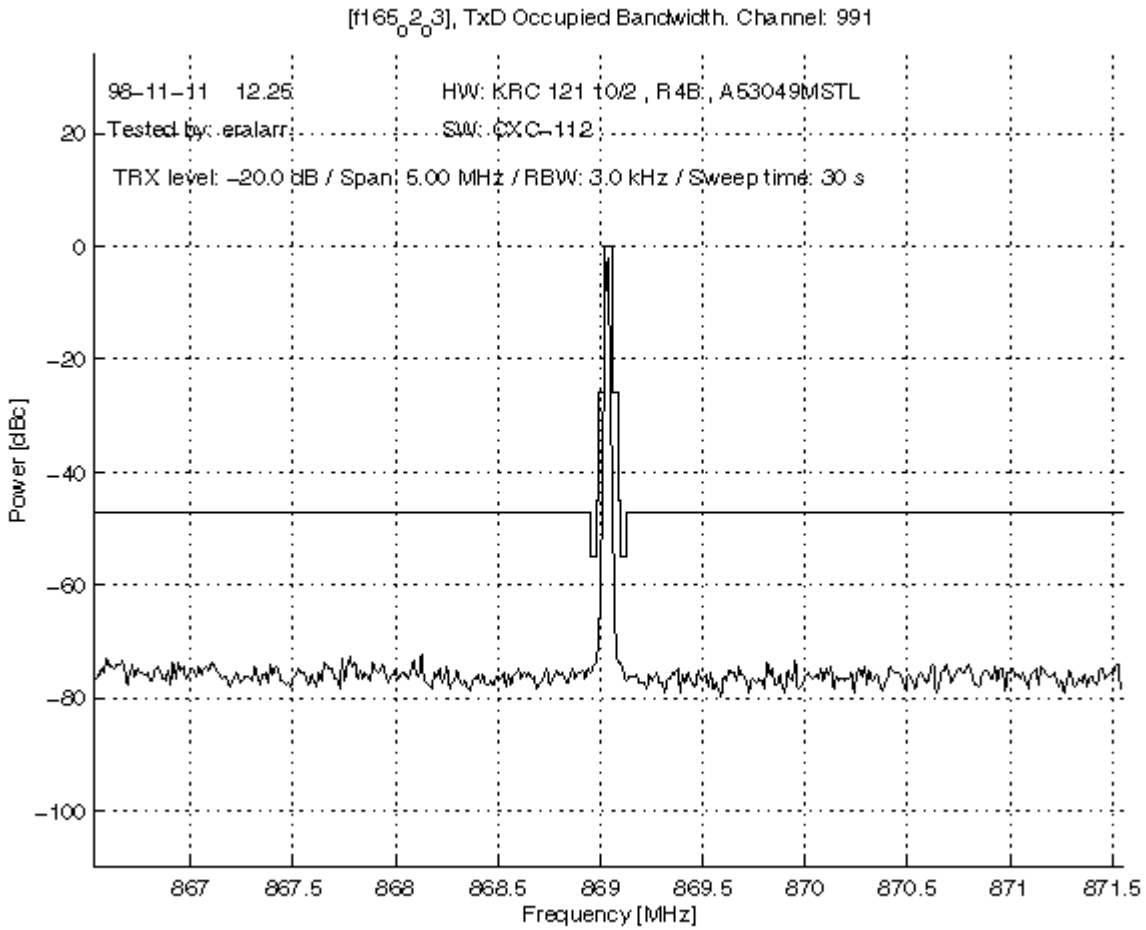

Section 3 3.1I

Referenced to the Rated Power Output at Lowest Level (- 20 dB)
Modulated with 19.2 kbs PSEUDORANDOM DATA

EXHIBIT 6


B5KKRC12110-3

Ericsson Radio System AB.

SECTION 3

OCCUPIED BANDWIDTH DATA PACKET MODE

Modulation Sideband Spectrum
Measured Per TIA/IS-136/IS-138
and TIA/EIA-553

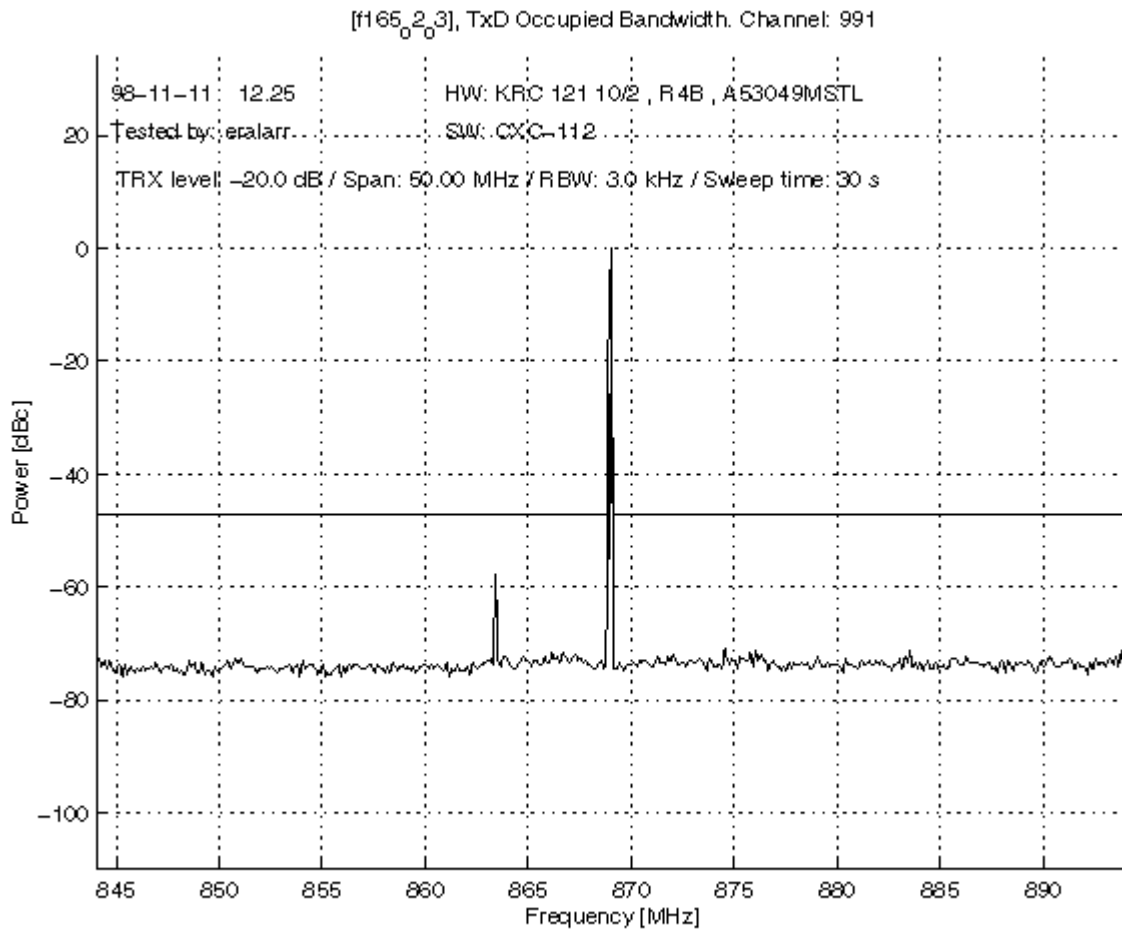

Section 3 3.2A

Referenced to the Rated Power at Lowest Level (- 20 dB)
Modulated with 19.2 kbs PSEUDORANDOM DATA

EXHIBIT 6

B5KKRC12110-3


Ericsson Radio System AB.

EXHIBIT 10.3.2A

SECTION 3

OCCUPIED BANDWIDTH DATA PACKET MODE

Modulation Sideband Spectrum
Measured Per TIA/IS-136/IS-138
and TIA/EIA-553

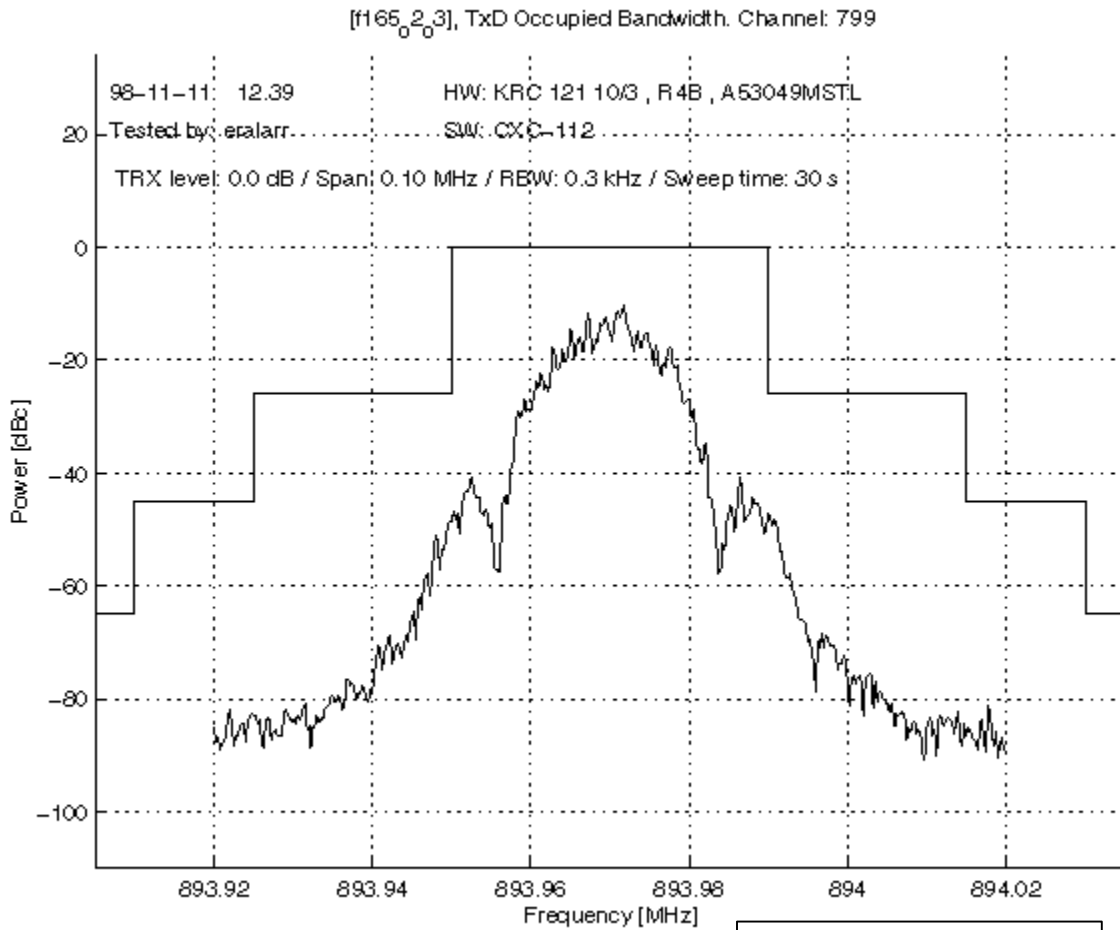

Section 3 3.1B

Referenced to the Rated Power Output
Modulated with 19.2 kbs PSEUDORANDOM DATA

EXHIBIT 6


B5KKRC12110-3

Ericsson Radio System AB.

SECTION 3

OCCUPIED BANDWIDTH DATA PACKET MODE

Modulation Sideband Spectrum
Measured Per TIA/IS-136/IS-138
and TIA/EIA-553

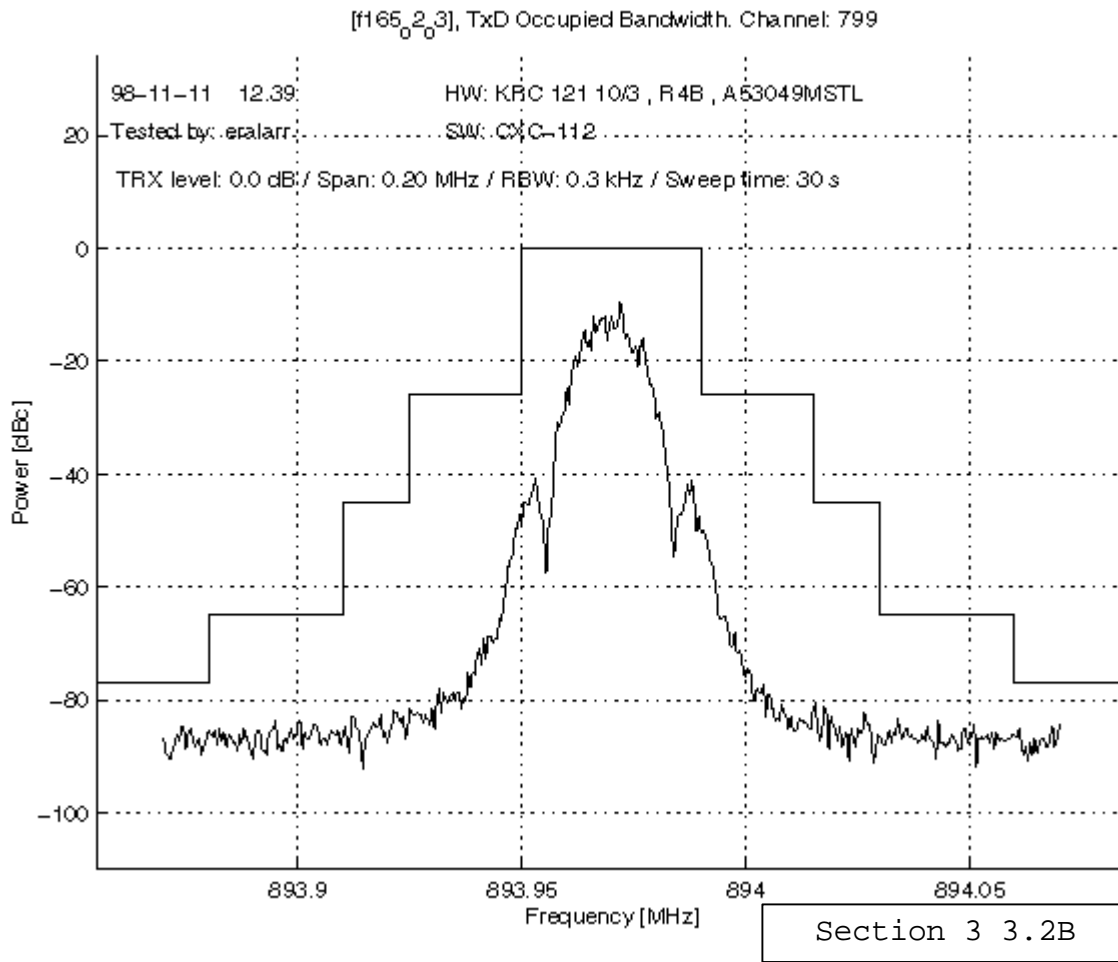

Referenced to the Rated Power Output
Modulated with 19.2 kbs PSEUDORANDOM DATA

EXHIBIT 6


B5KKRC12110-3

Ericsson Radio System AB.

SECTION 3

OCCUPIED BANDWIDTH DATA PACKET MODE

Modulation Sideband Spectrum
Measured Per TIA/IS-136/IS-138
and TIA/EIA-553

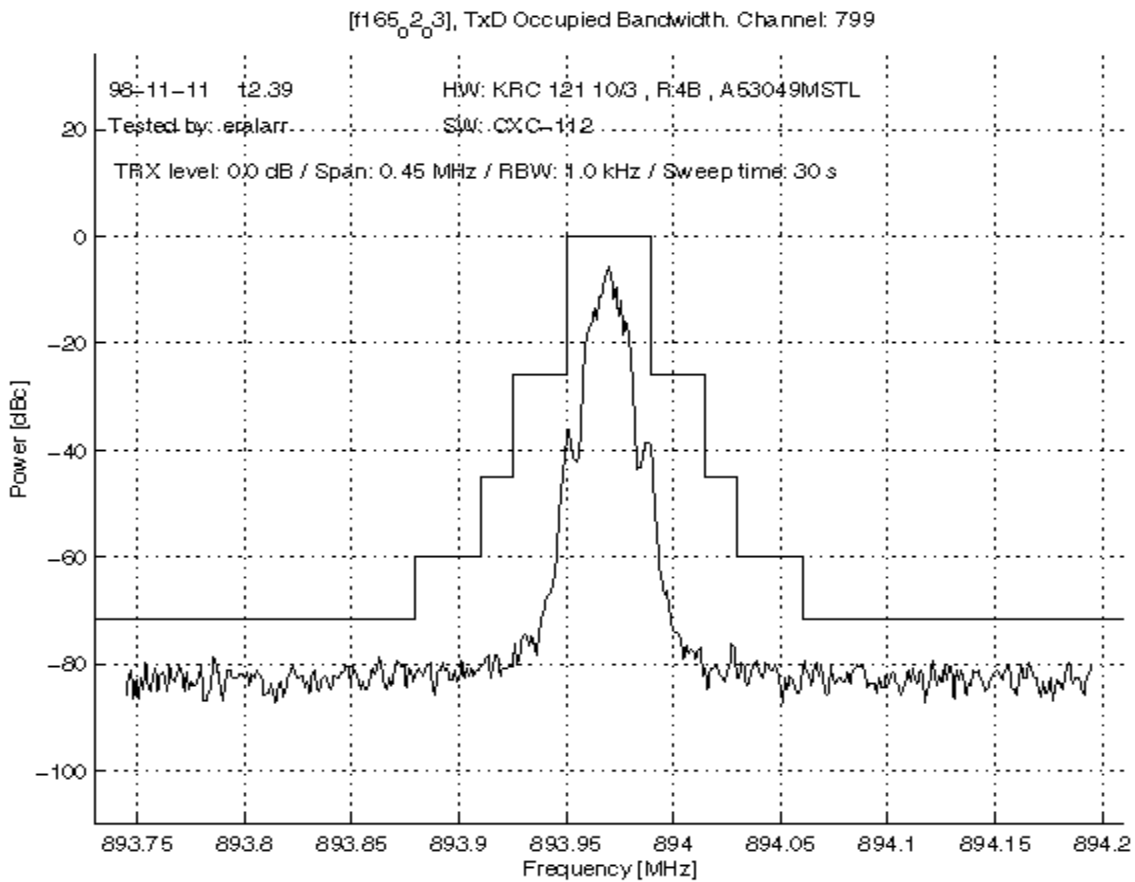

Section 3 3.2C

Referenced to the Rated Power Output
Modulated with 19.2 kbs PSEUDORANDOM DATA

EXHIBIT 6


B5KKRC12110-3

Ericsson Radio System AB.

SECTION 3

OCCUPIED BANDWIDTH DATA PACKET MODE

Modulation Sideband Spectrum
Measured Per TIA/IS-136/IS-138
and TIA/EIA-553

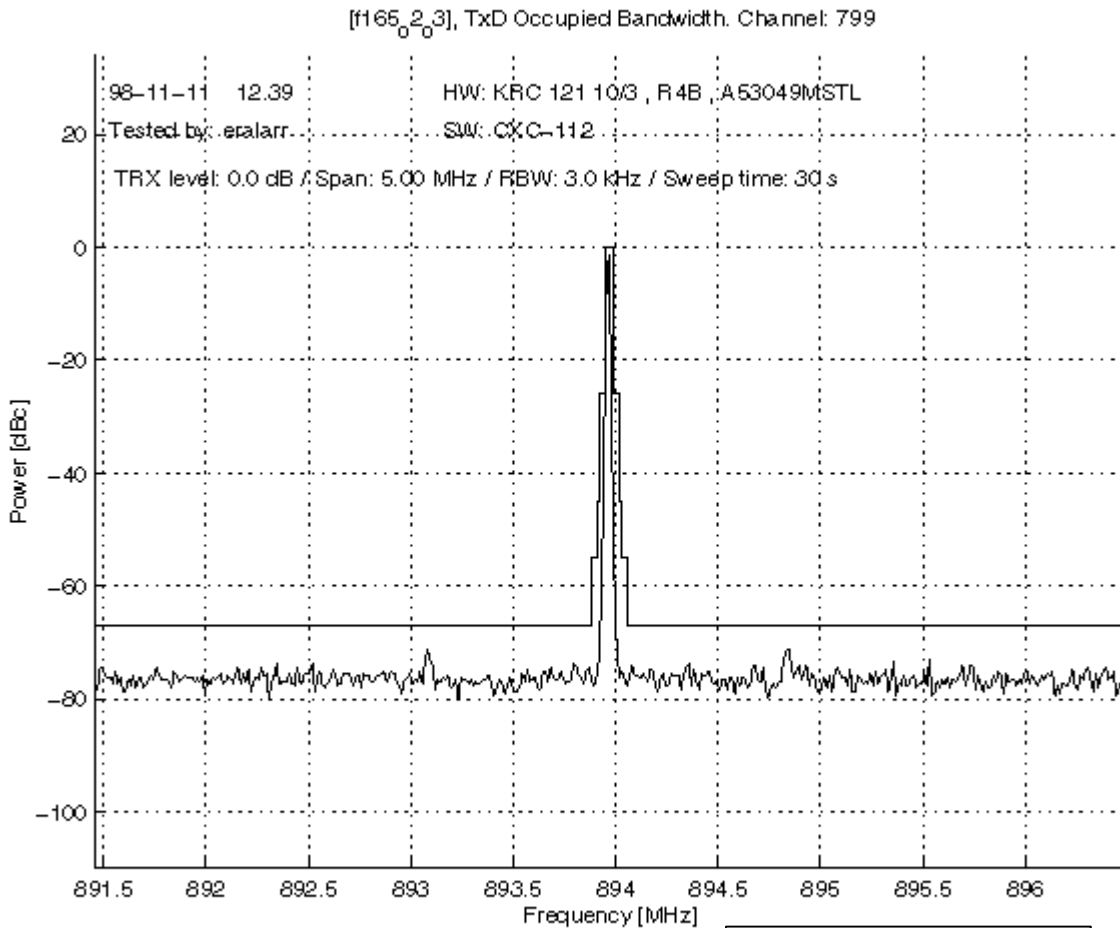

Section 3 3.2D

Referenced to the Rated Power Output
Modulated with 19.2 kbs PSEUDORANDOM DATA

EXHIBIT 6


B5KKRC12110-3

Ericsson Radio System AB.

SECTION 3

OCCUPIED BANDWIDTH DATA PACKET MODE

Modulation Sideband Spectrum
Measured Per TIA/IS-136/IS-138
and TIA/EIA-553

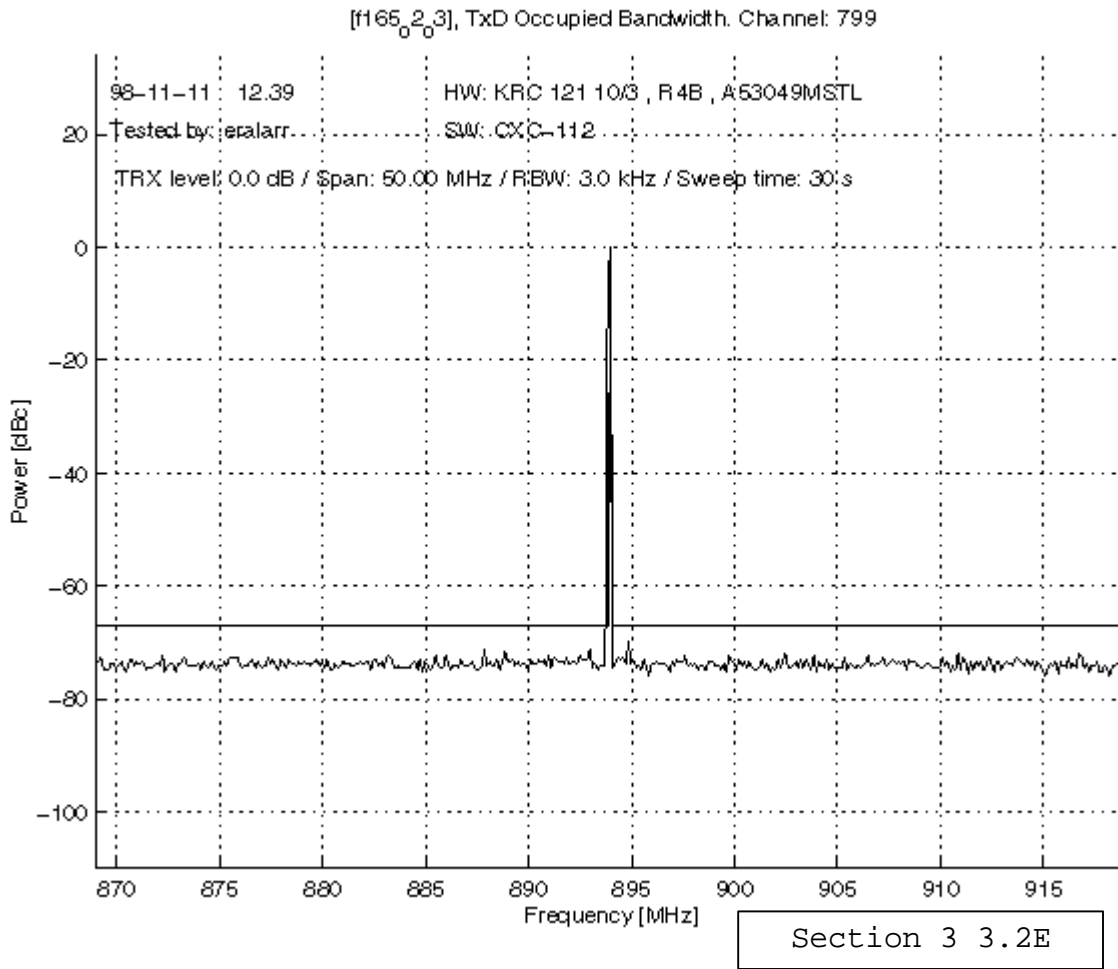

Referenced to the Rated Power Output
Modulated with 19.2 kbs PSEUDORANDOM DATA

EXHIBIT 6


B5KKRC12110-3

Ericsson Radio System AB.

SECTION 3

OCCUPIED BANDWIDTH DATA PACKET MODE

Modulation Sideband Spectrum
Measured Per TIA/IS-136/IS-138
and TIA/EIA-553

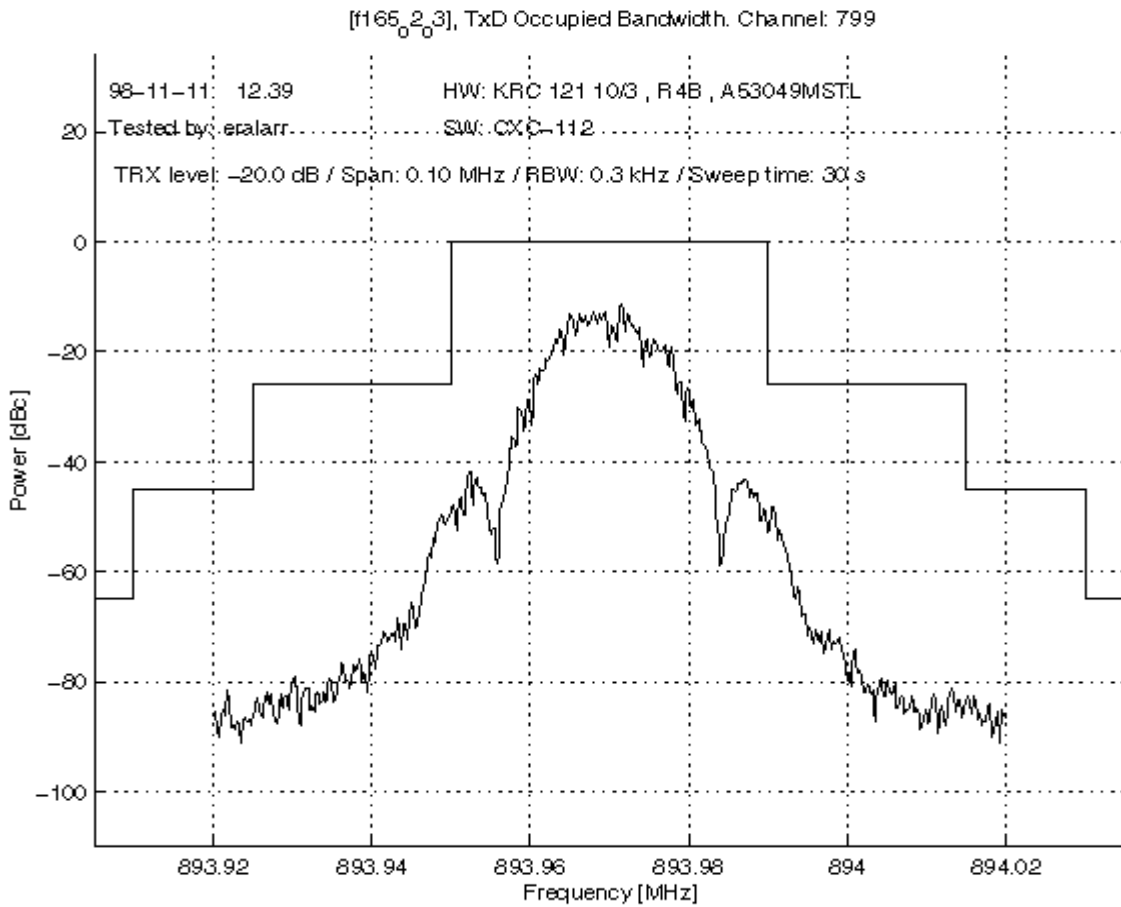

Section 3 3.2F

Referenced to the Rated Power Output at Lowest Level (- 20 dB)
Modulated with 19.2 kbs PSEUDORANDOM DATA

EXHIBIT 6


B5KKRC12110-3

Ericsson Radio System AB.

SECTION 3

OCCUPIED BANDWIDTH DATA PACKET MODE

Modulation Sideband Spectrum
Measured Per TIA/IS-136/IS-138
and TIA/EIA-553

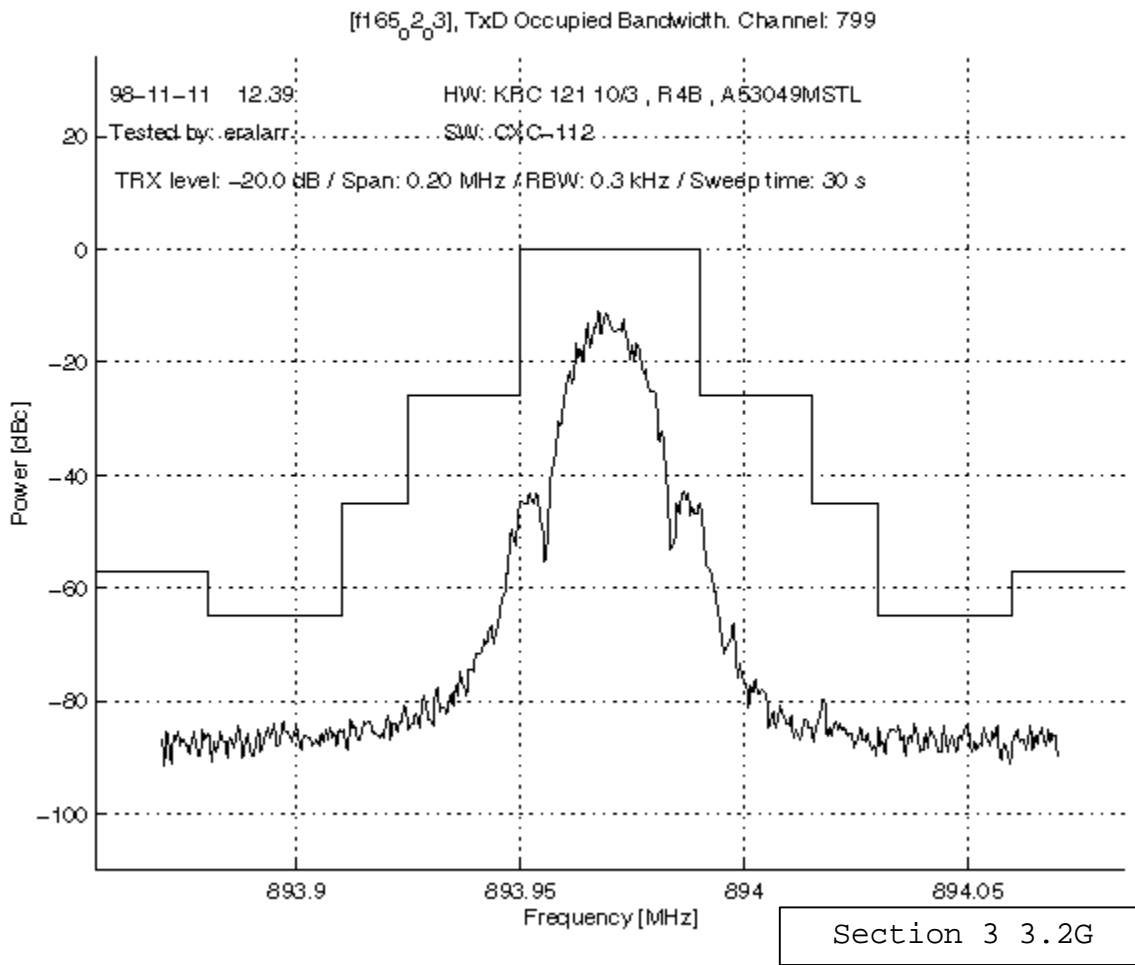

Referenced to the Rated Power Output at Lowest Level (- 20 dB)
Modulated with 19.2 kbs PSEUDORANDOM DATA

EXHIBIT 6


B5KKRC12110-3

Ericsson Radio System AB.

SECTION 3

OCCUPIED BANDWIDTH DATA PACKET MODE

Modulation Sideband Spectrum
Measured Per TIA/IS-136/IS-138
and TIA/EIA-553

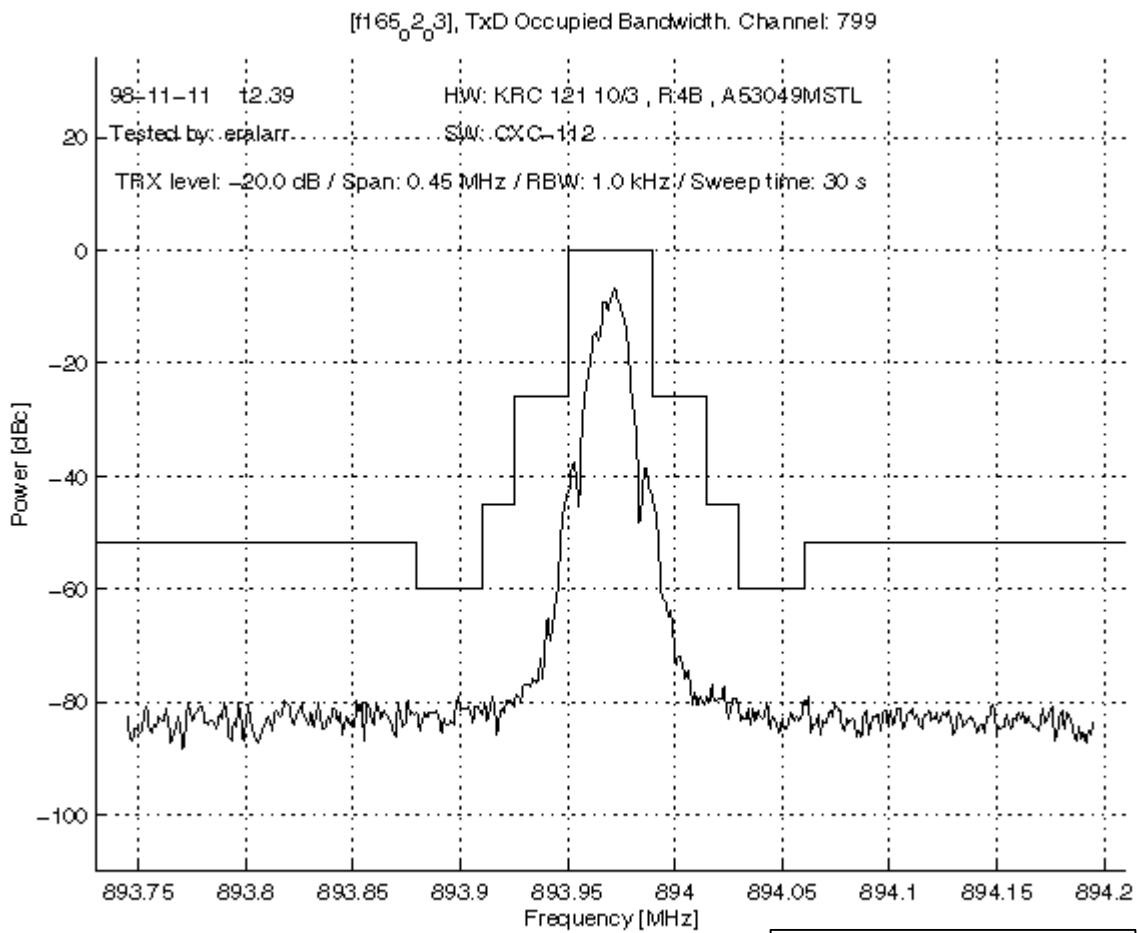

Section 3 3.2H

Referenced to the Rated Power Output at Lowest Level (- 20 dB)
Modulated with 19.2 kbs PSEUDORANDOM DATA

EXHIBIT 6


B5KKRC12110-3

Ericsson Radio System AB.

SECTION 3

OCCUPIED BANDWIDTH DATA PACKET MODE

Modulation Sideband Spectrum
Measured Per TIA/IS-136/IS-138
and TIA/EIA-553

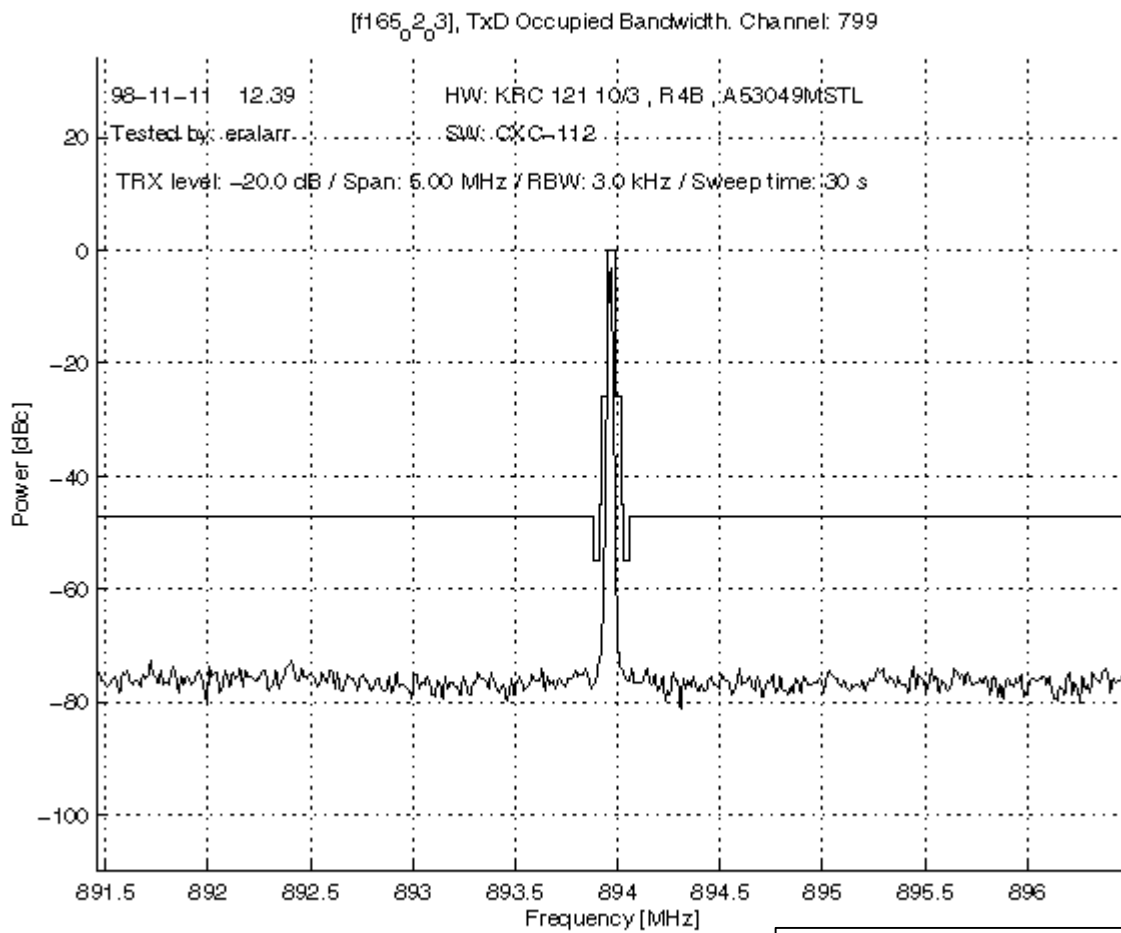

Section 3 3.2I

Referenced to the Rated Power Output at Lowest Level (- 20 dB)
Modulated with 19.2 kbs PSEUDORANDOM DATA

EXHIBIT 6


B5KKRC12110-3

Ericsson Radio System AB.

SECTION 3

OCCUPIED BANDWIDTH DATA PACKET MODE

Modulation Sideband Spectrum
Measured Per TIA/IS-136/IS-138
and TIA/EIA-553

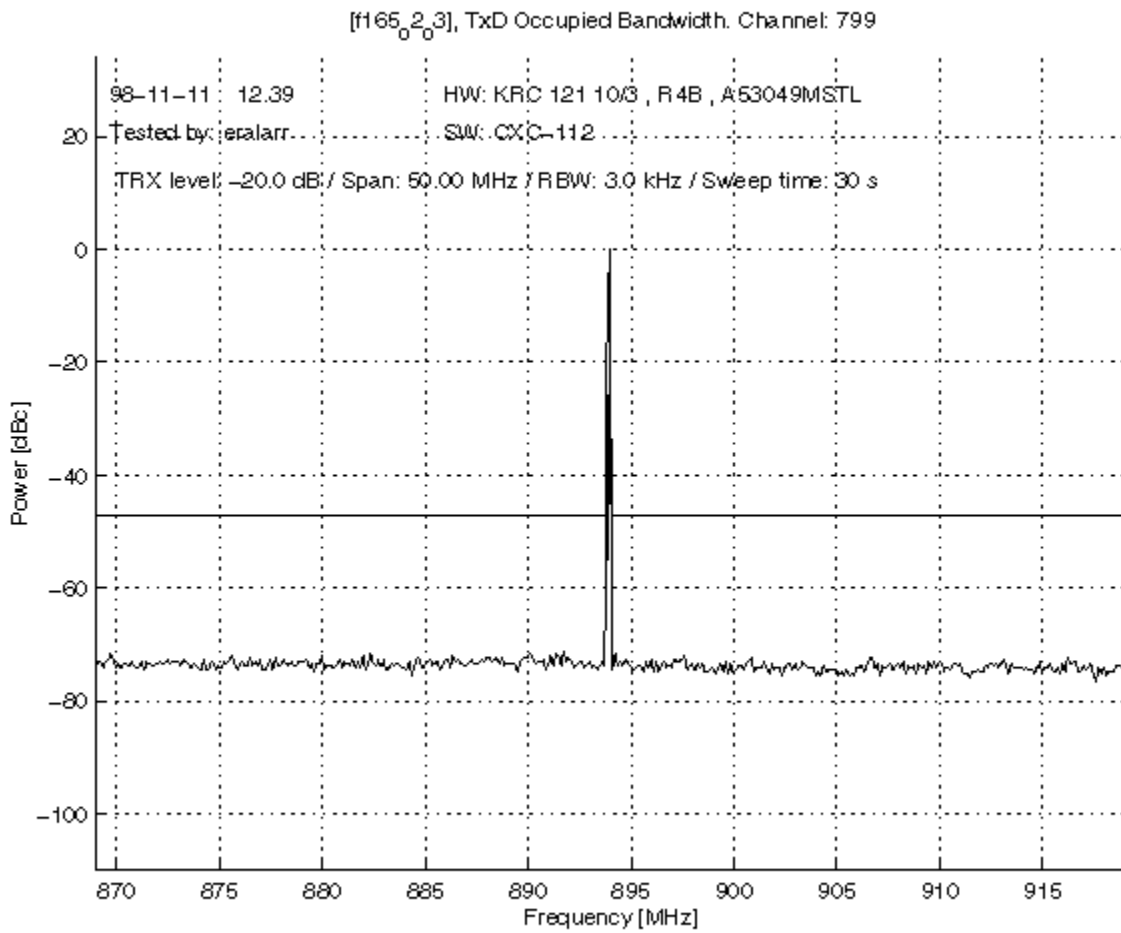

Section 3 3.2J

Referenced to the Rated Power at Lowest Level (- 20 dB)
Modulated with 19.2 kbs PSEUDORANDOM DATA