


PLB-350 A SLIM

PLB-350 B SLIM





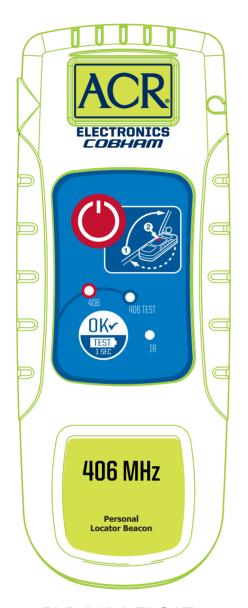

PLB-350 B FLOAT



PLB 350 A Slim Case

&

PLB 350 B Slim Case

THIS DEVICE WILL FLOAT To Activate: Deploy antenna into the upright position Press the ON/OFF button for +1 sec. WARNING: USE ONLY IN SITUATIONS OF GRAVE AND IMMINENT DANGER Deliberate misuse may incur a severe penalty.

Notice to the public: Do not move if found. Report its position to the proper authorities.
Compass safe
distance 3.3 ft (1m ). BEACON REGISTRATION IS MANDATORY PLACE BEACON DECAL HERE USA: PLB owner must register with NOAA the identification code the identification code contained on this product: NOAA SARSAT Beacon Registration NSOF, E/SP3 4231 Suitland Rd. Suitland, MD 20746 www.beaconregistration.noaa.gov
Outside the USA:
Register with your national authority Minimum Operation:
24 hrs @ 4"F (-20"C) to +131°F (+55°C)
Stowage: -40°F (-40°C) to +158°F (70°C)
Replace battery after use or by the date sho **CE**() FCC: B66ACR-PLB-350 Warranty void if opened  $\circ$ 

PLB 350 A PLB 350 B FLOATS