

DWG. NO. 18560
 A1-20-2008
 REV 1 E
 SHT 1

THIS DOCUMENT AND THE DATA DISCLOSED HEREIN OR HEREWITH IS PROPERTY OF AND BELONGS TO ACR ELECTRONICS, INC. FT LAUDERDALE, FL. IT IS FURNISHED IN CONFIDENCE SOLELY FOR INFORMATIONAL PURPOSES. IT IS NOT TO BE REPRODUCED, USED OR DISCLOSED IN WHOLE OR IN PART TO ANYONE WITHOUT THE PERMISSION OF ACR.

REVISIONS				
REV	DESCRIPTION		DATE	APPROVED
A	RELEASED PER W/I 05-EN-01, SAME AS T3 EXCEPT UPDATED ARTWORK	FG	10/11/18	CR
B	ECO 17005; UPDATED: NOTE 1 ".175MM" TO "7 MIL 8B35 VELVET MATTE"; UPDATED ARTWORK	FG	1/24/19	CR
C	ECO 17082 ADDED DASH 1	FG	7/22/19	CR
D	ECO 17142 UPDATED ARTWORK NO DASH & THE DASH CHART	FG	10/17/19	CR
E	ECO 17219 ADDED DASH 2	FG	2/11/20	CR

NO DASH

DASH 1

DASH 2

Beacon Registration is Mandatory
 Place Beacon Decal Here:
 USA: PLB Owner must register with NOAA the identification code contained on this product:
SARSAT Beacon Registration
 NOAA, NSOF, E/SPO53
 1315 East West Hwy.
 Silver Spring, MD
 20910-3282
beaconregistration.noaa.gov
 Outside the USA, register with your national authority.
 False Alerts: 1-800-851-3051
 Battery: 9V Li - Check travel restrictions with Airline and on **www.ACRARTEX.com**
 Compass safe distance 3.3ft./1m
 Notice to the public: do not move if found, report position to authorities (or report to RCMP in Canada).
 Do not short circuit, incinerate, or recharge the battery

Press  for 2 secs. to perform Self-Test

Buoyant - Category 1
 Deliberate misuse may incur a severe penalty.

CLASS 2 Device
 Minimum Operation:
 24 hrs @ -4° to +131°F (-20° to +55°C)

WARNING / ATTENTION
 USE ONLY IN SITUATIONS OF GRAVE AND IMMINENT DANGER
 EMPLOYEZ SEULEMENT EN CAS DE DANGER GRAVE ET IMMINENT

IC: 1322A-ACRPL400425
 FCC ID: B66ACRPLB-400-425



Beacon Registration is Mandatory
 Place Beacon Decal Here:
 USA: PLB Owner must register with NOAA the identification code contained on this product:
SARSAT Beacon Registration
 NOAA, NSOF, E/SPO53
 1315 East West Hwy.
 Silver Spring, MD
 20910-3282
beaconregistration.noaa.gov
 Outside the USA, register with your national authority.
 False Alerts: 1-800-851-3051
 Battery: 9V Li - Check travel restrictions with Airline and on **www.ACRARTEX.com**
 Compass safe distance 3.3ft./1m
 Notice to the public: do not move if found, report position to authorities (or report to RCMP in Canada).
 Do not short circuit, incinerate, or recharge the battery

Press  for 2 secs. to perform Self-Test

Buoyant - Category 1
 Deliberate misuse may incur a severe penalty.

CLASS 2 Device
 Minimum Operation:
 24 hrs @ -4° to +131°F (-20° to +55°C)

WARNING / ATTENTION
 USE ONLY IN SITUATIONS OF GRAVE AND IMMINENT DANGER
 EMPLOYEZ SEULEMENT EN CAS DE DANGER GRAVE ET IMMINENT

IC: 1322A-ACRPL400425
 FCC ID: B66ACRPLB-400-425



Beacon Registration is Mandatory
 Place Beacon Decal Here:
 USA: PLB Owner must register with NOAA the identification code contained on this product:
SARSAT Beacon Registration
 NOAA, NSOF, E/SPO53
 1315 East West Hwy.
 Silver Spring, MD
 20910-3282
beaconregistration.noaa.gov
 Outside the USA, register with your national authority.
 False Alerts: 1-800-851-3051
 Battery: 9V Li - Check travel restrictions with Airline and on **www.ACRARTEX.com**
 Compass safe distance 3.3ft./1m
 Notice to the public: do not move if found, report position to authorities (or report to RCMP in Canada).
 Do not short circuit, incinerate, or recharge the battery

Press  for 2 secs. to perform Self-Test

Buoyant - Category 1
 Deliberate misuse may incur a severe penalty.

CLASS 2 Device
 Minimum Operation:
 24 hrs @ -4° to +131°F (-20° to +55°C)


WARNING / ATTENTION
 USE ONLY IN SITUATIONS OF GRAVE AND IMMINENT DANGER
 EMPLOYEZ SEULEMENT EN CAS DE DANGER GRAVE ET IMMINENT

IC: 1322A-ACRPL400425
 FCC ID: B66ACRPLB-400-425



NOTES:

1. MATERIAL: 7 MIL 8B35 VELVET MATTE LEXAN
2. ADHESIVE BACKING: 3M 9671LE (300LSE)
3. DIE-CUT TO SIZE AND SHAPE
4. BULK PACK USING ACR PART NUMBER AND REVISION
5. LINER MUST HAVE PULL TAB
6. SUPPLIED INDIVIDUALLY CUT AND PACKAGED

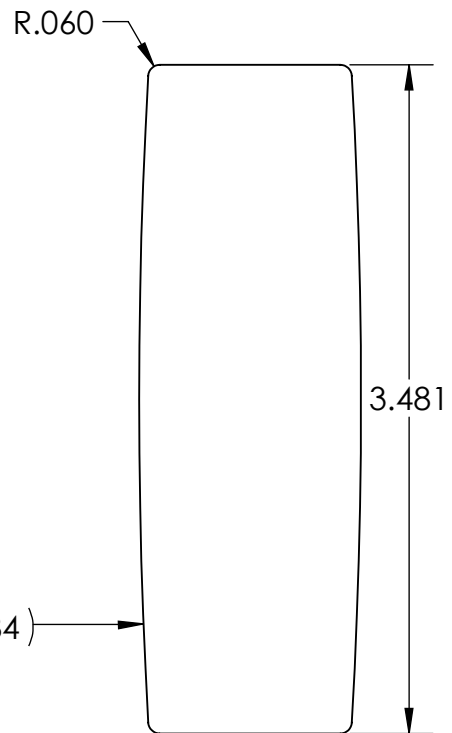

DASH CHART	
DASH NO.	DESCRIPTION
NO DASH	Universal back label
DASH 1	Canadian back label
DASH 2	RLS, European Version





UNLESS OTHERWISE SPECIFIED
 ALL ANGLES ARE 90°
 DIMENSIONS ARE IN INCHES

TOLERANCES ON

MILLIMETER	FRACTIONS	DECIMALS	ANGLES
X. ±.25		.X ±.030	X ± 5°
X.X ±.125	±1/64	.XX ±.010	.X ± 2°
X.XX ±.006		.XXX ±.005	.XX ± 1°
			IMPLIED: ±1°

ANSI-A SOLIDWORKS

DRAWN	FD	3/23/18
CHECKED	CR	10/11/18
ENG.	FG	10/11/18
APVD.	JC	10/11/18

 DENOTES REVISION CHANGE
 DENOTES DIMENSION PLUS DRAFT ANGLE
 DENOTES DIMENSION MINUS DRAFT ANGLE
 (XX) DENOTES REFERENCE NOTE OR DIMENSION
 DENOTES CRITICAL INSPECTION DIMENSIONS

ACR ELECTRONICS, INC
 5757 RAVENSWOOD RD. FT. LAUDERDALE FL 33312

**BACK LABEL,
 PLB-400 SERIES**

SIZE	CODE IDENT. NO.	DRAWING NO.	REV
A	18560	A1-20-2008	E

SCALE 1:1 SHEET 1 OF 1