



EMI TEST REPORT

Test Report No. : 23KE0041-YK-2

Applicant : NIHON KOHDEN CORPORATION
Type of Equipment : Access Point
Model No. : ZR-101AA
FCC ID : B6BZR-101AA
Test standard : FCC Part15 Subpart C, Section 15.247
Test Result : Complied

1. This test report shall not be reproduced except in full or partial, without the written approval of UL Apex Co., Ltd.
2. The results in this report apply only to the sample tested.

Date of test: June 30, July 4, 2003

Tested by: T. Suzuki & I. Isozaki
Takahiro Suzuki Ichiro Isozaki

Approved by: O. Watatani
Osamu Watatani
Site Manager of Yamakita EMC Lab.

UL Apex Co., Ltd.

YAMAKITA EMC LAB.

907 Kawanishi, Yamakita-machi, Ashigarakami-gun, Kanagawa-ken, 258-0124 JAPAN

Telephone: +81 465 77 1011

Facsimile: +81 465 77 2112

MF060b(10.04.03)

Table of Contents	Page
1 GENERAL INFORMATION	3
1.1 Tested Methodology	3
1.2 Test Facility	3
2 PRODUCT DESCRIPTION	4
3 SYSTEM TEST CONFIGURATION	5
3.1 Justification	5
3.2 Configuration of Tested System	5
4 MEASUREMENT UNCERTAINTY	6
5 SUMMARY OF TEST	7
5.1 §15.207 Conducted Emissions	7
5.2 §15.247(a)(2) 6dB Bandwidth (Antenna Port Conducted)	7
5.3 §15.247(b)(3) Maximum Peak Out Put Power (Antenna port Conducted)	7
5.4 §15.247(c) Out of Band Emissions (Radiated)	8
5.5 §15.247(c) Out of Band Emissions (Antenna Port Conducted)	8
5.6 §15.247(d) Power Density (Antenna Port Conducted)	8
<u>Contents of Appendixes</u>	9
APPENDIX 1: Photographs of test setup	10
APPENDIX 2: Test Data	12
APPENDIX 3: Test instruments	40

UL Apex Co., Ltd.

YAMAKITA EMC LAB.

907 Kawanishi, Yamakita-machi, Ashigarakami-gun, Kanagawa-ken, 258-0124 JAPAN

Telephone: +81 465 77 1011

Facsimile: +81 465 77 2112

MF060b(10.04.03)

1 GENERAL INFORMATION

Company Name : NIHON KOHDEN CORPORATION
Brand Name : NIHON KOHDEN
Address : 1-31-4 Nishiochiai Shinjuku-ku, Tokyo, 161-8560 Japan
Telephone Number : +81 3 5996 8066
Facsimile Number : +81 3 5996 8103
Contact Person : Kazuteru Yanagihara
Type of Equipment : Access Point
Model No. : ZR-101AA
Serial No. : 91002
Rating : AC120V,60Hz
Country of Manufacture : Japan
Receipt Date of Sample : June 30, 2003
Condition of E.U.T. : Production prototype
Regulation(s) : FCC Part15 Subpart C, Section 15.247
Test Site : UL Apex Yamakita EMC Lab. No.1 Open Test Site and No.1 Shielded Room

1.1 Tested Methodology

The measurements were performed according to the procedures in ANSI C63.4 (2001).
These tests were also referred to FCC 97-114 "Guidance on Measurement for Direct Sequence Spread Spectrum Systems".

1.2 Test Facility

This site has been fully described in a report submitted to FCC office, and accepted on September 20, 2002.
(No.1 Open Test Site Registration No.: 95486)
NVLAP Lab. code : 200441-0

UL Apex Co., Ltd.

YAMAKITA EMC LAB.

907 Kawanishi, Yamakita-machi, Ashigarakami-gun, Kanagawa-ken, 258-0124 JAPAN

Telephone: +81 465 77 1011

Facsimile: +81 465 77 2112

MF060b(10.04.03)

2 PRODUCT DESCRIPTION

Model: ZR-101AA, (referred to as the EUT in this report), is a Access Point.

Clock frequency used in EUT : 32.768kHz, 14.7456MHz, 25MHz, 44MHz

Frequency Characteristics : 2412 - 2462MHz
Channel Characteristics : 11 channel selectable by 5MHz spacing
Modulation : DBPSK, DQPSK, CCK
Antenna Type : Dipole Antenna
Antenna Gain : 2.14dBi
ITU Emission Code(s) : G1D
Power Supply : DC 3.3V \pm 0.3V
Operation Temperature range : 10 - 40 deg. C.
Antenna Connector Type : SMA-P

***FCC Part15.31 (e)**

The host device ZR-101AA provides the Wireless LAN module with stable power supply (DC3.3V), and the power is not changed when voltage of the personal computer is varied. Therefore, the Access Point power supply regulation.

***FCC Part 15.203 Antenna requirement**

The standard type of antenna connector is applied; however, the Access Point complies this requirement since this radio equipment is for professional installation.

UL Apex Co., Ltd.

YAMAKITA EMC LAB.

907 Kawanishi, Yamakita-machi, Ashigarakami-gun, Kanagawa-ken, 258-0124 JAPAN

Telephone: +81 465 77 1011

Facsimile: +81 465 77 2112

MF060b(10.04.03)

3 SYSTEM TEST CONFIGURATION

3.1 Justification


The system was configured in typical fashion (as a customer would normally use it) for testing.

Test mode:


1. Transmitting 2412MHz (Low)
2. Transmitting 2437MHz (Middle)
3. Transmitting 2462MHz (High)

3.2 Configuration of Tested System

Front View

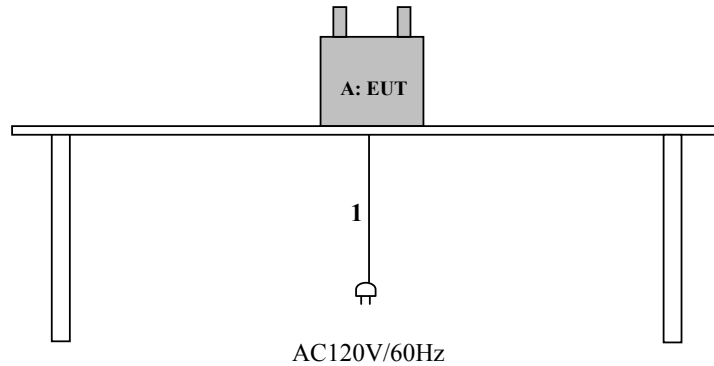

Top View

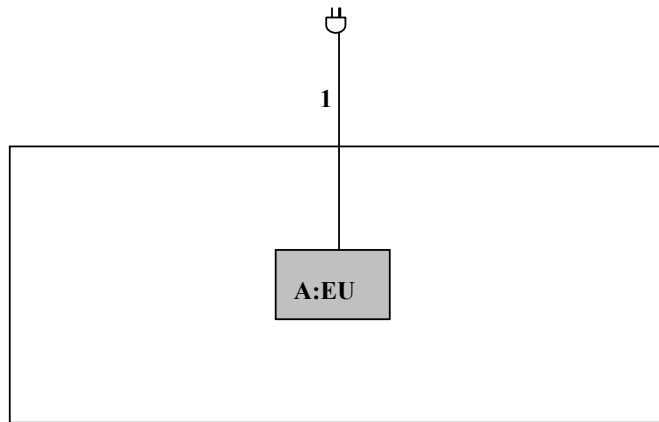

*Cabling was taken into consideration and test data was taken under worse case conditions.

Description of EUT and Support equipment

No.	Item	Model number	Serial number	Manufacturer	FCC ID	Remarks
A	Access Point	ZR-101AA	91002	NIHON KOHDEN	B6BZR-101AA	EUT

List of cables used

No.	Name	Length (m)	Shield	Backshell Material
1	AC Power Cable	1.8	Unshielded	Polyvinyl chloride

UL Apex Co., Ltd.

YAMAKITA EMC LAB.

907 Kawanishi, Yamakita-machi, Ashigarakami-gun, Kanagawa-ken, 258-0124 JAPAN

Telephone: +81 465 77 1011

Facsimile: +81 465 77 2112

MF060b(10.04.03)

4 MEASUREMENT UNCERTAINTY

Conducted emission test

The measurement uncertainty (with a 95% confidence level) for this test was ± 1.3 dB.

The data listed in this test report has enough margin, more than site margin.

Radiated emission test

The measurement uncertainty (with 95% confidence level) for this test using Biconical antenna is ± 4.8 dB.

The measurement uncertainty (with 95% confidence level) for this test using Logperiodic antenna is ± 5.2 dB.

The measurement uncertainty (with 95% confidence level) for this test using Horn antenna is ± 6.6 dB.

The result is within Yamakita EMC lab's uncertainty.

UL Apex Co., Ltd.

YAMAKITA EMC LAB.

907 Kawanishi, Yamakita-machi, Ashigarakami-gun, Kanagawa-ken, 258-0124 JAPAN

Telephone: +81 465 77 1011

Facsimile: +81 465 77 2112

MF060b(10.04.03)

5 SUMMARY OF TESTS

5.1 §15.207 Conducted Emissions (Limits by CISPR Pub.22 Class B)

Test Procedure

EUT was placed on a platform of nominal size, 1m by 1.5m, raised 80cm above the conducting ground plane. The rear of tabletop was located 40cm to the vertical conducting plane. The rear of EUT's host device and AC adapter were aligned and flushed with rear of tabletop.

All other surfaces of tabletop were at least 80cm from any other grounded conducting surface. EUT was located 80cm from LISN and excess AC cable was bundled in center.

Each EUT current-carrying power lead, except the ground (safety) lead, was individually connected through a LISN to the input power source.

The AC Mains Terminal Continuous disturbance Voltage has been measured with the EUT on a shielded room.

The EUT was connected to a Line Impedance Stabilization Network (LISN).

An overview sweep with peak detection has been performed.

The measurements have been performed with a CISPR quasi-peak detector (IF BW 9kHz).

Measurement range : 150kHz to 30MHz

Test data : APPENDIX Page 12 to 16
Photographs of test setup: Page 10
Test result : Pass
Worst margin: 8.7dB (0.5340MHz, N, AV)
Test instruments : KCC-14/15/16/18/KPL-01, KLS-01, KSA-01, KTR-02

5.2 §15.247(a)(2) 6dB Bandwidth (Antenna Port Conducted)

Test Procedure

The minimum 6dB bandwidth was measured with a spectrum analyzer connected to the antenna port.

Test data : APPENDIX Page 17
Test result : Pass
Test instruments : KTR-01, KCC-D7

5.3 § 15.247(b)(3) Maximum Peak Out Put Power (Antenna Port Conducted)

Test Procedure

The Maximum Peak Output power was measured with a power meter connected to the antenna port.

* Antenna Gain dose not exceed 6dBi.

Test data : APPENDIX Page 18
Test result : Pass
Test instruments : KPM-05, KPSS-01

UL Apex Co., Ltd.

YAMAKITA EMC LAB.

907 Kawanishi, Yamakita-machi, Ashigarakami-gun, Kanagawa-ken, 258-0124 JAPAN

Telephone: +81 465 77 1011

Facsimile: +81 465 77 2112

MF060b(10.04.03)

5.4 § 15.247(c) Out of Band Emissions (Radiated)

Test Procedure

EUT was placed on a platform of nominal size, 1m by 1.5m, raised 80cm above the conducting ground plane.

Test was made with the antenna positioned in both the horizontal and vertical planes of polarization.

The measurement antenna was varied in height above the conducting ground plane to obtain the maximum signal strength.

The Radiated Electric Field Strength intensity has been measured on an open test site with a ground plane and at a distance of 3m.

The measuring antenna height was varied between 1 and 4m and EUT was rotated a full revolution in order to obtain the maximum value of the electric field intensity. The measurements were performed for both vertical and horizontal antenna polarization. EUT emission levels were compared when the EUT antenna position was vertical polarization and horizontal polarization.

Radiated spurious emissions

In any 100kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator confirmed 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, based on a radiated measurement.

The result was also satisfied the general limits specified in Sec.15.209 (a).

Measurement range : 30MHz to 1000MHz CISPR QP Detector, IF BW 120kHz
: 1GHz to 26GHz PK and AV Detector

Test data : APPENDIX Page 19 to 21 (30 - 1000MHz)
: APPENDIX Page 22 to 27 (1 - 26GHz)
: APPENDIX Page 28 to 31
(Band Edges: 2390MHz/ 2483.5MHz, Restricted band Charts)

Photographs of test setup: Page 11

Test result : Pass

Test instruments: KAF-01, KAF-02, KAT10-S1, KAT6-01, KBA-03, KTR-01, KTR-02, KFL-01
KCC-10/11/12/13/18, KCC-D3/D7, KHA-01, KLA-01, KOTS-01, KSA-01

5.5 § 15.247(c) Out of Band Emissions (Antenna Port Conducted)

Test Procedure

The Out of Band Emissions was measured with a spectrum analyzer connected to the antenna port.

Test data : APPENDIX Page 32 to 37
Test result : Pass
Test instruments : KTR-01, KCC-D7

5.6 § 15.247(d) Power Density (Antenna Port Conducted)

Test Procedure

The Power Density was measured with a spectrum analyzer connected to the antenna port.

Test data : APPENDIX Page 38 to 39
Test result : Pass
Test instruments : KTR-01, KCC-D7

UL Apex Co., Ltd.

YAMAKITA EMC LAB.

907 Kawanishi, Yamakita-machi, Ashigarakami-gun, Kanagawa-ken, 258-0124 JAPAN

Telephone: +81 465 77 1011

Facsimile: +81 465 77 2112

MF060b(10.04.03)

APPENDIX 1: Photographs of test setup

- 1. Page 10 : Conducted emission
- 2. Page 11 : Radiated emission

APPENDIX 2: Test Data

- 1. Page 12 - 16 : Conducted emission
- 2. Page 17 : 6dB Bandwidth (Antenna Port Conducted)
- 3. Page 18 : Maximum Peak Power (Antenna Port Conducted)
- 4. Page 19 - 31 : Out Band of Emissions (Radiated)
- 5. Page 32 - 37 : Out Band of Emissions (Antenna Port Conducted)
- 6. Page 38 - 39 : Power Density (Antenna Port Conducted)

APPENDIX 3: Test instruments

- Page 40 : Test instruments

UL Apex Co., Ltd.

YAMAKITA EMC LAB.

907 Kawanishi, Yamakita-machi, Ashigarakami-gun, Kanagawa-ken, 258-0124 JAPAN

Telephone: +81 465 77 1011

Facsimile: +81 465 77 2112

MF060b(10.04.03)

Conducted emission



UL Apex Co., Ltd.

YAMAKITA EMC LAB.

907 Kawanishi, Yamakita-machi, Ashigarakami-gun, Kanagawa-ken, 258-0124 JAPAN

Telephone: +81 465 77 1011

Facsimile: +81 465 77 2112

MF060b(10.04.03)

Radiated emission



UL Apex Co., Ltd.

YAMAKITA EMC LAB.

907 Kawanishi, Yamakita-machi, Ashigarakami-gun, Kanagawa-ken, 258-0124 JAPAN

Telephone: +81 465 77 1011

Facsimile: +81 465 77 2112

MF060b(10.04.03)

DATA OF CONDUCTION TEST

UL Apex Co., Ltd.
Yamakita No.1 Shielded Room
Report No. : 23KE0041-YK \Rightarrow 2

Applicant : NIHON KOHDEN CORPORATION
 Kind of Equipment : Access Point
 Model No. : ZR-101AA
 Serial No. : 91002
 Power : AC120V/60Hz
 Mode : Transmitting (2412MHz)
 Remarks :
 Date : 7/4/2003
 Phase : Single Phase
 Temperature : 24 °C
 Humidity : 63 %
 Regulation : FCC Part15C § 15. 207. (CISPR Pub. 22)


 Engineer : Ichiro Isozaki

No.	FREQ. [MHz]	READING (N)		READING (L1)		LISN FACTOR [dB]	CABLE LOSS [dB]	ATTEN. [dB]	RESULT		LIMITS		MARGIN	
		QP [dBuV]	AV [dBuV]	QP [dBuV]	AV [dBuV]				QP [dBuV]	AV [dBuV]	QP [dB]	AV [dB]		
1.	0.1529	47.2	43.3	46.9	42.3	0.0	0.1	0.0	47.3	43.4	65.8	55.8	18.5	12.4
2.	0.1899	45.3	42.8	44.0	41.5	0.0	0.1	0.0	45.4	42.9	64.0	54.0	18.6	11.1
3.	0.3815	39.1	38.6	38.4	37.7	0.0	0.2	0.0	39.3	38.8	58.2	48.2	18.9	9.4
4.	0.5340	37.6	37.1	37.5	37.0	0.0	0.2	0.0	37.8	37.3	56.0	46.0	18.2	8.7
5.	0.8768	37.3	36.5	37.2	36.5	0.1	0.2	0.0	37.6	36.8	56.0	46.0	18.4	9.2
6.	1.2211	34.1	33.2	34.2	33.3	0.1	0.3	0.0	34.6	33.7	56.0	46.0	21.4	12.3

CALCULATION: READING[dB μ V] + LISN FACTOR[dB] + CABLE LOSS[dB] + ATTEN[dB].


■ LISN : KLS-01 (NSLK8126) ■ COAXIAL CABLE : KCC-14/15/16/18
 ■ PULSE LIMITTER : KPL-01 (PLO1) ■ EMI RECEIVER : KTR-02 (ESCS30)

DATA OF CONDUCTION TEST

UL Apex Co., Ltd.
Yamakita No.1 Shielded Room
Report No. : 23KE0041-YK-2

Applicant : NIHON KOHDEN CORPORATION
 Kind of Equipment : Access Point
 Model No. : ZR-101AA
 Serial No. : 91002
 Power : AC120V/60Hz
 Mode : Transmitting (2412MHz)
 Remarks :
 Date : 7/4/2003
 Phase : Single Phase
 Temperature : 24 °C
 Humidity : 63 %
 Regulation : FCC Part15C § 15. 207. (CISPR Pub. 22)


 Engineer : Ichiro Isozaki


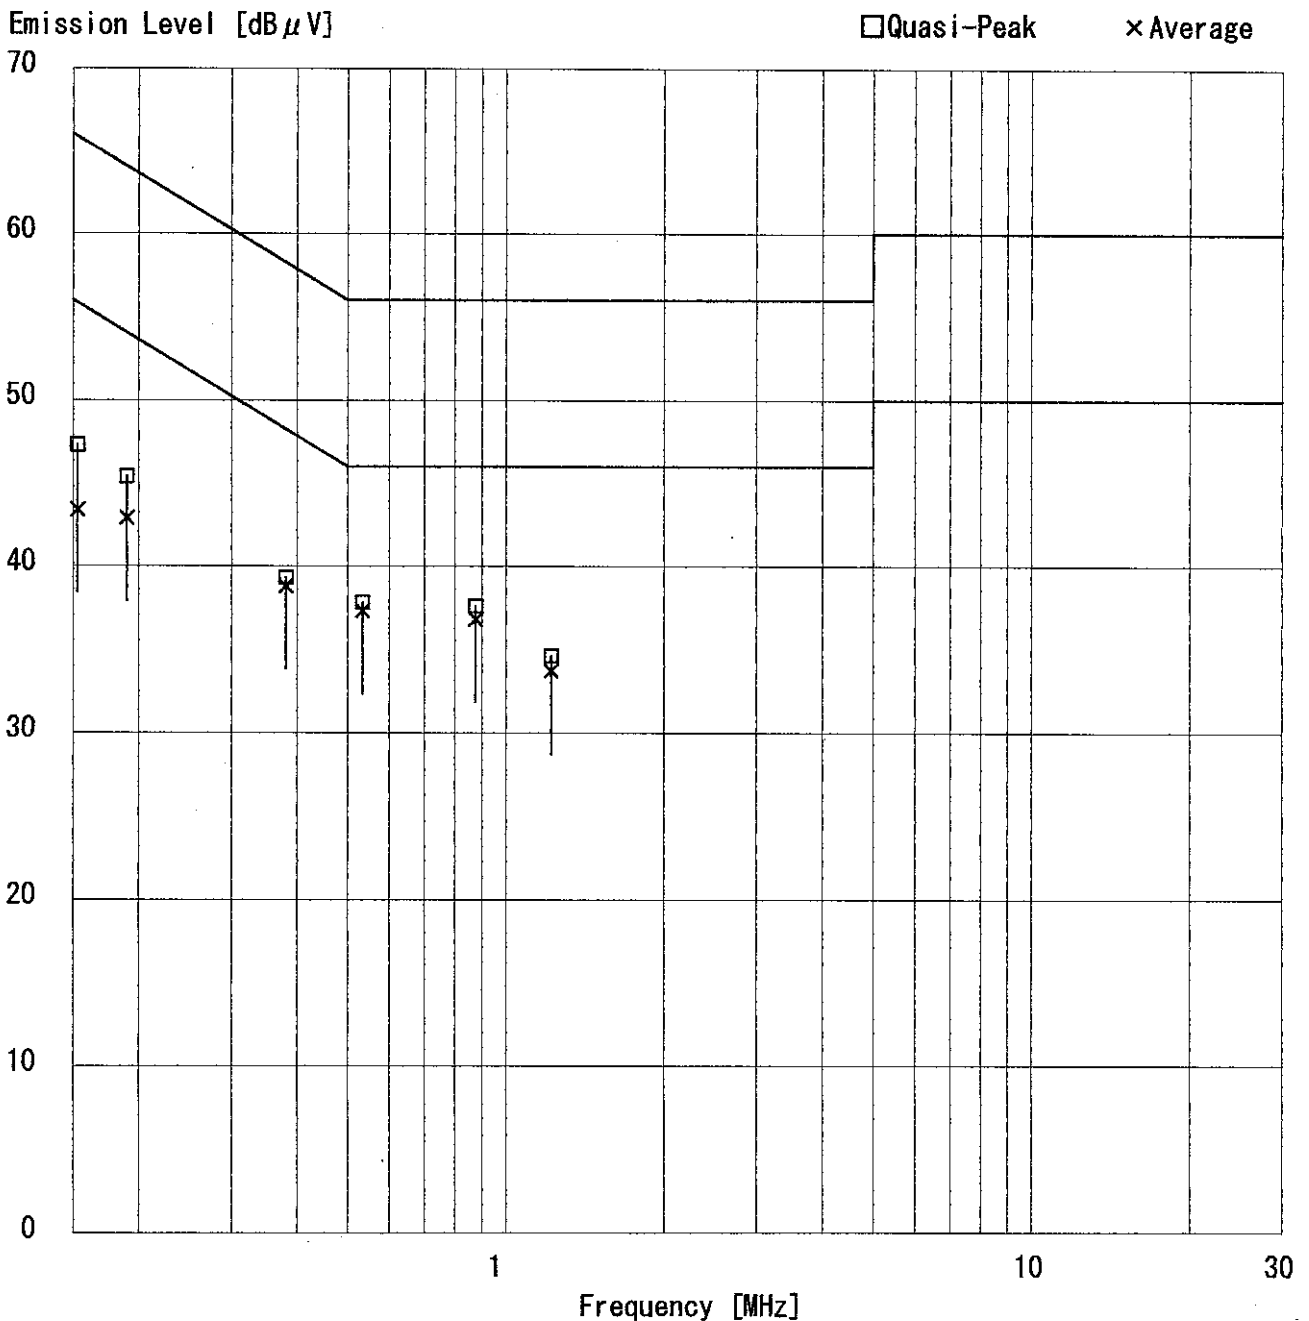


DATA OF CONDUCTION TEST CHART

UL Apex Co., Ltd.
Yamakita No.1 Shielded Room
Report No. : 23KE0041-YK = 2

Applicant : NIHON KOHDEN CORPORATION
Kind of Equipment : Access Point
Model No. : ZR-101AA
Serial No. : 91002
Power : AC120V/60Hz
Mode : Transmitting (2412MHz)
Remarks :
Date : 7/4/2003
Phase : Single Phase
Temperature : 24 °C
Humidity : 63 %
Regulation 1 : FCC Part15C § 15.207. (CISPR Pub. 22)
Regulation 2 : None


Engineer : Ichiro Isozaki

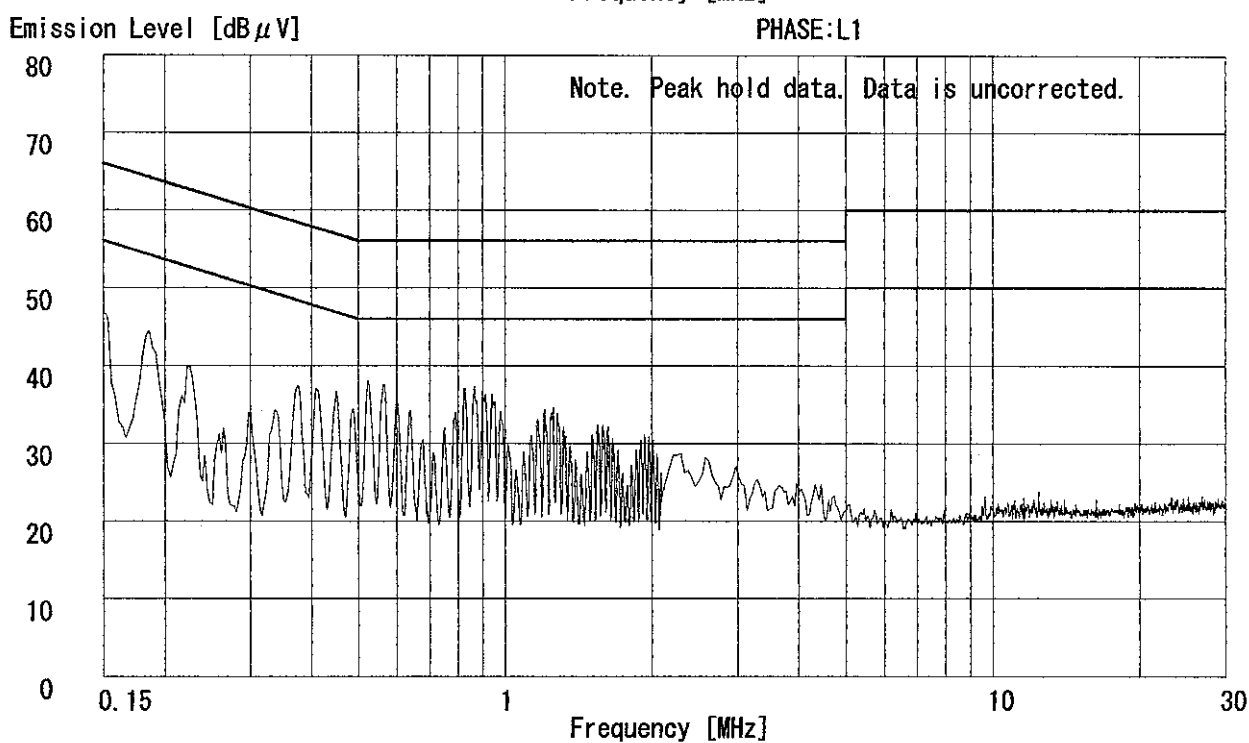
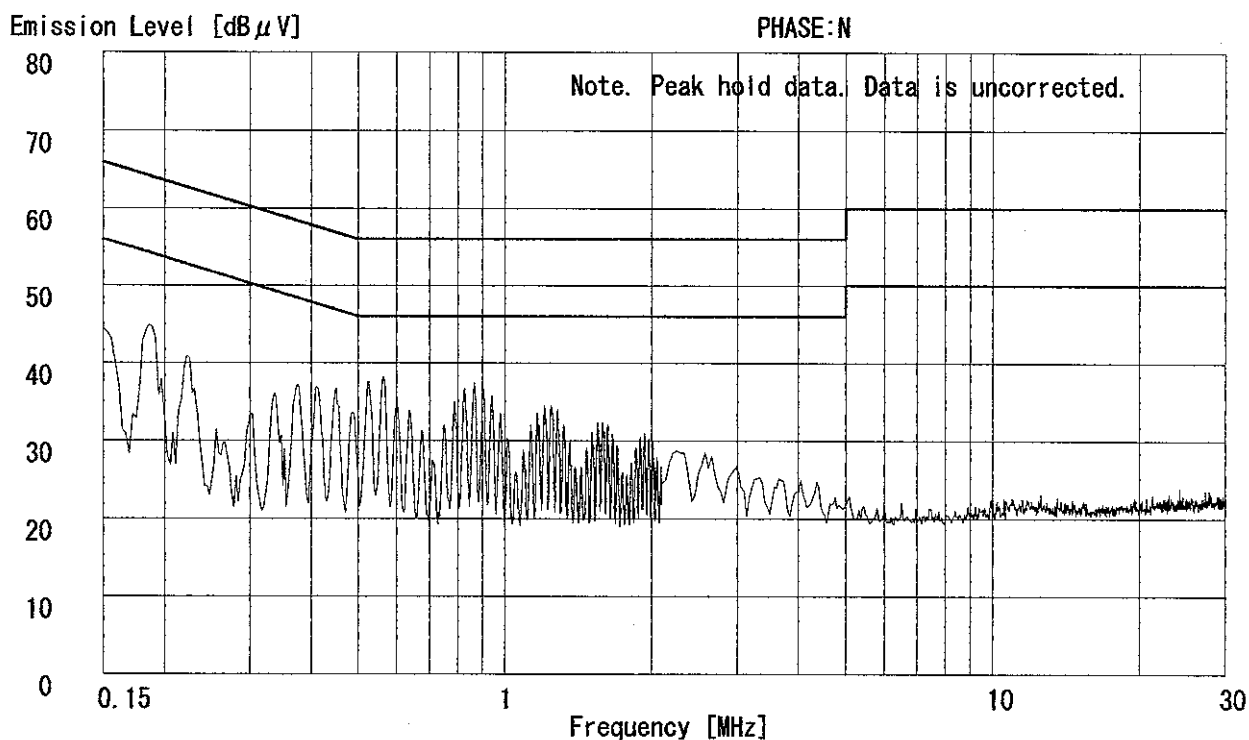


DATA OF CONDUCTION TEST CHART

UL Apex Co., Ltd.
Yamakita No.1 Shielded Room
Report No. : 23KE0041-YK [∞] 2

Applicant : NIHON KOHDEN CORPORATION
Kind of Equipment : Access Point
Model No. : ZR-101AA
Serial No. : 91002
Power : AC120V/60Hz
Mode : Transmitting (2437MHz)
Remarks :
Date : 7/4/2003
Phase : Single Phase
Temperature : 24 °C
Humidity : 63 %
Regulation 1 : FCC Part15C § 15. 207. (CISPR Pub. 22)
Regulation 2 : None


Engineer : Ichiro Isozaki

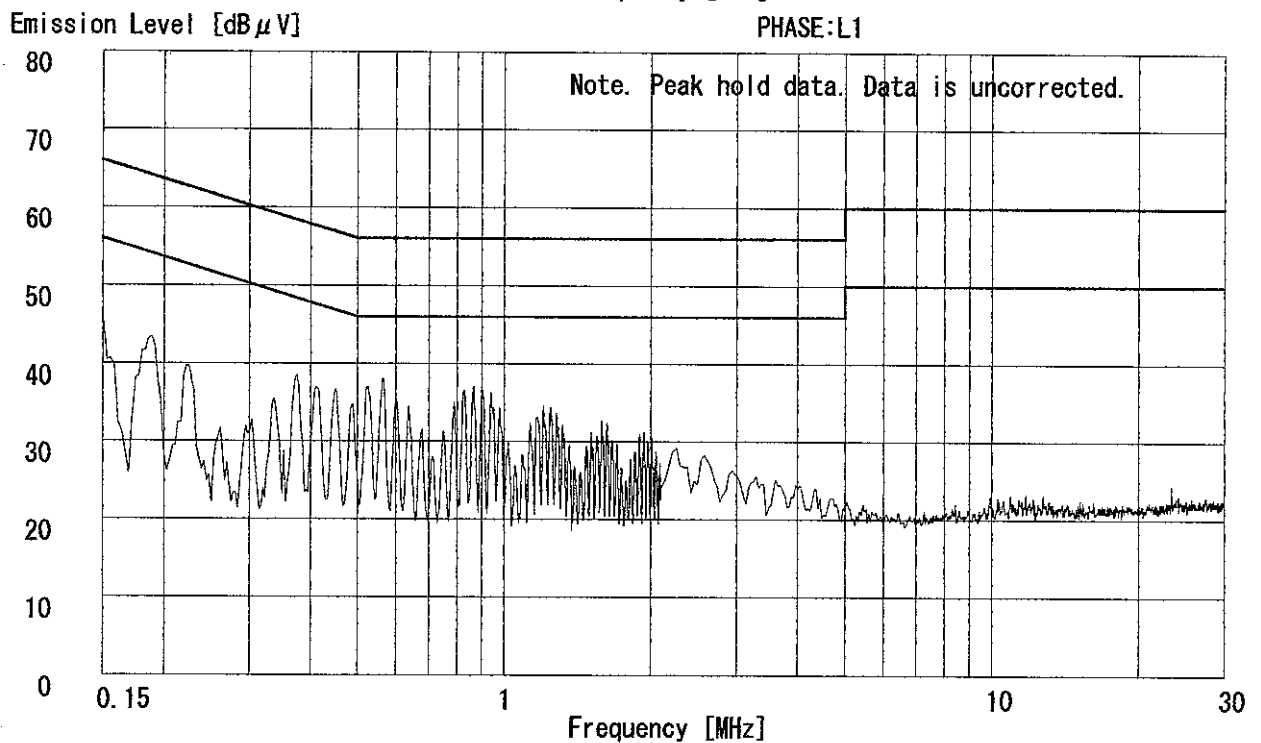
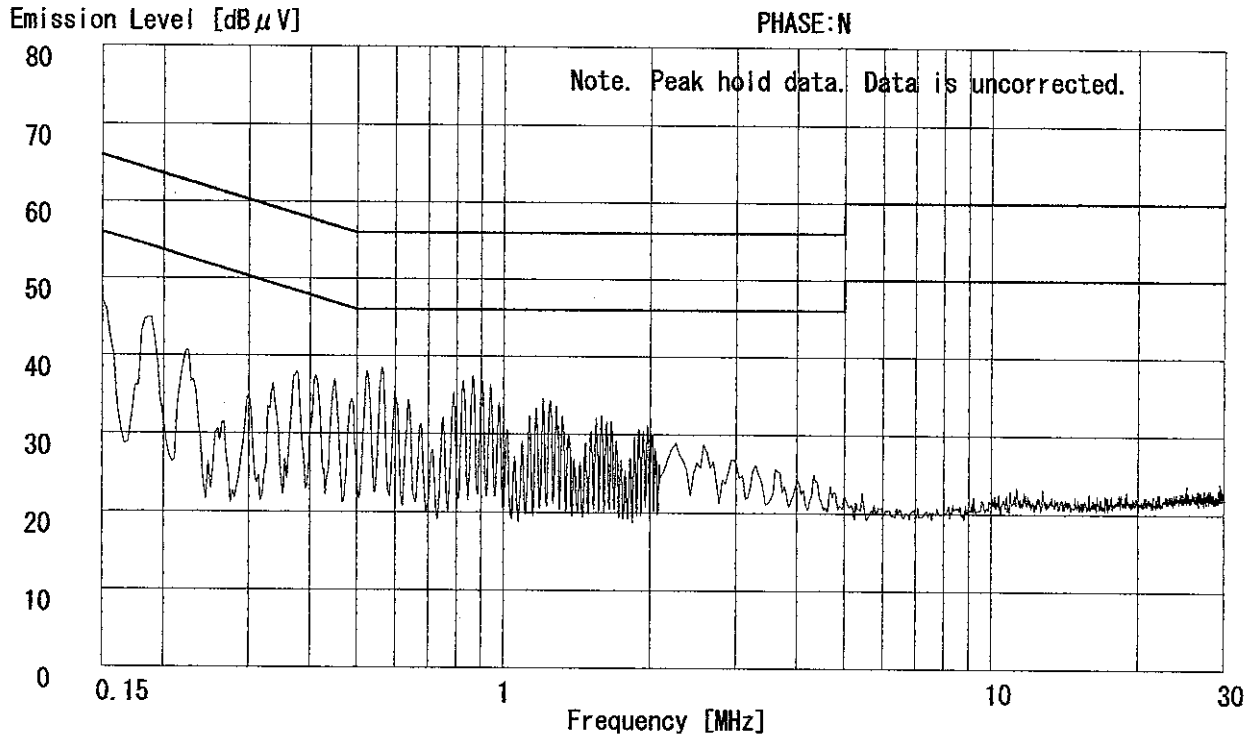


DATA OF CONDUCTION TEST CHART

UL Apex Co., Ltd.
Yamakita No.1 Shielded Room
Report No. : 23KE0041-YK= 2


Applicant : NIHON KOHDEN CORPORATION
Kind of Equipment : Access Point
Model No. : ZR-101AA
Serial No. : 91002
Power : AC120V/60Hz
Mode : Transmitting (2462MHz)
Remarks :
Date : 7/4/2003
Phase : Single Phase
Temperature : 24 °C
Humidity : 63 %
Regulation 1 : FCC Part15C § 15. 207. (CISPR Pub. 22)
Regulation 2 : None


Engineer : Ichiro Isozaki

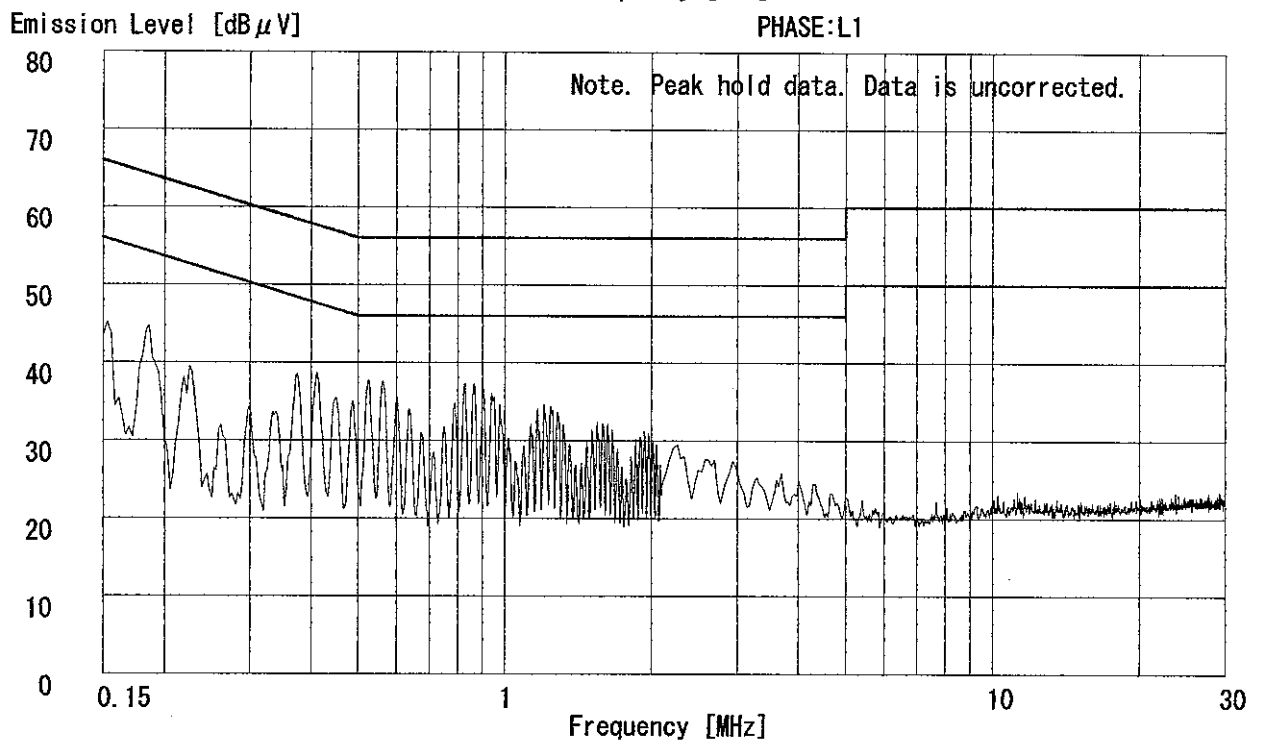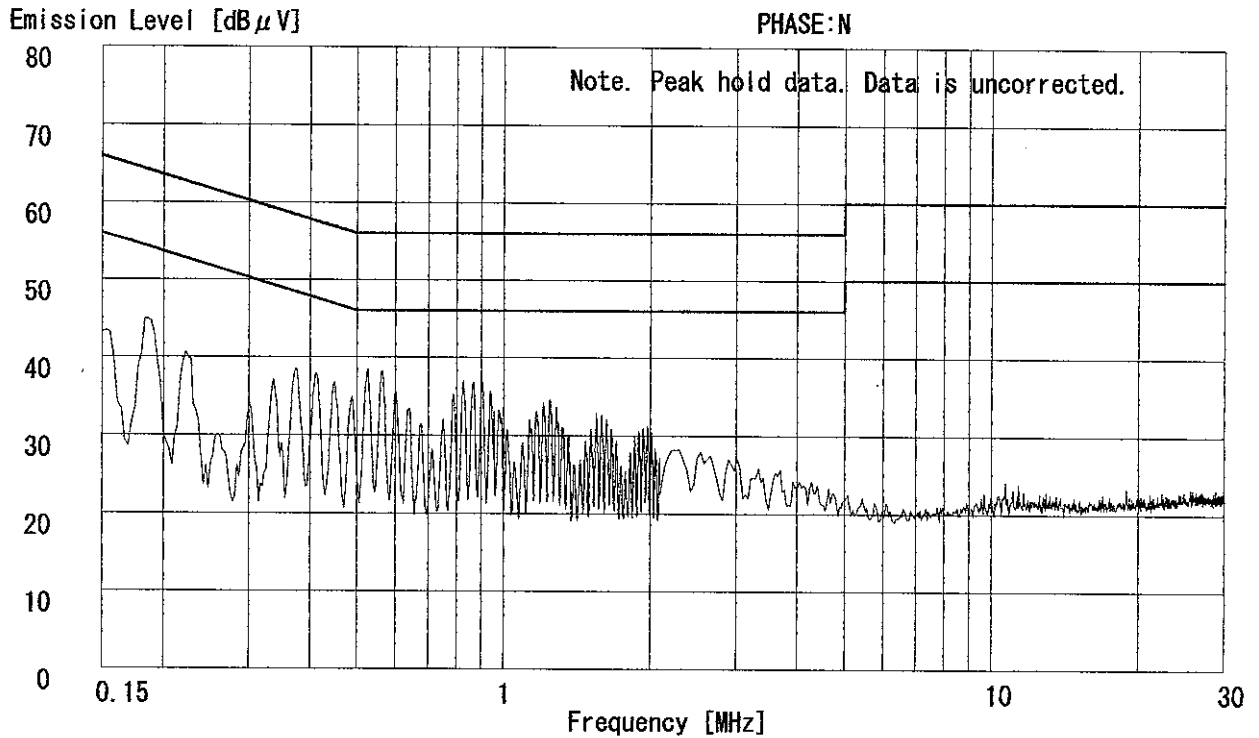


O. Isozaki


1. Ch Low:2412MHz

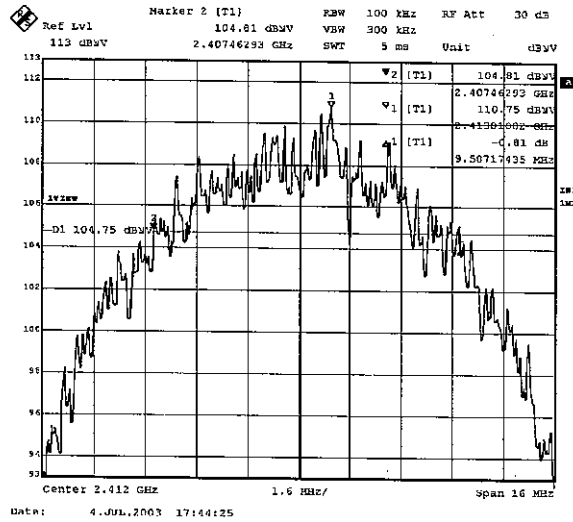

2. Ch Mid:2437MHz

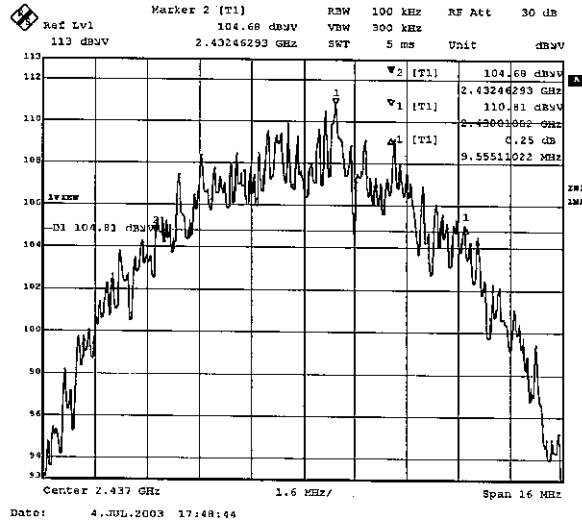

3. Ch High:2462MHz

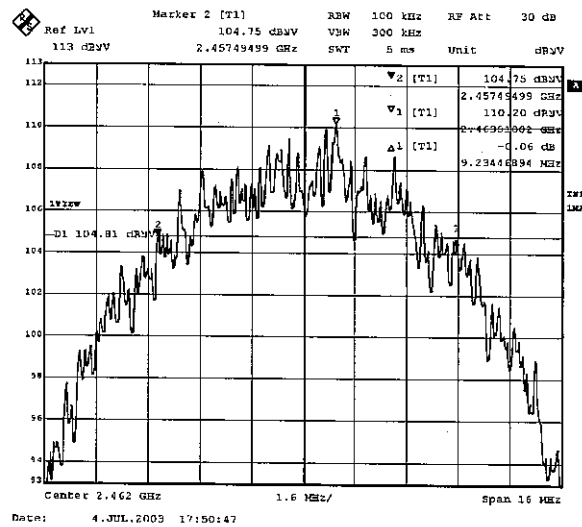


Peak Out Put Power(Conducted)

UL Apex Co., Ltd.
YAMAKITA EMC NO.1 OPEN SITE

COMPANY : NIHON KOHDEN CORPORATION
EQUIPMENT : Access Point
MODEL : ZR-101AA
FCC ID : B6BZR-101AA
POWER : AC120V/60Hz
Mode : Transmitting

REPORT NO : 23KE0041-YK-2
REGULATION : Fcc Part15SubpartC 247(b)
DATE : 2003/07/04
Temp./Humi. : 24°C/59%



ENGINEER : Ichiro Isozaki

CH	FREQ [MHz]	PM Reading [dBm]	Cable Loss [dB]	Results [dBm]	Limit (1W) [dBm]	MARGIN [dB]
Low	2412.00	16.59	0.35	16.94	30.0	13.06
Mid	2437.00	16.28	0.35	16.63	30.0	13.37
High	2462.00	16.20	0.35	16.55	30.0	13.45

DATA OF RADIATION TEST

UL Apex Co., Ltd.
Yamakita No.1 Open Test Site
Report No. : 23KE0041-YK-2

Applicant : NIHON KOHDEN CORPORATION
 Kind of Equipment : Access Point
 Model No. : ZR-101AA
 Serial No. : 91002
 Power : AC120V/60Hz
 Mode : Transmitting(2412MHz)
 Remarks :
 Date : 6/30/2003
 Test Distance : 3 m
 Temperature : 24 °C
 Humidity : 56 %
 Regulation : FCC Part15C § 15. 209


 Engineer : Takahiro Suzuki

No.	FREQ. [MHz]	ANT TYPE	READING		ANT FACTOR [dB/m]	AMP GAIN [dB]	CABLE LOSS [dB]	ATTEN. [dB]	RESULT		LIMITS [dB μ V/m]	MARGIN	
			HOR [dB μ V]	VER					HOR [dB μ V/m]	VER		HOR [dB]	VER
1.	54.01	BB	23.6	31.3	10.2	28.6	1.8	6.0	13.0	20.7	40.0	27.0	19.3
2.	100.00	BB	28.2	27.3	10.2	28.4	2.6	6.1	18.7	17.8	43.5	24.8	25.7
3.	203.72	BB	20.4	20.7	16.5	28.1	3.7	6.1	18.6	18.9	43.5	24.9	24.6
4.	402.68	BB	24.1	28.3	17.4	28.5	5.5	6.1	24.6	28.8	46.0	21.4	17.2
5.	456.01	BB	21.1	21.2	17.8	29.1	5.9	6.1	21.8	21.9	46.0	24.2	24.1
6.	712.10	BB	21.3	21.3	20.4	29.2	7.7	6.1	26.3	26.3	46.0	19.7	19.7


CALCULATION: $READING[dB \mu V] + ANT. FACTOR[dB/m] + CABLE LOSS[dB] - AMP. GAIN[dB] + ATTEN[dB]$.

■ANTENNA: KBA-03 (BBA9106) 30-299.99MHz/KLA-01 (USLP9143) 300-1000MHz
 ■CABLE: KCC-10/11/12/13/18 ■PREAMP: KAF-01 (8447D) ■EMI RECEIVER: KTR-02 (ESCS30)

DATA OF RADIATION TEST

UL Apex Co., Ltd.
Yamakita No.1 Open Test Site
Report No. : 23KE0041-YK-2

Applicant : NIHON KOHDEN CORPORATION
 Kind of Equipment : Access Point
 Model No. : ZR-101AA
 Serial No. : 91002
 Power : AC120V/60Hz
 Mode : Transmitting (2437MHz)
 Remarks :
 Date : 6/30/2003
 Test Distance : 3 m
 Temperature : 24 °C
 Humidity : 56 %
 Regulation : FCC Part15C § 15.209


 Engineer : Takahiro Suzuki

No.	FREQ. [MHz]	ANT TYPE	READING		ANT FACTOR [dB/m]	AMP GAIN [dB]	CABLE LOSS [dB]	ATTEN. [dB]	RESULT		LIMITS		MARGIN	
			HOR [dB μ V]	VER					HOR [dB μ V/m]	VER	HOR [dB]	VER		
1.	54.01	BB	21.9	30.9	10.2	28.6	1.8	6.0	11.3	20.3	40.0	28.7	19.7	
2.	100.00	BB	27.5	26.4	10.2	28.4	2.6	6.1	18.0	16.9	43.5	25.5	26.6	
3.	203.72	BB	20.3	20.4	16.5	28.1	3.7	6.1	18.5	18.6	43.5	25.0	24.9	
4.	402.68	BB	24.2	28.2	17.4	28.5	5.5	6.1	24.7	28.7	46.0	21.3	17.3	
5.	456.01	BB	21.2	21.3	17.8	29.1	5.9	6.1	21.9	22.0	46.0	24.1	24.0	
6.	712.10	BB	21.1	21.2	20.4	29.2	7.7	6.1	26.1	26.2	46.0	19.9	19.8	

CALCULATION: $READING [dB \mu V] + ANT. FACTOR [dB/m] + CABLE LOSS [dB] - AMP. GAIN [dB] + ATTEN [dB]$.

■ ANTENNA: KBA-03 (BBA9106) 30-299.99MHz/KLA-01 (USLP9143) 300-1000MHz
 ■ CABLE: KCC-10/11/12/13/18 ■ PREAMP: KAF-01 (8447D) ■ EMI RECEIVER: KTR-02 (ESCS30)

DATA OF RADIATION TEST

UL Apex Co., Ltd.
Yamakita No.1 Open Test Site
Report No. : 23KE0041-YK-2

Applicant : NIHON KOHDEN CORPORATION
 Kind of Equipment : Access Point
 Model No. : ZR-101AA
 Serial No. : 91002
 Power : AC120V/60Hz
 Mode : Transmitting (2462MHz)
 Remarks :
 Date : 6/30/2003
 Test Distance : 3 m
 Temperature : 24 °C
 Humidity : 56 %
 Regulation : FCC Part15C § 15. 209

T. Suzuki

 Engineer : Takahiro Suzuki

No.	FREQ. [MHz]	ANT TYPE	READING		ANT FACTOR [dB/m]	AMP GAIN [dB]	CABLE LOSS [dB]	ATTEN. [dB]	RESULT		LIMITS [dB μ V/m]	MARGIN	
			HOR [dB μ V]	VER					HOR [dB μ V/m]	VER		HOR [dB]	VER
1.	54.01	BB	22.7	27.2	10.2	28.6	1.8	6.0	12.1	16.6	40.0	27.9	23.4
2.	100.00	BB	27.3	26.8	10.2	28.4	2.6	6.1	17.8	17.3	43.5	25.7	26.2
3.	203.72	BB	20.3	20.2	16.5	28.1	3.7	6.1	18.5	18.4	43.5	25.0	25.1
4.	402.68	BB	23.8	27.6	17.4	28.5	5.5	6.1	24.3	28.1	46.0	21.7	17.9
5.	456.01	BB	21.3	21.2	17.8	29.1	5.9	6.1	22.0	21.9	46.0	24.0	24.1
6.	712.10	BB	21.2	21.4	20.4	29.2	7.7	6.1	26.2	26.4	46.0	19.8	19.6


CALCULATION: READING[dB μ V] + ANT. FACTOR[dB/m] + CABLE LOSS[dB] - AMP. GAIN[dB] + ATTEN[dB].

■ ANTENNA: KBA-03 (BBA9106) 30-299. 99MHz/KLA-01 (USLP9143) 300-1000MHz
 ■ CABLE: KCC-10/11/12/13/18 ■ PREAMP: KAF-01 (8447D) ■ EMI RECEIVER: KTR-02 (ESCS30)

DATA OF RADIATION TEST

UL Apex Co., Ltd.
Yamakita No.1 Open Test Site
Report No. : 23KE0041-YK-2

Applicant : NIHON KOHDEN CORPORATION
 Kind of Equipment : Access Point
 Model No. : ZR-101AA
 Serial No. : 91002
 Power : AC120V/60Hz
 Mode : Transmitting(2412MHz)
 Remarks :
 Date : 6/30/2003
 Test Distance : 3 m
 Temperature : 24 °C
 Humidity : 56 %
 Regulation : FCC Part15C § 15.209(AV Detection)


 Engineer : Takahiro Suzuki

No.	FREQ. [MHz]	ANT TYPE	READING		ANT FACTOR [dB/m]	AMP GAIN [dB]	CABLE LOSS [dB]	ATTEN. [dB]	RESULT		LIMITS [dB μ V/m]	MARGIN	
			HOR [dB μ V]	VER [dB μ V]					HOR [dB μ V/m]	VER [dB μ V/m]		HOR [dB]	VER [dB]
1.	2390.00	BB	34.1	34.1	30.6	36.9	4.1	10.0	41.9	41.9	54.0	12.1	12.1
2.	4076.00	BB	32.9	31.9	33.0	36.2	5.4	0.7	35.8	34.8	54.0	18.2	19.2
3.	4824.00	BB	30.8	31.8	34.7	35.2	5.6	0.6	36.5	37.5	54.0	17.5	16.5
4.	7236.00	BB	29.3	29.3	37.7	36.8	6.5	0.5	37.2	37.2	54.0	16.8	16.8
5.	9648.00	BB	28.2	28.2	39.0	36.9	7.2	0.5	38.0	38.0	54.0	16.0	16.0
6.	12060.00	BB	28.3	28.3	42.1	36.3	8.1	0.5	42.7	42.7	54.0	11.3	11.3
7.	14472.00	BB	27.8	27.6	41.2	35.2	7.3	0.2	41.3	41.1	54.0	12.7	12.9
8.	16884.00	BB	27.7	27.8	41.6	35.0	8.8	0.5	43.6	43.7	54.0	10.4	10.3
9.	19296.00	BB	26.3	26.3	39.1	34.7	9.4	0.0	40.1	40.1	54.0	13.9	13.9
10.	21708.00	BB	27.7	27.8	39.2	34.3	9.9	0.0	42.5	42.6	54.0	11.5	11.4
11.	24120.00	BB	26.6	26.6	40.3	35.5	10.9	0.0	42.3	42.3	54.0	11.7	11.7

CALCULATION: READING[dB μ V] + ANT. FACTOR[dB/m] + CABLE LOSS[dB] - AMP. GAIN[dB] + ATTEN[dB].

■ ANTENNA: KHA-01 (SAS-200 571) 1-18GHz/KHA-03 (3160-09) 18-26GHz
 ■ AMP: KAF-02 (8449B) ■ RECEIVER: KTR-01 (ES140) ■ CABLE: KCC-D3/D7

DATA OF RADIATION TEST

UL Apex Co., Ltd.
Yamakita No.1 Open Test Site
Report No. : 23KE0041-YK-2

Applicant : NIHON KOHDEN CORPORATION
 Kind of Equipment : Access Point
 Model No. : ZR-101AA
 Serial No. : 91002
 Power : AC120V/60Hz
 Mode : Transmitting(2412MHz)
 Remarks :
 Date : 6/30/2003
 Test Distance : 3 m
 Temperature : 24 °C
 Humidity : 56 %
 Regulation : FCC Part15C § 15.209(PK Detection)

T. Suzuki
 Engineer : Takahiro Suzuki

No.	FREQ. [MHz]	ANT TYPE	READING		ANT FACTOR [dB/m]	AMP GAIN [dB]	CABLE LOSS [dB]	ATTEN. [dB]	RESULT		LIMITS [dB μV/m]	MARGIN	
			HOR [dB μV]	VER					HOR [dB μV/m]	VER		HOR [dB]	VER
1.	2390.00	BB	45.8	46.3	30.6	36.9	4.1	10.0	53.6	54.1	74.0	20.4	19.9
2.	4076.00	BB	44.3	45.0	33.0	36.2	5.4	0.7	47.2	47.9	74.0	26.8	26.1
3.	4824.00	BB	44.6	46.7	34.7	35.2	5.6	0.6	50.3	52.4	74.0	23.7	21.6
4.	7236.00	BB	42.3	42.6	37.7	36.8	6.5	0.5	50.2	50.5	74.0	23.8	23.5
5.	9648.00	BB	40.9	40.8	39.0	36.9	7.2	0.5	50.7	50.6	74.0	23.3	23.4
6.	12060.00	BB	41.2	41.4	42.1	36.3	8.1	0.5	55.6	55.8	74.0	18.4	18.2
7.	14472.00	BB	40.2	40.1	41.2	35.2	7.3	0.2	53.7	53.6	74.0	20.3	20.4
8.	16884.00	BB	41.3	40.6	41.6	35.0	8.8	0.5	57.2	56.5	74.0	16.8	17.5
9.	19296.00	BB	39.5	39.8	39.1	34.7	9.4	0.0	53.3	53.6	74.0	20.7	20.4
10.	21708.00	BB	40.5	40.6	39.2	34.3	9.9	0.0	55.3	55.4	74.0	18.7	18.6
11.	24120.00	BB	39.5	39.8	40.3	35.5	10.9	0.0	55.2	55.5	74.0	18.8	18.5


CALCULATION: $READING[dB \mu V] + ANT. FACTOR[dB/m] + CABLE LOSS[dB] - AMP. GAIN[dB] + ATTEN[dB]$.

■ ANTENNA: KHA-01 (SAS-200 571) 1-18GHz/KHA-03 (3160-09) 18-26GHz
 ■ AMP: KAF-02 (8449B) ■ RECEIVER: KTR-01 (ES140) ■ CABLE: KCC-D3/D7

DATA OF RADIATION TEST

UL Apex Co., Ltd.
Yamakita No.1 Open Test Site
Report No. : 23KE0041-YK-2

Applicant : NIHON KOHDEN CORPORATION
 Kind of Equipment : Access Point
 Model No. : ZR-101AA
 Serial No. : 91002
 Power : AC120V/60Hz
 Mode : Transmitting (2437MHz)
 Remarks :
 Date : 6/30/2003
 Test Distance : 3 m
 Temperature : 24 °C
 Humidity : 56 %
 Regulation : FCC Part15C § 15.209 (AV Detection)


 Engineer : Takahiro Suzuki

No.	FREQ. [MHz]	ANT TYPE	READING		ANT FACTOR [dB/m]	AMP GAIN [dB]	CABLE LOSS [dB]	ATTEN. [dB]	RESULT		LIMITS [dB μ V/m]	MARGIN	
			HOR [dB μ V]	VER					HOR [dB μ V/m]	VER		HOR [dB]	VER
1.	4126.00	BB	48.0	36.4	32.9	36.1	5.5	0.7	51.0	39.4	54.0	3.0	14.6
2.	4874.00	BB	31.3	32.2	35.0	35.2	5.6	0.6	37.3	38.2	54.0	16.7	15.8
3.	7311.00	BB	29.3	29.2	37.8	36.8	6.6	0.5	37.4	37.3	54.0	16.6	16.7
4.	9748.00	BB	28.3	28.2	39.0	37.0	7.2	0.6	38.1	38.0	54.0	15.9	16.0
5.	12185.00	BB	28.3	28.3	42.3	36.1	8.1	0.4	43.0	43.0	54.0	11.0	11.0
6.	14622.00	BB	27.6	27.6	41.7	35.2	7.7	0.3	42.1	42.1	54.0	11.9	11.9
7.	17059.00	BB	27.4	27.4	41.7	34.9	8.7	0.5	43.4	43.4	54.0	10.6	10.6
8.	19496.00	BB	26.3	26.3	39.0	34.7	9.5	0.0	40.1	40.1	54.0	13.9	13.9
9.	21933.00	BB	28.5	28.2	39.3	33.6	10.2	0.0	44.4	44.1	54.0	9.6	9.9
10.	24370.00	BB	26.9	26.5	40.4	36.3	10.8	0.0	41.8	41.4	54.0	12.2	12.6


CALCULATION: $READING[dB \mu V] + ANT. FACTOR[dB/m] + CABLE LOSS[dB] - AMP. GAIN[dB] + ATTEN[dB]$.

- ANTENNA: KHA-01 (SAS-200 571) 1-18GHz/KHA-03 (3160-09) 18-26GHz
- CABLE: KCC-D3/D7 ■ PREAMP: KAF-02 (8449B) ■ EMI RECEIVER: KTR-01 (ES140)

DATA OF RADIATION TEST

UL Apex Co., Ltd.
Yamakita No.1 Open Test Site
Report No. : 23KE0041-YK-2

Applicant : NIHON KOHDEN CORPORATION
 Kind of Equipment : Access Point
 Model No. : ZR-101AA
 Serial No. : 91002
 Power : AC120V/60Hz
 Mode : Transmitting(2437MHz)
 Remarks :
 Date : 6/30/2003
 Test Distance : 3 m
 Temperature : 24 °C
 Humidity : 56 %
 Regulation : FCC Part15C § 15. 209(PK Detection)



 Engineer : Takahiro Suzuki

No.	FREQ. [MHz]	ANT TYPE	READING		ANT FACTOR [dB/m]	AMP GAIN [dB]	CABLE LOSS [dB]	ATTEN. [dB]	RESULT		LIMITS [dB μ V/m]	MARGIN	
			HOR [dB μ V]	VER					HOR [dB μ V/m]	VER		HOR [dB]	VER
1.	4126.00	BB	52.2	46.2	32.9	36.1	5.5	0.7	55.2	49.2	74.0	18.8	24.8
2.	4874.00	BB	44.6	45.3	35.0	35.2	5.6	0.6	50.6	51.3	74.0	23.4	22.7
3.	7311.00	BB	42.9	42.1	37.8	36.8	6.6	0.5	51.0	50.2	74.0	23.0	23.8
4.	9748.00	BB	40.8	41.9	39.0	37.0	7.2	0.6	50.6	51.7	74.0	23.4	22.3
5.	12185.00	BB	41.3	41.4	42.3	36.1	8.1	0.4	56.0	56.1	74.0	18.0	17.9
6.	14622.00	BB	40.9	40.7	41.7	35.2	7.7	0.3	55.4	55.2	74.0	18.6	18.8
7.	17059.00	BB	41.2	39.8	41.7	34.9	8.7	0.5	57.2	55.8	74.0	16.8	18.2
8.	19496.00	BB	39.7	39.3	39.0	34.7	9.5	0.0	53.5	53.1	74.0	20.5	20.9
9.	21933.00	BB	41.5	40.9	39.3	33.6	10.2	0.0	57.4	56.8	74.0	16.6	17.2
10.	24370.00	BB	39.8	40.1	40.4	36.3	10.8	0.0	54.7	55.0	74.0	19.3	19.0


CALCULATION: $READING[dB \mu V] + ANT. FACTOR[dB/m] + CABLE LOSS[dB] - AMP. GAIN[dB] + ATTEN[dB]$.

- ANTENNA: KHA-01 (SAS-200 571) 1-18GHz/KHA-03 (3160-09) 18-26GHz
- CABLE: KCC-D3/D7 ■PREAMP: KAF-02 (8449B) ■EMI RECEIVER: KTR-01 (ES140)

DATA OF RADIATION TEST

UL Apex Co., Ltd.
Yamakita No.1 Open Test Site
Report No. : 23KE0041-YK-2

Applicant : NIHON KOHDEN CORPORATION
 Kind of Equipment : Access Point
 Model No. : ZR-101AA
 Serial No. : 91002
 Power : AC120V/60Hz
 Mode : Transmitting(2462MHz)
 Remarks :
 Date : 6/30/2003
 Test Distance : 3 m
 Temperature : 24 °C
 Humidity : 56 %
 Regulation : FCC Part15C §15.209(AV Detection)


 Engineer : Takahiro Suzuki

No.	FREQ. [MHz]	ANT TYPE	READING		ANT FACTOR [dB/m]	AMP GAIN [dB]	CABLE LOSS [dB]	ATTEN. [dB]	RESULT		LIMITS		MARGIN	
			HOR [dB μV]	VER					HOR [dB μV/m]	VER	HOR [dB]	VER		
1.	2483.50	BB	41.3	42.5	30.6	36.9	4.1	10.0	49.1	50.3	54.0	4.9	3.7	
2.	2484.00	BB	42.1	43.6	30.6	36.9	4.1	10.0	49.9	51.4	54.0	4.1	2.6	
3.	4176.00	BB	50.1	35.3	32.9	36.0	5.5	0.7	53.2	38.4	54.0	0.8	15.6	
4.	4924.00	BB	46.8	32.7	35.3	35.2	5.6	0.5	53.0	38.9	54.0	1.0	15.1	
5.	7386.00	BB	29.3	29.3	37.9	36.9	6.6	0.5	37.4	37.4	54.0	16.6	16.6	
6.	9848.00	BB	28.3	28.3	39.0	37.0	7.2	0.7	38.2	38.2	54.0	15.8	15.8	
7.	12310.00	BB	28.4	28.4	42.5	35.9	8.1	0.4	43.5	43.5	54.0	10.5	10.5	
8.	14772.00	BB	27.7	27.7	42.2	35.1	8.1	0.4	43.3	43.3	54.0	10.7	10.7	
9.	17234.00	BB	26.7	26.7	42.3	34.8	8.5	0.6	43.3	43.3	54.0	10.7	10.7	
10.	19696.00	BB	26.6	26.5	39.5	35.0	9.6	0.0	40.7	40.6	54.0	13.3	13.4	
11.	22158.00	BB	27.9	27.9	39.2	33.7	10.3	0.0	43.7	43.7	54.0	10.3	10.3	
12.	24620.00	BB	27.1	27.0	40.4	36.0	10.9	0.0	42.4	42.3	54.0	11.6	11.7	


CALCULATION: $READING[dB \mu V] + ANT. FACTOR[dB/m] + CABLE LOSS[dB] - AMP. GAIN[dB] + ATTEN[dB]$.

■ ANTENNA: KHA-01 (SAS-200 571) 1-18GHz/KHA-03 (3160-09) 18-26GHz
 ■ CABLE: KCC-D3/D7 ■ PREAMP: KAF-02 (8449B) ■ EMI RECEIVER: KTR-01 (ES140)

DATA OF RADIATION TEST

UL Apex Co., Ltd.
Yamakita No.1 Open Test Site
Report No. : 23KE0041-YK-2

Applicant : NIHON KOHDEN CORPORATION
 Kind of Equipment : Access Point
 Model No. : ZR-101AA
 Serial No. : 91002
 Power : AC120V/60Hz
 Mode : Transmitting (2462MHz)
 Remarks :
 Date : 6/30/2003
 Test Distance : 3 m
 Temperature : 24 °C
 Humidity : 56 %
 Regulation : FCC Part15C § 15.209 (PK Detection)


 Engineer : Takahiro Suzuki

No.	FREQ. [MHz]	ANT TYPE	READING		ANT FACTOR [dB/m]	AMP GAIN [dB]	CABLE LOSS [dB]	ATTEN. [dB]	RESULT		LIMITS [dB μ V/m]	MARGIN	
			HOR [dB μ V]	VER					HOR [dB μ V/m]	VER		HOR [dB]	VER
1.	2483.50	BB	51.7	52.9	30.6	36.9	4.1	10.0	59.5	60.7	74.0	14.5	13.3
2.	2484.00	BB	52.2	55.0	30.6	36.9	4.1	10.0	60.0	62.8	74.0	14.0	11.2
3.	4176.00	BB	53.3	45.1	32.9	36.0	5.5	0.7	56.4	48.2	74.0	17.6	25.8
4.	4924.00	BB	60.6	47.1	35.3	35.2	5.6	0.5	66.8	53.3	74.0	7.2	20.7
5.	7386.00	BB	42.1	42.6	37.9	36.9	6.6	0.5	50.2	50.7	74.0	23.8	23.3
6.	9848.00	BB	41.5	41.6	39.0	37.0	7.2	0.7	51.4	51.5	74.0	22.6	22.5
7.	12310.00	BB	41.4	41.1	42.5	35.9	8.1	0.4	56.5	56.2	74.0	17.5	17.8
8.	14772.00	BB	40.8	41.4	42.2	35.1	8.1	0.4	56.4	57.0	74.0	17.6	17.0
9.	17234.00	BB	39.3	39.8	42.3	34.8	8.5	0.6	55.9	56.4	74.0	18.1	17.6
10.	19696.00	BB	39.6	39.2	39.5	35.0	9.6	0.0	53.7	53.3	74.0	20.3	20.7
11.	22158.00	BB	40.7	40.3	39.2	33.7	10.3	0.0	56.5	56.1	74.0	17.5	17.9
12.	24620.00	BB	40.8	40.2	40.4	36.0	10.9	0.0	56.1	55.5	74.0	17.9	18.5


CALCULATION: $READING [dB \mu V] + ANT. FACTOR [dB/m] + CABLE LOSS [dB] - AMP. GAIN [dB] + ATTEN [dB]$.

■ ANTENNA: KHA-01 (SAS-200 571) 1-18GHz/KHA-03 (3160-09) 18-26GHz
 ■ CABLE: KCC-D3/D7 ■ PREAMP: KAF-02 (8449B) ■ EMI RECEIVER: KTR-01 (ES140)


2.39GHz (Ch 1:2412MHz)

1. Horizontal/PK

T. Nazzari

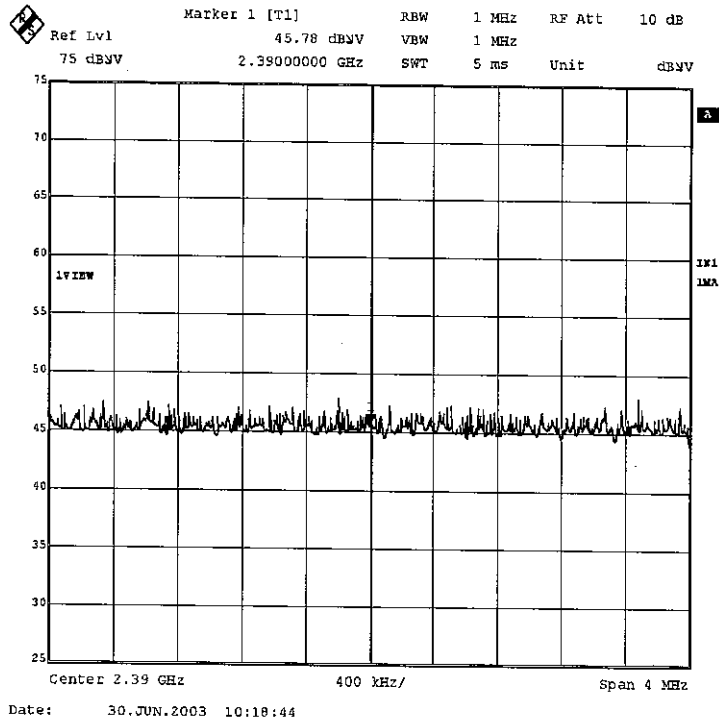


2. Vertical/PK

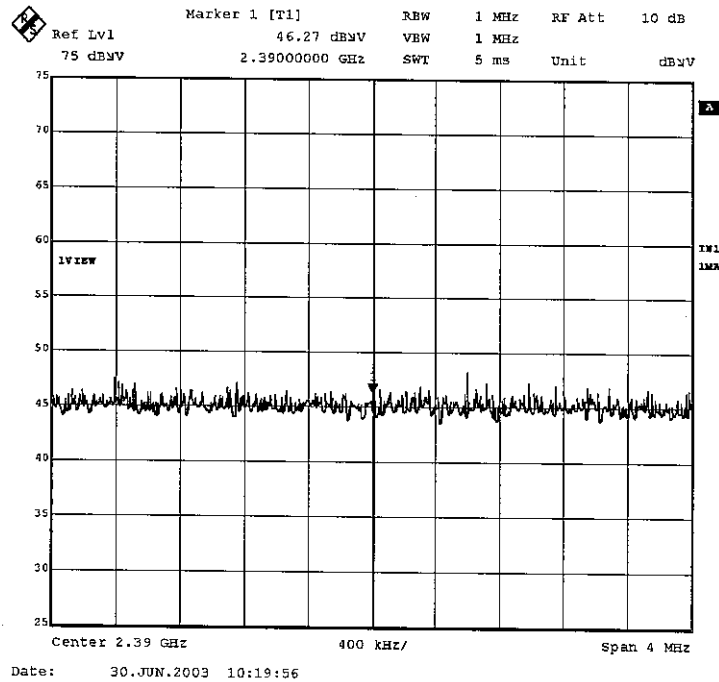


T. N. L.

3. Horizontal/AV

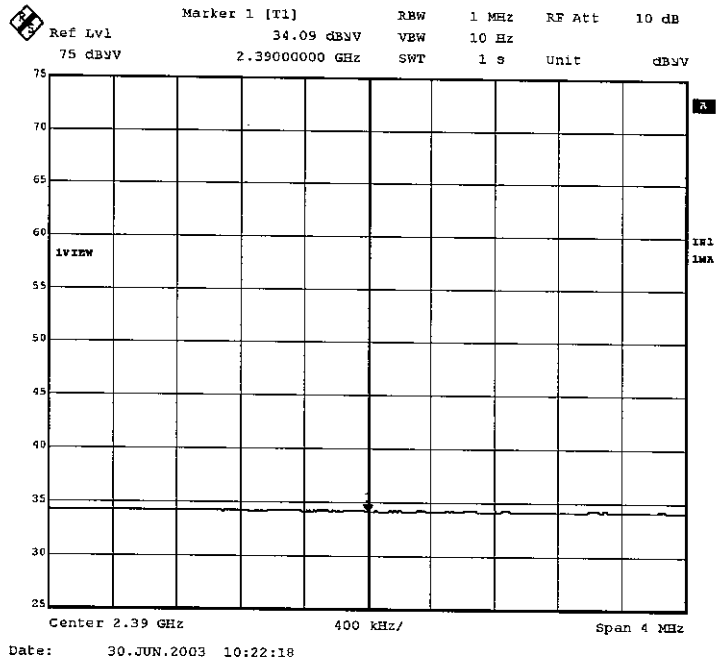


4. Vertical/AV

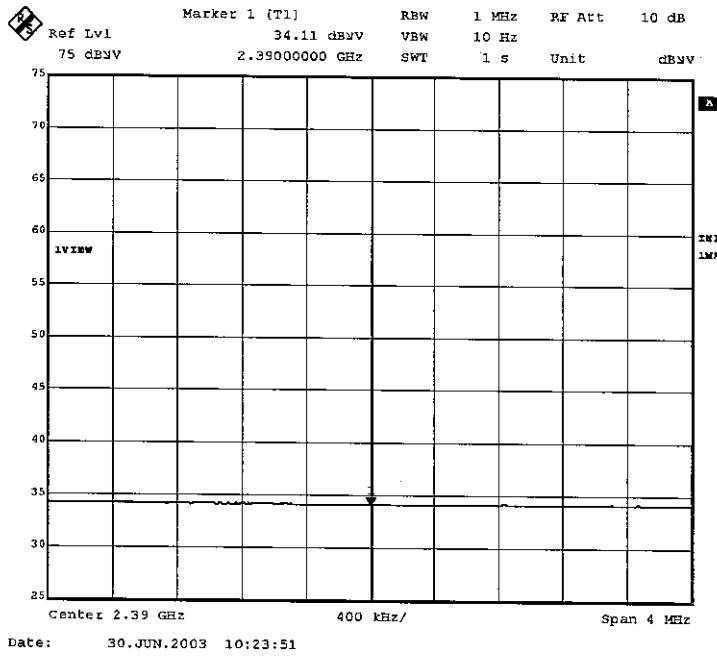


2.4835GHz (Ch 11:2462MHz)

1. Horizontal/PK

T. Szal

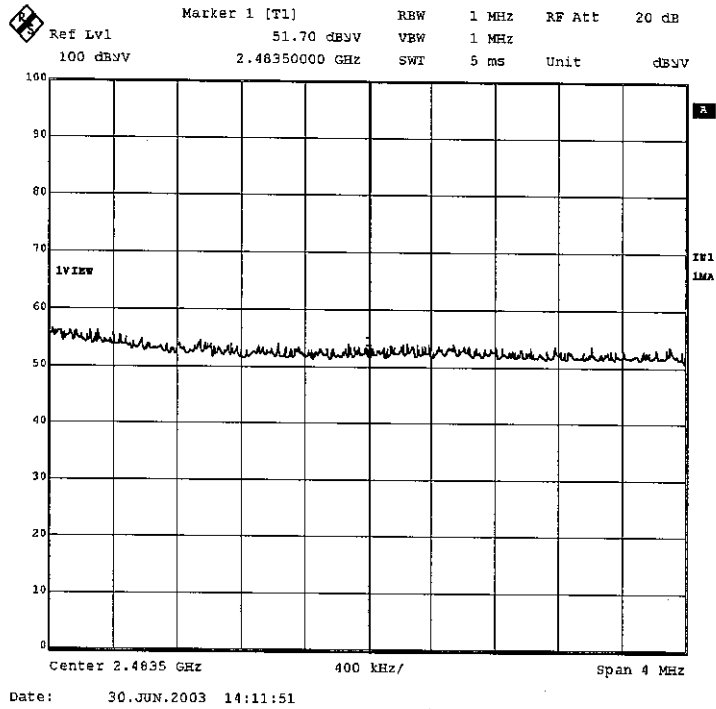


2. Vertical/PK

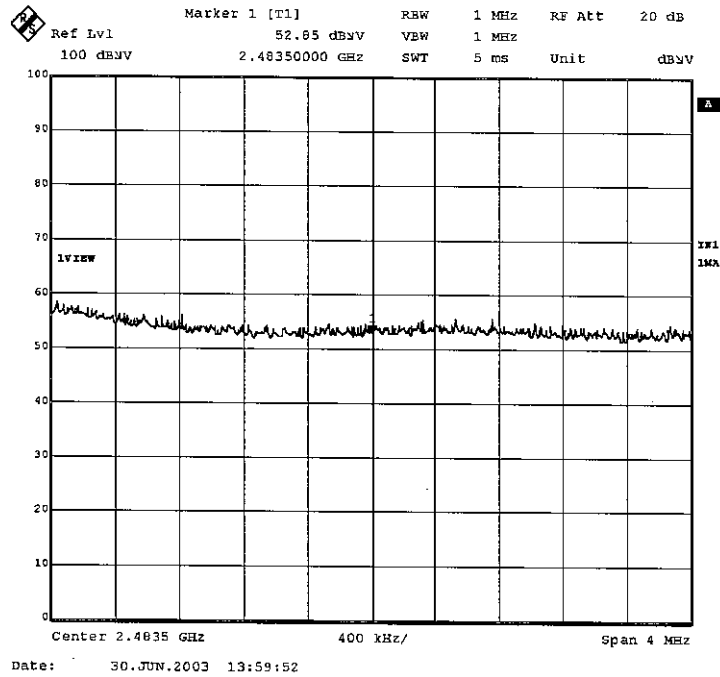


T. Seal

3. Horizontal/AV

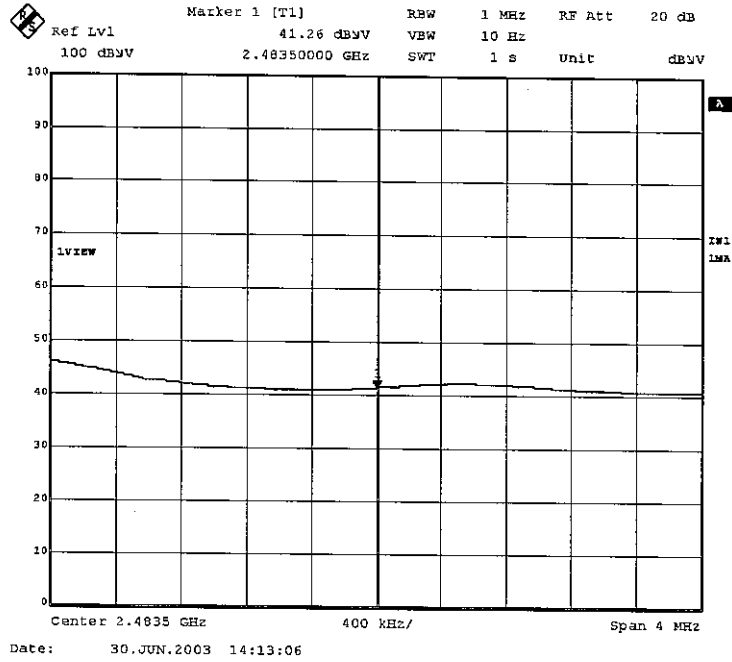


4. Vertical/AV

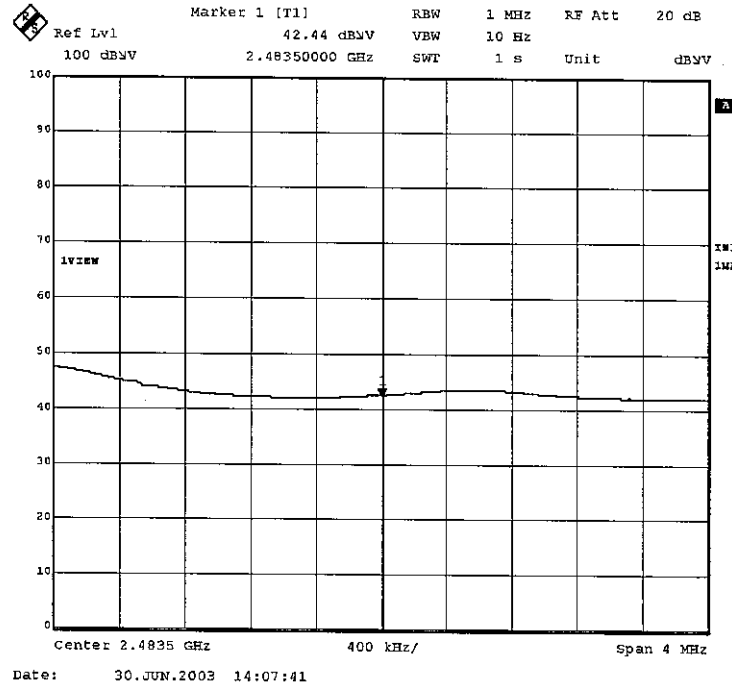


Ch 1: 2412MHz


1.

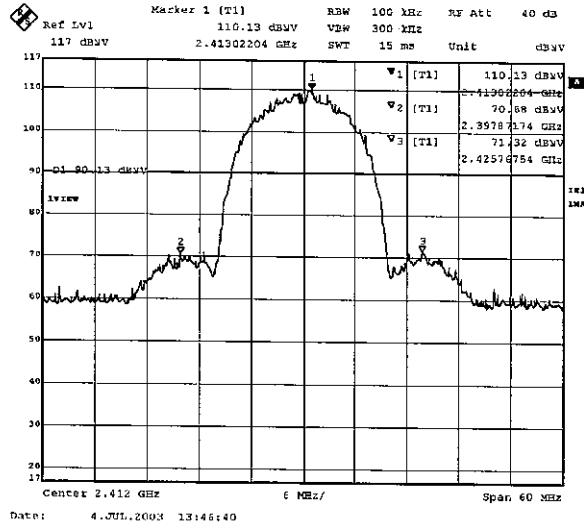

2.

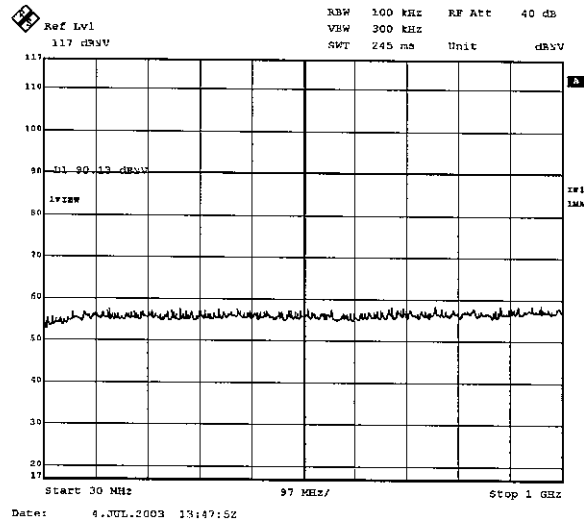


3.

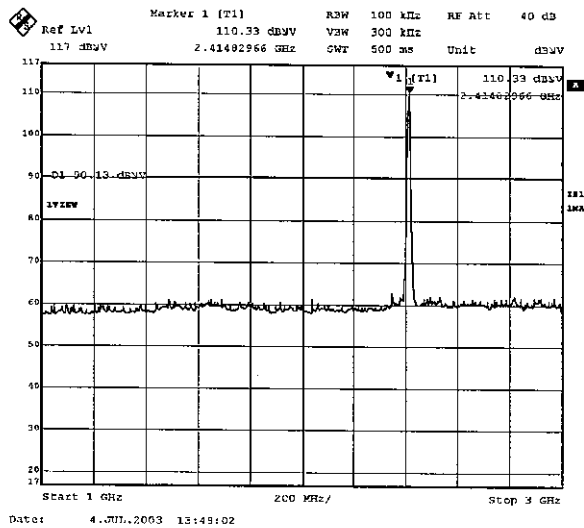


V. Suzuki

4.

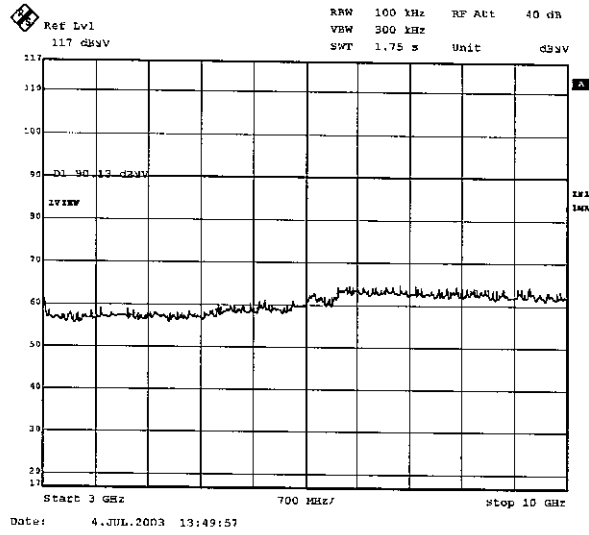


5.

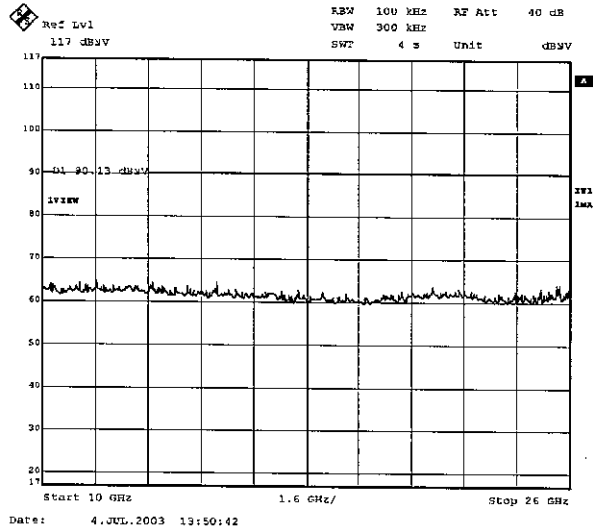


Ch 6: 2437MHz

1.

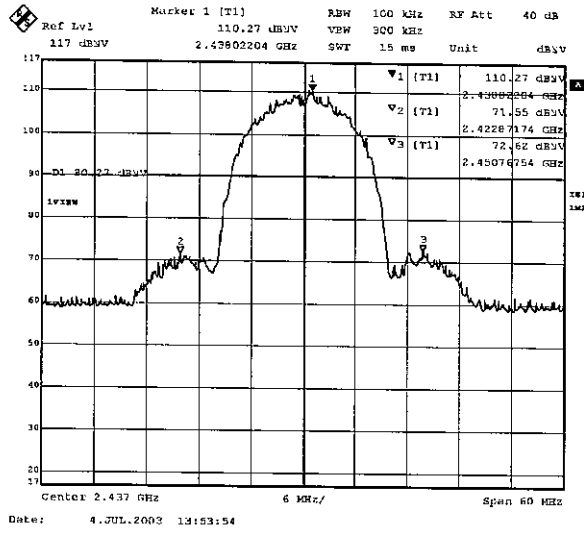


U. Suzuki


2.

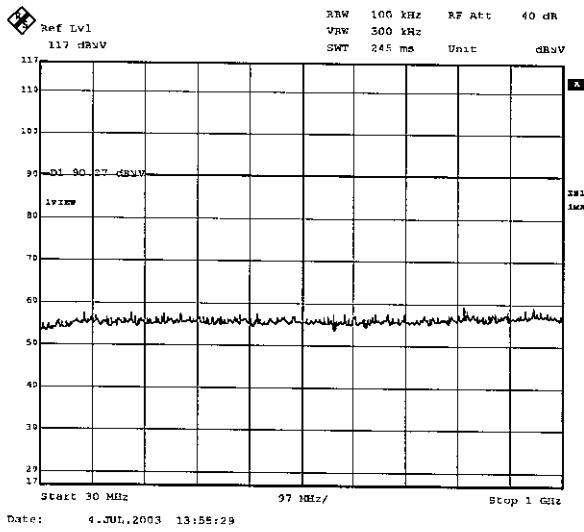

3.

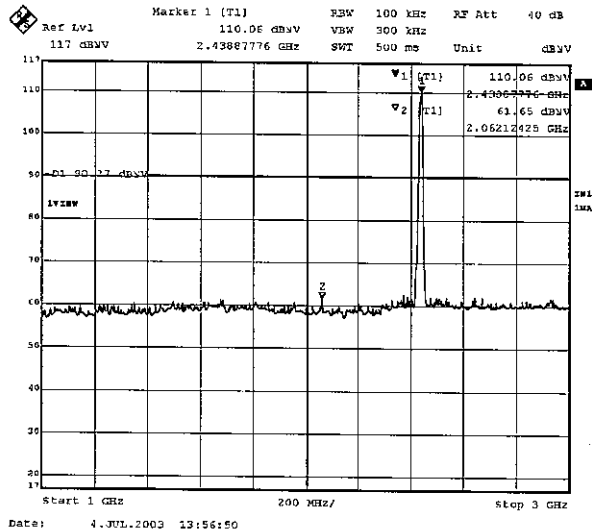


4.

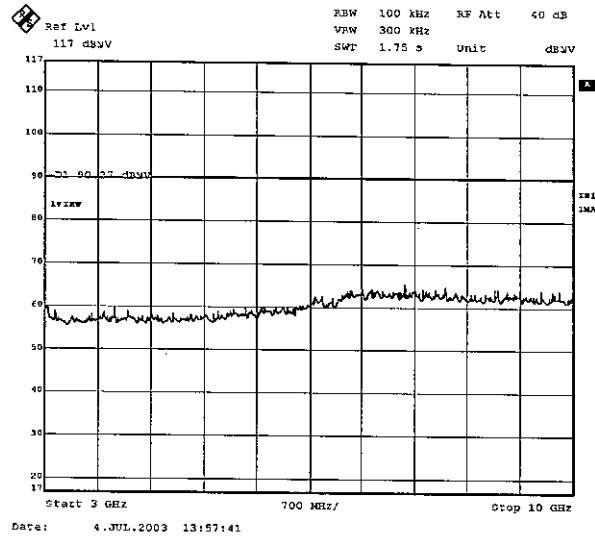

J. Szeki


5.

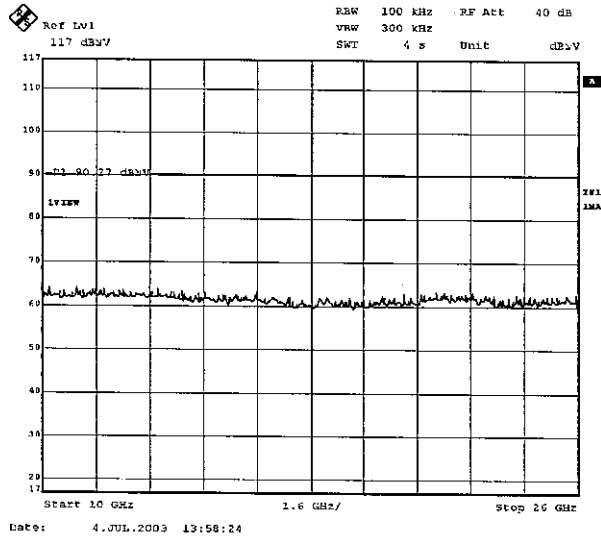


Ch 11: 2462MHz

1.


U. Szozaki

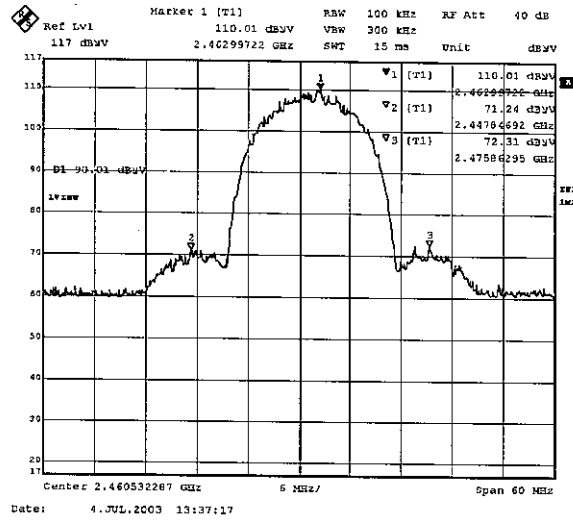

2.

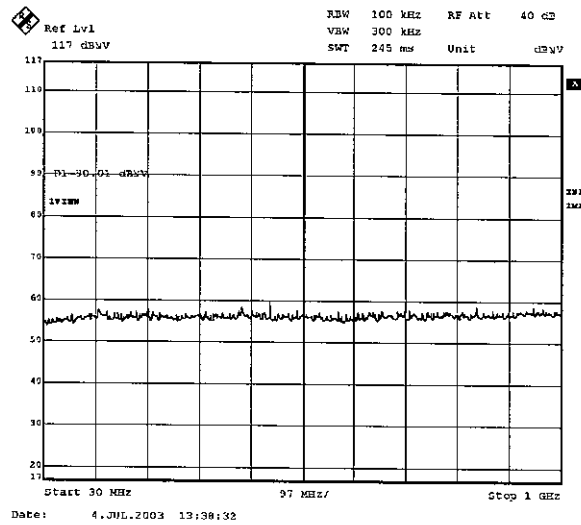


3.

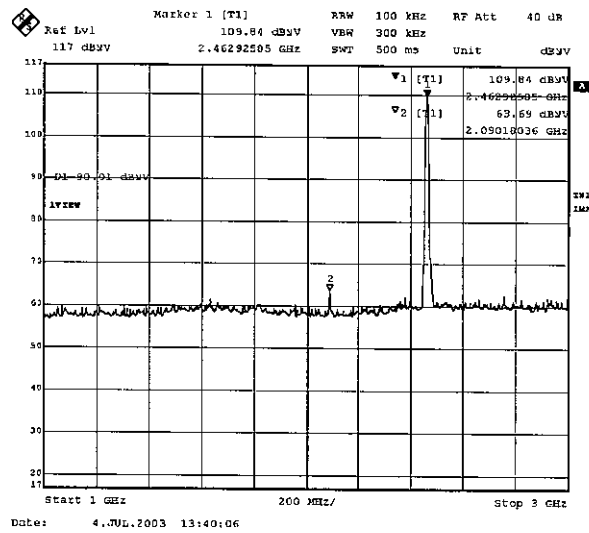


4.

U. Suzuki

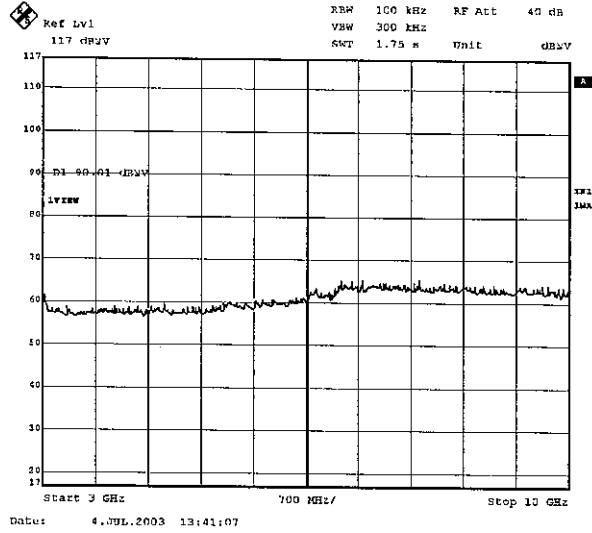

5.

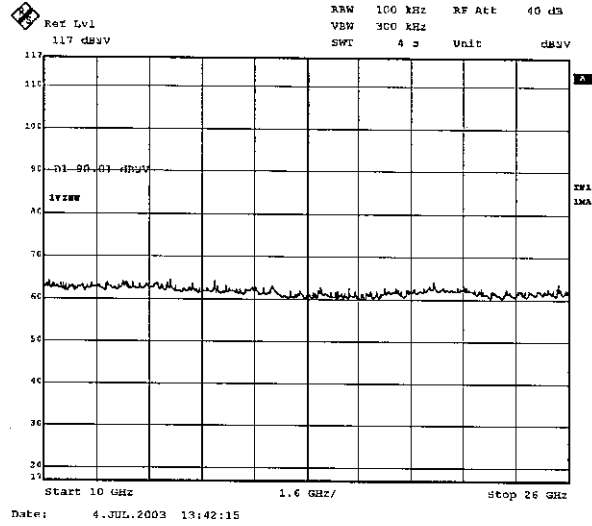


Power Density(Conducted)

UL Apex Co., Ltd.
YAMAKITA EMC NO.1 OPEN SITE

COMPANY : NIHON KOHDEN CORPORAION
EQUIPMENT : Access Point
MODEL : ZR-101AA
FCC ID : B6BZR-101AA
POWER : AC120V/60Hz
Mode : Transmitting


REPORT NO : 23KE0041-YK-2
REGULATION : Fcc Part15SubpartC 247(d)
DATE : 2003/ 07/04
Temp./Humi. : 24°C/59%


ENGINEER : Ichiro Isozaki


CH	FREQ [GHz]	S/A Reading [dBm]	Cable Loss [dB]	Results [dBm]	Limit [dBm]	MARGIN [dB]
Low	2.413418	-10.20	0.85	-9.35	8.0	17.4
Mid	2.436181	-11.62	0.85	-10.77	8.0	18.8
High	2.461181	-12.06	0.85	-11.21	8.0	19.2

U. Suzuki


1. ch 1: 2412MHz

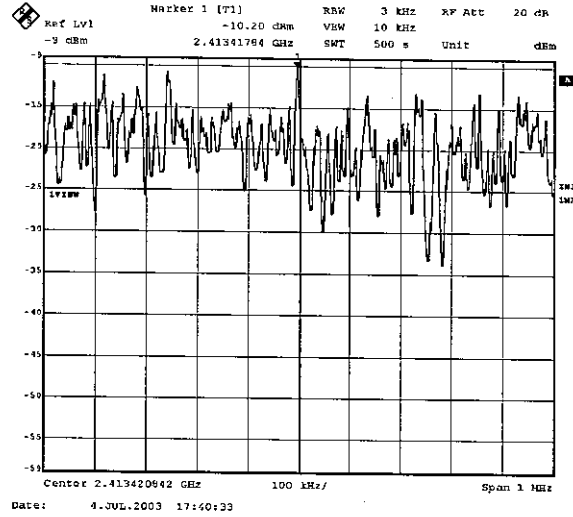

2. ch 6: 2437MHz

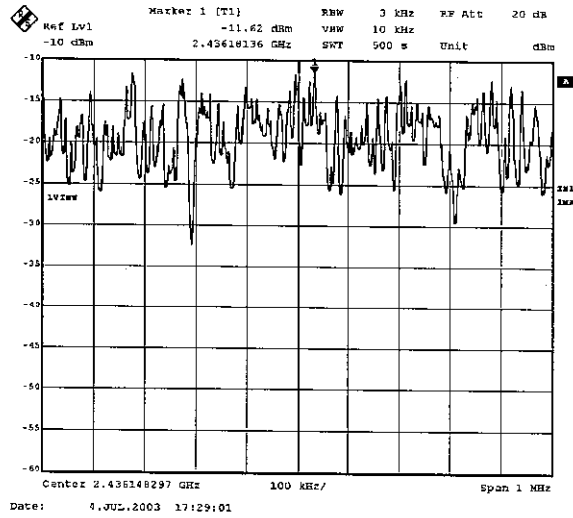

3. ch 11: 2462MHz

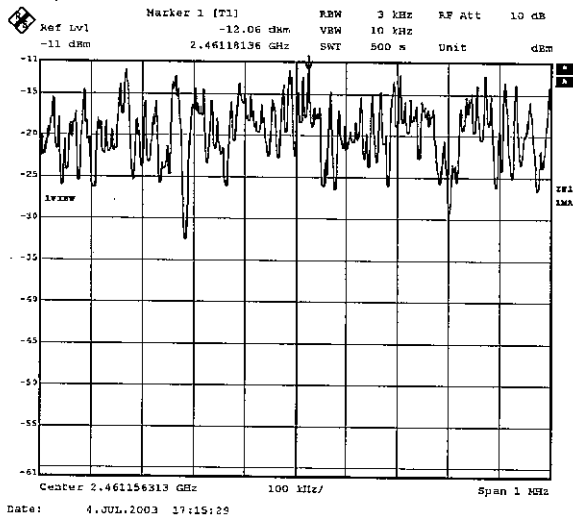

Test Report No : 23KE0041-YK-2

APPENDIX 3
Test Instruments
EMI test equipment

Control No.	Instrument	Manufacturer	Model No.	Test Item	Calibration Date * Interval(month)
KCC-14/15/16/18/KPL-01	Coaxial Cable/Pulse Limiter	Fujikura/Suhner/PMM	5D-2W/8D-2W/S04272B/S04272B/PL01	CE	2002/08/17 * 12
KLS-01	LISN(AMN)	Schwarzbeck	NSLK8126	CE	2002/08/16 * 12
KSA-01	Spectrum Analyzer	Advantest	R3365	CE/RE	2003/06/09 * 12
KTR-02	Test Receiver	Rohde & Schwarz	ESCS30	CE/RE	2002/11/25 * 12
KTR-01	Test Receiver	Rohde & Schwarz	ES140	RE/AT	2002/07/22 * 12
KCC-D7	Coaxial Cable	Advantest	A01002	AT	2003/04/18 * 12
KPM-05	Power meter	Agilent	E4417A	AT	2003/02/17 * 12
KPSS-01	Power sensor	Agilent	E9327A	AT	2003/02/21 * 12
KAF-01	Pre Amplifier	Hewlett Packard	8447D	RE	2002/08/03 * 12
KAF-02	Pre Amplifier	Hewlett Packard	8449B	RE	2003/05/08 * 12
KAT10-S1	Attenuator	Agilent	8449D 010	RE	2003/04/18 * 12
KAT6-02	Attenuator	INMET	18N-6dB	RE	2003/05/12 * 12
KBA-03	Biconical Antenna	Schwarzbeck	BBA9106	RE	2003/02/06 * 12
KFL-01	Highpass Filter	Hewlett Packard	84300 80038	RE	2003/04/18 * 12
KCC-10/11/12/13/18	Coaxial Cable	Fujikura/Suhner	8D-2W/12D-SFA/S04272B/S04272B/S04272B	RE	2002/08/17 * 12
KCC-D3/D7	Coaxial Cable	Rosenberger/Advantest	2201/JUN-08-01-061	RE	2003/04/18 * 12
KHA-01	Horn Antenna	A.H.Systems	SAS-200/571	RE	2002/07/14 * 12
KHA-03	Horn Antenna	EMCO	3160-09	RE	2003/04/23 * 12
KLA-01	Logperiodic Antenna	Schwarzbeck	USLP9143	RE	2003/02/19 * 12
KOTS-01	Open Test Site	JSE	30m	RE	2002/08/18 * 12

All equipment is calibrated with traceable calibrations. Each calibration is traceable to the national or international standards.

Test Item:

CE: Conducted emission test

RE: Radiated emission test

AT: Antenna terminal conducted test