


NOTES: (UNLESS OTHERWISE SPECIFIED)

1. BLACK GRAPHICS AND TYPE ON 2 MIL MYLAR WITH PRESSURE SENSITIVE PERMANENT ADHESIVE FOR USE ON ABS PLASTIC, 1 MIL CLEAR MYLAR OVERLAY.

2. COLOR PER ANSI Z535.1.

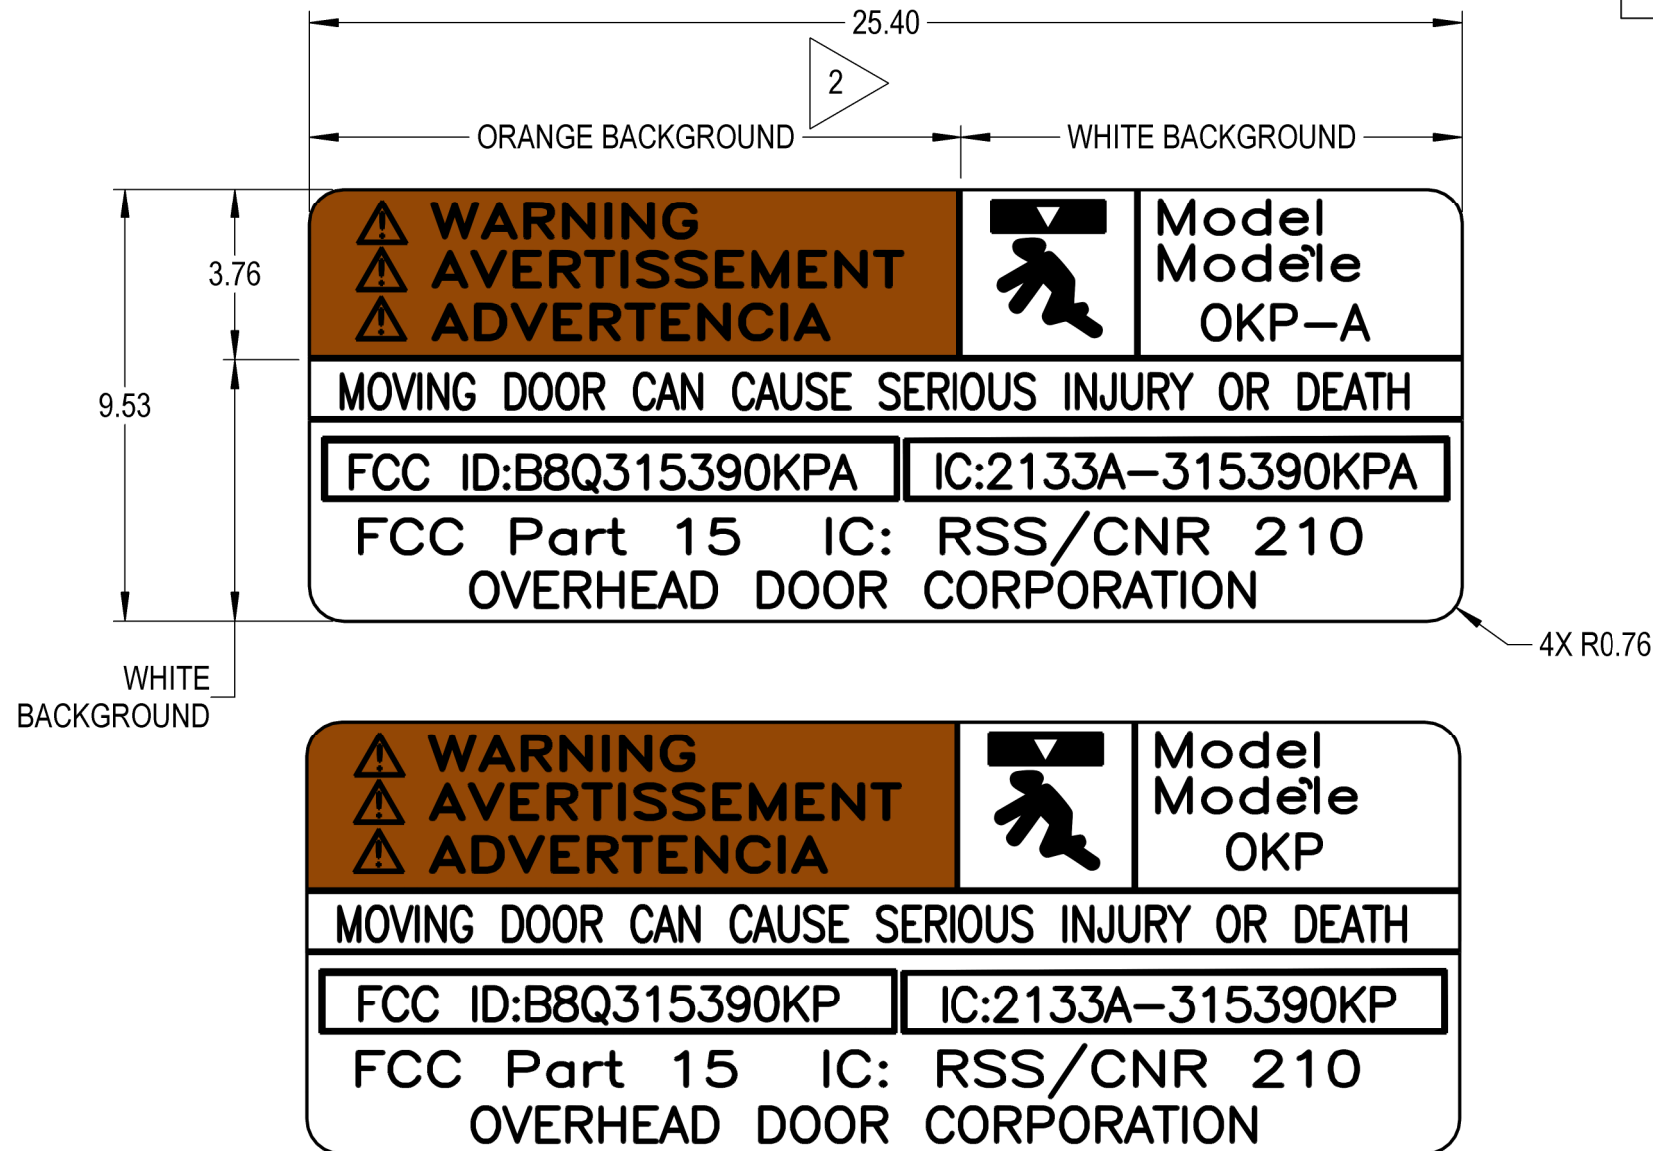


REVISIONS				
ER/GCO	REV	DESCRIPTION	DATE	APPROVAL
501532	-	ORIGINAL ISSUE		
501864	A	1.00 [25.40] WAS 1.26 [32.00], .15 [3.90] WAS .18 [4.52], .37 [9.40] WAS .43 [11.00]	11/12/12	J.W.

PRELIMINARY 01_B
 CONVERTED TO SOLIDWORK DRAWING FORMAT
 BASED ON 41214 DRAWING
 ADDED P/N 38182B
 05/05/2022 - EJR

P/N 38182B

P/N 38182A

PLOTTED: 05/05/22

THE DRAWINGS AND ALL OTHER INFORMATION CONTAINED HEREIN ARE THE CONFIDENTIAL PROPRIETARY PROPERTY OF OVERHEAD DOOR CORPORATION, INCLUDING ITS AFFILIATED SUBSIDIARIES AND AFFILIATES. THIS DRAWING INFORMATION, IN WHOLE OR IN PART, MAY NOT BE COPIED IN ANY MANNER OR DISCLOSED TO ANYONE WITHOUT PRIOR WRITTEN CONSENT OF OVERHEAD DOOR CORPORATION. DISCLOSURE OF ANY DRAWING OR INFORMATION IS INTENDED NOT TO AND SHALL NOT OPERATE AS A LICENSE OR AUTHORIZATION TO USE IT FOR ANY PURPOSE WITHOUT SPECIFIC WRITTEN CONSENT OF OVERHEAD DOOR CORPORATION.	UNLESS OTHERWISE SPECIFIED		APPROVALS	DATE	 A SUBSIDIARY OF OVERHEAD DOOR CORPORATION MT. HOPE, OHIO	
	INTERPRET DIMS & TOLS PER ASME Y14.5M	TOLERANCES:	DRAWN	EJR		05/05/22
	ALL DIMS ARE IN MM	X = ±.1 .XX = ±.01 .XXX = ±.005 ANGULAR = ±1°	CHECKED			
	DO NOT SCALE	HOLES: < Ø.251 = ±.003 Ø.251-Ø.500 = ±.003 > Ø.500 = ±.003	APPROVED			
DIMS AND SPECIFICATIONS CIRCLED WITH SYMBOL 'C' ARE CRITICAL TO QUALITY DESIGN FEATURES & MUST MEET APPLICABLE IN-PROCESS INSPECTION STANDARDS.	ALL GEOMETRY GOVERNED BY 3D CAD DATABASE: 38182-NEW		MATERIAL	SEE NOTES	DESCRIPTION	
			FINISH	CLEAN	LABEL, FCC/IC, WIRELESS KEYPAD, OHD	
					SIZE DWG NO.	
					B 38182	
					SCALE 8:1 SHEET 1 OF 1	

