


**NOTES: (UNLESS OTHERWISE SPECIFIED)**

1. BLACK GRAPHICS AND TYPE ON 2 MIL MYLAR WITH PRESSURE SENSITIVE PERMANENT ADHESIVE FOR USE ON ABS PLASTIC, 1 MIL CLEAR MYLAR OVERLAY.

2. COLOR PER ANSI Z535.1.

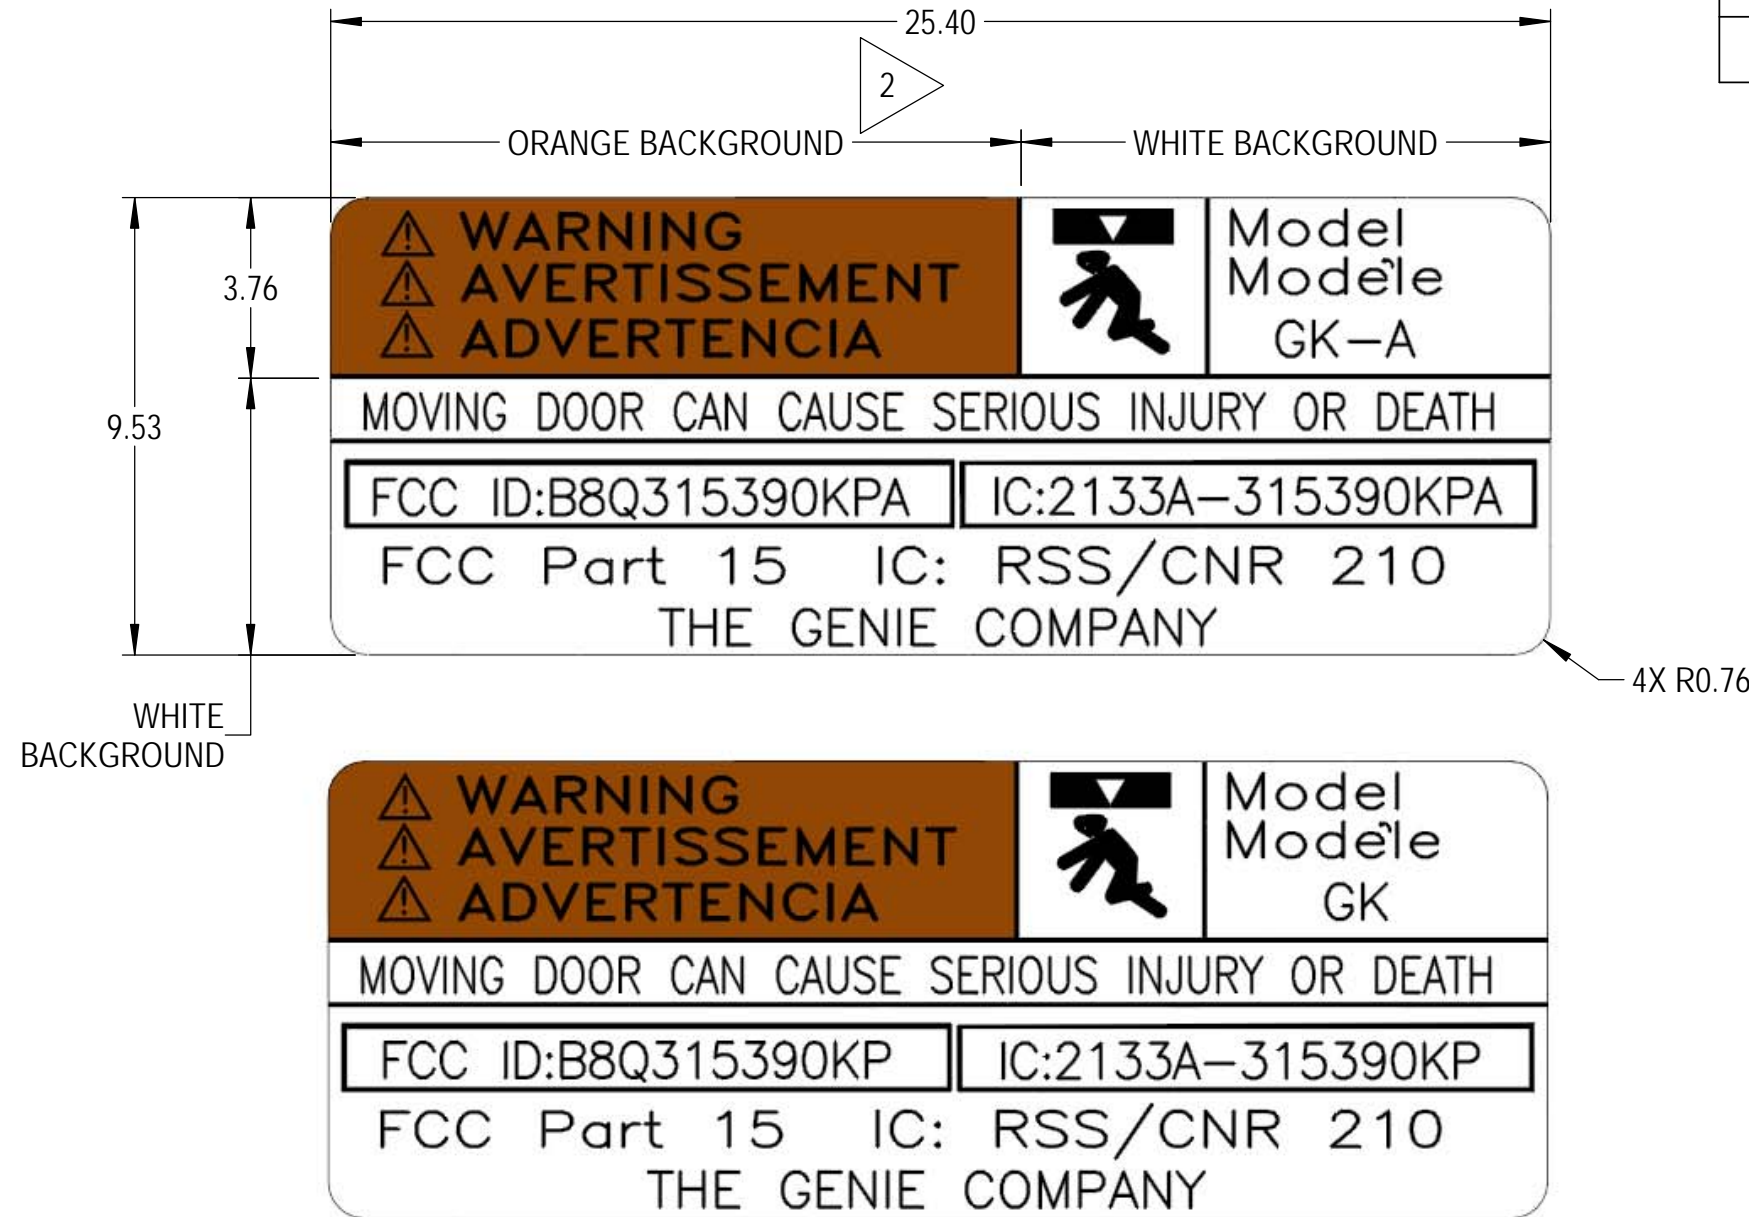


**P/N 38181B**

**P/N 38181A**

REVISIONS				
ER/GCO	REV	DESCRIPTION	DATE	APPROVAL
501532	-	ORIGINAL ISSUE		
501864	A	1.00 [25.40] WAS 1.26 [32.00], .15 [3.90] WAS .18 [4.52], .37 [9.40] WAS .43 [11.00]	11/12/12	J.W.
01364	B	ADDED 38181B, REDRAWN IN SOLIDWORKS	11/28/22	EROSE

PLOTTED: 11/17/22

<p>THE DRAWINGS AND ALL OTHER INFORMATION CONTAINED HEREIN ARE THE CONFIDENTIAL PROPRIETARY PROPERTY OF OVERHEAD DOOR CORPORATION, INCLUDING ITS AFFILIATED SUBSIDIARIES AND AFFILIATES. THIS DRAWING INFORMATION, IN WHOLE OR IN PART, MAY NOT BE COPIED IN ANY MANNER OR DISCLOSED TO ANYONE WITHOUT PRIOR WRITTEN CONSENT OF OVERHEAD DOOR CORPORATION. DISCLOSURE OF ANY DRAWING OR INFORMATION IS INTENDED NOT TO AND SHALL NOT OPERATE AS A LICENSE OR AUTHORIZATION TO USE IT FOR ANY PURPOSE WITHOUT SPECIFIC WRITTEN CONSENT OF OVERHEAD DOOR CORPORATION.</p>	<p>UNLESS OTHERWISE SPECIFIED</p> <p>INTERPRET DIMS &amp; TOLS PER ASME Y14.5M</p> <p><b>ALL DIMS ARE IN MM</b></p> <p>DO NOT SCALE</p> <p>DIMS AND SPECIFICATIONS CIRCLED WITH SYMBOL 'C' ARE CRITICAL TO QUALITY DESIGN FEATURES &amp; MUST MEET APPLICABLE IN-PROCESS INSPECTION STANDARDS.</p>		<p><b>TOLERANCES:</b></p> <p>.X = ±.1 .XX = ±.01 .XXX = ±.005 ANGULAR = ±1°</p> <p><b>HOLES:</b></p> <p>&lt; Ø.251 = ±.003 Ø.251-Ø.500 = ±.003 &gt; Ø.500 = ±.003</p> <p>ALL GEOMETRY GOVERNED BY 3D CAD DATABASE: 38181</p>	<p>APPROVALS DATE</p> <p>DRAWN EJR 05/05/22</p> <p>CHECKED DRU 11/17/22</p> <p>APPROVED EJR 11/28/22</p> <p>MATERIAL SEE NOTES</p> <p>FINISH CLEAN</p>	<p> A SUBSIDIARY OF OVERHEAD DOOR CORPORATION MT. HOPE, OHIO</p>
	<p>DESCRIPTION</p> <p><b>LABEL, FCC/IC, WIRELESS KEYPAD, GENIE</b></p>				
	<p>SIZE <b>B</b></p>	<p>DWG NO. <b>38181</b></p>			
	<p>NTS</p>	<p>SHEET 1 OF 1</p>			

