


NOTES: (UNLESS OTHERWISE SPECIFIED)

1. BLACK GRAPHICS AND TYPE ON 2 MIL MYLAR WITH PRESSURE SENSITIVE PERMANENT ADHESIVE FOR USE ON ABS PLASTIC, 1 MIL CLEAR MYLAR OVERLAY.
2. COLOR PER ANSI Z535.1.

REVISIONS				
ER	REV	DESCRIPTION	DATE	APPROVAL
XXXXX	01	RELEASED FOR QUOTE	10/22/18	

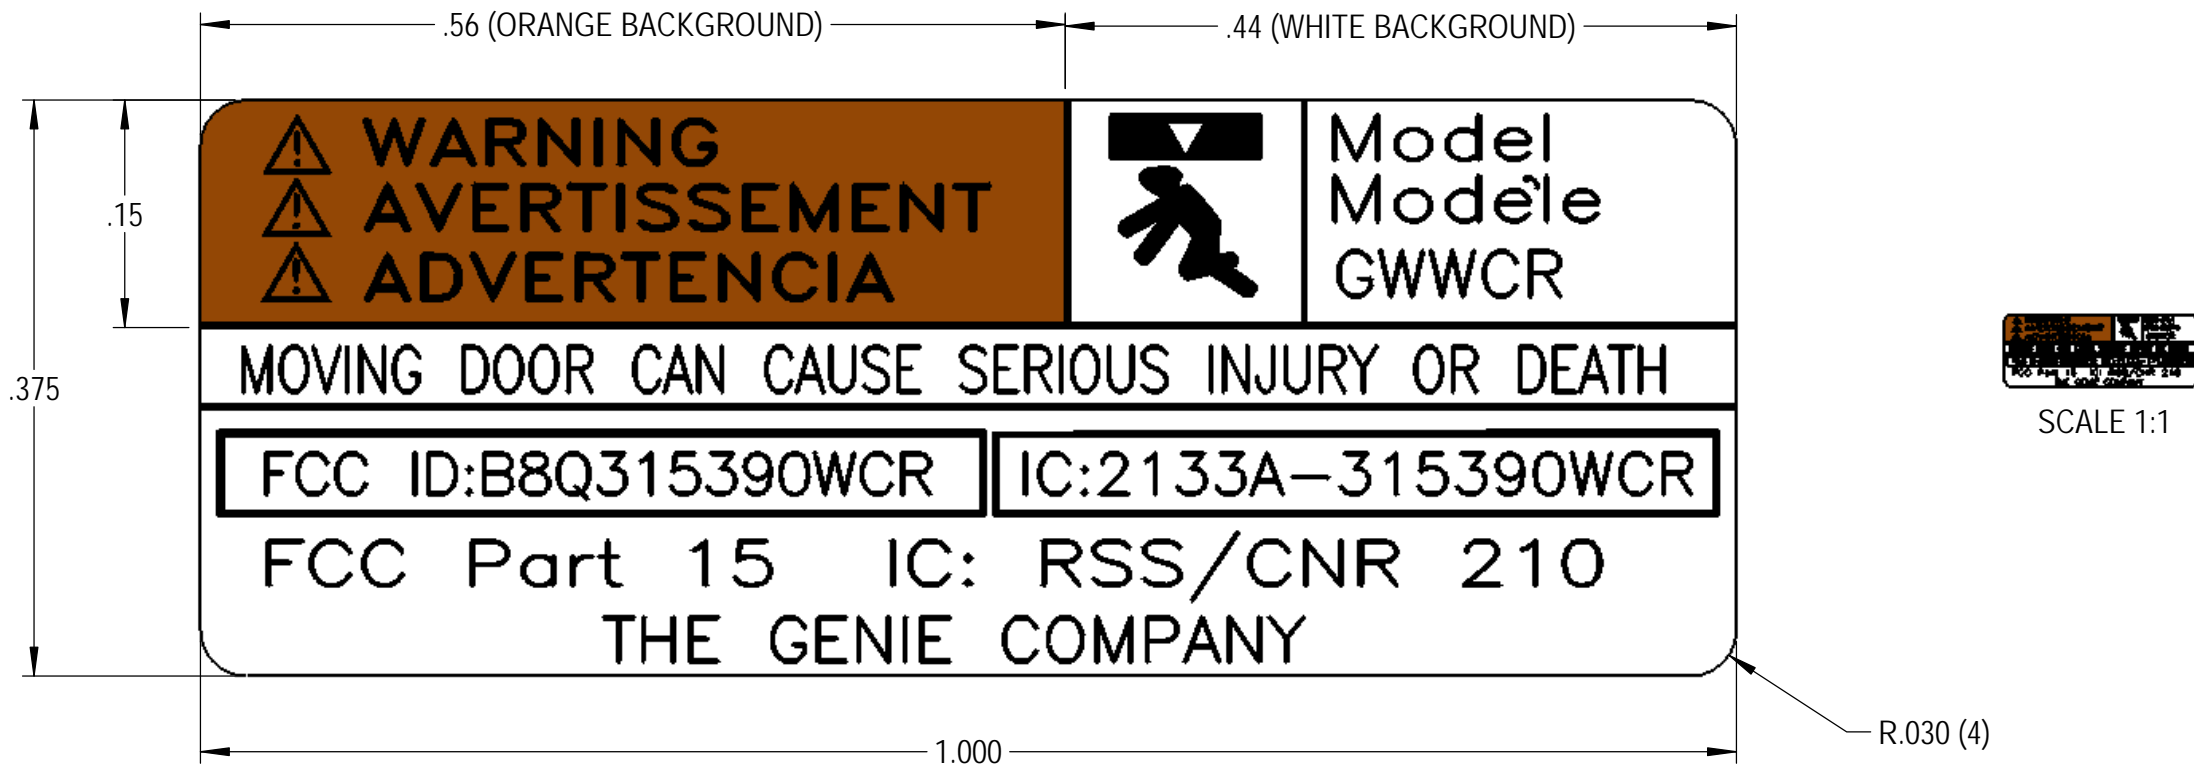

P/N 40725-A

PLOTTED: -

<p>THE DRAWINGS AND ALL OTHER INFORMATION CONTAINED HEREIN ARE THE CONFIDENTIAL PROPRIETARY PROPERTY OF OVERHEAD DOOR CORPORATION, INCLUDING ITS AFFILIATED SUBSIDIARIES AND AFFILIATES. THIS DRAWING INFORMATION, IN WHOLE OR IN PART, MAY NOT BE COPIED IN ANY MANNER OR DISCLOSED TO ANYONE WITHOUT PRIOR WRITTEN CONSENT OF OVERHEAD DOOR CORPORATION. DISCLOSURE OF ANY DRAWING OR INFORMATION IS INTENDED NOT TO AND SHALL NOT OPERATE AS A LICENSE OR AUTHORIZATION TO USE IT FOR ANY PURPOSE WITHOUT SPECIFIC WRITTEN CONSENT OF OVERHEAD DOOR CORPORATION.</p>	<p>UNLESS OTHERWISE SPECIFIED</p>		<p>APPROVALS DATE</p>	<p>GENIE A SUBSIDIARY OF OVERHEAD DOOR CORPORATION MT. HOPE, OHIO</p>	
	<p>INTERPRET DIMS & TOLS PER ASME Y14.5M</p>	<p>TOLERANCES:</p> <p>.X = ±.1 .XX = ±.01 .XXX = ±.005 ANGULAR = ±1°</p>	<p>DRAWN DANP 10/22/2018</p>		<p>DESCRIPTION</p> <p>LABEL, FCC, WWC RETAIL</p>
	<p>ALL DIMS ARE IN INCHES</p> <p>DO NOT SCALE</p>	<p>HOLES:</p> <p>< Ø.251 = ±.003 Ø.251-Ø.500 = ±.003 > Ø.500 = ±.003</p>	<p>CHECKED</p> <p>APPROVED</p> <p>MATERIAL</p>		<p>SIZE DWG NO.</p> <p>B 40725</p>
	<p>DIMS AND SPECIFICATIONS CIRCLED WITH SYMBOL 'C' ARE CRITICAL TO QUALITY DESIGN FEATURES & MUST MEET APPLICABLE IN-PROCESS INSPECTION STANDARDS.</p>	<p>ALL GEOMETRY GOVERNED BY 3D CAD DATABASE: 40725</p>	<p>FINISH</p>		<p>SCALE 8:1</p> <p>SHEET 1 OF 1</p>

