

Page: 1 of 124

SAR TEST REPORT





The following samples were submitted and identified on behalf of the client as:

Product Name Notebook PC

Brand Name HP

Model No. TPN-Q227
Prepared for HP Inc.

3390 East Harmony Road, Fort Collins Colorado, USA

80528

Standards IEEE/ANSI C95.1-1992, IEEE 1528-2013,

KDB248227D01v02r02,KDB865664D01v01r04,

KDB865664D02v01r02,KDB447498D01v06,

KDB616217D04v01r02,

FCC ID B94-9560NGWC

Date of Receipt Jun. 18, 2019

Date of Test(s) Jul. 04, 2019 ~ Jul. 08, 2019

Date of Issue Jul. 12, 2019

In the configuration tested, the EUT complied with the standards specified above.

Remarks:

This report details the results of the testing carried out on one sample, the results contained in this test report do not relate to other samples of the same product. The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report.

This report may only be reproduced and distributed in full. If the product in this report is used in any configuration other than that detailed in the report, the manufacturer must ensure the new system complies with all relevant standards. Any mention of SGS Taiwan Electronic & Communication Laboratory or testing done by SGS Taiwan Electronic & Communication Laboratory in connection with distribution or use of the product described in this report must be approved by SGS Taiwan Electronic & Communication Laboratory in writing.

Signed on behalf of SGS

Clerk / Elle Chang	Engineer / Bond Tsai	Asst. Manager / John Yeh		
Elle Chang	BondIsai	John Teh		

Date: Jul. 12, 2019

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非早有說明,併報生结果僅對測試之樣具負責,同時什樣具僅保留的子。太報生去經太公司惠面許可,不可部份複劃。

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

f (886-2) 2298-0488

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司



Page: 2 of 124

Revision History

Report Number	Revision	Description	Issue Date
EN/2019/60017	Rev.00	Initial creation of document	Jul. 12, 2019

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

f (886-2) 2298-0488

SGS Taiwan Ltd.



Page: 3 of 124

Contents

1. General Information	4
1.1 Testing Laboratory	4
1.2 Details of Applicant	
1.3 Description of EUT	5
1.4 Test Environment	59
1.5 Operation Description	59
1.6 Operating modes validation by power measurement	61
1.7 The SAR Measurement System	66
1.8 System Components	
1.9 SAR System Verification	
1.10 Tissue Simulant Fluid for the Frequency Band	
1.11 Evaluation Procedures	74
1.12 Probe Calibration Procedures	75
1.13 Test Standards and Limits	78
2. Summary of Results	80
2.1 Decision rules	
2.2 Summary of Results	
2.3 Reporting statements of conformity	83
3. Simultaneous Transmission Analysis	84
3.1 Estimated SAR calculation	
3.2 SPLSR evaluation and analysis	85
4. Instruments List	91
5. Measurements	92
6. SAR System Performance Verification	
7. Uncertainty Budget	
Appendixes	
EN201960017 SAR Appendix A Photographs	
EN201960017 SAR Appendix B DAE & Probe Cal. Certificate	
EN201960017 SAR_Appendix C Phantom Description & Dipole Cal. Certificate	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be presectived to the fullers extent of the leave. prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司



Page: 4 of 124

1. General Information

1.1 Testing Laboratory

SGS Taiwan Ltd. Electronics & Communication Laboratory						
1F, No. 8, Alley	15, Lane 120, Sec. 1, NeiHu Rd., NeiHu Dist., Taipei City, Taiwan,					
11493.						
Tel	+886-2-2299-3279					
Fax	+886-2-2298-0488					
Internet	http://www.tw.sgs.com/					

1.2 Details of Applicant

Company Name	HP Inc.
Company Address	3390 East Harmony Road, Fort Collins Colorado , USA 80528

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 5 of 124

1.3 Description of EUT

General Information of Host

General Information of Host:								
Equipment Under Test	Notebook Computer							
Brand Name	HP							
Model No.	TPN-Q227							
Integrated Module	Brand Name : Intel							
9	Model Name : 9560NGW							
FCC ID	B94-9560NGWC							
Mode of Operation	⊠WLAN802.11 a/b/g/n(20M/40M)/ac(⊠Bluetooth	20M/40)M/80	/160M)				
Duty Cycle	WLAN802.11 a/b/g/n(20M/40M)/ ac(20M/40M/80/160M)		1					
Duty Gyold	Bluetooth		1					
	WLAN802.11 b/g/n(20M)	2412	_	2472				
	WLAN802.11 n(40M)	2422	_	2462				
	WLAN802.11 a/n(20M)/ac(20M) 5.2G	5180	_	5240				
	WLAN802.11 n(40M)/ac(40M) 5.2G	5190	_	5230				
	WLAN802.11 ac(80M) 5.2G	5210	5210					
	WLAN802.11 ac(160M) 5.2G	5250						
	WLAN802.11 a/n(20M)/ac(20M) 5.3G	5260	_	5320				
TX Frequency Range	WLAN802.11 n(40M)/ac(40M) 5.3G	5270	_	5310				
(MHz)	WLAN802.11 ac(80M) 5.3G	5290						
	WLAN802.11 a/n/ac(20M) 5.6G	5500	_	5720				
	WLAN802.11 n/ac(40M) 5.6G	5510	_	5710				
	WLAN802.11 ac(80M) 5.6G	5530	_	5690				
	WLAN802.11 ac(160M) 5.6G	5570						
	WLAN802.11 a/n(20M)/ac(20M) 5.8G	5745		5825				
	WLAN802.11 n(40M)/ac(40M) 5.8G	5710	_	5795				
	WLAN802.11 ac(80M) 5.8G		5775					

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be presectived to the fullers extent of the leave. prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號 t (886-2) 2299-3279 f (886-2) 2298-0488 www.tw.sgs.com



Page: 6 of 124

TX Frequency Range (MHz)	Bluetooth	2402	_	2480
	WLAN802.11 b/g/n(20M)	1	_	13
	WLAN802.11 n(40M)	3	_	11
	WLAN802.11 a/n(20M)/ac(20M) 5.2G	36	_	48
	WLAN802.11 n(40M)/ac(40M) 5.2G	38	_	46
	WLAN802.11 ac(80M) 5.2G		42	
	WLAN802.11 ac(160M) 5.2G		50	
	WLAN802.11 a/n(20M)/ac(20M) 5.3G	52	_	64
	WLAN802.11 n(40M)/ac(40M) 5.3G	54	_	62
Channel Number (ARFCN)	WLAN802.11 ac(80M) 5.3G		58	
(7 11 11 51 1)	WLAN802.11 a/n/ac(20M) 5.6G	100	_	144
	WLAN802.11 n/ac(40M) 5.6G	102	_	142
	WLAN802.11 ac(80M) 5.6G	106	_	138
	WLAN802.11 ac(160M) 5.6G		114	
	WLAN802.11 a/n(20M)/ac(20M) 5.8G	149	_	165
	WLAN802.11 n(40M)/ac(40M) 5.8G	151	_	159
	WLAN802.11 ac(80M) 5.8G		155	
	Bluetooth	0	_	78

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Page: 7 of 124

HTK

Max. SAR (1g) (Unit: W/Kg)									
Antenna	Band	Measured	Reported	Channel	Position				
	WLAN 802.11b	0.56	0.56	1	Top side				
	WLAN 802.11ac(80M) 5.2G	1.13	1.13	42	Top side				
TV2	WLAN 802.11a 5.3G	1.15	1.15	60	Top side				
TX2	WLAN 802.11n(40M) 5.3G	1.13	1.14	54	Top side				
	WLAN 802.11ac(80M) 5.6G	1.18	1.19	138	Top side				
	WLAN 802.11ac(80M) 5.8G	0.89	0.89	155	Top side				
	WLAN 802.11b	0.67	0.67	1	Top side				
	Bluetooth(GFSK)	0.06	0.06	0	Top side				
	WLAN 802.11ac(80M) 5.2G	1.13	1.14	42	Top side				
TX1	WLAN 802.11a 5.3G	0.87	0.87	60	Top side				
	WLAN 802.11n(40M) 5.3G	0.96	0.96	54	Top side				
	WLAN 802.11ac(80M) 5.6G	0.92	0.92	138	Top side				
	WLAN 802.11ac(80M) 5.8G	0.76	0.76	155	Top side				

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and for electronic format documents is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_and_conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_and_conditions.htm and for electronic format documents is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be respectively to the full-like extent of the law. prosecuted to the fullest extent of the law.



Page: 8 of 124

INPAQ

Max. SAR (1g) (Unit: W/Kg)										
Antenna	Band	Measured	Reported	Channel	Position					
	WLAN 802.11b	0.27	0.27	6	Top side					
	WLAN 802.11ac(80M) 5.2G	0.32	0.32	42	Top side					
TX2	WLAN 802.11n(40M) 5.3G	0.43	0.43	54	Top side					
	WLAN 802.11ac(80M) 5.6G	0.40	0.40	138	Top side					
	WLAN 802.11ac(80M) 5.8G	0.32	0.33	155	Top side					
	WLAN 802.11b	0.44	0.44	6	Top side					
	Bluetooth(GFSK)	0.05	0.05	78	Top side					
	WLAN 802.11n(40M) 5.2G	0.79	0.80	38	Top side					
TX1	WLAN 802.11ac(80M) 5.2G	0.82	0.83	42	Top side					
-	WLAN 802.11n(40M) 5.3G	0.70	0.70	54	Top side					
	WLAN 802.11ac(80M) 5.6G	0.72	0.72	138	Top side					
	WLAN 802.11ac(80M) 5.8G	0.67	0.68	155	Top side					

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and for electronic format documents is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_and_conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_and_conditions.htm and for electronic format documents is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be respectively to the full-like extent of the law. prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司



Page: 9 of 124

Antenna Information

Tablet mode										
Vendor		нтк								
Antenna			TX1					TX2		
Part Number		DQ60ACC	D032(0ACQE	0019006N)			DQ60ACC	D032(0ACQE	0019006N)	
Frequency	2402-2480	5150-5250	5250-5350	5470-5725	5725-5850	2402-2480	5150-5250	5250-5350	5470-5725	5725-5850
Gain (dBi)	-1.06	-2.32	-2.32	-2.29	-2.29	-0.37	-1.61	-1.61	-0.51	-0.24
					Laptop mode					
Vendor					H1	ГК				
Antenna	TX1							TX2		
Part Number	DQ60ACQD032(0ACQD019006N)				DQ60ACQD032(0ACQD019006N)					
Frequency	2402-2480	5150-5250	5250-5350	5470-5725	5725-5850	2402-2480	5150-5250	5250-5350	5470-5725	5725-5850
Gain (dBi)	0.26	-1.82	-0.73	-0.03	-1.03	0.69	-1.21	0.20	0.19	0.11

Tablet mode										
Vendor		INPAQ Corporation								
Antenna			TX1					TX2		
Part Number		DQ60PLBL	B19(WA-P-LE	3LB-02-087)			DQ60PLBL	B19(WA-P-LE	3LB-02-087)	
Frequency	2402-2480	5150-5250	5250-5350	5470-5725	5725-5850	2402-2480	5150-5250	5250-5350	5470-5725	5725-5850
Gain (dBi)	-2.02	-3.05	-2.38	-0.93	-2.32	-2.52	-2.60	-1.40	0.05	-0.65
					Laptop mode	1				
Vendor					INPAQ Co	rporation				
Antenna			TX1					TX2		
Part Number	DQ60PLBLB19(WA-P-LBLB-02-087)			DQ60PLBLB19(WA-P-LBLB-02-087)						
Frequency	2402-2480	5150-5250	5250-5350	5470-5725	5725-5850	2402-2480	5150-5250	5250-5350	5470-5725	5725-5850
Gain (dBi)	1.33	-3.23	-3.31	-1.54	-0.36	-1.35	-1.89	-1.36	-1.21	-1.08

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 10 of 124

WLAN802.11 a/b/g/n(20M/40M)/ac(20M/40M/80M/160M) conducted power table:

Antenna	SI	SO	MIMO
Band	Chain A	Chain B	ChainA+B
WLAN802.11b	V	V	-
WLAN802.11g	V	V	-
WLAN802.11n(20M)	V	V	V
WLAN802.11n(40M)	V	V	V
WLAN802.11a	V	V	-
WLAN802.11n(20M) 5G	V	V	V
WLAN802.11n(40M) 5G	V	V	V
WLAN802.11ac(20M) 5G	V	V	V
WLAN802.11ac(40M) 5G	V	V	V
WLAN802.11ac(80M) 5G	V	V	V
WLAN802.11ac(160M) 5G	V	V	V

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 11 of 124

HTK

Tablet mode (power level 2)

		TX2	2 Antenna			
Band	Mode	Channel	Frequency (MHz)	Data Rate	Max. Rated Avg. Power + Max. Tolerance (dBm)	Average power (dBm)
		1	2412		19.00	18.99
		2	2417		19.00	18.79
		6	2437	1	19.00	18.98
	802.11b	10	2457	1Mbps	19.00	18.85
		11	2462		19.00	18.96
		12	2467]	18.50	18.40
		13	2472		15.00	15.00
		1	2412		16.00	15.76
		2	2417		18.50	18.41
		6	2437		19.00	18.75
	802.11g	10	2457	6Mbps	18.50	18.29
		11	2462	-	16.50	16.39
		12	2467		13.00	12.85
2450 MHz		13	2472		-6.50	-6.64
2430 IVITZ		1	2412		16.00	15.94
		2	2417		18.50	18.37
		6	2437		19.00	18.87
	802.11n20-HT0	10	2457	MCS0	18.50	18.49
		11	2462		16.50	16.29
		12	2467		13.00	12.82
		13	2472		-6.50	-6.71
		3	2422		14.50	14.27
		4	2427		16.00	15.74
		6	2437		16.00	15.85
	802.11n40-HT0	8	2447	MCS0	16.00	15.85
		9	2452		14.00	13.72
		10	2457		10.50	10.43
		11	2462		3.50	3.41

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司



Page: 12 of 124

		TX2 A	Antenna			
Band	Mode	Channel	Frequency (MHz)	Data Rate	Max. Rated Avg. Power + Max. Tolerance (dBm)	Average power (dBm)
		36	5180		16.00	15.89
	000 11-	40	5200	CMbpa	16.00	15.88
	802.11a	44	5220	6Mbps	16.00	15.75
		48	5240		16.00	15.80
	802.11n20-HT0	36	5180		16.00	15.94
		40	5200	MCS0	16.00	15.76
		44	5220	IVICSO	16.00	15.77
		48	5240		16.00	15.74
5.15-5.25 GHz		36	5180		16.00	15.75
0.10-0.20 0112	802.11ac20-VHT0	40	5200	MCS0	16.00	15.77
	002.11a020-V1110	44	5220	IVICCO	16.00	15.79
		48	5240		16.00	15.71
	802.11n40-HT0	38	5190	MCS0	16.00	15.96
	002.111140-1110	46	5230	10000	16.00	15.97
	802.11ac40-VHT0	38	5190	MCS0	16.00	15.76
		46	5230	IVICOU	16.00	15.73
	802.11ac80-VHT0	42	5210	MCS0	16.00	15.99
	802.11ac160-VHT0	50	5250	MCS0	13.50	13.22

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司



Page: 13 of 124

		TX2 A	Antenna			
Band	Mode	Channel	Frequency (MHz)	Data Rate	Max. Rated Avg. Power + Max. Tolerance (dBm)	Average power (dBm)
		52	5260		16.00	15.98
	802.11a	56	5280	6Mbps	16.00	15.96
	002.11a	60	5300		16.00	15.99
		64	5320		16.00	15.95
	802.11n20-HT0	52	5260	MCS0	16.00	15.82
		56	5280		16.00	15.96
		60	5300		16.00	15.90
		64	5320		16.00	15.96
5.25-5.35 GHz		52	5260		16.00	15.83
	802.11ac20-VHT0	56	5280	MCS0	16.00	16.00
	002.11ac20-V1110	60	5300	IVICOU	16.00	15.77
		64	5320		16.00	15.77
	802.11n40-HT0	54	5270	MCS0	16.00	15.98
	002.111140-1110	62	5310	IVICOU	14.50	14.22
	802.11ac40-VHT0	54	5270	MCS0	16.00	15.76
	002.11ac40-VH10	62	5310	IVICSU	14.50	14.43
	802.11ac80-VHT0	58	5290	MCS0	15.50	15.35

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Page: 14 of 124

		TX2 A	Antenna			
Band	Mode	Channel	Frequency (MHz)	Data Rate	Max. Rated Avg. Power + Max. Tolerance (dBm)	Average power (dBm)
		100	5500		17.00	16.99
		116	5580		17.00	16.97
		120	5600		17.00	16.89
	802.11a	124	5620	6Mbps	17.00	16.77
		128	5640		17.00	16.81
		140	5700		17.00	16.97
		144	5720		17.00	16.77
		100	5500		17.00	16.82
		116	5580		17.00	16.75
		120	5600		17.00	16.94
5600 MHz	802.11n20-HT0	124	5620	MCS0	17.00	16.79
		128	5640		17.00	16.76
		140	5700		17.00	16.80
		144	5720		17.00	16.91
		100	5500		17.00	16.87
		116	5580		17.00	16.91
		120	5600		17.00	16.74
	802.11ac20-VHT0	124	5620	MCS0	17.00	16.81
		128	5640	<u></u>	17.00	16.78
		140	5700		17.00	16.87
		144	5720		17.00	16.89

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 15 of 124

		TX2 A	Antenna			
Band	Mode	Channel	Frequency (MHz)	Data Rate	Max. Rated Avg. Power + Max. Tolerance (dBm)	Average power (dBm)
		102	5510		16.50	16.30
		110	5550		17.00	16.96
	802.11n40-HT0	118	5590	MCS0	17.00	16.79
		126	5630		17.00	16.99
		134	5670		17.00	16.99
		142	5710		17.00	16.98
		102	5510		16.50	16.35
5600 MHz		110	5550		17.00	16.86
3000 MITZ	802.11ac40-VHT0	118	5590	MCS0	17.00	16.86
	002.11a040-V1110	126	5630	IVICOU	17.00	16.93
		134	5670		17.00	16.93
		142	5710		17.00	16.90
		106	5530	MCS0	17.00	16.97
	802.11ac80-VHT0	122	5610		17.00	16.80
		138	5690		17.00	16.96
	802.11ac160-VHT0	114	5570	MCS0	15.00	14.91

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and for electronic format documents is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_and_conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_and_conditions.htm and for electronic format documents is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be respectively to the full-like extent of the law. prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 16 of 124

		TX2 A	ntenna			
Mode	Mode	Channel	Frequency (MHz)	Data Rate	Max. Rated Avg. Power + Max. Tolerance (dBm)	Average power (dBm)
		149	5745		16.50	16.28
	802.11a	157	5785	6Mbps	16.50	16.24
		165	5825		16.50	16.33
	802.11n20-HT0	149	5745	MCS0	16.50	16.49
		157	5785		16.50	16.43
		165	5825		16.50	16.45
5800 MHz		149	5745		16.50	16.48
3000 1011 12	802.11ac20-VHT0	157	5785	MCS0	16.50	16.27
		165	5825		16.50	16.23
	802.11n40-HT0	151	5755	MCS0	16.50	16.43
	002.111140-1110	159	5795	IVICOU	16.50	16.46
	802.11ac40-VHT0	151	5755	MCS0	16.50	16.31
	002.11a040-VH10	159	5795		16.50	16.31
	802.11ac80-VHT0	155	5775	MCS0	16.50	16.49

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 17 of 124

		TX1	Antenna			
Band	Mode	Channel	Frequency (MHz)	Data Rate	Max. Rated Avg. Power + Max. Tolerance (dBm)	Average power (dBm)
		1	2412		19.00	18.99
		2	2417		19.00	18.84
		6	2437		19.00	18.96
	802.11b	10	2457	1Mbps	19.00	18.72
		11	2462		19.00	18.98
		12	2467		18.50	18.48
		13	2472		15.00	14.80
		1	2412		16.00	15.86
		2	2417		17.50	17.27
		6	2437		19.00	18.90
	802.11g	10	2457	6Mbps	18.50	18.23
		11	2462		16.00	15.80
		12	2467		13.50	13.24
2450 MHz		13	2472		-6.00	-6.15
2430 WII 12		1	2412		16.00	15.83
		2	2417		17.50	17.35
		6	2437		19.00	18.94
	802.11n20-HT0	10	2457	MCS0	18.50	18.37
		11	2462		16.00	15.79
		12	2467		13.50	13.45
		13	2472		-6.00	-6.22
		3	2422		15.00	14.83
		4	2427		16.00	15.81
		6	2437		16.00	15.71
	802.11n40-HT0	8	2447	MCS0	16.00	15.98
		9	2452		14.50	14.34
		10	2457		11.00	10.70
		11	2462		3.00	2.89

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Page: 18 of 124

		TX1 A	ntenna			
Band	Mode	Channel	Frequency (MHz)	Data Rate	Max. Rated Avg. Power + Max. Tolerance (dBm)	Average power (dBm)
		36	5180	6Mbps	16.00	15.87
	802.11a	40	5200		16.00	15.93
	002.11a	44	5220	6Mbps	16.00	16.00
		48	5240		16.00	15.82
	802.11n20-HT0	36	5180		16.00	15.73
		40	5200	MCS0	16.00	15.98
		44	5220	IVICOU	16.00	15.88
		48	5240		16.00	15.85
5.15-5.25 GHz		36	5180		16.00	15.78
0.13-3.23 GHZ	802.11ac20-VHT0	40	5200	MCS0	16.00	15.98
	002.11ac20-V1110	44	5220	IVICOU	16.00	16.00
		48	5240		16.00	15.98
	802.11n40-HT0	38	5190	MCS0	16.00	15.98
	002.111140-Π10	46	5230	IVICOU	16.00	15.96
	802.11ac40-VHT0	38	5190	MCS0	16.00	15.99
	002.11a040-VIII0	46	5230	INICOU	16.00	15.81
	802.11ac80-VHT0	42	5210	MCS0	16.00	15.97
	802.11ac160-VHT0	50	5250	MCS0	13.50	13.26

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Page: 19 of 124

		TY1 A	ıntenna			
		IXIF	Milemia			
Band	Mode	Channel	Frequency (MHz)	Data Rate	Max. Rated Avg. Power + Max. Tolerance (dBm)	Average power (dBm)
		52	5260		16.00	15.97
	802.11a	56	5280	6Mbps	16.00	15.98
	002.11d	60	5300	Olvibps	16.00	15.99
		64	5320		16.00	15.98
	802.11n20-HT0	52	5260	MCS0	16.00	15.99
		56	5280		16.00	15.80
		60	5300		16.00	15.77
		64	5320		16.00	15.94
5.25-5.35 GHz		52	5260		16.00	15.79
	802.11ac20-VHT0	56	5280	MCS0	16.00	15.75
	002.11ac20-VH10	60	5300	IVICSU	16.00	15.92
		64	5320		16.00	15.84
	802.11n40-HT0	54	5270	MCS0	16.00	15.99
	002.111140-1110	62	5310	IVICOU	14.50	14.36
	802.11ac40-VHT0	54	5270	MCS0	16.00	15.91
	002.11a040-VH10	62	5310	IVICOU	14.50	14.28
	802.11ac80-VHT0	58	5290	MCS0	15.50	15.37

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Page: 20 of 124

TX1 Antenna									
Band	Mode	Channel	Frequency (MHz)	Data Rate	Max. Rated Avg. Power + Max. Tolerance (dBm)	Average power (dBm)			
		100	5500		16.00	15.96			
		116	5580		16.00	15.98			
		120	5600		16.00	15.91			
	802.11a	124	5620	6Mbps	16.00	15.78			
		128	5640		16.00	15.75			
		140	5700		16.00	15.75			
		144	5720		16.00	15.89			
		100	5500		16.00	15.89			
		116	5580		16.00	15.82			
		120	5600		16.00	15.95			
5600 MHz	802.11n20-HT0	124	5620	MCS0	16.00	15.91			
		128	5640		16.00	15.76			
		140	5700		16.00	15.97			
		144	5720		16.00	15.75			
		100	5500		16.00	15.92			
		116	5580		16.00	15.83			
		120	5600		16.00	15.71			
	802.11ac20-VHT0	124	5620	MCS0	16.00	15.82			
		128	5640		16.00	15.78			
		140	5700		16.00	15.80			
		144	5720		16.00	15.79			

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Page: 21 of 124

		TX1 A	Antenna			
Band	Mode	Channel	Frequency (MHz)	Data Rate	Max. Rated Avg. Power + Max. Tolerance (dBm)	Average power (dBm)
		102	5510		16.00	15.96
		110	5550		16.00	15.98
	802.11n40-HT0	118	5590	MCS0	16.00	15.95
		126	5630	MCSU	16.00	15.79
		134	5670		16.00	15.95
		142	5710		16.00	15.97
		102	5510		16.00	15.87
5600 MHz		110	5550		16.00	15.97
3000 MHZ	802.11ac40-VHT0	118	5590	MCS0	16.00	15.98
	002.118040-7110	126	5630	IVICSU	16.00	15.78
		134	5670		16.00	15.87
		142	5710		16.00	15.84
		106	5530		16.00	15.98
	802.11ac80-VHT0	122	5610	MCS0	16.00	15.84
		138	5690		16.00	15.99
	802.11ac160-VHT0	114	5570	MCS0	15.00	14.80

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 22 of 124

		TX1 A	ntenna			
Mode	Mode	Channel	Frequency (MHz)	Data Rate	Max. Rated Avg. Power + Max. Tolerance (dBm)	Average power (dBm)
		149	5745		16.00	15.85
	802.11a	157	5785	6Mbps	16.00	15.74
		165	5825		16.00	15.96
	802.11n20-HT0	149	5745	MCS0	16.00	15.89
		157	5785		16.00	15.74
		165	5825		16.00	15.74
5800 MHz		149	5745		16.00	15.92
3000 1011 12	802.11n40-VHT0	157	5785	MCS0	16.00	15.76
		165	5825		16.00	15.95
	802.11n40-HT0	151	5755	MCS0	16.00	15.97
	002.111140-1110	159	5795	IVICOU	16.00	15.98
	802.11ac40-VHT0	151	5755	MCS0	16.00	15.96
	002.118C4U-VH1U	159	5795		16.00	15.85
	802.11ac80-VHT0	155	5775	MCS0	16.00	15.99

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Page: 23 of 124

Laptop mode (power level 1)

		TX2	2 Antenna			
Band	Mode	Channel	Frequency (MHz)	Data Rate	Max. Rated Avg. Power + Max. Tolerance (dBm)	Average power (dBm)
		1	2412		19.50	19.32
		2	2417		20.50	20.48
		6	2437	1	20.50	20.49
	802.11b	10	2457	1Mbps	20.50	20.47
		11	2462		19.50	19.28
		12	2467		18.50	18.41
		13	2472		15.00	14.80
		1	2412	6Mbps	16.00	15.72
		2	2417		18.50	18.41
		6	2437		20.50	20.26
	802.11g	10	2457		18.50	18.38
		11	2462		16.50	16.42
		12	2467		13.00	12.86
2450 MHz		13	2472		-6.50	-6.78
2430 WII IZ		1	2412		16.00	15.80
		2	2417		18.50	18.39
		6	2437		20.50	20.26
	802.11n20-HT0	10	2457	MCS0	18.50	18.30
		11	2462		16.50	16.48
		12	2467		13.00	12.79
		13	2472		-6.50	-6.62
		3	2422		14.50	14.24
		4	2427		16.00	15.94
		6	2437		16.00	15.72
	802.11n40-HT0	8	2447	MCS0	16.00	15.85
		9	2452		14.00	13.88
		10	2457		10.50	10.27
		11	2462		3.50	3.37

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 24 of 124

		TX2 A	Antenna			
Band	Mode	Channel	Frequency (MHz)	Data Rate	Tolerance	Average power (dBm)
		36	5180		(dBm) 19.00	18.87
		40	5200		20.50	20.44
	802.11a	44	5220	6Mbps	20.50	20.49
		48	5240		20.50	20.48
		36	5180	MCS0	19.00	18.77
	000 44 00 1170	40	5200		20.50	20.36
	802.11n20-HT0	44	5220		20.50	20.21
		48	5240		20.50	20.29
5.15-5.25 GHz		36	5180		19.00	18.88
D. 13-5.25 GHZ	802.11ac20-VHT0	40	5200	MCS0	20.50	20.24
	002.11ac20-VH10	44	5220	MCSU	20.50	20.33
		48	5240		20.50	20.44
	802.11n40-HT0	38	5190	MCS0	18.00	17.83
	ου2. I III4U-Π I U	46	5230	IVICSU	19.00	18.74
	802.11ac40-VHT0	38	5190	MCS0	18.00	17.82
	002.11a040-VIII0	46	5230		19.00	18.98
	802.11ac80-VHT0	42	5210	MCS0	17.50	17.28
	802.11ac160-VHT0	50	5250	MCS0	13.50	13.26

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 25 of 124

		TX2 A	Antenna			
Band	Mode	Channel	Frequency (MHz)	Data Rate	Max. Rated Avg. Power + Max. Tolerance (dBm)	Average power (dBm)
		52	5260		20.50	20.49
	802.11a	56	5280	6Mbps	20.50	20.47
	002.11a	60	5300		20.50	20.46
		64	5320		16.50	16.20
	802.11n20-HT0	52	5260		20.50	20.47
		56	5280	MCS0	20.50	20.37
		60	5300	IVICOU	20.50	20.44
		64	5320		16.50	16.25
5.25-5.35 GHz		52	5260		20.50	20.36
	802.11ac20-VHT0	56	5280	MCS0	20.50	20.21
	002.11ac20-VI110	60	5300	MCSU	20.50	20.26
		64	5320		16.50	16.25
	802.11n40-HT0	54	5270	MCS0	18.50	18.42
	002.111140-HTU	62	5310	IVICOU	14.50	14.26
	802.11ac40-VHT0	54	5270	MCS0	18.50	18.45
	002.118040-VH10	62	5310	IVICSU	14.50	14.48
	802.11ac80-VHT0	58	5290	MCS0	15.50	15.44

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Page: 26 of 124

		TV2 /	Antenna			
		1 \(\alpha \)	Antenna			
Band	Mode	Channel	Frequency (MHz)	Data Rate	Max. Rated Avg. Power + Max. Tolerance (dBm)	Average power (dBm)
		100	5500		19.00	18.82
		116	5580		20.50	20.23
		120	5600		20.50	20.40
	802.11a	124	5620	6Mbps	20.50	20.36
		128	5640		20.50	20.27
		140	5700		18.50	18.21
		144	5720		19.50	19.28
		100	5500		19.00	18.87
		116	5580		20.50	20.37
		120	5600		20.50	20.23
5600 MHz	802.11n20-HT0	124	5620	MCS0	20.50	20.25
		128	5640		20.50	20.39
		140	5700		18.50	18.29
		144	5720		19.50	19.34
		100	5500		19.00	18.99
		116	5580		20.50	20.26
		120	5600		20.50	20.22
	802.11ac20-VHT0	124	5620	MCS0	20.50	20.46
		128	5640		20.50	20.34
		140	5700		18.50	18.25
		144	5720		19.50	19.36

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Page: 27 of 124

		TX2 A	Antenna			
Band	Mode	Channel	Frequency (MHz)	Data Rate	Max. Rated Avg. Power + Max. Tolerance (dBm)	Average power (dBm)
		102	5510		16.50	16.33
		110	5550		20.50	20.49
	802.11n40-HT0	118	5590	MCS0	20.50	20.26
		126	5630		20.50	20.38
		134	5670		19.50	19.26
		142	5710		19.50	19.43
		102	5510		16.50	16.35
5600 MHz		110	5550		20.50	20.21
3000 MHZ	802.11ac40-VHT0	118	5590	MCS0	20.50	20.40
	002.11a040-VH10	126	5630	IVICSU	20.50	20.41
		134	5670		19.50	19.27
		142	5710		19.50	19.38
		106	5530		17.00	16.95
	802.11ac80-VHT0	122	5610	MCS0	20.50	20.25
		138	5690		20.50	20.44
	802.11ac160-VHT0	114	5570	MCS0	15.00	14.85

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 28 of 124

		TX2 A	ntenna			
Mode	Mode	Channel	Frequency (MHz)	Data Rate	Max. Rated Avg. Power + Max. Tolerance (dBm)	Average power (dBm)
		149	5745		20.50	20.48
	802.11a	157	5785	6Mbps	20.50	20.45
		165	5825		20.50	20.47
	802.11n20-HT0	149	5745	MCS0	20.50	20.32
		157	5785		20.50	20.43
		165	5825		20.50	20.38
5800 MHz		149	5745		20.50	20.43
3000 1011 12	802.11ac20-VHT0	157	5785	MCS0	20.50	20.43
		165	5825		20.50	20.32
	802.11n40-HT0	151	5755	MCS0	18.50	18.20
	002.111140-1110	159	5795	IVICOU	20.00	19.74
	802.11ac40-VHT0	151	5755	MCS0	18.50	18.37
	002.118040-VH10	159	5795		20.00	19.93
	802.11ac80-VHT0	155	5775	MCS0	18.50	18.38

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Page: 29 of 124

		TX1	Antenna			
Band	Mode	Channel	Frequency (MHz)	Data Rate	Max. Rated Avg. Power + Max. Tolerance (dBm)	Average power (dBm)
		1	2412		19.50	19.24
		2	2417		20.50	20.49
		6	2437		20.50	20.46
	802.11b	10	2457	1Mbps	20.50	20.48
		11	2462		19.50	19.49
		12	2467		18.50	18.21
		13	2472		15.00	14.96
		1	2412	6Mbps	16.00	15.95
		2	2417		17.50	17.44
		6	2437		20.50	20.35
	802.11g	10	2457		18.50	18.27
		11	2462		16.00	15.70
		12	2467		13.50	13.22
2450 MHz		13	2472		-6.00	-6.22
2430 1011 12		1	2412		16.00	15.99
		2	2417		17.50	17.46
		6	2437		20.50	20.27
	802.11n20-HT0	10	2457	MCS0	18.50	18.24
		11	2462		16.00	15.87
		12	2467		13.50	13.35
		13	2472		-6.00	-6.07
		3	2422		15.00	14.73
		4	2427		16.00	15.75
		6	2437		16.00	15.90
	802.11n40-HT0	8	2447	MCS0	16.00	15.85
		9	2452		14.50	14.42
		10	2457		11.00	10.97
		11	2462		3.00	2.95

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Page: 30 of 124

		TX1 A	ntenna			
Band	Mode	Channel	Frequency (MHz)	Data Rate	Max. Rated Avg. Power + Max. Tolerance (dBm)	Average power (dBm)
		36	5180	6Mbps	18.50	18.49
	802.11a	40	5200		20.00	19.96
	002.11a	44	5220	6Mbps	20.50	20.45
		48	5240		20.50	20.49
	802.11n20-HT0	36	5180		18.50	18.32
		40	5200	MCS0	20.00	19.76
		44	5220	IVICSO	20.50	20.40
		48	5240		20.50	20.26
5.15-5.25 GHz		36	5180		18.50	18.24
0.10-0.20 GHZ	802.11ac20-VHT0	40	5200	MCS0	20.00	19.93
	002.11ac20-V1110	44	5220	IVICOU	20.50	20.22
		48	5240		20.50	20.27
	802.11n40-HT0	38	5190	MCS0	18.00	17.84
	ου Ζ. Ι ΙΙΙ4υ-Π Ι υ	46	5230	IVICOU	19.50	19.46
	802.11ac40-VHT0	38	5190	MCS0	18.00	18.00
	002.11a040-VH10	46	5230	IVICSU	19.50	19.42
	802.11ac80-VHT0	42	5210	MCS0	18.00	17.77
	802.11ac160-VHT0	50	5250	MCS0	13.50	13.38

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 31 of 124

		TX1 A	ıntenna			
Band	Mode	Channel	Frequency (MHz)	Data Rate	Max. Rated Avg. Power + Max. Tolerance (dBm)	Average power (dBm)
		52	5260		20.50	20.46
	802.11a	56	5280	6Mbps	20.50	20.48
		60	5300	Olvibps	20.50	20.49
		64	5320		16.00	15.81
		52	5260	MCS0	20.50	20.43
	802.11n20-HT0	56	5280		20.50	20.25
	002.111120-1110	60	5300		20.50	20.38
		64	5320		16.00	15.72
5.25-5.35 GHz		52	5260		20.50	20.25
	802.11ac20-VHT0	56	5280	MCS0	20.50	20.30
	002.11ac20-V1110	60	5300	IVICOU	20.50	20.41
		64	5320		16.00	15.88
	802.11n40-HT0	54	5270	MCS0	18.50	18.23
	002.111140-1110	62	5310	IVICOU	14.50	14.34
	802.11ac40-VHT0	54	5270	MCS0	18.50	18.48
	002.11a040-VH10	62	5310	IVICSU	14.50	14.33
	802.11ac80-VHT0	58	5290	MCS0	15.50	15.34

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 32 of 124

		TX1 A	Antenna			
Band	Mode	Channel	Frequency (MHz)	Data Rate	Max. Rated Avg. Power + Max. Tolerance (dBm)	Average power (dBm)
		100	5500		19.00	18.79
		116	5580		20.50	20.49
		120	5600		20.50	20.49
	802.11a	124	5620	6Mbps	20.50	20.38
		128	5640		20.50	20.43
		140	5700		18.50	18.32
		144	5720		20.00	19.86
		100	5500		19.00	18.83
		116	5580		20.50	20.21
		120	5600		20.50	20.26
5600 MHz	802.11n20-HT0	124	5620	MCS0	20.50	20.47
		128	5640		20.50	20.30
		140	5700		18.50	18.36
		144	5720		20.00	19.83
		100	5500		19.00	18.73
		116	5580		20.50	20.24
		120	5600		20.50	20.21
	802.11ac20-VHT0	124	5620	MCS0	20.50	20.42
		128	5640		20.50	20.22
		140	5700		18.50	18.48
		144	5720		20.00	19.84

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 33 of 124

		TX1 A	Antenna			
Band	Mode	Channel	Frequency (MHz)	Data Rate	Max. Rated Avg. Power + Max. Tolerance (dBm)	Average power (dBm)
		102	5510		17.00	16.90
		110	5550		20.50	20.49
	802.11n40-HT0	118	5590	MCS0	20.50	20.38
		126	5630		20.50	20.38
		134	5670		18.50	18.47
		142	5710		19.50	19.50
		102	5510		17.00	16.94
5600 MHz		110	5550		20.50	20.47
3600 MHZ	802.11ac40-VHT0	118	5590	MCS0	20.50	20.38
	002.11a040-VH10	126	5630	IVICSU	20.50	20.23
		134	5670		18.50	18.38
		142	5710		19.50	19.40
		106	5530		17.50	17.27
	802.11ac80-VHT0	122	5610	MCS0	20.50	20.29
		138	5690		20.50	20.45
	802.11ac160-VHT0	114	5570	MCS0	15.00	14.73

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Page: 34 of 124

		TX1 A	ntenna			
Mode	Mode	Channel	Frequency (MHz)	Data Rate	Max. Rated Avg. Power + Max. Tolerance (dBm)	Average power (dBm)
		149	5745		20.50	20.48
	802.11a	157	5785	6Mbps	20.50	20.49
		165	5825		20.50	20.47
	802.11n20-HT0	149	5745	MCS0	20.50	20.30
		157	5785		20.50	20.33
		165	5825		20.50	20.44
5800 MHz		149	5745		20.50	20.20
3600 WII IZ	802.11n40-VHT0	157	5785	MCS0	20.50	20.27
		165	5825		20.50	20.32
	802.11n40-HT0	151	5755	MCS0	19.50	19.34
	002.111140-1110	159	5795	IVICOU	20.00	19.80
	802.11ac40-VHT0	151	5755	MCS0	19.50	19.31
	002.11a040-VH10	159	5795	IVICOU	20.00	19.78
	802.11ac80-VHT0	155	5775	MCS0	19.00	18.74

Bluetooth conducted power table:

Biactooth conducted power table:							
Mode	Channel	Frequency (MHz)	Average	Max. Rated Avg. Power + Max.			
			1Mbps	2Mbps	3Mbps	Tolerance (dBm)	
	CH 00	2402	9.42	8.11	8.12		
BR/EDR	CH 39	2441	9.40	8.37	8.38	9.5	
	CH 78	2480	9.41	8.67	8.68		

Mode	Channel	Frequency (MHz)	Average Output Power (dBm)	Max. Rated Avg. Power + Max.	
			GFSK	Tolerance (dBm)	
	CH 00	2402	5.26		
LE	CH 20	2442	5.12	5.5	
	CH 39	2480	5.32		

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司



Page: 35 of 124

INPAQ

Tablet mode (power level 2)

TX2 Antenna								
Band	Mode	Channel	Frequency (MHz)	Data Rate	Max. Rated Avg. Power + Max. Tolerance (dBm)	Average power (dBm)		
		1	2412	1Mbps	19.00	18.98		
		2	2417		19.00	18.79		
	802.11b	6	2437		19.00	18.99		
		10	2457		19.00	18.85		
		11	2462		19.00	18.96		
		12	2467		18.50	18.40		
		13	2472	<u> </u>	15.00	15.00		
		1	2412		16.00	15.76		
	802.11g	2	2417	6Mbps	18.50	18.41		
		6	2437		19.00	18.75		
		10	2457		18.50	18.29		
		11	2462		16.50	16.39		
		12	2467		13.00	12.85		
2450 MH=		13	2472		-6.50	-6.64		
2450 MHz		1	2412	MCS0	16.00	15.94		
		2	2417		18.50	18.37		
		6	2437		19.00	18.87		
	802.11n20-HT0	10	2457		18.50	18.49		
		11	2462		16.50	16.29		
		12	2467		13.00	12.82		
		13	2472		-6.50	-6.71		
	802.11n40-HT0	3	2422	MCS0	14.50	14.27		
		4	2427		16.00	15.74		
		6	2437		16.00	15.85		
		8	2447		16.00	15.85		
		9	2452		14.00	13.72		
		10	2457		10.50	10.43		
		11	2462		3.50	3.41		

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司



Page: 36 of 124

TX2 Antenna						
Band	Mode	Channel	Frequency (MHz)	Data Rate	Max. Rated Avg. Power + Max. Tolerance (dBm)	Average power (dBm)
	802.11a	36	5180	6Mbps	16.00	15.89
		40	5200		16.00	15.88
		44	5220		16.00	15.75
		48	5240		16.00	15.80
	802.11n20-HT0	36	5180	MCS0	16.00	15.94
		40	5200		16.00	15.76
		44	5220		16.00	15.77
		48	5240		16.00	15.74
5.15-5.25 GHz		36	5180	MCS0	16.00	15.75
0.13-3.23 GHZ	802.11ac20-VHT0	40	5200		16.00	15.77
	002.11ac20-V1110	44	5220		16.00	15.79
		48	5240		16.00	15.71
	802.11n40-HT0	38	5190	MCS0	16.00	15.99
		46	5230		16.00	15.98
	802.11ac40-VHT0	38	5190	MCS0	16.00	15.76
	002.11a040-VH10	46	5230	IVICOU	16.00	15.73
	802.11ac80-VHT0	42	5210	MCS0	16.00	15.97
	802.11ac160-VHT0	50	5250	MCS0	13.50	13.22

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 37 of 124

		TX2 A	Antenna			
Band	Mode	Channel	Frequency (MHz)	Data Rate	Max. Rated Avg. Power + Max. Tolerance (dBm)	Average power (dBm)
		52	5260		16.00	15.96
	802.11a	56	5280	6Mbps	16.00	15.99
	002.11a	60	5300		16.00	15.97
		64	5320		16.00	15.94
	802.11n20-HT0	52	5260		16.00	15.82
		56	5280	MCS0	16.00	15.96
		60	5300	IVICOU	16.00	15.90
		64	5320		16.00	15.96
5.25-5.35 GHz		52	5260		16.00	15.83
	802.11ac20-VHT0	56	5280	MCS0	16.00	16.00
	002.11ac20-VI110	60	5300	IVICSU	16.00	15.77
		64	5320		16.00	15.77
	802.11n40-HT0	54	5270	MCS0	16.00	15.97
	002.111140-HTU	62	5310	IVICOU	14.50	14.22
	802.11ac40-VHT0	54	5270	MCS0	16.00	15.76
	802.11ac40-VH10	62	5310	IVICSU	14.50	14.43
	802.11ac80-VHT0	58	5290	MCS0	15.50	15.35

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Page: 38 of 124

		TX2 A	Antenna			
Band	Mode	Channel	Frequency (MHz)	Data Rate	Max. Rated Avg. Power + Max. Tolerance (dBm)	Average power (dBm)
		100	5500		17.00	16.99
		116	5580]	17.00	16.97
		120	5600		17.00	16.89
	802.11a	124	5620	6Mbps	17.00	16.77
		128	5640		17.00	16.81
		140	5700		17.00	16.97
		144	5720		17.00	16.77
		100	5500		17.00	16.82
		116	5580		17.00	16.75
		120	5600		17.00	16.94
5600 MHz	802.11n20-HT0	124	5620	MCS0	17.00	16.79
		128	5640		17.00	16.76
		140	5700		17.00	16.80
		144	5720		17.00	16.91
		100	5500		17.00	16.87
		116	5580		17.00	16.91
		120	5600		17.00	16.74
	802.11ac20-VHT0	124	5620	MCS0	17.00	16.81
		128	5640		17.00	16.78
		140	5700		17.00	16.87
		144	5720		17.00	16.89

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司



Page: 39 of 124

		TX2 A	Antenna			
Band	Mode	Channel	Frequency (MHz)	Data Rate	Max. Rated Avg. Power + Max. Tolerance (dBm)	Average power (dBm)
		102	5510		16.50	16.30
		110	5550		17.00	16.96
	802.11n40-HT0	118	5590	MCS0	17.00	16.79
		126	5630	IVICSU	17.00	16.99
		134	5670		17.00	16.97
		142	5710		17.00	16.98
		102	5510		16.50	16.35
5600 MHz		110	5550		17.00	16.86
3000 MHZ	802.11ac40-VHT0	118	5590	MCS0	17.00	16.86
	002.11a040-VH10	126	5630	IVICSU	17.00	16.93
		134	5670		17.00	16.93
		142	5710		17.00	16.90
		106	5530		17.00	16.95
	802.11ac80-VHT0	122	5610	MCS0	17.00	16.80
		138	5690		17.00	16.99
	802.11ac160-VHT0	114	5570	MCS0	15.00	14.91

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Page: 40 of 124

		TX2 A	ntenna			
Mode	Mode	Channel	Frequency (MHz)	Data Rate	Max. Rated Avg. Power + Max. Tolerance (dBm)	Average power (dBm)
		149	5745		16.50	16.28
	802.11a	157	5785	6Mbps	16.50	16.24
		165	5825		16.50	16.33
	802.11n20-HT0	149	5745	MCS0	16.50	16.49
		157	5785		16.50	16.43
		165	5825		16.50	16.45
5800 MHz		149	5745		16.50	16.48
3600 MITIZ	802.11ac20-VHT0	157	5785	MCS0	16.50	16.27
		165	5825		16.50	16.23
	802.11n40-HT0	151	5755	MCS0	16.50	16.42
	002.1111 4 0-F110	159	5795	IVICOU	16.50	16.49
	802.11ac40-VHT0	151	5755	MCS0	16.50	16.31
	002.118040-7010	159	5795		16.50	16.31
	802.11ac80-VHT0	155	5775	MCS0	16.50	16.46

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司



Page: 41 of 124

		TX1	Antenna			
Band	Mode	Channel	Frequency (MHz)	Data Rate	Max. Rated Avg. Power + Max. Tolerance (dBm)	Average power (dBm)
		1	2412		19.00	18.98
		2	2417		19.00	18.84
		6	2437		19.00	18.99
	802.11b	10	2457	1Mbps	19.00	18.72
		11	2462		19.00	18.97
		12	2467		18.50	18.48
		13	2472		15.00	14.80
		1	2412		16.00	15.86
		2	2417	6Mbps	17.50	17.27
		6	2437		19.00	18.90
	802.11g	10	2457		18.50	18.23
		11	2462		16.00	15.80
		12	2467		13.50	13.24
2450 MHz		13	2472		-6.00	-6.15
2430 WII IZ		1	2412		16.00	15.83
		2	2417		17.50	17.35
		6	2437		19.00	18.94
	802.11n20-HT0	10	2457	MCS0	18.50	18.37
		11	2462		16.00	15.79
		12	2467		13.50	13.45
		13	2472		-6.00	-6.22
		3	2422		15.00	14.83
		4	2427		16.00	15.81
		6	2437		16.00	15.71
	802.11n40-HT0	8	2447	MCS0	16.00	15.98
		9	2452		14.50	14.34
		10	2457		11.00	10.70
		11	2462		3.00	2.89

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司



Page: 42 of 124

		TX1 A	ntenna			
Band	Mode	Channel	Frequency (MHz)	Data Rate	Max. Rated Avg. Power + Max. Tolerance (dBm)	Average power (dBm)
		36	5180		16.00	15.87
	802.11a	40	5200	6Mbps	16.00	15.93
	002.11a	44	5220	Olvibbs	16.00	16.00
		48	5240		16.00	15.82
	802.11n20-HT0	36	5180		16.00	15.73
		40	5200	MCS0	16.00	15.98
		44	5220	IVICSO	16.00	15.88
		48	5240		16.00	15.85
5.15-5.25 GHz		36	5180		16.00	15.78
0.13-3.23 GHZ	802.11ac20-VHT0	40	5200	MCS0	16.00	15.98
	002.11ac20-V1110	44	5220	IVICOU	16.00	16.00
		48	5240		16.00	15.98
	802.11n40-HT0	38	5190	MCS0	16.00	15.97
	002.1111 4 0-Π10	46	5230	IVICOU	16.00	15.96
	802.11ac40-VHT0	38	5190	MCS0	16.00	15.99
	002.11a040-VH10	46	5230	INICSU	16.00	15.81
	802.11ac80-VHT0	42	5210	MCS0	16.00	15.98
	802.11ac160-VHT0	50	5250	MCS0	13.50	13.26

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Page: 43 of 124

		TY1 A	ıntenna			
		1/1/	піспіа			
Band	Mode	Channel	Frequency (MHz)	Data Rate	Max. Rated Avg. Power + Max. Tolerance (dBm)	Average power (dBm)
		52	5260		16.00	15.99
	802.11a	56	5280	6Mbps	16.00	15.98
	002.114	60	5300		16.00	15.97
		64	5320		16.00	15.95
	802.11n20-HT0	52	5260	MCS0	16.00	15.99
		56	5280		16.00	15.80
		60	5300		16.00	15.77
		64	5320		16.00	15.94
5.25-5.35 GHz		52	5260		16.00	15.79
	802.11ac20-VHT0	56	5280	MCS0	16.00	15.75
	002.11ac20-VH10	60	5300	IVICSU	16.00	15.92
		64	5320		16.00	15.84
	802.11n40-HT0	54	5270	MCS0	16.00	15.98
	ου 2.111140-Π1 0	62	5310	IVICOU	14.50	14.36
	802.11ac40-VHT0	54	5270	MCS0	16.00	15.91
	002.11a040-VH10	62	5310	INICSU	14.50	14.28
	802.11ac80-VHT0	58	5290	MCS0	15.50	15.37

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司



Page: 44 of 124

		TX1 A	Antenna			
Band	Mode	Channel	Frequency (MHz)	Data Rate	Max. Rated Avg. Power + Max. Tolerance (dBm)	Average power (dBm)
		100	5500		16.00	15.96
		116	5580		16.00	15.98
		120	5600		16.00	15.91
	802.11a	124	5620	6Mbps	16.00	15.78
		128	5640		16.00	15.75
		140	5700		16.00	15.75
		144	5720		16.00	15.89
		100	5500		16.00	15.89
		116	5580		16.00	15.82
		120	5600		16.00	15.95
5600 MHz	802.11n20-HT0	124	5620	MCS0	16.00	15.91
		128	5640		16.00	15.76
		140	5700		16.00	15.97
		144	5720		16.00	15.75
		100	5500		16.00	15.92
		116	5580		16.00	15.83
		120	5600		16.00	15.71
	802.11ac20-VHT0	124	5620	MCS0	16.00	15.82
		128	5640		16.00	15.78
		140	5700		16.00	15.80
		144	5720		16.00	15.79

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 45 of 124

	TX1 Antenna									
Band	Mode	Channel	Frequency (MHz)	Data Rate	Max. Rated Avg. Power + Max. Tolerance (dBm)	Average power (dBm)				
		102	5510		16.00	15.98				
	802.11n40-HT0	110	5550		16.00	15.99				
		118	5590	MCS0	16.00	15.95				
		126	5630		16.00	15.79				
		134	5670		16.00	15.96				
		142	5710		16.00	15.97				
		102	5510		16.00	15.87				
5600 MIL		110	5550		16.00	15.97				
5600 MHz	000 110010 \/\	118	5590	MCCO	16.00	15.98				
	802.11ac40-VHT0	126	5630	MCS0	16.00	15.78				
		134	5670		16.00	15.87				
		142	5710		16.00	15.84				
		106	5530		16.00	15.90				
	802.11ac80-VHT0	122	5610	MCS0	16.00	15.84				
		138	5690		16.00	15.99				
	802.11ac160-VHT0	114	5570	MCS0	15.00	14.80				

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Page: 46 of 124

		TX1 A	ntenna			
Mode	Mode	Channel	Frequency (MHz)	Data Rate	Max. Rated Avg. Power + Max. Tolerance (dBm)	Average power (dBm)
		149	5745		16.00	15.85
	802.11a	157	5785	6Mbps	16.00	15.74
		165	5825		16.00	15.96
	802.11n20-HT0	149	5745	MCS0	16.00	15.89
		157	5785		16.00	15.74
		165	5825		16.00	15.74
5800 MHz		149	5745		16.00	15.92
3000 1011 12	802.11n40-VHT0	157	5785	MCS0	16.00	15.76
		165	5825		16.00	15.95
	802.11n40-HT0	151	5755	MCS0	16.00	15.96
	002.111140-1110	159	5795	IVICOU	16.00	15.94
	802.11ac40-VHT0	151	5755	MCS0	16.00	15.96
	002.11a040-VH10	159	5795		16.00	15.85
	802.11ac80-VHT0	155	5775	MCS0	16.00	15.97

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Page: 47 of 124

Laptop mode (power level 1)

TX2 Antenna									
Band	Mode	Channel	Frequency (MHz)	Data Rate	Max. Rated Avg. Power + Max. Tolerance (dBm)	Average power (dBm)			
		1	2412		19.50	19.32			
		2	2417		20.50	20.49			
		6	2437		20.50	20.48			
	802.11b	10	2457	1Mbps	20.50	20.46			
		11	2462		19.50	19.28			
		12	2467	1	18.50	18.41			
		13	2472		15.00	14.80			
		1	2412		16.00	15.72			
		2	2417		18.50	18.41			
		6	2437		20.50	20.26			
	802.11g	10	2457	6Mbps	18.50	18.38			
		11	2462		16.50	16.42			
		12	2467		13.00	12.86			
2450 MHz		13	2472		-6.50	-6.78			
2430 WII 12		1	2412		16.00	15.80			
		2	2417		18.50	18.39			
		6	2437		20.50	20.26			
	802.11n20-HT0	10	2457	MCS0	18.50	18.30			
		11	2462		16.50	16.48			
		12	2467		13.00	12.79			
		13	2472		-6.50	-6.62			
		3	2422		14.50	14.24			
		4	2427		16.00	15.94			
		6	2437		16.00	15.72			
	802.11n40-HT0	8	2447	MCS0	16.00	15.85			
		9	2452		14.00	13.88			
		10	2457		10.50	10.27			
		11	2462		3.50	3.37			

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司



Page: 48 of 124

		TX2 A	Antenna			
Band	Mode	Channel	Frequency (MHz)	Data Rate	Max. Rated Avg. Power + Max.	Average power
			(IVII 12)		Tolerance (dBm)	(dBm)
		36	5180		19.00	18.87
	802.11a	40	5200	6Mbps	20.50	20.49
	002.11a	44	5220		20.50	20.48
		48	5240		20.50	20.44
	802.11n20-HT0	36	5180		19.00	18.77
		40	5200	MCS0	20.50	20.36
		44	5220	IVICSO	20.50	20.21
		48	5240		20.50	20.29
5.15-5.25 GHz		36	5180		19.00	18.88
0.10-0.20 GHZ	802.11ac20-VHT0	40	5200	MCS0	20.50	20.24
	002.11ac20-V1110	44	5220	IVICOU	20.50	20.33
		48	5240		20.50	20.44
	802.11n40-HT0	38	5190	MCS0	18.00	17.83
	002.111140-HTU	46	5230	IVICOU	19.00	18.74
	802.11ac40-VHT0	38	5190	MCS0	18.00	17.82
	002.11a040-VIII0	46	5230	IVICOU	19.00	18.98
	802.11ac80-VHT0	42	5210	MCS0	17.50	17.28
	802.11ac160-VHT0	50	5250	MCS0	13.50	13.26

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 49 of 124

		TX2 A	Antenna			
Band	Mode	Channel	Frequency (MHz)	Data Rate	Max. Rated Avg. Power + Max. Tolerance (dBm)	Average power (dBm)
		52	5260		20.50	20.43
	802.11a	56	5280	6Mbps	20.50	20.49
	002.11d	60	5300	Olvibba	20.50	20.48
		64	5320		16.50	16.20
	802.11n20-HT0	52	5260		20.50	20.47
		56	5280	MCS0	20.50	20.37
		60	5300		20.50	20.44
		64	5320		16.50	16.25
5.25-5.35 GHz		52	5260		20.50	20.36
	802.11ac20-VHT0	56	5280	MCS0	20.50	20.21
	002.11ac20-V1110	60	5300	IVICOU	20.50	20.26
		64	5320		16.50	16.25
	802.11n40-HT0	54	5270	MCS0	18.50	18.42
	002.111140-1110	62	5310	IVICOU	14.50	14.26
	802.11ac40-VHT0	54	5270	MCS0	18.50	18.45
	002.118040-VH10	62	5310	IVICOU	14.50	14.48
	802.11ac80-VHT0	58	5290	MCS0	15.50	15.44

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Page: 50 of 124

		TX2 A	Antenna			
Band	Mode	Channel	Frequency (MHz)	Data Rate	Max. Rated Avg. Power + Max. Tolerance (dBm)	Average power (dBm)
		100	5500		19.00	18.82
		116	5580		20.50	20.23
		120	5600		20.50	20.40
	802.11a	02.11a 124 5620 6Mbps	6Mbps	20.50	20.36	
		128	5640		20.50	20.27
		140	5700		18.50	18.21
		144	5720		19.50	19.28
		100	5500		19.00	18.87
		116	5580		20.50	20.37
		120	5600		20.50	20.23
5600 MHz	802.11n20-HT0	124	5620	MCS0	20.50	20.25
		128	5640		20.50	20.39
		140	5700		18.50	18.29
		144	5720		19.50	19.34
		100	5500		19.00	18.99
		116	5580		20.50	20.26
		120	5600		20.50	20.22
	802.11ac20-VHT0	124	5620	MCS0	20.50	20.46
		128	5640		20.50	20.34
		140	5700		18.50	18.25
		144	5720		19.50	19.36

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司



Page: 51 of 124

		TX2 A	Antenna			
Band	Mode	Channel	Frequency (MHz)	Data Rate	Max. Rated Avg. Power + Max. Tolerance (dBm)	Average power (dBm)
		102	5510		16.50	16.33
	802.11n40-HT0	110	5550	MCS0	20.50	20.49
		118	5590		20.50	20.26
		126	5630	IVICSU	20.50	20.38
		134	5670		19.50	19.26
		142	5710		19.50	19.43
		102	5510		16.50	16.35
5600 MHz		110	5550		20.50	20.21
3000 MHZ	802.11ac40-VHT0	118	5590	MCS0	20.50	20.40
	002.11a040-VH10	126	5630	MCSU	20.50	20.41
		134	5670		19.50	19.27
		142	5710		19.50	19.38
		106	5530		17.00	16.95
	802.11ac80-VHT0	122	5610	MCS0	20.50	20.25
		138	5690		20.50	20.46
	802.11ac160-VHT0	114	5570	MCS0	15.00	14.85

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Page: 52 of 124

		TX2 A	ntenna			
Mode	Mode	Channel	Frequency (MHz)	Data Rate	Max. Rated Avg. Power + Max. Tolerance (dBm)	Average power (dBm)
	802.11a	149	5745		20.50	20.44
		157	5785	6Mbps	20.50	20.49
		165	5825		20.50	20.48
	802.11n20-HT0	149	5745	MCS0	20.50	20.32
		157	5785		20.50	20.43
		165	5825		20.50	20.38
5800 MHz		149	5745		20.50	20.43
3600 WII 12	802.11ac20-VHT0	157	5785	MCS0	20.50	20.43
		165	5825		20.50	20.32
	802.11n40-HT0	151	5755	MCS0	18.50	18.20
	002.1111 4 0-F110	159	5795	IVICOU	20.00	19.74
	802.11ac40-VHT0	151	5755	MCS0	18.50	18.37
	002.118C40-VH10	159	5795	IVICOU	20.00	19.93
	802.11ac80-VHT0	155	5775	MCS0	18.50	18.38

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Page: 53 of 124

		TX1	Antenna			
Band	Mode	Channel	Frequency (MHz)	Data Rate	Max. Rated Avg. Power + Max. Tolerance (dBm)	Average power (dBm)
		1	2412		19.50	19.24
		2	2417		20.50	20.42
		6	2437		20.50	20.46
	802.11b	10	2457	1Mbps	20.50	20.49
		11	2462		19.50	19.49
		12	2467	_	18.50	18.21
		13	2472		15.00	14.96
		1	2412		16.00	15.95
		2	2417		17.50	17.44
		6	2437		20.50	20.35
	802.11g	10	2457	6Mbps	18.50	18.27
		11	2462]	16.00	15.70
		12	2467		13.50	13.22
2450 MHz		13	2472		-6.00	-6.22
2430 1011 12		1	2412		16.00	15.99
		2	2417		17.50	17.46
		6	2437		20.50	20.27
	802.11n20-HT0	10	2457	MCS0	18.50	18.24
		11	2462		16.00	15.87
		12	2467		13.50	13.35
		13	2472		-6.00	-6.07
		3	2422		15.00	14.73
		4	2427		16.00	15.75
		6	2437		16.00	15.90
	802.11n40-HT0	8	2447	MCS0	16.00	15.85
		9	2452		14.50	14.42
		10	2457		11.00	10.97
		11	2462		3.00	2.95

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Page: 54 of 124

		TX1 A	ntenna			
Band	Mode	Channel	Frequency (MHz)	Data Rate	Max. Rated Avg. Power + Max. Tolerance (dBm)	Average power (dBm)
		36	5180		18.50	18.49
	802.11a	40	5200	6Mbps	20.00	20.40
	002.11a	44	5220	divibps	20.50	20.44
		48	5240		20.50	20.49
	802.11n20-HT0	36	5180		18.50	18.32
		40	5200	MCS0	20.00	19.76
		44	5220	IVICOU	20.50	20.40
		48	5240		20.50	20.26
5.15-5.25 GHz		36	5180		18.50	18.24
0.10-0.20 GHZ	802.11ac20-VHT0	40	5200	MCS0	20.00	19.93
	002.11ac20-V1110	44	5220	IVICOU	20.50	20.22
		48	5240		20.50	20.27
	002 11p40 UT0	38	5190	MCS0	18.00	17.84
	802.11n40-HT0	46	5230	IVICSU	19.50	19.46
	802.11ac40-VHT0	38	5190	MCS0	18.00	18.00
	002.118040-VH10	46	5230	IVICOU	19.50	19.42
	802.11ac80-VHT0	42	5210	MCS0	18.00	17.77
	802.11ac160-VHT0	50	5250	MCS0	13.50	13.38

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 55 of 124

		TX1 A	ntenna			
Band	Mode	Channel	Frequency (MHz)	Data Rate	Max. Rated Avg. Power + Max. Tolerance (dBm)	Average power (dBm)
		52	5260		20.50	20.44
	802.11a	56	5280	6Mbps	20.50	20.49
	002.11a	60	5300	Olvibbs	20.50	20.48
		64	5320		16.00	15.81
	802.11n20-HT0	52	5260	MCS0	20.50	20.43
		56	5280		20.50	20.25
		60	5300		20.50	20.38
		64	5320		16.00	15.72
5.25-5.35 GHz		52	5260		20.50	20.25
	802.11ac20-VHT0	56	5280	MCS0	20.50	20.30
	002.11ac20-V1110	60	5300	IVICOU	20.50	20.41
		64	5320		16.00	15.88
	802.11n40-HT0	54	5270	MCS0	18.50	18.23
	002.111140-1110	62	5310	IVICOU	14.50	14.34
	802.11ac40-VHT0	54	5270	MCS0	18.50	18.48
	0UZ.118C4U-VH1U	62	5310	IVICOU	14.50	14.33
	802.11ac80-VHT0	58	5290	MCS0	15.50	15.34

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Page: 56 of 124

		TX1 A	Antenna			
Band	Mode	Channel	Frequency (MHz)	Data Rate	Max. Rated Avg. Power + Max. Tolerance (dBm)	Average power (dBm)
		100	5500		19.00	18.79
		116	5580		20.50	20.49
		120	5600		20.50	20.49
	802.11a	124	5620	6Mbps	20.50	20.38
		128	5640		20.50	20.43
		140	5700		18.50	18.32
		144	5720		20.00	19.86
		100	5500		19.00	18.83
		116	5580		20.50	20.21
		120	5600		20.50	20.26
5600 MHz	802.11n20-HT0	124	5620	MCS0	20.50	20.47
		128	5640		20.50	20.30
		140	5700		18.50	18.36
		144	5720		20.00	19.83
		100	5500		19.00	18.73
		116	5580		20.50	20.24
		120	5600		20.50	20.21
	802.11ac20-VHT0	124	5620	MCS0	20.50	20.42
		128	5640		20.50	20.22
		140	5700		18.50	18.48
		144	5720		20.00	19.84

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 57 of 124

		TX1 A	Antenna			
Band	Mode	Channel	Frequency (MHz)	Data Rate	Max. Rated Avg. Power + Max. Tolerance (dBm)	Average power (dBm)
		102	5510		17.00	16.90
	802.11n40-HT0	110	5550	MCS0	20.50	20.48
		118	5590		20.50	20.38
		126	5630	IVICSU	20.50	20.38
		134	5670		18.50	18.47
		142	5710		19.50	19.50
		102	5510		17.00	16.94
5600 MHz		110	5550		20.50	20.47
3000 MHZ	802.11ac40-VHT0	118	5590	MCS0	20.50	20.38
	002.11a040-VH10	126	5630	IVICSU	20.50	20.23
		134	5670		18.50	18.38
		142	5710		19.50	19.40
		106	5530		17.50	17.27
	802.11ac80-VHT0	122	5610	MCS0	20.50	20.29
		138	5690		20.50	20.47
	802.11ac160-VHT0	114	5570	MCS0	15.00	14.73

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Page: 58 of 124

		TX1 A	ntenna			
Mode	Mode	Channel	Frequency (MHz)	Data Rate	Max. Rated Avg. Power + Max. Tolerance (dBm)	Average power (dBm)
		149	5745		20.50	20.47
	802.11a	157	5785	6Mbps	20.50	20.49
		165	5825		20.50	2048
	802.11n20-HT0	149	5745	MCS0	20.50	20.30
		157	5785		20.50	20.33
		165	5825		20.50	20.44
5800 MHz		149	5745		20.50	20.20
3000 WII 12	802.11n40-VHT0	157	5785	MCS0	20.50	20.27
		165	5825		20.50	20.32
	802.11n40-HT0	151	5755	MCS0	19.50	19.34
	002.1111 4 0-1110	159	5795	IVICOU	20.00	19.80
	802.11ac40-VHT0	151	5755	MCS0	19.50	19.31
	802.11ac40-VH10	159	5795	IVICOU	20.00	19.78
	802.11ac80-VHT0	155	5775	MCS0	19.00	18.74

Bluetooth conducted power table:

Diactootii	Biactootii conaactea power table:								
Mode	Channel	Frequency	Average	Output Pow	Max. Rated Avg. Power + Max.				
Mode	Channel	(MHz)	1Mbps	2Mbps	3Mbps	Tolerance (dBm)			
	CH 00	2402	9.05	8.02	8.06				
BR/EDR	CH 39	2441	9.21	8.42	8.35	9.5			
	CH 78	2480	9.43	8.57	8.54				

N	Mode	Channel	Frequency	I AVEIAGE CUIDUI FOWEI (UDIII)	Max. Rated Avg. Power + Max.
Wode	(MF	(MHz)	GFSK	Tolerance (dBm)	
		CH 00	2402	5.04	
	LE	CH 20	2442	5.22	5.5
		CH 39	2480	5.38	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司



Page: 59 of 124

1.4 Test Environment

Ambient Temperature: 22±2° C Tissue Simulating Liquid: 22±2° C

1.5 Operation Description

Use chipset specific software to control the EUT, and makes it transmit in maximum power. Measurements are performed respectively on the lowest, middle and highest channels of the operating band(s). The EUT is set to maximum power level during all tests, and at the beginning of each test the battery is fully charged.

The device is a convertible laptop computer with RF feature. The device will adjust the maximum output power for different user scenario and EUT was tested as below based on KDB inquiry.

Tablet mode (Power level 2)

Backside/edges touch against the flat phantom

Laptop mode (Power level 1)

SAR measurement for Laptop SAR with full power is not required since the distance between antenna and user is > 20cm.

Note:

802.11b DSSS SAR Test Requirements:

- 1. SAR is measured for 2.4 GHz 802.11b DSSS mode using the highest measured maximum output power channel, when the reported SAR of the highest measured maximum output power channel for the exposure configuration is ≤ 0.8 W/kg, no further SAR testing is required for 802.11b DSSS in that exposure configuration.
- 2. When the reported SAR is > 0.8 W/kg, SAR is required for that exposure configuration using the next highest measured output power channel. When any reported SAR is > 1.2 W/kg, SAR is required for the third channel; i.e., all channels require testing.
 - 802.11g/n OFDM SAR Test Exclusion Requirements:
- SAR is not required for 802.11g/n since the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Page: 60 of 124

the adjusted SAR is ≤ 1.2 W/kg.

Initial Test Configuration:

- 4. An initial test configuration is determined for OFDM transmission modes according to the channel bandwidth, modulation and data rate combination(s) with the highest maximum output power specified for production units in each standalone and aggregated frequency band.
- SAR is measured using the highest measured maximum output power channel. When the reported SAR of the initial test configuration is > 0.8 W/kg, SAR measurement is required for the subsequent next highest measured output power channel(s) in the initial test configuration until the reported SAR is ≤ 1.2 W/kg or all required channels are tested.
- 6. Since the highest reported SAR for the initial test configuration is adjusted by the ratio of the subsequent test configuration to initial test configuration specified maximum output power and the adjusted SAR is ≤ 1.2 W/kg, SAR is not required for subsequent test configuration.
- 7. BT and WLAN TX1 use the same antenna path, but they can't transmit at the same time.
- 8. According to KDB447498 D01, testing of other required channels is not required when the reported 1-g SAR for the highest output channel is ≤ 0.8 W/kg, when the transmission band is ≤ 100 MHz.
- 9. According to KDB865664 D01, SAR measurement variability must be assessed for each frequency band. When the original highest measured SAR is ≥ 0.8 W/kg, repeated that measurement once. Perform a second repeated measurement only if the ratio of largest to smallest SAR for the original and first repeated measurements is > 1.20 or when the original or repeated measurement is ≥ 1.45 W/kg (~10% from the 1-g SAR limit)
- 10. There are two antenna vendors, one is HTK, and another is INPAQ. Both of them were measured fully and respectively.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Page: 61 of 124

1.6 Operating modes validation by power measurement

The device is a convertible laptop computer with predefined single fixed power to each device modes.

For the operating modes validation, the measured conducted output power is monitored qualitatively to identify the triggering characteristics and recorded quantitatively.

DUT operating mode	Lid Angle description	WLAN TX state		
Lid Close	0° ≤ Lid angle ≤12.5 °	No TX Transmission		
Laptop	12.5° < Lid angle ≤ 200°	Power Level 1		
Tablet	200° < Lid angle ≤ 360°	Power Level 2		

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 1

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134號

www.tw.sas.com



Page: 62 of 124

1.6.1 Results and conclusion

The measured output power versus lid angle is tabulated in the following table, and the triggering verification complies with the device mode / power level declared by the manufacturer.

Operating mode validation by power measurement

Lid close to Tablet

Antenna	Operation mode	Lid angle	802.11b	WiFi n(40M) 5.2G	WiFi ac(80M) 5.2G	WiFi n(40M) 5.3G	WiFi ac(80M) 5.6G	WiFi ac(80M) 5.8G
		0°	n/a	n/a	n/a	n/a	n/a	n/a
		1°	n/a	n/a	n/a	n/a	n/a	n/a
		2°	n/a	n/a	n/a	n/a	n/a	n/a
		3°	n/a	n/a	n/a	n/a	n/a	n/a
	Lid close	4°	n/a	n/a	n/a	n/a	n/a	n/a
		5°	n/a	n/a	n/a	n/a	n/a	n/a
	Lid close	6° 7°	n/a	n/a	n/a	n/a	n/a	n/a
	-	8°	n/a	n/a	n/a	n/a	n/a	n/a
	H	9°	n/a n/a	n/a n/a	n/a n/a	n/a n/a	n/a n/a	n/a n/a
		10°	n/a	n/a	n/a	n/a	n/a	n/a
		11°	n/a	n/a	n/a	n/a	n/a	n/a
	l f	12.5°	n/a	n/a	n/a	n/a	n/a	n/a
		13.5°	20.40	18.93	17.41	18.37	20.45	18.32
		14.5°	20.43	18.97	17.32	18.38	20.37	18.41
		15.5°	20.47	18.83	17.40	18.37	20.34	18.44
		16.5°	20.40	18.85	17.33	18.36	20.36	18.31
		17.5°	20.42	18.98	17.40	18.42	20.38	18.42
		27°	20.31	18.93	17.33	18.32	20.47	18.31
		37°	20.48	18.93	17.37	18.33	20.40	18.38
	[47°	20.31	18.81	17.39	18.33	20.35	18.35
		57°	20.41	18.85	17.40	18.46	20.33	18.39
		67°	20.31	18.86	17.40	18.43	20.42	18.44
		77° 87°	20.34	18.84 18.98	17.38 17.44	18.45 18.45	20.33 20.38	18.35 18.48
	-	97°	20.48	18.97	17.44	18.39	20.38	18.34
	l	107°	20.43	18.91	17.44	18.46	20.37	18.45
	Laptop mode	117°	20.36	18.94	17.39	18.41	20.50	18.42
	l -	127°	20.40	18.81	17.44	18.47	20.40	18.40
		137°	20.41	18.84	17.39	18.49	20.38	18.43
	l l	147°	20.39	18.81	17.36	18.33	20.47	18.31
		157°	20.50	18.93	17.33	18.38	20.34	18.32
		167°	20.42	18.82	17.44	18.34	20.39	18.38
WLAN TX2		177°	20.38	18.92	17.31	18.34	20.40	18.35
		187°	20.49	18.83	17.31	18.41	20.45	18.36
		195°	20.44	18.88	17.32	18.42	20.45	18.47
		196°	20.47	18.82	17.31	18.33	20.46	18.46
		197°	20.43	18.98	17.49	18.47	20.42	18.44
		198°	20.48	19.00	17.31	18.44	20.40	18.45
		199°	20.45	18.91	17.43	18.37	20.41	18.40
		200° 201°	20.36	18.96 16.00	17.34	18.38 16.00	20.39 16.85	18.33 16.49
		201°	18.83 18.85	15.91	15.89 15.94	15.92	16.82	16.37
		202°	18.86	15.91	15.84	15.92	16.88	16.33
		203 204°	18.81	15.89	15.92	15.81	16.83	16.34
		205°	18.81	15.97	15.86	15.81	16.97	16.37
		215°	18.84	15.81	15.90	15.92	16.93	16.48
		225°	18.99	15.97	15.81	15.97	16.83	16.41
	l t	235°	18.96	15.81	15.91	15.92	16.82	16.49
	l t	245°	18.93	15.98	15.91	15.86	16.82	16.43
	[255°	18.82	15.98	16.00	15.91	16.85	16.43
	[265°	18.85	15.99	15.95	15.89	16.83	16.36
	l	275°	18.88	15.87	15.89	15.98	16.85	16.33
	Tablet mode	285°	18.97	15.96	15.99	15.95	16.84	16.39
		295°	18.89	15.85	15.96	15.89	16.88	16.38
		305°	18.86	15.81	15.82	15.90	16.82	16.33
		315°	18.84	15.83	15.91	15.96	16.91	16.33
		325°	19.00	15.92 15.92	15.81	15.87 15.91	16.95 16.86	16.43 16.37
		335° 345°	18.92		15.93			
		345°	18.98 18.94	15.92 15.85	15.89 15.95	15.92 15.90	16.95 16.88	16.33 16.35
		356°	18.95	15.85	15.86	15.95	17.00	16.35
		357°	19.00	15.92	15.92	15.82	16.85	16.41
		358°	18.84	15.89	15.94	15.97	17.00	16.34
		359°	18.95	15.82	15.94	15.92	16.82	16.35
	l -	360°	18.90	15.91	15.92	15.93	16.93	16.41

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

台灣檢驗科技股份有限公司



Page: 63 of 124

Antenna	Operation mode	Lid angle	802.11b	WiFi n(40M) 5.2G	WiFi ac(80M) 5.2G	WiFi n(40M) 5.3G	WiFi ac(80M) 5.6G	WiFi ac(80M) 5.8G
		0°	n/a	n/a	n/a	n/a	n/a	n/a
		1°	n/a	n/a	n/a	n/a	n/a	n/a
		2°	n/a	n/a	n/a	n/a	n/a	n/a
		3°	n/a	n/a	n/a	n/a	n/a	n/a
		4°	n/a	n/a	n/a	n/a	n/a	n/a
		5°	n/a	n/a	n/a	n/a	n/a	n/a
	Lid close	6°	n/a	n/a	n/a	n/a	n/a	n/a
		7°	n/a	n/a	n/a	n/a	n/a	n/a
		8°	n/a	n/a	n/a	n/a	n/a	n/a
		9°	n/a	n/a	n/a	n/a	n/a	n/a
		10°	n/a	n/a	n/a	n/a	n/a	n/a
		11°	n/a	n/a	n/a	n/a	n/a	n/a
		12.5°	n/a	n/a	n/a	n/a	n/a	n/a
		13.5°	20.50	19.31	17.91	18.37	20.41	18.86
		14.5°	20.47	19.48	17.85	18.49	20.40	18.81
		15.5°	20.48	19.43	17.82	18.50	20.49	19.00
		16.5°	20.34	19.44	17.93	18.43	20.48	18.93
		17.5°	20.38	19.31	17.84	18.33	20.36	18.83
		27°	20.39	19.49	17.97	18.43	20.44	18.91
		37°	20.32	19.31	17.82	18.37	20.49	18.85
		47°	20.34	19.44	17.85	18.42	20.50	18.94
		57°	20.41	19.32	17.96	18.37	20.41	18.87
		67°	20.48	19.48	17.93	18.31	20.34	18.91
		77°	20.39	19.36	17.97	18.48	20.40	18.89
		87°	20.45	19.50	17.92	18.40	20.40	18.84
		97°	20.39	19.48	17.90	18.47	20.42	18.94
	Laptop mode	107°	20.41	19.42	17.99	18.47	20.34	18.97
	Eaptop mode	117°	20.49	19.48	17.92	18.50	20.37	18.81
		127°	20.38	19.42	17.98	18.49	20.44	18.82
		137°	20.50	19.49	18.00	18.46	20.41	18.85
		147°	20.42	19.43	17.84	18.32	20.42	18.96
		157°	20.40	19.36	17.99	18.32	20.34	18.82
WLAN TX1		167°	20.45	19.37	17.87	18.33	20.41	18.90
WLAN IXI		177°	20.42	19.38	17.98	18.40	20.48	18.86
		187°	20.45	19.35	17.99	18.42	20.43	18.85
		195°	20.31	19.38	17.81	18.36	20.38	18.86
		196°	20.36	19.37	17.98	18.31	20.47	18.98
		197°	20.40	19.48	17.83	18.35	20.47	18.89
		198°	20.50	19.36	17.96	18.42	20.47	18.83
		199°	20.50	19.39	17.91	18.34	20.33	18.98
		200°	20.41	19.49	17.94	18.33	20.34	18.82
		201°	18.98	15.84	15.86	15.86	15.87	15.97
		202°	18.82	15.90	15.94	15.93	15.88	16.00
		203°	19.00	15.93	15.97	15.88	15.95	16.00
		204°	18.87	15.93	15.95	16.00	15.98	15.86
		205°	18.85	15.94	15.82	15.93	15.99	15.97
		215°	18.91	15.90	15.88	15.81	15.89	15.90
		225°	18.83	15.83	15.91	15.93	15.90	15.92
		235°	18.92	15.85	15.98	15.90	15.99	15.89
]	245°	18.94	15.91	15.82	15.96	15.91	15.84
		255°	18.93	15.97	15.93	15.86	15.96	15.90
]	265°	18.83	15.81	16.00	15.91	16.00	15.92
		275°	18.99	15.93	15.84	15.92	15.99	15.96
	Tablet mode	285°	18.93	15.82	15.83	15.99	15.90	15.87
]	295°	18.87	15.93	15.99	15.97	15.99	15.94
		305°	18.92	15.92	15.86	15.86	15.85	15.82
		315°	18.85	15.95	15.81	15.85	15.99	15.97
		325°	18.96	15.94	15.95	15.93	15.96	15.93
]	335°	19.00	15.86	15.88	15.81	15.88	15.82
		345°	18.97	15.90	15.92	15.93	15.85	15.82
		355°	18.90	15.97	15.83	15.99	15.87	15.98
]	356°	18.84	15.92	15.92	15.97	15.86	15.83
		357°	18.95	15.93	15.82	16.00	15.95	16.00
		358°	18.96	15.82	15.89	15.96	15.91	15.95
		359°	18.86	15.96	15.99	15.98	15.99	15.85
		360°	18.92	15.91	15.88	15.85	15.86	15.81
		JUU	10.92	10.81	10.00	10.00	10.00	13.01

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司



Page: 64 of 124

Tablet to Lid close

Antenna	Operation mode	Lid angle	802.11b	WiFi n(40M) 5.2G	WiFi ac(80M) 5.2G	WiFi n(40M) 5.3G	WiFi ac(80M) 5.6G	WiFi ac(80M) 5.8G
7 titorina	opolation mode	360°	18.82	15.86	15.88	15.89	16.88	16.41
		359°	18.83	15.92	15.97	15.86	16.87	16.39
		358°	18.98	15.93	15.88	15.93	16.85	16.36
		357°	18.83	15.95	15.94	15.82	16.81	16.36
		356°	18.95	15.81	15.81	15.84	16.82	16.38
		355°	18.82	15.89	15.96	16.00	16.94	16.43
		345°	18.89	15.89	15.89	15.87	16.93	16.41
		335°	19.00	15.94	15.89	15.83	16.87	16.37
		325°	18.82	15.94	15.87	15.83	17.00	16.33
		315°	18.81	15.86	15.92	15.87	16.91	16.36
		305°	18.88	15.93	15.97	15.94	16.93	16.37
		295°	18.96	15.86	15.99	15.84	16.82	16.40
		285°	19.00	15.94	15.98	15.96	16.98	16.47
		275°	18.83	15.81	15.90	15.89	16.95	16.40
	Tablet mode	265°	18.82	15.88	15.91	15.82	16.84	16.37
		255°	18.97	15.97	15.97	15.97	16.95	16.31
		245°	18.97	15.93	15.85	15.95	16.88	16.47
		235°	18.83	15.94	15.95	15.95	16.98	16.49
		225°	18.89	15.81	15.97	15.96	16.94	16.48
		215°	18.86	15.90	15.98	15.90	16.91	16.45
		205°	18.85	15.86	15.90	15.83	16.96	16.43
		195°	18.84	15.83	15.95	15.82	16.94	16.47
		185°	18.98	15.94	15.88	15.84	16.95	16.45
		175°	18.89	15.92	15.88	15.89	16.83	16.40
		165°	18.83	15.84	15.87	16.00	16.90	16.36
		164°	18.90	15.95	15.97	15.81	16.82	16.35
		163°	18.92	15.85	15.82	15.82	16.91	16.37
		162°	18.95	15.96	15.85	16.00	16.84	16.42
		161°	18.92	15.91	15.90	15.93	16.91	16.46
		160°	20.40	18.81	17.44	18.36	20.42	18.33
		159°	20.35	18.92	17.38	18.37	20.35	18.33
		158°	20.43	18.83	17.39	18.43	20.39	18.48
MU AN TWO		157°	20.48	18.88	17.47	18.41	20.46	18.32
WLAN TX2		156°	20.50	18.81	17.33	18.31	20.42	18.43
		155°	20.33	18.94	17.35	18.34	20.35	18.32
		145°	20.40	18.84	17.38	18.49	20.40	18.38
		135°	20.46	18.97	17.31	18.42	20.39	18.50
		125°	20.34	18.86	17.38	18.45	20.31	18.31
		115°	20.31	18.99	17.45	18.38	20.42	18.40
		105°	20.35	18.82	17.45	18.31	20.39	18.34
	Laptop mode	95°	20.33	18.89	17.48	18.46	20.38	18.34
	Laptop Hode	85°	20.31	18.93	17.33	18.35	20.40	18.46
		75°	20.38	18.84	17.36	18.37	20.44	18.45
		65°	20.38	18.92	17.46	18.38	20.42	18.50
		55°	20.36	18.89	17.48	18.50	20.42	18.50
		45°	20.50	18.82	17.36	18.32	20.39	18.41
		35°	20.46	18.90	17.48	18.50	20.47	18.45
		25°	20.49	18.99	17.50	18.34	20.47	18.38
		17.5°	20.39	18.90	17.34	18.42	20.39	18.38
		16.5°	20.49	18.93	17.41	18.49	20.38	18.41
		15.5°	20.43	18.87	17.43	18.36	20.41	18.42
		14.5°	20.39	19.00	17.40	18.33	20.34	18.44
		13.5°	20.48	18.85	17.45	18.47	20.49	18.31
		12.5°	n/a	n/a	n/a	n/a	n/a	n/a
		11°	n/a	n/a	n/a	n/a	n/a	n/a
		10°	n/a	n/a	n/a	n/a	n/a	n/a
		9°	n/a	n/a	n/a	n/a	n/a	n/a
		8°	n/a	n/a	n/a	n/a	n/a	n/a
		7°	n/a	n/a	n/a	n/a	n/a	n/a
	Lid close	6°	n/a	n/a	n/a	n/a	n/a	n/a
		5°	n/a	n/a	n/a	n/a	n/a	n/a
		4°	n/a	n/a	n/a	n/a	n/a	n/a
		3°	n/a	n/a	n/a	n/a	n/a	n/a
	1	2°	n/a	n/a	n/a	n/a	n/a	n/a
		1°	n/a	n/a	n/a	n/a	n/a	n/a

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be presectived to the fullers extent of the leave. prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134, Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號 t (886-2) 2299-3279 www.tw.sgs.com



Page: 65 of 124

Antenna	Operation mode	Lid angle	802.11b	WiFi n(40M) 5.2G	WiFi ac(80M) 5.2G	WiFi n(40M) 5.3G	WiFi ac(80M) 5.6G	WiFi ac(80M) 5.8G
		360°	18.88	15.82	15.82	16.00	15.83	15.82
		359°	18.95	15.94	15.92	15.91	15.84	15.87
		358°	18.81	15.86	15.86	15.97	15.93	15.92
		357°	18.91	15.95	15.97	15.90	15.95	15.83
		356°	18.81	15.91	15.87	15.91	15.97	15.91
		355°	18.90	15.94	15.86	15.98	15.82	15.92
		345°	18.87	15.89	15.95	15.83	15.90	15.83
		335°	18.89	15.98	15.89	15.87	15.89	15.90
		325°	18.88	15.81	16.00	15.86	15.92	15.99
		315°	18.84	15.92	15.99	15.97	15.89	15.82
		305°	18.94	15.82	15.84	15.94	15.96	15.98
		295°	18.91	15.86	15.93	15.97	15.85	15.82
		285°	18.84	15.91	15.91	15.86	15.91	15.91
		275°	18.87	15.83	15.93	15.88	15.86	15.87
	Tablet mode	265°	18.81	15.82	16.00	15.84	15.83	15.96
		255°	18.98	15.87	15.93	15.84	15.88	15.81
		245°	18.84	15.89	15.97	15.85	15.98	15.92
		235°	18.98	15.91	15.81	15.99	15.88	15.84
		225°	19.00	15.87	15.85	15.95	15.83	15.95
		215°	18.92	15.83	15.99	15.83	16.00	15.97
		205°	18.95	15.85	15.85	15.94	15.91	15.84
		195°	19.00	15.82	15.98	15.82	15.82	15.83
		185°	18.81	15.82	15.93	15.93	15.84	15.97
		175°	18.97	15.99	15.91	15.91	15.98	15.84
		165°	18.91	15.89	15.86	15.99	15.91	15.88
		164°	18.85	15.91	15.93	15.96	15.88	15.98
		163°	18.92	15.88	15.90	16.00	15.92	15.82
		162°	18.98	15.85	15.96	15.88	15.91	15.96
		161°	18.81	15.89	15.94	15.94	15.98	15.99
		160°	20.48	19.39	17.99	18.49	20.41	18.97
		159°	20.46	19.33	17.86	18.41	20.46	18.91
		158°	20.46	19.36	17.85	18.34	20.46	18.98
					17.96			
WLAN TX1		157° 156°	20.35 20.49	19.42 19.48	17.99	18.39 18.44	20.34 20.38	18.82 18.84
		155°	20.49	19.49	17.99	18.38		18.89
							20.38	
		145° 135°	20.39 20.47	19.50 19.40	17.95 17.97	18.39 18.36	20.34 20.40	18.87 18.93
		125°	20.47	19.32	17.92	18.41	20.43	18.85
		115° 105°	20.34	19.40 19.41	17.81	18.47	20.39	18.85
			20.41		17.96	18.34	20.39	18.89
	Laptop mode	95°	20.41	19.47	17.97	18.31	20.39	18.94
		85°	20.50	19.38	17.81	18.48	20.39	18.85
		75°	20.35	19.42	17.94	18.36	20.39	18.99
		65°	20.34	19.32	17.92	18.50	20.34	18.95
		55°	20.46	19.45	17.91	18.41	20.38	18.89
		45°	20.43	19.31	17.91	18.46	20.49	18.90
		35°	20.50	19.34	17.95	18.47	20.38	18.82
		25°	20.38	19.32	17.84	18.48	20.36	18.97
		17.5°	20.31	19.47	17.87	18.41	20.34	18.82
		16.5°	20.33	19.43	17.87	18.35	20.37	18.84
		15.5°	20.33	19.43	17.95	18.36	20.46	18.84
		14.5°	20.48	19.31	17.88	18.48	20.37	19.00
		13.5°	20.44	19.34	17.85	18.50	20.42	18.96
		12.5°	n/a	n/a	n/a	n/a	n/a	n/a
		11°	n/a	n/a	n/a	n/a	n/a	n/a
		10°	n/a	n/a	n/a	n/a	n/a	n/a
		9°	n/a	n/a	n/a	n/a	n/a	n/a
		8°	n/a	n/a	n/a	n/a	n/a	n/a
		7°	n/a	n/a	n/a	n/a	n/a	n/a
	Lid close	6°	n/a	n/a	n/a	n/a	n/a	n/a
		5°	n/a	n/a	n/a	n/a	n/a	n/a
		4°	n/a	n/a	n/a	n/a	n/a	n/a
		3°	n/a	n/a	n/a	n/a	n/a	n/a
	ŀ							
		2°	n/a	n/a	n/a	n/a	n/a	n/a
		2° 1°	n/a n/a	n/a n/a	n/a n/a	n/a n/a	n/a n/a	n/a n/a

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司



Page: 66 of 124

1.7 The SAR Measurement System

A block diagram of the SAR measurement System is given in Fig. a. This SAR Measurement System uses a Computer-controlled 3-D stepper motor system (SPEAG DASY 5 professional system). The model EX3DV4 field probe is used to determine the internal electric fields. The SAR can be obtained from the equation SAR= σ ($|E|^2$)/ ρ where σ and ρ are the conductivity and mass density of the tissue-simulant.

The DASY 5 system for performing compliance tests consists of the following items:

- 1. A standard high precision 6-axis robot (Staubli RX family) with controller, teach pendant and software. An arm extension is for accommodating the data acquisition electronics (DAE).
- A dosimetric probe, i.e., an isotropic E-field probe optimized and calibrated for usage intissue simulating liquid. The probe is equipped with an optical surface detector system.
- 3. A data acquisition electronics (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.

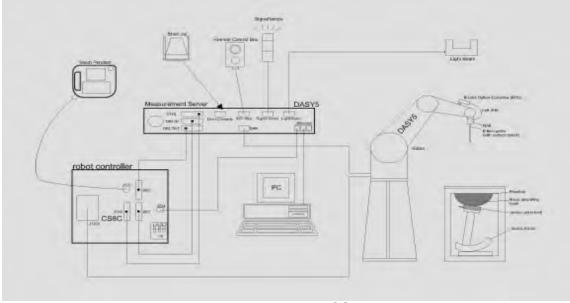


Fig. a The block diagram of SAR system

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非早有說明,併報生结果僅對測試之樣是負責,同時什樣是僅保留的主。太報生主领太公司書面許可,不可報的複製。

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留⁹⁰天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_and_conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_and_conditions.htm and for electronic format documents, subject to Terms and Conditions.htm and for electronic format therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134.Wu Kung Road. New Taipei Industrial Park. Wuku District. New Taipei City. Taiwan 24803/新北市五股區新北產業園區五工路 134 號

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號 t (886-2) 2299-3279 f (886-2) 2298-0488 www.tw.sqs.com



Page: 67 of 124

- 4. The Electro-optical converter (EOC) performs the conversion between optical and electrical of the signals for the digital communication to the DAE and for the analog signal from the optical surface detection. The EOC is connected to the measurement server.
- 5. The function of the measurement server is to perform the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
- 6. A probe alignment unit which improves the (absolute) accuracy of the probe positioning.
- 7. A computer operating Windows 7.
- 8. DASY 5 software.
- 9. Remote control with teach pendant and additional circuitry for robot safety such as warning lamps, etc.
- 10. Tissue simulating liquid mixed according to the given recipes.
- 11. Validation dipole kits allowing to validate the proper functioning of the system.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非早有铅明,件据华结里体影响对了样品色青,同時件样品体保留的子。未据华主领木公司事而许可,不可部份被制。

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 68 of 124

1.8 System Components

EX3DV4 E-Field Probe

Construction	Symmetrical design with triangular core Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., DGBE)					
Calibration	Basic Broad Band Calibration in air Conversion Factors (CF) for HSL 2450/5200/5300/5600/5800 MHz Additional CF for other liquids and frequencies upon request					
Frequency	10 MHz to > 6 GHz					
Directivity	± 0.3 dB in HSL (rotation around probe axis) ± 0.5 dB in tissue material (rotation normal to probe axis)					
Dynamic	10 μW/g to > 100 mW/g					
Range	Linearity: ± 0.2 dB (noise: typically < 1 μW/g)					
Dimensions	Tip diameter: 2.5 mm					
Application	High precision dosimetric measurements in any exposure scenario (e.g., very strong gradient fields). Only probe which enables compliance testing for frequencies up to 6 GHz with precision of better 30%.					

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司



Page: 69 of 124

PHANTOM

FITANTOW		
Model	ELI	
Construction	body-mounted wireless device to 6 GHz. ELI is fully co standard and all known tissue optimized regarding its perform our standard phantom tables. A liquid. Reference markings or the complete setup, including	compliance testing of handheld and is in the frequency range of 30 MHz in the frequency range of the frequency freque
Shell	2 ± 0.2 mm	
Thickness		
Filling Volume	Approx. 30 liters	
Dimensions	Major axis: 600 mm	E Brance manual 2 4
	Minor axis: 400 mm	

DEVICE HOLDER

DEVICE HOLL)LN	
Construction	The device holder (Supporter) for Notebook is made by POM (polyoxymethylene resin), which is non-metal and non-conductive. The height can be adjusted to fit varies kind of notebooks.	Device Holder

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 70 of 124

1.9 SAR System Verification

The microwave circuit arrangement for system verification is sketched in Fig. b. The daily system accuracy verification occurs within the flat section of the SAM phantom. A SAR measurement was performed to see if the measured SAR was within +/- 10% from the target SAR values. These tests were done at 2450/5200/5300/5600/5800 MHz. The tests were conducted on the same days as the measurement of the DUT. The obtained results from the system accuracy verification are displayed in the table 1 (SAR values are normalized to 1W forward power delivered to the dipole). During the tests, the liquid depth above the ear reference points was \geq 15 cm \pm 5 mm (frequency \leq 3 GHz) or \geq 10 cm \pm 5 mm (frequency > 3 G Hz) in all the cases. It is seen that the system is operating within its specification, as the results are within acceptable tolerance of the reference values.

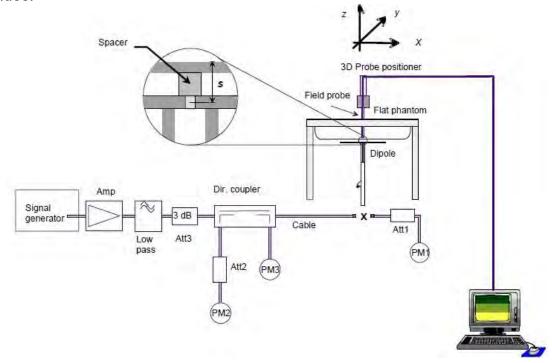


Fig. b The block diagram of system verification

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非早有說明,併報生结果僅對測試之樣是負責,同時什樣是僅保留的主。太報生主领太公司書面許可,不可報的複製。

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司



Page: 71 of 124

Validation Kit	S/N	Frequency (MHz)						1W Target SAR-1g (mW/g)	Pin=250mW Measured SAR-1g (mW/g)	Measured SAR-1g normalized to 1W (mW/g)	Deviation (%)	Measured Date
D2450V2	835	2450 Body		50.8	13.1	52.4	3.15%	Jul. 04, 2019				
Validation Kit	S/N	Frequency (MHz)		1W Target SAR-1g (mW/g)	Pin=100mW Measured SAR-1g (mW/g)	Measured SAR-1g normalized to 1W (mW/g)	Deviation (%)	Measured Date				
		5200	Body	75.2	7.37	73.7	-1.99%	Jul. 05, 2019				
D5GHzV2	1040	5300	Body	76.4	7.37	73.7	-3.53%	Jul. 06, 2019				
DOGNZVZ	1040	5600	Body	81.5	7.95	79.5	-2.45%	Jul. 07, 2019				
		5800		77.3	7.43	74.3	-3.88%	Jul. 08, 2019				

Table 1. Results of system validation

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 72 of 124

1.10 Tissue Simulant Fluid for the Frequency Band

The dielectric properties for this Head-simulant fluid were measured by using the Agilent Model 85070E Dielectric Probe (rates frequency band 200 MHz to 20 GHz) in conjunction with Network Analyzer.

All dielectric parameters of tissue simulates were measured within 24 hours of SAR measurements. The measured conductivity and permittivity are all within \pm 5% of the target values.

The depth of the tissue simulant in the flat section of the phantom was ≥ 15 cm ± 5 mm (Frequency $\leq 3G$) or ≥ 10 cm ± 5 mm (Frequency $\geq 3G$) during all tests. (Fig. 2)

Tissue Type	Measurement Date	Measured Frequency (MHz)	Target Dielectric Constant, Er	Target Conductivity, σ (S/m)	Measured Dielectric Constant, Er	Measured Conductivity, σ (S/m)	% dev εr	% dev σ
		2402	52.764	1.904	53.998	1.884	2.34%	-1.06%
		2412	52.751	1.914	53.968	1.895	2.31%	-0.98%
		2417	52.744	1.918	53.942	1.898	2.27%	-1.07%
		2437	52.717	1.938	53.916	1.916	2.27%	-1.11%
	Jul. 04, 2019	2441	52.712	1.941	53.906	1.920	2.27%	-1.10%
		2450	52.700	1.950	53.901	1.929	2.28%	-1.08%
		2457	52.691	1.960	53.891	1.930	2.28%	-1.53%
		2462	52.685	1.967	53.882	1.931	2.27%	-1.83%
		2480	52.662	1.993	53.874	1.933	2.30%	-2.99%
		5190	49.028	5.288	49.677	5.124	1.32%	-3.09%
		5200	49.014	5.299	49.598	5.127	1.19%	-3.25%
		5210	49.001	5.311	49.538	5.121	1.10%	-3.58%
	Jul. 05, 2019	5220	48.987	5.323	49.568	5.193	1.19%	-2.44%
		5230	48.974	5.334	49.459	5.181	0.99%	-2.87%
		5240	48.960	5.346	49.639	5.233	1.39%	-2.11%
		5260	48.933	5.369	49.490	5.180	1.14%	-3.53%
Body		5270	48.919	5.381	49.340	5.265	0.86%	-2.16%
	Jul. 06, 2019	5280	48.906	5.393	49.303	5.270	0.81%	-2.28%
		5300	48.879	5.416	49.291	5.273	0.84%	-2.64%
		5320	48.851	5.439	49.302	5.328	0.92%	-2.05%
		5530	48.566	5.685	49.291	5.743	1.49%	1.03%
		5550	48.539	5.708	49.288	5.751	1.54%	0.75%
	Jul. 07, 2019	5600	48.471	5.766	48.430	5.765	-0.09%	-0.02%
		5670	48.376	5.848	48.353	5.871	-0.05%	0.39%
		5690	48.349	5.872	48.173	5.869	-0.36%	-0.04%
		5710	48.322	5.895	47.963	5.966	-0.74%	1.21%
		5745	48.275	5.936	47.950	5.975	-0.67%	0.66%
		5755	48.261	5.947	47.940	5.989	-0.67%	0.70%
	1 1 00 2012	5775	48.234	5.971	47.971	6.037	-0.55%	1.11%
	Jul. 08, 2019	5785	48.220	5.982	47.801	6.046	-0.87%	1.06%
		5795	48.207	5.994	47.702	6.032	-1.05%	0.63%
		5800	48.200	6.000	47.987	6.014	-0.44%	0.23%
		5825	48.166	6.029	47.977	6.022	-0.39%	-0.12%

Table 2. Dielectric Parameters of Tissue Simulant Fluid

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非只有铅明,件据华廷用属影测建文样具色素,同时件样具属是例如于。大规华主领大公司隶高纯可,不可如设施制。

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 73 of 124

The composition of the tissue simulating liquid:

-		Ingredient							
Frequency (MHz)	Mode	DGMBE	Water	Salt	Preventol D-7	Cellulose	Sugar	Total amount	
2450M	Body	301.7ml	698.3ml		_	_		1.0L(Kg)	

Body Simulating Liquids for 5 GHz. Manufactured by SPEAG:

Ingredients	Water	Esters, Emulsifiers, Inhibitors	Sodium and Salt
(% by weight)	60-80	20-40	0-1.5

Table 3. Recipes for Tissue Simulating Liquid

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134, Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號 www.tw.sas.com



Page: 74 of 124

1.11 Evaluation Procedures

The entire evaluation of the spatial peak values is performed within the Post-processing engine (SEMCAD). The system always gives the maximum values for the 1 g and 10 g cubes. The algorithm to find the cube with highest averaged SAR is divided into the following stages:

- 1. The extraction of the measured data (grid and values) from the Zoom Scan.
- 2. The calculation of the SAR value at every measurement point based on all stored data (A/D values and measurement parameters)
- 3. The generation of a high-resolution mesh within the measured volume
- 4. The interpolation of all measured values from the measurement grid to the high-resolution grid
- 5. The extrapolation of the entire 3-D field distribution to the phantom surface over the distance from sensor to surface
- 6. The calculation of the averaged SAR within masses of 1g and 10g.

The probe is calibrated at the center of the dipole sensors that is located 1 to 2.7mm away from the probe tip. During measurements, the probe stops shortly above the phantom surface, depending on the probe and the surface detecting system. Both distances are included as parameters in the probe configuration file. The software always knows exactly how far away the measured point is from the surface. As the probe cannot directly measure at the surface, the values between the deepest measured point and the surface must be extrapolated. The angle between the probe axis and the surface normal line is less than 30 degree.

In the Area Scan, the gradient of the interpolation function is evaluated to find all the extreme of the SAR distribution. The uncertainty on the locations of the extreme is less than 1/20 of the grid size. Only local maximum within –2 dB of the global maximum are searched and passed for the Cube Scan measurement. In the Cube Scan, the interpolation function is used to extrapolate the Peak SAR from the lowest measurement points to the inner phantom surface (the extrapolation distance). The uncertainty increases with the extrapolation distance. To keep the uncertainty within 1% for the 1 g and 10 g cubes, the extrapolation distance should not be larger than 5mm.

The maximum search is automatically performed after each area scan measurement. It is based on splines in two or three dimensions. The procedure can find the maximum for most SAR distributions even with relatively large grid spacing. After the area scanning measurement, the probe is automatically moved to a position at the interpolated maximum. The following scan can directly use this position for reference, e.g., for a finer resolution grid or the cube evaluations. The 1g and 10g peak evaluations are only available for the predefined cube 7x7x7 scans. The routines are verified and optimized for the grid dimensions used in these cube measurements.

The measured volume of 30x30x30mm contains about 30g of tissue.

The first procedure is an extrapolation (incl. Boundary correction) to get the points between the lowest measured plane and the surface. The next step uses 3D

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非兄有论明,此都华结里做影测过之缘是台書,同時什樣是做保留00千。木都华未领太公司書面纯可,不可部份複製。

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司



Page: 75 of 124

interpolation to get all points within the measured volume. In the last step, a 1g cube is placed numerically into the volume and its averaged SAR is calculated. This cube is the moved around until the highest averaged SAR is found. If the highest SAR is found at the edge of the measured volume, the system will issue a warning: higher SAR values might be found outside of the measured volume. In that case the cube measurement can be repeated, using the new interpolated maximum as the center.

1.12 Probe Calibration Procedures

For the calibration of E-field probes in lossy liquids, an electric field with an accurately known field strength must be produced within the measured liquid. For standardization purposes it would be desirable if all measurements which are necessary to assess the correct field strength would be traceable to standardized measurement procedures. In the following two different calibration techniques are summarized:

1.12.1 Transfer Calibration with Temperature Probes

In lossy liquids the specific absorption rate (SAR) is related both to the electric field (E) and the temperature gradient (δ^{7}/δ^{t}) in the liquid.

$$SAR = C \frac{\delta T}{\delta t}$$
,

whereby σ is the conductivity, ρ the density and c the heat capacity of the liquid.

Hence, the electric field in lossy liquid can be measured indirectly by measuring the temperature gradient in the liquid. Non-disturbing temperature probes (optical probes or thermistor probes with resistive lines) with high spatial resolution (<1-2 mm) and fast reaction time (<1 s) are available and can be easily calibrated with high precision [1]. The setup and the exciting source have no influence on the calibration; only the relative positioning uncertainties of the standard temperature probe and the E-field probe to be calibrated must be considered. However, several problems limit the available accuracy of probe calibrations with temperature probes:

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sqs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 76 of 124

 The temperature gradient is not directly measurable but must be evaluated from temperature measurements at different time steps. Special precaution is necessary to avoid measurement errors caused by temperature gradients due to energy equalizing effects or convection currents in the liquid. Such effects cannot be completely avoided, as the measured field itself destroys the thermal equilibrium in the liquid. With a careful setup these errors can be kept small.

- The measured volume around the temperature probe is not well defined. It is difficult to calculate the energy transfer from a surrounding gradient temperature field into the probe. These effects must be considered, since temperature probes are calibrated in liquid with homogeneous temperatures. There is no traceable standard for temperature rise measurements.
- The calibration depends on the assessment of the specific density, the heat capacity and the conductivity of the medium. While the specific density and heat capacity can be measured accurately with standardized procedures ($\sim 2\%$ for c; much better for ρ), there is no standard for the measurement of the conductivity. Depending on the method and liquid, the error can well exceed ±5%.
- Temperature rise measurements are not very sensitive and therefore are often performed at a higher power level than the E-field The nonlinearities in the system (e.g., measurements. measurements, different components, etc.) must be considered.

Considering these problems, the possible accuracy of the calibration of E-field probes with temperature gradient measurements in a carefully designed setup is about ±10% (RSS) [2]. Recently, a setup which is a combination of the waveguide techniques and the thermal measurements was presented in [3]. The estimated uncertainty of the setup is ±5% (RSS) when the same liquid is used for the calibration and for actual measurements and ±7-9% (RSS) when not, which is in good agreement with the estimates given in [2].

1.12.2 Calibration with Analytical Fields

In this method a technical setup is used in which the field can be calculated analytically from measurements of other physical magnitudes (e.g., input power). This corresponds to the standard field method for probe calibration in air; however, there is no standard defined for fields in lossy liquids. When using calculated fields in lossy liquids for probe calibration, several points must be considered in the assessment of the uncertainty:

- The setup must enable accurate determination of the incident power.
- The accuracy of the calculated field strength will depend on the assessment of the dielectric parameters of the liquid.
- Due to the small wavelength in liquids with high permittivity, even small

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

> SGS Taiwan Ltd. No.134, Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號 t (886-2) 2299-3279 f (886-2) 2298-0488



Page: 77 of 124

setups might be above the resonant cutoff frequencies. The field distribution in the setup must be carefully checked for conformity with the theoretical field distribution.

References

- 1. N. Kuster, Q. Balzano, and J.C. Lin, Eds., Mobile Communications Safety, Chapman & Hall, London, 1997.
- 2. K. Meier, M. Burkhardt, T. Schmid, and N. Kuster, \Broadband calibration of E-field probes in lossy media", IEEE Transactions on Microwave Theory and Techniques, vol. 44, no. 10, pp. 1954{1962, Oct. 1996.
- 3. K. Jokela, P. Hyysalo, and L. Puranen, \Calibration of specific absorption rate (SAR) probes in waveguide at 900 MHz", IEEE Transactions on Instrumentation and Measurements, vol. 47, no. 2, pp. 432{438, Apr. 1998.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sqs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司



Page: 78 of 124

1.13 Test Standards and Limits

According to FCC 47CFR §2.1093(d) The limits to be used for evaluation are based generally on criteria published by the American National Standards Institute (ANSI) for localized specific absorption rate ("SAR") in Section 4.2 of "IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz," ANSI/IEEE C95.1, By the Institute of Electrical and Electronics Engineers, Inc., New York, New York 10017. These criteria for SAR evaluation are similar to those recommended by the National Council on Radiation Protection and Measurements (NCRP) in "Biological Effects and Exposure Criteria for Radio frequency Electromagnetic Fields," NCRP Report No. 86, Section 17.4.5. Copyright NCRP, 1986, Bethesda, Maryland 20814. SAR is a measure of the rate of energy absorption due to exposure to an RF transmitting source. SAR values have been related to threshold levels for potential biological hazards. The criteria to be used are specified in paragraphs (d)(1) and (d)(2) of this section and shall apply for portable devices transmitting in the frequency range from 100 kHz to 6 GHz. Portable devices that transmit at frequencies above 6 GHz are to be evaluated in terms of the MPE limits specified in § 1.1310 of this chapter. Measurements and calculations to demonstrate compliance with MPE field strength or power density limits for devices operating above 6 GHz should be made at a minimum distance of 5 cm from the radiating source.

- Limits for Occupational/Controlled exposure: 0.4 W/kg as averaged over the whole-body and spatial peak SAR not exceeding 8 W/kg as averaged over any 1 gram of tissue (defined as a tissue volume in the shape of a cube). Exceptions are the hands, wrists, feet and ankles where the spatial peak SAR shall not exceed 20 W/kg, as averaged over an 10 grams of tissue (defined as a tissue volume in the shape of a cube).
- Occupational/Controlled limits apply when persons are exposed as a consequence of their employment provided these persons are fully aware of and exercise control over their exposure. Awareness of exposure can be accomplished by use of warning labels or by specific training or education through appropriate means, such as an RF safety program in a work environment.
- Limits for General Population/Uncontrolled exposure: 0.08 W/kg as averaged over the whole-body and spatial peak SAR not exceeding 1.6 W/kg as averaged over any 1 gram of tissue (defined as a tissue volume in the shape of a cube). Exceptions are the hands, wrists, feet and ankles where the spatial peak SAR shall not exceed 4 W/kg, as averaged over any 10 grams of tissue (defined as a tissue volume in the shape of a cube). General Population/Uncontrolled limits apply when the general public may be exposed, or when persons that are exposed as a consequence of their employment may not be fully aware of the potential for exposure or do not

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 1 台灣檢驗科技股份有限公司



Page: 79 of 124

exercise control over their exposure. Warning labels placed on consumer devices such as cellular telephones will not be sufficient reason to allow these devices to be evaluated subject to limits for occupational/controlled exposure in paragraph (d)(1) of this section. (Table 4.)

Human Exposure	Uncontrolled Environment General Population	Controlled Environment Occupational		
Spatial Peak SAR (Brain)	1.60 W/kg	8.00 W/kg		
Spatial Average SAR (Whole Body)	0.08 W/kg	0.40 W/kg		
Spatial Peak SAR (Hands/Feet/Ankle/Wrist)	4.00 W/kg	20.00 W/kg		

Table 4. RF exposure limits

Notes:

- 1. Uncontrolled environments are defined as locations where there is potential exposure of individuals who have no knowledge or control of their potential exposure.
- 2. Controlled environments are defined as locations where there is potential exposure of individuals who have knowledge of their potential exposure and can exercise control over their exposure.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sqs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

No.134, Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號 t (886-2) 2299-3279



Page: 80 of 124

2. Summary of Results

2.1 Decision rules

Reported measurement data comply with IEEE 1528-2013: Determining compliance shall be based on the results of the compliance measurement, not taking into account measurement instrumentation uncertainty.

2.2 Summary of Results

HTK

TX2 Antenna (Tablet mode)

Antenna	Mode	Position	Distance (mm)	СН	Freq.	Max. Rated Avg. Power + Max.	Measured Avg. Power	Scaling	Averaged S (W		Plot
			(111111)		(IVII IZ)	Tolerance (dBm)	(dBm)		Measured	Reported	page
		Back side	0	1	2412	19.00	18.99	100.23%	0.097	0.097	-
		Top side	0	1	2412	19.00	18.99	100.23%	0.562	0.563	92
	WLAN 802.11b	Bottom side	0	1	2412	19.00	18.99	100.23%	0.010	0.010	-
		Right side	0	1	2412	19.00	18.99	100.23%	0.068	0.068	-
		Left side	0	1	2412	19.00	18.99	100.23%	0.151	0.151	-
		Back side	0	42	5210	16.00	15.99	100.23%	0.036	0.036	-
		Top side	0	42	5210	16.00	15.99	100.23%	1.130	1.133	93
	WLAN 802.11ac(80M) 5.2G	Top side*	0	42	5210	16.00	15.99	100.23%	1.110	1.113	-
	WLAN 602. I Tac(60IVI) 5.2G	Bottom side	0	42	5210	16.00	15.99	100.23%	0.001	0.001	-
		Right side	0	42	5210	16.00	15.99	100.23%	0.010	0.010	-
		Left side	0	42	5210	16.00	15.99	100.23%	0.190	0.190	-
		Back side	0	60	5300	16.00	15.99	100.23%	0.038	0.038	-
		Top side	0	52	5260	16.00	15.98	100.46%	1.040	1.045	-
		Top side	0	60	5300	16.00	15.99	100.23%	1.150	1.153	94
	WLAN 802.11a 5.3G	Top side*	0	60	5300	16.00	15.99	100.23%	1.040	1.042	-
		Bottom side	0	60	5300	16.00	15.99	100.23%	0.001	0.001	-
		Right side	0	60	5300	16.00	15.99	100.23%	0.010	0.010	-
		Left side	0	60	5300	16.00	15.99	100.23%	0.195	0.195	-
		Back side	0	54	5270	16.00	15.98	100.46%	0.035	0.035	-
TX2		Top side	0	54	5270	16.00	15.98	100.46%	1.130	1.135	95
		Top side*	0	54	5270	16.00	15.98	100.46%	1.030	1.035	-
	WLAN 802.11n(40M) 5.3G	Top side	0	62	5310	14.50	14.22	106.66%	0.802	0.855	-
		Bottom side	0	54	5270	16.00	15.98	100.46%	0.001	0.001	-
		Right side	0	54	5270	16.00	15.98	100.46%	0.011	0.011	-
		Left side	0	54	5270	16.00	15.98	100.46%	0.191	0.192	-
		Back side	0	106	5530	17.00	16.97	100.69%	0.038	0.038	-
		Top side	0	106	5530	17.00	16.97	100.69%	1.150	1.158	-
		Top side	0	138	5690	17.00	16.96	100.93%	1.180	1.191	96
	WLAN 802.11ac(80M) 5.6G	Top side*	0	138	5690	17.00	16.96	100.93%	1.170	1.181	-
		Bottom side	0	106	5530	17.00	16.97	100.69%	0.001	0.001	-
		Right side	0	106	5530	17.00	16.97	100.69%	0.011	0.011	-
		Left side	0	106	5530	17.00	16.97	100.69%	0.201	0.202	-
		Back side	0	155	5775	16.50	16.49	100.23%	0.028	0.028	-
		Top side	0	155	5775	16.50	16.49	100.23%	0.886	0.888	97
		Top side*	0	155	5775	16.50	16.49	100.23%	0.870	0.872	-
	WLAN 802.11ac(80M) 5.8G	Bottom side	0	155	5775	16.50	16.49	100.23%	0.001	0.001	-
		Right side	0	155	5775	16.50	16.49	100.23%	0.008	0.008	-
		Left side	0	155	5775	16.50	16.49	100.23%	0.152	0.152	-

^{* -} repeated at the highest SAR measurement according to the KDB 865664 D01

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sqs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 81 of 124

TX1 Antenna (Tablet mode)

Antenna	Mode	Position	Distance	СН	Freq.	Max. Rated Avg. Power + Max.	Measured Avg. Power	Scaling		SAR over 1g /kg)	Plot
			(mm)		(MHz)	Tolerance (dBm)	(dBm)		Measured	Reported	page
		Back side	0	1	2412	19.00	18.99	100.23%	0.115	0.115	-
		Top side	0	1	2412	19.00	18.99	100.23%	0.667	0.669	98
		Top side	0	6	2437	19.00	18.96	100.93%	0.655	0.661	-
	WLAN 802.11b	Top side	0	11	2462	19.00	18.98	100.46%	0.642	0.645	-
		Bottom side	0	1	2412	19.00	18.99	100.23%	0.040	0.040	-
		Right side	0	1	2412	19.00	18.99	100.23%	0.195	0.195	-
		Left side	0	1	2412	19.00	18.99	100.23%	0.104	0.104	-
		Back side	0	0	2402	9.50	9.42	101.86%	0.010	0.010	-
		Top side	0	0	2402	9.50	9.42	101.86%	0.060	0.061	99
	Bluetooth (GFSK)	Bottom side	0	0	2402	9.50	9.42	101.86%	0.004	0.004	-
		Right side	0	0	2402	9.50	9.42	101.86%	0.018	0.018	-
		Left side	0	0	2402	9.50	9.42	101.86%	0.009	0.010	-
		Back side	0	42	5210	16.00	15.97	100.69%	0.049	0.049	-
		Top side	0	42	5210	16.00	15.97	100.69%	1.130	1.138	100
		Top side*	0	42	5210	16.00	15.97	100.69%	1.070	1.077	-
	WLAN 802.11ac(80M) 5.2G	Bottom side	0	42	5210	16.00	15.97	100.69%	0.007	0.007	-
		Right side	0	42	5210	16.00	15.97	100.69%	0.241	0.243	-
		Left side	0	42	5210	16.00	15.97	100.69%	0.032	0.032	-
		Back side	0	60	5300	16.00	15.99	100.23%	0.039	0.039	
		Top side	0	56	5280	16.00	15.98	100.46%	0.865	0.869	
		Top side	0	60	5300	16.00	15.99	100.23%	0.871	0.873	101
		Top side*	0	60	5300	16.00	15.99	100.23%	0.855	0.857	-
TX1	WLAN 802.11a 5.3G	Top side	0	64	5320	16.00	15.98	100.46%	0.862	0.866	-
IXI		Bottom side	0	60	5300	16.00	15.99	100.40%	0.002	0.005	
		Right side	0	60	5300	16.00	15.99	100.23%	0.187	0.187	
		Left side	0	60	5300	16.00	15.99	100.23%	0.026	0.026	
		Back side	0	54	5270	16.00	15.99	100.23%	0.020	0.020	
		Top side	0	54	5270	16.00	15.99	100.23%	0.960	0.962	102
		Top side*	0	54	5270	16.00	15.99	100.23%	0.954	0.956	102
	WLAN 802.11n(40M) 5.3G	Top side	0	62	5310	14.50	14.36	103.28%	0.685	0.707	
	VV LAIV 002. 1 III(40IVI) 3.30	Bottom side	0	54	5270	16.00	15.99	100.23%	0.006	0.006	
		Right side	0	54	5270	16.00	15.99	100.23%	0.206	0.206	
		Left side	0	54	5270	16.00	15.99	100.23%	0.029	0.029	
		Back side	0	138	5690	16.00	15.99	100.23%	0.023	0.023	
		Top side	0	106	5530	16.00	15.98	100.25%	0.809	0.813	
		Top side	0	138	5690	16.00	15.99	100.40%	0.917	0.919	103
	WLAN 802.11ac(80M) 5.6G	Top side*	0	138	5690	16.00	15.99	100.23%	0.908	0.919	103
	1 1 1 1 1 002. I I ac(00101) 5.00	Bottom side	0	138	5690	16.00	15.99	100.23%	0.006	0.006	
		Right side	0	138	5690	16.00	15.99	100.23%	0.006	0.006	-
		Left side	0	138	5690	16.00	15.99	100.23%	0.026	0.026	
		Back side	0	155	5775	16.00	15.99	100.23%	0.026	0.026	
		Top side	0	155	5775	16.00	15.99	100.23%	0.032	0.032	104
	WLAN 802.11ac(80M) 5.8G	Bottom side	0	155	5775	16.00	15.99	100.23%	0.761	0.763	104
	VV LAIN OUZ. I TAU(OUIVI) U.OG	Right side	0	155	5775	16.00	15.99	100.23%	0.005	0.005	-
		Left side	0	155	5775	16.00	15.99	100.23%	0.021	0.021	-
		Lett side	U	155	5//5	16.00	15.99	100.23%	0.021	0.021	- 1

^{* -} repeated at the highest SAR measurement according to the KDB 865664 D01

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 82 of 124

INPAQ

TX2 Antenna (Tablet mode)

Antenna	Mode	Position	Distance (mm)	СН	Freq.	Max. Rated Avg. Power + Max.	Measured Avg. Power	Scaling	Averaged S (W		Plot page
			(111111)		(IVII IZ)	Tolerance (dBm)	(dBm)		Measured	Reported	page
		Back side	0	6	2437	19.00	18.99	100.23%	0.038	0.038	-
		Top side	0	6	2437	19.00	18.99	100.23%	0.273	0.274	105
	WLAN 802.11b	Bottom side	0	6	2437	19.00	18.99	100.23%	0.030	0.030	-
		Right side	0	6	2437	19.00	18.99	100.23%	0.043	0.043	-
		Left side	0	6	2437	19.00	18.99	100.23%	0.162	0.162	-
		Back side	0	42	5210	16.00	15.97	100.69%	0.030	0.030	-
		Top side	0	42	5210	16.00	15.97	100.69%	0.316	0.318	106
	WLAN 802.11ac(80M) 5.2G	Bottom side	0	42	5210	16.00	15.97	100.69%	0.002	0.002	-
		Right side	0	42	5210	16.00	15.97	100.69%	0.001	0.001	-
		Left side	0	42	5210	16.00	15.97	100.69%	0.050	0.050	-
		Back side	0	54	5270	16.00	15.97	100.69%	0.041	0.041	-
		Top side	0	54	5270	16.00	15.97	100.69%	0.431	0.434	107
TX2	WLAN 802.11 n(40M) 5.3G	Bottom side	0	54	5270	16.00	15.97	100.69%	0.003	0.003	-
		Right side	0	54	5270	16.00	15.97	100.69%	0.001	0.001	-
		Left side	0	54	5270	16.00	15.97	100.69%	0.069	0.069	-
		Back side	0	138	5690	17.00	16.99	100.23%	0.038	0.038	-
		Top side	0	138	5690	17.00	16.99	100.23%	0.400	0.401	108
	WLAN 802.11 ac(80M) 5.6G	Bottom side	0	138	5690	17.00	16.99	100.23%	0.003	0.003	-
		Right side	0	138	5690	17.00	16.99	100.23%	0.001	0.001	-
		Left side	0	138	5690	17.00	16.99	100.23%	0.064	0.064	-
		Back side	0	155	5775	16.50	16.46	100.93%	0.032	0.032	-
		Top side	0	155	5775	16.50	16.46	100.93%	0.322	0.325	109
	WLAN 802.11ac(80M) 5.8G	Bottom side	0	155	5775	16.50	16.46	100.93%	0.002	0.002	-
		Right side	0	155	5775	16.50	16.46	100.93%	0.001	0.001	-
		Left side	0	155	5775	16.50	16.46	100.93%	0.052	0.052	-

^{* -} repeated at the highest SAR measurement according to the KDB 865664 D01

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 83 of 124

TX1 Antenna (Tablet mode)

Antenna	Mode	Position	Distance (mm)	СН	Freq.	Max. Rated Avg. Power + Max.	Measured Avg. Power	Scaling	Averaged S (W	AR over 1g /kg)	Plot page
			()		()	Tolerance (dBm)	(dBm)		Measured	Reported	pago
		Back side	0	6	2437	19.00	18.99	100.23%	0.068	0.068	-
		Top side	0	1	2412	19.00	18.98	100.46%	0.422	0.424	-
		Top side	0	6	2437	19.00	18.99	100.23%	0.438	0.439	110
	WLAN 802.11b	Top side	0	11	2462	19.00	18.97	100.69%	0.427	0.430	-
		Bottom side	0	6	2437	19.00	18.99	100.23%	0.036	0.036	-
		Right side	0	6	2437	19.00	18.99	100.23%	0.387	0.388	-
		Left side	0	6	2437	19.00	18.99	100.23%	0.029	0.029	-
		Back side	0	78	2480	9.50	9.43	101.62%	0.007	0.007	-
		Top side	0	78	2480	9.50	9.43	101.62%	0.045	0.046	111
	Bluetooth (GFSK)	Bottom side	0	78	2480	9.50	9.43	101.62%	0.004	0.004	-
		Right side	0	78	2480	9.50	9.43	101.62%	0.041	0.042	-
		Left side	0	78	2480	9.50	9.43	101.62%	0.003	0.003	-
	MU ANI 000 44 (40NA) 5 00	Top side	0	38	5190	16.00	15.97	100.69%	0.790	0.795	112
	WLAN 802.11 n(40M) 5.2G	Top side	0	46	5230	16.00	15.96	100.93%	0.786	0.793	-
	WLAN 802.11ac(80M) 5.2G	Back side	0	42	5210	16.00	15.98	100.46%	0.006	0.006	-
		Top side	0	42	5210	16.00	15.98	100.46%	0.824	0.828	113
		Top side*	0	42	5210	16.00	15.98	100.46%	0.816	0.820	-
TX1		Bottom side	0	42	5210	16.00	15.98	100.46%	0.003	0.003	-
		Right side	0	42	5210	16.00	15.98	100.46%	0.080	0.080	-
		Left side	0	42	5210	16.00	15.98	100.46%	0.024	0.024	-
		Back side	0	54	5270	16.00	15.98	100.46%	0.005	0.005	-
		Top side	0	54	5270	16.00	15.98	100.46%	0.697	0.700	114
	WLAN 802.11n(40M) 5.3G	Bottom side	0	54	5270	16.00	15.98	100.46%	0.003	0.003	-
		Right side	0	54	5270	16.00	15.98	100.46%	0.068	0.068	-
		Left side	0	54	5270	16.00	15.98	100.46%	0.021	0.021	-
		Back side	0	138	5825	16.00	15.99	100.23%	0.005	0.005	-
		Top side	0	138	5825	16.00	15.99	100.23%	0.716	0.718	5
	WLAN 802.11ac(80M) 5.6G	Bottom side	0	138	5825	16.00	15.99	100.23%	0.003	0.003	-
		Right side	0	138	5825	16.00	15.99	100.23%	0.069	0.069	-
		Left side	0	138	5825	16.00	15.99	100.23%	0.022	0.022	-
		Back side	0	155	5775	16.00	15.97	100.69%	0.005	0.005	-
		Top side	0	155	5775	16.00	15.97	100.69%	0.674	0.679	116
	WLAN 802.11ac(80M) 5.8G	Bottom side	0	155	5775	16.00	15.97	100.69%	0.003	0.003	-
		Right side	0	155	5775	16.00	15.97	100.69%	0.065	0.065	-
		Left side	0	155	5775	16.00	15.97	100.69%	0.021	0.021	-

* - repeated at the highest SAR measurement according to the KDB 865664 D01

Scaling =
$$\frac{\text{reported SAR}}{\text{measured SAR}} = \frac{P2(mW)}{P1(mW)} = 10^{\left(\frac{P2-P1}{10}\right)(dBm)}$$

Reported SAR = measured SAR * (scaling)

Where P2 is maximum specified power, P1 is measured conducted power

2.3 Reporting statements of conformity

The conformity statement in this report is based solely on the test results, measurement uncertainty is excluded.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134, Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號



Page: 84 of 124

3. Simultaneous Transmission Analysis

Simultaneous Transmission Scenarios:

Simultaneous Transmit Configurations	Body
2.4GHz WLAN MIMO	Yes
5GHz WLAN MIMO	Yes
BT + 2.4GHz WLAN TX2	Yes
BT + 5GHz WLAN TX2	Yes

Note:

- 1. Bluetooth and WLAN TX1 share the same antenna path, and BT can transmit with WLAN TX2 simultaneously.
- 2. For 2.4/5GHz WLAN TX2 and TX1 antennas, the maximum output power of each antenna during simultaneous transmission is less than that used in standalone transmission, and we used the sum of 1-g SAR provision in KDB447498D01 to exclude the simultaneous transmitted SAR measurement.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sqs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 85 of 124

3.1 Estimated SAR calculation

According to KDB447498 D01v06 – When standalone SAR test exclusion applies to an antenna that transmits simultaneously with other antennas, the standalone SAR must be estimated according to following to determine simultaneous transmission SAR test exclusion:

Estimated SAR =
$$\frac{\text{Max. tune up power (mW)}}{\text{Min. test separation distance(mm)}} \times \frac{\sqrt{\text{f(GHz)}}}{7.5}$$

If the minimum test separation distance is < 5mm, a distance of 5mm is used for estimated SAR calculation. When the test separation distance is >50mm, the 0.4W/kg is used for SAR-1g.

3.2 SPLSR evaluation and analysis

Per KDB447498D01, when the sum of SAR is larger than the limit, SAR test exclusion is determined by the SAR sum to peak location separation ratio(SPLSR).

The simultaneous transmitting antennas in each operating mode and exposure condition combination must be considered one pair at a time to determine the SAR to peak location separation ratio to qualify for test exclusion.

The ratio is determined by (SAR1 + SAR2)^1.5/Ri, rounded to two decimal digits, and must be ≤ 0.04 for all antenna pairs in the configuration to qualify for 1-g SAR test exclusion.

SAR1 and SAR2 are the highest reported or estimated SAR for each antenna in the pair, and Ri is the separation distance between the peak SAR locations for the antenna pair in mm.

When standalone test exclusion applies, SAR is estimated; the peak location is assumed to be at the feed-point or geometric center of the antenna.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sqs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. SGS Taiwan Ltd. No.134, Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號

> t (886-2) 2299-3279 f (886-2) 2298-0488 www.tw.sas.com



Page: 86 of 124

HTK

2.4 GHz WLAN MIMO

===						
No.	Conditions	Position	TX2	TX1	SAR Sum	SPLSR
		Back side	0.097	0.115	0.212	ΣSAR<1.6, Not required
		Top side	0.563	0.669	1.232	ΣSAR<1.6, Not required
1	2.4 GHz WLAN MIMO	Bottom side	0.010	0.040	0.050	ΣSAR<1.6, Not required
		Right side	0.068	0.195	0.263	ΣSAR<1.6, Not required
		Left side	0.151	0.104	0.255	ΣSAR<1.6, Not required

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.




Page: 87 of 124

5 GHz WLAN MIMO

<u> </u>	IZ VILAN MIIMO					
No.	Conditions	Position	TX2	TX1	SAR Sum	SPLSR
		Back side	0.038	0.049	0.087	ΣSAR<1.6, Not required
		Top side	1.191	1.138	2.329	Analyzed as below
2	5 GHz WLAN MIMO	Bottom side	0.001	0.007	0.008	ΣSAR<1.6, Not required
		Right side	0.011	0.243	0.254	ΣSAR<1.6, Not required
		Left side	0.202	0.032	0.234	ΣSAR<1.6, Not required

5 GHz WLAN MIMO

Conditions	Position	SAR Value	Cod	ordinates (d	cm)	ΣSAR (M/kg)	Peak Location Separation	SPLSR	Simultaneous Transmission
		(W/kg)	х	у	Z	(W/kg)	Distance (mm)		SAR Test
WLAN TX2	Top side	1.191	-0.22	-8.82	-0.48	2.329	166.42	0.021	SPLSR<0.04,
WLAN TX1	Top side	1.138	-0.48	8.46	-0.47	2.329	100.42	0.021	Not required

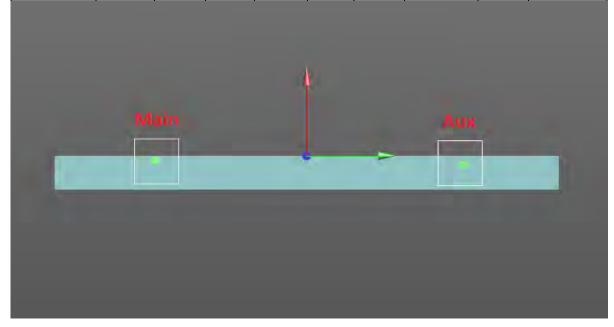

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 88 of 124

BT+ 2.4GHz WLAN TX2

No.	Conditions	Position	TX2	ВТ	SAR Sum	SPLSR
		Back side	0.097	0.010	0.107	ΣSAR<1.6, Not required
		Top side	0.563	0.061	0.624	ΣSAR<1.6, Not required
3	2.4 GHz WLAN TX2 + BT	Bottom side	0.010	0.004	0.014	ΣSAR<1.6, Not required
		Right side	0.068	0.018	0.086	ΣSAR<1.6, Not required
		Left side	0.151	0.010	0.161	ΣSAR<1.6, Not required

BT+5GHz WLAN TX2

	OOTIZ WEATTINE					
No.	Conditions	Position	TX2	ВТ	SAR Sum	SPLSR
4	5 GHz WLAN TX2 + BT	Back side	0.038	0.010	0.048	ΣSAR<1.6, Not required
		Top side	1.191	0.061	1.252	ΣSAR<1.6, Not required
		Bottom side	0.001	0.004	0.005	ΣSAR<1.6, Not required
		Right side	0.011	0.018	0.029	ΣSAR<1.6, Not required
		Left side	0.202	0.010	0.212	ΣSAR<1.6, Not required

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司



Page: 89 of 124

INPAQ

2.4 GHz WI AN MIMO

	2.4 GHZ WEAR MINO							
No.	Conditions	Position	TX2	TX1	SAR Sum	SPLSR		
1	2.4 GHz WLAN MIMO	Back side	0.038	0.068	0.106	ΣSAR<1.6, Not required		
		Top side	0.274	0.439	0.713	ΣSAR<1.6, Not required		
		Bottom side	0.030	0.036	0.066	ΣSAR<1.6, Not required		
		Right side	0.043	0.388	0.431	ΣSAR<1.6, Not required		
		Left side	0.162	0.029	0.191	ΣSAR<1.6, Not required		

5 GHz WLAN MIMO

	OHE WE ALL MINIO							
No.	Conditions	Position	TX2	TX1	SAR Sum	SPLSR		
2	5 GHz WLAN MIMO	Back side	0.041	0.006	0.047	ΣSAR<1.6, Not required		
		Top side	0.434	0.828	1.262	ΣSAR<1.6, Not required		
		Bottom side	0.003	0.003	0.006	ΣSAR<1.6, Not required		
		Right side	0.001	0.080	0.081	ΣSAR<1.6, Not required		
		Left side	0.069	0.024	0.093	ΣSAR<1.6, Not required		

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 90 of 124

BT+ 2.4GHz WLAN TX2

No.	Conditions	Position	TX2	ВТ	SAR Sum	SPLSR
3	2.4 GHz WLAN TX2 + BT	Back side	0.038	0.007	0.045	ΣSAR<1.6, Not required
		Top side	0.274	0.046	0.320	ΣSAR<1.6, Not required
		Bottom side	0.030	0.004	0.034	ΣSAR<1.6, Not required
		Right side	0.043	0.042	0.085	ΣSAR<1.6, Not required
		Left side	0.162	0.003	0.165	ΣSAR<1.6, Not required

BT+5GHz WLAN TX2

<u> </u>	OOTIZ WEAR TAL					
No.	Conditions	Position	TX2	ВТ	SAR Sum	SPLSR
4	5 GHz WLAN TX2 + BT	Back side	0.041	0.007	0.048	ΣSAR<1.6, Not required
		Top side	0.434	0.046	0.480	ΣSAR<1.6, Not required
		Bottom side	0.003	0.004	0.007	ΣSAR<1.6, Not required
		Right side	0.001	0.042	0.043	ΣSAR<1.6, Not required
		Left side	0.069	0.003	0.072	ΣSAR<1.6, Not required

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司



Page: 91 of 124

4. Instruments List

Manufacturer	Device	Туре	Serial number	Date of last calibration	Date of next calibration
SPEAG	Dosimetric E-Field Probe	EX3DV4	7466	Feb.04,2019	Feb.03,2020
SPEAG	System Validation	D2450V2	835	Jun.27,2019	Jun.26,2020
SPEAG	Dipole	D5GHzV2	1040	Jun.24,2019	Jun.23,2020
SPEAG	Data acquisition Electronics	DAE4	547	Mar.22,2019	Mar.21,2020
SPEAG	Software	DASY 52 52.10.1	N/A	Calibration not required	Calibration not required
SPEAG	Phantom	ELI	N/A	Calibration not required	Calibration not required
Agilent	Network Analyzer	E5071C	MY46107530	Feb.23,2019	Feb.22,2020
Agilent	Dielectric Probe Kit	85070E	MY44300677	Calibration not required	Calibration not required
Agilent	Dual-directional coupler	772D	MY48220468	Aug.28,2019	Aug.27,2020
Aglient		778D	MY46151242	Aug.28,2019	Aug.27,2020
Agilent	Signal Generator	N5181A	MY50141235	Apr.22,2019	Apr.21,2020
Agilent	Power Meter	ML2496A	1326001	Aug.09,2018	Aug.02,2019
Agilent	Power Sensor	MA2411B	1315048	Aug.09,2018	Aug.02,2019
Aglient	I OWEL SELISOI	IVIAZ411D	1315049	Aug.09,2018	Aug.02,2019
Changzhou Xinwang	Digital thermometer	DTM-303A	TP131515	Jul.17,2018	Jul.16,2019

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Date: 2019/7/4

Page: 92 of 124

5. Measurements

WLAN 802.11b_Body_Top side_CH 1_0mm_TX2

Communication System: IEEE 802.11b WLAN; Frequency: 2412 MHz; Duty Cycle: 1:1 Medium parameters used: f = 2412 MHz; $\sigma = 1.895$ S/m; $\epsilon_r = 53.968$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient temperature: 22.1°C; Liquid temperature: 21.2°C

DASY5 Configuration:

Probe: EX3DV4 - SN7466; ConvF(7.71, 7.71, 7.71); Calibrated: 2019/2/4

Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE4 Sn547; Calibrated: 2019/3/22

Phantom: ELI

DASY52 52.10.1(1476); SEMCAD X 14.6.11(7439)

Area Scan (81x111x1): Interpolated grid: dx=12 mm, dy=12 mm

Maximum value of SAR (interpolated) = 0.771 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 6.744 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 1.43 W/kg

SAR(1 g) = 0.562 W/kg; SAR(10 g) = 0.239 W/kg

Maximum value of SAR (measured) = 0.907 W/kg

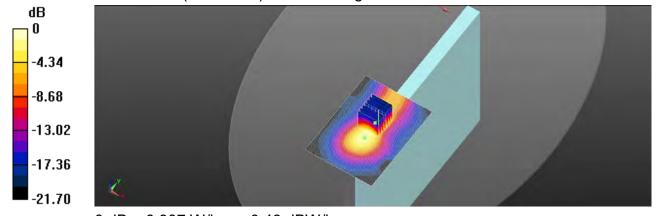

0 dB = 0.907 W/kg = -0.43 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非早有說明,併報生结果僅對測試之樣具負責,同時什樣具僅保留的子。太報生去經太公司惠面許可,不可部份複劃。

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號



Page: 93 of 124

Date: 2019/7/5

WLAN 802.11ac(80M) 5.2G_Body_Top side_CH 42_0mm_TX2

Communication System: WLAN 5G; Frequency: 5210 MHz; Duty Cycle: 1:1

Medium parameters used: f = 5210 MHz; $\sigma = 5.121 \text{ S/m}$; $\varepsilon_r = 49.538$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Ambient temperature: 22.3°C; Liquid temperature: 21.8°C

DASY5 Configuration:

Probe: EX3DV4 - SN7466; ConvF(4.95, 4.95, 4.95); Calibrated: 2019/2/4

Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE4 Sn547; Calibrated: 2019/3/22

Phantom: ELI

DASY52 52.10.1(1476); SEMCAD X 14.6.11(7439)

Area Scan (51x101x1): Interpolated grid: dx=10 mm, dy=10 mm

Maximum value of SAR (interpolated) = 2.27 W/kg


Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 4.832 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 4.23 W/kg

SAR(1 g) = 1.13 W/kg; SAR(10 g) = 0.260 W/kg

Maximum value of SAR (measured) = 2.37 W/kg

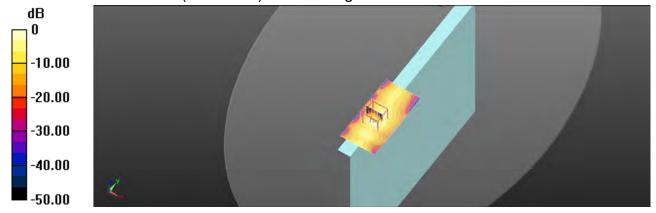

0 dB = 2.37 W/kg = 3.74 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非早有說明,件報告結果僅與10天。木報告表經本公司書面許可,不可部份複製。

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司



Page: 94 of 124

Date: 2019/7/6

WLAN 802.11a 5.3G_Body_Top side_CH 60_0mm_TX2

Communication System: WLAN 5G; Frequency: 5300 MHz; Duty Cycle: 1:1

Medium parameters used: f = 5300 MHz; $\sigma = 5.273 \text{ S/m}$; $\varepsilon_r = 49.291$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Ambient temperature: 22.1°C; Liquid temperature: 21.6°C

DASY5 Configuration:

Probe: EX3DV4 - SN7466; ConvF(4.8, 4.8, 4.8); Calibrated: 2019/2/4

• Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE4 Sn547; Calibrated: 2019/3/22

Phantom: ELI

DASY52 52.10.1(1476); SEMCAD X 14.6.11(7439)

Area Scan (71x111x1): Interpolated grid: dx=10 mm, dy=10 mm

Maximum value of SAR (interpolated) = 2.29 W/kg


Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 6.079 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 4.29 W/kg

SAR(1 g) = 1.15 W/kg; SAR(10 g) = 0.274 W/kg

Maximum value of SAR (measured) = 2.33 W/kg

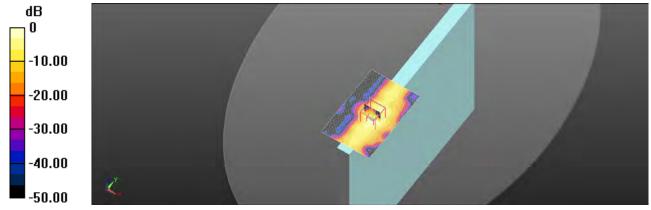

0 dB = 2.33 W/kg = 3.67 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非早有說明,件報告結果僅享留的天。木報告未經木公司惠面許可,不可部份複劃。

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司



Page: 95 of 124

Date: 2019/7/6

WLAN 802.11n(40M) 5.3G_Body_Top side_CH 54_0mm_TX2

Communication System: WLAN 5G; Frequency: 5270 MHz; Duty Cycle: 1:1

Medium parameters used: f = 5270 MHz; $\sigma = 5.265 \text{ S/m}$; $\varepsilon_r = 49.34$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Ambient temperature: 22.1°C; Liquid temperature: 21.6°C

DASY5 Configuration:

Probe: EX3DV4 - SN7466; ConvF(4.8, 4.8, 4.8); Calibrated: 2019/2/4

Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE4 Sn547; Calibrated: 2019/3/22

Phantom: ELI

DASY52 52.10.1(1476); SEMCAD X 14.6.11(7439)

Area Scan (71x111x1): Interpolated grid: dx=10 mm, dy=10 mm

Maximum value of SAR (interpolated) = 2.27 W/kg


Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 5.800 V/m: Power Drift = -0.05 dB

Peak SAR (extrapolated) = 4.22 W/kg

SAR(1 g) = 1.13 W/kg; SAR(10 g) = 0.263 W/kg

Maximum value of SAR (measured) = 2.41 W/kg

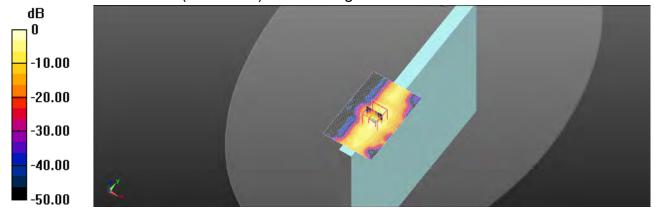

0 dB = 2.41 W/kg = 3.83 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sqs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司



Page: 96 of 124

Date: 2019/7/7

WLAN 802.11ac(80M) 5.6G_Body_Top side_CH 138_0mm_TX2

Communication System: WLAN 5G; Frequency: 5690 MHz; Duty Cycle: 1:1

Medium parameters used: f = 5690 MHz; σ = 5.869 S/m; $ε_r$ = 48.173; ρ = 1000 kg/m³

Phantom section: Flat Section

Ambient temperature: 22.7°C; Liquid temperature: 21.8°C

DASY5 Configuration:

Probe: EX3DV4 - SN7466; ConvF(4.22, 4.22, 4.22); Calibrated: 2019/2/4

Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE4 Sn547; Calibrated: 2019/3/22

Phantom: ELI

DASY52 52.10.1(1476); SEMCAD X 14.6.11(7439)

Area Scan (71x111x1): Interpolated grid: dx=10 mm, dy=10 mm

Maximum value of SAR (interpolated) = 2.44 W/kg


Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 7.294 V/m: Power Drift = -0.04 dB

Peak SAR (extrapolated) = 4.81 W/kg

SAR(1 g) = 1.18 W/kg; SAR(10 g) = 0.282 W/kg

Maximum value of SAR (measured) = 2.65 W/kg

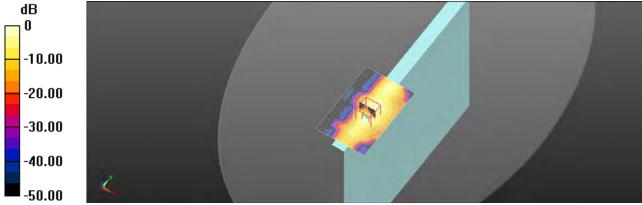

0 dB = 2.65 W/kg = 4.23 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非早有說明,此報告結果僅對測試之緣品負責,同時此樣品僅保留00天。木報告表經太公司書面許可,不可部份複製。

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司



Page: 97 of 124

Date: 2019/7/8

WLAN 802.11ac(80M) 5.8G_Body_Top side_CH 155_0mm_TX2

Communication System: WLAN 5G; Frequency: 5775 MHz; Duty Cycle: 1:1

Medium parameters used: f = 5775 MHz; $\sigma = 6.037 \text{ S/m}$; $\epsilon_r = 47.971$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Ambient temperature: 22.1°C; Liquid temperature: 21.8°C

DASY5 Configuration:

Probe: EX3DV4 - SN7466; ConvF(4.38, 4.38, 4.38); Calibrated: 2019/2/4

Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE4 Sn547; Calibrated: 2019/3/22

Phantom: ELI

DASY52 52.10.1(1476); SEMCAD X 14.6.11(7439)

Area Scan (71x111x1): Interpolated grid: dx=10 mm, dy=10 mm

Maximum value of SAR (interpolated) = 2.07 W/kg


Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 6.300 V/m; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 3.45 W/kg

SAR(1 g) = 0.886 W/kg; SAR(10 g) = 0.208 W/kg

Maximum value of SAR (measured) = 2.02 W/kg

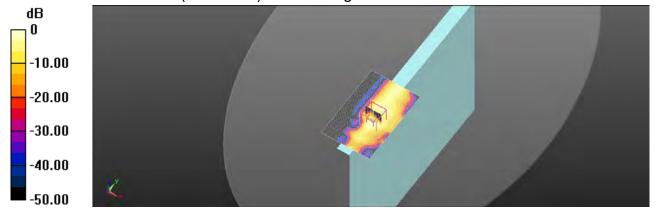

0 dB = 2.02 W/kg = 3.05 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sqs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司



Page: 98 of 124

Date: 2019/7/4

WLAN 802.11b_Body_Top side_CH 1_0mm_TX1

Communication System: IEEE 802.11b WLAN; Frequency: 2412 MHz; Duty Cycle: 1:1 Medium parameters used: f = 2412 MHz; $\sigma = 1.895$ S/m; $\varepsilon_r = 53.968$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient temperature: 22.1°C; Liquid temperature: 21.2°C

DASY5 Configuration:

Probe: EX3DV4 - SN7466; ConvF(7.71, 7.71, 7.71); Calibrated: 2019/2/4

Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE4 Sn547; Calibrated: 2019/3/22

Phantom: ELI

DASY52 52.10.1(1476); SEMCAD X 14.6.11(7439)

Area Scan (81x111x1): Interpolated grid: dx=12 mm, dy=12 mm

Maximum value of SAR (interpolated) = 0.985 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 6.885 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 1.72 W/kg

SAR(1 g) = 0.667 W/kg; SAR(10 g) = 0.281 W/kg

Maximum value of SAR (measured) = 1.04 W/kg

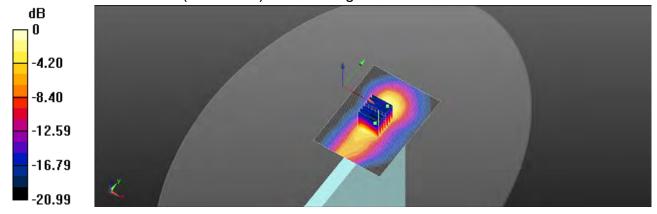

0 dB = 1.04 W/kg = 0.16 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非早有說明,併報生结果僅對測試之樣具負責,同時什樣具僅保留的子。太報生去經太公司惠面許可,不可部份複劃。

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號



Page: 99 of 124

Date: 2019/7/4

Bluetooth(GFSK)_Body_Top side_CH 0_0mm_TX1

Communication System: IEEE 802.11b WLAN; Frequency: 2412 MHz; Duty Cycle: 1:1 Medium parameters used: f = 2412 MHz; $\sigma = 1.895 \text{ S/m}$; $\varepsilon_r = 53.968$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Ambient temperature: 22.1°C; Liquid temperature: 21.2°C

DASY5 Configuration:

Probe: EX3DV4 - SN7466; ConvF(7.71, 7.71, 7.71); Calibrated: 2019/2/4

Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE4 Sn547; Calibrated: 2019/3/22

Phantom: ELI

DASY52 52.10.1(1476); SEMCAD X 14.6.11(7439)

Area Scan (61x111x1): Interpolated grid: dx=12 mm, dy=12 mm

Maximum value of SAR (interpolated) = 0.0760 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 1.961 V/m: Power Drift = 0.04 dB

Peak SAR (extrapolated) = 0.160 W/kg

SAR(1 g) = 0.060 W/kg; SAR(10 g) = 0.026 W/kg

Maximum value of SAR (measured) = 0.105 W/kg

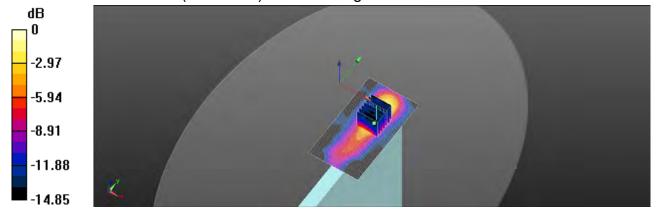

0 dB = 0.105 W/kg = -9.77 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sqs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號



Page: 100 of 124

Date: 2019/7/5

WLAN 802.11ac(80M) 5.2G_Body_Top side_CH 42_0mm_TX1

Communication System: WLAN 5G; Frequency: 5210 MHz; Duty Cycle: 1:1

Medium parameters used: f = 5210 MHz; $\sigma = 5.121 \text{ S/m}$; $\varepsilon_r = 49.538$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Ambient temperature: 22.3°C; Liquid temperature: 21.8°C

DASY5 Configuration:

Probe: EX3DV4 - SN7466; ConvF(4.95, 4.95, 4.95); Calibrated: 2019/2/4

Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE4 Sn547; Calibrated: 2019/3/22

Phantom: ELI

DASY52 52.10.1(1476); SEMCAD X 14.6.11(7439)

Area Scan (51x101x1): Interpolated grid: dx=10 mm, dy=10 mm


Maximum value of SAR (interpolated) = 1.88 W/kg

Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 6.655 V/m: Power Drift = -0.04 dB

Peak SAR (extrapolated) = 4.12 W/kg

SAR(1 g) = 1.13 W/kg; SAR(10 g) = 0.282 W/kgMaximum value of SAR (measured) = 2.37 W/kg

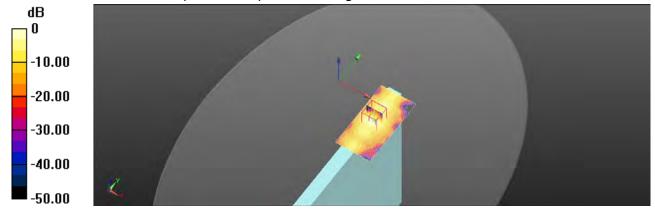

0 dB = 2.37 W/kg = 3.75 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sqs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司



Page: 101 of 124

Date: 2019/7/6

WLAN 802.11a 5.3G_Body_Top side_CH 60_0mm_TX1

Communication System: WLAN 5G; Frequency: 5300 MHz; Duty Cycle: 1:1

Medium parameters used: f = 5300 MHz; $\sigma = 5.273 \text{ S/m}$; $\varepsilon_r = 49.291$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Ambient temperature: 22.1°C; Liquid temperature: 21.6°C

DASY5 Configuration:

Probe: EX3DV4 - SN7466; ConvF(4.8, 4.8, 4.8); Calibrated: 2019/2/4

Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE4 Sn547; Calibrated: 2019/3/22

Phantom: ELI

DASY52 52.10.1(1476); SEMCAD X 14.6.11(7439)

Area Scan (51x101x1): Interpolated grid: dx=10 mm, dy=10 mm

Maximum value of SAR (interpolated) = 1.59 W/kg


Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 5.464 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 3.17 W/kg

SAR(1 g) = 0.871 W/kg; SAR(10 g) = 0.218 W/kg

Maximum value of SAR (measured) = 1.82 W/kg

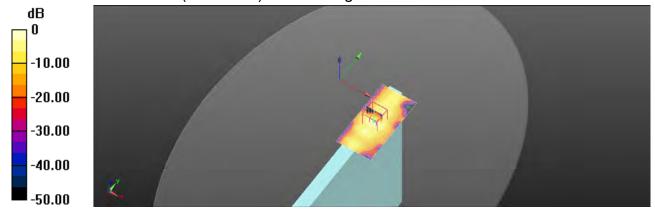

0 dB = 1.82 W/kg = 2.59 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非早有說明,併報生结果僅對測試之樣具負責,同時什樣具僅保留的子。太報生去經太公司惠面許可,不可部份複劃。

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號



Page: 102 of 124

Date: 2019/7/6

WLAN 802.11n(40M) 5.3G_Body_Top side_CH 54_0mm_TX1

Communication System: WLAN 5G; Frequency: 5270 MHz; Duty Cycle: 1:1

Medium parameters used: f = 5270 MHz; $\sigma = 5.265 \text{ S/m}$; $\varepsilon_r = 49.34$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Ambient temperature: 22.1°C; Liquid temperature: 21.6°C

DASY5 Configuration:

Probe: EX3DV4 - SN7466; ConvF(4.8, 4.8, 4.8); Calibrated: 2019/2/4

Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE4 Sn547; Calibrated: 2019/3/22

Phantom: ELI

DASY52 52.10.1(1476); SEMCAD X 14.6.11(7439)

Area Scan (51x101x1): Interpolated grid: dx=10 mm, dy=10 mm

Maximum value of SAR (interpolated) = 1.83 W/kg


Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 5.548 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 3.27 W/kg

SAR(1 g) = 0.960 W/kg; SAR(10 g) = 0.242 W/kg

Maximum value of SAR (measured) = 1.86 W/kg

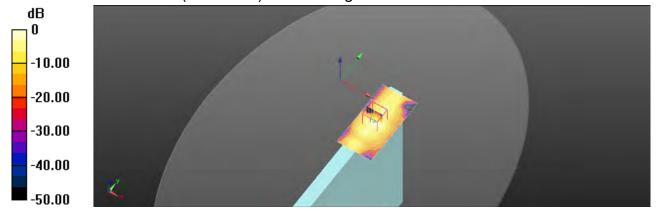

0 dB = 1.86 W/kg = 2.69 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非兄有论明,此都华结里做影测过之缘是台書,同時什樣是做保留00千。木都华未领太公司書面纯可,不可部份複製。

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司



Page: 103 of 124

Date: 2019/7/7

WLAN 802.11ac(80M) 5.6G_Body_Top side_CH 138_0mm_TX1

Communication System: WLAN 5G; Frequency: 5690 MHz; Duty Cycle: 1:1

Medium parameters used: f = 5690 MHz; σ = 5.869 S/m; ϵ_r = 48.173; ρ = 1000 kg/m³

Phantom section: Flat Section

Ambient temperature: 22.7°C; Liquid temperature: 21.8°C

DASY5 Configuration:

Probe: EX3DV4 - SN7466; ConvF(4.22, 4.22, 4.22); Calibrated: 2019/2/4

Sensor-Surface: 2mm (Mechanical Surface Detection)

• Electronics: DAE4 Sn547; Calibrated: 2019/3/22

Phantom: ELI

DASY52 52.10.1(1476); SEMCAD X 14.6.11(7439)

Area Scan (51x101x1): Interpolated grid: dx=10 mm, dy=10 mm

Maximum value of SAR (interpolated) = 1.91 W/kg


Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 7.161 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 3.42 W/kg

SAR(1 g) = 0.917 W/kg; SAR(10 g) = 0.221 W/kg

Maximum value of SAR (measured) = 2.03 W/kg

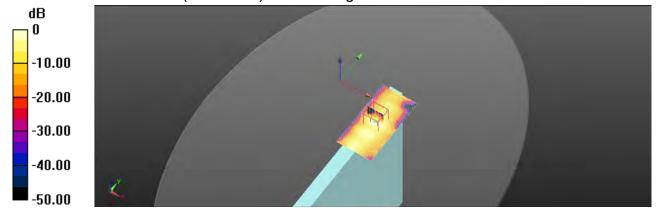

0 dB = 2.03 W/kg = 3.07 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非兄有论明,此都华结里做影测过之缘是台書,同時什樣是做保留00千。木都华未领太公司書面纯可,不可部份複製。

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司



Page: 104 of 124

Date: 2019/7/8

WLAN 802.11ac(80M) 5.8G_Body_Top side_CH 155_0mm_TX1

Communication System: WLAN 5G; Frequency: 5775 MHz; Duty Cycle: 1:1

Medium parameters used: f = 5775 MHz; $\sigma = 6.037 \text{ S/m}$; $\varepsilon_r = 47.971$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Ambient temperature: 22.1°C; Liquid temperature: 21.8°C

DASY5 Configuration:

Probe: EX3DV4 - SN7466; ConvF(4.38, 4.38, 4.38); Calibrated: 2019/2/4

Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE4 Sn547; Calibrated: 2019/3/22

Phantom: ELI

DASY52 52.10.1(1476); SEMCAD X 14.6.11(7439)

Area Scan (51x101x1): Interpolated grid: dx=10 mm, dy=10 mm

Maximum value of SAR (interpolated) = 1.58 W/kg


Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 5.567 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 2.96 W/kg

SAR(1 g) = 0.761 W/kg; SAR(10 g) = 0.182 W/kg

Maximum value of SAR (measured) = 1.68 W/kg

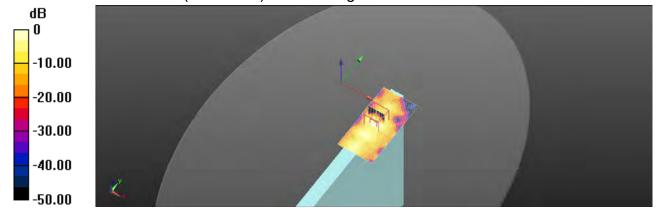

0 dB = 1.68 W/kg = 2.25 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非早有铅明,件据华结里体影响对了样品色青,同時件样品体保留的子。未据华主领木公司事而许可,不可部份被制。

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司



Page: 105 of 124

Date: 2019/7/4

WLAN 802.11b_Body_Top side_CH 6_0mm_TX2

Communication System: IEEE 802.11b WLAN; Frequency: 2437 MHz; Duty Cycle: 1:1 Medium parameters used: f = 2437 MHz; $\sigma = 1.916$ S/m; $\epsilon_r = 53.916$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient temperature: 22.1°C; Liquid temperature: 21.2°C

DASY5 Configuration:

Probe: EX3DV4 - SN7466; ConvF(7.71, 7.71, 7.71); Calibrated: 2019/2/4

Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE4 Sn547; Calibrated: 2019/3/22

Phantom: ELI

DASY52 52.10.1(1476); SEMCAD X 14.6.11(7439)

Area Scan (81x111x1): Interpolated grid: dx=12 mm, dy=12 mm

Maximum value of SAR (interpolated) = 0.392 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 9.303 V/m: Power Drift = 0.06 dB

Peak SAR (extrapolated) = 0.620 W/kg

SAR(1 g) = 0.273 W/kg; SAR(10 g) = 0.127 W/kg

Maximum value of SAR (measured) = 0.442 W/kg

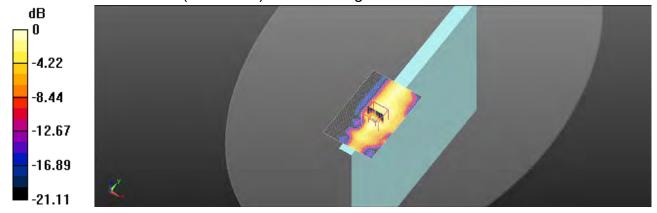

0 dB = 0.442 W/kg = -3.55 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非兄有论明,此据华结里做影测过之缘是台書,同時此樣是做保留00千。木都华未领太公司事而纯可,不可驾份複测。

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司



Page: 106 of 124

Date: 2019/7/5

WLAN 802.11ac(80M) 5.2G_Body_Top side_CH 42_0mm_TX2

Communication System: WLAN 5G; Frequency: 5210 MHz; Duty Cycle: 1:1

Medium parameters used: f = 5210 MHz; $\sigma = 5.121 \text{ S/m}$; $\varepsilon_r = 49.538$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Ambient temperature: 22.3°C; Liquid temperature: 21.8°C

DASY5 Configuration:

Probe: EX3DV4 - SN7466; ConvF(4.95, 4.95, 4.95); Calibrated: 2019/2/4

Sensor-Surface: 2mm (Mechanical Surface Detection)

• Electronics: DAE4 Sn547; Calibrated: 2019/3/22

Phantom: ELI

DASY52 52.10.1(1476); SEMCAD X 14.6.11(7439)

Area Scan (51x101x1): Interpolated grid: dx=10 mm, dy=10 mm

Maximum value of SAR (interpolated) = 0.669 W/kg


Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 1.910 V/m; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 1.02 W/kg

SAR(1 g) = 0.316 W/kg; SAR(10 g) = 0.071 W/kg

Maximum value of SAR (measured) = 0.688 W/kg

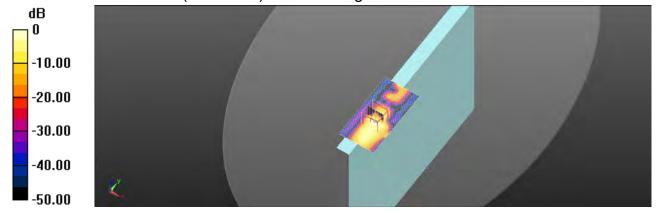

0 dB = 0.688 W/kg = -1.62 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非早有說明,件報告結果僅與10天。木報告表經本公司書面許可,不可部份複製。

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司



Page: 107 of 124

Date: 2019/7/6

WLAN 802.11n(40M) 5.3G_Body_Top side_CH 54_0mm_TX2

Communication System: WLAN 5G; Frequency: 5270 MHz; Duty Cycle: 1:1

Medium parameters used: f = 5270 MHz; $\sigma = 5.265 \text{ S/m}$; $\varepsilon_r = 49.34$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Ambient temperature: 22.1°C; Liquid temperature: 21.6°C

DASY5 Configuration:

Probe: EX3DV4 - SN7466; ConvF(4.8, 4.8, 4.8); Calibrated: 2019/2/4

Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE4 Sn547; Calibrated: 2019/3/22

Phantom: ELI

DASY52 52.10.1(1476); SEMCAD X 14.6.11(7439)

Area Scan (71x121x1): Interpolated grid: dx=10 mm, dy=10 mm

Maximum value of SAR (interpolated) = 0.821 W/kg


Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 1.628 V/m: Power Drift = -0.01 dB

Peak SAR (extrapolated) = 2.46 W/kg

SAR(1 g) = 0.431 W/kg; SAR(10 g) = 0.101 W/kg

Maximum value of SAR (measured) = 0.878 W/kg

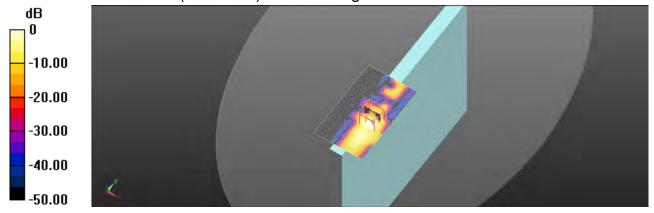

0 dB = 0.878 W/kg = -0.56 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非早有說明,併報生结果做影測試了樣品負責,同時什樣品僅保留00千。木類生主领大八司書而許可,不可部份複製。

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號



Page: 108 of 124

Date: 2019/7/7

WLAN 802.11ac(80M) 5.6G_Body_Top side_CH 138_0mm_TX2

Communication System: WLAN 5G; Frequency: 5690 MHz; Duty Cycle: 1:1

Medium parameters used: f = 5690 MHz; σ = 5.869 S/m; ϵ_r = 48.173; ρ = 1000 kg/m³

Phantom section: Flat Section

Ambient temperature: 22.7°C; Liquid temperature: 21.8°C

DASY5 Configuration:

Probe: EX3DV4 - SN7466; ConvF(4.22, 4.22, 4.22); Calibrated: 2019/2/4

Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE4 Sn547; Calibrated: 2019/3/22

Phantom: ELI

DASY52 52.10.1(1476); SEMCAD X 14.6.11(7439)

Area Scan (71x121x1): Interpolated grid: dx=10 mm, dy=10 mm

Maximum value of SAR (interpolated) = 0.764 W/kg

Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 3.003 V/m: Power Drift = -0.03 dB

Peak SAR (extrapolated) = 1.22 W/kg

SAR(1 g) = 0.332 W/kg; SAR(10 g) = 0.076 W/kg

Maximum value of SAR (measured) = 0.788 W/kg


Zoom Scan (7x7x12)/Cube 1: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 3.003 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 1.49 W/kg

SAR(1 g) = 0.400 W/kg; SAR(10 g) = 0.096 W/kg

Maximum value of SAR (measured) = 0.930 W/kg

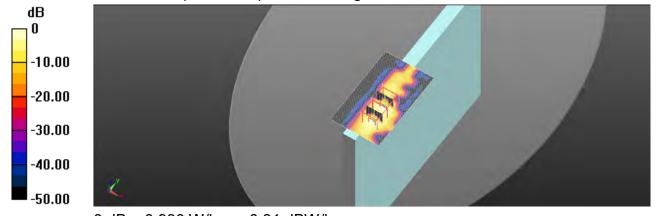

0 dB = 0.930 W/kg = -0.31 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sqs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號



Page: 109 of 124

Date: 2019/7/8

WLAN 802.11ac(80M) 5.8G_Body_Top side_CH 155_0mm_TX2

Communication System: WLAN 5G; Frequency: 5775 MHz; Duty Cycle: 1:1

Medium parameters used: f = 5775 MHz; $\sigma = 6.037 \text{ S/m}$; $\epsilon_r = 47.971$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Ambient temperature: 22.1°C; Liquid temperature: 21.8°C

DASY5 Configuration:

Probe: EX3DV4 - SN7466; ConvF(4.38, 4.38, 4.38); Calibrated: 2019/2/4

Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE4 Sn547; Calibrated: 2019/3/22

Phantom: ELI

DASY52 52.10.1(1476); SEMCAD X 14.6.11(7439)

Area Scan (71x121x1): Interpolated grid: dx=10 mm, dy=10 mm

Maximum value of SAR (interpolated) = 0.666 W/kg

Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 1.695 V/m: Power Drift = -0.04 dB

Peak SAR (extrapolated) = 1.50 W/kg

SAR(1 g) = 0.322 W/kg; SAR(10 g) = 0.076 W/kg

Maximum value of SAR (measured) = 0.794 W/kg


Zoom Scan (7x7x12)/Cube 1: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 1.695 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 0.860 W/kg

SAR(1 g) = 0.239 W/kg; SAR(10 g) = 0.052 W/kg

Maximum value of SAR (measured) = 0.538 W/kg

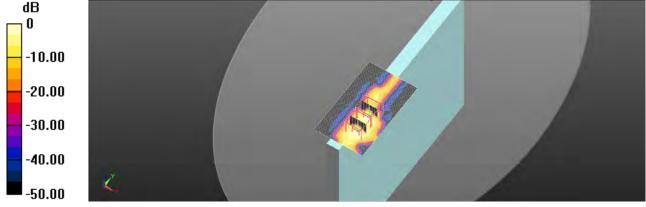

0 dB = 0.794 W/kg = -1.00 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sqs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號



Page: 110 of 124

Date: 2019/7/4

WLAN 802.11b_Body_Top side_CH 6_0mm_TX1

Communication System: IEEE 802.11b WLAN; Frequency: 2437 MHz; Duty Cycle: 1:1 Medium parameters used: f = 2437 MHz; $\sigma = 1.916 \text{ S/m}$; $\varepsilon_r = 53.916$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Ambient temperature: 22.1°C; Liquid temperature: 21.2°C

DASY5 Configuration:

Probe: EX3DV4 - SN7466; ConvF(7.71, 7.71, 7.71); Calibrated: 2019/2/4

Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE4 Sn547; Calibrated: 2019/3/22

Phantom: ELI

DASY52 52.10.1(1476); SEMCAD X 14.6.11(7439)

Area Scan (81x111x1): Interpolated grid: dx=12 mm, dy=12 mm

Maximum value of SAR (interpolated) = 0.550 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 12.42 V/m: Power Drift = 0.02 dB

Peak SAR (extrapolated) = 0.896 W/kg

SAR(1 g) = 0.438 W/kg; SAR(10 g) = 0.208 W/kg

Maximum value of SAR (measured) = 0.637 W/kg

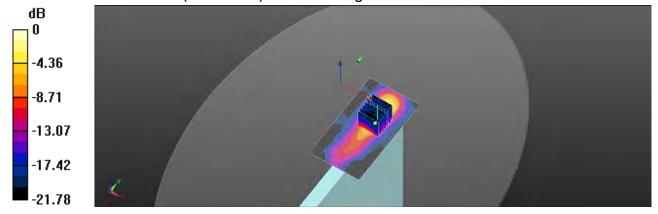

0 dB = 0.637 W/kg = -1.96 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sqs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司



Page: 111 of 124

Date: 2019/7/4

Bluetooth(GFSK)_Body_Top side_CH 78_0mm_TX1

Communication System: Bluetooth; Frequency: 2480 MHz; Duty Cycle: 1:1

Medium parameters used: f = 2480 MHz; $\sigma = 1.933 \text{ S/m}$; $\varepsilon_r = 53.874$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Ambient temperature: 22.1°C; Liquid temperature: 21.2°C

DASY5 Configuration:

Probe: EX3DV4 - SN7466; ConvF(7.71, 7.71, 7.71); Calibrated: 2019/2/4

• Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE4 Sn547; Calibrated: 2019/3/22

Phantom: ELI

DASY52 52.10.1(1476); SEMCAD X 14.6.11(7439)

Area Scan (81x111x1): Interpolated grid: dx=12 mm, dy=12 mm

Maximum value of SAR (interpolated) = 0.0625 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 3.478 V/m: Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.0980 W/kg

SAR(1 g) = 0.045 W/kg; SAR(10 g) = 0.020 W/kg

Maximum value of SAR (measured) = 0.0678 W/kg

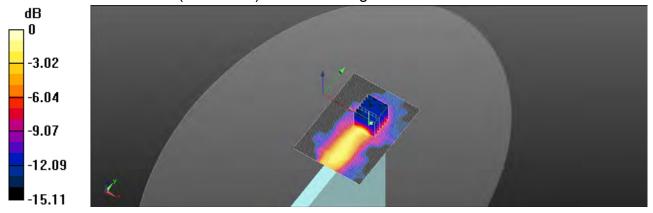

0 dB = 0.0678 W/kg = -11.69 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非兄有论明,此都华结里做影测过之缘是台書,同時什樣是做保留00千。木都华未领木公司書面纯可,不可部份複製。

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號



Page: 112 of 124

Date: 2019/7/5

WLAN 802.11n(40M) 5.2G_Body_Top side_CH 38_0mm_TX1

Communication System: WLAN 5G; Frequency: 5190 MHz; Duty Cycle: 1:1

Medium parameters used: f = 5190 MHz; σ = 5.124 S/m; ε_r = 49.677; ρ = 1000 kg/m³

Phantom section: Flat Section

Ambient temperature: 22.3°C; Liquid temperature: 21.8°C

DASY5 Configuration:

Probe: EX3DV4 - SN7466; ConvF(4.95, 4.95, 4.95); Calibrated: 2019/2/4

Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE4 Sn547; Calibrated: 2019/3/22

Phantom: ELI

DASY52 52.10.1(1476); SEMCAD X 14.6.11(7439)

Area Scan (71x121x1): Interpolated grid: dx=10 mm, dy=10 mm

Maximum value of SAR (interpolated) = 1.39 W/kg


Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 5.517 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 2.46 W/kg

SAR(1 g) = 0.790 W/kg; SAR(10 g) = 0.172 W/kg

Maximum value of SAR (measured) = 1.51 W/kg

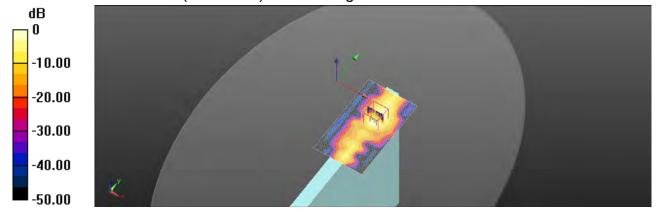

0 dB = 1.51 W/kg = 2.28 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非兄有论明,此都华结里做影测过之缘是台書,同時什樣是做保留00千。木都华未领木公司書面纯可,不可部份複製。

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司



Page: 113 of 124

Date: 2019/7/5

WLAN 802.11ac(80M) 5.2G_Body_Top side_CH 42_0mm_TX1

Communication System: WLAN 5G; Frequency: 5210 MHz; Duty Cycle: 1:1

Medium parameters used: f = 5210 MHz; σ = 5.121 S/m; $ε_r$ = 49.538; ρ = 1000 kg/m³

Phantom section: Flat Section

Ambient temperature: 22.3°C; Liquid temperature: 21.8°C

DASY5 Configuration:

Probe: EX3DV4 - SN7466; ConvF(4.95, 4.95, 4.95); Calibrated: 2019/2/4

Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE4 Sn547; Calibrated: 2019/3/22

Phantom: ELI

DASY52 52.10.1(1476); SEMCAD X 14.6.11(7439)

Area Scan (71x121x1): Interpolated grid: dx=10 mm, dy=10 mm

Maximum value of SAR (interpolated) = 1.69 W/kg


Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 5.547 V/m; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 2.76 W/kg

SAR(1 g) = 0.824 W/kg; SAR(10 g) = 0.202 W/kg

Maximum value of SAR (measured) = 1.81 W/kg

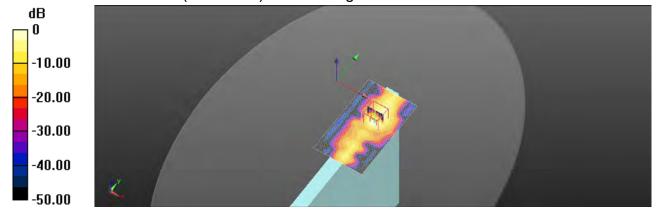

0 dB = 1.81 W/kg = 2.57 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非早有說明,併報生结果做影測試了樣品負責,同時什樣品僅保留00千。木類生主领大八司書而許可,不可部份複製。

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號



Page: 114 of 124

Date: 2019/7/6

WLAN 802.11n(40M) 5.3G_Body_Top side_CH 54_0mm_TX1

Communication System: WLAN 5G; Frequency: 5270 MHz; Duty Cycle: 1:1

Medium parameters used: f = 5270 MHz; $\sigma = 5.265 \text{ S/m}$; $\varepsilon_r = 49.34$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Ambient temperature: 22.1°C; Liquid temperature: 21.6°C

DASY5 Configuration:

- Probe: EX3DV4 SN7466; ConvF(4.8, 4.8, 4.8); Calibrated: 2019/2/4
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn547; Calibrated: 2019/3/22
- Phantom: ELI
- DASY52 52.10.1(1476); SEMCAD X 14.6.11(7439)

Area Scan (71x121x1): Interpolated grid: dx=10 mm, dy=10 mm

Maximum value of SAR (interpolated) = 1.51 W/kg


Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 5.100 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 2.31 W/kg

SAR(1 g) = 0.697 W/kg; SAR(10 g) = 0.168 W/kg

Maximum value of SAR (measured) = 1.45 W/kg

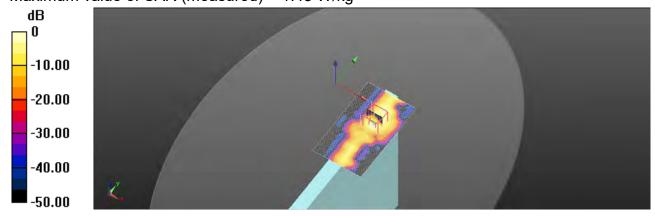

0 dB = 1.45 W/kg = 1.62 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非早有說明,併報生结果僅對測試之樣具負責,同時什樣具僅保留的子。太報生去經太公司惠面許可,不可部份複劃。

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號



Page: 115 of 124

Date: 2019/7/7

WLAN 802.11ac(80M) 5.6G_Body_Top side_CH 138_0mm_TX1

Communication System: WLAN 5G; Frequency: 5690 MHz; Duty Cycle: 1:1

Medium parameters used: f = 5690 MHz; σ = 5.869 S/m; ϵ_r = 48.173; ρ = 1000 kg/m³

Phantom section: Flat Section

Ambient temperature: 22.7°C; Liquid temperature: 21.8°C

DASY5 Configuration:

Probe: EX3DV4 - SN7466; ConvF(4.22, 4.22, 4.22); Calibrated: 2019/2/4

Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE4 Sn547; Calibrated: 2019/3/22

Phantom: ELI

DASY52 52.10.1(1476); SEMCAD X 14.6.11(7439)

Area Scan (71x121x1): Interpolated grid: dx=10 mm, dy=10 mm

Maximum value of SAR (interpolated) = 1.61 W/kg

Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 4.205 V/m: Power Drift = -0.03 dB

Peak SAR (extrapolated) = 2.27 W/kg

SAR(1 g) = 0.716 W/kg; SAR(10 g) = 0.193 W/kg

Maximum value of SAR (measured) = 1.43 W/kg


Zoom Scan (7x7x12)/Cube 1: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 4.205 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 1.90 W/kg

SAR(1 g) = 0.486 W/kg; SAR(10 g) = 0.118 W/kg

Maximum value of SAR (measured) = 1.15 W/kg

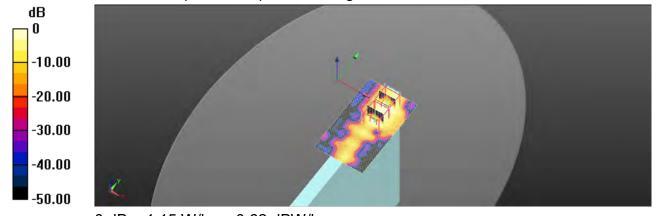

0 dB = 1.15 W/kg = 0.62 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sqs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號



Page: 116 of 124

Date: 2019/7/8

WLAN 802.11ac(80M) 5.8G_Body_Top side_CH 155_0mm_TX1

Communication System: WLAN 5G; Frequency: 5775 MHz; Duty Cycle: 1:1

Medium parameters used: f = 5775 MHz; $\sigma = 6.037 \text{ S/m}$; $\epsilon_r = 47.971$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Ambient temperature: 22.1°C; Liquid temperature: 21.8°C

DASY5 Configuration:

Probe: EX3DV4 - SN7466; ConvF(4.38, 4.38, 4.38); Calibrated: 2019/2/4

Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE4 Sn547; Calibrated: 2019/3/22

Phantom: ELI

DASY52 52.10.1(1476); SEMCAD X 14.6.11(7439)

Area Scan (71x121x1): Interpolated grid: dx=10 mm, dy=10 mm

Maximum value of SAR (interpolated) = 1.53 W/kg

Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 3.657 V/m: Power Drift = -0.04 dB

Peak SAR (extrapolated) = 2.35 W/kg

SAR(1 g) = 0.674 W/kg; SAR(10 g) = 0.175 W/kg

Maximum value of SAR (measured) = 1.42 W/kg


Zoom Scan (7x7x12)/Cube 1: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 3.657 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 1.63 W/kg

SAR(1 g) = 0.408 W/kg; SAR(10 g) = 0.100 W/kg

Maximum value of SAR (measured) = 1.00 W/kg

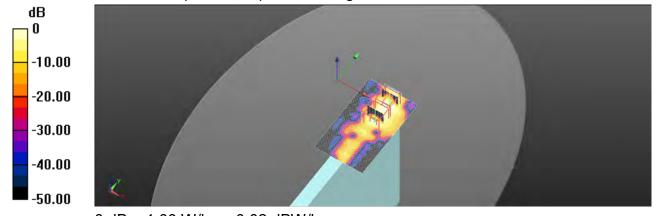

0 dB = 1.00 W/kg = 0.02 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sqs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司



Page: 117 of 124

6. SAR System Performance Verification

Date: 2019/7/4

Dipole 2450 MHz_SN:835

Communication System: CW; Frequency: 2450 MHz; Duty Cycle: 1:1

Medium parameters used: f = 2450 MHz; $\sigma = 1.929 \text{ S/m}$; $\epsilon_r = 53.901$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Ambient temperature: 22.1°C; Liquid temperature: 21.2°C

DASY5 Configuration:

Probe: EX3DV4 - SN7466; ConvF(7.71, 7.71, 7.71); Calibrated: 2019/2/4

Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE4 Sn547; Calibrated: 2019/3/22

Phantom: ELI

DASY52 52.10.1(1476); SEMCAD X 14.6.11(7439)

Area Scan (61x131x1): Interpolated grid: dx=12 mm, dy=12 mm


Maximum value of SAR (interpolated) = 20.5 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 99.34 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 26.2 W/kg

SAR(1 g) = 12.8 W/kg; SAR(10 g) = 5.89 W/kg Maximum value of SAR (measured) = 19.5 W/kg

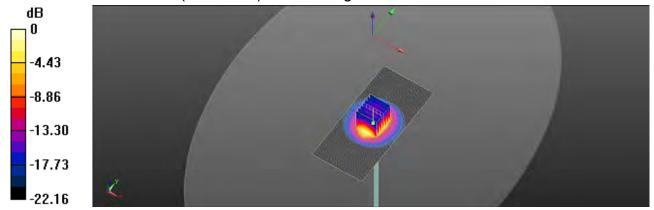

0 dB = 19.5 W/kg = 12.89 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非早有說明,併報生结果做影測試了樣品負責,同時什樣品僅保留00千。木類生主领大八司書而許可,不可部份複製。

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司



Page: 118 of 124

Date: 2019/7/5

Dipole 5200MHz_SN:1040

Communication System: CW; Frequency: 5200 MHz; Duty Cycle: 1:1

Medium parameters used: f = 5200 MHz; $\sigma = 5.127 \text{ S/m}$; $\varepsilon_r = 49.598$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Ambient temperature: 22.3°C; Liquid temperature: 21.8°C

DASY5 Configuration:

Probe: EX3DV4 - SN7466; ConvF(4.95, 4.95, 4.95); Calibrated: 2019/2/4

• Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE4 Sn547; Calibrated: 2019/3/22

Phantom: ELI

DASY52 52.10.1(1476); SEMCAD X 14.6.11(7439)

Area Scan (61x81x1): Interpolated grid: dx=10 mm, dy=10 mm


Maximum value of SAR (interpolated) = 16.7 W/kg

Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 53.92 V/m: Power Drift = 0.01 dB

Peak SAR (extrapolated) = 31.8 W/kg

SAR(1 g) = 7.37 W/kg; SAR(10 g) = 2.07 W/kg Maximum value of SAR (measured) = 16.0 W/kg

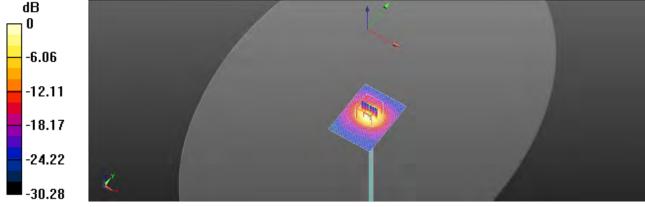

0 dB = 16.0 W/kg = 12.05 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非兄有论明,此都华结里做影测过之缘是台書,同時什樣是做保留00千。木都华未领木公司書面纯可,不可部份複製。

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號



Page: 119 of 124

Date: 2019/7/6

Dipole 5300MHz SN:1040

Communication System: CW; Frequency: 5300 MHz; Duty Cycle: 1:1

Medium parameters used: f = 5300 MHz; $\sigma = 5.273 \text{ S/m}$; $\varepsilon_r = 49.291$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Ambient temperature: 22.1°C; Liquid temperature: 21.6°C

DASY5 Configuration:

Probe: EX3DV4 - SN7466; ConvF(4.8, 4.8, 4.8); Calibrated: 2019/2/4

Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE4 Sn547; Calibrated: 2019/3/22

Phantom: ELI

DASY52 52.10.1(1476); SEMCAD X 14.6.11(7439)

Area Scan (61x81x1): Interpolated grid: dx=10 mm, dy=10 mm


Maximum value of SAR (interpolated) = 15.7 W/kg

Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 59.25 V/m: Power Drift = -0.05 dB

Peak SAR (extrapolated) = 31.0 W/kg

SAR(1 g) = 7.37 W/kg; SAR(10 g) = 2.09 W/kaMaximum value of SAR (measured) = 16.0 W/kg

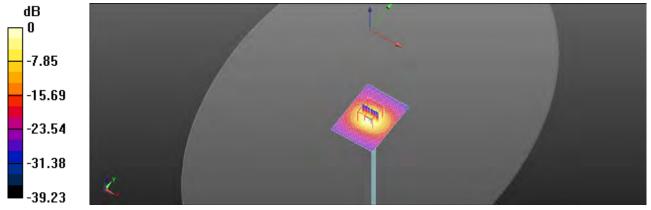

0 dB = 16.0 W/kg = 12.04 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sqs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司

No.134, Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號



Page: 120 of 124

Date: 2019/7/7

Dipole 5600 MHz SN:1040

Communication System: CW; Frequency: 5600 MHz; Duty Cycle: 1:1

Medium parameters used: f = 5600 MHz; $\sigma = 5.765 \text{ S/m}$; $\varepsilon_r = 48.43$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Ambient temperature: 22.7°C; Liquid temperature: 21.8°C

DASY5 Configuration:

Probe: EX3DV4 - SN7466; ConvF(4.22, 4.22, 4.22); Calibrated: 2019/2/4

Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE4 Sn547; Calibrated: 2019/3/22

Phantom: ELI

DASY52 52.10.1(1476); SEMCAD X 14.6.11(7439)

Area Scan (61x91x1): Interpolated grid: dx=10 mm, dy=10 mm


Maximum value of SAR (interpolated) = 15.9 W/kg

Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 55.89 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 31.5 W/kg

SAR(1 g) = 7.95 W/kg; SAR(10 g) = 2.28 W/kgMaximum value of SAR (measured) = 15.9 W/kg

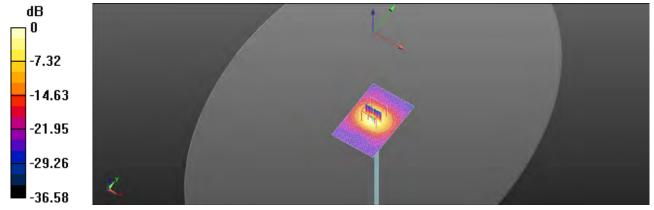

0 dB = 15.9 W/kg = 12.02 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sqs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司



Page: 121 of 124

Date: 2019/7/8

Dipole 5800 MHz SN:1040

Communication System: CW; Frequency: 5800 MHz; Duty Cycle: 1:1

Medium parameters used: f = 5800 MHz; $\sigma = 6.014 \text{ S/m}$; $\varepsilon_r = 47.987$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Ambient temperature: 22.1°C; Liquid temperature: 21.8°C

DASY5 Configuration:

Probe: EX3DV4 - SN7466; ConvF(4.38, 4.38, 4.38); Calibrated: 2019/2/4

Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE4 Sn547; Calibrated: 2019/3/22

Phantom: ELI

DASY52 52.10.1(1476); SEMCAD X 14.6.11(7439)

Area Scan (61x91x1): Interpolated grid: dx=10 mm, dy=10 mm


Maximum value of SAR (interpolated) = 16.5 W/kg

Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 55.84 V/m: Power Drift = -0.04 dB

Peak SAR (extrapolated) = 32.1 W/kg

SAR(1 g) = 7.43 W/kg; SAR(10 g) = 2.11 W/kgMaximum value of SAR (measured) = 16.1 W/kg

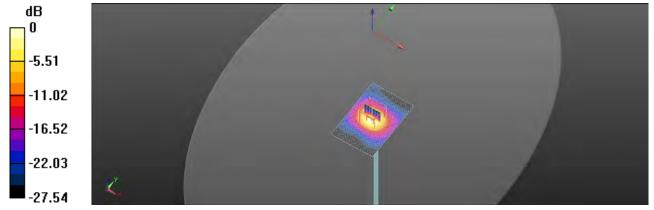

0 dB = 16.1 W/kg = 12.08 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sqs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司



Page: 122 of 124

7. Uncertainty Budget

Measurement Uncertainty evaluation template for DUT SAR test (3-6G)

A	С	D	е		f	g	h=c * f / e	i=c * g / e	k
Source of Uncertainty	Tolerance/ Uncertainty	Probability Distributio	Div	Div Value	ci (1g)	ci (10g)	Standard uncertainty	Standard uncertainty	vi, or Veff
Measurement system									
Probe calibration	6.55%	N	1	1	1	1	6.55%	6.55%	œ
Isotropy , Axial	3.50%	R	√ 3	1.732	1	1	2.02%	2.02%	80
Isotropy, Hemispherical	9.60%	R	√ 3	1.732	1	1	5.54%	5.54%	80
Modulation Response	2.40%	R	√3	1.732	1	1	1.40%	1.40%	∞
Boundary Effect	1.00%	R	√ 3	1.732	1	1	0.58%	0.58%	œ
Linearity	4.70%	R	√ 3	1.732	1	1	2.71%	2.71%	œ
Detection Limits	1.00%	R	√ 3	1.732	1	1	0.58%	0.58%	œ
Readout Electronics	0.30%	N	1	1	1	1	0.30%	0.30%	œ
Response time	0.80%	R	√ 3	1.732	1	1	0.46%	0.46%	œ
Integration Time	2.60%	R	√ 3	1.732	1	1	1.50%	1.50%	œ
Measurement drift (class A evaluation)	1.75%	R	√ 3	1.732	1	1	1.01%	1.01%	œ
RF ambient condition - noise	3.00%	R	√ 3	1.732	1	1	1.73%	1.73%	œ
RF ambient conditions - reflections	3.00%	R	√ 3	1.732	1	1	1.73%	1.73%	œ
Probe positioner Mechanical restrictions	0.40%	R	√ 3	1.732	1	1	0.23%	0.23%	œ
Probe Positioning with respect to phantom shell	2.90%	R	√ 3	1.732	1	1	1.67%	1.67%	œ
Post-processing	1.00%	R	√ 3	1.732	1	1	0.58%	0.58%	œ
Max SAR Eval	1.00%	R	√ 3	1.732	1	1	0.58%	0.58%	œ
Test Sample related									
Test sample positioning	2.90%	N	1	1	1	1	2.90%	2.90%	M-1
Device Holder Uncertainty	3.60%	N	1	1	1	1	3.60%	3.60%	M-1
Drift of output power	5.00%	R	√ 3	1.732	1	1	2.89%	2.89%	œ
Phantom and Setup									
Phantom Uncertainty	4.00%	R	√ 3	1.732	1	1	2.31%	2.31%	œ
Liquid permittivity (mea.)	1.54%	N	1	1	0.64	0.43	0.99%	0.66%	М
Liquid Conductivity (mea.)	3.58%	N	1	1	0.6	0.49	2.15%	1.75%	М
Combined standard uncertainty		RSS					11.95%	11.86%	
Expant uncertainty (95% confidence interval), K=2							23.90%	23.71%	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號 SGS Taiwan Ltd.



Page: 123 of 124

Measurement Uncertainty evaluation template for DUT SAR test (0.3-3G)

A	С	D	е		f	g	h=c * f / e	i=c * g / e	k
Source of Uncertainty	Tolerance/ Uncertainty	Probability Distributio	Div	Div Value	ci (1g)	ci (10g)	Standard uncertainty	Standard uncertainty	vi, or Veff
Measurement system									
Probe calibration	6.00%	N	1	1	1	1	6.00%	6.00%	∞
Isotropy , Axial	3.50%	R	√3	1.732	1	1	2.02%	2.02%	∞
Isotropy, Hemispherical	9.60%	R	√3	1.732	1	1	5.54%	5.54%	∞
Modulation Response	2.40%	R	√3	1.732	1	1	1.40%	1.40%	∞
Boundary Effect	1.00%	R	√3	1.732	1	1	0.58%	0.58%	∞
Linearity	4.70%	R	√3	1.732	1	1	2.71%	2.71%	∞
Detection Limits	1.00%	R	√3	1.732	1	1	0.58%	0.58%	∞
Readout Electronics	0.30%	N	1	1	1	1	0.30%	0.30%	∞
Response time	0.80%	R	√3	1.732	1	1	0.46%	0.46%	∞
Integration Time	2.60%	R	√3	1.732	1	1	1.50%	1.50%	∞
Measurement drift (class A evaluation)	1.75%	R	√3	1.732	1	1	1.01%	1.01%	∞
RF ambient condition -	3.00%	R	√3	1.732	1	1	1.73%	1.73%	∞
RF ambient conditions - reflections	3.00%	R	√3	1.732	1	1	1.73%	1.73%	∞
Probe positioner Mechanical restrictions	0.40%	R	√3	1.732	1	1	0.23%	0.23%	∞
Probe Positioning with respect to phantom shell	2.90%	R	√3	1.732	1	1	1.67%	1.67%	∞
Post-processing	1.00%	R	√3	1.732	1	1	0.58%	0.58%	∞
Max SAR Eval	1.00%	R	√3	1.732	1	1	0.58%	0.58%	∞
Test Sample related									
Test sample positioning	2.90%	N	1	1	1	1	2.90%	2.90%	M-1
Device Holder Uncertainty	3.60%	N	1	1	1	1	3.60%	3.60%	M-1
Drift of output power	5.00%	R	√3	1.732	1	1	2.89%	2.89%	∞
Phantom and Setup									
Phantom Uncertainty	4.00%	R	√3	1.732	1	1	2.31%	2.31%	∞
Liquid permittivity (mea.)	2.34%	N	1	1	0.64	0.43	1.50%	1.01%	М
Liquid Conductivity (mea.)	2.99%	N	1	1	0.6	0.49	1.79%	1.47%	М
Combined standard uncertainty		RSS					11.65%	11.55%	
Expant uncertainty (95% confidence interval), K=2							23.31%	23.09%	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司



Page: 124 of 124

Appendixes

Refer to separated files for the following appendixes.

EN201960017 SAR_Appendix A Photographs

EN201960017 SAR Appendix B DAE & Probe Cal. Certificate

EN201960017 SAR_Appendix C Phantom Description & Dipole Cal. Certificate

- End of report -

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sqs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134, Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號