



FCC SAR TEST REPORT

FCC ID : B94-AX200NGWT
Equipment : WLAN and BT, 2x2 PCIe M.2 2230 adapter card
Brand Name : Intel® Wi-Fi 6 AX200
Model Name : AX200NGW
Applicant : HP Inc.
3390 East Harmony Road, Fort Collins
Colorado, USA 80528
Standard : FCC 47 CFR Part 2 (2.1093)

The product was installed into Notebook PC (Brand Name HP, Model Name: TPN-W150) during test.

The product was received on Nov. 21, 2020 and testing was started from Nov. 21, 2020 and completed on Dec. 10, 2020. We, SPORTON INTERNATIONAL INC., would like to declare that the tested sample provide by manufacturer and the test data has been evaluated in accordance with the test procedures given in 47 CFR Part 2.1093 and FCC KDB and has been pass the FCC requirement.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory, the test report shall not be reproduced except in full.

Approved by: Cona Huang / Deputy Manager

SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory
No. 52, Huaya 1st Rd., Guishan Dist., Taoyuan City, Taiwan (R.O.C.)



Table of Contents

1. Statement of Compliance 4

2. Guidance Applied..... 4

3. Equipment Under Test (EUT) Information 5

 3.1 General Information 5

4. Lid angle power verification 6

5. RF Exposure Limits.....14

 5.1 Uncontrolled Environment.....14

 5.2 Controlled Environment.....14

6. Specific Absorption Rate (SAR).....15

 6.1 Introduction15

 6.2 SAR Definition.....15

7. System Description and Setup16

 7.1 Test Site Location.....16

 7.2 E-Field Probe17

 7.3 Data Acquisition Electronics (DAE)17

 7.4 Phantom.....18

 7.5 Device Holder.....19

8. Measurement Procedures20

 8.1 Spatial Peak SAR Evaluation.....20

 8.2 Power Reference Measurement.....21

 8.3 Area Scan21

 8.4 Zoom Scan.....22

 8.5 Volume Scan Procedures.....22

 8.6 Power Drift Monitoring.....22

9. Test Equipment List23

10. System Verification24

 10.1 Tissue Verification24

 10.2 System Performance Check Results.....24

11. WiFi/Bluetooth Output Power (Unit: dBm)25

12. Antenna Location37

13. SAR Test Results40

 13.1 Body SAR41

 13.2 Repeated SAR Measurement42

14. Simultaneous Transmission Analysis.....43

 14.1 Body Exposure Conditions.....43

 14.2 SPLSR Evaluation and Analysis.....44

15. Uncertainty Assessment45

16. References45

Appendix A. Plots of System Performance Check

Appendix B. Plots of High SAR Measurement

Appendix C. DASYS Calibration Certificate

Appendix D. Test Setup Photos



1. Statement of Compliance

The maximum results of Specific Absorption Rate (SAR) found during testing for HP Inc., WLAN and BT, 2x2 PCIe M.2 2230 adapter card, AX200NGW, are as follows.

Equipment Class	Frequency Band		Highest SAR Summary	
			Body	Highest Simultaneous Transmission 1g SAR (W/kg)
			1g SAR (W/kg)	
DTS	WLAN	2.4GHz WLAN	0.96	1.02
NII		5GHz WLAN	0.84	1.57
DSS	2.4GHz Band	Bluetooth	0.06	1.57
Date of Testing:			2020/11/21 ~ 2020/12/10	

Sporton Lab is accredited to ISO 17025 by Taiwan Accreditation Foundation (TAF code: 1190) and the FCC designation No.TW1190 under the FCC 2.948(e) by Mutual Recognition Agreement (MRA) in FCC test. This device is in compliance with Specific Absorption Rate (SAR) for general population/uncontrolled exposure limits (1.6 W/kg for Partial-Body 1g SAR, 4.0 W/kg for Product Specific 10g SAR) specified in FCC 47 CFR part 2 (2.1093) and ANSI/IEEE C95.1-1992, and had been tested in accordance with the measurement methods and procedures specified in IEEE 1528-2013 and FCC KDB publications

Reviewed by: Jason Wang
Report Producer: Paula Chen

2. Guidance Applied

The Specific Absorption Rate (SAR) testing specification, method, and procedure for this device is in accordance with the following standards, the below KDB standard may not including in the TAF code without accreditation.

- FCC 47 CFR Part 2 (2.1093)
- ANSI/IEEE C95.1-1992
- IEEE 1528-2013
- FCC KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz v01r04
- FCC KDB 865664 D02 SAR Reporting v01r02
- FCC KDB 447498 D01 General RF Exposure Guidance v06
- FCC KDB 248227 D01 802.11 Wi-Fi SAR v02r02
- FCC KDB 616217 D04 SAR for laptop and tablets v01r02



3. Equipment Under Test (EUT) Information

3.1 General Information

Product Feature & Specification	
Equipment Name	WLAN and BT, 2x2 PCIe M.2 2230 adapter card
Brand Name	Intel® Wi-Fi 6 AX200
Model Name	AX200NGW
FCC ID	B94-AX200NGWT
Integrated WLAN Module	Brand Name: Intel Model Name: AX200NGW
Wireless Technology and Frequency Range	WLAN 2.4GHz Band: 2400 MHz ~ 2483.5 MHz WLAN 5.2GHz Band: 5150 MHz ~ 5250 MHz WLAN 5.3GHz Band: 5250 MHz ~ 5350 MHz WLAN 5.6GHz Band: 5470 MHz ~ 5725 MHz WLAN 5.8GHz Band: 5725 MHz ~ 5825 MHz Bluetooth: 2400 MHz ~ 2483.5 MHz
Mode	WLAN 2.4GHz: 802.11b/g/n/ax HT20/HT40/HE20/HE40 WLAN 5GHz: 802.11a/n/ac/ax HT20/HT40/VHT20/VHT40/VHT80/VHT160/HE20/HE40/HE80/HE160 Bluetooth BR/EDR/LE
EUT Stage	Production Unit
Remark:	
1. This device is convertible type notebook PC, and there have Laptop and Tablet two usage way, when end user is used different mode which the device will according current mode to limit different maximum power. 2. This device had two WLAN antenna vendors, RF exposure evaluation is selected High-Tek as the main tested, WNC will spot check worst case found in High-Tek.	

Host Information	
Equipment Name	Notebook PC
Brand Name	HP
Model Name	TPN-W150
EUT Stage	Production Unit

Antenna Information (NB)								
Vendor	High-Tek							
Antenna	(Tx1) (PIFA)				(Tx2) (PIFA)			
Part Number	025.901S3.0031 (0ACAR020015N)				025.901S3.0021 (0ACAR020014N)			
Frequency	2400-2500MHz	5150-5350MHz	5470-5725MHz	5725-5850MHz	2400-2500MHz	5150-5350MHz	5470-5725MHz	5725-5850MHz
Gain (dBi)	-0.97	0.4	-0.51	1.72	-2.86	-1.27	-1.5	-0.58
Antenna Information (TB)								
Frequency	2400-2500MHz	5150-5350MHz	5470-5725MHz	5725-5850MHz	2400-2500MHz	5150-5350MHz	5470-5725MHz	5725-5850MHz
Gain (dBi)	-3.1	1.37	-0.25	-0.14	-1.4	-0.48	-1.4	-0.72

Antenna Information (NB)								
Vendor	WNC							
Antenna	(Tx1) (PIFA)				(Tx2) (PIFA)			
Part Number	025.901S3.0011 (81EABD15.G36)				025.901S3.0001 (81EABD15.G35)			
Frequency	2400-2500MHz	5150-5350MHz	5470-5725MHz	5725-5850MHz	2400-2500MHz	5150-5350MHz	5470-5725MHz	5725-5850MHz
Gain (dBi)	1.63	0.79	-0.07	-0.07	0.99	1.98	0.49	0.49
Antenna Information (TB)								
Frequency	2400-2500MHz	5150-5350MHz	5470-5725MHz	5725-5850MHz	2400-2500MHz	5150-5350MHz	5470-5725MHz	5725-5850MHz
Gain (dBi)	1.69	1.54	1.93	1.93	0.16	1.89	1.65	1.65



4. Lid angle power verification

General Note:

1. This device is convertible type notebook PC, and there have Laptop and Tablet two usage way, when end user is used different mode which the device will according current mode to limit different maximum power, according to 201911 TCBC workshop Hall effect and Gravity sensor guidance to detect lid angle for the power verification in different usage mode was following below step:

- Step 1: With the lid is in closed mode (0 degrees), open the screen in 10 degree steps until laptop mode is obtained
- Step 2: Lower the screen 5 degrees. Closed mode should be reobtained If not keep lowering in 5 degree steps.
- Step 3: Open the screen in 1 degree steps until laptop mode is reobtained
- Step 4: Continue opening the screen in 1 degree steps until at least 5 degrees past where laptop mode was obtained
- Step 5: Then continue opening the screen in 10 degree steps until tablet mode is obtained
- Step 6: Power measurements should be taken at each step
- Step 7: Reverse this procedure going from tablet mode back down to closed mode

when the screen angle is from 0 degree to 360 degree							
Screen angle (degree) v.s. power	Wireless		WLAN Ant 1/2				
	Band		2.4GHz WLAN	5.2GHz WLAN	5.3GHz WLAN	5.5GHz WLAN	5.8GHz WLAN
	Lid Close	0		standby	standby	standby	standby
10			standby	standby	standby	standby	standby
20			standby	standby	standby	standby	standby
30			standby	standby	standby	standby	standby
31			standby	standby	standby	standby	standby
32			standby	standby	standby	standby	standby
33			standby	standby	standby	standby	standby
34			standby	standby	standby	standby	standby
Laptop	35		20.5	20.5	20.5	20.5	20.5
	36		20.5	20.5	20.5	20.5	20.5
	37		20.5	20.5	20.5	20.5	20.5
	38		20.5	20.5	20.5	20.5	20.5
	39		20.5	20.5	20.5	20.5	20.5
	40		20.5	20.5	20.5	20.5	20.5
	50		20.5	20.5	20.5	20.5	20.5
	60		20.5	20.5	20.5	20.5	20.5
	70		20.5	20.5	20.5	20.5	20.5
	80		20.5	20.5	20.5	20.5	20.5
	90		20.5	20.5	20.5	20.5	20.5
	100		20.5	20.5	20.5	20.5	20.5
	110		20.5	20.5	20.5	20.5	20.5
	120		20.5	20.5	20.5	20.5	20.5
	125		20.5	20.5	20.5	20.5	20.5
	126		20.5	20.5	20.5	20.5	20.5
127		20.5	20.5	20.5	20.5	20.5	
128		20.5	20.5	20.5	20.5	20.5	
129		20.5	20.5	20.5	20.5	20.5	
Tablet	130		18.5	18.0	18.0	17.5	17.0
	131		18.5	18.0	18.0	17.5	17.0
	132		18.5	18.0	18.0	17.5	17.0
	133		18.5	18.0	18.0	17.5	17.0
	134		18.5	18.0	18.0	17.5	17.0
	135		18.5	18.0	18.0	17.5	17.0
	140		18.5	18.0	18.0	17.5	17.0
	150		18.5	18.0	18.0	17.5	17.0
	160		18.5	18.0	18.0	17.5	17.0
	170		18.5	18.0	18.0	17.5	17.0
	180		18.5	18.0	18.0	17.5	17.0
190		18.5	18.0	18.0	17.5	17.0	



		200	18.5	18.0	18.0	17.5	17.0
		210	18.5	18.0	18.0	17.5	17.0
		220	18.5	18.0	18.0	17.5	17.0
		230	18.5	18.0	18.0	17.5	17.0
		240	18.5	18.0	18.0	17.5	17.0
		250	18.5	18.0	18.0	17.5	17.0
		260	18.5	18.0	18.0	17.5	17.0
		270	18.5	18.0	18.0	17.5	17.0
		280	18.5	18.0	18.0	17.5	17.0
		290	18.5	18.0	18.0	17.5	17.0
		300	18.5	18.0	18.0	17.5	17.0
		310	18.5	18.0	18.0	17.5	17.0
		320	18.5	18.0	18.0	17.5	17.0
		330	18.5	18.0	18.0	17.5	17.0
		340	18.5	18.0	18.0	17.5	17.0
		350	18.5	18.0	18.0	17.5	17.0
		360	18.5	18.0	18.0	17.5	17.0
		Tablet	195	18.5	18.0	18.0	17.5
	196		18.5	18.0	18.0	17.5	17.0
	197		18.5	18.0	18.0	17.5	17.0
	198		18.5	18.0	18.0	17.5	17.0
	199		18.5	18.0	18.0	17.5	17.0
	Stand mode (Screen orientation is set to 0° and base is horizontal)	200	18.5	18.0	18.0	17.5	17.0
		201	20.5	20.5	20.5	20.5	20.5
		202	20.5	20.5	20.5	20.5	20.5
		203	20.5	20.5	20.5	20.5	20.5
		204	20.5	20.5	20.5	20.5	20.5
		205	20.5	20.5	20.5	20.5	20.5
		210	20.5	20.5	20.5	20.5	20.5
		220	20.5	20.5	20.5	20.5	20.5
		230	20.5	20.5	20.5	20.5	20.5
		240	20.5	20.5	20.5	20.5	20.5
		250	20.5	20.5	20.5	20.5	20.5
		260	20.5	20.5	20.5	20.5	20.5
		270	20.5	20.5	20.5	20.5	20.5
		280	20.5	20.5	20.5	20.5	20.5
		290	20.5	20.5	20.5	20.5	20.5
		300	20.5	20.5	20.5	20.5	20.5
		310	20.5	20.5	20.5	20.5	20.5
		320	20.5	20.5	20.5	20.5	20.5
		330	20.5	20.5	20.5	20.5	20.5
		335	20.5	20.5	20.5	20.5	20.5
	336	20.5	20.5	20.5	20.5	20.5	
	337	20.5	20.5	20.5	20.5	20.5	
338	20.5	20.5	20.5	20.5	20.5		
339	20.5	20.5	20.5	20.5	20.5		
340	20.5	20.5	20.5	20.5	20.5		
Tablet	341	18.5	18.0	18.0	17.5	17.0	
	342	18.5	18.0	18.0	17.5	17.0	
	343	18.5	18.0	18.0	17.5	17.0	
	344	18.5	18.0	18.0	17.5	17.0	
	345	18.5	18.0	18.0	17.5	17.0	
	350	18.5	18.0	18.0	17.5	17.0	
Tablet	360	18.5	18.0	18.0	17.5	17.0	
	195	18.5	18.0	18.0	17.5	17.0	
		196	18.5	18.0	18.0	17.5	17.0



Tent mode (Screen orientation is set to 180° and base is not horizontal)	197	18.5	18.0	18.0	17.5	17.0	
	198	18.5	18.0	18.0	17.5	17.0	
	199	18.5	18.0	18.0	17.5	17.0	
	200	18.5	18.0	18.0	17.5	17.0	
	201	18.5	18.0	18.0	17.5	17.0	
	202	18.5	18.0	18.0	17.5	17.0	
	203	18.5	18.0	18.0	17.5	17.0	
	204	18.5	18.0	18.0	17.5	17.0	
	205	18.5	18.0	18.0	17.5	17.0	
	210	18.5	18.0	18.0	17.5	17.0	
	220	18.5	18.0	18.0	17.5	17.0	
	230	18.5	18.0	18.0	17.5	17.0	
	240	18.5	18.0	18.0	17.5	17.0	
	250	18.5	18.0	18.0	17.5	17.0	
	260	18.5	18.0	18.0	17.5	17.0	
	270	18.5	18.0	18.0	17.5	17.0	
	280	18.5	18.0	18.0	17.5	17.0	
	290	18.5	18.0	18.0	17.5	17.0	
	300	18.5	18.0	18.0	17.5	17.0	
	310	18.5	18.0	18.0	17.5	17.0	
	320	18.5	18.0	18.0	17.5	17.0	
	330	18.5	18.0	18.0	17.5	17.0	
	335	18.5	18.0	18.0	17.5	17.0	
	336	18.5	18.0	18.0	17.5	17.0	
	337	18.5	18.0	18.0	17.5	17.0	
	338	18.5	18.0	18.0	17.5	17.0	
	339	18.5	18.0	18.0	17.5	17.0	
	340	18.5	18.0	18.0	17.5	17.0	
	Tablet	341	18.5	18.0	18.0	17.5	17.0
		342	18.5	18.0	18.0	17.5	17.0
		343	18.5	18.0	18.0	17.5	17.0
		344	18.5	18.0	18.0	17.5	17.0
		345	18.5	18.0	18.0	17.5	17.0
		350	18.5	18.0	18.0	17.5	17.0
	Lid Close	360	18.5	18.0	18.0	17.5	17.0
		0	standby	standby	standby	standby	standby
		10	standby	standby	standby	standby	standby
		20	standby	standby	standby	standby	standby
		30	standby	standby	standby	standby	standby
		31	standby	standby	standby	standby	standby
		32	standby	standby	standby	standby	standby
	33	standby	standby	standby	standby	standby	
	34	standby	standby	standby	standby	standby	
	Book (screen orientation is 90° or 270°)	35	18.5	18.0	18.0	17.5	17.0
36		18.5	18.0	18.0	17.5	17.0	
37		18.5	18.0	18.0	17.5	17.0	
38		18.5	18.0	18.0	17.5	17.0	
39		18.5	18.0	18.0	17.5	17.0	
40		18.5	18.0	18.0	17.5	17.0	
50		18.5	18.0	18.0	17.5	17.0	
60		18.5	18.0	18.0	17.5	17.0	
70		18.5	18.0	18.0	17.5	17.0	
80		18.5	18.0	18.0	17.5	17.0	
90		18.5	18.0	18.0	17.5	17.0	
100		18.5	18.0	18.0	17.5	17.0	
110	18.5	18.0	18.0	17.5	17.0		



		120	18.5	18.0	18.0	17.5	17.0
		120	18.5	18.0	18.0	17.5	17.0
		130	18.5	18.0	18.0	17.5	17.0
		140	18.5	18.0	18.0	17.5	17.0
		150	18.5	18.0	18.0	17.5	17.0
		160	18.5	18.0	18.0	17.5	17.0
		170	18.5	18.0	18.0	17.5	17.0
		180	18.5	18.0	18.0	17.5	17.0
		190	18.5	18.0	18.0	17.5	17.0
		195	18.5	18.0	18.0	17.5	17.0
		196	18.5	18.0	18.0	17.5	17.0
		197	18.5	18.0	18.0	17.5	17.0
		198	18.5	18.0	18.0	17.5	17.0
		199	18.5	18.0	18.0	17.5	17.0
		200	18.5	18.0	18.0	17.5	17.0
		201	18.5	18.0	18.0	17.5	17.0
		202	18.5	18.0	18.0	17.5	17.0
		203	18.5	18.0	18.0	17.5	17.0
		204	18.5	18.0	18.0	17.5	17.0
		205	18.5	18.0	18.0	17.5	17.0
	210	18.5	18.0	18.0	17.5	17.0	
	220	18.5	18.0	18.0	17.5	17.0	
	230	18.5	18.0	18.0	17.5	17.0	
	240	18.5	18.0	18.0	17.5	17.0	
	250	18.5	18.0	18.0	17.5	17.0	
	260	18.5	18.0	18.0	17.5	17.0	
	270	18.5	18.0	18.0	17.5	17.0	
	280	18.5	18.0	18.0	17.5	17.0	
	290	18.5	18.0	18.0	17.5	17.0	
	300	18.5	18.0	18.0	17.5	17.0	
	310	18.5	18.0	18.0	17.5	17.0	
	320	18.5	18.0	18.0	17.5	17.0	
	330	18.5	18.0	18.0	17.5	17.0	
	340	18.5	18.0	18.0	17.5	17.0	
	350	18.5	18.0	18.0	17.5	17.0	
	360	18.5	18.0	18.0	17.5	17.0	

Tablet



when the screen angle is from 360 degree to 0 degree							
Screen angle (degree) v.s. power	Wireless		WLAN Ant 1/2				
	Band	2.4GHz WLAN	5.2GHz WLAN	5.3GHz WLAN	5.5GHz WLAN	5.8GHz WLAN	
	Tablet Mode	360	18.50	18.00	18.00	17.50	17.00
350		18.50	18.00	18.00	17.50	17.00	
340		18.50	18.00	18.00	17.50	17.00	
330		18.50	18.00	18.00	17.50	17.00	
320		18.50	18.00	18.00	17.50	17.00	
310		18.50	18.00	18.00	17.50	17.00	
300		18.50	18.00	18.00	17.50	17.00	
290		18.50	18.00	18.00	17.50	17.00	
280		18.50	18.00	18.00	17.50	17.00	
270		18.50	18.00	18.00	17.50	17.00	
260		18.50	18.00	18.00	17.50	17.00	
250		18.50	18.00	18.00	17.50	17.00	
240		18.50	18.00	18.00	17.50	17.00	
230		18.50	18.00	18.00	17.50	17.00	
220		18.50	18.00	18.00	17.50	17.00	
210		18.50	18.00	18.00	17.50	17.00	
200		18.50	18.00	18.00	17.50	17.00	
190		18.50	18.00	18.00	17.50	17.00	
180		18.50	18.00	18.00	17.50	17.00	
170		18.50	18.00	18.00	17.50	17.00	
160		18.50	18.00	18.00	17.50	17.00	
150		18.50	18.00	18.00	17.50	17.00	
140		18.50	18.00	18.00	17.50	17.00	
135		18.50	18.00	18.00	17.50	17.00	
134		18.50	18.00	18.00	17.50	17.00	
133		18.50	18.00	18.00	17.50	17.00	
132		18.50	18.00	18.00	17.50	17.00	
131		18.50	18.00	18.00	17.50	17.00	
130		18.50	18.00	18.00	17.50	17.00	
Notebook		129	20.50	20.50	20.50	20.50	20.50
		128	20.50	20.50	20.50	20.50	20.50
		127	20.50	20.50	20.50	20.50	20.50
		126	20.50	20.50	20.50	20.50	20.50
	125	20.50	20.50	20.50	20.50	20.50	
	120	20.50	20.50	20.50	20.50	20.50	
	110	20.50	20.50	20.50	20.50	20.50	
	100	20.50	20.50	20.50	20.50	20.50	
	90	20.50	20.50	20.50	20.50	20.50	
	80	20.50	20.50	20.50	20.50	20.50	
	70	20.50	20.50	20.50	20.50	20.50	
	60	20.50	20.50	20.50	20.50	20.50	
	50	20.50	20.50	20.50	20.50	20.50	
	40	20.50	20.50	20.50	20.50	20.50	
	39	20.50	20.50	20.50	20.50	20.50	
38	20.50	20.50	20.50	20.50	20.50		
37	20.50	20.50	20.50	20.50	20.50		
36	20.50	20.50	20.50	20.50	20.50		
35	20.50	20.50	20.50	20.50	20.50		
Lid Close	34	standby	standby	standby	standby	standby	
	33	standby	standby	standby	standby	standby	
	32	standby	standby	standby	standby	standby	
	31	standby	standby	standby	standby	standby	



Tablet	30	standby	standby	standby	standby	standby	
	20	standby	standby	standby	standby	standby	
	10	standby	standby	standby	standby	standby	
	0	standby	standby	standby	standby	standby	
	360	18.50	18.00	18.00	17.50	17.00	
Tablet	350	18.50	18.00	18.00	17.50	17.00	
	345	18.50	18.00	18.00	17.50	17.00	
	344	18.50	18.00	18.00	17.50	17.00	
	343	18.50	18.00	18.00	17.50	17.00	
	342	18.50	18.00	18.00	17.50	17.00	
	341	18.50	18.00	18.00	17.50	17.00	
	Stand mode (Screen orientation is set to 0° and base is horizontal)	340	20.50	20.50	20.50	20.50	20.50
		339	20.50	20.50	20.50	20.50	20.50
338		20.50	20.50	20.50	20.50	20.50	
337		20.50	20.50	20.50	20.50	20.50	
336		20.50	20.50	20.50	20.50	20.50	
335		20.50	20.50	20.50	20.50	20.50	
330		20.50	20.50	20.50	20.50	20.50	
320		20.50	20.50	20.50	20.50	20.50	
310		20.50	20.50	20.50	20.50	20.50	
300		20.50	20.50	20.50	20.50	20.50	
290		20.50	20.50	20.50	20.50	20.50	
280		20.50	20.50	20.50	20.50	20.50	
270		20.50	20.50	20.50	20.50	20.50	
260		20.50	20.50	20.50	20.50	20.50	
250		20.50	20.50	20.50	20.50	20.50	
240		20.50	20.50	20.50	20.50	20.50	
230		20.50	20.50	20.50	20.50	20.50	
220		20.50	20.50	20.50	20.50	20.50	
210		20.50	20.50	20.50	20.50	20.50	
205		20.50	20.50	20.50	20.50	20.50	
204	20.50	20.50	20.50	20.50	20.50		
203	20.50	20.50	20.50	20.50	20.50		
202	20.50	20.50	20.50	20.50	20.50		
201	20.50	20.50	20.50	20.50	20.50		
Tablet	200	18.50	18.00	18.00	17.50	17.00	
	199	18.50	18.00	18.00	17.50	17.00	
	198	18.50	18.00	18.00	17.50	17.00	
	197	18.50	18.00	18.00	17.50	17.00	
	196	18.50	18.00	18.00	17.50	17.00	
195	18.50	18.00	18.00	17.50	17.00		
Tablet	360	18.50	18.00	18.00	17.50	17.00	
	350	18.50	18.00	18.00	17.50	17.00	
	345	18.50	18.00	18.00	17.50	17.00	
	344	18.50	18.00	18.00	17.50	17.00	
	343	18.50	18.00	18.00	17.50	17.00	
	342	18.50	18.00	18.00	17.50	17.00	
341	18.50	18.00	18.00	17.50	17.00		
Tent mode (Screen orientation is set to 180° and base is not horizontal)	340	18.50	18.00	18.00	17.50	17.00	
	339	18.50	18.00	18.00	17.50	17.00	
	338	18.50	18.00	18.00	17.50	17.00	
	337	18.50	18.00	18.00	17.50	17.00	
	336	18.50	18.00	18.00	17.50	17.00	
	335	18.50	18.00	18.00	17.50	17.00	
330	18.50	18.00	18.00	17.50	17.00		
320	18.50	18.00	18.00	17.50	17.00		



		310	18.50	18.00	18.00	17.50	17.00
		300	18.50	18.00	18.00	17.50	17.00
		290	18.50	18.00	18.00	17.50	17.00
		280	18.50	18.00	18.00	17.50	17.00
		270	18.50	18.00	18.00	17.50	17.00
		260	18.50	18.00	18.00	17.50	17.00
		250	18.50	18.00	18.00	17.50	17.00
		240	18.50	18.00	18.00	17.50	17.00
		230	18.50	18.00	18.00	17.50	17.00
		220	18.50	18.00	18.00	17.50	17.00
		210	18.50	18.00	18.00	17.50	17.00
		205	18.50	18.00	18.00	17.50	17.00
		204	18.50	18.00	18.00	17.50	17.00
		203	18.50	18.00	18.00	17.50	17.00
		202	18.50	18.00	18.00	17.50	17.00
	201	18.50	18.00	18.00	17.50	17.00	
	Tablet	200	18.50	18.00	18.00	17.50	17.00
		199	18.50	18.00	18.00	17.50	17.00
		198	18.50	18.00	18.00	17.50	17.00
		197	18.50	18.00	18.00	17.50	17.00
		196	18.50	18.00	18.00	17.50	17.00
	Tablet	195	18.50	18.00	18.00	17.50	17.00
		360	18.50	18.00	18.00	17.50	17.00
		350	18.50	18.00	18.00	17.50	17.00
		340	18.50	18.00	18.00	17.50	17.00
		330	18.50	18.00	18.00	17.50	17.00
		320	18.50	18.00	18.00	17.50	17.00
		310	18.50	18.00	18.00	17.50	17.00
		300	18.50	18.00	18.00	17.50	17.00
		290	18.50	18.00	18.00	17.50	17.00
		280	18.50	18.00	18.00	17.50	17.00
		270	18.50	18.00	18.00	17.50	17.00
		260	18.50	18.00	18.00	17.50	17.00
		250	18.50	18.00	18.00	17.50	17.00
		240	18.50	18.00	18.00	17.50	17.00
		230	18.50	18.00	18.00	17.50	17.00
		220	18.50	18.00	18.00	17.50	17.00
		210	18.50	18.00	18.00	17.50	17.00
		205	18.50	18.00	18.00	17.50	17.00
		204	18.50	18.00	18.00	17.50	17.00
		203	18.50	18.00	18.00	17.50	17.00
	202	18.50	18.00	18.00	17.50	17.00	
	201	18.50	18.00	18.00	17.50	17.00	
	Book (screen orientation is 90° or 270°)	200	18.50	18.00	18.00	17.50	17.00
		199	18.50	18.00	18.00	17.50	17.00
198		18.50	18.00	18.00	17.50	17.00	
197		18.50	18.00	18.00	17.50	17.00	
196		18.50	18.00	18.00	17.50	17.00	
195		18.50	18.00	18.00	17.50	17.00	
190		18.50	18.00	18.00	17.50	17.00	
180		18.50	18.00	18.00	17.50	17.00	
170		18.50	18.00	18.00	17.50	17.00	
160		18.50	18.00	18.00	17.50	17.00	
150	18.50	18.00	18.00	17.50	17.00		
140	18.50	18.00	18.00	17.50	17.00		
130	18.50	18.00	18.00	17.50	17.00		



		120	18.50	18.00	18.00	17.50	17.00
		110	18.50	18.00	18.00	17.50	17.00
		100	18.50	18.00	18.00	17.50	17.00
		90	18.50	18.00	18.00	17.50	17.00
		80	18.50	18.00	18.00	17.50	17.00
		70	18.50	18.00	18.00	17.50	17.00
		60	18.50	18.00	18.00	17.50	17.00
		50	18.50	18.00	18.00	17.50	17.00
		40	18.50	18.00	18.00	17.50	17.00
		39	18.50	18.00	18.00	17.50	17.00
		38	18.50	18.00	18.00	17.50	17.00
		37	18.50	18.00	18.00	17.50	17.00
		36	18.50	18.00	18.00	17.50	17.00
		35	18.50	18.00	18.00	17.50	17.00
		Lid Close	34	standby	standby	standby	standby
	33		standby	standby	standby	standby	standby
	32		standby	standby	standby	standby	standby
	31		standby	standby	standby	standby	standby
	30		standby	standby	standby	standby	standby
	20		standby	standby	standby	standby	standby
	10	standby	standby	standby	standby	standby	
	0	standby	standby	standby	standby	standby	

5. RF Exposure Limits

5.1 Uncontrolled Environment

Uncontrolled Environments are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure. The general population/uncontrolled exposure limits are applicable to situations in which the general public may be exposed or in which persons who are exposed as a consequence of their employment may not be made fully aware of the potential for exposure or cannot exercise control over their exposure. Members of the general public would come under this category when exposure is not employment-related; for example, in the case of a wireless transmitter that exposes persons in its vicinity.

5.2 Controlled Environment

Controlled Environments are defined as locations where there is exposure that may be incurred by persons who are aware of the potential for exposure, (i.e. as a result of employment or occupation). In general, occupational/controlled exposure limits are applicable to situations in which persons are exposed as a consequence of their employment, who have been made fully aware of the potential for exposure and can exercise control over their exposure. The exposure category is also applicable when the exposure is of a transient nature due to incidental passage through a location where the exposure levels may be higher than the general population/uncontrolled limits, but the exposed person is fully aware of the potential for exposure and can exercise control over his or her exposure by leaving the area or by some other appropriate means.

Limits for Occupational/Controlled Exposure (W/kg)

Whole-Body	Partial-Body	Hands, Wrists, Feet and Ankles
0.4	8.0	20.0

Limits for General Population/Uncontrolled Exposure (W/kg)

Whole-Body	Partial-Body	Hands, Wrists, Feet and Ankles
0.08	1.6	4.0

1. Whole-Body SAR is averaged over the entire body, partial-body SAR is averaged over any 1gram of tissue defined as a tissue volume in the shape of a cube. SAR for hands, wrists, feet and ankles is averaged over any 10 grams of tissue defined as a tissue volume in the shape of a cube.



6. Specific Absorption Rate (SAR)

6.1 Introduction

SAR is related to the rate at which energy is absorbed per unit mass in an object exposed to a radio field. The SAR distribution in a biological body is complicated and is usually carried out by experimental techniques or numerical modeling. The standard recommends limits for two tiers of groups, occupational/controlled and general population/uncontrolled, based on a person's awareness and ability to exercise control over his or her exposure. In general, occupational/controlled exposure limits are higher than the limits for general population/uncontrolled.

6.2 SAR Definition

The SAR definition is the time derivative (rate) of the incremental energy (dW) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dv) of a given density (ρ). The equation description is as below:

$$SAR = \frac{d}{dt} \left(\frac{dW}{dm} \right) = \frac{d}{dt} \left(\frac{dW}{\rho dv} \right)$$


SAR is expressed in units of Watts per kilogram (W/kg)

$$SAR = \frac{\sigma |E|^2}{\rho}$$

Where: σ is the conductivity of the tissue, ρ is the mass density of the tissue and E is the RMS electrical field strength.

7. System Description and Setup

The DASY system used for performing compliance tests consists of the following items:

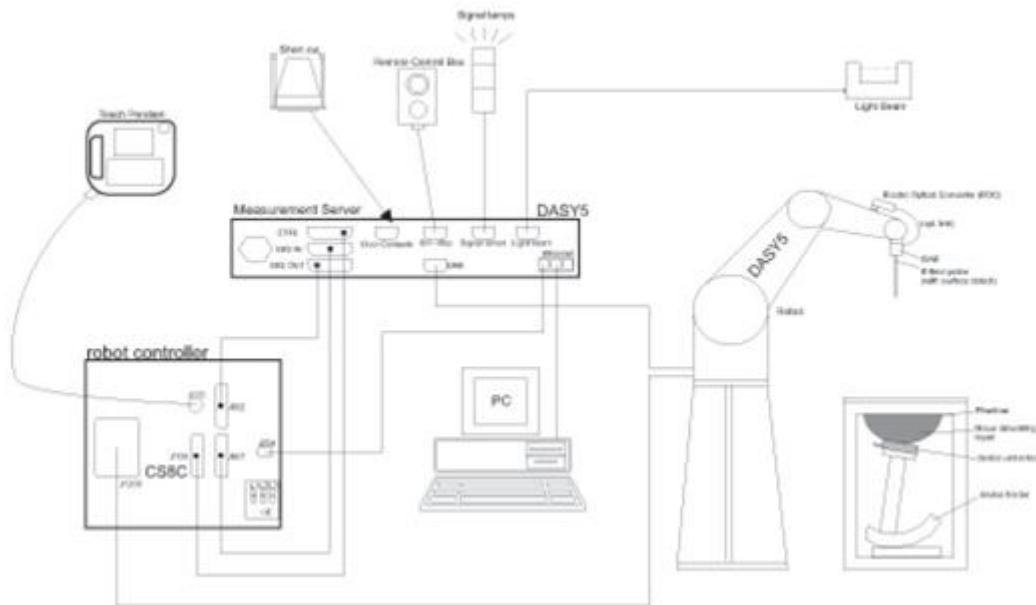

- A standard high precision 6-axis robot with controller, teach pendant and software. An arm extension for accommodating the data acquisition electronics (DAE).
- An isotropic Field probe optimized and calibrated for the targeted measurement.
- A data acquisition electronics (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.
- The Electro-optical converter (EOC) performs the conversion from optical to electrical signals for the digital communication to the DAE. To use optical surface detection, a special version of the EOC is required. The EOC signal is transmitted to the measurement server.
- The function of the measurement server is to perform the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
- The Light Beam used is for probe alignment. This improves the (absolute) accuracy of the probe positioning.
- A computer running WinXP or Win7 and the DASY5 software.
- Remote control and teach pendant as well as additional circuitry for robot safety such as warning lamps, etc.
- The phantom, the device holder and other accessories according to the targeted measurement.

7.1 Test Site Location


The SAR measurement facilities used to collect data are within both Sporton Lab list below test site location are accredited to ISO 17025 by Taiwan Accreditation Foundation (TAF code: 1190 and 0007) and the FCC designation No.TW1190 and TW0007 under the FCC 2.948(e) by Mutual Recognition Agreement (MRA) in FCC test.

Test Site	SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory			
Test Site Location	TW1190 No. 52, Huaya 1st Rd., Guishan Dist., Taoyuan City 333, CHINESE TAIPEI		TW0007 No. 58, Aly. 75, Ln. 564, Wehnuia 3rd, Rd., Guishan Dist., Taoyuan City, CHINESE TAIPEI	
	SAR01-HY	SAR03-HY	SAR08-HY	SAR09-HY
Test Site No.	SAR04-HY	SAR05-HY	SAR11-HY	SAR12-HY
	SAR06-HY	SAR10-HY		


7.2 E-Field Probe

The SAR measurement is conducted with the dosimetric probe (manufactured by SPEAG). The probe is specially designed and calibrated for use in liquid with high permittivity. The dosimetric probe has special calibration in liquid at different frequency. This probe has a built in optical surface detection system to prevent from collision with phantom.

<ES3DV3 Probe>

Construction	Symmetric design with triangular core Interleaved sensors Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., DGBE)	
Frequency	10 MHz – 4 GHz; Linearity: ± 0.2 dB (30 MHz – 4 GHz)	
Directivity	± 0.2 dB in TSL (rotation around probe axis) ± 0.3 dB in TSL (rotation normal to probe axis)	
Dynamic Range	5 μ W/g – >100 mW/g; Linearity: ± 0.2 dB	
Dimensions	Overall length: 337 mm (tip: 20 mm) Tip diameter: 3.9 mm (body: 12 mm) Distance from probe tip to dipole centers: 3.0 mm	

<EX3DV4 Probe>

Construction	Symmetric design with triangular core Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., DGBE)	
Frequency	10 MHz – >6 GHz Linearity: ± 0.2 dB (30 MHz – 6 GHz)	
Directivity	± 0.3 dB in TSL (rotation around probe axis) ± 0.5 dB in TSL (rotation normal to probe axis)	
Dynamic Range	10 μ W/g – >100 mW/g Linearity: ± 0.2 dB (noise: typically <1 μ W/g)	
Dimensions	Overall length: 337 mm (tip: 20 mm) Tip diameter: 2.5 mm (body: 12 mm) Typical distance from probe tip to dipole centers: 1 mm	

7.3 Data Acquisition Electronics (DAE)

The data acquisition electronics (DAE) consists of a highly sensitive electrometer-grade preamplifier with auto-zeroing, a channel and gain-switching multiplexer, a fast 16 bit AD-converter and a command decoder and control logic unit. Transmission to the measurement server is accomplished through an optical downlink for data and status information as well as an optical uplink for commands and the clock.


The input impedance of the DAE is 200 MOhm; the inputs are symmetrical and floating. Common mode rejection is above 80 dB.



Fig 5.1 Photo of DAE


7.4 Phantom

<SAM Twin Phantom>

Shell Thickness	2 ± 0.2 mm; Center ear point: 6 ± 0.2 mm	
Filling Volume	Approx. 25 liters	
Dimensions	Length: 1000 mm; Width: 500 mm; Height: adjustable feet	
Measurement Areas	Left Hand, Right Hand, Flat Phantom	

The bottom plate contains three pair of bolts for locking the device holder. The device holder positions are adjusted to the standard measurement positions in the three sections. A white cover is provided to tap the phantom during off-periods to prevent water evaporation and changes in the liquid parameters. On the phantom top, three reference markers are provided to identify the phantom position with respect to the robot.

<ELI Phantom>

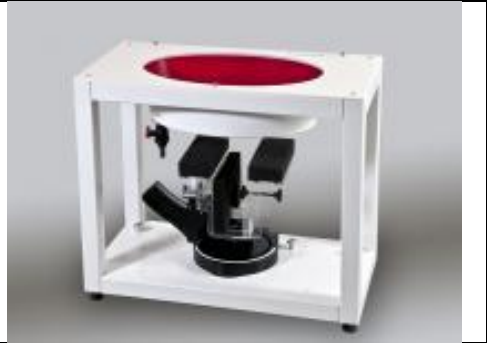Shell Thickness	2 ± 0.2 mm (sagging: <1%)	
Filling Volume	Approx. 30 liters	
Dimensions	Major ellipse axis: 600 mm Minor axis: 400 mm	

The ELI phantom is intended for compliance testing of handheld and body-mounted wireless devices in the frequency range of 30 MHz to 6 GHz. ELI4 is fully compatible with standard and all known tissue simulating liquids.

7.5 Device Holder

<Mounting Device for Hand-Held Transmitter>

In combination with the Twin SAM V5.0/V5.0c or ELI phantoms, the Mounting Device for Hand-Held Transmitters enables rotation of the mounted transmitter device to specified spherical coordinates. At the heads, the rotation axis is at the ear opening. Transmitter devices can be easily and accurately positioned according to IEC 62209-1, IEEE 1528, FCC, or other specifications. The device holder can be locked for positioning at different phantom sections (left head, right head, flat). And upgrade kit to Mounting Device to enable easy mounting of wider devices like big smart-phones, e-books, small tablets, etc. It holds devices with width up to 140 mm.



Mounting Device for Hand-Held Transmitters



Mounting Device Adaptor for Wide-Phones

<Mounting Device for Laptops and other Body-Worn Transmitters>

The extension is lightweight and made of POM, acrylic glass and foam. It fits easily on the upper part of the mounting device in place of the phone positioned. The extension is fully compatible with the SAM Twin and ELI phantoms.



Mounting Device for Laptops



8. Measurement Procedures

The measurement procedures are as follows:

<Conducted power measurement>

- (a) For WWAN power measurement, use base station simulator to configure EUT WWAN transmission in conducted connection with RF cable, at maximum power in each supported wireless interface and frequency band.
- (b) Read the WWAN RF power level from the base station simulator.
- (c) For WLAN/BT power measurement, use engineering software to configure EUT WLAN/BT continuously transmission, at maximum RF power in each supported wireless interface and frequency band
- (d) Connect EUT RF port through RF cable to the power meter, and measure WLAN/BT output power

<SAR measurement>

- (a) Use base station simulator to configure EUT WWAN transmission in radiated connection, and engineering software to configure EUT WLAN/BT continuously transmission, at maximum RF power, in the highest power channel.
- (b) Place the EUT in the positions as Appendix D demonstrates.
- (c) Set scan area, grid size and other setting on the DASY software.
- (d) Measure SAR results for the highest power channel on each testing position.
- (e) Find out the largest SAR result on these testing positions of each band
- (f) Measure SAR results for other channels in worst SAR testing position if the reported SAR of highest power channel is larger than 0.8 W/kg

According to the test standard, the recommended procedure for assessing the peak spatial-average SAR value consists of the following steps:

- (a) Power reference measurement
- (b) Area scan
- (c) Zoom scan
- (d) Power drift measurement

8.1 Spatial Peak SAR Evaluation

The procedure for spatial peak SAR evaluation has been implemented according to the test standard. It can be conducted for 1g and 10g, as well as for user-specific masses. The DASY software includes all numerical procedures necessary to evaluate the spatial peak SAR value.

The base for the evaluation is a "cube" measurement. The measured volume must include the 1g and 10g cubes with the highest averaged SAR values. For that purpose, the center of the measured volume is aligned to the interpolated peak SAR value of a previously performed area scan.

The entire evaluation of the spatial peak values is performed within the post-processing engine (SEMCAD). The system always gives the maximum values for the 1g and 10g cubes. The algorithm to find the cube with highest averaged SAR is divided into the following stages:

- (a) Extraction of the measured data (grid and values) from the Zoom Scan
- (b) Calculation of the SAR value at every measurement point based on all stored data (A/D values and measurement parameters)
- (c) Generation of a high-resolution mesh within the measured volume
- (d) Interpolation of all measured values from the measurement grid to the high-resolution grid
- (e) Extrapolation of the entire 3-D field distribution to the phantom surface over the distance from sensor to surface
- (f) Calculation of the averaged SAR within masses of 1g and 10g

8.2 Power Reference Measurement

The Power Reference Measurement and Power Drift Measurements are for monitoring the power drift of the device under test in the batch process. The minimum distance of probe sensors to surface determines the closest measurement point to phantom surface. This distance cannot be smaller than the distance of sensor calibration points to probe tip as defined in the probe properties.

8.3 Area Scan

The area scan is used as a fast scan in two dimensions to find the area of high field values, before doing a fine measurement around the hot spot. The sophisticated interpolation routines implemented in DASY software can find the maximum found in the scanned area, within a range of the global maximum. The range (in dB) is specified in the standards for compliance testing. For example, a 2 dB range is required in IEEE standard 1528 and IEC 62209 standards, whereby 3 dB is a requirement when compliance is assessed in accordance with the ARIB standard (Japan), if only one zoom scan follows the area scan, then only the absolute maximum will be taken as reference. For cases where multiple maximums are detected, the number of zoom scans has to be increased accordingly.

Area scan parameters extracted from FCC KDB 865664 D01v01r04 SAR measurement 100 MHz to 6 GHz.

	≤ 3 GHz	> 3 GHz
Maximum distance from closest measurement point (geometric center of probe sensors) to phantom surface	5 ± 1 mm	$\frac{1}{2} \cdot \delta \cdot \ln(2) \pm 0.5$ mm
Maximum probe angle from probe axis to phantom surface normal at the measurement location	30° ± 1°	20° ± 1°
Maximum area scan spatial resolution: $\Delta x_{Area}, \Delta y_{Area}$	≤ 2 GHz: ≤ 15 mm 2 – 3 GHz: ≤ 12 mm	3 – 4 GHz: ≤ 12 mm 4 – 6 GHz: ≤ 10 mm
	When the x or y dimension of the test device, in the measurement plane orientation, is smaller than the above, the measurement resolution must be ≤ the corresponding x or y dimension of the test device with at least one measurement point on the test device.	

8.4 Zoom Scan

Zoom scans are used assess the peak spatial SAR values within a cubic averaging volume containing 1 gram and 10 gram of simulated tissue. The zoom scan measures points (refer to table below) within a cube shoes base faces are centered on the maxima found in a preceding area scan job within the same procedure. When the measurement is done, the zoom scan evaluates the averaged SAR for 1 gram and 10 gram and displays these values next to the job's label.

Zoom scan parameters extracted from FCC KDB 865664 D01v01r04 SAR measurement 100 MHz to 6 GHz.

		≤ 3 GHz	> 3 GHz	
Maximum zoom scan spatial resolution: $\Delta x_{Zoom}, \Delta y_{Zoom}$		≤ 2 GHz: ≤ 8 mm 2 – 3 GHz: ≤ 5 mm*	3 – 4 GHz: ≤ 5 mm* 4 – 6 GHz: ≤ 4 mm*	
Maximum zoom scan spatial resolution, normal to phantom surface	uniform grid: $\Delta z_{Zoom}(n)$	≤ 5 mm	3 – 4 GHz: ≤ 4 mm 4 – 5 GHz: ≤ 3 mm 5 – 6 GHz: ≤ 2 mm	
	graded grid	$\Delta z_{Zoom}(1)$: between 1 st two points closest to phantom surface	≤ 4 mm	3 – 4 GHz: ≤ 3 mm 4 – 5 GHz: ≤ 2.5 mm 5 – 6 GHz: ≤ 2 mm
		$\Delta z_{Zoom}(n>1)$: between subsequent points	$\leq 1.5 \cdot \Delta z_{Zoom}(n-1)$	
Minimum zoom scan volume	x, y, z	≥ 30 mm	3 – 4 GHz: ≥ 28 mm 4 – 5 GHz: ≥ 25 mm 5 – 6 GHz: ≥ 22 mm	
Note: δ is the penetration depth of a plane-wave at normal incidence to the tissue medium; see draft standard IEEE P1528-2011 for details. * When zoom scan is required and the <i>reported</i> SAR from the <i>area scan based 1-g SAR estimation</i> procedures of KDB 447498 is ≤ 1.4 W/kg, ≤ 8 mm, ≤ 7 mm and ≤ 5 mm zoom scan resolution may be applied, respectively, for 2 GHz to 3 GHz, 3 GHz to 4 GHz and 4 GHz to 6 GHz.				

8.5 Volume Scan Procedures

The volume scan is used for assess overlapping SAR distributions for antennas transmitting in different frequency bands. It is equivalent to an oversized zoom scan used in standalone measurements. The measurement volume will be used to enclose all the simultaneous transmitting antennas. For antennas transmitting simultaneously in different frequency bands, the volume scan is measured separately in each frequency band. In order to sum correctly to compute the 1g aggregate SAR, the EUT remain in the same test position for all measurements and all volume scan use the same spatial resolution and grid spacing. When all volume scan were completed, the software, SEMCAD postprocessor can combine and subsequently superpose these measurement data to calculating the multiband SAR.

8.6 Power Drift Monitoring

All SAR testing is under the EUT install full charged battery and transmit maximum output power. In DASy measurement software, the power reference measurement and power drift measurement procedures are used for monitoring the power drift of EUT during SAR test. Both these procedures measure the field at a specified reference position before and after the SAR testing. The software will calculate the field difference in dB. If the power drifts more than 5%, the SAR will be retested.



9. Test Equipment List

Manufacturer	Name of Equipment	Type/Model	Serial Number	Calibration	
				Last Cal.	Due Date
SPEAG	2450MHz System Validation Kit ⁽²⁾	D2450V2	929	Nov. 21, 2019	Nov. 19, 2021
SPEAG	5GHz System Validation Kit ⁽²⁾	D5GHzV2	1006	Sep. 27, 2018	Sep. 24, 2021
SPEAG	Data Acquisition Electronics	DAE4	854	May. 26, 2020	May. 25, 2021
SPEAG	Data Acquisition Electronics	DAE4	1399	Feb. 18, 2020	Feb. 17, 2021
SPEAG	Dosimetric E-Field Probe	EX3DV4	7306	Jul. 24, 2020	Jul. 23, 2021
SPEAG	Dosimetric E-Field Probe	EX3DV4	7590	Apr. 14, 2020	Apr. 13, 2021
RCPTWN	Thermometer	HTC-1	TM685-1	Nov. 10, 2020	Nov. 09, 2021
RCPTWN	Thermometer	HTC-1	TM560-2	Nov. 10, 2020	Nov. 09, 2021
R&S	BT Base Station	CBT	100815	Feb. 15, 2020	Feb. 14, 2021
SPEAG	Device Holder	N/A	N/A	N/A	N/A
Anritsu	Signal Generator	MG3710A	6201502524	Nov. 11, 2020	Nov. 10, 2021
Keysight	ENA Network Analyzer	E5071C	MY46101588	Jun. 10, 2020	Jun. 09, 2021
SPEAG	Dielectric Probe Kit	DAK-3.5	1126	Sep. 16, 2020	Sep. 15, 2021
LINE SEIKI	Digital Thermometer	DTM3000-spezial	2942	Nov. 06, 2020	Nov. 05, 2021
Anritsu	Power Meter	ML2495A	1419002	Aug. 19, 2020	Aug. 18, 2021
Anritsu	Power Sensor	MA2411B	1911176	Aug. 18, 2020	Aug. 17, 2021
Anritsu	Power Meter	ML2495A	1804003	Oct. 21, 2020	Oct. 20, 2021
Anritsu	Power Sensor	MA2411B	1726150	Oct. 21, 2020	Oct. 20, 2021
Anritsu	Spectrum Analyzer	MS2830A	6201396378	Jun. 30, 2020	Jun. 29, 2021
Anritsu	Spectrum Analyzer	N9010A	MY53470118	Mar. 12, 2020	Mar. 11, 2021
Mini-Circuits	Power Amplifier	ZVE-8G+	6418	Oct. 21, 2020	Oct. 20, 2021
Mini-Circuits	Power Amplifier	ZVE-8G+	479102029	Aug. 26, 2020	Aug. 25, 2021
ATM	Dual Directional Coupler	C122H-10	P610410z-02	Note 1	
Woken	Attenuator 1	WK0602-XX	N/A	Note 1	
PE	Attenuator 2	PE7005-10	N/A	Note 1	
PE	Attenuator 3	PE7005- 3	N/A	Note 1	

General Note:

1. Prior to system verification and validation, the path loss from the signal generator to the system check source and the power meter, which includes the amplifier, cable, attenuator and directional coupler, was measured by the network analyzer. The reading of the power meter was offset by the path loss difference between the path to the power meter and the path to the system check source to monitor the actual power level fed to the system check source.
2. The dipole calibration interval can be extended to 3 years with justification according to KDB 865664 D01. The dipoles are also not physically damaged, or repaired during the interval. The justification data in appendix C can be found which the return loss is < -20dB, within 20% of prior calibration, the impedance is within 5 ohm of prior calibration for each dipole.

10. System Verification

10.1 Tissue Verification

The tissue dielectric parameters of tissue-equivalent media used for SAR measurements must be characterized within a temperature range of 18°C to 25°C, measured with calibrated instruments and apparatuses, such as network analyzers and temperature probes. The temperature of the tissue-equivalent medium during SAR measurement must also be within 18°C to 25°C and within ± 2°C of the temperature when the tissue parameters are characterized. The tissue dielectric measurement system must be calibrated before use. The dielectric parameters must be measured before the tissue-equivalent medium is used in a series of SAR measurements.

The liquid tissue depth was at least 15cm in the phantom for all SAR testing

<Tissue Dielectric Parameter Check Results>

Frequency (MHz)	Liquid Temp. (°C)	Conductivity (σ)	Permittivity (ε _r)	Conductivity Target (σ)	Permittivity Target (ε _r)	Delta (σ) (%)	Delta (ε _r) (%)	Limit (%)	Date
2450	22.2	1.829	38.568	1.80	39.20	1.61	-1.61	±5	2020/11/21
2450	22.8	1.834	38.812	1.80	39.20	1.89	-0.99	±5	2020/12/10
5250	22.2	4.551	36.768	4.71	35.95	-3.38	2.28	±5	2020/11/21
5600	22.2	4.903	36.281	5.07	35.50	-3.29	2.20	±5	2020/11/21
5750	22.2	5.058	36.083	5.22	35.35	-3.10	2.07	±5	2020/11/21

10.2 System Performance Check Results

Comparing to the original SAR value provided by SPEAG, the verification data should be within its specification of 10 %. Below table shows the target SAR and measured SAR after normalized to 1W input power. The table below indicates the system performance check can meet the variation criterion and the plots can be referred to Appendix A of this report.

Date	Frequency (MHz)	Input Power (mW)	Dipole S/N	Probe S/N	DAE S/N	Measured 1g SAR (W/kg)	Targeted 1g SAR (W/kg)	Normalized 1g SAR (W/kg)	Deviation (%)
2020/11/21	2450	250	D2450V2-929	EX3DV4 - SN7306	DAE4 Sn1399	13.90	53.10	55.6	4.71
2020/12/10	2450	250	D2450V2-929	EX3DV4 - SN7590	DAE4 Sn854	13.20	53.10	52.8	-0.56
2020/11/21	5250	100	D5GHzV2-1006-5250	EX3DV4 - SN7306	DAE4 Sn1399	7.60	80.70	76	-5.82
2020/11/21	5600	100	D5GHzV2-1006-5600	EX3DV4 - SN7306	DAE4 Sn1399	8.29	83.30	82.9	-0.48
2020/11/21	5750	100	D5GHzV2-1006-5750	EX3DV4 - SN7306	DAE4 Sn1399	7.41	80.40	74.1	-7.84

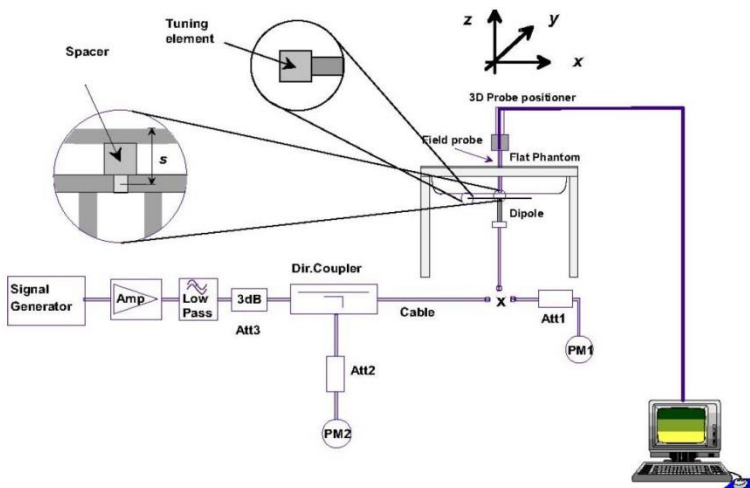


Fig 8.3.1 System Performance Check Setup



Fig 8.3.2 Setup Photo



11. WiFi/Bluetooth Output Power (Unit: dBm)

General Note:

1. For each antenna, transmit power in SISO operation is larger than (or equal to) the power in MIMO operation, RF exposure compliance of MIMO mode can be deduced from the compliance simultaneous transmission of antennas operating in SISO mode.
2. Per KDB 248227 D01v02r02, the simultaneous SAR provisions in KDB publication 447498 should be applied to determine simultaneous transmission SAR test exclusion for WiFi MIMO. If the sum of 1g single transmission chain SAR measurements is $< 1.6\text{W/kg}$ and SAR peak to location ratio ≤ 0.04 , no additional SAR measurements for MIMO.
3. The maximum output power specified for production units are determined for all applicable 802.11 transmission modes in each standalone and aggregated frequency band. Maximum output power is measured for the highest maximum output power configuration(s) in each frequency band according to the default power measurement procedures. For "Not required", SAR Test reduction was applied from KDB 248227 guidance, Sec. 2.1, b), 1) when the same maximum power is specified for multiple transmission modes in a frequency band, the largest channel bandwidth, lowest order modulation, lowest data rate and lowest order 802.11a/g/n/ac mode is used for SAR measurement, on the highest measured output power channel in the initial test configuration, for each frequency band or when MIMO mode was not performed, due to for each antenna, transmit power in SISO operation is larger than (or equal to) the power in MIMO operation, RF exposure compliance of MIMO mode can be deduced from the compliance simultaneous transmission of antennas operating in SISO mode. Additional output power measurements were not necessary.
4. Per KDB 248227 D01v02r02, SAR test reduction is determined according to 802.11 transmission mode configurations and certain exposure conditions with multiple test positions. In the 2.4 GHz band, separate SAR procedures are applied to DSSS and OFDM configurations to simplify DSSS test requirements. For OFDM, in both 2.4 and 5 GHz bands, an initial test configuration must be determined for each standalone and aggregated frequency band, according to the transmission mode configuration with the highest maximum output power specified for production units to perform SAR measurements. If the same highest maximum output power applies to different combinations of channel bandwidths, modulations and data rates, additional procedures are applied to determine which test configurations require SAR measurement. When applicable, an initial test position may be applied to reduce the number of SAR measurements required for next to the ear, UMPC mini-tablet or hotspot mode configurations with multiple test positions.
5. For 2.4 GHz 802.11b DSSS, either the initial test position procedure for multiple exposure test positions or the DSSS procedure for fixed exposure position is applied; these are mutually exclusive. For 2.4 GHz and 5 GHz OFDM configurations, the initial test configuration is applied to measure SAR using either the initial test position procedure for multiple exposure test position configurations or the initial test configuration procedures for fixed exposure test conditions. Based on the reported SAR of the measured configurations and maximum output power of the transmission mode configurations that are not included in the initial test configuration, the subsequent test configuration and initial test position procedures are applied to determine if SAR measurements are required for the remaining OFDM transmission configurations. In general, the number of test channels that require SAR measurement is minimized based on maximum output power measured for the test sample(s).
6. For OFDM transmission configurations in the 2.4 GHz and 5 GHz bands, When the same maximum power is specified for multiple transmission modes in a frequency band, the largest channel bandwidth, lowest order modulation, lowest data rate and lowest order 802.11a/g/n/ac mode is used for SAR measurement, on the highest measured output power channel for each frequency band.
7. DSSS and OFDM configurations are considered separately according to the required SAR procedures. SAR is measured in the initial test position using the 802.11 transmission mode configuration required by the DSSS procedure or initial test configuration and subsequent test configuration(s) according to the OFDM procedures.18 The initial test position procedure is described in the following:
 - a. When the reported SAR of the initial test position is $\leq 0.4\text{ W/kg}$, further SAR measurement is not required for the other test positions in that exposure configuration and 802.11 transmission mode combinations within the frequency band or aggregated band.
 - b. When the reported SAR of the test position is $> 0.4\text{ W/kg}$, SAR is repeated for the 802.11 transmission mode configuration tested in the initial test position to measure the subsequent next closet/smallest test separation distance and maximum coupling test position on the highest maximum output power channel, until the report SAR is $\leq 0.8\text{ W/kg}$ or all required test position are tested.
 - c. For all positions/configurations, when the reported SAR is $> 0.8\text{ W/kg}$, SAR is measured for these test positions/configurations on the subsequent next highest measured output power channel(s) until the reported SAR is $\leq 1.2\text{ W/kg}$ or all required channels are tested.
8. Per 201904 TCBC workshops, General principles of FCC KDB Publication 248227 D01 can be applied to determine the SAR Initial Test Configurations and test reduction for 802.11ax SAR testing. For the table below the 802.11ax maximum power is SU (non-OFDMA), and the SU maximum power also higher than RU (OFDMA)
9. In applying the test guidance, the IEEE 802.11 mode with the maximum output power (out of all modes) should be considered for testing
10. For modes with the same maximum output power, the guidance from section 5.3.2 a) of FCC KDB Publication 248227 D01 should be applied, with 802.11ax being considered as the highest 802.11 mode for the appropriate frequency bands
11. When SAR testing for 802.11ax is required
 - a. If the maximum output power is highest for OFDMA scenarios, choose the tone size with the maximum number of tones and the highest maximum output power
 - b. Otherwise, consider the fully allocated channel for SAR testing
 - c. When SAR testing is required on RU sizes less than the fully allocated channel, use the RU number closest to the middle of the channel, choosing the higher RU number when two RUs are equidistant to the middle of the channel



<Tablet Mode>

2.4GHz WLAN				Ant 1			Ant 2			Ant 1+2			
2.4GHz WLAN	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %	Average power (dBm)	Tune-Up Limit	Duty Cycle %	Average power (dBm)	Tune-Up Limit	Duty Cycle %	
	2.4GHz WLAN	802.11b 1Mbps	1	2412	18.20	18.50	100	18.30	18.50	100			
6			2437	18.20	18.50	18.20		18.50					
11			2462	18.10	18.50	18.20		18.50					
12			2467	17.10	17.50	16.80		17.00					
13			2472	15.20	15.25	14.40		14.50					
802.11g 6Mbps		1	2412	Not required	18.50	Not required	18.50	Not required	18.50	Not required			
		6	2437		18.50		18.50						
		11	2462		18.50		18.50						
		12	2467		17.50		17.00						
		13	2472		15.25		14.50						
802.11n-HT20 MCS0		1	2412	Not required	18.50	Not required	18.50	Not required	18.50	Not required		15.50	Not required
		6	2437		18.50		18.50				16.75		
		11	2462		18.50		18.50				14.50		
		12	2467		17.00		17.00				11.50		
		13	2472		14.50		14.50				8.50		
802.11n-HT40 MCS0		3	2422	Not required	18.50	Not required	18.50	Not required	18.50	Not required		14.00	Not required
		6	2437		18.50		18.50				14.50		
		9	2452		18.50		18.50				14.50		
		10	2457		18.50		18.50				10.00		
		11	2462		18.50		18.50				10.00		
802.11ax-HE20 MCS0	1	2412	Not required	18.50	Not required	18.50	Not required	18.50	Not required		15.50	Not required	
	6	2437		18.50		18.50				16.75			
	11	2462		18.50		18.50				14.50			
	12	2467		17.00		17.00				11.50			
	13	2472		14.50		14.50				8.50			
802.11ax-HE40 MCS0	3	2422	Not required	18.50	Not required	18.50	Not required	18.50	Not required		14.00	Not required	
	6	2437		18.50		18.50				14.50			
	9	2452		18.50		18.50				14.50			
	10	2457		18.50		18.50				10.00			
	11	2462		18.50		18.50				10.00			



5.2GHz WLAN				Ant 1			Ant 2			Ant 1+2		
5.2GHz WLAN	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %	Average power (dBm)	Tune-Up Limit	Duty Cycle %	Average power (dBm)	Tune-Up Limit	Duty Cycle %
	5.2GHz WLAN	802.11a 6Mbps	36	5180	Not required	18.00	Not required	Not required	Not required	18.00	Not required	
40			5200	18.00								
44			5220	18.00								
48			5240	18.00								
802.11n-HT20 MCS0		36	5180	18.00		18.00				17.50		
		40	5200	18.00		18.00				18.00		
		44	5220	18.00		18.00				18.00		
		48	5240	18.00		18.00				18.00		
802.11n-HT40 MCS0		38	5190	18.00		18.00				17.25		
		46	5230	18.00		18.00				18.00		
802.11ac-VHT20 MCS0		36	5180	18.00		18.00				17.50		
		40	5200	18.00		18.00				18.00		
		44	5220	18.00		18.00				18.00		
		48	5240	18.00		18.00				18.00		
802.11ac-VHT40 MCS0		38	5190	18.00		18.00				17.25		
		46	5230	18.00		18.00				18.00		
802.11ac-VHT80 MCS0		42	5210	18.00		18.00				17.00		
802.11ax-HE20 MCS0		36	5180	18.00		18.00				17.50		
		40	5200	18.00		18.00				18.00		
		44	5220	18.00		18.00				18.00		
		48	5240	18.00		18.00				18.00		
802.11ax-HE40 MCS0		38	5190	18.00		18.00				17.25		
		46	5230	18.00		18.00				18.00		
802.11ax-HE80 MCS0		42	5210	18.00		18.00				17.00		



5.3GHz WLAN				Ant 1			Ant 2			Ant 1+2							
5.3GHz WLAN	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %	Average power (dBm)	Tune-Up Limit	Duty Cycle %	Average power (dBm)	Tune-Up Limit	Duty Cycle %					
	5.3GHz WLAN	802.11a 6Mbps	52	5260	Not required	18.00	Not required	Not required	Not required	Not required							
56			5280	18.00													
60			5300	18.00													
64			5320	17.75													
802.11n-HT20 MCS0		52	5260	18.00													
		56	5280	18.00													
		60	5300	18.00													
		64	5320	17.75													
802.11n-HT40 MCS0		54	5270	18.00													
		62	5310	17.00													
802.11ac-VHT20 MCS0		52	5260	18.00													
		56	5280	18.00													
		60	5300	18.00													
		64	5320	17.75													
802.11ac-VHT40 MCS0		54	5270	18.00													
		62	5310	17.00													
802.11ac-VHT80 MCS0		58	5290	17.60		18.00					98.63	17.60	18.00	98.76			
802.11ac-VHT160 MCS0		50	5250			14.50							14.50				
802.11ax-HE20 MCS0		52	5260			18.00							18.00				
		56	5280			18.00							18.00				
	60	5300		18.00			18.00										
	64	5320		17.50			17.50										
802.11ax-HE40 MCS0	54	5270		18.00			18.00										
	62	5310		17.00			17.00										
802.11ax-HE80 MCS0	58	5290		18.00			18.00										
802.11ax-HE160 MCS0	50	5250		14.50			14.50										



5.5GHz WLAN				Ant 1			Ant 2			Ant 1+2		
Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %	Average power (dBm)	Tune-Up Limit	Duty Cycle %	Average power (dBm)	Tune-Up Limit	Duty Cycle %	
802.11a 6Mbps	100	5500	Not required	17.50	Not required	Not required	17.50	Not required	Not required	Not required	Not required	
	116	5580		17.50			17.50					
	124	5620		17.50			17.50					
	132	5660		17.50			17.50					
	140	5700		17.50			17.50					
	144	5720		17.50			17.50					
802.11n-HT20 MCS0	100	5500	Not required	17.50	Not required	Not required	17.50	Not required	Not required	Not required	17.50	
	116	5580		17.50			17.50					
	124	5620		17.50			17.50					
	132	5660		17.50			17.50					
	144	5720		17.50			17.50					
802.11n-HT40 MCS0	102	5510	Not required	17.50	Not required	Not required	17.50	Not required	Not required	Not required	17.25	
	110	5550		17.50			17.50					
	126	5630		17.50			17.50					
	134	5670		17.50			17.50					
	142	5710		17.50			17.50					
802.11ac-VHT20 MCS0	100	5500	Not required	17.50	Not required	Not required	17.50	Not required	Not required	Not required	17.50	
	116	5580		17.50			17.50					
	124	5620		17.50			17.50					
	132	5660		17.50			17.50					
	144	5720		17.50			17.50					
802.11ac-VHT40 MCS0	102	5510	Not required	17.50	Not required	Not required	17.50	Not required	Not required	Not required	17.25	
	110	5550		17.50			17.50					
	126	5630		17.50			17.50					
	134	5670		17.50			17.50					
	142	5710		17.50			17.50					
802.11ac-VHT80 MCS0	106	5530	17.20	17.50	98.63	Not required	17.30	17.50	98.76	Not required	16.50	
	122	5610	17.20	17.50			17.30				17.50	
	138	5690	17.10	17.50			17.30				17.50	
802.11ac-VHT160 MCS0	114	5570	Not required	15.00	Not required	Not required	15.00	Not required	Not required	Not required	13.50	
802.11ax-HE20 MCS0	100	5500		17.50			17.50					
	116	5580		17.50			17.50					
	124	5620		17.50			17.50					
	132	5660		17.50			17.50					
	144	5720		17.50			17.50					
802.11ax-HE40 MCS0	102	5510		17.50			17.50					
	110	5550		17.50			17.50					
	126	5630		17.50			17.50					
	134	5670		17.50			17.50					
802.11ax-HE80 MCS0	106	5530		17.50			17.50					
	122	5610		17.50			17.50					
	138	5690		17.50			17.50					
802.11ax-HE160 MCS0	114	5570		15.00			15.00					



5.8GHz WLAN				Ant 1			Ant 2			Ant 1+2											
5.8GHz WLAN	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %	Average power (dBm)	Tune-Up Limit	Duty Cycle %	Average power (dBm)	Tune-Up Limit	Duty Cycle %									
	802.11a 6Mbps	149	5745	Not required	17.00	Not required	Not required	17.00	Not required	Not required	Not required	17.00	Not required								
		157	5785											17.00							
		165	5825											17.00							
	802.11n-HT20 MCS0	149	5745											17.00							
		157	5785											17.00							
		165	5825											17.00							
	802.11n-HT40 MCS0	151	5755											17.00							
		159	5795											17.00							
	802.11ac-VHT20 MCS0	149	5745											17.00							
		157	5785											17.00							
		165	5825											17.00							
	802.11ac-VHT40 MCS0	151	5755											17.00							
		159	5795											17.00							
	802.11ac-VHT80 MCS0	155	5775											16.80	17.00	98.63	16.80	17.00	98.76	Not required	17.00
802.11ax-HE20 MCS0	149	5745	17.00																		
	157	5785	17.00																		
	165	5825	17.00																		
802.11ax-HE40 MCS0	151	5755	17.00																		
	159	5795	17.00																		
802.11ax-HE80 MCS0	155	5775	17.00																		



<Laptop mode>

2.4GHz WLAN				Ant 1			Ant 2			Ant 1+2		
Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %	Average power (dBm)	Tune-Up Limit	Duty Cycle %	Average power (dBm)	Tune-Up Limit	Duty Cycle %	
802.11b 1Mbps	1	2412	19.10	19.50	100	18.80	19.50	100				
	6	2437	20.30	20.50		20.40	20.50					
	11	2462	19.00	19.25		19.10	19.25					
	12	2467	17.10	17.50		16.70	17.50					
	13	2472	15.10	15.25		14.20	15.25					
802.11g 6Mbps	1	2412		19.50			19.50					
	6	2437		20.50			20.50					
	11	2462		19.25			19.25					
	12	2467		17.50			17.50					
	13	2472		15.25			15.25					
802.11n-HT20 MCS0	1	2412		19.50			19.50			15.50		
	6	2437		20.50			20.50			16.75		
	11	2462		19.25			19.25			14.50		
	12	2467		17.50			17.50			11.50		
	13	2472		15.25			15.25			8.50		
802.11n-HT40 MCS0	3	2422		20.50	Not required		20.50	Not required		14.00	Not required	
	6	2437	Not required	20.50			20.50			14.50		
	9	2452		20.50			20.50			10.00		
	10	2457		19.25			19.25			10.00		
	11	2462		19.50			19.50			15.50		
802.11ax-HE20 MCS0	1	2412		19.50			19.50			15.50		
	6	2437		20.50			20.50			16.75		
	11	2462		19.25			19.25			14.50		
	12	2467		17.50			17.50			11.50		
	13	2472		15.25			15.25			8.50		
802.11ax-HE40 MCS0	3	2422		20.50	Not required		20.50	Not required		14.00	Not required	
	6	2437		20.50			20.50			14.50		
	9	2452		20.50			20.50			14.50		
	10	2457		20.50			20.50			10.00		
	11	2462		19.25			19.25			10.00		



5.2GHz WLAN				Ant 1			Ant 2			Ant 1+2		
5.2GHz WLAN	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %	Average power (dBm)	Tune-Up Limit	Duty Cycle %	Average power (dBm)	Tune-Up Limit	Duty Cycle %
	5.2GHz WLAN	802.11a 6Mbps	36	5180	Not required	18.50	Not required	18.50	Not required	Not required	Not required	Not required
40			5200	20.50		20.50						
44			5220	20.50		20.50						
48			5240	20.50		20.50						
802.11n-HT20 MCS0		36	5180	18.50		18.50						
		40	5200	20.50		20.50						
		44	5220	20.50		20.50						
		48	5240	20.50		20.50						
802.11n-HT40 MCS0		38	5190	18.50		18.50						
		46	5230	20.50		20.50						
802.11ac-VHT20 MCS0		36	5180	18.50		18.50						
		40	5200	20.50		20.50						
		44	5220	20.50		20.50						
802.11ac-VHT40 MCS0		38	5190	18.50		18.50						
		46	5230	20.50		20.50						
802.11ac-VHT80 MCS0		42	5210	18.50		18.50						
802.11ax-HE20 MCS0		36	5180	18.50		18.50						
		40	5200	20.50		20.50						
		44	5220	20.50		20.50						
		48	5240	20.50		20.50						
802.11ax-HE40 MCS0		38	5190	18.50		18.50						
		46	5230	20.50		20.50						
802.11ax-HE80 MCS0		42	5210	18.50		18.50						



5.3GHz WLAN				Ant 1			Ant 2			Ant 1+2				
5.3GHz WLAN	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %	Average power (dBm)	Tune-Up Limit	Duty Cycle %	Average power (dBm)	Tune-Up Limit	Duty Cycle %		
	5.3GHz WLAN	802.11a 6Mbps	52	5260	Not required	20.50	Not required	Not required	20.50	Not required	Not required	Not required	Not required	
56			5280	20.50		20.50								
60			5300	20.50		20.50								
64			5320	17.75		17.75								
802.11n-HT20 MCS0		52	5260	Not required	20.50	Not required	Not required	20.50	Not required	Not required	Not required	19.50	Not required	
		56	5280		20.50			19.50						
		60	5300		20.50			19.50						
		64	5320		17.75			16.50						
802.11n-HT40 MCS0		54	5270	20.40	20.50	98.39	20.20	20.50	98.39	Not required	Not required	18.50	Not required	
		62	5310	17.00	17.00		16.70	17.00				15.00		
802.11ac-VHT20 MCS0		52	5260	Not required	20.50	Not required	Not required	20.50	Not required	Not required	Not required	Not required	19.50	Not required
		56	5280		20.50			19.50						
		60	5300		20.50			19.50						
		64	5320		17.75			16.50						
802.11ac-VHT40 MCS0		54	5270	Not required	20.50	Not required	Not required	20.50	Not required	Not required	Not required	18.50	Not required	
		62	5310		17.00			17.00				15.00		
802.11ac-VHT80 MCS0		58	5290	Not required	18.25	Not required	Not required	18.25	Not required	Not required	Not required	15.75	Not required	
802.11ac-VHT160 MCS0		50	5250		14.50			14.50				13.00		
802.11ax-HE20 MCS0		52	5260	Not required	20.50	Not required	Not required	20.50	Not required	Not required	Not required	Not required	19.50	Not required
		56	5280		20.50			19.50						
	60	5300	20.50		19.50									
	64	5320	17.75		16.50									
802.11ax-HE40 MCS0	54	5270	Not required	20.50	Not required	Not required	20.50	Not required	Not required	Not required	18.50	Not required		
	62	5310		17.00			17.00				15.00			
802.11ax-HE80 MCS0	58	5290	Not required	18.25	Not required	Not required	18.25	Not required	Not required	Not required	15.75	Not required		
802.11ax-HE160 MCS0	50	5250		14.50			14.50				13.00			



5.5GHz WLAN				Ant 1			Ant 2			Ant 1+2		
Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %	Average power (dBm)	Tune-Up Limit	Duty Cycle %	Average power (dBm)	Tune-Up Limit	Duty Cycle %	
802.11a 6Mbps	100	5500	Not required	19.00	Not required	Not required	19.00	Not required	Not required	Not required	Not required	
	116	5580		20.50			20.50					
	124	5620		20.50			20.50					
	132	5660		20.50			20.50					
	144	5720		20.50			20.50					
802.11n-HT20 MCS0	100	5500	Not required	19.00	Not required	Not required	19.00	Not required	Not required	18.00	Not required	
	116	5580		20.50			20.50			19.50		
	124	5620		20.50			20.50			19.50		
	132	5660		20.50			20.50			19.50		
	144	5720		20.50			20.50			18.50		
802.11n-HT40 MCS0	102	5510	Not required	18.25	Not required	Not required	18.25	Not required	Not required	17.25	Not required	
	110	5550		20.50			20.50			19.50		
	126	5630		20.50			20.50			19.50		
	134	5670		18.75			19.25			17.50		
802.11ac-VHT20 MCS0	142	5710	Not required	20.50	Not required	Not required	20.50	Not required	Not required	19.50	Not required	
	100	5500		19.00			19.00			18.00		
	116	5580		20.50			20.50			19.50		
	124	5620		20.50			20.50			19.50		
802.11ac-VHT40 MCS0	132	5660	Not required	20.50	Not required	Not required	20.50	Not required	Not required	19.50	Not required	
	144	5720		20.50			20.50			18.50		
	102	5510		18.25			18.25			17.25		
	110	5550		20.50			20.50			19.50		
802.11ac-VHT80 MCS0	126	5630	Not required	20.50	Not required	Not required	20.50	Not required	Not required	19.50	Not required	
	134	5670		18.75			19.25			17.50		
	142	5710		20.50			20.50			19.50		
	106	5530		18.40			18.50			16.50		
802.11ac-VHT160 MCS0	122	5610	Not required	19.50	98.76	Not required	19.20	98.63	Not required	18.00	Not required	
	138	5690		20.30			20.50			18.50		
	114	5570		15.00			15.00			13.50		
802.11ax-HE20 MCS0	100	5500	Not required	19.00	Not required	Not required	19.00	Not required	Not required	18.00	Not required	
	116	5580		20.50			20.50			19.50		
	124	5620		20.50			20.50			19.50		
	132	5660		20.50			20.50			19.50		
	144	5720		20.50			20.50			18.50		
802.11ax-HE40 MCS0	102	5510	Not required	18.25	Not required	Not required	18.25	Not required	Not required	17.25	Not required	
	110	5550		20.50			20.50			19.50		
	126	5630		20.50			20.50			19.50		
	134	5670		18.75			19.25			17.50		
802.11ax-HE80 MCS0	142	5710	Not required	20.50	Not required	Not required	20.50	Not required	Not required	19.50	Not required	
	106	5530		18.50			18.50			16.50		
	122	5610		19.50			19.50			18.00		
802.11ax-HE160 MCS0	138	5690	Not required	20.50	Not required	Not required	20.50	Not required	Not required	18.50	Not required	
	114	5570		15.00			15.00			13.50		



5.8GHz WLAN				Ant 1			Ant 2			Ant 1+2				
5.8GHz WLAN	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %	Average power (dBm)	Tune-Up Limit	Duty Cycle %	Average power (dBm)	Tune-Up Limit	Duty Cycle %		
	802.11a 6Mbps	149	5745	Not required	20.50	Not required	Not required	20.50	Not required	Not required	Not required	Not required	Not required	
		157	5785											20.50
		165	5825											20.50
	802.11n-HT20 MCS0	149	5745	Not required	20.50	Not required	Not required	20.50	Not required	Not required	Not required	Not required	Not required	
		157	5785											20.50
		165	5825											20.50
	802.11n-HT40 MCS0	151	5755	20.10	20.50	98.39	20.10	20.50	98.39	Not required	Not required	19.50		
		159	5795	20.40	20.50		20.30	20.50				19.25		
	802.11ac-VHT20 MCS0	149	5745	Not required	20.50	Not required	Not required	20.50	Not required	Not required	Not required	Not required	Not required	
		157	5785											20.50
		165	5825											20.50
	802.11ac-VHT40 MCS0	151	5755	Not required	20.50	Not required	Not required	20.50	Not required	Not required	Not required	Not required	19.50	
		159	5795										20.50	19.25
	802.11ac-VHT80 MCS0	155	5775	Not required	18.75	Not required	Not required	18.75	Not required	Not required	Not required	Not required	17.50	
802.11ax-HE20 MCS0	149	5745	20.50		20.50			19.50						
	157	5785	20.50		20.50			19.50						
	165	5825	20.50	20.50	19.50									
802.11ax-HE40 MCS0	151	5755	Not required	20.50	Not required	Not required	20.50	Not required	Not required	Not required	Not required	19.50		
	159	5795										20.50	19.25	
802.11ax-HE80 MCS0	155	5775	Not required	18.75	Not required	Not required	18.75	Not required	Not required	Not required	Not required	17.50		




<2.4GHz Bluetooth>

Mode	Channel	Frequency (MHz)	Average power (dBm)		
			1Mbps	2Mbps	3Mbps
BR / EDR	CH 00	2402	10.20	6.90	6.90
	CH 39	2441	10.60	7.40	7.40
	CH 78	2480	10.70	7.50	7.50
Tune-up Limit			11.2	7.5	7.5

Mode	Channel	Frequency (MHz)	Average power (dBm)	
			1Mbps	2Mbps
LE	CH 00	2402	6.80	6.80
	CH 19	2440	6.90	6.90
	CH 39	2480	6.80	6.80
Tune-up Limit			7	7

General Note:


- For 2.4GHz Bluetooth SAR testing was selected 1Mbps due to its highest average power and duty cycle is 76.72% considered in SAR testing, and the duty cycle would be scaled to theoretical 83.3% in reported SAR calculation.

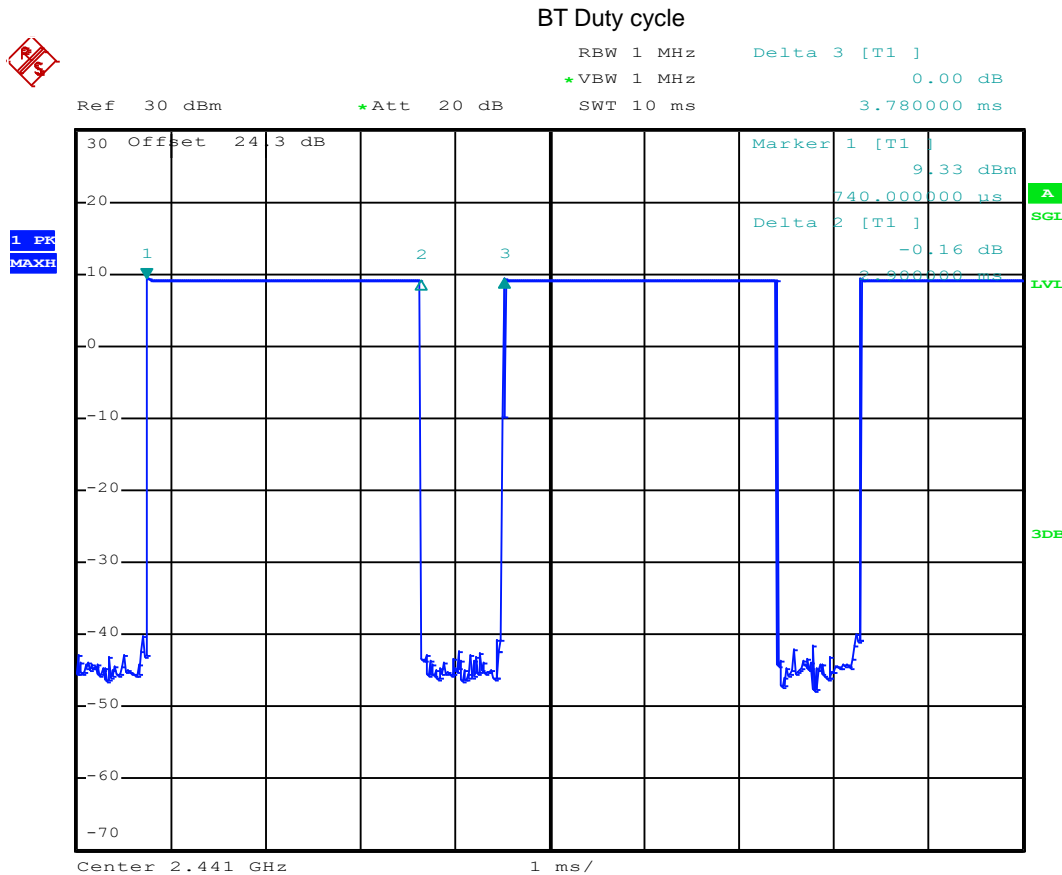

Date: 27.NOV.2020 10:55:59

12. Antenna Location


<For Tablet>

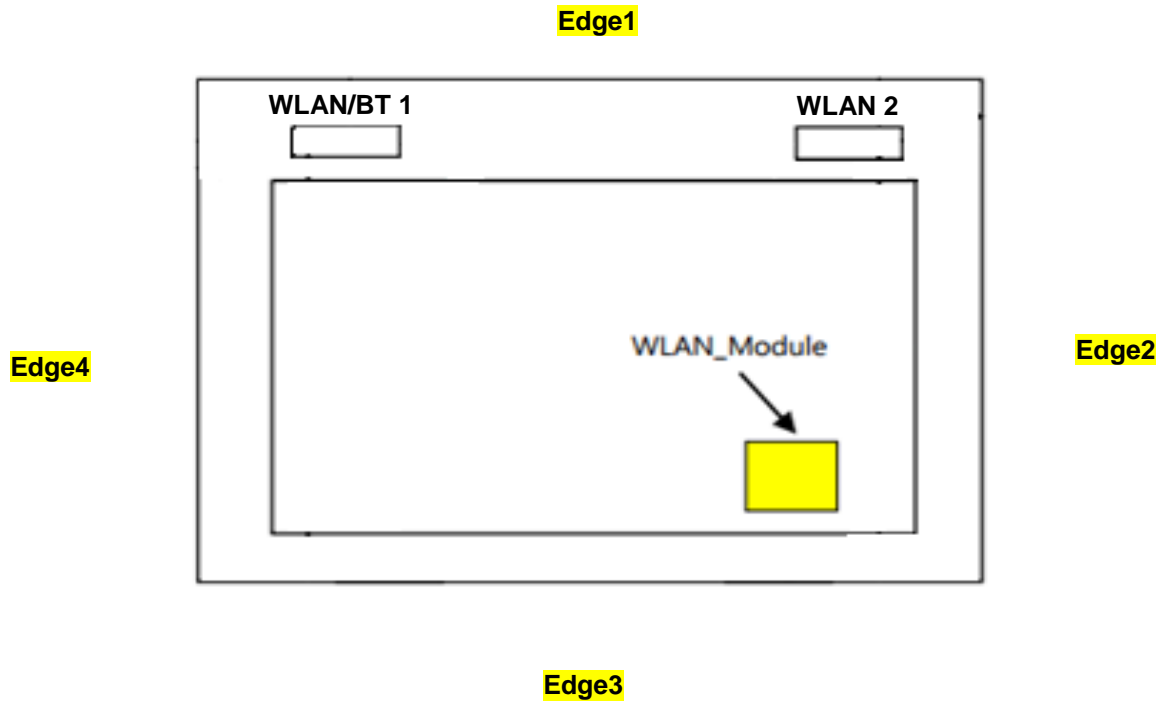

The separation distance for antenna to edge:

Antenna	To Edge1 (mm)	To Edge2 (mm)	To Edge3 (mm)	To Edge4 (mm)
WLAN/BT Antenna 1	2	252.51	221.8	45.45
WLAN Antenna 2	2	45.51	221.8	252.45

<For Laptop>

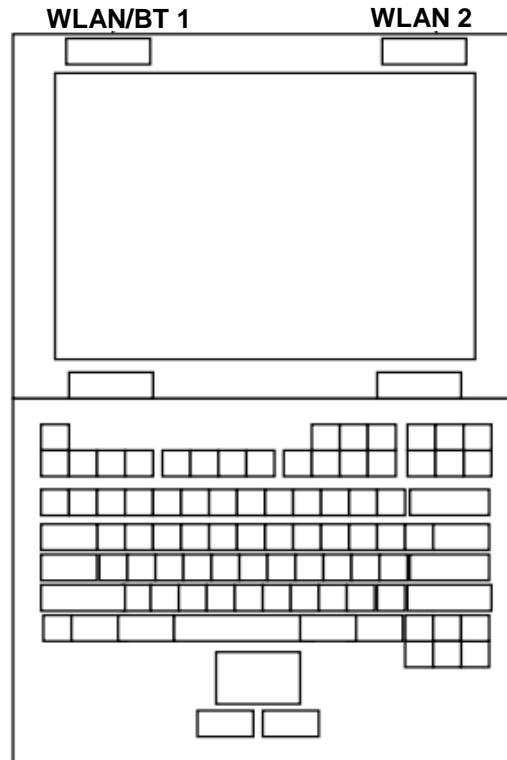

The separation distance for antenna to edge:

Antenna	To Bottom of Laptop (mm)
WLAN/BT Antenna 1	230.72
WLAN Antenna 2	230.72

<SAR test exclusion table>

General Note:

1. The below table, when the distance is < 50 mm exclusion threshold is "Ratio", when the distance is > 50 mm exclusion threshold is "mW"
2. Maximum power is the source-based time-average power and represents the maximum RF output power among production units
3. Per KDB 447498 D01v06, for larger devices, the test separation distance of adjacent edge configuration is determined by the closest separation between the antenna and the user.
4. Per KDB 447498 D01v06, standalone SAR test exclusion threshold is applied; If the test separation distance is < 5mm, 5mm is used to determine SAR exclusion threshold.
5. Per KDB 447498 D01v06, the 1-g and 10-g SAR test exclusion thresholds for 100 MHz to 6 GHz at *test separation distances* ≤ 50 mm are determined by:
 - $[(\text{max. power of channel, including tune-up tolerance, mW}) / (\text{min. test separation distance, mm})] \cdot [\sqrt{f(\text{GHz})}] \leq 3.0$ for 1-g SAR and ≤ 7.5 for 10-g extremity SAR
 - f(GHz) is the RF channel transmit frequency in GHz
 - Power and distance are rounded to the nearest mW and mm before calculation
 - The result is rounded to one decimal place for comparison
6. Per KDB 447498 D01v06, at 100 MHz to 6 GHz and for *test separation distances* > 50 mm, the SAR test exclusion threshold is determined according to the following
 - a) [Threshold at 50 mm in step 1) + (test separation distance - 50 mm) · (f(MHz)/150)] mW, at 100 MHz to 1500 MHz
 - b) [Threshold at 50 mm in step 1) + (test separation distance - 50 mm) · 10] mW at > 1500 MHz and ≤ 6 GHz

<Tablet>

Exposure Position	Wireless Interface	2.4GHz WLAN ANT 1	2.4GHz WLAN ANT 2	5GHz WLAN ANT 1	5GHz WLAN ANT 2
		Calculated Frequency	2472MHz	2472MHz	5825MHz
	Maximum power (dBm)	18.5	18.5	18	18
	Maximum rated power(mW)	71.0	71.0	63.0	63.0
Bottom Face	Separation distance(mm)	5.0	5.0	5.0	5.0
	exclusion threshold	22.3	22.3	30.4	30.4
	Testing required?	Yes	Yes	Yes	Yes
Edge 1	Separation distance(mm)	5.0	5.0	5.0	5.0
	exclusion threshold	22.3	22.3	30.4	30.4
	Testing required?	Yes	Yes	Yes	Yes
Edge 2	Separation distance(mm)	252.5	45.5	252.5	45.5
	exclusion threshold	2121.0	2.5	2087.0	3.3
	Testing required?	No	No	No	Yes
Edge 3	Separation distance(mm)	221.8	221.8	221.8	221.8
	exclusion threshold	1813.0	1813.0	1780.0	1780.0
	Testing required?	No	No	No	No
Edge 4	Separation distance(mm)	45.5	252.5	45.5	252.5
	exclusion threshold	2.5	2120.0	3.4	2087.0
	Testing required?	No	No	Yes	No

<Laptop>

Exposure Position	Wireless Interface	2.4GHz WLAN ANT 1	2.4GHz WLAN ANT 2	5GHz WLAN ANT 1	5GHz WLAN ANT 2
		Calculated Frequency	2472MHz	2472MHz	5825MHz
	Maximum power (dBm)	20.5	20.5	20.5	20.5
	Maximum rated power(mW)	112.0	112.0	112.0	112.0
Bottom of Laptop	Separation distance(mm)	230.7	230.7	230.7	230.7
	exclusion threshold	1902.0	1902.0	1869.0	1869.0
	Testing required?	No	No	No	No

13. SAR Test Results

General Note:

1. Per KDB 447498 D01v06, the reported SAR is the measured SAR value adjusted for maximum tune-up tolerance.
 - a. Tune-up scaling Factor = tune-up limit power (mW) / EUT RF power (mW), where tune-up limit is the maximum rated power among all production units.
 - b. For SAR testing of WLAN signal with non-100% duty cycle, the measured SAR is scaled-up by the duty cycle scaling factor which is equal to "1/(duty cycle)"
 - c. For WWAN: Reported SAR(W/kg)= Measured SAR(W/kg)*Tune-up Scaling Factor
 - d. For WLAN/Bluetooth: Reported SAR(W/kg)= Measured SAR(W/kg)* Duty Cycle scaling factor * Tune-up scaling factor
2. Per KDB 447498 D01v06, for each exposure position, testing of other required channels within the operating mode of a frequency band is not required when the *reported* 1-g or 10-g SAR for the mid-band or highest output power channel is:
 - ≤ 0.8 W/kg or 2.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≤ 100 MHz
 - ≤ 0.6 W/kg or 1.5 W/kg, for 1-g or 10-g respectively, when the transmission band is between 100 MHz and 200 MHz
 - ≤ 0.4 W/kg or 1.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≥ 200 MHz
3. Per KDB 865664 D01v01r04, for each frequency band, repeated SAR measurement is required only when the measured SAR is ≥ 0.8 W/kg.

WLAN/BT Note:

1. Per KDB 248227 D01v02r02, for 2.4GHz 802.11g/n SAR testing is not required when the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is ≤ 1.2 W/kg.
2. Per KDB 248227 D01v02r02, U-NII-1 SAR testing is not required when the U-NII-2A band highest reported SAR for a test configuration is ≤ 1.2 W/kg, SAR is not required for U-NII-1 band.
3. When the reported SAR of the test position is > 0.4 W/kg, SAR is repeated for the 802.11 transmission mode configuration tested in the initial test position to measure the subsequent next closet/smallest test separation distance and maximum coupling test position on the highest maximum output power channel, until the report SAR is ≤ 0.8 W/kg or all required test position are tested.
4. For all positions / configurations, when the reported SAR is > 0.8 W/kg, SAR is measured for these test positions / configurations on the subsequent next highest measured output power channel(s) until the reported SAR is ≤ 1.2 W/kg or all required channels are tested.
5. For WLAN SAR testing was performed on single antenna RF power in SISO mode is larger or equal to the single antenna RF power in MIMO mode, and for RF exposure assessment of MIMO mode simultaneous transmission exclusion analysis was performed with SAR test results of each antenna in SISO mode.
6. Per KDB 248227 D01v02r02, the simultaneous SAR provisions in KDB publication 447498 should be applied to determine simultaneous transmission SAR test exclusion for WiFi MIMO. If the sum of 1g single transmission chain SAR measurements is < 1.6 W/kg and SAR peak to location ratio ≤ 0.04 , no additional SAR measurements for MIMO.
7. During SAR testing the WLAN transmission was verified using a spectrum analyzer.
8. Based on WLAN2.4GHz and Bluetooth share the same antenna; therefore, Bluetooth RF exposure evaluation chose the same of WLAN 2.4GHz Antenna to perform Bluetooth SAR test.



13.1 Body SAR

<WLAN SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Antenna	Antenna Vendor	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	WLAN2.4GHz	802.11b 1Mbps	Bottom Face	0mm	Ant 1	HT	1	2412	18.20	18.50	1.072	100	1.000	0.04	0.207	0.222
	WLAN2.4GHz	802.11b 1Mbps	Edge 1	0mm	Ant 1	HT	1	2412	18.20	18.50	1.072	100	1.000	-0.09	0.812	0.870
	WLAN2.4GHz	802.11b 1Mbps	Edge 1	0mm	Ant 1	HT	6	2437	18.20	18.50	1.072	100	1.000	-0.11	0.801	0.858
	WLAN2.4GHz	802.11b 1Mbps	Edge 1	0mm	Ant 1	HT	11	2462	18.10	18.50	1.096	100	1.000	0.05	0.739	0.810
	WLAN2.4GHz	802.11b 1Mbps	Edge 1	0mm	Ant 1	HT	12	2467	17.10	17.50	1.096	100	1.000	0.1	0.565	0.620
	WLAN2.4GHz	802.11b 1Mbps	Edge 1	0mm	Ant 1	HT	13	2472	15.20	15.25	1.012	100	1.000	0.08	0.376	0.380
	WLAN2.4GHz	802.11b 1Mbps	Edge 1	0mm	Ant 1	WNC	1	2412	18.20	18.50	1.072	100	1.000	-0.01	0.762	0.816
	WLAN2.4GHz	802.11b 1Mbps	Bottom Face	0mm	Ant 2	HT	1	2412	18.30	18.50	1.047	100	1.000	0.1	0.262	0.274
01	WLAN2.4GHz	802.11b 1Mbps	Edge 1	0mm	Ant 2	HT	1	2412	18.30	18.50	1.047	100	1.000	0.06	0.921	0.964
	WLAN2.4GHz	802.11b 1Mbps	Edge 1	0mm	Ant 2	HT	6	2437	18.20	18.50	1.072	100	1.000	-0.06	0.639	0.685
	WLAN2.4GHz	802.11b 1Mbps	Edge 1	0mm	Ant 2	HT	11	2462	18.20	18.50	1.072	100	1.000	-0.01	0.555	0.595
	WLAN2.4GHz	802.11b 1Mbps	Edge 1	0mm	Ant 2	HT	12	2467	16.80	17.00	1.047	100	1.000	-0.01	0.380	0.398
	WLAN2.4GHz	802.11b 1Mbps	Edge 1	0mm	Ant 2	HT	13	2472	14.40	14.50	1.023	100	1.000	0.02	0.182	0.186
	WLAN2.4GHz	802.11b 1Mbps	Edge 1	0mm	Ant 2	WNC	1	2412	18.30	18.50	1.047	100	1.000	-0.15	0.915	0.958
	WLAN5GHz	802.11ac-VHT80 MCS0	Bottom Face	0mm	Ant 1	HT	58	5290	17.60	18.00	1.096	98.63	1.014	0.04	0.096	0.107
	WLAN5GHz	802.11ac-VHT80 MCS0	Edge 1	0mm	Ant 1	HT	58	5290	17.60	18.00	1.096	98.63	1.014	-0.02	0.460	0.511
	WLAN5GHz	802.11ac-VHT80 MCS0	Edge 4	0mm	Ant 1	HT	58	5290	17.60	18.00	1.096	98.63	1.014	-0.07	0.149	0.166
	WLAN5GHz	802.11ac-VHT80 MCS0	Edge 1	0mm	Ant 1	WNC	58	5290	17.60	18.00	1.096	98.63	1.014	-0.1	0.402	0.447
	WLAN5GHz	802.11ac-VHT80 MCS0	Bottom Face	0mm	Ant 2	HT	58	5290	17.60	18.00	1.096	98.76	1.013	0.02	0.060	0.067
	WLAN5GHz	802.11ac-VHT80 MCS0	Edge 1	0mm	Ant 2	HT	58	5290	17.60	18.00	1.096	98.76	1.013	0.1	0.483	0.536
	WLAN5GHz	802.11ac-VHT80 MCS0	Edge 2	0mm	Ant 2	HT	58	5290	17.60	18.00	1.096	98.76	1.013	0.04	0.057	0.063
02	WLAN5GHz	802.11ac-VHT80 MCS0	Edge 1	0mm	Ant 2	WNC	58	5290	17.60	18.00	1.096	98.76	1.013	-0.05	0.629	0.699
	WLAN5GHz	802.11ac-VHT80 MCS0	Bottom Face	0mm	Ant 1	HT	106	5530	17.20	17.50	1.072	98.63	1.014	0.03	0.067	0.073
	WLAN5GHz	802.11ac-VHT80 MCS0	Edge 1	0mm	Ant 1	HT	106	5530	17.20	17.50	1.072	98.63	1.014	0.04	0.330	0.359
	WLAN5GHz	802.11ac-VHT80 MCS0	Edge 1	0mm	Ant 1	HT	122	5610	17.20	17.50	1.072	98.63	1.014	0.05	0.345	0.375
	WLAN5GHz	802.11ac-VHT80 MCS0	Edge 1	0mm	Ant 1	HT	138	5690	17.10	17.50	1.096	98.63	1.014	0.07	0.376	0.418
	WLAN5GHz	802.11ac-VHT80 MCS0	Edge 4	0mm	Ant 1	HT	106	5530	17.20	17.50	1.072	98.63	1.014	0.02	0.065	0.071
	WLAN5GHz	802.11ac-VHT80 MCS0	Edge 1	0mm	Ant 1	WNC	138	5690	17.10	17.50	1.096	98.63	1.014	0.14	0.599	0.666
	WLAN5GHz	802.11ac-VHT80 MCS0	Edge 1	0mm	Ant 1	WNC	106	5530	17.20	17.50	1.072	98.63	1.014	0.09	0.559	0.607
	WLAN5GHz	802.11ac-VHT80 MCS0	Edge 1	0mm	Ant 1	WNC	122	5610	17.20	17.50	1.072	98.63	1.014	-0.05	0.575	0.625
	WLAN5GHz	802.11ac-VHT80 MCS0	Bottom Face	0mm	Ant 2	HT	106	5530	17.30	17.50	1.047	98.76	1.013	-0.03	0.055	0.058
	WLAN5GHz	802.11ac-VHT80 MCS0	Edge 1	0mm	Ant 2	HT	106	5530	17.30	17.50	1.047	98.76	1.013	0.09	0.272	0.289
	WLAN5GHz	802.11ac-VHT80 MCS0	Edge 1	0mm	Ant 2	HT	122	5610	17.30	17.50	1.047	98.76	1.013	0.01	0.366	0.388
	WLAN5GHz	802.11ac-VHT80 MCS0	Edge 1	0mm	Ant 2	HT	138	5690	17.30	17.50	1.047	98.76	1.013	-0.07	0.424	0.450
	WLAN5GHz	802.11ac-VHT80 MCS0	Edge 2	0mm	Ant 2	HT	106	5530	17.30	17.50	1.047	98.76	1.013	0.08	0.049	0.052
03	WLAN5GHz	802.11ac-VHT80 MCS0	Edge 1	0mm	Ant 2	WNC	138	5690	17.30	17.50	1.047	98.76	1.013	0.03	0.791	0.839
	WLAN5GHz	802.11ac-VHT80 MCS0	Edge 1	0mm	Ant 2	WNC	106	5530	17.30	17.50	1.047	98.76	1.013	0.04	0.745	0.790
	WLAN5GHz	802.11ac-VHT80 MCS0	Edge 1	0mm	Ant 2	WNC	122	5610	17.30	17.50	1.047	98.76	1.013	-0.07	0.728	0.772
	WLAN5GHz	802.11ac-VHT80 MCS0	Bottom Face	0mm	Ant 1	HT	155	5775	16.80	17.00	1.047	98.63	1.014	-0.01	0.223	0.237
	WLAN5GHz	802.11ac-VHT80 MCS0	Edge 1	0mm	Ant 1	HT	155	5775	16.80	17.00	1.047	98.63	1.014	-0.02	0.635	0.674
	WLAN5GHz	802.11ac-VHT80 MCS0	Edge 4	0mm	Ant 1	HT	155	5775	16.80	17.00	1.047	98.63	1.014	0.09	0.107	0.114
04	WLAN5GHz	802.11ac-VHT80 MCS0	Edge 1	0mm	Ant 1	WNC	155	5775	16.80	17.00	1.047	98.63	1.014	0.14	0.638	0.677
	WLAN5GHz	802.11ac-VHT80 MCS0	Bottom Face	0mm	Ant 2	HT	155	5775	16.80	17.00	1.047	98.76	1.013	-0.06	0.059	0.063
	WLAN5GHz	802.11ac-VHT80 MCS0	Edge 1	0mm	Ant 2	HT	155	5775	16.80	17.00	1.047	98.76	1.013	-0.05	0.257	0.273
	WLAN5GHz	802.11ac-VHT80 MCS0	Edge 2	0mm	Ant 2	HT	155	5775	16.80	17.00	1.047	98.76	1.013	-0.04	0.052	0.055
	WLAN5GHz	802.11ac-VHT80 MCS0	Edge 1	0mm	Ant 2	WNC	155	5775	16.80	17.00	1.047	98.76	1.013	0.04	0.582	0.617



<Bluetooth SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Antenna	Antenna Vendor	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	Bluetooth	1Mbps	Bottom Face	0mm	Ant 1	HT	78	2480	10.70	11.20	1.122	76.72	1.086	0.01	0.003	0.004
05	Bluetooth	1Mbps	Edge 1	0mm	Ant 1	HT	78	2480	10.70	11.20	1.122	76.72	1.086	-0.18	0.048	0.058
	Bluetooth	1Mbps	Edge 1	0mm	Ant 1	HT	0	2402	10.20	11.20	1.259	76.72	1.086	0.01	0.029	0.040
	Bluetooth	1Mbps	Edge 1	0mm	Ant 1	HT	39	2441	10.60	11.20	1.148	76.72	1.086	0	0.032	0.040
	Bluetooth	1Mbps	Edge 1	0mm	Ant 1	WNC	78	2480	10.70	11.20	1.122	76.72	1.086	-0.1	0.025	0.030

13.2 Repeated SAR Measurement

No.	Band	Mode	Test Position	Gap (mm)	Antenna	Antenna Vendor	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Ratio	Reported 1g SAR (W/kg)
1st	WLAN2.4GHz	802.11b 1Mbps	Edge 1	0mm	Ant 2	HT	1	2412	18.3	18.5	1.047	100	1	0.06	0.921		0.964
2nd	WLAN2.4GHz	802.11b 1Mbps	Edge 1	0mm	Ant 2	HT	1	2412	18.3	18.5	1.047	100	1	0.08	0.904	1.019	0.947

General Note:

1. Per KDB 865664 D01v01r04, for each frequency band, repeated SAR measurement is required only when the measured SAR is ≥ 0.8 W/kg.
2. Per KDB 865664 D01v01r04, if the ratio among the repeated measurement is ≤ 1.2 and the measured SAR < 1.45 W/kg, only one repeated measurement is required.
3. The ratio is the difference in percentage between original and repeated *measured* SAR.
4. All measurement SAR result is scaled-up to account for tune-up tolerance and is compliant.



14. Simultaneous Transmission Analysis

NO.	Simultaneous Transmission Configurations	Body
1.	2.4GHz WLAN Ant 1 + 2.4GHz WLAN Ant 2	Yes
2.	2.4GHz WLAN Ant 2 + Bluetooth Ant 1	Yes
3.	5GHz WLAN Ant 1+5GHz WLAN Ant 2 + Bluetooth Ant 1	Yes

General Note:

1. For SAR testing was performed on single antenna RF power in SISO mode is larger or equal to the single antenna RF power in MIMO mode, and for RF exposure assessment of MIMO mode simultaneous transmission exclusion analysis was performed with SAR test results of each antenna in SISO mode.
2. EUT will choose either WLAN 2.4GHz or WLAN 5GHz according to the network signal condition; therefore, 2.4GHz WLAN and 5GHz WLAN will not operate simultaneously at any moment.
3. The Scaled SAR summation is calculated based on the same configuration and test position.
4. Per KDB 447498 D01v06, simultaneous transmission SAR is compliant, if
 - i) Scalar SAR summation < 1.6W/kg.
 - ii) $SPLSR = (SAR1 + SAR2)^{1.5} / (\text{min. separation distance, mm})$, and the peak separation distance is determined from the square root of $[(x1-x2)^2 + (y1-y2)^2 + (z1-z2)^2]$, where (x1, y1, z1) and (x2, y2, z2) are the coordinates of the extrapolated peak SAR locations in the zoom scan.
 - iii) If $SPLSR \leq 0.04$, simultaneously transmission SAR measurement is not necessary.
 - iv) Simultaneously transmission SAR measurement, and the reported multi-band SAR < 1.6W/kg.
 - v) The SPLSR calculated results please refer to section 14.2.

14.1 Body Exposure Conditions


Exposure Position	1	2	3	4	5	1+2 Summed 1g SAR (W/kg)	2+5 Summed 1g SAR (W/kg)	3+4+5 Summed 1g SAR (W/kg)	SPLSR	Case No
	2.4GHz WLAN Ant 1 1g SAR (W/kg)	2.4GHz WLAN Ant 2 1g SAR (W/kg)	5GHz WLAN Ant 1 1g SAR (W/kg)	5GHz WLAN Ant 2 1g SAR (W/kg)	Bluetooth Ant 1 1g SAR (W/kg)					
Bottom Face at 0mm	0.222	0.274	0.237	0.067	0.004	0.496	0.278	0.308		
Edge 1 at 0mm	0.870	0.964	0.677	0.839	0.058	1.834	1.022	1.574	0.01	Case 1
Edge 2 at 0mm				0.063		0.000	0.000	0.063		
Edge 4 at 0mm			0.166			0.000	0.000	0.166		

14.2 SPLSR Evaluation and Analysis

General Note:

1. $SPLSR = (SAR_1 + SAR_2)^{1.5} / (min. \text{ separation distance, mm})$. If $SPLSR \leq 0.04$, simultaneously transmission SAR measurement is not necessary
2. The detail hotspot point for each transmitter in each exposure condition are showing as below figure and the minimum 3D distance for each sum combination is used for SPLSR analysis.

Case	Band	Position	SAR (W/kg)	Gap (mm)	SAR peak location (mm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
1	WLAN2.4GHz_Ant 1	Edge 2	0.87	0mm	0.9	-119	3	220.4	1.83	0.01	Not required
	WLAN2.4GHz_Ant 2		0.964	0mm	2.1	101.4	3.48				

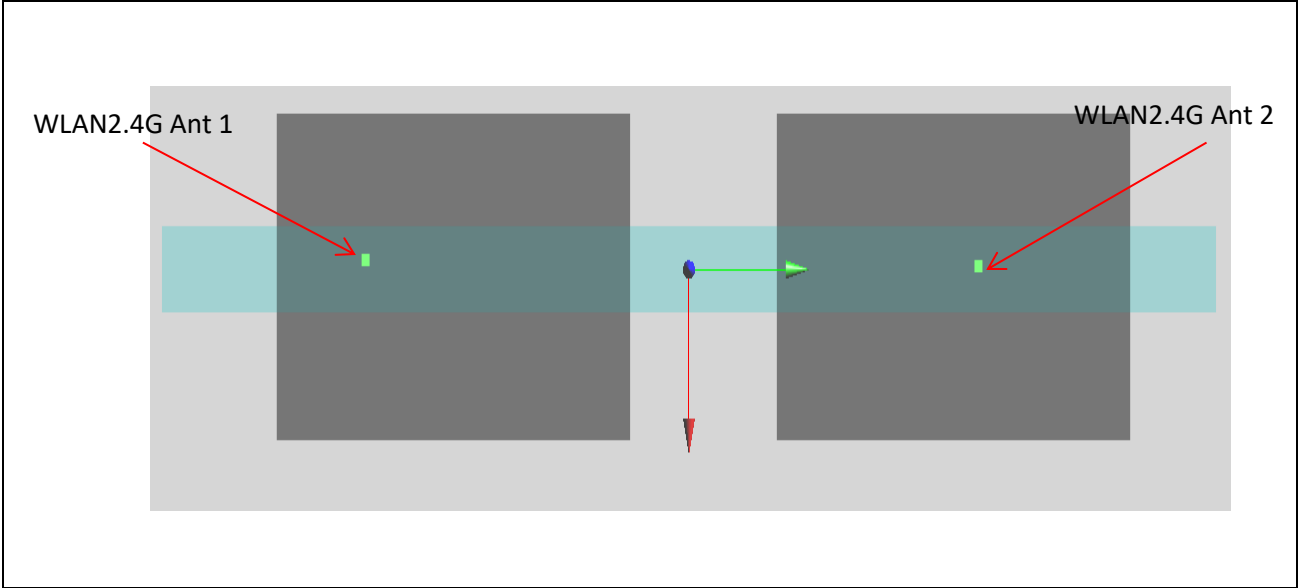

Test Engineer : Carter Jhuang, Bob Cheng



15. Uncertainty Assessment

Per KDB 865664 D01 SAR measurement 100MHz to 6GHz, when the highest measured 1-g SAR within a frequency band is < 1.5 W/kg and the measured 10-g SAR within a frequency band is < 3.75 W/kg. The expanded SAR measurement uncertainty must be $\leq 30\%$, for a confidence interval of $k = 2$. If these conditions are met, extensive SAR measurement uncertainty analysis described in IEEE Std 1528-2013 is not required in SAR reports submitted for equipment approval. For this device, the highest measured 1-g SAR is less 1.5W/kg. Therefore, the measurement uncertainty table is not required in this report.

Declaration of Conformity:

The test results with all measurement uncertainty excluded is presented in accordance with the regulation limits or requirements declared by manufacturers.

Comments and Explanations:

The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.

16. References

- [1] FCC 47 CFR Part 2 "Frequency Allocations and Radio Treaty Matters; General Rules and Regulations"
- [2] ANSI/IEEE Std. C95.1-1992, "IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz", September 1992
- [3] IEEE Std. 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", Sep 2013
- [4] SPEAG DASY System Handbook
- [5] FCC KDB 248227 D01 v02r02, "SAR Guidance for IEEE 802.11 (WiFi) Transmitters", Oct 2015.
- [6] FCC KDB 447498 D01 v06, "Mobile and Portable Device RF Exposure Procedures and Equipment Authorization Policies", Oct 2015
- [7] FCC KDB 616217 D04 v01r02, "SAR Evaluation Considerations for Laptop, Notebook, Netbook and Tablet Computers", Oct 2015
- [8] FCC KDB 865664 D01 v01r04, "SAR Measurement Requirements for 100 MHz to 6 GHz", Aug 2015.
- [9] FCC KDB 865664 D02 v01r02, "RF Exposure Compliance Reporting and Documentation Considerations" Oct 2015.