

# TEST REPORT

## CERTIFICATE OF CONFORMITY

**Standard:** 47 CFR FCC Part 15, Subpart C (Section 15.247)

**Report No.:** RFCICG-WTW-P22120490-1 R1

**FCC ID:** B94-CL007

**Product:** Wireless Headset

**Brand:** HYPERX

**Model No.:** CL007

**Received Date:** 2022/12/15

**Test Date:** 2022/12/22 ~ 2022/12/29

**Issued Date:** 2023/4/20

**Applicant:** HP Inc.

**Address:** 3390 East Harmony Road, Fort Collins, Colorado United States 80528

**Issued By:** Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch  
Lin Kou Laboratories

**Lab Address:** No. 47-2, 14th Ling, Chia Pau Vil., Lin Kou Dist., New Taipei City, Taiwan

**Test Location:** No. 19, Hwa Ya 2nd Rd., Wen Hwa Vil., Kewi Shan Dist., Taoyuan City 33383, Taiwan

**FCC Registration /**  
**Designation Number:** 788550 / TW0003

Approved by: Jeremy Lin, Date: 2023/4/20  
Jeremy Lin / Project Engineer

This test report consists of 46 pages in total. It may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The test results in the report only apply to the tested sample. The test results in this report are traceable to the national or international standards.



Prepared by : Pettie Chen / Senior Specialist

This report is governed by, and incorporates by reference, the Conditions of Testing as posted at the date of issuance of this report at <http://www.bureauveritas.com/home/about-us-our-business/cps/about-us/terms-conditions/> and is intended for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. Measurement uncertainty is only provided upon request for accredited tests. Statements of conformity are based on simple acceptance criteria without taking measurement uncertainty into account, unless otherwise requested in writing. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence or if you require measurement uncertainty; provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents.

## Table of Contents

<b>Release Control Record</b> .....	<b>4</b>
<b>1 Certificate</b> .....	<b>5</b>
<b>2 Summary of Test Results</b> .....	<b>6</b>
2.1 Measurement Uncertainty .....	6
2.2 Supplementary Information .....	6
<b>3 General Information</b> .....	<b>7</b>
3.1 General Description .....	7
3.2 Antenna Description of EUT .....	8
3.3 Channel List .....	8
3.4 Test Mode Applicability and Tested Channel Detail .....	9
3.5 Duty Cycle of Test Signal .....	10
3.6 Test Program Used and Operation Descriptions .....	11
3.7 Connection Diagram of EUT and Peripheral Devices .....	11
3.8 Configuration of Peripheral Devices and Cable Connections .....	11
<b>4 Test Instruments</b> .....	<b>12</b>
4.1 RF Output Power .....	12
4.2 Power Spectral Density .....	12
4.3 6 dB Bandwidth .....	12
4.4 Conducted Out of Band Emissions .....	12
4.5 AC Power Conducted Emissions .....	13
4.6 Unwanted Emissions below 1 GHz .....	14
4.7 Unwanted Emissions above 1 GHz .....	15
<b>5 Limits of Test Items</b> .....	<b>16</b>
5.1 RF Output Power .....	16
5.2 Power Spectral Density .....	16
5.3 6 dB Bandwidth .....	16
5.4 Conducted Out of Band Emissions .....	16
5.5 AC Power Conducted Emissions .....	16
5.6 Unwanted Emissions below 1 GHz .....	16
5.7 Unwanted Emissions above 1 GHz .....	17
<b>6 Test Arrangements</b> .....	<b>18</b>
6.1 RF Output Power .....	18
6.1.1 Test Setup .....	18
6.1.2 Test Procedure .....	18
6.2 Power Spectral Density .....	18
6.2.1 Test Setup .....	18
6.2.2 Test Procedure .....	18
6.3 6 dB Bandwidth .....	19
6.3.1 Test Setup .....	19
6.3.2 Test Procedure .....	19
6.4 Conducted Out of Band Emissions .....	19
6.4.1 Test Setup .....	19
6.4.2 Test Procedure .....	19
6.5 AC Power Conducted Emissions .....	20
6.5.1 Test Setup .....	20
6.5.2 Test Procedure .....	20
6.6 Unwanted Emissions below 1 GHz .....	21
6.6.1 Test Setup .....	21
6.6.2 Test Procedure .....	22
6.7 Unwanted Emissions above 1 GHz .....	23
6.7.1 Test Setup .....	23
6.7.2 Test Procedure .....	23
<b>7 Test Results of Test Item</b> .....	<b>24</b>



7.1	RF Output Power.....	24
7.2	Power Spectral Density.....	25
7.3	6 dB Bandwidth.....	26
7.4	Conducted Out of Band Emissions.....	27
7.5	AC Power Conducted Emissions.....	29
7.6	Unwanted Emissions below 1 GHz.....	33
7.7	Unwanted Emissions above 1 GHz.....	37
<b>8</b>	<b>Pictures of Test Arrangements.....</b>	<b>45</b>
<b>9</b>	<b>Information of the Testing Laboratories.....</b>	<b>46</b>



## Release Control Record

Issue No.	Description	Date Issued
RFCICG-WTW-P22120490-1	Original release.	2023/3/27
RFCICG-WTW-P22120490-1 R1	Product name revise	2023/4/20

## 1 Certificate

**Product:** Wireless Headset  
**Brand:** HYPERX  
**Test Model:** CL007  
**Sample Status:** Engineering sample  
**Applicant:** HP Inc.  
**Test Date:** 2022/12/22 ~ 2022/12/29  
**Standard:** 47 CFR FCC Part 15, Subpart C (Section 15.247)  
**Measurement procedure:** ANSI C63.10-2013  
KDB 558074 D01 15.247 Meas Guidance v05r02

The above equipment has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's RF characteristics under the conditions specified in this report.

## 2 Summary of Test Results

47 CFR FCC Part 15, Subpart C (Section 15.247)			
Standard / Clause	Test Item	Result	Remark
15.247(b)	RF Output Power	Pass	Meet the requirement of limit.
15.247(e)	Power Spectral Density	Pass	Meet the requirement of limit.
15.247(a)(2)	6 dB Bandwidth	Pass	Meet the requirement of limit.
15.247(d)	Conducted Out of Band Emissions	Pass	Meet the requirement of limit.
15.207	AC Power Conducted Emissions	Pass	Minimum passing margin is -17.17 dB at 0.16600 MHz
15.205 / 15.209 / 15.247(d)	Unwanted Emissions below 1 GHz	Pass	Minimum passing margin is -10.1 dB at 41.64 MHz
15.205 / 15.209 / 15.247(d)	Unwanted Emissions above 1 GHz	Pass	Minimum passing margin is -4.1 dB at 4804.00, 4960.00 MHz
15.203	Antenna Requirement	Pass	No antenna connector is used.

Note: Determining compliance based on the results of the compliance measurement, not taking into account measurement instrumentation uncertainty.

### 2.1 Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

Measurement	Specification	Expanded Uncertainty (k=2) (±)
Conducted Out of Band Emissions	9 kHz ~ 40 GHz	2.79 dB
AC Power Conducted Emissions	9 kHz ~ 30 MHz	2.99 dB
Unwanted Emissions below 1 GHz	9 kHz ~ 30 MHz	2.44 dB
	30 MHz ~ 1 GHz	2.95 dB
Unwanted Emissions above 1 GHz	1 GHz ~ 18 GHz	2.26 dB
	18 GHz ~ 40 GHz	1.94 dB

The other instruments specified are routine verified to remain within the calibrated levels, no measurement uncertainty is required to be calculated.

### 2.2 Supplementary Information

There is not any deviation from the test standards for the test method, and no modifications required for compliance.

### 3 General Information

#### 3.1 General Description

Product	Wireless Headset
Brand	HYPERX
Test Model	CL007
Status of EUT	Engineering sample
Power Supply Rating	3.7V from battery 5.0V from host
Modulation Type	GFSK
Modulation Technology	DTS
Transfer Rate	Up to 2 Mbps
Operating Frequency	2.402 GHz ~ 2.48 GHz
Number of Channel	40
Output Power	14.093 mW (11.49 dBm)

Note:

1. The EUT uses following accessories.

<b>Battery 1</b>			
Brand	Model	Specification	
Apower Electronics Co., Ltd	AEC624052	Power Rating : 1500mAh 3.7V	
<b>Battery 2</b>			
Brand	Model	Specification	
Huizhou Everpower Technology Co., Ltd.	PL644050	Power Rating : 1500mAh 3.7V	
<b>Wireless Dongle</b>			
Product Description (PMN)	Brand	Model	FCC ID
Wireless Dongle	HYPERX	CL007WA	B94-CL007WA
<b>Type C Cable</b>			
Brand	Model	Specification	
HYPERX	9.06.47040.00315	0.5m shielded without core	
<b>USB-C to USB-A Adapter</b>			
Brand	Model	Specification	
HYPERX	CL006A	-	

2. The above EUT information is declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications or User's Manual.

### 3.2 Antenna Description of EUT

1. The antenna information is listed as below.

Gain (dBi)	Antenna Type	Connector Type
2400~2483.5 MHz		
2.75	PIFA	NA

\* Detail antenna specification please refer to antenna datasheet and/or antenna measurement report.

### 3.3 Channel List

40 channels are provided for BT-LE:

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
0	2402	10	2422	20	2442	30	2462
1	2404	11	2424	21	2444	31	2464
2	2406	12	2426	22	2446	32	2466
3	2408	13	2428	23	2448	33	2468
4	2410	14	2430	24	2450	34	2470
5	2412	15	2432	25	2452	35	2472
6	2414	16	2434	26	2454	36	2474
7	2416	17	2436	27	2456	37	2476
8	2418	18	2438	28	2458	38	2478
9	2420	19	2440	29	2460	39	2480



### 3.4 Test Mode Applicability and Tested Channel Detail

Pre-Scan:	<ol style="list-style-type: none"> <li>1. EUT can be used in the following ways: X/ Y/ Z. Pre-scan in these ways and find the worst case as a representative test condition.</li> <li>2. For Unwanted Emissions test item, the EUT has 3 power modes: Battery (EUT Stand alone)/AC adapter/Laptop. Prescan these modes and find the worst case as a representative test condition.</li> <li>3. For AC Power Conducted Emissions test items, the EUT has 2 power modes: AC adapter/Laptop. Prescan these modes and find the worst case as a representative test condition.</li> </ol>
Worst Case:	<ol style="list-style-type: none"> <li>1. X/ Y/ Z Worst Condition: Y axis.</li> <li>2. Worst Condition: Laptop mode</li> <li>3. Worst Condition: Laptop mode</li> </ol>


Following channel(s) was (were) selected for the final test as listed below:

Test Item	EUT Configure Mode	Mode	Tested Channel	Modulation	Data Rate Parameter
RF Output Power / Power Spectral Density	A	BT-LE 1M	0, 19, 39	GFSK	1Mb/s
		BT LE-2M	0, 19, 39	GFSK	2Mb/s
6 dB Bandwidth / Conducted Out of Band Emissions	A	BT-LE 1M	0, 19, 39	GFSK	1Mb/s
		BT LE-2M	0, 19, 39	GFSK	2Mb/s
AC Power Conducted Emissions	A, B	BT-LE 2M	19	GFSK	2Mb/s
Unwanted Emissions below 1 GHz	A, B	BT-LE 2M	19	GFSK	2Mb/s
Unwanted Emissions above 1 GHz	A	BT-LE 1M	0, 19, 39	GFSK	1Mb/s
		BT LE-2M	0, 19, 39	GFSK	2Mb/s
EUT Configure Mode	A	Power from Laptop (with Battery 1)			
	B	Power from Laptop (with Battery 2)			


### 3.5 Duty Cycle of Test Signal

**BT-LE 1M:** Duty cycle =  $0.38 \text{ ms} / 0.622 \text{ ms} \times 100\% = 61.1\%$ , duty factor =  $10 * \log (1/\text{Duty cycle}) = 2.14 \text{ dB}$

**BT-LE 2M:** Duty cycle =  $0.198 \text{ ms} / 0.624 \text{ ms} \times 100\% = 31.7\%$ , duty factor =  $10 * \log (1/\text{Duty cycle}) = 4.99 \text{ dB}$

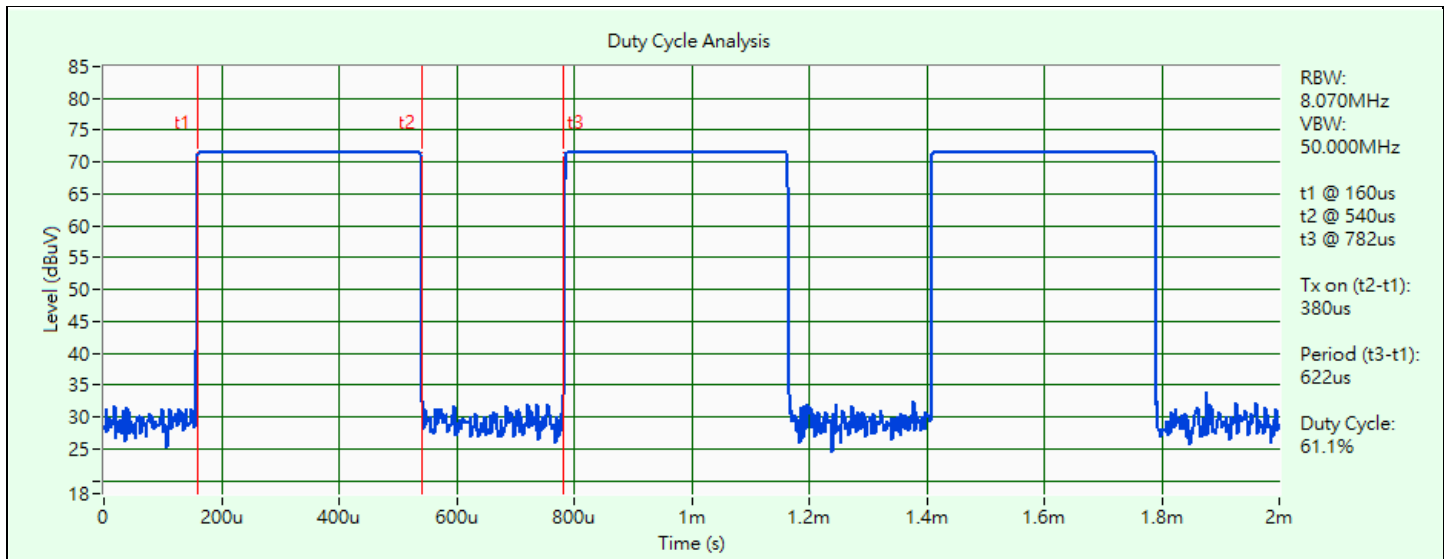

BT-LE 1M

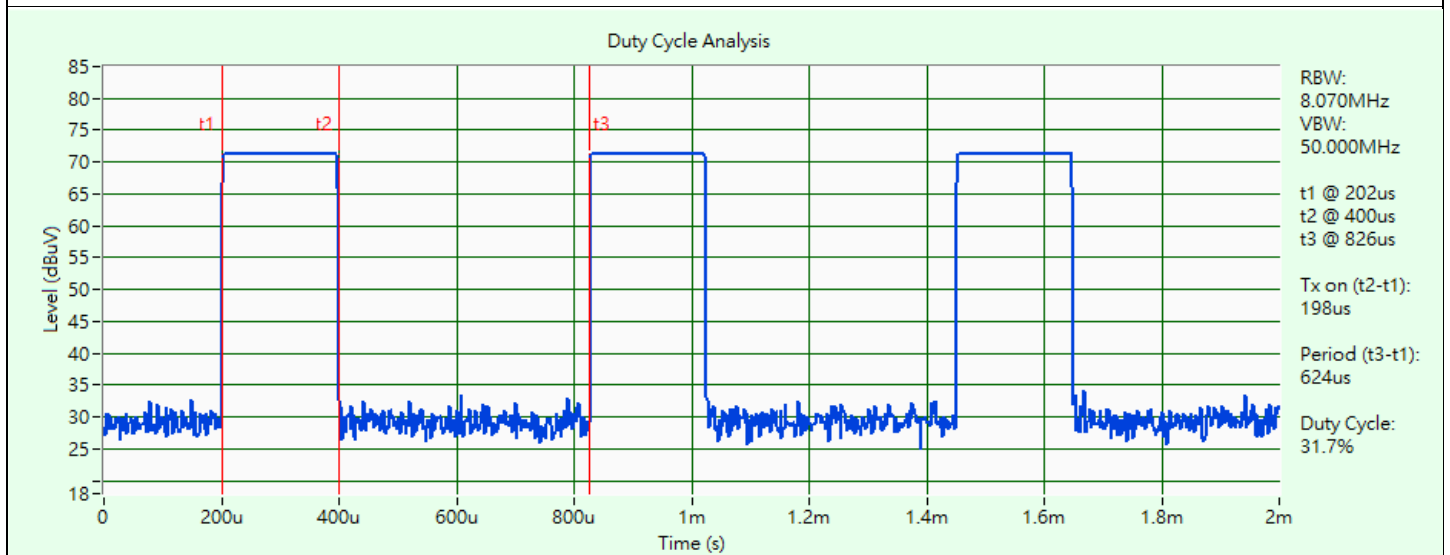


BT-LE 2M

### 3.6 Test Program Used and Operation Descriptions

Controlling software Airoha.tool.Kit has been activated to set the EUT under transmission condition continuously at specific channel frequency.

### 3.7 Connection Diagram of EUT and Peripheral Devices

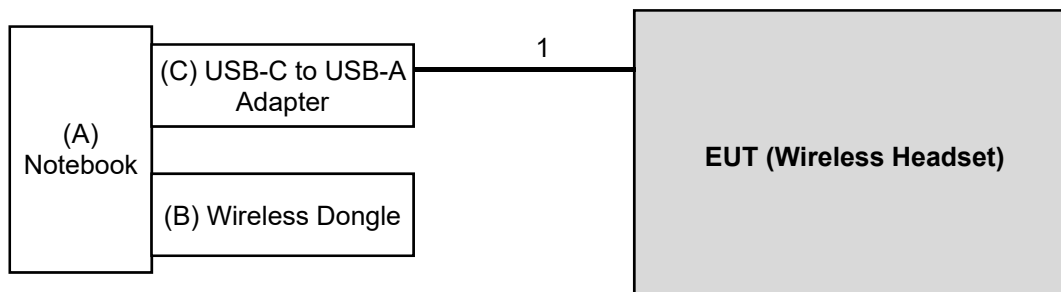

### 3.8 Configuration of Peripheral Devices and Cable Connections

ID	Product	Brand	Model No.	Serial No.	FCC ID	Remarks
A	Notebook	Lenovo	80Q7	PF0KUGU6	N/A	Provided by Lab
B	Wireless Dongle	HYPERX	CL007WA	NA	B94-CL007WA	Accessory of EUT
C	USB-C to USB-A Adapter	HYPERX	CL006A	NA	NA	Accessory of EUT

ID	Cable Descriptions	Qty.	Length (m)	Shielding (Yes/No)	Cores (Qty.)	Remarks
1	Type C Cable	1	0.5	Y	0	Accessory of EUT

## 4 Test Instruments

The calibration interval of the all test instruments are 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

### 4.1 RF Output Power

Description Manufacturer	Model No.	Serial No.	Calibrated Date	Calibrated Until
Peak Power Analyzer KEYSIGHT	8990B	MY51000485	2022/1/18	2023/1/17
Power sensor KEYSIGHT	U2021XA	MY55380009	2022/3/23	2023/3/22
Wideband Power Sensor KEYSIGHT	N1923A	MY58020002	2022/1/17	2023/1/16

Notes:

1. The test was performed in Oven room.
2. Tested Date: 2022/12/29

### 4.2 Power Spectral Density

Description Manufacturer	Model No.	Serial No.	Calibrated Date	Calibrated Until
Software BV	ADT_RF Test Software V6.6.5.4	N/A	N/A	N/A
Spectrum Analyzer ROHDE & SCHWARZ	FSV40	100979	2022/3/25	2023/3/24

Notes:

1. The test was performed in Oven room.
2. Tested Date: 2022/12/29

### 4.3 6 dB Bandwidth

Refer to section 4.2 to get information of the instruments.

### 4.4 Conducted Out of Band Emissions

Refer to section 4.2 to get information of the instruments.

#### 4.5 AC Power Conducted Emissions

Description Manufacturer	Model No.	Serial No.	Calibrated Date	Calibrated Until
LISN ROHDE & SCHWARZ	ESH3-Z5	100311	2022/9/12	2023/9/11
LISN ROHDE & SCHWARZ	ENV216	101826	2022/3/14	2023/3/13
Receiver ROHDE & SCHWARZ	ESCI	100412	2022/8/22	2023/8/21
RF Coaxial Cable WOKEN	5D-FB	Cable-cond1-01	2022/1/15	2023/1/14
Software BVADT	BVADT_Cond_ V7.3.7.4	N/A	N/A	N/A
V-LISN Schwarzbeck	NNBL 8226-2	8226-142	2022/8/31	2023/8/30

Notes:

1. The test was performed in HY - Conduction 1.
2. Tested Date: 2022/12/23

#### 4.6 Unwanted Emissions below 1 GHz

Description Manufacturer	Model No.	Serial No.	Calibrated Date	Calibrated Until
Antenna Tower & Turn Max-Full	MFA-440H	AT93021705	N/A	N/A
Bi_Log Antenna Schwarzbeck	VULB9168	9168-472	2022/10/21	2023/10/20
Loop Antenna EMCI	EM-6879	269	2022/9/19	2023/9/18
Loop Antenna TESEQ	HLA 6121	45745	2022/7/27	2023/7/26
Pre-Amplifier EMCI	EMC 330H	980112	2022/10/1	2023/9/30
Pre-amplifier EMCI	EMC001340	980201	2022/9/23	2023/9/22
RF Coaxial Cable EMCI	5D-NM-BM	140903+140902	2022/1/15	2023/1/14
RF Coaxial Cable WOKEN	8D-FB	Cable-Ch10-01	2022/10/1	2023/9/30
Signal Analyzer Agilent	N9010A	MY52220207	2022/1/6	2023/1/5
Software BV ADT	ADT_Radiated_ V7.6.15.9.5	N/A	N/A	N/A
Test Receiver KEYSIGHT	N9038A	MY55420137	2022/4/27	2023/4/26
Turn Table Max-Full	MFT-201SS	N/A	N/A	N/A
Turn Table Controller Max-Full	MG-7802	N/A	N/A	N/A

Notes:

1. The test was performed in HY - 966 chamber 5.
2. Tested Date: 2022/12/23

#### 4.7 Unwanted Emissions above 1 GHz

Description Manufacturer	Model No.	Serial No.	Calibrated Date	Calibrated Until
Antenna Tower & Turn Max-Full	MFA-440H	AT93021705	N/A	N/A
Boresight antenna tower fixture BV	BAF-02	7	N/A	N/A
Horn Antenna Schwarzbeck	BBHA 9120D	9120D-969	2022/11/13	2023/11/12
	BBHA 9170	148	2022/11/13	2023/11/12
Pre-Amplifier EMCI	EMC 184045	980116	2022/10/1	2023/9/30
Pre-Amplifier EMCI	EMC 012645	980115	2022/10/1	2023/9/30
RF Coaxial Cable EMCI	EMC102-KM-KM-600	150928	2022/7/9	2023/7/8
	EMC102-KM-KM-3000	150929	2022/7/9	2023/7/8
	EMC104-SM-SM- 8000+3000	171005	2022/10/1	2023/9/30
RF Coaxial Cable HUBER SUHNER	SUCOFLEX 104	EMC104-SM-SM- 1000(140807)	2022/10/1	2023/9/30
RF FLITER MICRO-TRONICS	BRM17690	004	2022/1/10	2023/1/9
	BRM50716	060	2022/1/10	2023/1/9
Signal Analyzer Agilent	N9010A	MY52220207	2022/1/6	2023/1/5
Software BV ADT	ADT_Radiated_ V7.6.15.9.5	N/A	N/A	N/A
Test Receiver KEYSIGHT	N9038A	MY55420137	2022/4/27	2023/4/26
Turn Table Max-Full	MFT-201SS	N/A	N/A	N/A
Turn Table Controller Max-Full	MG-7802	N/A	N/A	N/A

Notes:

1. The test was performed in HY - 966 chamber 5.
2. Tested Date: 2022/12/22 ~ 2022/12/23

## 5 Limits of Test Items

### 5.1 RF Output Power

For systems using digital modulation in the 2400–2483.5 MHz bands: 1 Watt (30 dBm)

### 5.2 Power Spectral Density

The Maximum of Power Spectral Density Measurement is 8 dBm in any 3 kHz.

### 5.3 6 dB Bandwidth

The minimum of 6 dB Bandwidth Measurement is 0.5 MHz.

### 5.4 Conducted Out of Band Emissions

Below 20 dB of the highest emission level of operating band (in 100 kHz Resolution Bandwidth).

### 5.5 AC Power Conducted Emissions

Frequency (MHz)	Conducted Limit (dBuV)	
	Quasi-peak	Average
0.15 - 0.5	66 - 56	56 - 46
0.50 - 5.0	56	46
5.0 - 30.0	60	50

Notes:

1. The lower limit shall apply at the transition frequencies.
2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50 MHz.

### 5.6 Unwanted Emissions below 1 GHz

Radiated emissions up to 1 GHz which fall in the restricted bands must comply with the radiated emission limits specified as below table. Other emissions shall be at least 20 dB below the highest level of the desired power:

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

Notes:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).



## 5.7 Unwanted Emissions above 1 GHz

Radiated emissions above 1 GHz which fall in the restricted bands must comply with the radiated emission limits specified as below table. Other emissions shall be at least 20 dB below the highest level of the desired power:

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
Above 960	500	3


### Notes:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. For frequencies above 1000 MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20 dB under any condition of modulation.

## 6 Test Arrangements

### 6.1 RF Output Power

#### 6.1.1 Test Setup

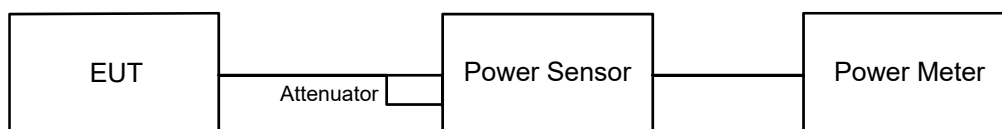

#### 6.1.2 Test Procedure

##### Peak Power:


A peak power sensor was used on the output port of the EUT. A power meter was used to read the response of the peak power sensor. Record the power level.

##### Average Power:

Average power sensor was used to perform output power measurement, trigger and gating function of wide band power meter is enabled to measure max output power of TX on burst. Duty factor is not added to measured value.

### 6.2 Power Spectral Density

#### 6.2.1 Test Setup




#### 6.2.2 Test Procedure

- a. Set analyzer center frequency to DTS channel center frequency.
- b. Set the span to 1.5 times the DTS bandwidth.
- c. Set the RBW to: 3 kHz.
- d. Set the VBW  $\geq 3 \times$  RBW.
- e. Detector = peak.
- f. Sweep time = auto couple.
- g. Trace mode = max hold.
- h. Allow trace to fully stabilize.
- i. Use the peak marker function to determine the maximum amplitude level within the RBW.

### 6.3 6 dB Bandwidth

#### 6.3.1 Test Setup

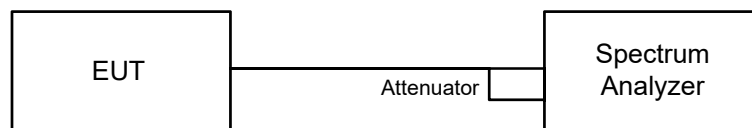


#### 6.3.2 Test Procedure

- Set resolution bandwidth (RBW) = 100 kHz.
- Set the video bandwidth (VBW)  $\geq 3 \times$  RBW, Detector = Peak.
- Trace mode = max hold.
- Sweep = auto couple.
- Measure the maximum width of the emission that is constrained by the frequencies associated with the two amplitude points (upper and lower) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

### 6.4 Conducted Out of Band Emissions

#### 6.4.1 Test Setup

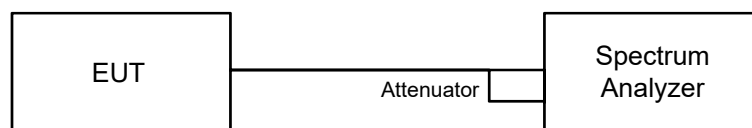

#### 6.4.2 Test Procedure

##### MEASUREMENT PROCEDURE REF


- Set the RBW = 100 kHz.
- Set the VBW  $\geq 300$  kHz.
- Detector = peak.
- Sweep time = auto couple.
- Trace mode = max hold.
- Allow trace to fully stabilize.
- Use the peak marker function to determine the maximum power level in any 100 kHz band segment within the fundamental EBW.

##### MEASUREMENT PROCEDURE OOB

- Set RBW = 100 kHz.
- Set VBW  $\geq 300$  kHz.
- Detector = peak.
- Sweep = auto couple.
- Trace Mode = max hold.
- Allow trace to fully stabilize.
- Use the peak marker function to determine the maximum amplitude level.

## 6.5 AC Power Conducted Emissions

### 6.5.1 Test Setup

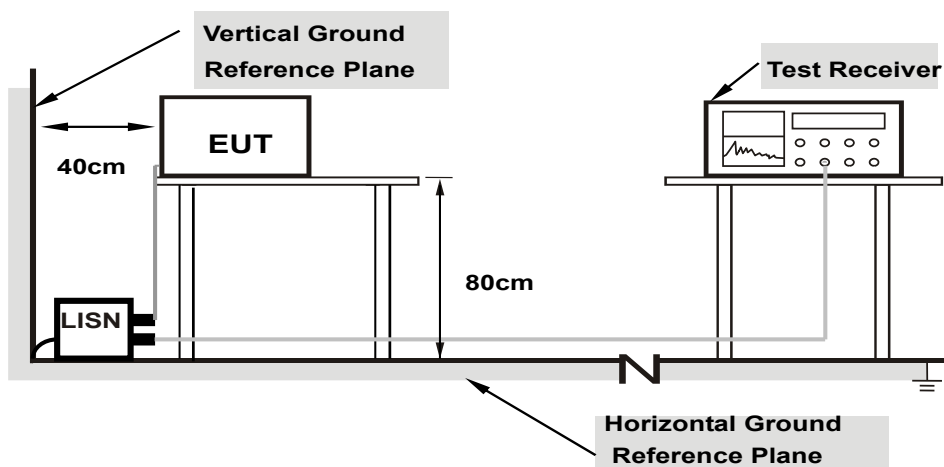

**Note: 1. Support units were connected to second LISN.**

For the actual test configuration, please refer to the attached file (Test Setup Photo).

### 6.5.2 Test Procedure


- The EUT was placed on a 0.8 meter to the top of table and placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50 uH of coupling impedance for the measuring instrument.
- Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- The frequency range from 150 kHz to 30 MHz was searched. Emission levels under (Limit – 20 dB) was not recorded.

Note: The resolution bandwidth and video bandwidth of test receiver is 9 kHz for quasi-peak detection (QP) and average detection (AV) at frequency 0.15 MHz-30 MHz.


## 6.6 Unwanted Emissions below 1 GHz

### 6.6.1 Test Setup

#### For Radiated emission below 30 MHz

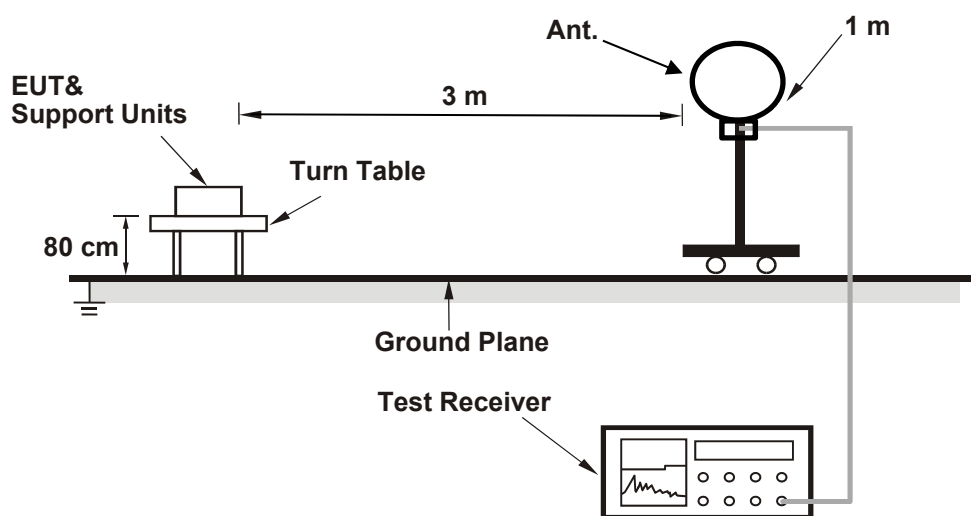

#### For Radiated emission above 30 MHz

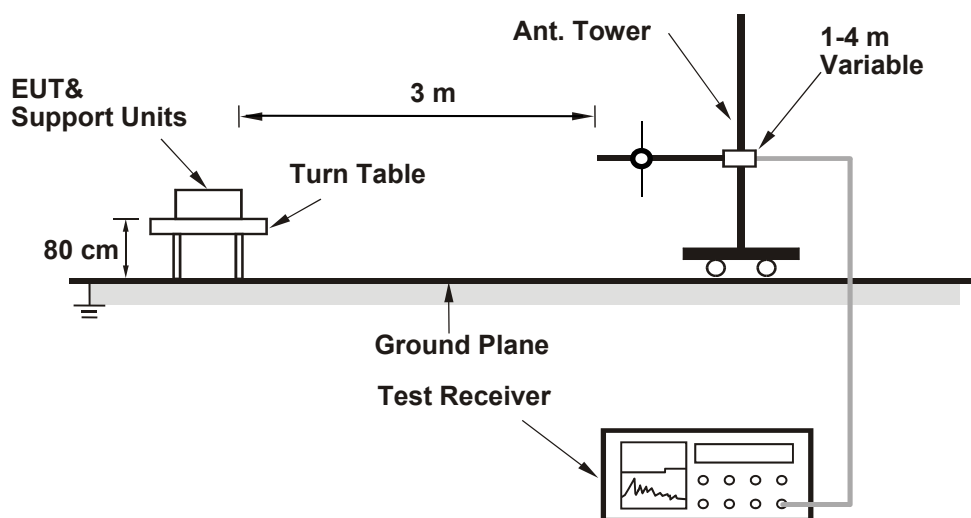

For the actual test configuration, please refer to the attached file (Test Setup Photo).

## 6.6.2 Test Procedure

### For Radiated emission below 30 MHz

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. Parallel, perpendicular, and ground-parallel orientations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Quasi-Peak Detect Function and Specified Bandwidth with Maximum Hold Mode, except for the frequency band (9 kHz to 90 kHz and 110 kHz to 490 kHz) set to average detect function and peak detect function.

#### Notes:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 200 Hz at frequency below 150 kHz.
2. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 9 kHz or 10 kHz at frequency (150 kHz to 30 MHz).
3. All modes of operation were investigated and the worst-case emissions are reported.

### For Radiated emission above 30 MHz


- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1 GHz.

#### Notes:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120 kHz for Quasi-peak detection (QP) at frequency below 1 GHz.
2. All modes of operation were investigated and the worst-case emissions are reported.

## 6.7 Unwanted Emissions above 1 GHz

### 6.7.1 Test Setup

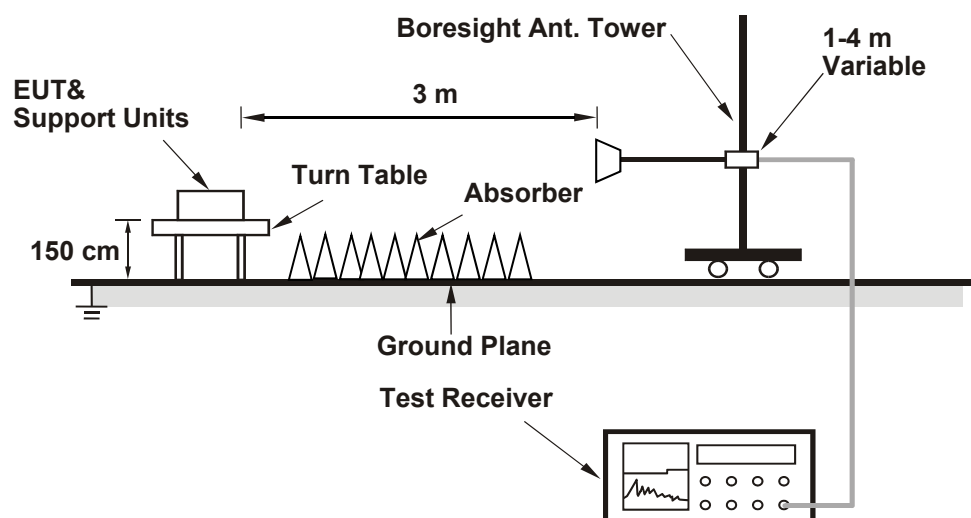

For the actual test configuration, please refer to the attached file (Test Setup Photo).

### 6.7.2 Test Procedure

- The EUT was placed on the top of a rotating table 1.5 meters above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- The test-receiver system was set to peak and average detects function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz. If the peak reading value also meets average limit, measurement with the average detector is unnecessary.

#### Notes:

- The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz for Peak detection (PK) and Average detection (AV) at frequency above 1 GHz.
- For fundamental and harmonic signal measurement, the resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is  $\geq 1/T$  (Duty cycle  $< 98\%$ ) or 10 Hz (Duty cycle  $\geq 98\%$ ) for Average detection (AV) at frequency above 1 GHz.
- All modes of operation were investigated and the worst-case emissions are reported.

## 7 Test Results of Test Item

### 7.1 RF Output Power

Input Power:	120 Vac, 60 Hz	Environmental Conditions:	21°C, 63% RH	Tested By:	Han Wu
--------------	----------------	---------------------------	--------------	------------	--------

#### For Peak Power

##### BT-LE 1M

Chan.	Chan. Freq. (MHz)	Peak Power (mW)	Peak Power (dBm)	Power Limit (dBm)	Test Result
0	2402	13.900	11.43	30	Pass
19	2440	14.028	11.47	30	Pass
39	2480	13.836	11.41	30	Pass

Note: The antenna gain is 2.75 dBi < 6 dBi, so the output power limit shall not be reduced.

##### BT-LE 2M

Chan.	Chan. Freq. (MHz)	Peak Power (mW)	Peak Power (dBm)	Power Limit (dBm)	Test Result
0	2402	13.964	11.45	30	Pass
19	2440	14.093	11.49	30	Pass
39	2480	13.900	11.43	30	Pass

Note: The antenna gain is 2.75 dBi < 6 dBi, so the output power limit shall not be reduced.

#### For Average Power

##### BT-LE 1M

Chan.	Chan. Freq. (MHz)	Average Power (mW)	Average Power (dBm)
0	2402	13.646	11.35
19	2440	13.740	11.38
39	2480	13.552	11.32

##### BT-LE 2M

Chan.	Chan. Freq. (MHz)	Average Power (mW)	Average Power (dBm)
0	2402	13.677	11.36
19	2440	13.804	11.40
39	2480	13.614	11.34



## 7.2 Power Spectral Density

Input Power:	120 Vac, 60 Hz	Environmental Conditions:	21°C, 63% RH	Tested By:	Han Wu
--------------	----------------	---------------------------	--------------	------------	--------

### BT-LE 1M


Chan.	Chan. Freq. (MHz)	PSD (dBm/3kHz)	PSD Limit (dBm/3kHz)	Test Result
0	2402	-8.84	8.00	Pass
19	2440	-8.62	8.00	Pass
39	2480	-8.50	8.00	Pass

Note: The antenna gain is 2.75 dBi < 6 dBi, so the power density limit shall not be reduced.

### BT-LE 2M

Chan.	Chan. Freq. (MHz)	PSD (dBm/3kHz)	PSD Limit (dBm/3kHz)	Test Result
0	2402	-9.61	8.00	Pass
19	2440	-7.91	8.00	Pass
39	2480	-7.81	8.00	Pass

Note: The antenna gain is 2.75 dBi < 6 dBi, so the power density limit shall not be reduced.

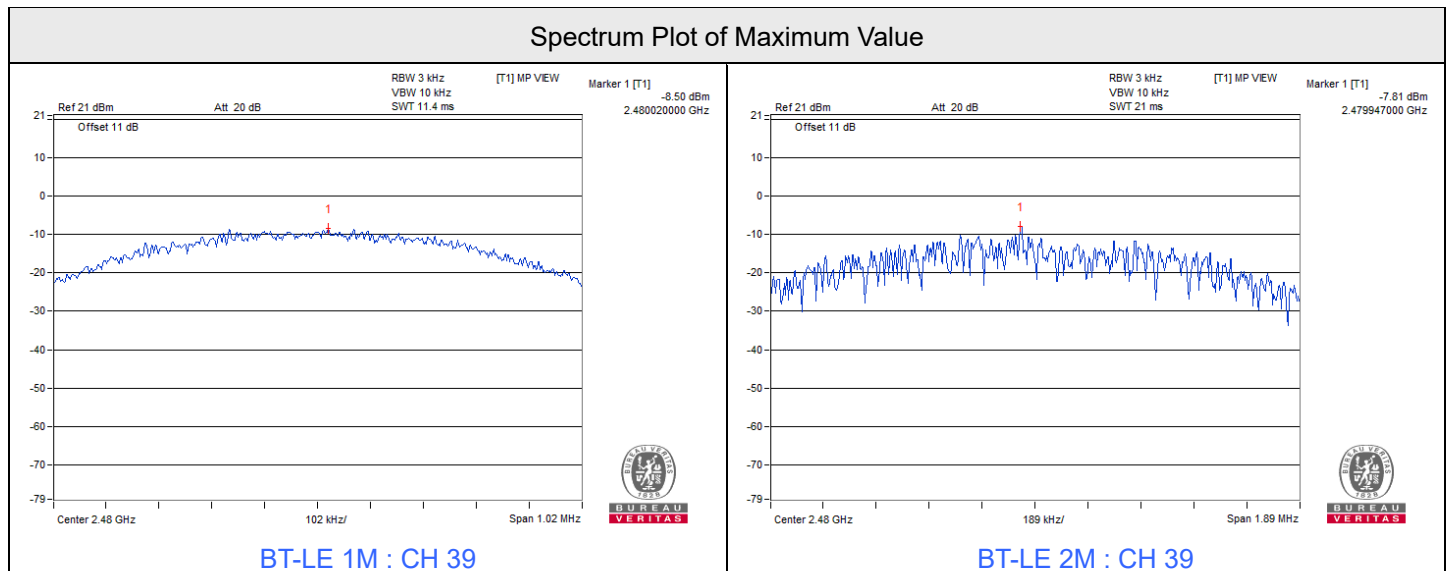

### 7.3 6 dB Bandwidth

Input Power:	120 Vac, 60 Hz	Environmental Conditions:	21°C, 63% RH	Tested By:	Han Wu
--------------	----------------	---------------------------	--------------	------------	--------


#### BT-LE 1M

Channel	Frequency (MHz)	6dB Bandwidth (MHz)	Minimum Limit (MHz)	Test Result
0	2402	0.68	0.5	Pass
19	2440	0.68	0.5	Pass
39	2480	0.68	0.5	Pass

#### BT-LE 2M

Channel	Frequency (MHz)	6dB Bandwidth (MHz)	Minimum Limit (MHz)	Test Result
0	2402	1.26	0.5	Pass
19	2440	1.26	0.5	Pass
39	2480	1.26	0.5	Pass

Spectrum Plot of Minimum Value

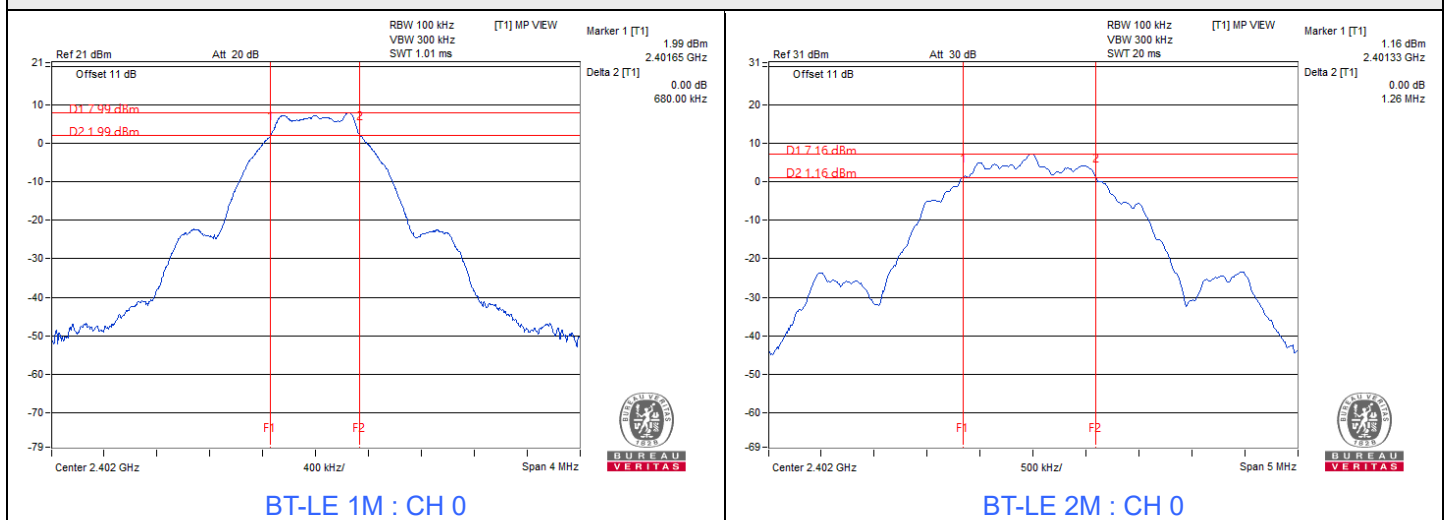



BUREAU VERITAS

### 7.4 Conducted Out of Band Emissions


Input Power:	120 Vac, 60 Hz	Environmental Conditions:	21°C, 63% RH	Tested By:	Han Wu
--------------	----------------	---------------------------	--------------	------------	--------

#### BT-LE 1M







BT-LE 2M

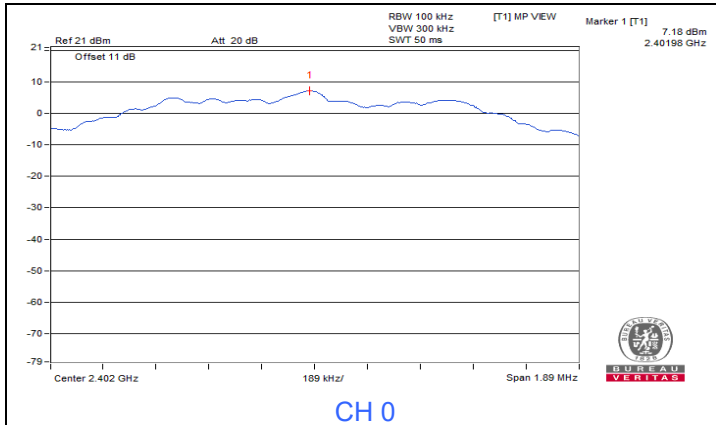


CH 0

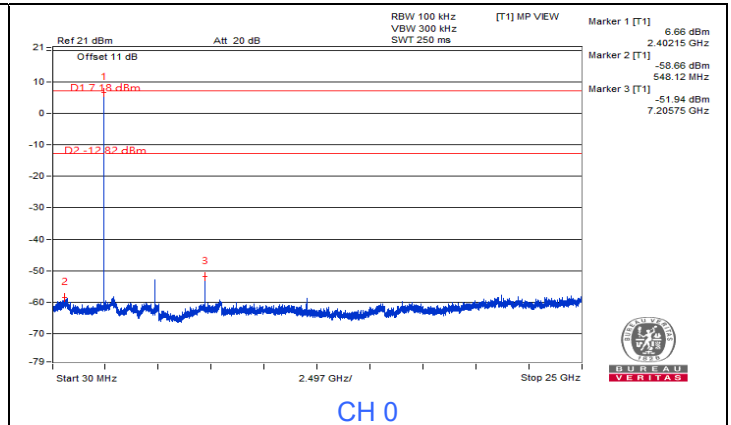


CH 0

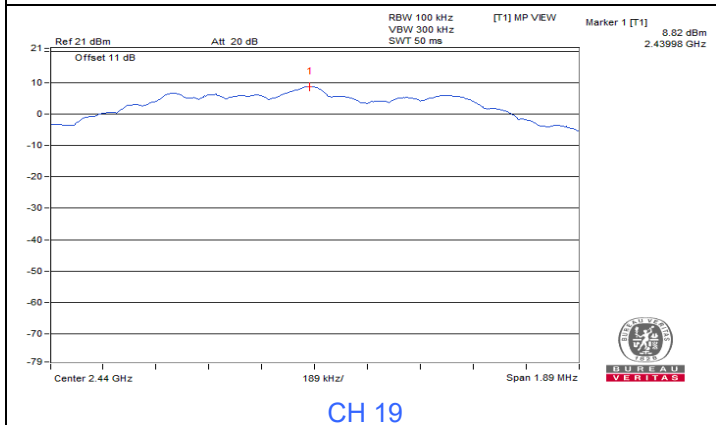


CH 19

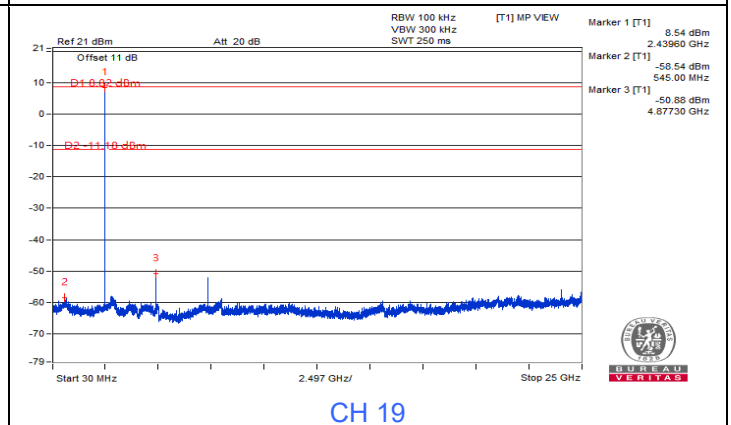


CH 19

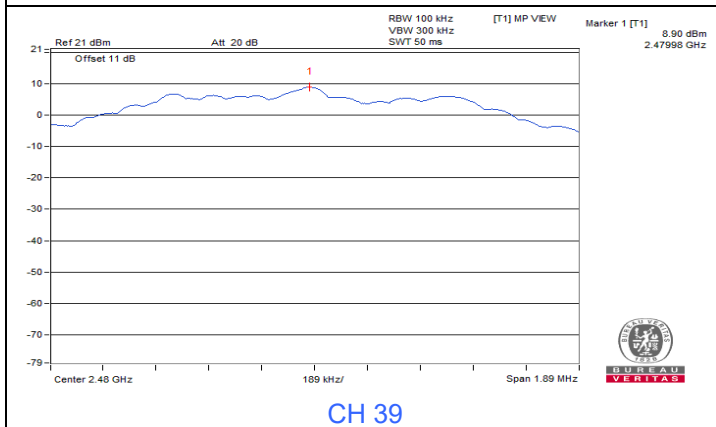


CH 39

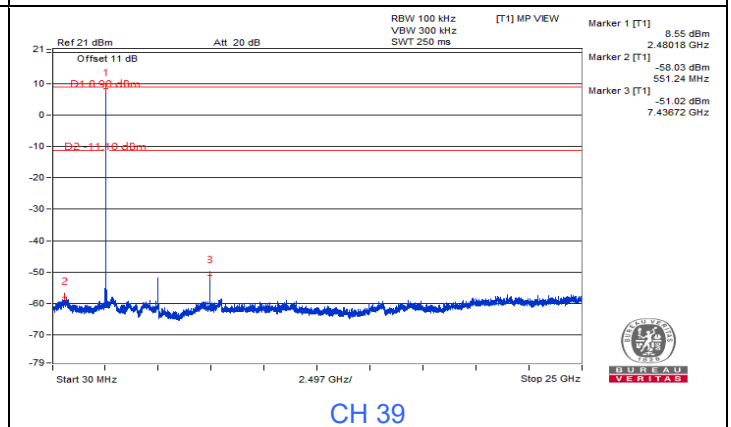

CH 39

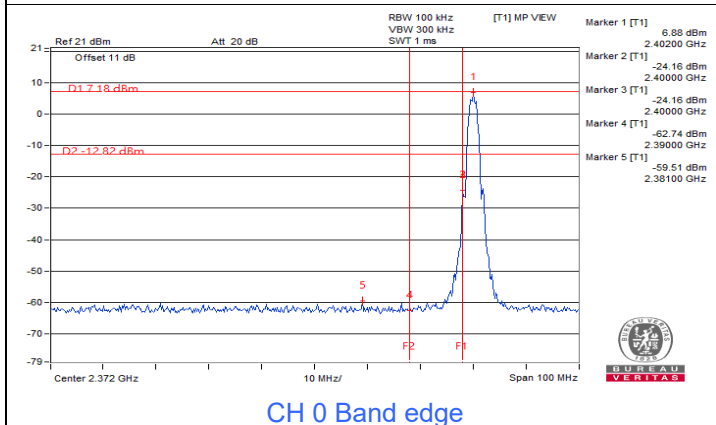

CH 0 Band edge

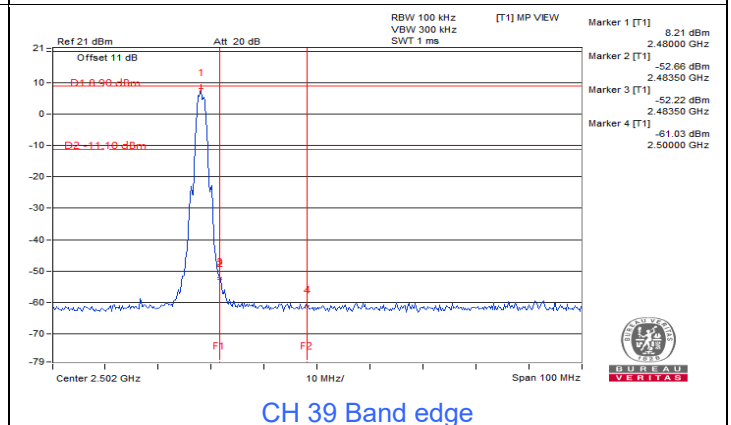

CH 39 Band edge


## 7.5 AC Power Conducted Emissions

RF Mode	BT-LE 2M	Channel	CH 19 : 2440 MHz
Frequency Range	150 kHz ~ 30 MHz	Detector Function & Resolution Bandwidth	Quasi-Peak (QP) / Average (AV), 9 kHz
Input Power	120 Vac, 60 Hz	Environmental Conditions	19.3°C, 67.2% RH
Tested By	Thomas Cheng	Test Mode	A

Phase Of Power : Line (L)										
No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15000	9.62	38.50	19.15	48.12	28.77	66.00	56.00	-17.88	-27.23
<b>2</b>	<b>0.16600</b>	<b>9.63</b>	<b>38.36</b>	<b>21.89</b>	<b>47.99</b>	<b>31.52</b>	<b>65.16</b>	<b>55.16</b>	<b>-17.17</b>	<b>-23.64</b>
3	0.67800	9.69	23.17	17.50	32.86	27.19	56.00	46.00	-23.14	-18.81
4	1.50600	9.71	24.74	18.95	34.45	28.66	56.00	46.00	-21.55	-17.34
5	5.03400	9.76	16.35	7.63	26.11	17.39	60.00	50.00	-33.89	-32.61
6	23.28200	9.87	20.61	6.37	30.48	16.24	60.00	50.00	-29.52	-33.76

### Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

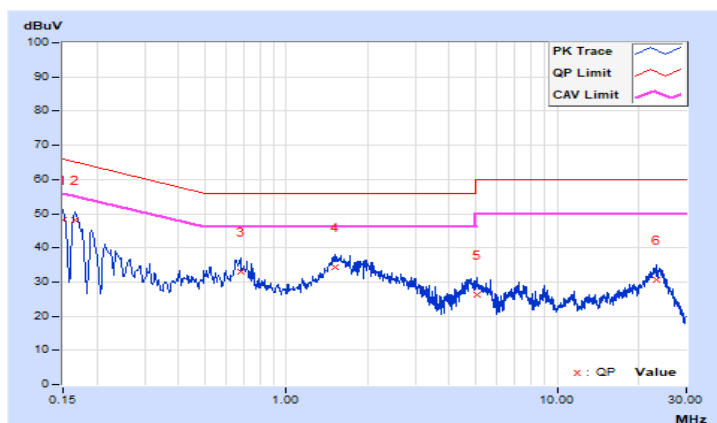


<b>RF Mode</b>	BT-LE 2M	<b>Channel</b>	CH 19 : 2440 MHz
<b>Frequency Range</b>	150 kHz ~ 30 MHz	<b>Detector Function &amp; Resolution Bandwidth</b>	Quasi-Peak (QP) / Average (AV), 9 kHz
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	19.3°C, 67.2% RH
<b>Tested By</b>	Thomas Cheng	<b>Test Mode</b>	A

Phase Of Power : Neutral (N)										
No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15800	9.62	38.00	20.29	47.62	29.91	65.57	55.57	-17.95	-25.66
2	0.19400	9.64	32.89	18.05	42.53	27.69	63.86	53.86	-21.33	-26.17
3	0.65800	9.69	24.80	18.54	34.49	28.23	56.00	46.00	-21.51	-17.77
4	1.55800	9.72	22.73	17.50	32.45	27.22	56.00	46.00	-23.55	-18.78
5	4.67800	9.76	15.58	5.93	25.34	15.69	56.00	46.00	-30.66	-30.31
6	21.22200	9.89	19.66	8.16	29.55	18.05	60.00	50.00	-30.45	-31.95

**Remarks:**

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

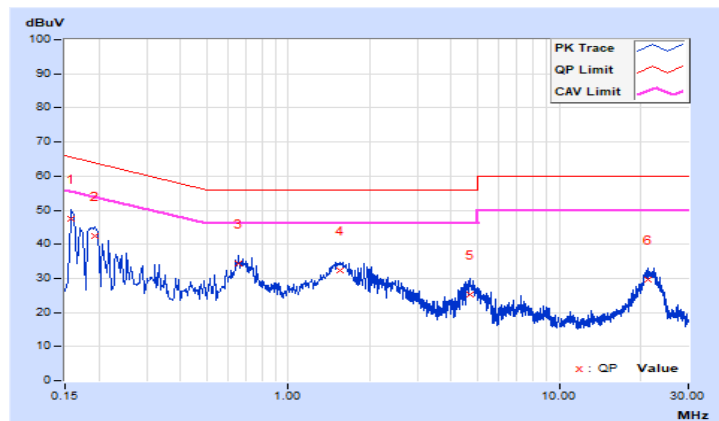


RF Mode	BT-LE 2M	Channel	CH 19 : 2440 MHz
Frequency Range	150 kHz ~ 30 MHz	Detector Function & Resolution Bandwidth	Quasi-Peak (QP) / Average (AV), 9 kHz
Input Power	120 Vac, 60 Hz	Environmental Conditions	19.3°C, 67.2% RH
Tested By	Thomas Cheng	Test Mode	B

Phase Of Power : Line (L)										
No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.16600	9.63	38.14	22.17	47.77	31.80	65.16	55.16	-17.39	-23.36
2	0.19000	9.64	32.59	15.50	42.23	25.14	64.04	54.04	-21.81	-28.90
3	0.68200	9.69	22.48	14.72	32.17	24.41	56.00	46.00	-23.83	-21.59
4	1.66600	9.71	23.43	17.51	33.14	27.22	56.00	46.00	-22.86	-18.78
5	4.79000	9.76	15.76	8.27	25.52	18.03	56.00	46.00	-30.48	-27.97
6	24.13000	9.87	20.35	11.61	30.22	21.48	60.00	50.00	-29.78	-28.52

**Remarks:**

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

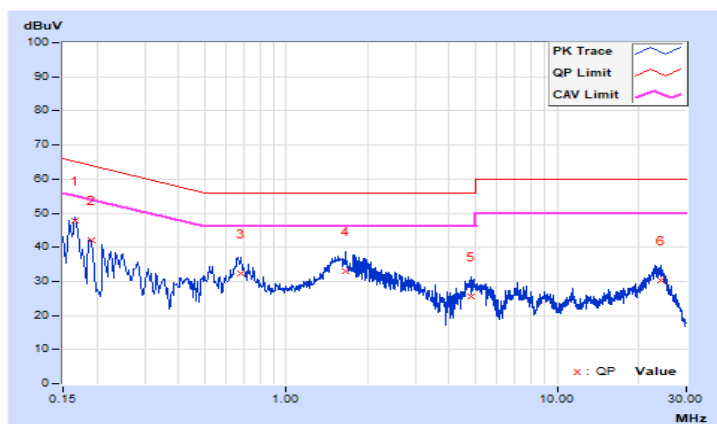


<b>RF Mode</b>	BT-LE 2M	<b>Channel</b>	CH 19 : 2440 MHz
<b>Frequency Range</b>	150 kHz ~ 30 MHz	<b>Detector Function &amp; Resolution Bandwidth</b>	Quasi-Peak (QP) / Average (AV), 9 kHz
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	19.3°C, 67.2% RH
<b>Tested By</b>	Thomas Cheng	<b>Test Mode</b>	B

Phase Of Power : Neutral (N)										
No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15400	9.62	38.31	19.93	47.93	29.55	65.78	55.78	-17.85	-26.23
2	0.18037	9.63	33.31	16.11	42.94	25.74	64.47	54.47	-21.53	-28.73
3	0.69800	9.69	22.55	16.48	32.24	26.17	56.00	46.00	-23.76	-19.83
4	1.54200	9.72	22.16	17.04	31.88	26.76	56.00	46.00	-24.12	-19.24
5	4.66600	9.76	15.05	5.52	24.81	15.28	56.00	46.00	-31.19	-30.72
6	21.77800	9.89	17.59	5.95	27.48	15.84	60.00	50.00	-32.52	-34.16

**Remarks:**

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

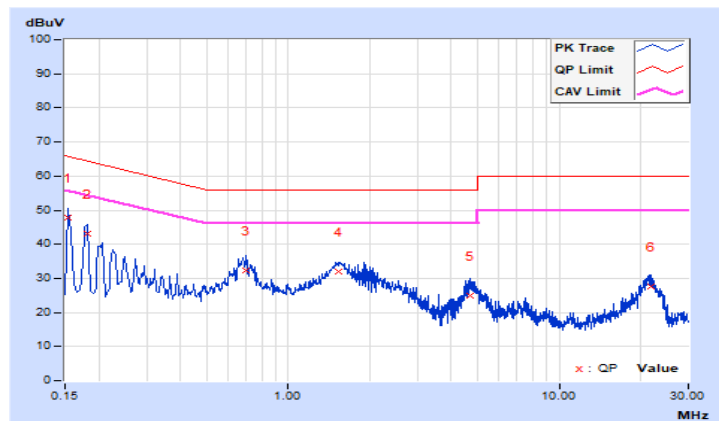



## 7.6 Unwanted Emissions below 1 GHz


<b>RF Mode</b>	BT-LE 2M	<b>Channel</b>	CH 19 : 2440 MHz
<b>Frequency Range</b>	9 kHz ~ 1 GHz	<b>Detector Function &amp; Bandwidth</b>	(QP) RB = 120kHz
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	21°C, 68% RH
<b>Tested By</b>	Thomas Cheng	<b>Test Mode</b>	A

### Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	41.64	27.0 QP	40.0	-13.0	1.00 H	192	39.3	-12.3
2	125.07	24.8 QP	43.5	-18.7	2.00 H	276	38.7	-13.9
3	365.65	22.9 QP	46.0	-23.1	1.50 H	291	33.1	-10.2
4	480.13	26.9 QP	46.0	-19.1	2.00 H	226	34.3	-7.4
5	648.92	23.9 QP	46.0	-22.1	1.50 H	293	28.3	-4.4
6	878.84	27.9 QP	46.0	-18.1	1.00 H	276	29.1	-1.2

#### Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30 MHz ~ 1 GHz.
5. The emission levels were very low against the limit of frequency range 9 kHz ~ 30 MHz: the amplitude of spurious emissions attenuated more than 20 dB below the permissible value to be report.

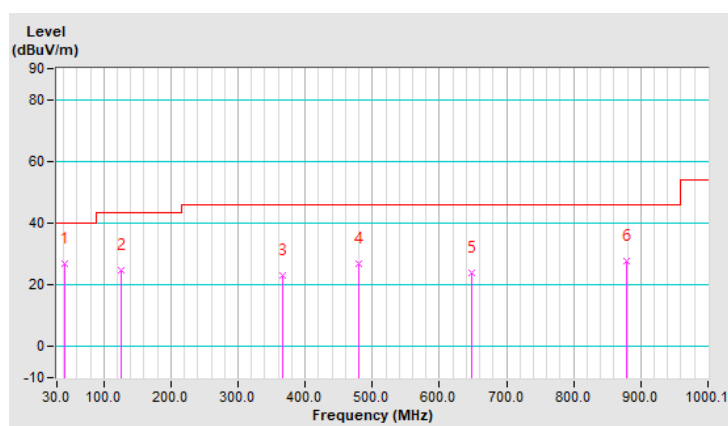




<b>RF Mode</b>	BT-LE 2M	<b>Channel</b>	CH 19 : 2440 MHz
<b>Frequency Range</b>	9 kHz ~ 1 GHz	<b>Detector Function &amp; Bandwidth</b>	(QP) RB = 120kHz
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	21°C, 68% RH
<b>Tested By</b>	Thomas Cheng	<b>Test Mode</b>	A

**Antenna Polarity & Test Distance : Vertical at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	41.64	29.9 QP	40.0	-10.1	1.00 V	132	42.2	-12.3
2	93.06	24.8 QP	43.5	-18.7	1.50 V	59	42.6	-17.8
3	274.47	20.4 QP	46.0	-25.6	2.00 V	214	32.9	-12.5
4	456.84	24.7 QP	46.0	-21.3	1.50 V	304	32.6	-7.9
5	654.74	25.5 QP	46.0	-20.5	1.00 V	239	29.8	-4.3
6	862.35	27.7 QP	46.0	-18.3	1.50 V	283	29.2	-1.5

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30 MHz ~ 1 GHz.
5. The emission levels were very low against the limit of frequency range 9 kHz ~ 30 MHz: the amplitude of spurious emissions attenuated more than 20 dB below the permissible value to be report.

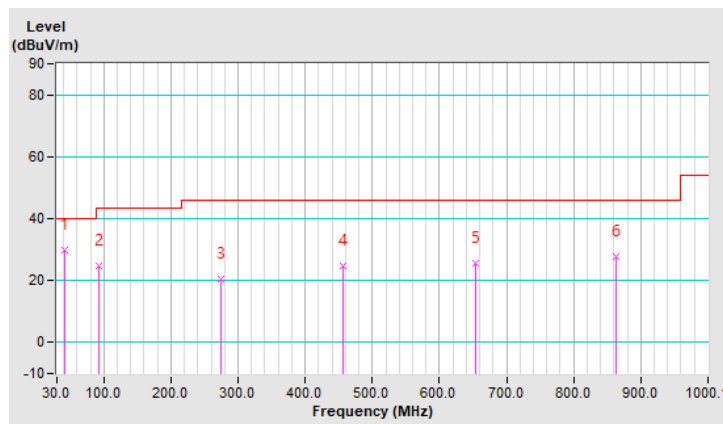


<b>RF Mode</b>	BT-LE 2M	<b>Channel</b>	CH 19 : 2440 MHz
<b>Frequency Range</b>	9 kHz ~ 1 GHz	<b>Detector Function &amp; Bandwidth</b>	(QP) RB = 120kHz
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	21°C, 68% RH
<b>Tested By</b>	Thomas Cheng	<b>Test Mode</b>	B

**Antenna Polarity & Test Distance : Horizontal at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	41.64	29.8 QP	40.0	-10.2	1.00 H	171	42.1	-12.3
2	124.10	24.5 QP	43.5	-19.0	1.50 H	353	38.5	-14.0
3	269.61	20.5 QP	46.0	-25.5	2.00 H	234	33.2	-12.7
4	480.13	24.7 QP	46.0	-21.3	1.50 H	174	32.1	-7.4
5	833.24	26.9 QP	46.0	-19.1	1.00 H	256	28.4	-1.5
6	923.46	27.9 QP	46.0	-18.1	1.00 H	295	28.6	-0.7

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30 MHz ~ 1 GHz.
5. The emission levels were very low against the limit of frequency range 9 kHz ~ 30 MHz: the amplitude of spurious emissions attenuated more than 20 dB below the permissible value to be report.

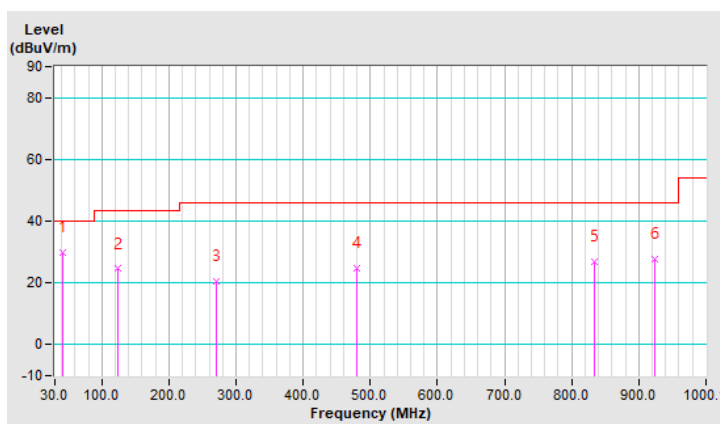


<b>RF Mode</b>	BT-LE 2M	<b>Channel</b>	CH 19 : 2440 MHz
<b>Frequency Range</b>	9 kHz ~ 1 GHz	<b>Detector Function &amp; Bandwidth</b>	(QP) RB = 120kHz
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	21°C, 68% RH
<b>Tested By</b>	Thomas Cheng	<b>Test Mode</b>	B

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBUV)	Correction Factor (dB/m)
1	41.64	29.6 QP	40.0	-10.4	1.00 V	148	41.9	-12.3
2	125.07	23.8 QP	43.5	-19.7	1.50 V	2	37.7	-13.9
3	272.52	22.3 QP	46.0	-23.7	2.00 V	232	34.9	-12.6
4	460.72	23.7 QP	46.0	-22.3	1.50 V	312	31.5	-7.8
5	690.64	24.6 QP	46.0	-21.4	1.00 V	46	28.4	-3.8
6	913.76	27.8 QP	46.0	-18.2	1.50 V	165	28.7	-0.9

**Remarks:**

1. Emission Level(dBUV/m) = Raw Value(dBUV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30 MHz ~ 1 GHz.
5. The emission levels were very low against the limit of frequency range 9 kHz ~ 30 MHz: the amplitude of spurious emissions attenuated more than 20 dB below the permissible value to be report.

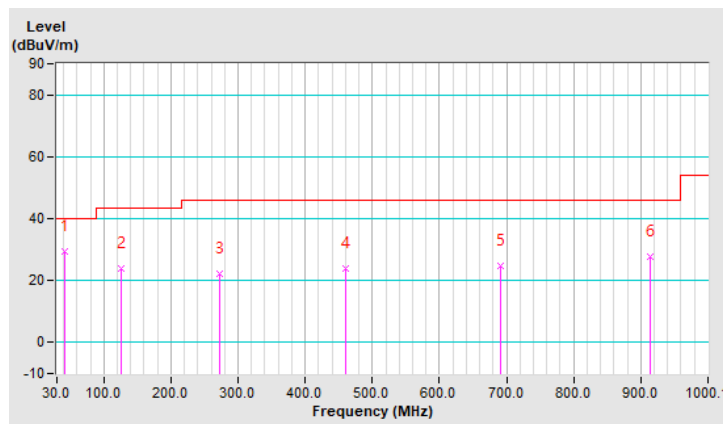

## 7.7 Unwanted Emissions above 1 GHz

<b>RF Mode</b>	BT-LE 1M	<b>Channel</b>	CH 0 : 2402 MHz
<b>Frequency Range</b>	1 GHz ~ 25 GHz	<b>Detector Function &amp; Bandwidth</b>	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 3 kHz
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	22.3°C, 67.2% RH
<b>Tested By</b>	Thomas Cheng		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	51.7 PK	74.0	-22.3	1.16 H	12	54.2	-2.5
2	2390.00	41.7 AV	54.0	-12.3	1.16 H	12	44.2	-2.5
3	*2402.00	105.4 PK			1.16 H	12	71.3	34.1
4	*2402.00	104.6 AV			1.16 H	12	70.5	34.1
5	4804.00	56.6 PK	74.0	-17.4	1.11 H	336	60.6	-4.0
<b>6</b>	<b>4804.00</b>	<b>49.9 AV</b>	<b>54.0</b>	<b>-4.1</b>	<b>1.11 H</b>	<b>336</b>	<b>53.9</b>	<b>-4.0</b>
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	51.5 PK	74.0	-22.5	3.11 V	202	54.0	-2.5
2	2390.00	41.6 AV	54.0	-12.4	3.11 V	202	44.1	-2.5
3	*2402.00	101.2 PK			3.11 V	202	67.1	34.1
4	*2402.00	100.3 AV			3.11 V	202	66.2	34.1
5	4804.00	54.8 PK	74.0	-19.2	2.55 V	152	58.8	-4.0
6	4804.00	48.9 AV	54.0	-5.1	2.55 V	152	52.9	-4.0

### Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.



<b>RF Mode</b>	BT-LE 1M	<b>Channel</b>	CH 19 : 2440 MHz
<b>Frequency Range</b>	1 GHz ~ 25 GHz	<b>Detector Function &amp; Bandwidth</b>	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 3 kHz
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	22.3°C, 67.2% RH
<b>Tested By</b>	Thomas Cheng		

**Antenna Polarity & Test Distance : Horizontal at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2440.00	105.1 PK			1.17 H	15	70.8	34.3
2	*2440.00	104.3 AV			1.17 H	15	70.0	34.3
3	4880.00	56.4 PK	74.0	-17.6	1.62 H	189	60.6	-4.2
4	4880.00	49.7 AV	54.0	-4.3	1.62 H	189	53.9	-4.2

**Antenna Polarity & Test Distance : Vertical at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2440.00	100.9 PK			3.09 V	203	66.6	34.3
2	*2440.00	100.1 AV			3.09 V	203	65.8	34.3
3	4880.00	54.1 PK	74.0	-19.9	1.05 V	193	58.3	-4.2
4	4880.00	48.2 AV	54.0	-5.8	1.05 V	193	52.4	-4.2

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.

<b>RF Mode</b>	BT-LE 1M	<b>Channel</b>	CH 39 : 2480 MHz
<b>Frequency Range</b>	1 GHz ~ 25 GHz	<b>Detector Function &amp; Bandwidth</b>	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 3 kHz
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	22.3°C, 67.2% RH
<b>Tested By</b>	Thomas Cheng		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2480.00	104.6 PK			1.04 H	64	70.2	34.4
2	*2480.00	103.8 AV			1.04 H	64	69.4	34.4
3	2483.50	52.6 PK	74.0	-21.4	1.04 H	64	54.5	-1.9
4	2483.50	42.7 AV	54.0	-11.3	1.04 H	64	44.6	-1.9
5	4960.00	56.4 PK	74.0	-17.6	1.32 H	317	60.7	-4.3
6	4960.00	49.9 AV	54.0	-4.1	1.32 H	317	54.2	-4.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2480.00	100.1 PK			3.27 V	201	65.7	34.4
2	*2480.00	99.3 AV			3.27 V	201	64.9	34.4
3	2483.50	52.5 PK	74.0	-21.5	3.27 V	201	54.4	-1.9
4	2483.50	42.6 AV	54.0	-11.4	3.27 V	201	44.5	-1.9
5	4960.00	53.5 PK	74.0	-20.5	3.66 V	71	57.8	-4.3
6	4960.00	48.2 AV	54.0	-5.8	3.66 V	71	52.5	-4.3

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.



<b>RF Mode</b>	BT-LE 2M	<b>Channel</b>	CH 0 : 2402 MHz
<b>Frequency Range</b>	1 GHz ~ 25 GHz	<b>Detector Function &amp; Bandwidth</b>	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 5.1 kHz
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	22.3°C, 67.2% RH
<b>Tested By</b>	Thomas Cheng		

**Antenna Polarity & Test Distance : Horizontal at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	52.3 PK	74.0	-21.7	1.16 H	12	54.8	-2.5
2	2390.00	42.3 AV	54.0	-11.7	1.16 H	12	44.8	-2.5
3	*2402.00	105.4 PK			1.16 H	12	71.3	34.1
4	*2402.00	103.4 AV			1.16 H	12	69.3	34.1
5	4804.00	56.6 PK	74.0	-17.4	1.32 H	340	60.6	-4.0
6	4804.00	49.8 AV	54.0	-4.2	1.32 H	340	53.8	-4.0

**Antenna Polarity & Test Distance : Vertical at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	52.0 PK	74.0	-22.0	3.04 V	202	54.5	-2.5
2	2390.00	42.1 AV	54.0	-11.9	3.04 V	202	44.6	-2.5
3	*2402.00	101.2 PK			3.04 V	202	67.1	34.1
4	*2402.00	99.0 AV			3.04 V	202	64.9	34.1
5	4804.00	54.7 PK	74.0	-19.3	2.21 V	277	58.7	-4.0
6	4804.00	47.4 AV	54.0	-6.6	2.21 V	277	51.4	-4.0

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.





<b>RF Mode</b>	BT-LE 2M	<b>Channel</b>	CH 19 : 2440 MHz
<b>Frequency Range</b>	1 GHz ~ 25 GHz	<b>Detector Function &amp; Bandwidth</b>	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 5.1 kHz
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	22.3°C, 67.2% RH
<b>Tested By</b>	Thomas Cheng		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2440.00	105.1 PK			1.02 H	17	70.8	34.3
2	*2440.00	103.1 AV			1.02 H	17	68.8	34.3
3	4880.00	56.5 PK	74.0	-17.5	1.12 H	250	60.7	-4.2
4	4880.00	49.0 AV	54.0	-5.0	1.12 H	250	53.2	-4.2

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2440.00	100.9 PK			3.09 V	201	66.6	34.3
2	*2440.00	98.9 AV			3.09 V	201	64.6	34.3
3	4880.00	54.1 PK	74.0	-19.9	2.89 V	80	58.3	-4.2
4	4880.00	46.9 AV	54.0	-7.1	2.89 V	80	51.1	-4.2

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.



<b>RF Mode</b>	BT-LE 2M	<b>Channel</b>	CH 39 : 2480 MHz
<b>Frequency Range</b>	1 GHz ~ 25 GHz	<b>Detector Function &amp; Bandwidth</b>	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 5.1 kHz
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	22.3°C, 67.2% RH
<b>Tested By</b>	Thomas Cheng		

**Antenna Polarity & Test Distance : Horizontal at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2480.00	105.1 PK			1.19 H	60	70.7	34.4
2	*2480.00	103.1 AV			1.19 H	60	68.7	34.4
3	2483.50	56.0 PK	74.0	-18.0	1.19 H	60	57.9	-1.9
4	2483.50	46.3 AV	54.0	-7.7	1.19 H	60	48.2	-1.9
5	4960.00	55.9 PK	74.0	-18.1	2.14 H	288	60.2	-4.3
6	4960.00	49.1 AV	54.0	-4.9	2.14 H	288	53.4	-4.3

**Antenna Polarity & Test Distance : Vertical at 3 m**


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2480.00	100.6 PK			3.34 V	199	66.2	34.4
2	*2480.00	98.6 AV			3.34 V	199	64.2	34.4
3	2483.50	54.2 PK	74.0	-19.8	3.34 V	199	56.1	-1.9
4	2483.50	45.0 AV	54.0	-9.0	3.34 V	199	46.9	-1.9
5	4960.00	53.8 PK	74.0	-20.2	3.59 V	352	58.1	-4.3
6	4960.00	46.0 AV	54.0	-8.0	3.59 V	352	50.3	-4.3

**Remarks:**


1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.

### BT-LE 1M Channel 0


#### Horizontal (Peak)

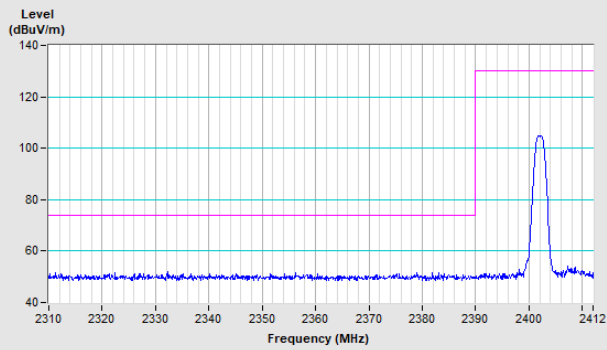


#### Horizontal (Average)

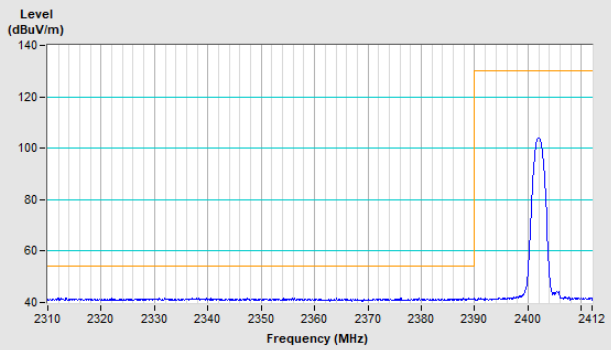

#### Vertical (Peak)

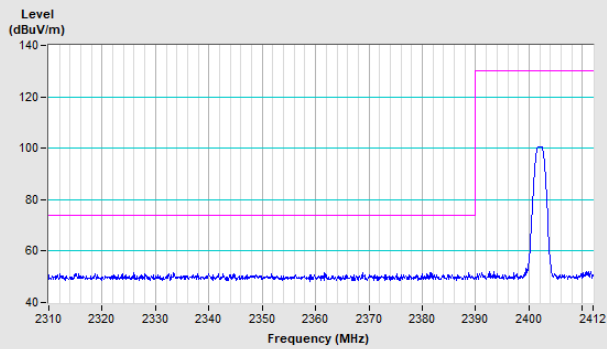


#### Vertical (Average)

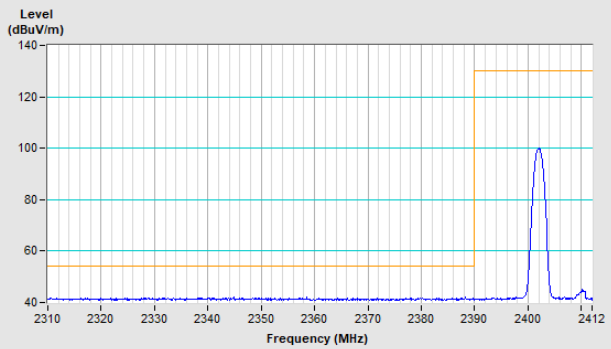


### BT-LE 1M Channel 39


#### Horizontal (Peak)

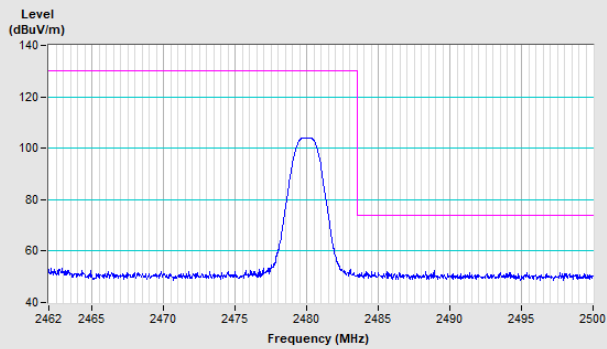


#### Horizontal (Average)

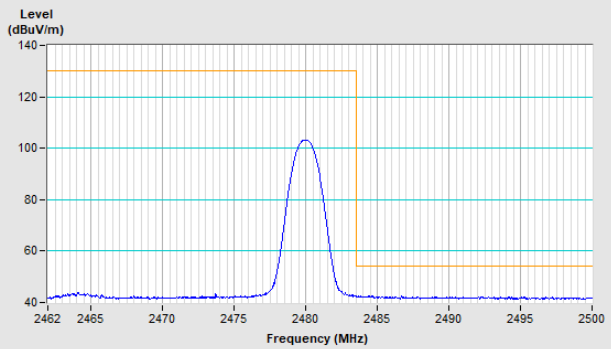

#### Vertical (Peak)

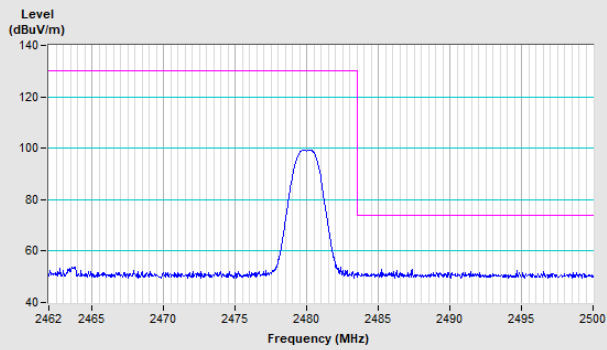


#### Vertical (Average)

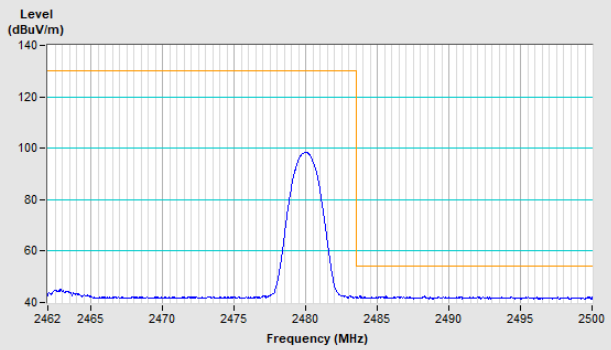


### BT-LE 2M Channel 0


#### Horizontal (Peak)

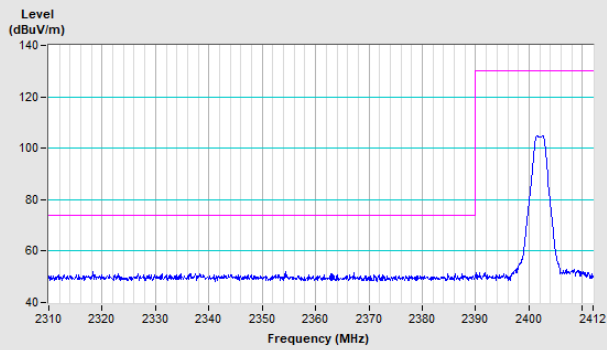


#### Horizontal (Average)

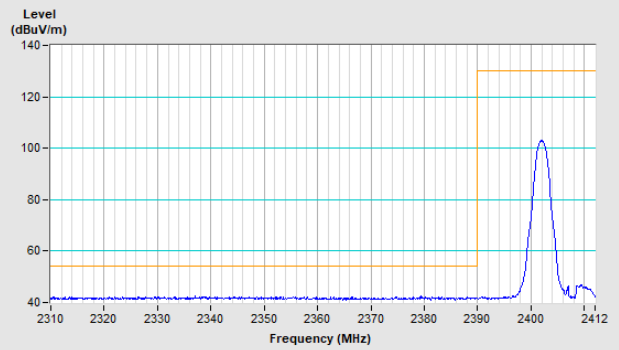

#### Vertical (Peak)

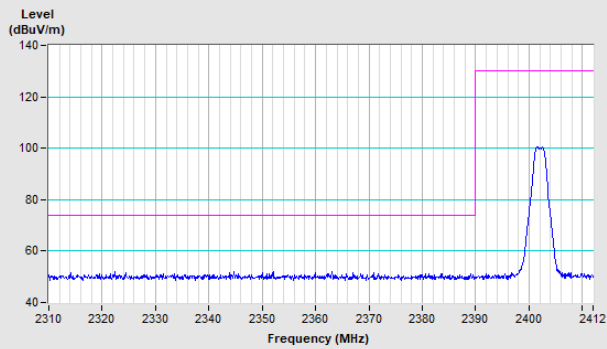


#### Vertical (Average)

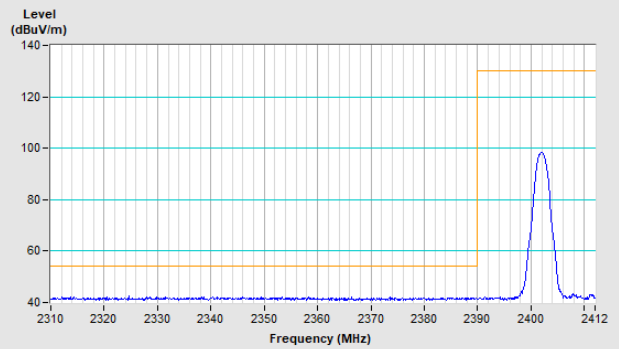


### BT-LE 2M Channel 39


#### Horizontal (Peak)

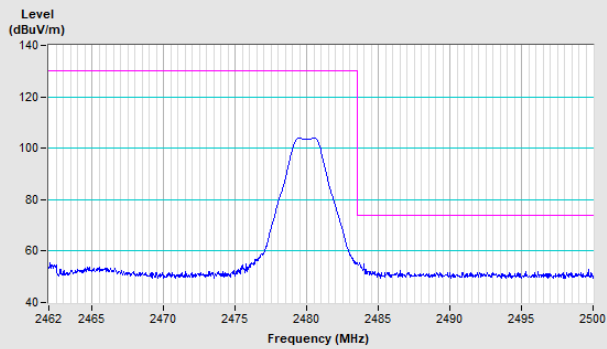


#### Horizontal (Average)

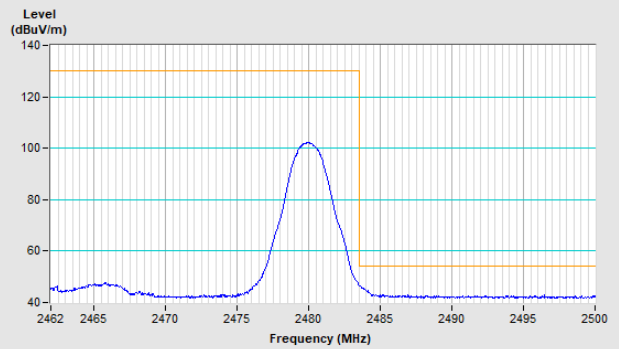

#### Vertical (Peak)

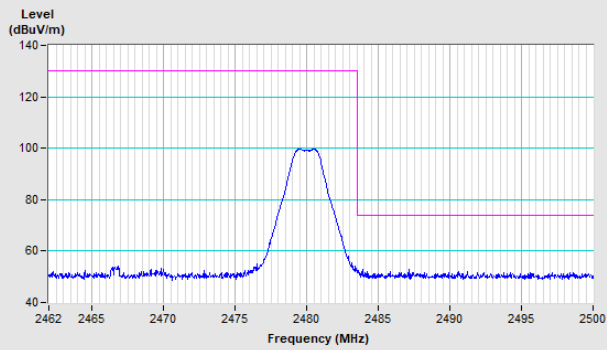

#### Vertical (Average)

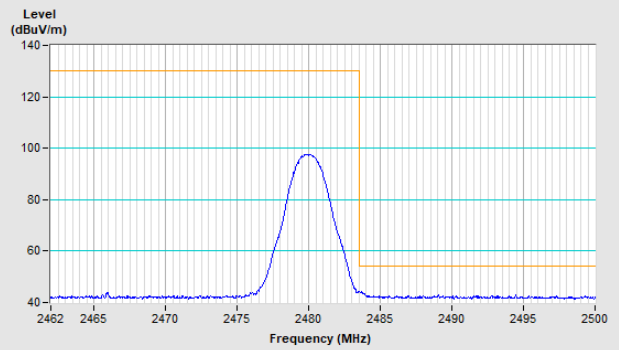

## 8 Pictures of Test Arrangements

Please refer to the attached file (Test Setup Photo)



## 9 Information of the Testing Laboratories

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are FCC recognized accredited test firms and accredited according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

**Lin Kou EMC/RF Lab**

Tel: 886-2-26052180

Fax: 886-2-26051924

**Hsin Chu EMC/RF/Telecom Lab**

Tel: 886-3-6668565

Fax: 886-3-6668323

**Hwa Ya EMC/RF/Safety Lab**

Tel: 886-3-3183232

Fax: 886-3-3270892

**Email:** [service.adt@bureauveritas.com](mailto:service.adt@bureauveritas.com)

**Web Site:** <http://ee.bureauveritas.com.tw>

The address and road map of all our labs can be found in our web site also.

--- END ---