



<b>Prüfbericht-Nr.:</b> <i>Test report no.:</i>	CN21X3RU(P15C-SRD) 001	<b>Auftrags-Nr.:</b> <i>Order no.:</i>	238516940	Seite 1 von 27 Page 1 of 27
<b>Kunden-Referenz-Nr.:</b> <i>Client reference no.:</i>	N/A	<b>Auftragsdatum:</b> <i>Order date:</i>	2021-06-29	
<b>Auftraggeber:</b> <i>Client:</i>	HP Inc. 3390 East Harmony Road, Mailstop 66, Fort Collins, CO 80528, United States			
<b>Prüfgegenstand:</b> <i>Test item:</i>	Wireless Controller			
<b>Bezeichnung / Typ-Nr.:</b> <i>Identification / Type no.:</i>	CP001			
<b>Auftrags-Inhalt:</b> <i>Order content:</i>	FCC Part 15C Test report (2.4GHz)			
<b>Prüfgrundlage:</b> <i>Test specification:</i>	FCC 47CFR Part 15: Subpart C Section 15.247			
<b>Wareneingangsdatum:</b> <i>Date of sample receipt:</i>	2021-07-05			
<b>Prüfmuster-Nr.:</b> <i>Test sample no.:</i>	A003085022-008 A003085022-006			
<b>Prüfzeitraum:</b> <i>Testing period:</i>	2021-07-13 - 2021-07-15			
<b>Ort der Prüfung:</b> <i>Place of testing:</i>	EMC/RF Taipei Testing Site			
<b>Prüflaboratorium:</b> <i>Testing laboratory:</i>	Taipei Testing Laboratories			
<b>Prüfergebnis*:</b> <i>Test result*:</i>	Pass			
<b>überprüft von:</b> <i>compiled by:</i>		<b>genehmigt von:</b> <i>authorized by:</i>		
<b>Datum:</b> <i>Date:</i>	2021-08-12	<b>Ausstellungsdatum:</b> <i>Issue date:</i>	2021-08-12	
<b>Stellung / Position:</b>	Senior Project Manager	<b>Stellung / Position:</b>	Senior Project Manager	
<b>Sonstiges / Other:</b>				
<b>Zustand des Prüfgegenstandes bei Anlieferung:</b> <i>Condition of the test item at delivery:</i>	Prüfmuster vollständig und unbeschädigt <i>Test item complete and undamaged</i>			
* Legende:	1 = sehr gut P(ass) = entspricht o.g. Prüfgrundlage(n)	2 = gut F(ail) = entspricht nicht o.g. Prüfgrundlage(n)	3 = befriedigend N/A = nicht anwendbar	4 = ausreichend N/T = nicht getestet
* Legend:	1 = very good P(ass) = passed a.m. test specification(s)	2 = good F(ail) = failed a.m. test specification(s)	3 = satisfactory N/A = not applicable	4 = sufficient N/T = not tested
<b>Dieser Prüfbericht bezieht sich nur auf das o.g. Prüfmuster und darf ohne Genehmigung der Prüfstelle nicht auszugsweise vervielfältigt werden. Dieser Bericht berechtigt nicht zur Verwendung eines Prüfzeichens.</b> <i>This test report only relates to the a. m. test sample. Without permission of the test center this test report is not permitted to be duplicated in extracts. This test report does not entitle to carry any test mark.</i>				

## TEST SUMMARY

Report Section	FCC Clause	Test Item	Result
5.1.1	15.247(b) & 15.203	Antenna Requirement	Pass
0	15.247(b)(3)	Peak Output Power	Pass
5.1.3	15.247(a)(2)	6 dB Bandwidth	Pass
5.1.3	2.1049	99% Occupied Bandwidth	Pass
5.1.4	15.247(e)	Power Spectral Density	Pass
5.1.5	15.247(d)	Conducted Spurious Emissions and Band Edges	Pass
5.1.6	15.247(d) & 15.205 & 15.209	Radiated Spurious Emissions and Band Edges	Pass
5.2.1	15.207	Mains Conducted Emission	Pass

**Note:** Determining compliance based on the results of the compliance measurement, not taking into account measurement instrumentation uncertainty.

## Contents

<b>HISTORY OF THIS TEST REPORT .....</b>	<b>5</b>
<b>1. GENERAL REMARKS .....</b>	<b>6</b>
<b>1.1 COMPLEMENTARY MATERIALS.....</b>	<b>6</b>
<b>1.2 DECISION RULE OF CONFORMITY .....</b>	<b>6</b>
<b>2. TEST SITES .....</b>	<b>7</b>
<b>2.1 TEST LABORATORY .....</b>	<b>7</b>
<b>2.2 TEST FACILITY.....</b>	<b>7</b>
<b>2.3 TRACEABILITY .....</b>	<b>8</b>
<b>2.4 CALIBRATION .....</b>	<b>8</b>
<b>2.5 MEASUREMENT UNCERTAINTY .....</b>	<b>8</b>
<b>3. GENERAL PRODUCT INFORMATION.....</b>	<b>9</b>
<b>3.1 PRODUCT FUNCTION AND INTENDED USE .....</b>	<b>9</b>
<b>3.2 SYSTEM DETAILS AND RATINGS.....</b>	<b>9</b>
<b>3.3 NOISE GENERATING AND NOISE SUPPRESSING PARTS .....</b>	<b>10</b>
<b>3.4 SUBMITTED DOCUMENTS.....</b>	<b>10</b>
<b>4. TEST SET-UP AND OPERATION MODES.....</b>	<b>11</b>
<b>4.1 PRINCIPLE OF CONFIGURATION SELECTION .....</b>	<b>11</b>
<b>4.2 CARRIER FREQUENCY AND CHANNEL.....</b>	<b>11</b>
<b>4.3 TEST OPERATION AND TEST SOFTWARE.....</b>	<b>12</b>
<b>4.4 SPECIAL ACCESSORIES AND AUXILIARY EQUIPMENT .....</b>	<b>13</b>
<b>4.5 TEST SETUP DIAGRAM .....</b>	<b>14</b>
<b>5. TEST RESULTS .....</b>	<b>15</b>
<b>5.1 TRANSMITTER REQUIREMENT &amp; TEST SUITES .....</b>	<b>15</b>
5.1.1 <i>Antenna Requirement .....</i>	<i>15</i>
5.1.2 <i>Peak Output Power .....</i>	<i>16</i>
5.1.3 <i>6 dB Bandwidth and 99% Occupied Bandwidth.....</i>	<i>18</i>
5.1.4 <i>Power Spectral Density.....</i>	<i>19</i>
5.1.5 <i>Conducted Spurious Emissions and Frequency Band Edges Measured in 100kHz Bandwidth.....</i>	<i>20</i>
5.1.6 <i>Radiated Spurious Emissions and Band Edges .....</i>	<i>21</i>
<b>5.2 MAINS EMISSION .....</b>	<b>26</b>
5.2.1 <i>Mains Conducted Emission.....</i>	<i>26</i>

**Prüfbericht - Nr.: CN21X3RU(P15C-SRD) 001**  
Test Report No.

Seite 4 von 27  
Page 4 of 27

**APPENDIX A - TEST RESULT OF CONDUCTED**

**APPENDIX B - TEST RESULT OF RADIATED EMISSIONS & MAINS CONDUCTED EMISSION**

**APPENDIX SP - PHOTOGRAPHS OF TEST SETUP**

**APPENDIX EP - PHOTOGRAPHS OF EUT**

**Prüfbericht - Nr.:** CN21X3RU(P15C-SRD) 001  
Test Report No.

Seite 5 von 27  
Page 5 of 27

### HISTORY OF THIS TEST REPORT

Report No.	Description	Date Issued
CN21X3RU(P15C-SRD) 001	Original Release	2021-08-12

## 1. General Remarks

### 1.1 Complementary Materials

All attachments are integral parts of this test report. This applies especially to the following appendix:

**Appendix A - Test Result of Conducted**

**Appendix B - Test Result of Radiated Emissions & Mains Conducted Emission**

**Appendix SP - Photographs of Test Setup**

**Appendix EP - Photographs of EUT**

#### Applied Standard and Test Levels

Radio
FCC 47CFR Part 15: Subpart C Section 15.247 FCC 47CFR Part 2: Subpart J Section 2.1049 ANSI C63.10:2013 KDB 558074 D01 15.247 Meas Guidance v05r02

### 1.2 Decision Rule of Conformity

The decision rule of conformity of this test report is following the requirements of the requested standard in the quotation, and agreed among testing laboratory and manufacturer (applicant) to exclude the consideration of Measurement Uncertainty, unless it is required by the specific standard.

## 2. Test Sites

### 2.1 Test Laboratory

Taipei Testing Laboratories

11F. No.758, Sec. 4, Bade Rd., Songshan Dist.  
Taipei City 105  
Taiwan (R.O.C.)

### 2.2 Test Facility

Taipei Testing Laboratories

No.458-18, Sec. 2, Fenliao Rd., Linkou Dist.,  
New Taipei City 244  
Taiwan (R.O.C.)  
FCC Registration No.: 226631  
ISED Registration No.: 25563

## 2.3 Traceability

All measurement equipment calibrations are traceable to NML(Taiwan)/NIST(USA) or where calibration is performed outside Taiwan, to equivalent nationally recognized standards organizations.

## 2.4 Calibration

Equipment requiring calibration is calibrated periodically in a suitably accredited Calibration Lab. Additionally all equipment is verified for proper performance on a regular basis using in house standards or comparisons.

## 2.5 Measurement Uncertainty

All measurement uncertainty values are shown with a coverage factor of  $k=2$  to indicate a 95% level of confidence.

### Emission Measurement Uncertainty

Parameter	Uncertainty
Radiated Emission (9 kHz ~ 30 MHz)	$\pm 1.15$ dB
Radiated Emission (30 MHz ~ 200 MHz)	$\pm 1.30$ dB
Radiated Emission (200 MHz ~ 1 GHz)	$\pm 1.30$ dB
Radiated Emission (1 GHz ~ 18 GHz)	$\pm 1.54$ dB
Radiated Emission (18 GHz ~ 40 GHz)	$\pm 2.52$ dB
Mains Conducted Emission	$\pm 1.65$ dB



### 3. General Product Information

#### 3.1 Product Function and Intended Use

The EUT is a Wireless Controller. It contains a 2.4GHz compatible module enabling the user to communicate data through a Wireless interface.

For details refer to the User Guide, Data Sheet and Circuit Diagram.

#### 3.2 System Details and Ratings

##### Basic Information of EUT

Item	EUT information
Kind of Equipment/Test Item	Wireless Controller
Type Identification	CP001
FCC ID	B94-CP001

##### Technical Specification of EUT

Item	EUT information
Operating Frequency	2404 MHz ~ 2478 MHz
Channel Number	16
Operation Voltage	5Vdc
Modulation	GFSK
Maximum Output Power (mW)	2.94
Antenna Information	Refer to 5.1.1
Accessory Device	Refer to 4.4

### **3.3 Noise Generating and Noise Suppressing Parts**

Refer to the Circuit Diagram.

### **3.4 Submitted Documents**

- Circuit Diagram
- Instruction Manual
- Rating Label
- Technical Description

## 4. Test Set-up and Operation Modes

### 4.1 Principle of Configuration Selection

The test modes were adapted accordingly in reference to the instructions for use. During testing, Channel and Power Controlling Software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output expected by the customer and is going to be fixed on the firmware of the final end product.

#### Table for Parameters of Test Software Setting

Frequency (MHz)	Power Setting
2404	Default
2441	Default
2478	Default

### 4.2 Carrier Frequency and Channel

Channel	Freq. (MHz)	Channel	Freq. (MHz)
0	2404	8	2441
1	2407	9	2446
2	2412	10	2451
3	2417	11	2456
4	2422	12	2461
5	2427	13	2466
6	2432	14	2471
7	2436	15	2478

### 4.3 Test Operation and Test Software

Setup for testing: Test samples are provided with a modified firmware which makes it possible to control them through a button on the controller.

This software was running on the laptop computer connected to the EUT. It was used to enable the operation modes listed as below.

Test Software	None.
---------------	-------

The samples were used as follows:

A003085022-008 for radiated test

A003085022-006 for conducted test

Full test was applied on all test modes, but only worst case was shown.

EUT Configure Mode	Applicable To				Description
	Antenna Port Conducted Measurement	Radiated Spurious Emissions above 1 GHz	Radiated Spurious Emissions below 1 GHz	Mains Conducted Emission	
-	√	√	√	√	-

Note:

1. The EUT had been pre-tested on the positioned of each 3 axis. The worst case was found when position on Z-plane.
2. "-" means no effect.

#### Antenna Port Conducted Measurement

- Pre-Scan full test was applied on all test modes, but only worst case was shown.
- Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Available Frequency (MHz)	Tested Frequency (MHz)	Date Rate (Mbps)
-	2404 to 2478	2404, 2441, 2478	-

#### Radiated Spurious Emissions (Above 1 GHz)

- Pre-Scan full test was applied on all test modes, but only worst case was shown.
- Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Available Frequency (MHz)	Tested Frequency (MHz)	Date Rate (Mbps)
-	2404 to 2478	2404, 2441, 2478	-

#### Radiated Spurious Emissions (Below 1 GHz)

- Pre-Scan full test was applied on all test modes, but only worst case was shown.
- Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Available Frequency (MHz)	Tested Frequency (MHz)	Date Rate (Mbps)
-	2404 to 2478	2478	-

#### Mains Conducted Emission

- Pre-Scan full test was applied on all test modes, but only worst case was shown.
- Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Available Frequency (MHz)	Tested Frequency (MHz)	Date Rate (Mbps)
-	2404 to 2478	2478	-

**Test Condition**

Test Item	Ambient Temperature	Relative Humidity	Tested by
Conducted Measurement	23.7 °C	56.8 %	Stanislas Charles
Radiated Spurious Emissions above 1 GHz	24.5-26.5 °C	57-62 %	Eagle Tsai
Radiated Spurious Emissions below 1 GHz	24.5-26.5 °C	57-62 %	Eagle Tsai
Mains Conducted Emission	19.5 °C	61 %	Temo Chen

## 4.4 Special Accessories and Auxiliary Equipment

The product has been tested together with the following additional accessories:

**Accessory of EUT**


No.	Product	Brand	Model	Description
-	Li-ion polymer Battery	EVERPOWER TECHNOLOGY	PL603033	3.7 Vdc, 600 mAh
-	USB Cable	HYPERX	CP001	300 cm non-shielded cable w/o core
-	Convertible mobile clip	HYPERX	CP001	-

**Support Unit**


Radiated Test					
No.	Description	Brand	Model	S/N	Remark
A	USB Cable	HYPERX	CP001	-	300 cm shielded cable w/o core
1	Adaptor	Sony	AC-UUD12	-	-
Conducted Test					
-	Notebook	HP	TPN-C139	CND93662WT	-
Mains Conducted Test					
A	USB Cable	HYPERX	CP001	-	300 cm non-shielded cable w/o core
1	Adaptor	Sony	AC-UUD12	-	-

### 4.5 Test Setup Diagram

<Radiated Spurious Emissions mode>

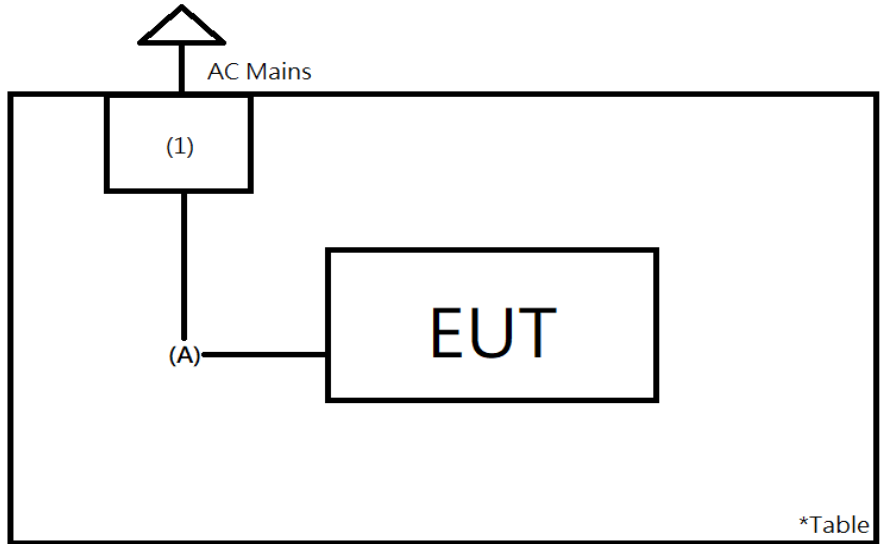

<Mains Conducted Emission mode>

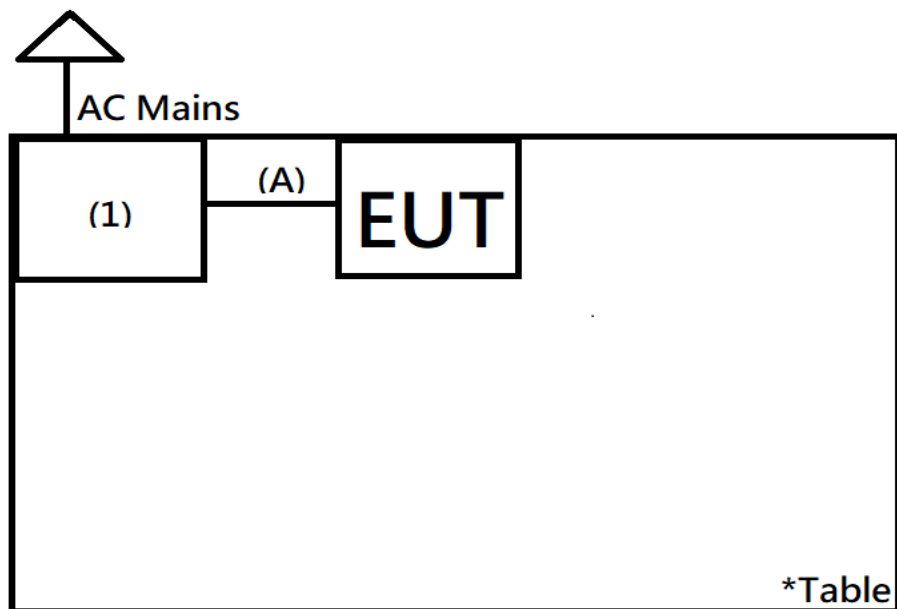

## 5. Test Results

### 5.1 Transmitter Requirement & Test Suites

#### 5.1.1 Antenna Requirement

**Requirement** Use of approved antennas only

According to the manufacturer declaration, the EUT has an antenna with a directional gain of 2.57 dBi. The antenna is a PCB antenna with no possibility of replacement with a non-approved antenna by the end-user. Therefore, the EUT is considered to comply with this provision.


Refer to EUT photo for details.

### 5.1.2 Peak Output Power

**Limit** 1 watt (30 dBm)

**Kind of Test Site** Shielded room

**Test Setup**

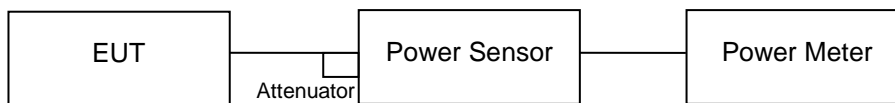

**Test Instruments**

Kind of Equipment	Manufacturer	Type	S/N	Calibration Date	Calibration Due Date	Test Date	
						From	Until
Power Meter	Anritsu	ML2495A	1901008	2021/3/24	2022/3/23	2021/7/13	2021/7/13
Power Sensor	Anritsu	MA2411B	1725269	2021/3/24	2022/3/23	2021/7/13	2021/7/13

**Test Procedures**

A peak power sensor was used on the output port of the EUT. A power meter was used to read the response of the peak power sensor. Record the power level.

Average power sensor was used to perform output power measurement, trigger and gating function of wide band power meter is enabled to measure max output power of TX on burst. Duty factor is not added to measured value.



**Test Result**
**Peak Output Power**
**<1Mbps>**

Channel	Channel Frequency	Peak Output Power		Limit (dBm)
	(MHz)	(dBm)	(mW)	
Low Channel	2404	4.69	2.94	30
Middle Channel	2441	4.60	2.88	30
High Channel	2478	4.35	2.72	30

**Average Power**
**<1Mbps>**


Channel	Channel Frequency	Average Power	
	(MHz)	(dBm)	(mW)
Low Channel	2404	4.66	2.92
Middle Channel	2441	4.57	2.86
High Channel	2478	4.31	2.70

### 5.1.3 6 dB Bandwidth and 99% Occupied Bandwidth

**Limit** The minimum 6 dB bandwidth shall be at least 500 kHz.

**Kind of Test Site** Shielded room

#### Test Setup

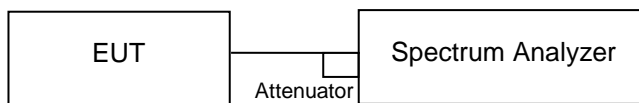

#### Test Instruments

Kind of Equipment	Manufacturer	Type	S/N	Calibration Date	Calibration Due Date	Test Date	
						From	Until
Spectrum Analyzer	R&S	FSV40	101512	2021/1/29	2022/1/28	2021/7/15	2021/7/15

#### Test Procedure

- a. Set resolution bandwidth (RBW) = 100 kHz
- b. Set the video bandwidth (VBW)  $\geq 3 \times$  RBW, Detector = Peak.
- c. Trace mode = max hold.
- d. Sweep = auto couple.
- e. Measure the maximum width of the emission that is constrained by the frequencies associated with the two amplitude points (upper and lower) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.
- f. For 99% occupied bandwidth measurement, the transmitter output was connected to the spectrum analyzer through an attenuator. The bandwidth of the fundamental frequency was measured by spectrum analyzer with resolution bandwidth in the range of 1% to 5% of the anticipated emission bandwidth, and a video bandwidth at least 3x the resolution bandwidth and set the detector to PEAK. The width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5% of the total mean power of a given emission.

#### Test Results


Please refer to Appendix A.

### 5.1.4 Power Spectral Density

**Limit**

The power spectral density shall not be greater than 8 dBm in any 3 kHz band.

**Kind of Test Site**                      Shielded room

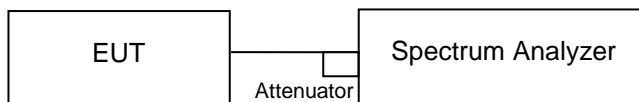**Test Setup**

**Test Instruments**

Kind of Equipment	Manufacturer	Type	S/N	Calibration Date	Calibration Due Date	Test Date	
						From	Until
Spectrum Analyzer	R&S	FSV40	101512	2021/1/29	2022/1/28	2021/7/15	2021/7/15

**Test Procedure**

- Set analyzer center frequency to DTS channel center frequency.
- Set the span to 1.5 times the DTS bandwidth.
- Set the RBW to:  $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$ .
- Set the VBW  $\geq 3 \times \text{RBW}$ .
- Detector = peak.
- Sweep time = auto couple.
- Trace mode = max hold.
- Allow trace to fully stabilize.
- Use the peak marker function to determine the maximum amplitude level within the RBW.

**Test Results**

Please refer to Appendix A.


## 5.1.5 Conducted Spurious Emissions and Frequency Band Edges Measured in 100kHz Bandwidth

### Limit

20 dB (below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power.)

**Kind of Test Site**                      Shielded room

### Test Setup

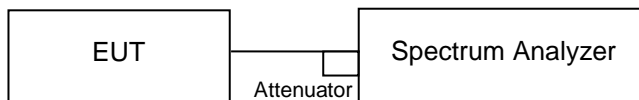

### Test Instruments

Kind of Equipment	Manufacturer	Type	S/N	Calibration Date	Calibration Due Date	Test Date	
						From	Until
Spectrum Analyzer	R&S	FSV40	101512	2021/1/29	2022/1/28	2021/7/15	2021/7/15

### Test Procedure

Measurement procedure REF

1. Set the RBW = 100 kHz.
2. Set the VBW  $\geq$  300 kHz.
3. Detector = peak.
4. Sweep time = auto couple.
5. Trace mode = max hold.
6. Allow trace to fully stabilize.
7. Use the peak marker function to determine the maximum power level in any 100 kHz band segment within the fundamental EBW.

Measurement procedure OOBE

1. Set RBW = 100 kHz.
2. Set VBW  $\geq$  300 kHz.
3. Detector = peak.
4. Sweep = auto couple.
5. Trace Mode = max hold.
6. Allow trace to fully stabilize.
7. Use the peak marker function to determine the maximum amplitude level.

### Test Results

Please refer to Appendix A.

## 5.1.6 Radiated Spurious Emissions and Band Edges

### Limit


Radiated emissions which fall in the restricted bands, as defined in §15.205(a), must comply with the radiated emission limits specified in §15.209(a).

Emissions radiated outside the restricted and authorized frequency bands must either comply with the radiated emission limits specified for the restricted bands or in §15.247(d).


**Kind of Test Site**                      3m Semi-Anechoic Chamber

### Test Setup


**<Radiated Emissions below 30 MHz>**

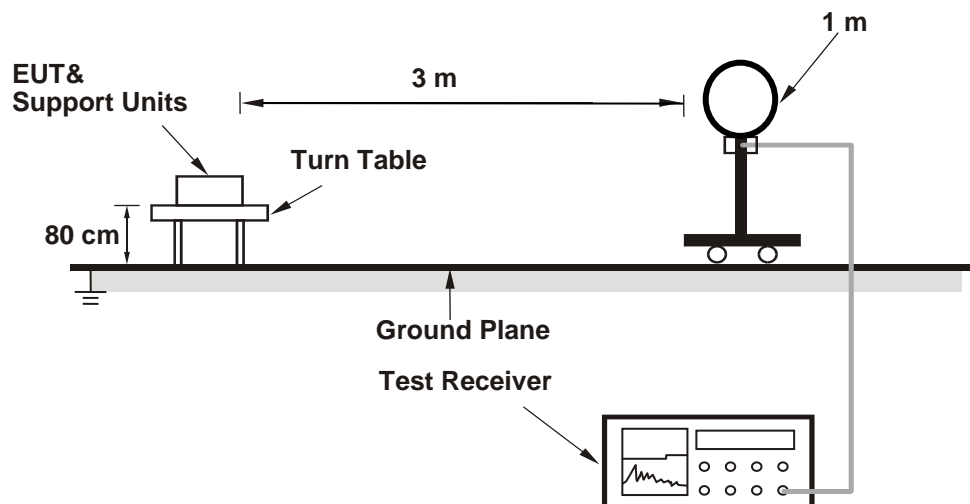

**<Radiated Emissions 30 MHz to 1 GHz>**

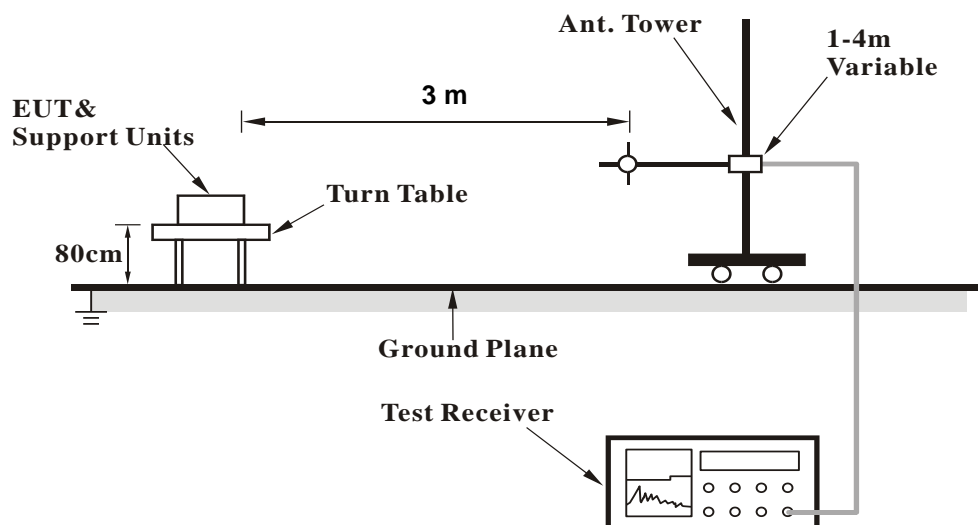

## &lt;Radiated Emissions above 1 GHz&gt;

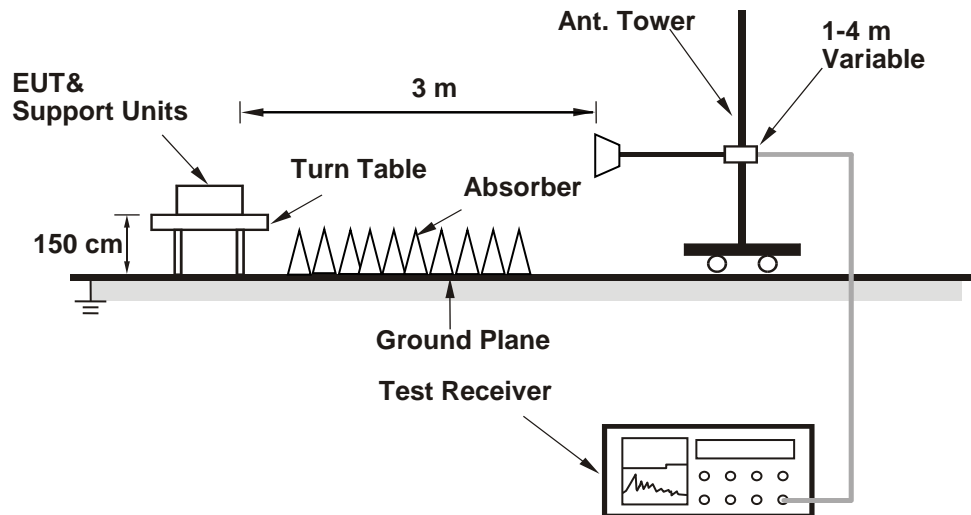

For the actual test configuration, please refer to the attached file (Test Setup Photo).

**Test Instruments**

Kind of Equipment	Manufacturer	Type	S/N	Calibration Date	Calibration Due Date
Signal Analyzer	R&S	FSV40	101508	2021/3/16	2022/3/15
Receiver	R&S	ESR7	102109	2021/3/16	2022/3/15
Bilog Antenna	SCHWARZBECK	VULB-9168	00951	2021/2/18	2022/2/17
Horn Antenna	ETS-Lindgren	3117	00218930	2020/12/1	2021/11/30
LF-AMP	Agilent	8447D	2944A10772	2021/2/18	2022/2/17
HF-AMP + AC source	EMCI	EMC051845SE	980633	2021/2/9	2022/2/8
HF-AMP + AC source	EMCI	EMC184045SE	980657	2021/2/1	2022/1/31
Horn Antenna	SCHWARZBECK	BBHA 9170	00887	2021/4/8	2022/4/7
Microwave Cable	HUBER+SUHNER	SUCOFLEX 104EA	800056/4EA	2021/3/17	2022/3/16
Microwave Cable	HUBER+SUHNER	SUCOFLEX 104	804680/4	2021/3/17	2022/3/16
Microwave Cable	HUBER+SUHNER	SUCOFLEX 104	MY37202/4	2021/3/17	2022/3/16
Microwave Cable	HUBER+SUHNER	SUCOFLEX 102EA	800898/2EA	2021/4/16	2022/4/15
Microwave Cable	HUBER+SUHNER	SUCOFLEX 102EA	800901/2EA	2021/4/16	2022/4/15
Microwave Cable	HUBER+SUHNER	SUCOFLEX 102EA	801027/2EA	2021/4/16	2022/4/15
Loop Antenna	Chance Most	EMCILPA600 +calibration	287	2021/1/15	2022/1/14

**Test Procedures****For Radiated Emissions below 30 MHz**

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter chamber room. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. Parallel (OPEN), perpendicular (CLOSE), and ground-parallel (GROUND) orientations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Quasi-Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.

## Note:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 9 kHz at frequency below 30 MHz.
2. All modes of operation were investigated and the worst-case emissions are reported.

**For Radiated Emissions above 30 MHz**

- a. The EUT was placed on the top of a rotating table 0.8 meters (for 30 MHz ~ 1 GHz) / 1.5 meters (for above 1 GHz) above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1 GHz.
- f. The test-receiver system was set to peak and average detected function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz. If the peak reading value also meets average limit, measurement with the average detector is unnecessary.

## Note:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120 kHz for Quasi-peak detection (QP) or Peak detection (PK) at frequency below 1 GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz for Peak detection (PK) at frequency above 1 GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is  $\geq 1/T$  (Duty cycle < 98 %) or 10 Hz (Duty cycle  $\geq 98$  %) for Average detection (AV) at frequency above 1 GHz.
4. All modes of operation were investigated and the worst-case emissions are reported.
5. The Radiated Emissions testing was performed in the X(E1), Y(H) and Z(E2) axis orientation. The worst-case Axis orientation is recorded in this test report.



**Prüfbericht - Nr.:**      **CN21X3RU(P15C-SRD) 001**  
*Test Report No.*

**Seite 25 von 27**  
*Page 25 of 27*

**Test Results**

Factor (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)  
Level (dBuV/m) = Reading (dBuV) + Factor (dB/m)

Please refer to Appendix B.


## 5.2 Mains Emission

### 5.2.1 Mains Conducted Emission

**Limit**

Mains Conducted Emission as defined in §15.207 must comply with the mains conducted emission limits.

**Kind of Test Site**                      Shielded room

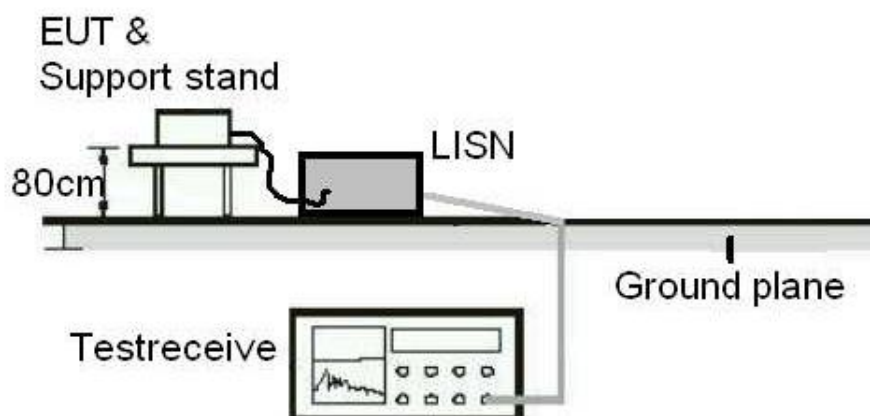**Test Setup**

**Test Instruments**

Kind of Equipment	Manufacturer	Type	S/N	Calibration Date	Calibration Due Date
TWO-LINE V-NETWORK	R&S	ENV216	1816064	2020/9/10	2021/9/9
EMI Test Receiver	R&S	ESCI	1816063	2020/11/17	2021/11/16
RF Cable	N/A	N/A	EMC-003	2020/11/15	2021/11/14

### Test Procedures

- a. The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/50 uH of coupling impedance for the measuring instrument.
- b. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- c. The frequency range from 150 kHz to 30 MHz was searched. Emission levels under (Limit – 20 dB) was not recorded.

Note: The resolution bandwidth and video bandwidth of test receiver is 9 kHz for quasi-peak detection (QP) and average detection (AV) at frequency 0.15 MHz – 30 MHz.


### Test Results

Please refer to Appendix B.

## Appendix A: Test Results of Conducted Test


### Test Result of 6 dB Bandwidth

Channel	Channel Frequency (MHz)	6 dB Bandwidth (kHz)	Limit (kHz)	Result
Low Channel	2404	1388.61	> 500	Pass
Middle Channel	2441	1268.73	> 500	Pass
High Channel	2478	769.23	> 500	Pass

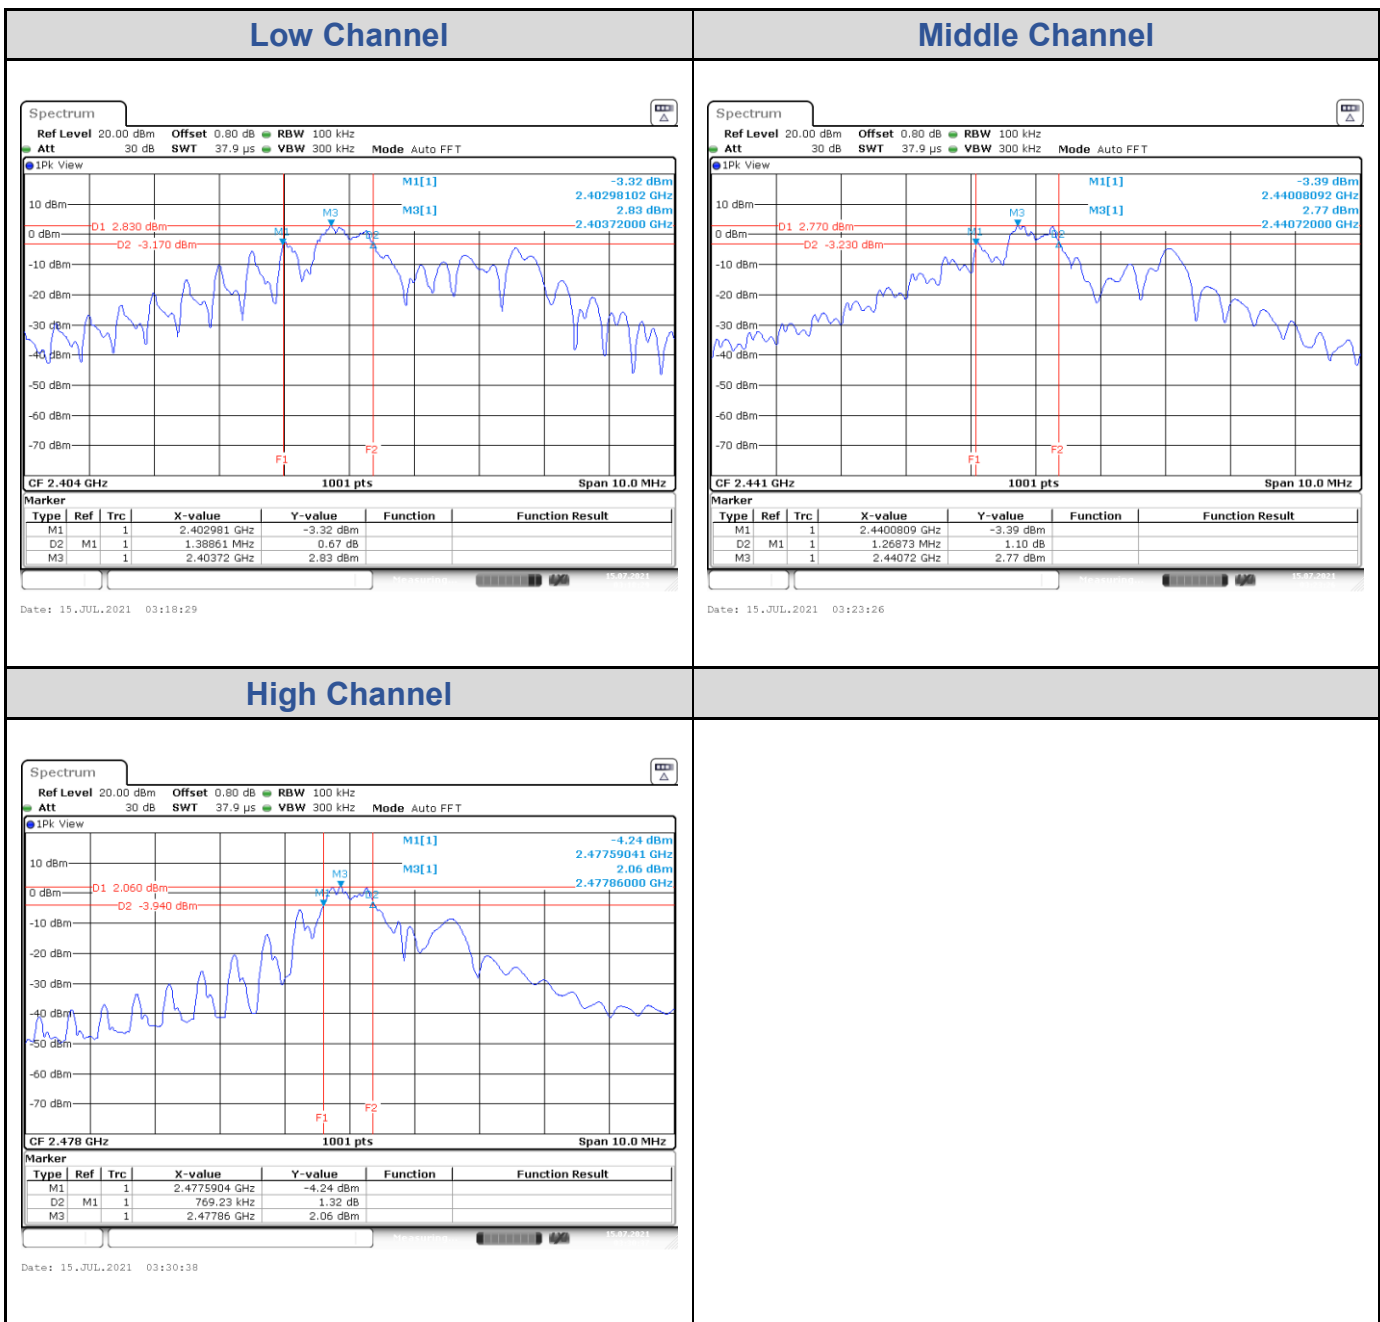


### Test Result of 99% Occupied Bandwidth

Channel	Channel Frequency (MHz)	99% Bandwidth (MHz)
Low Channel	2404	5.245
Middle Channel	2441	4.196
High Channel	2478	3.057

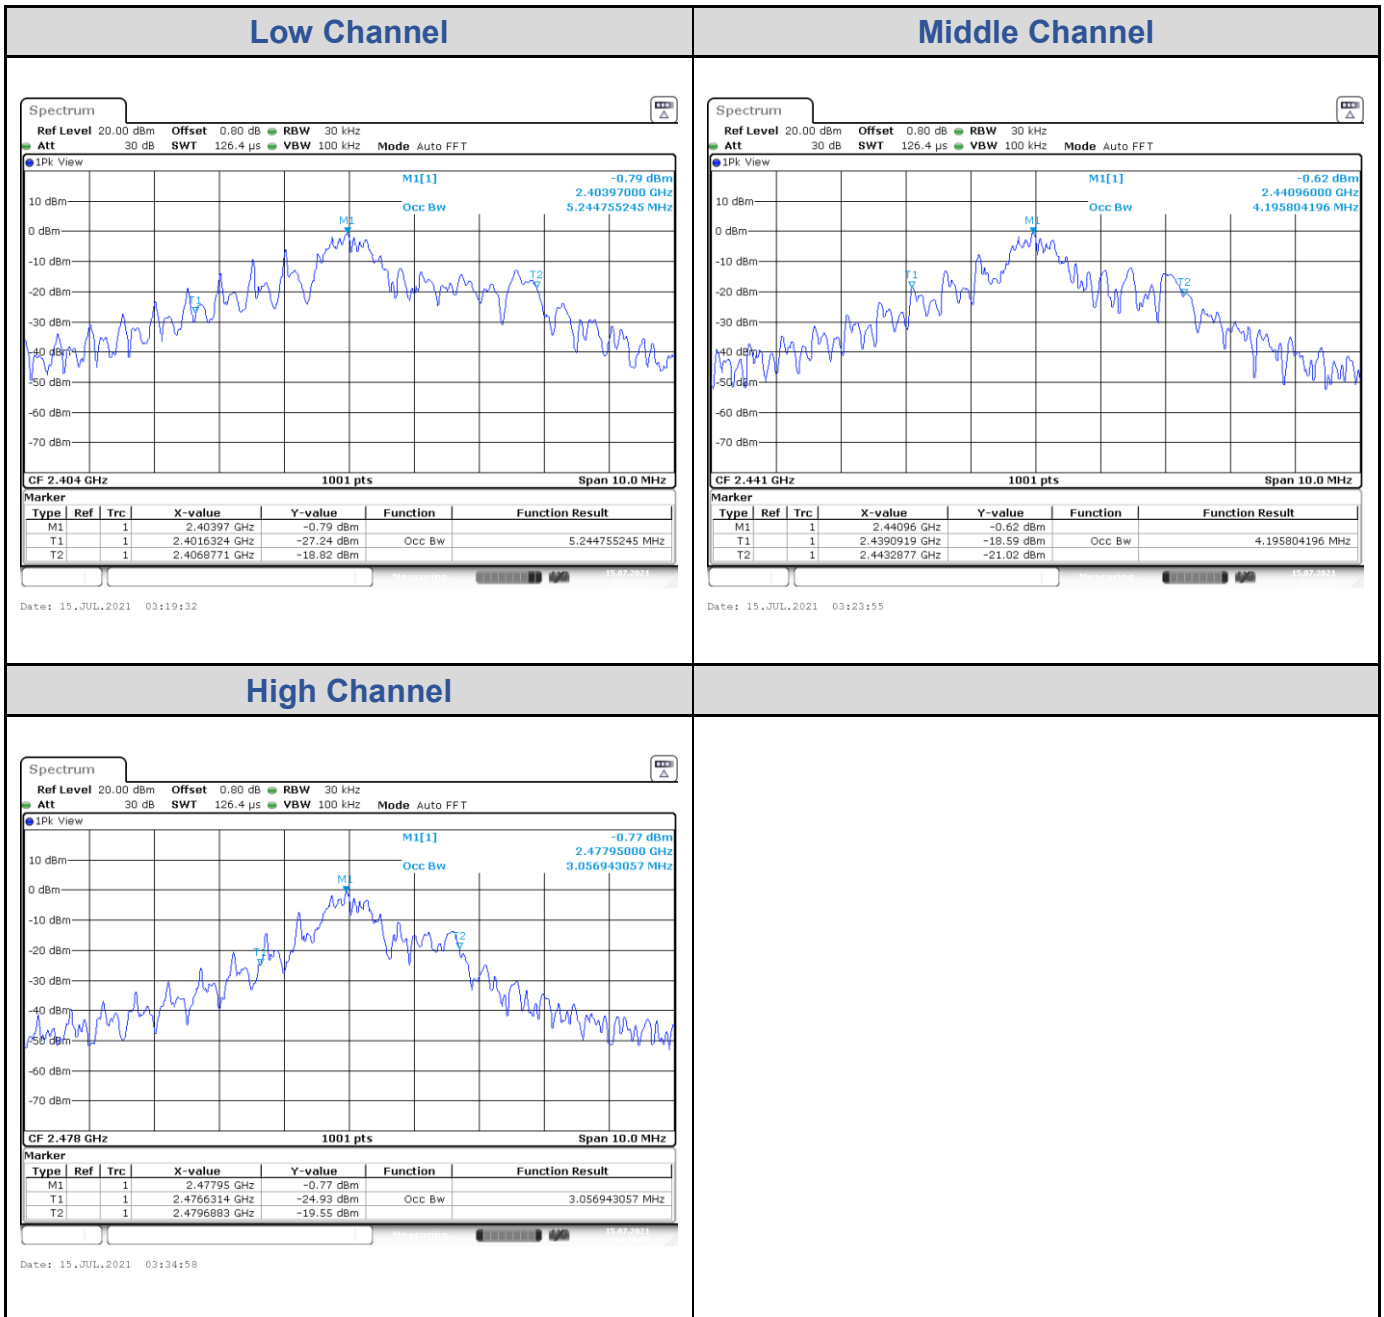


### Test Result of Power Spectral Density


Channel	Channel Frequency (MHz)	Power Density (dBm/3kHz)	Limit (dBm/3kHz)	Result
Low Channel	2404	-5.42	8	Pass
Middle Channel	2441	-5.20	8	Pass
High Channel	2478	-5.20	8	Pass

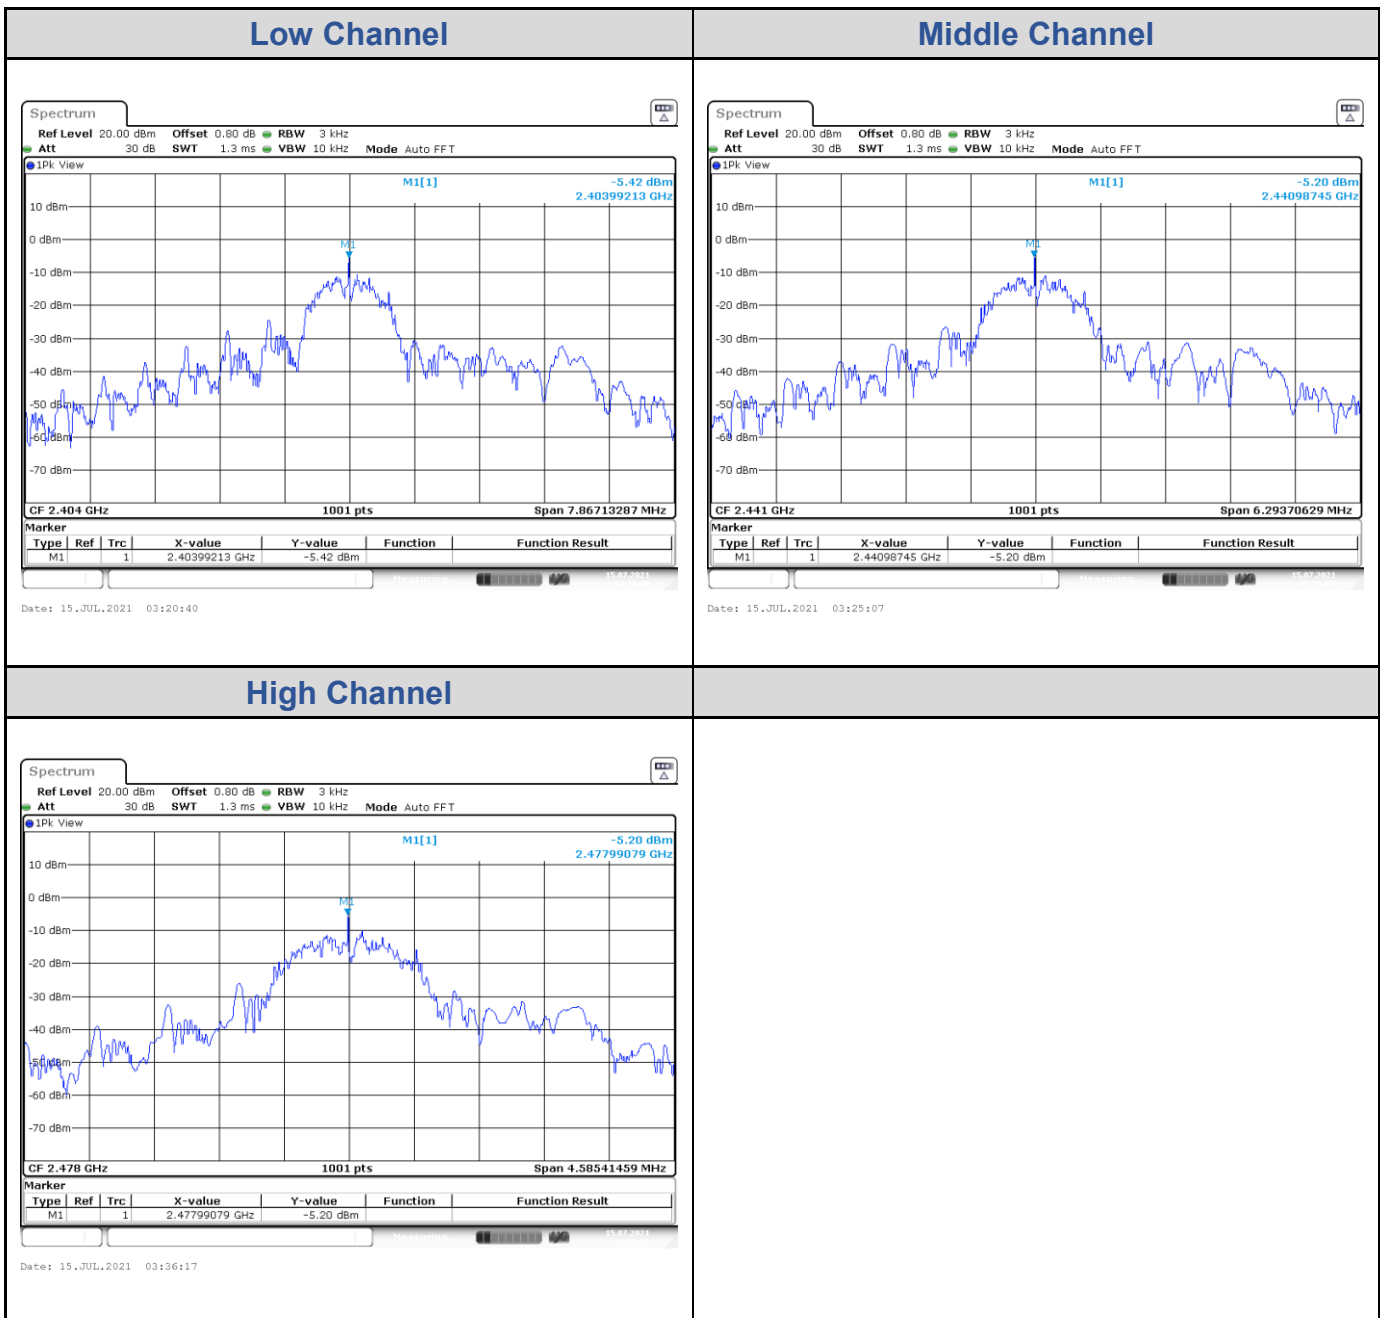

Test Result of Conducted Spurious Emissions, Tx Mode

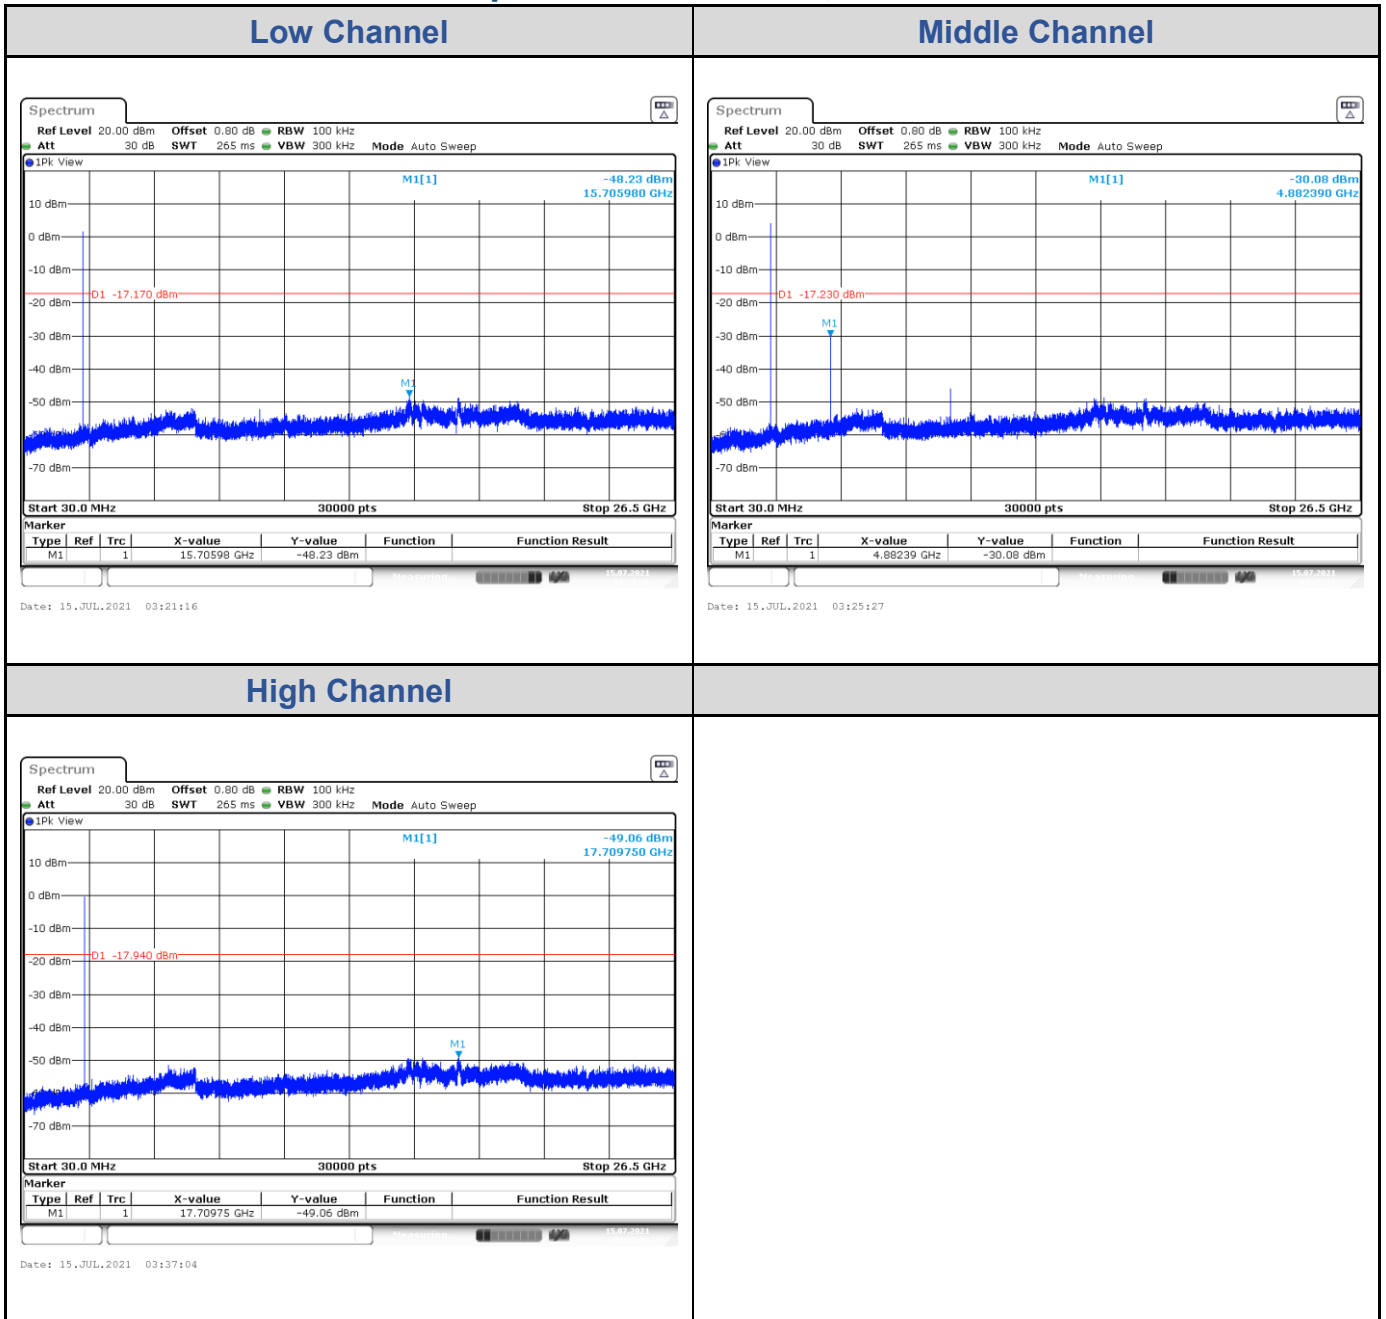


Test Result of Conducted Band Edge, Tx Mode

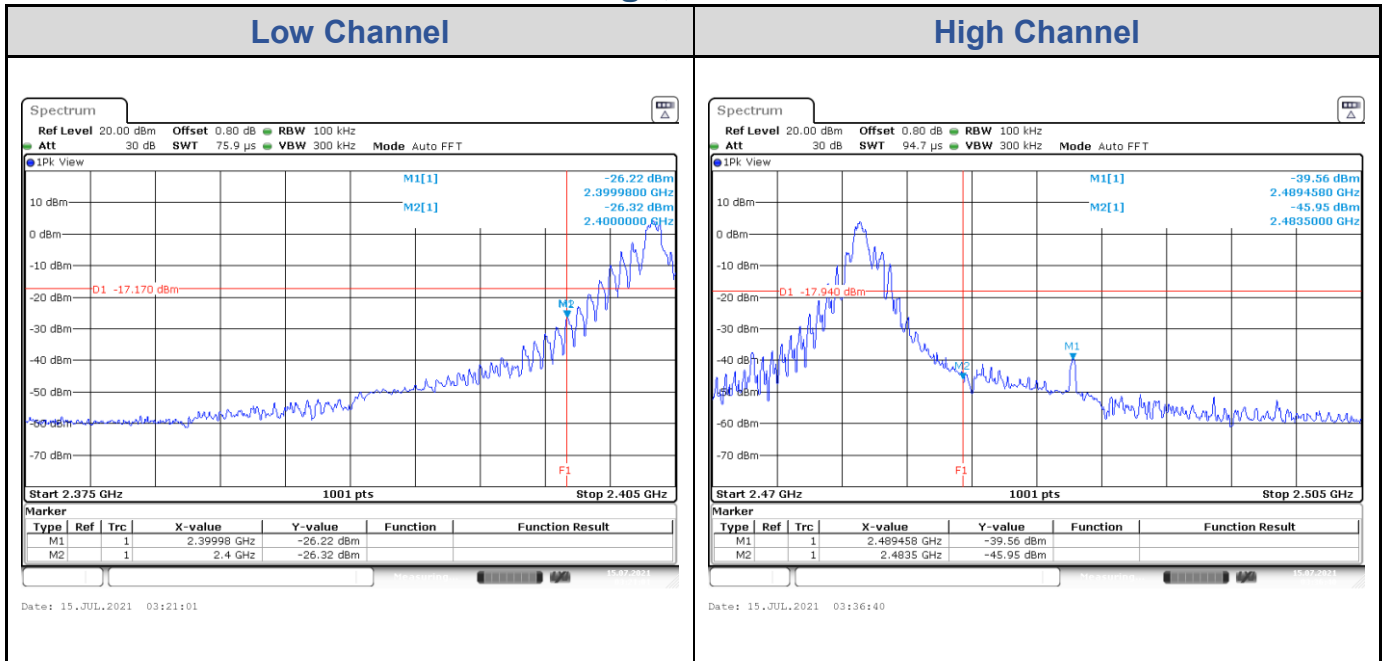



# Appendix B: Test Results of Radiated Spurious Emissions & Mains Conducted Emission Test



## Band Edges

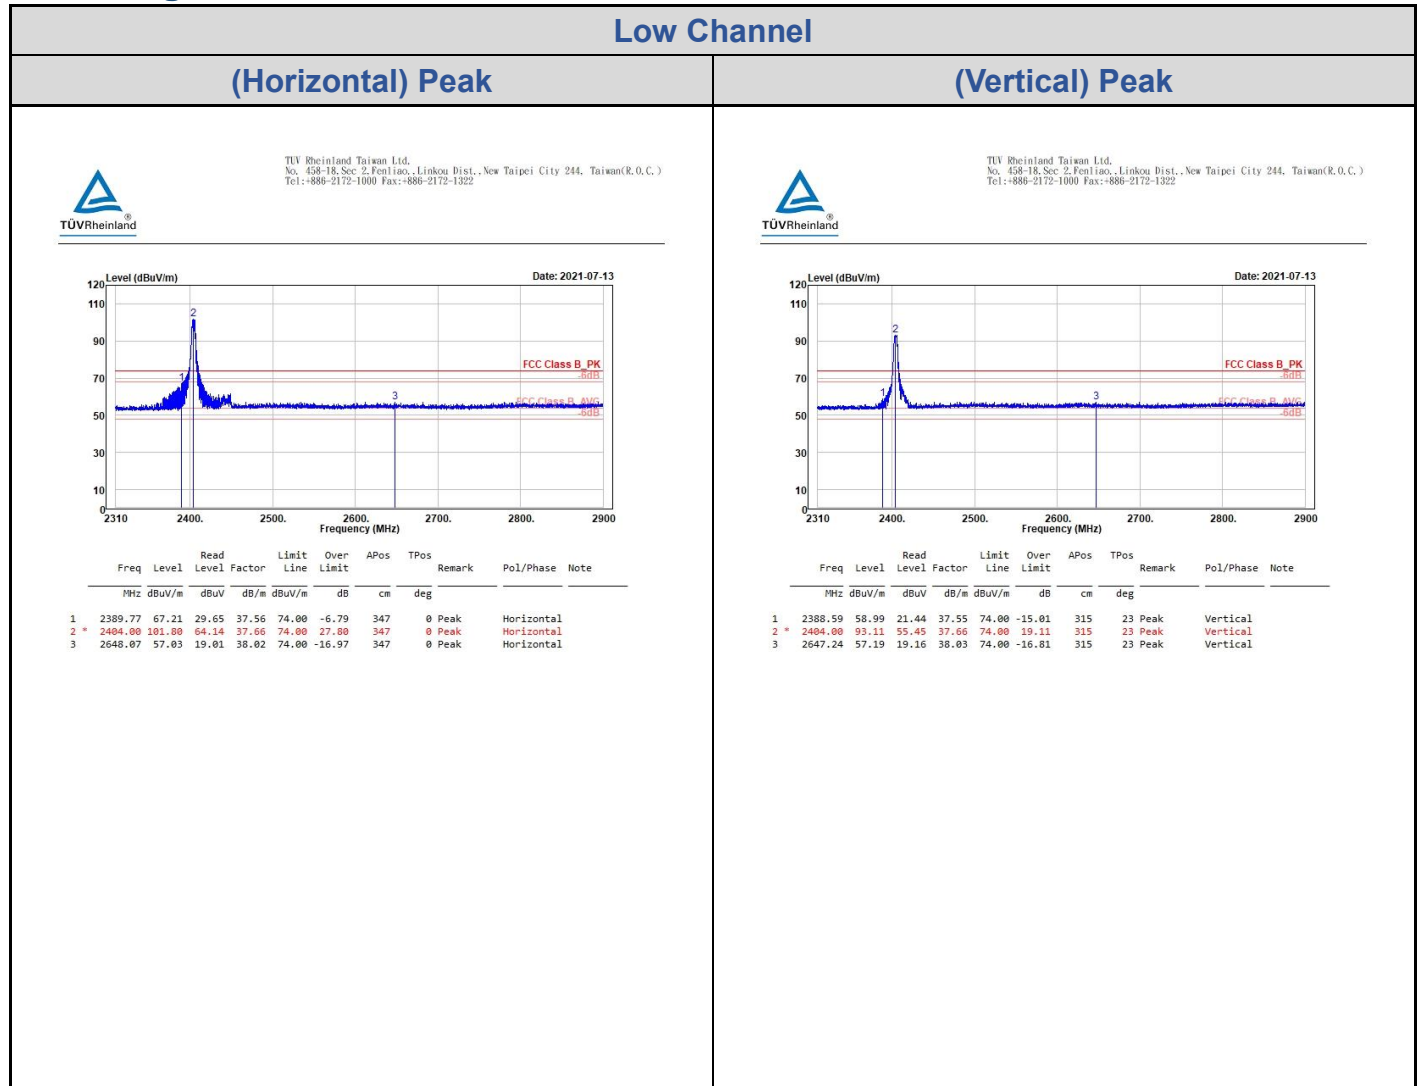

Low Channel

(Horizontal) Average

(Vertical) Average

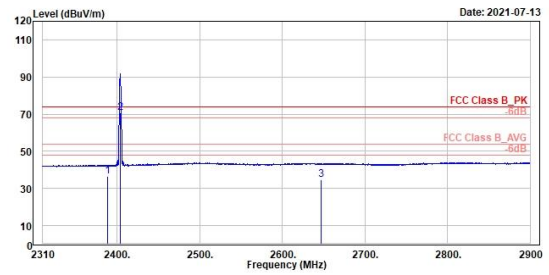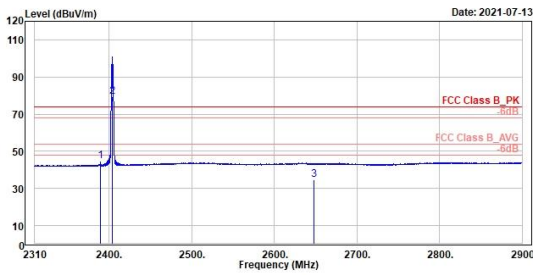



1	2	3									
Freq	Level	Read	Level	Factor	Limit	Over	APos	TPos	Remark	Pol/Phase	Note
MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	dB	cm	deg			
2389.77	44.62	7.06	37.56	54.00	-9.38	347	0	Average	Horizontal	CF	
2404.00	79.21	41.55	37.66	54.00	25.21	347	0	Average	Horizontal	CF	
2648.07	34.60	-3.42	38.02	54.00	-19.40	347	0	Average	Horizontal	CF	

1	2	3									
Freq	Level	Read	Level	Factor	Limit	Over	APos	TPos	Remark	Pol/Phase	Note
MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	dB	cm	deg			
2388.59	36.40	-1.15	37.55	54.00	-17.60	315	23	Average	Vertical	CF	
2404.00	70.52	32.66	37.66	54.00	16.52	315	23	Average	Vertical	CF	
2647.24	34.60	-3.43	38.03	54.00	-19.40	315	23	Average	Vertical	CF	

**Middle Channel**

**(Horizontal) Peak**

**(Vertical) Peak**

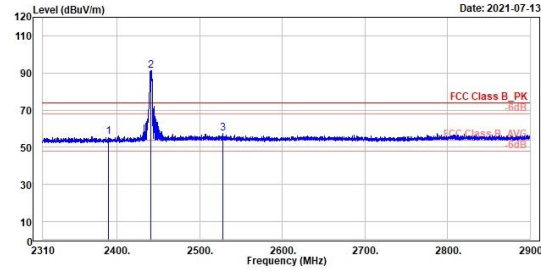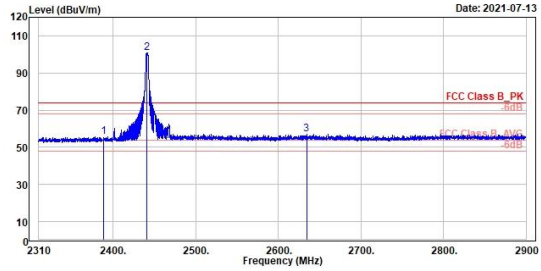

Peak	Freq	Level	Read	Level	Factor	Limit	Over	Apos	TPos	Remark	Pol/Phase	Note
	MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	dB	cm	deg			
1	2388.82	55.79	18.24	37.55	74.00	-18.21	376			4 Peak	Horizontal	
2 *	2441.00	100.90	62.97	37.93	74.00	26.90	376			4 Peak	Horizontal	
3	2634.26	57.23	19.19	38.04	74.00	-16.77	376			4 Peak	Horizontal	

Peak	Freq	Level	Read	Level	Factor	Limit	Over	Apos	TPos	Remark	Pol/Phase	Note
	MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	dB	cm	deg			
1	2389.41	55.61	18.05	37.56	74.00	-18.39	265	123		Peak	Vertical	
2 *	2441.00	91.33	53.40	37.93	74.00	17.33	265	123		Peak	Vertical	
3	2527.71	57.38	19.21	38.17	74.00	-16.62	265	123		Peak	Vertical	


Middle Channel

(Horizontal) Average

(Vertical) Average




TÜV Rheinland Taiwan Ltd.  
No. 458-18, Sec 2, Penfiao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)  
Tel: +886-2172-1000 Fax: +886-2172-1322

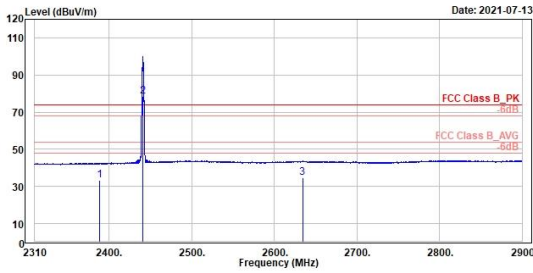

1	2	3								
Level	Level	Level								
Factor	Factor	Factor								
Limit	Limit	Limit								
Over	Over	Over								
Apos	Apos	Apos								
TPos	TPos	TPos								
Remark	Remark	Remark								
Pol/Phase	Pol/Phase	Pol/Phase								
Note	Note	Note								
2388.82	33.20	-4.35	37.55	54.00	-20.80	376	4	Average	Horizontal	CF
2441.00	78.31	40.38	37.93	54.00	24.31	376	4	Average	Horizontal	CF
2634.26	34.64	-3.40	38.04	54.00	-19.36	376	4	Average	Horizontal	CF



TÜV Rheinland Taiwan Ltd.  
No. 458-18, Sec 2, Penfiao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)  
Tel: +886-2172-1000 Fax: +886-2172-1322

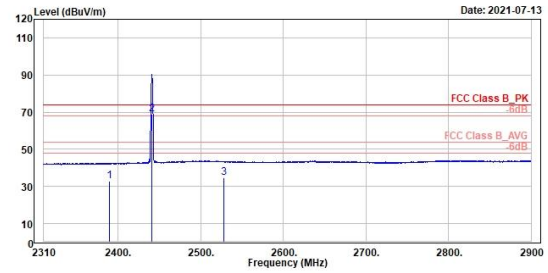

1	2	3								
Level	Level	Level								
Factor	Factor	Factor								
Limit	Limit	Limit								
Over	Over	Over								
Apos	Apos	Apos								
TPos	TPos	TPos								
Remark	Remark	Remark								
Pol/Phase	Pol/Phase	Pol/Phase								
Note	Note	Note								
2389.41	33.02	-4.54	37.56	54.00	-20.98	265	123	Average	Vertical	CF
2441.00	68.74	30.81	37.93	54.00	14.74	265	123	Average	Vertical	CF
2527.71	34.79	-3.38	38.17	54.00	-19.21	265	123	Average	Vertical	CF


High Channel

(Horizontal) Peak

(Vertical) Peak




TUV Rheinland Taiwan Ltd.  
No. 458-18, Sec 2, Fenliiao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)  
Tel: +886-2172-1000 Fax: +886-2172-1322

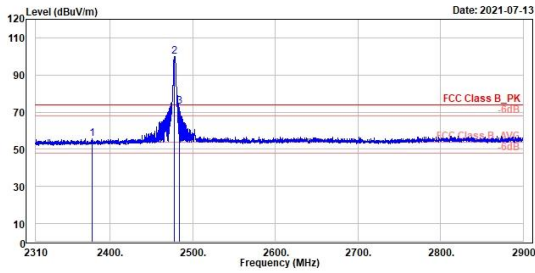

Peak	Freq	Level	Read	Level	Factor	Limit	Over	APos	TPos	Remark	Pol/Phase	Note
	MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	cm	deg			
1	2378.28	55.62	18.14	37.48	74.00	-18.38	328	10	Peak	Horizontal		
2 *	2478.00	99.89	61.76	38.13	74.00	25.89	328	18	Peak	Horizontal		
3 !	2483.58	73.05	34.89	38.16	74.00	-0.95	328	10	Peak	Horizontal		



TUV Rheinland Taiwan Ltd.  
No. 458-18, Sec 2, Fenliiao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)  
Tel: +886-2172-1000 Fax: +886-2172-1322

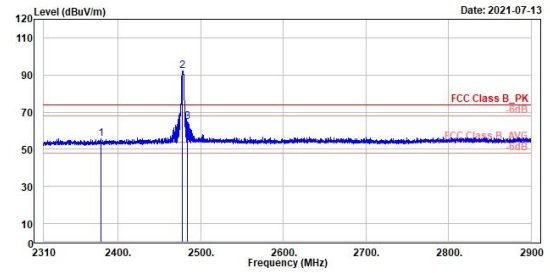

Peak	Freq	Level	Read	Level	Factor	Limit	Over	APos	TPos	Remark	Pol/Phase	Note
	MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	cm	deg			
1	2379.27	55.69	18.20	37.49	74.00	-18.31	386	304	Peak	Vertical		
2 *	2478.00	92.38	54.17	38.13	74.00	18.38	386	304	Peak	Vertical		
3	2484.17	64.95	26.78	38.17	74.00	-9.05	386	304	Peak	Vertical		



**High Channel**

**(Horizontal) Average**

**(Vertical) Average**

TÜVRheinland  
TUV Rheinland Taiwan Ltd.  
No. 458-18, Sec 2, Penfiao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)  
Tel: +886-2172-1000 Fax: +886-2172-1322

TÜVRheinland  
TUV Rheinland Taiwan Ltd.  
No. 458-18, Sec 2, Penfiao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)  
Tel: +886-2172-1000 Fax: +886-2172-1322

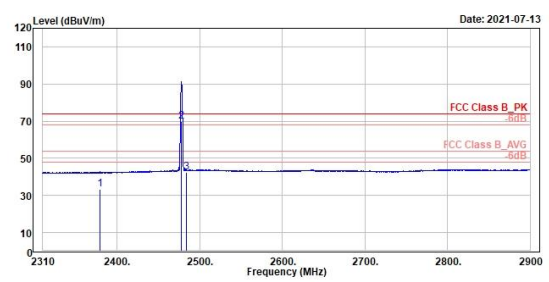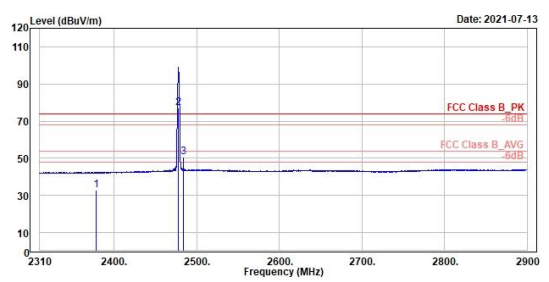

1	2 *	3 !
2378.20	2478.00	2483.58
Level	Level	Level
dBuV/m	dBuV/m	dBuV/m
33.03	77.30	50.46
-4.45	39.17	12.30
37.48	38.13	38.16
54.00	54.00	54.00
-20.97	23.30	-3.54
328	328	328
10	10	10
Average	Average	Average
Horizontal	Horizontal	Horizontal
CF	CF	CF



1	2 *	3
2379.27	2478.00	2484.17
Level	Level	Level
dBuV/m	dBuV/m	dBuV/m
33.10	69.71	42.36
-4.39	31.58	4.19
37.49	38.13	38.17
54.00	54.00	54.00
-20.90	15.71	-11.64
306	306	306
304	304	304
Average	Average	Average
Vertical	Vertical	Vertical
CF	CF	CF

Spurious Emissions, Tx Mode, 9kHz ~ 30MHz

High Channel

(Open) 9kHz~150kHz

(Open) 150kHz~30MHz

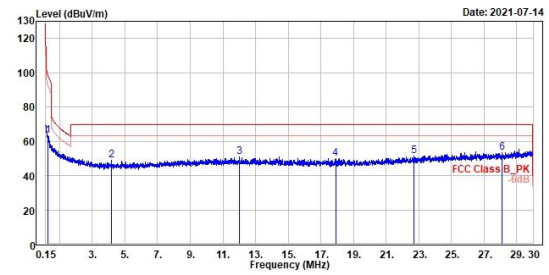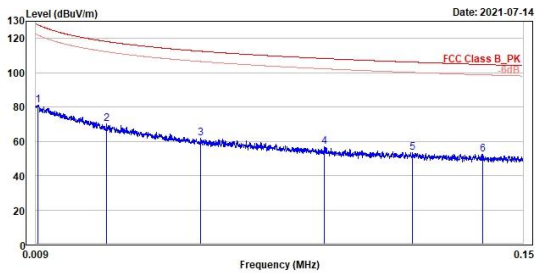

1	2	3	4	5	6
0.01	0.03	0.06	0.09	0.12	0.14
81.24	70.30	61.71	56.64	53.44	52.59
4.21	1.34	-1.25	-1.61	-3.05	-3.03
77.03	68.96	62.96	58.25	56.49	55.62
127.02	118.21	112.52	108.27	106.16	104.79
-46.58	-47.91	-50.81	-51.63	-52.72	-52.20
100	100	100	100	100	100
291	276	234	77	147	90
QP	QP	QP	QP	QP	QP
Open	Open	Open	Open	Open	Open

1	2	3	4	5	6
0.29	4.17	12.01	17.90	22.73	28.09
63.31	49.15	50.83	49.99	51.42	53.51
14.35	12.56	12.80	12.38	12.69	12.28
48.96	36.59	38.03	37.61	38.73	41.23
98.26	20.35	69.50	69.50	69.50	69.50
-34.95	-20.35	-18.67	-19.51	-18.08	-15.99
100	100	100	100	100	100
336	265	103	327	44	12
QP	QP	QP	QP	QP	QP
Open	Open	Open	Open	Open	Open


High Channel

(Close) 9kHz~150kHz

(Close) 150kHz~30MHz




TUV Rheinland Taiwan Ltd.  
No. 458-18, Sec 2, Fenliao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)  
Tel: +886-2172-1000 Fax: +886-2172-1322

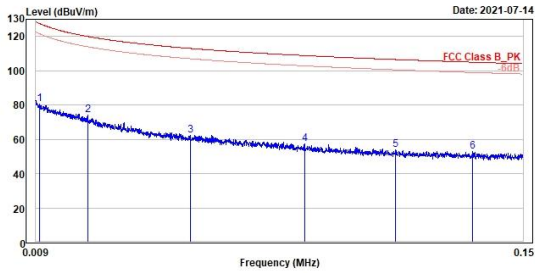

1	2	3	4	5	6
0.01	0.02	0.05	0.09	0.11	0.14
80.41	74.00	62.38	57.13	53.76	52.88
3.70	2.87	-0.98	-1.88	-2.94	-2.86
76.71	71.13	63.36	59.01	56.70	55.74
127.52	119.97	112.99	108.83	106.53	104.96
-47.11	-45.97	-50.61	-51.70	-52.77	-52.00
100	100	100	100	100	100
316	81	81	111	227	184
QP	QP	QP	QP	QP	QP
Close	Close	Close	Close	Close	Close



TUV Rheinland Taiwan Ltd.  
No. 458-18, Sec 2, Fenliao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)  
Tel: +886-2172-1000 Fax: +886-2172-1322

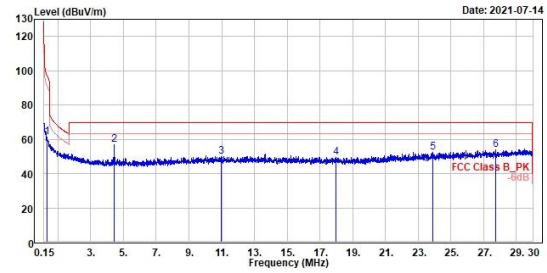

1	2	3	4	5	6
0.31	4.43	10.97	17.96	23.90	27.76
61.27	56.66	50.15	49.63	52.38	53.64
12.80	20.15	12.84	12.83	13.11	12.56
48.47	36.51	38.11	37.60	39.27	41.00
97.74	69.50	69.50	69.50	69.50	69.50
-36.47	-12.84	-19.35	-19.87	-17.12	-15.86
100	100	100	100	100	100
0	194	276	140	115	279
QP	QP	QP	QP	QP	QP
Close	Close	Close	Close	Close	Close



Spurious Emissions, Tx Mode, 30MHz ~ 1GHz


High Channel

(Horizontal)

(Vertical)




TUV Rheinland Taiwan Ltd.  
No. 458-18, Sec 2, Fenliao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)  
Tel: +886-2172-1000 Fax: +886-2172-1322

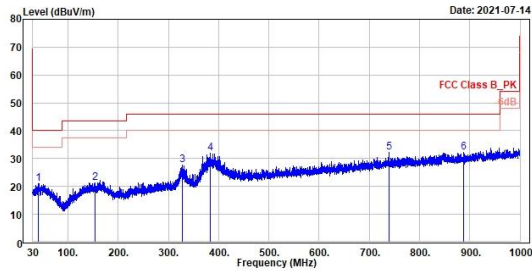

Peak	Freq (MHz)	Level (dBuV/m)	Read Level (dBuV)	Factor (dB/m)	Limit Line (dBuV/m)	Over Limit (dB)	APos (cm)	TPos (deg)	Remark	Pol/Phase	Note
1	40.67	20.92	29.16	-8.24	40.00	-19.08	200	91	QP	Horizontal	
2	153.38	21.26	28.75	-7.49	43.50	-22.24	200	30	QP	Horizontal	
3	327.69	27.57	33.34	-5.77	46.00	-18.43	100	262	QP	Horizontal	
4	383.37	31.81	36.35	-4.54	46.00	-14.19	100	297	QP	Horizontal	
5	738.88	32.25	31.17	1.08	46.00	-13.75	315	0	QP	Horizontal	
6	888.64	32.10	28.83	3.27	46.00	-13.90	200	161	QP	Horizontal	



TUV Rheinland Taiwan Ltd.  
No. 458-18, Sec 2, Fenliao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)  
Tel: +886-2172-1000 Fax: +886-2172-1322

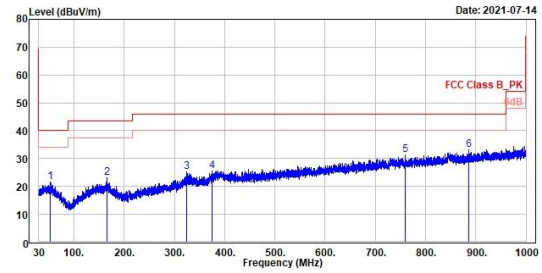

Peak	Freq (MHz)	Level (dBuV/m)	Read Level (dBuV)	Factor (dB/m)	Limit Line (dBuV/m)	Over Limit (dB)	APos (cm)	TPos (deg)	Remark	Pol/Phase	Note
1	52.50	21.64	29.25	-7.61	40.00	-18.36	100	184	QP	Vertical	
2	166.19	23.22	30.23	-7.01	43.50	-20.28	400	232	QP	Vertical	
3	324.40	25.11	31.00	-5.89	46.00	-20.89	200	102	QP	Vertical	
4	374.54	25.52	30.44	-4.92	46.00	-20.48	200	258	QP	Vertical	
5	760.12	31.48	30.06	1.42	46.00	-14.52	200	352	QP	Vertical	
6	885.83	33.07	29.87	3.20	46.00	-12.93	200	320	QP	Vertical	

Spurious Emissions, Tx Mode, 1GHz ~ 26.5GHz


Low Channel

(Horizontal)

(Vertical)




TÜV Rheinland Taiwan Ltd.  
No. 438-18, Sec. 2, Fenfiao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)  
Tel: +886-2172-1000 Fax: +886-2172-1322

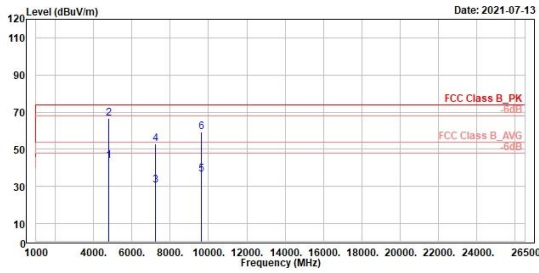

1	2	3	4	5	6
4888.00	43.81	53.58	-9.77	54.00	-10.19
4888.00	66.40	76.17	-9.77	74.00	-7.60
7212.00	30.45	37.70	-7.25	59.21	-28.76
7212.00	53.04	60.29	-7.25	81.80	-28.76
9616.00	36.58	41.48	-4.90	59.21	-22.63
9616.00	59.17	64.07	-4.90	81.80	-22.63



TÜV Rheinland Taiwan Ltd.  
No. 438-18, Sec. 2, Fenfiao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)  
Tel: +886-2172-1000 Fax: +886-2172-1322

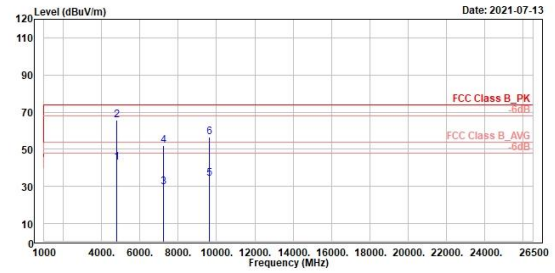

1	2	3	4	5	6
4888.00	43.89	52.86	-9.77	54.00	-10.91
4888.00	65.69	75.46	-9.77	74.00	-8.31
7212.00	29.56	36.81	-7.25	50.52	-20.96
7212.00	52.15	59.40	-7.25	73.11	-20.96
9616.00	34.13	39.03	-4.90	50.52	-16.39
9616.00	56.72	61.62	-4.90	73.11	-16.39


**Middle Channel**

**(Horizontal)**

**(Vertical)**




TÜV Rheinland Taiwan Ltd.  
No. 458-18, Sec 2, Fenfiao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)  
Tel: +886-2172-1000 Fax: +886-2172-1322

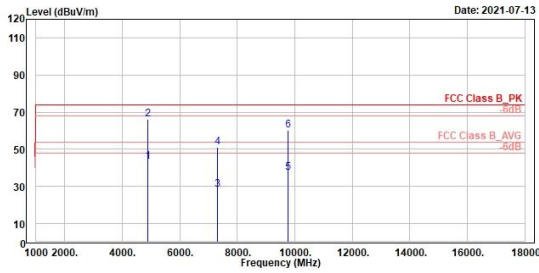

1	2	3	4	5	6
4882.00	43.50	53.16	-9.66	54.00	-10.50
4882.00	66.09	75.75	-9.66	74.00	-7.91
7323.00	28.45	35.73	-7.28	54.00	-25.55
7323.00	51.04	58.32	-7.28	74.00	-22.96
9764.00	37.42	42.02	-4.60	58.31	-20.89
9764.00	60.01	64.61	-4.60	80.90	-20.89



TÜV Rheinland Taiwan Ltd.  
No. 458-18, Sec 2, Fenfiao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)  
Tel: +886-2172-1000 Fax: +886-2172-1322

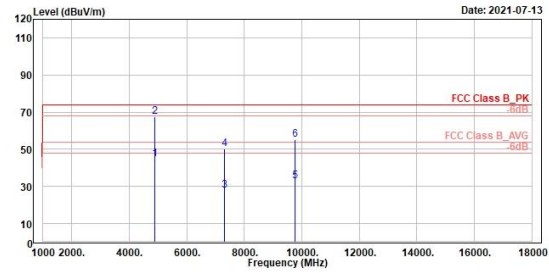

1	2	3	4	5	6
4882.00	44.72	54.38	-9.66	54.00	-9.28
4882.00	67.31	76.97	-9.66	74.00	-6.69
7323.00	27.63	34.91	-7.28	54.00	-26.37
7323.00	50.22	57.50	-7.28	74.00	-23.78
9764.00	32.75	37.35	-4.60	48.74	-15.99
9764.00	55.34	59.94	-4.60	71.33	-15.99


High Channel

(Horizontal)

(Vertical)




TUV Rheinland Taiwan Ltd.  
No. 458-18, Sec 2, Fenliao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)  
Tel: +886-2172-1000 Fax: +886-2172-1322

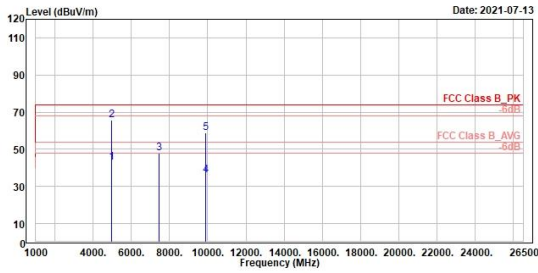

1	2	3	4	5						
Read Level	Read Level	Read Level	Read Level	Read Level						
Factor	Factor	Factor	Factor	Factor						
Limit Line	Limit Line	Limit Line	Limit Line	Limit Line						
Over Limit	Over Limit	Over Limit	Over Limit	Over Limit						
APos	APos	APos	APos	APos						
TPos	TPos	TPos	TPos	TPos						
Remark	Remark	Remark	Remark	Remark						
Pol/Phase	Pol/Phase	Pol/Phase	Pol/Phase	Pol/Phase						
Note	Note	Note	Note	Note						
4956.00	42.97	52.43	-9.46	54.00	-11.03	117	286	Average	Horizontal	CF
4956.00	65.56	75.02	-9.46	74.00	-8.44	117	286	Peak	Horizontal	
7434.00	47.75	55.01	-7.26	74.00	-26.25	100	101	Peak	Horizontal	
9912.00	36.17	40.54	-4.37	57.30	-21.13	100	84	Average	Horizontal	CF
9912.00	58.76	63.13	-4.37	79.89	-21.13	100	84	Peak	Horizontal	




TUV Rheinland Taiwan Ltd.  
No. 458-18, Sec 2, Fenliao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)  
Tel: +886-2172-1000 Fax: +886-2172-1322

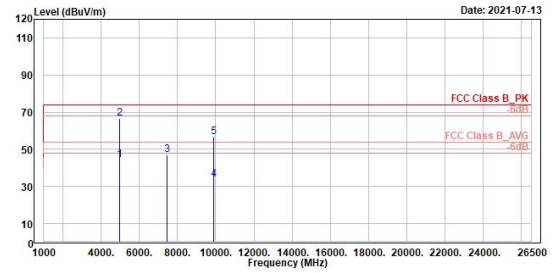

1	2	3	4	5						
Read Level	Read Level	Read Level	Read Level	Read Level						
Factor	Factor	Factor	Factor	Factor						
Limit Line	Limit Line	Limit Line	Limit Line	Limit Line						
Over Limit	Over Limit	Over Limit	Over Limit	Over Limit						
APos	APos	APos	APos	APos						
TPos	TPos	TPos	TPos	TPos						
Remark	Remark	Remark	Remark	Remark						
Pol/Phase	Pol/Phase	Pol/Phase	Pol/Phase	Pol/Phase						
Note	Note	Note	Note	Note						
4956.00	44.18	53.64	-9.46	54.00	-9.82	302	272	Average	Vertical	CF
4956.00	66.77	76.23	-9.46	74.00	-7.23	302	272	Peak	Vertical	
7434.00	46.78	54.04	-7.26	74.00	-27.22	100	45	Peak	Vertical	
9912.00	33.92	38.29	-4.37	49.71	-15.79	295	229	Average	Vertical	CF
9912.00	56.51	60.88	-4.37	72.30	-15.79	295	229	Peak	Vertical	

**Mains Conducted Emission, 150kHz ~ 30MHz**
**Worst Band**
**(Line)**
**(Neutral)**


TUV Rheinland Taiwan Ltd(New Taipei City Branch).  
 No. 458-19, Sec. 2, Fenliao Rd., Linkou Dist., New Taipei City 244  
 Tel:+886-2172-1000 Fax:+886-2172-1322

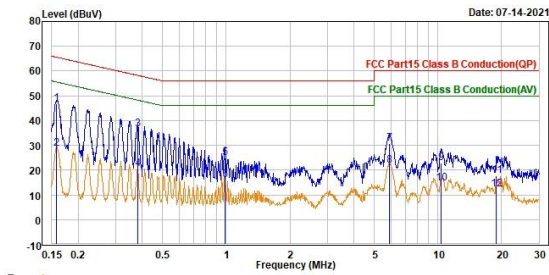


Trace: 1

	Freq	Read Level	Factor	Level	Limit Line	Over Limit	Remark	Pol/Phase	Note
	MHz	dBuV	dB	dBuV	dBuV	dB			
1	0.158	37.01	9.66	46.67	65.59	-18.92	QP	line1	
2	0.158	18.88	9.66	28.54	55.59	-27.05	Average	line1	
3	0.381	26.97	9.65	36.62	58.26	-21.64	QP	line1	
4	0.381	10.97	9.65	20.62	48.26	-27.64	Average	line1	
5	0.987	15.41	9.67	25.08	56.00	-30.92	QP	line1	
6	0.987	6.39	9.67	16.06	46.00	-29.94	Average	line1	
7	5.879	20.93	9.72	30.65	60.00	-29.35	QP	line1	
8	5.879	12.19	9.72	21.91	50.00	-28.09	Average	line1	
9	10.325	12.98	9.76	22.74	60.00	-37.26	QP	line1	
10	10.325	4.87	9.76	14.63	50.00	-35.37	Average	line1	
11	18.872	7.89	9.75	17.64	60.00	-42.36	QP	line1	
12	18.872	2.45	9.75	12.20	50.00	-37.80	Average	line1	



TUV Rheinland Taiwan Ltd(New Taipei City Branch).  
 No. 458-19, Sec. 2, Fenliao Rd., Linkou Dist., New Taipei City 244  
 Tel:+886-2172-1000 Fax:+886-2172-1322

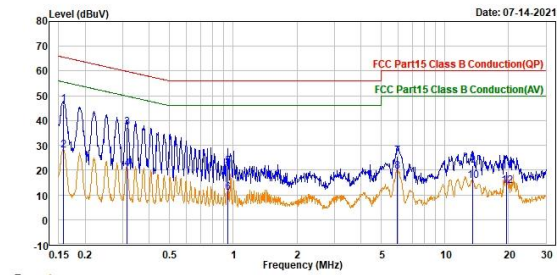

Trace: 1

	Freq	Read Level	Factor	Level	Limit Line	Over Limit	Remark	Pol/Phase	Note
	MHz	dBuV	dB	dBuV	dBuV	dB			
1	0.158	36.66	9.68	46.34	65.59	-19.25	QP	neutral	
2	0.158	18.32	9.68	28.00	55.59	-27.59	Average	neutral	
3	0.315	27.58	9.66	37.24	59.83	-22.59	QP	neutral	
4	0.315	10.96	9.66	20.62	49.83	-29.21	Average	neutral	
5	0.944	11.66	9.68	21.34	56.00	-34.66	QP	neutral	
6	0.944	1.31	9.68	10.99	46.00	-35.01	Average	neutral	
7	5.938	15.70	9.74	25.44	60.00	-34.56	QP	neutral	
8	5.938	9.70	9.74	19.44	50.00	-30.56	Average	neutral	
9	13.581	12.04	9.82	21.86	60.00	-38.14	QP	neutral	
10	13.581	6.00	9.82	15.82	50.00	-34.18	Average	neutral	
11	19.542	9.61	9.83	19.44	60.00	-40.56	QP	neutral	
12	19.542	3.75	9.83	13.58	50.00	-36.42	Average	neutral	