

#01_WLAN2.4GHz_802.11b 1Mbps_Edge 1_0mm_Ch6;Ant 1+2

Communication System: WLAN 2.4GHz; Frequency: 2437.0

Medium: HSL_2450_220526 Medium parameters used: $f = 2437.0$ MHz; $\sigma = 1.79$ S/m; $\epsilon_r = 38.9$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7695; ConvF(8.24, 8.24, 8.24); Calibrated: 2021-11-19
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1697; Calibrated: 2021-11-09
- Phantom: ELI V8.0 (20deg probe tilt); Serial: 2153; Section: Flat
- Measurement Software: cDASY6 V6.6.0.13926
- UID: WLAN, 10315-AAB
- MAIA: Area Scan: N/A; Zoom Scan: N/A

Area Scan (60.0 mm x 360.0 mm): Measurement Grid: 10.0 mm x 12.0 mm

SAR (1g) = 0.562 W/kg; SAR (10g) = 0.281 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.4 mm

Power Drift = 0.03 dB

SAR (1g) = 0.522 W/kg; SAR (10g) = 0.244 W/kg;


psAPD (1.0cm², sq) = 0 [W/m²]; psAPD (4.0cm², sq) = 0 [W/m²]

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.4 mm

Power Drift = 0.03 dB

SAR (1g) = 0.537 W/kg; SAR (10g) = 0.229 W/kg;

psAPD (1.0cm², sq) = 0 [W/m²]; psAPD (4.0cm², sq) = 0 [W/m²]

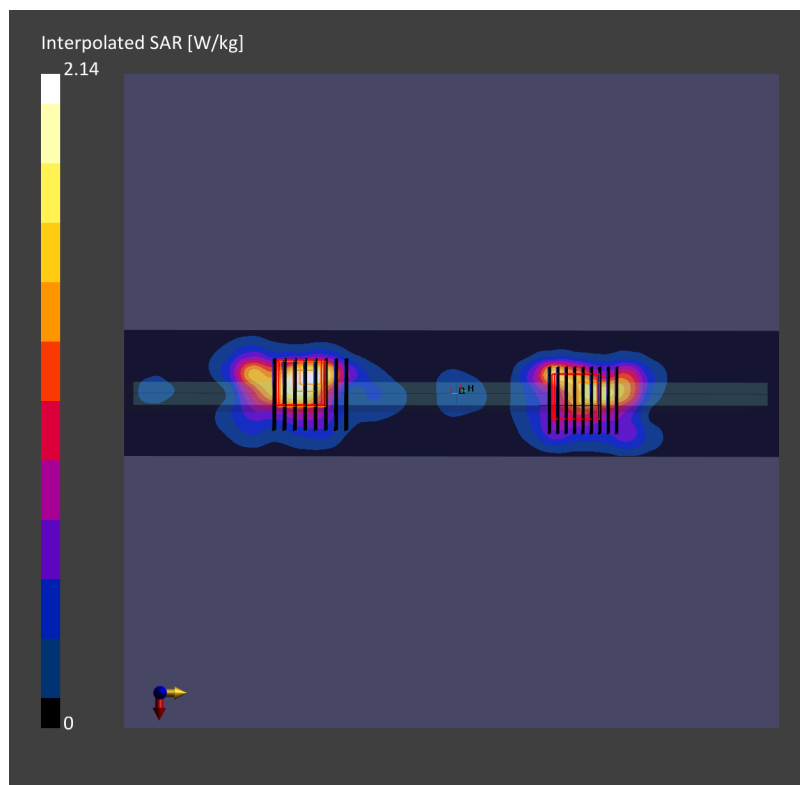

#02_WLAN5GHz_802.11a 6Mbps_Edge 1_0mm_Ch56;Ant 1+2

Communication System: WLAN 5GHz; Frequency: 5280.0

Medium: HSL_5G_220531 Medium parameters used: $f = 5280.0$ MHz; $\sigma = 4.65$ S/m; $\epsilon_r = 35.4$

Ambient Temperature: 23.3°C; Liquid Temperature: 22.3°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7695; ConvF(5.6, 5.6, 5.6); Calibrated: 2021-11-19
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1697; Calibrated: 2021-11-09
- Phantom: ELI V8.0 (20deg probe tilt); Serial: 2153; Section: Flat
- Measurement Software: cDASY6 V6.6.0.13926
- UID: WLAN, 10525-AAC
- MAIA: Area Scan: N/A; Zoom Scan: N/A

Area Scan (60.0 mm x 360.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.711 W/kg; SAR (10g) = 0.292 W/kg;

Zoom Scan (22.0 mm x 22.0 mm x 22.0 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm

Power Drift = -0.10 dB

SAR (1g) = 0.995 W/kg; SAR (10g) = 0.319 W/kg;


psAPD (1.0cm², sq) = 0 [W/m²]; psAPD (4.0cm², sq) = 0 [W/m²]

Zoom Scan (22.0 mm x 22.0 mm x 22.0 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm

Power Drift = -0.10 dB

SAR (1g) = 0.725 W/kg; SAR (10g) = 0.227 W/kg;

psAPD (1.0cm², sq) = 0 [W/m²]; psAPD (4.0cm², sq) = 0 [W/m²]

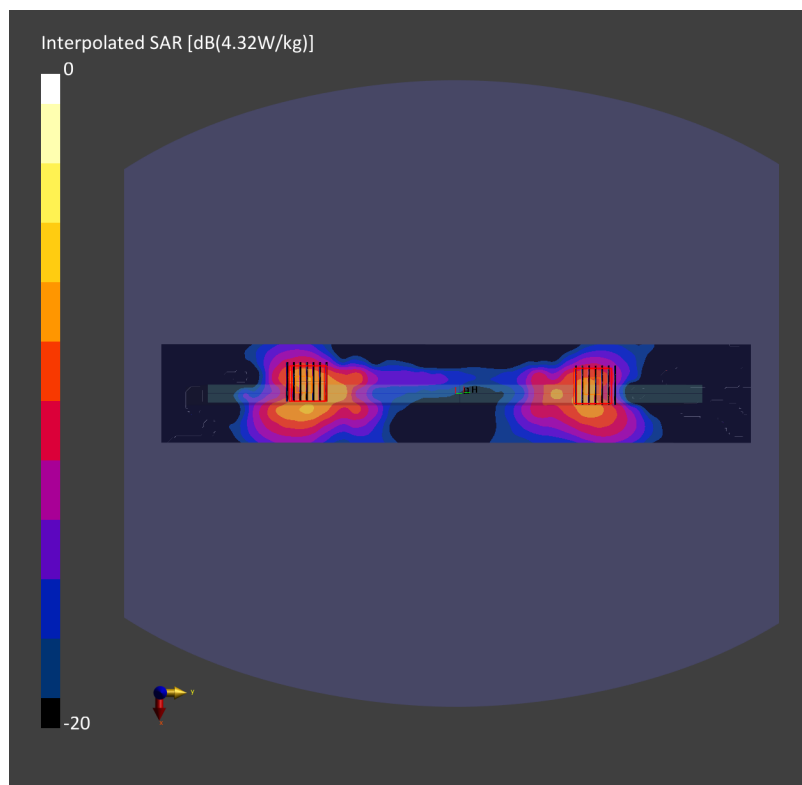

#03_WLAN5GHz_802.11a 6Mbps_Edge 1_0mm_Ch144;Ant 1+2

Communication System: WLAN 5GHz; Frequency: 5720.0

Medium: HSL_5G_220526 Medium parameters used: $f = 5720.0$ MHz; $\sigma = 5.15$ S/m; $\epsilon_r = 34.6$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7695; ConvF(5.05, 5.05, 5.05); Calibrated: 2021-11-19
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1697; Calibrated: 2021-11-09
- Phantom: ELI V8.0 (20deg probe tilt); Serial: 2153; Section: Flat
- Measurement Software: cDASY6 V6.6.0.13926
- UID: WLAN, 10525-AAC
- MAIA: Area Scan: N/A; Zoom Scan: N/A

Area Scan (60.0 mm x 360.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.891 W/kg; SAR (10g) = 0.362 W/kg;

Zoom Scan (22.0 mm x 22.0 mm x 22.0 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm

Power Drift = -0.04 dB

SAR (1g) = 1.25 W/kg; SAR (10g) = 0.362 W/kg;


psAPD (1.0cm², sq) = 0 [W/m²]; psAPD (4.0cm², sq) = 0 [W/m²]

Zoom Scan (22.0 mm x 22.0 mm x 22.0 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm

Power Drift = -0.04 dB

SAR (1g) = 0.688 W/kg; SAR (10g) = 0.246 W/kg;

psAPD (1.0cm², sq) = 0 [W/m²]; psAPD (4.0cm², sq) = 0 [W/m²]

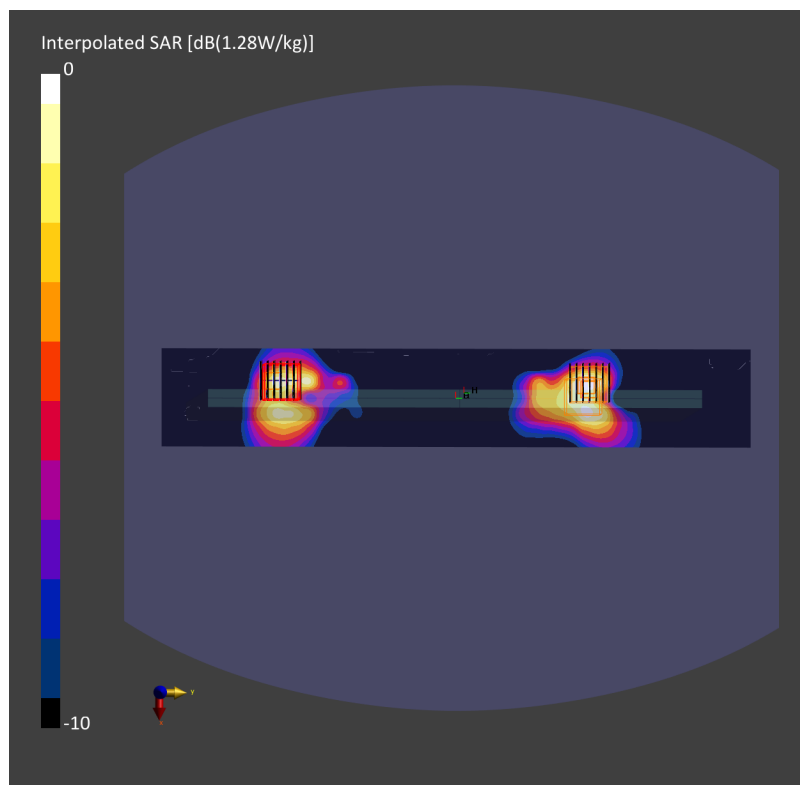

#04_WLAN5GHz_802.11a 6Mbps_Edge 1_0mm_Ch165;Ant 1+2

Communication System: WLAN 5GHz; Frequency: 5825.0

Medium: HSL_5G_220526 Medium parameters used: $f = 5825.0$ MHz; $\sigma = 5.26$ S/m; $\epsilon_r = 34.4$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7695; ConvF(5.05, 5.05, 5.05); Calibrated: 2021-11-19
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1697; Calibrated: 2021-11-09
- Phantom: ELI V8.0 (20deg probe tilt); Serial: 2153; Section: Flat
- Measurement Software: cDASY6 V6.6.0.13926
- UID: WLAN, 10525-AAC
- MAIA: Area Scan: N/A; Zoom Scan: N/A

Area Scan (60.0 mm x 360.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.958 W/kg; SAR (10g) = 0.368 W/kg;

Zoom Scan (22.0 mm x 22.0 mm x 22.0 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm

Power Drift = 0.01 dB

SAR (1g) = 1.32 W/kg; SAR (10g) = 0.375 W/kg;


psAPD (1.0cm², sq) = 0 [W/m²]; psAPD (4.0cm², sq) = 0 [W/m²]

Zoom Scan (22.0 mm x 22.0 mm x 22.0 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm

Power Drift = 0.01 dB

SAR (1g) = 1.03 W/kg; SAR (10g) = 0.335 W/kg;

psAPD (1.0cm², sq) = 0 [W/m²]; psAPD (4.0cm², sq) = 0 [W/m²]

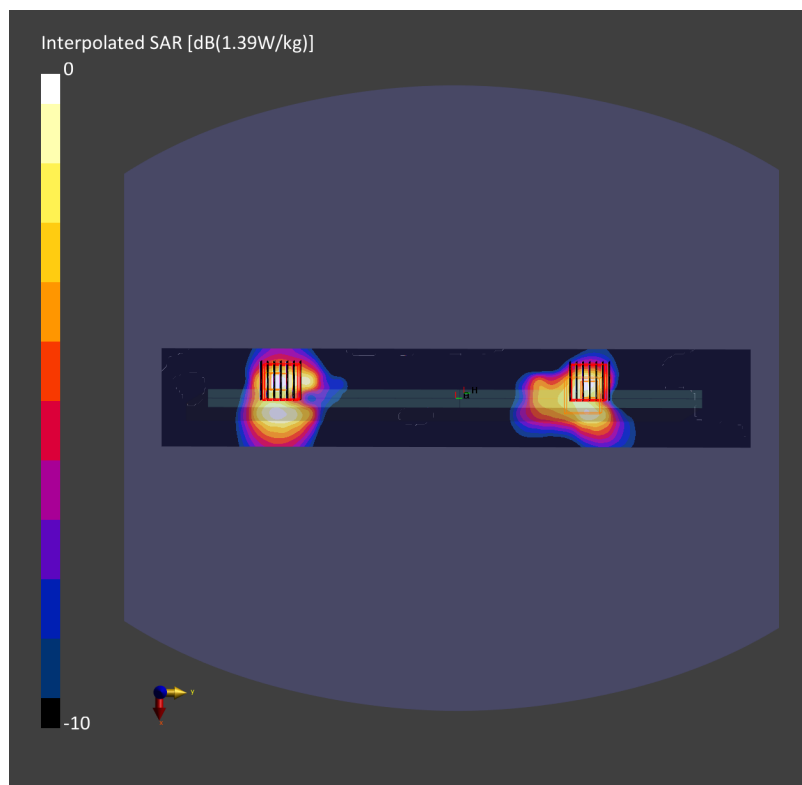

#05_Bluetooth_1Mbps_Edge 1_0mm_Ch39;Ant 1

Communication System: Bluetooth; Frequency: 2441.0

Medium: HSL_2450_220526 Medium parameters used: $f = 2441.0$ MHz; $\sigma = 1.80$ S/m; $\epsilon_r = 38.9$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7695; ConvF(8.24, 8.24, 8.24); Calibrated: 2021-11-19
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1697; Calibrated: 2021-11-09
- Phantom: ELI V8.0 (20deg probe tilt); Serial: 2153; Section: Flat
- Measurement Software: cDASY6 V6.6.0.13926
- UID: Bluetooth, 10030-CAA
- MAIA: Area Scan: Y; Zoom Scan: Y

Area Scan (60.0 mm x 168.0 mm): Measurement Grid: 10.0 mm x 12.0 mm

SAR (1g) = 0.052 W/kg; SAR (10g) = 0.028 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.4 mm

Power Drift = 0.10 dB

SAR (1g) = 0.081 W/kg; SAR (10g) = 0.041 W/kg;

psAPD (1.0cm², sq) = 0 [W/m²]; psAPD (4.0cm², sq) = 0 [W/m²]

