

Regulatory WLAN Antenna Information

Platform information										
Brand	ODM	RMN	Intel platform (ex: Yes, No or NA)	Platform type (ex: regular NB, convertible PC, AIO...etc)	*SAR minimum separation (mm)					
HP Inc.	Quanta	TPN-Q295	Yes	Notebook PC	179.57 mm					
Antenna information										
Vendor		Type	Antenna Part number (Ant1/Tx1)			Antenna Part number (Ant2/Tx2)				
INPAQ		PIFA	DQ6WAPLEL35 (WA-P-LELE-01-005)			DQ6WAPLEL35 (WA-P-LELE-01-005)				
Peak gain w/ cable loss (dBi)*										
	2.4GHz 2400-2483.5 MHz	5.2GHz 5150-5250MHz	5.3GHz 5250-5350MHz	5.6GHz 5470-5725MHz	5.8GHz 5725-5850MHz	5.9GHz 5850-5895MHz	6.2GHz 5925-6425MHz	6.5GHz 6425-6525MHz	6.7GHz 6525-6875MHz	7.0 GHz 6875-7125MHz
Ant1	1.58	0.67	0.12	1.66	1.34	1.64	1.97	2.56	2.09	2.62
Ant2	1.14	2.04	1.50	0.56	0.91	1.71	1.54	2.11	1.45	2.24
Module Information										
Model		Form factor and suffixes								
MT7921		Mediatek MT7921 Wi Fi 6 +BT 5.2 M.2 2230 PCI e+USB WW WLAN 2x2 (M.2)								
Antenna vendor Address										
No. 11, Keyi St., 11th Neighborhood, Gongyi Vil., Zhunan Township, Miaoli County 350402, Taiwan (R.O.C.)										

Table of contents

1. Applicable test method
2. Test & System Description
 - a. Test setup
 - b. Equipment list
3. Setup photo

[Section 1. Antenna Assembly Specifications](#)

[Section 2. Dimensioned Photos or Drawings of Antennas](#)

[Section 3. Radiation characteristics of antenna loaded in Host Platform](#)

[Section 4. Antenna Host Platform Location Information](#)

[Section 5. Antenna dimensional information for SAR evaluation](#)

[Section 6. Diagram Example of Co-Location Antenna Separation](#)

1. Applicable test methods

ETS-Lindgren AMS-8500 system is 3D fully anechoic chamber, it is applied to the “Conical Cut test method”, the detail description is described as below.


The Conical Cut method requires the ability of the Measurement Antenna to be physically rotated in the theta plane (overhead) of the EUT for implementations using a single Measurement Antenna, Eleven conical cuts are required to capture data at every 15 degrees from the EUT, with the top (0 degrees) and bottom (180 degrees) cuts not being measured. Typically, the EUT will reAnt1 affixed to a turntable during the entire measurement process. The Measurement Antenna will be positioned at a starting theta angle. The EUT will then be rotated around the full 360 degrees of phi rotation. The Measurement Antenna will then be positioned at the next theta angle, and the process repeated.

		θ -Axis	Φ -Axis
Passive	Step size	15°~165° step: 15°	0°~345° step: 15°
	N / M (Points)	12	24

2. Test & System Description

a. Test setup

Typical Setup for ETS-Lindgren AMS-8500:

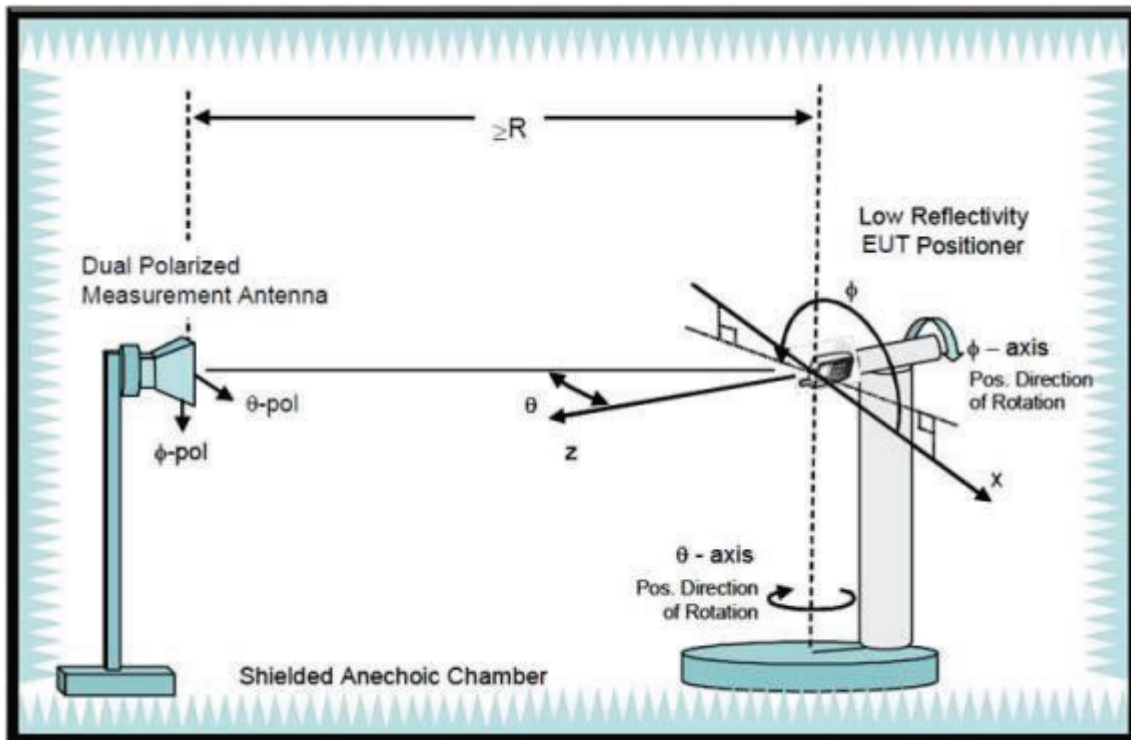

Antenna Information

Section 1. Antenna Assembly Specifications

1A Antenna Part Number	1B Manufacturer	1C Antenna Type	1D Cable Assembly Part Number and Information	Freq Range MHz	1E * Peak Gain W/ Cable loss (dBi)	1F Peak Gain w/o Cable Loss (dBi)	1G Max VSWR	1H Cable Loss (dB)
DQ6WAPLEL35 (WA-P-LELE-01-005) Ant1 Antenna TX1	INPAQ	PIFA	Connector: IPEX 50 ohm Coaxial length: 317mm diameter: 1.13mm lowloss cable	2400-2495	1.58	2.46	3.00 MAX	0.88
				5150-5250	0.67	1.98	3.00 MAX	1.31
				5250-5350	0.12	1.44	3.00 MAX	1.32
				5470-5725	1.66	3.01	3.00 MAX	1.35
				5725-5850	1.34	2.71	3.00 MAX	1.37
				5850-5895	1.64	3.02	3.00 MAX	1.38
				5925-6425	1.97	3.41	3.00 MAX	1.44
				6425-6525	2.56	4.03	3.00 MAX	1.47
				6525-6875	2.09	3.59	3.00 MAX	1.50
6875-7125	2.62	4.17	3.00 MAX	1.55				
DQ6WAPLEL35 (WA-P-LELE-01-005) Ant2 Antenna TX2	INPAQ	PIFA	Connector: IPEX 50 ohm Coaxial length: 522.5mm diameter: 1.13mm lowloss cable	2400-2495	1.14	2.59	3.00 MAX	1.45
				5150-5250	2.04	4.20	3.00 MAX	2.16
				5250-5350	1.50	3.68	3.00 MAX	2.18
				5470-5725	0.56	2.78	3.00 MAX	2.22
				5725-5850	0.91	3.17	3.00 MAX	2.26
				5850-5895	1.71	3.99	3.00 MAX	2.28
				5925-6425	1.54	3.91	3.00 MAX	2.37
				6425-6525	2.11	4.53	3.00 MAX	2.42
				6525-6875	1.45	3.92	3.00 MAX	2.47
6875-7125	2.24	4.79	3.00 MAX	2.55				


Section 3. Radiation characteristics of antenna loaded in Host Platform

Ant1 Antenna

Max Antenna 2D Radiation Pattern 2400 – 2495 MHz

Frequency (MHz)	Horizontal+ Vertical (dBi) peak (dBi)
2400-2495	1.58


- TOTAL
- H_POL
- V_POL

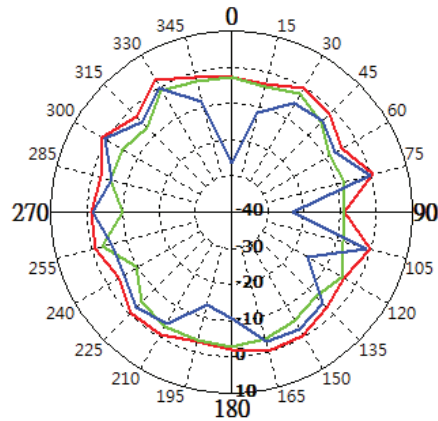

Max Antenna 2D Radiation Pattern 5150-5250 MHz

Frequency (MHz)	Horizontal+ Vertical (dBi) peak (dBi)
5150-5250	0.67


- TOTAL
- H_POL
- V_POL

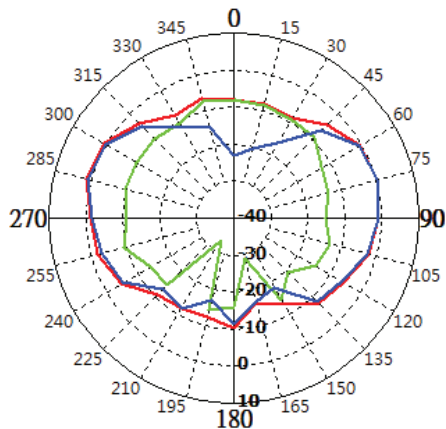

Max Antenna 2D Radiation Pattern 5250-5350 MHz

Frequency (MHz)	Horizontal+ Vertical (dBi) peak (dBi)
5250-5350	0.12


- TOTAL
- H_POL
- V_POL

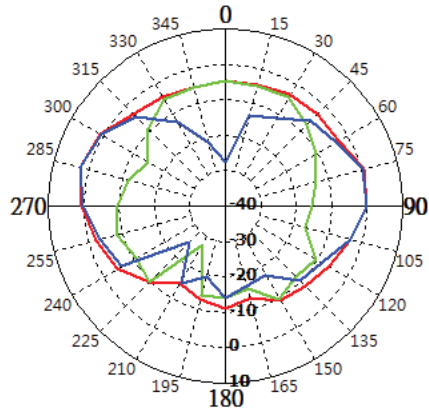

Max Antenna 2D Radiation Pattern 5470-5725 MHz

Frequency (MHz)	Horizontal+ Vertical (dBi) peak (dBi)
5470-5725	1.66


- TOTAL
- H_POL
- V_POL

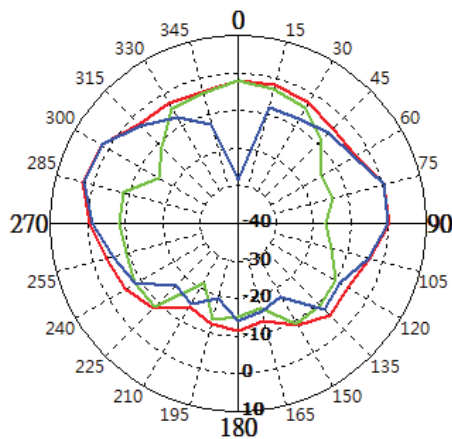

Max Antenna 2D Radiation Pattern 5725-5850 MHz

Frequency (MHz)	Horizontal+ Vertical (dBi) peak (dBi)
5725-5850	1.34


- TOTAL
- H_POL
- V_POL

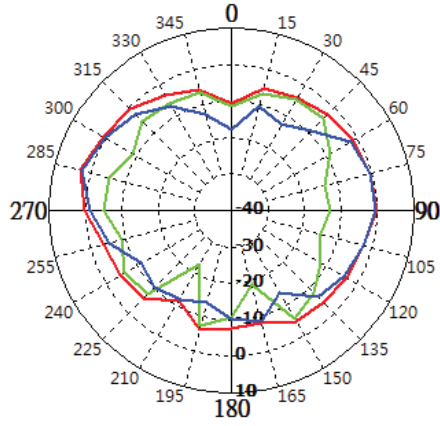

Max Antenna 2D Radiation Pattern 5850-5895 MHz

Frequency (MHz)	Horizontal+ Vertical (dBi) peak (dBi)
5850-5895	1.64

- TOTAL
- H_POL
- V_POL

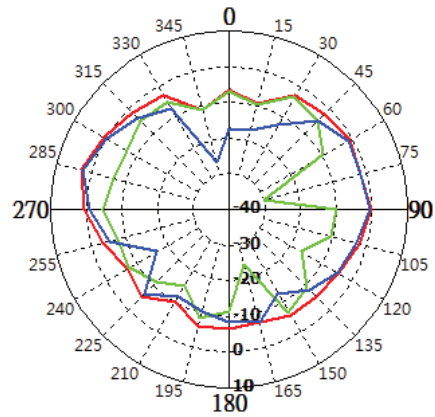


Max Antenna 2D Radiation Pattern 5925-6425 MHz

Frequency (MHz)	Horizontal+ Vertical (dBi) peak (dBi)
5925-6425	1.97

— TOTAL

— H_POL

— V_POL

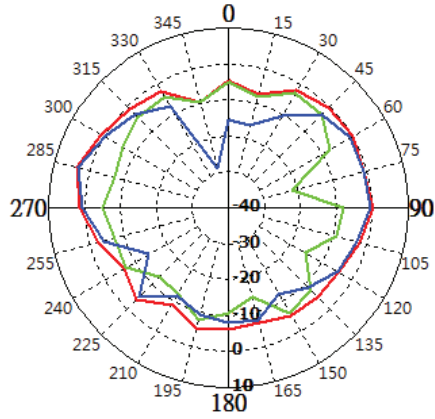


Max Antenna 2D Radiation Pattern 6425-6525 MHz

Frequency (MHz)	Horizontal+ Vertical (dBi) peak (dBi)
6425-6525	2.56

— TOTAL

— H_POL


— V_POL

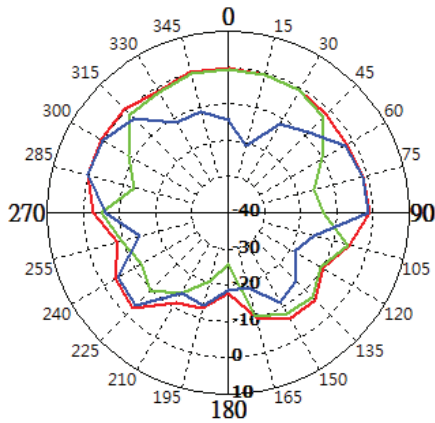

Max Antenna 2D Radiation Pattern 6525-6875 MHz

Frequency (MHz)	Horizontal+ Vertical (dBi) peak (dBi)
6525-6875	2.09


- TOTAL
- H_POL
- V_POL

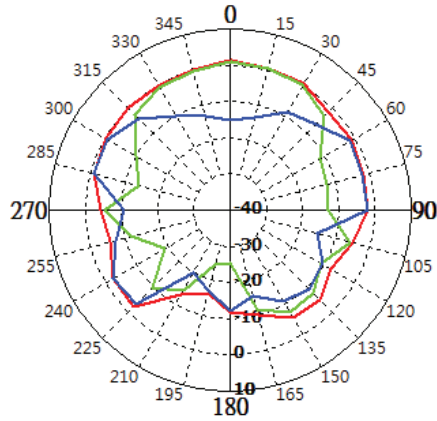

Max Antenna 2D Radiation Pattern 6875-7125 MHz

Frequency (MHz)	Horizontal+ Vertical (dBi) peak (dBi)
6875-7125	2.62

- TOTAL
- H_POL
- V_POL

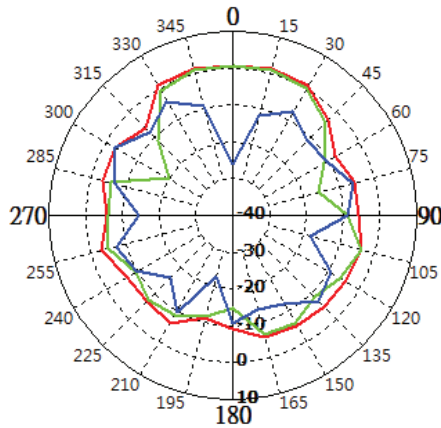


Ant2 Antenna

Max Antenna 2D Radiation Pattern 2400 – 2483.5 MHz

Frequency (MHz)	Horizontal+ Vertical (dBi) peak (dBi)
2400-2483.5	1.14


- TOTAL
- H_POL
- V_POL

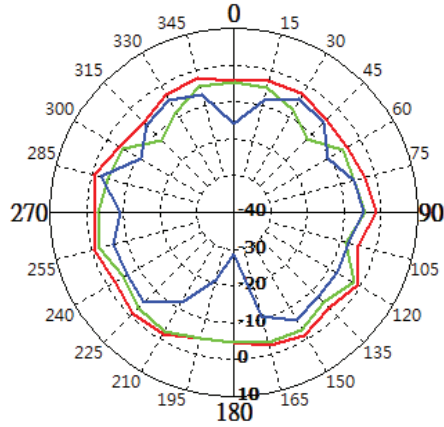

Max Antenna 2D Radiation Pattern 5150-5250 MHz

Frequency (MHz)	Horizontal+ Vertical (dBi) peak (dBi)
5150-5250	2.04


- TOTAL
- H_POL
- V_POL

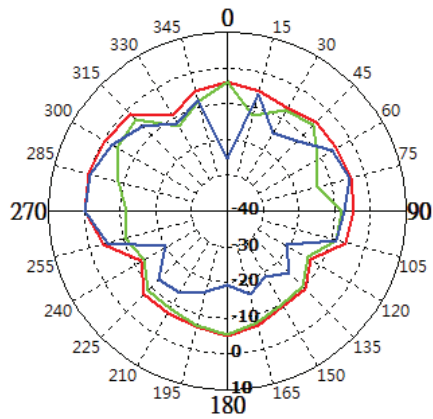

Max Antenna 2D Radiation Pattern 5250-5350 MHz

Frequency (MHz)	Horizontal+ Vertical (dBi) peak (dBi)
5250-5350	1.50


- TOTAL
- H_POL
- V_POL

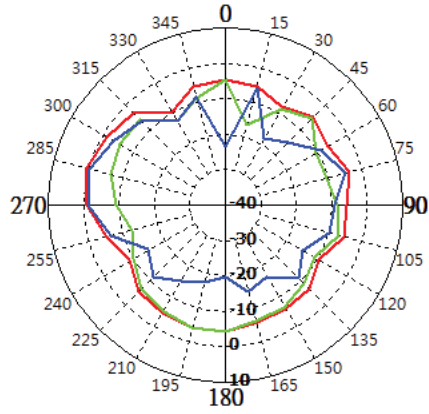

Max Antenna 2D Radiation Pattern 5470-5725 MHz

Frequency (MHz)	Horizontal+ Vertical (dBi) peak (dBi)
5470-5725	0.56

- TOTAL
- H_POL
- V_POL

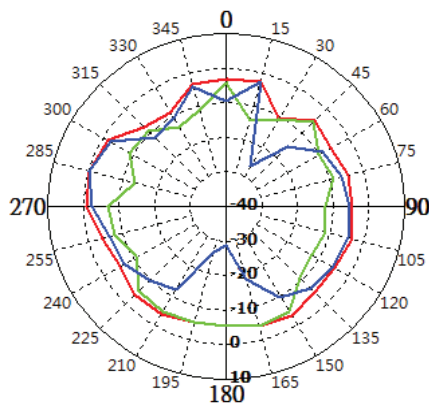


Max Antenna 2D Radiation Pattern 5725-5850 MHz

Frequency (MHz)	Horizontal+ Vertical (dBi) peak (dBi)
5725-5850	0.91

— TOTAL

— H_POL

— V_POL

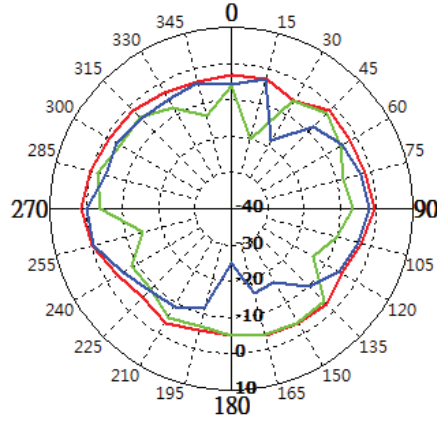


Max Antenna 2D Radiation Pattern 5850-5895 MHz

Frequency (MHz)	Horizontal+ Vertical (dBi) peak (dBi)
5850-5895	1.71

— TOTAL

— H_POL


— V_POL

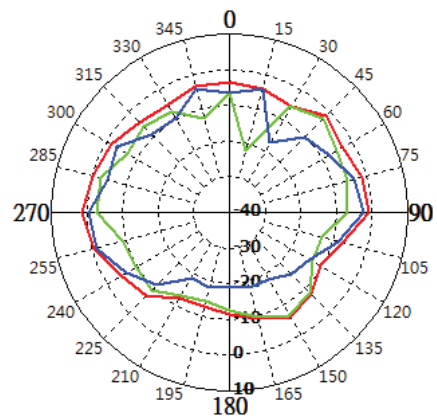

Max Antenna 2D Radiation Pattern 5925-6425 MHz

Frequency (MHz)	Horizontal+ Vertical (dBi) peak (dBi)
5925-6425	1.54


- TOTAL
- H_POL
- V_POL

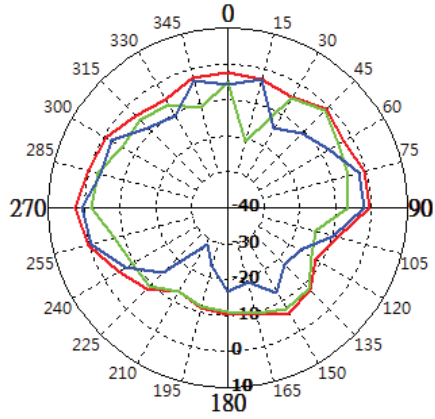

Max Antenna 2D Radiation Pattern 6425-6525 MHz

Frequency (MHz)	Horizontal+ Vertical (dBi) peak (dBi)
6425-6525	2.11


- TOTAL
- H_POL
- V_POL

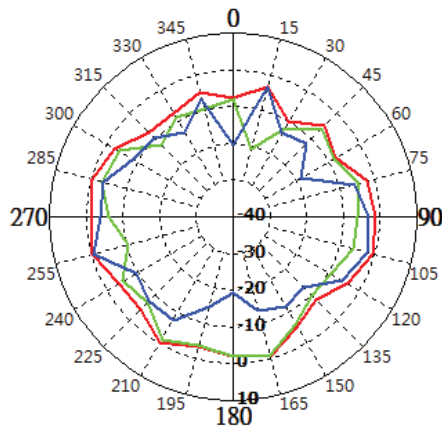

Max Antenna 2D Radiation Pattern 6525-6875 MHz

Frequency (MHz)	Horizontal+ Vertical (dBi) peak (dBi)
6525-6875	1.45

- TOTAL
- H_POL
- V_POL

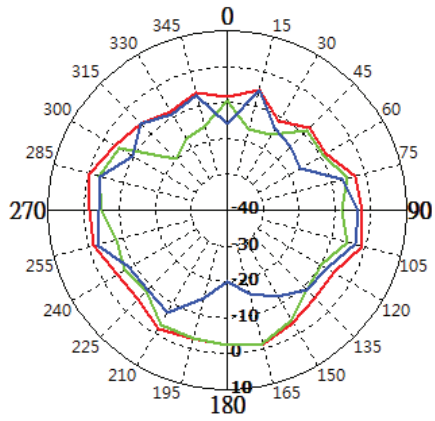

Max Antenna 2D Radiation Pattern 6875-7125 MHz

Frequency (MHz)	Horizontal+ Vertical (dBi) peak (dBi)
6875-7125	2.24

- TOTAL
- H_POL
- V_POL

