



# FCC RADIO TEST REPORT

**FCC ID** : B94-TNC162GPWC  
**Equipment** : Notebook Computer  
**Brand Name** : HP  
**Model Name** : TPN-C162  
**Applicant** : HP Inc.  
1501 Page Mill Road, Palo Alto CA,  
94304, USA  
**Standard** : FCC Part 15 Subpart C §15.225

The product was received on Feb. 10, 2023 and testing was performed from Feb. 20, 2023 to Jun. 19, 2023. We, Sporton International Inc. EMC & Wireless Communications Laboratory, would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval from Sporton International Inc. EMC & Wireless Communications Laboratory, the test report shall not be reproduced except in full.

*Louis Wu*

Approved by: Louis Wu

**Sporton International Inc. EMC & Wireless Communications Laboratory**  
No. 52, Huaya 1st Rd., Guishan Dist., Taoyuan City 333, Taiwan (R.O.C.)



# Table of Contents

**History of this test report..... 3**

**Summary of Test Result..... 4**

**1. General Description ..... 5**

    1.1 Product Feature of Equipment Under Test ..... 5

    1.2 Modification of EUT ..... 5

    1.3 Testing Location ..... 5

    1.4 Applicable Standards..... 6

**2. Test Configuration of Equipment Under Test..... 7**

    2.1 Descriptions of Test Mode ..... 7

    2.2 Connection Diagram of Test System ..... 7

    2.3 EUT Operation Test Setup ..... 7

**3. Test Results ..... 8**

    3.1 AC Power Line Conducted Emissions Measurement ..... 8

    3.2 20dB and 99% OBW Spectrum Bandwidth Measurement..... 10

    3.3 Frequency Stability Measurement ..... 11

    3.4 Field Strength of Fundamental Emissions and Mask Measurement..... 12

    3.5 Radiated Emissions Measurement ..... 14

    3.6 Antenna Requirements..... 17

**4. List of Measuring Equipment ..... 18**

**5. Measurement Uncertainty..... 19**

**Appendix A. Test Results of Conducted Emission Test**

**Appendix B. Test Results of Near Field Test Items**

    B1. Test Result of 20dB Spectrum Bandwidth

    B2. Test Result of Frequency Stability

**Appendix C. Test Results of Radiated Test Items**

    C1. Test Result of Field Strength of Fundamental Emissions

    C2. Results of Radiated Emissions (9 kHz~30MHz)

    C3. Results of Radiated Emissions (30MHz~1GHz)

**Appendix D. Setup Photographs**



### History of this test report

Report No.	Version	Description	Issue Date
FR321001-04	01	Initial issue of report	Jun. 28, 2023
FR321001-04	02	Revise Product Feature This report is an updated version, replacing the report issued on Jun. 28, 2023.	Jul. 04, 2023



## Summary of Test Result

Report Clause	Ref Std. Clause	Test Items	Result (PASS/FAIL)	Remark
3.1	15.207	AC Power Line Conducted Emissions	Pass	11.10 dB under the limit at 4.328 MHz
3.2	15.215(c)	20dB Spectrum Bandwidth	Pass	-
	2.1049	99% OBW Spectrum Bandwidth	Reporting only	-
3.3	15.225(e)	Frequency Stability	Pass	-
3.4	15.225(a)(b)(c)	Field Strength of Fundamental Emissions	Pass	Max level 9.55 dB $\mu$ V/m at 13.561 MHz
3.5	15.225(d) 15.209	Radiated Spurious Emissions	Pass	6.88 dB under the limit at 30.000 MHz
3.6	15.203	Antenna Requirements	Pass	-

**Conformity Assessment Condition:**

1. The test results (PASS/FAIL) with all measurement uncertainty excluded are presented against the regulation limits or in accordance with the requirements stipulated by the applicant/manufacturer who shall bear all the risks of non-compliance that may potentially occur if measurement uncertainty is taken into account.
2. The measurement uncertainty please refer to each test result in the section "Measurement Uncertainty".

**Disclaimer:**

The product specifications of the EUT presented in the test report that may affect the test assessments are declared by the manufacturer who shall take full responsibility for the authenticity.

**Reviewed by: Sheng Kuo****Report Producer: Cindy Liu**



# 1. General Description

## 1.1 Product Feature of Equipment Under Test

Product Feature	
General Specs	Bluetooth, Wi-Fi 2.4GHz 802.11b/g/n/ac/ax, Wi-Fi 5GHz 802.11a/n/ac/ax, Wi-Fi 6GHz 802.11a/n/ac/ax, WLC, and WPC.
Integrated WLAN Module	Brand Name: Intel Model Name: AX211D2W
Integrated WLC Chipset	Brand Name: HP Model Name: L0NPS007-CS-H
Antenna Type	Bluetooth: PIFA Antenna WLAN: PIFA Antenna WLC: Rod Antenna WPC: Rod Antenna

Remark: The EUT's information above is declared by manufacturer. Please refer to Disclaimer in report summary.

## 1.2 Modification of EUT

No modifications made to the EUT during the testing.

## 1.3 Testing Location

Test Site	Sporton International Inc. EMC & Wireless Communications Laboratory		
Test Site Location	No.52, Huaya 1st Rd., Guishan Dist., Taoyuan City 333, Taiwan (R.O.C.) TEL: +886-3-327-3456 FAX: +886-3-328-4978		
Test Site No.	Sporton Site No.		
	TH03-HY	CO05-HY	03CH07-HY
Test Engineer	Eric Wu	Calvin Wang	Nick Yu
Temperature	22.9~24.9	23~26	20.5~21.1
Relative Humidity	49.7~51.7	45~55	48.3~51.1

Note: The test site complies with ANSI C63.4 2014 requirement.

FCC designation No.: TW1190



## **1.4 Applicable Standards**

According to the specifications declared by the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ FCC Part 15 Subpart C §15.225
- ♦ FCC KDB 414788 D01 Radiated Test Site v01r01
- ♦ ANSI C63.10-2013

**Remark:**

1. All the test items were validated and recorded in accordance with the standards without any modification during the testing.
2. The TAF code is not including all the FCC KDB listed without accreditation.

## 2. Test Configuration of Equipment Under Test

### 2.1 Descriptions of Test Mode

Investigation has been done on all the possible configurations.


The following table is a list of the test modes shown in this test report.

Test Items	
AC Power Line Conducted Emissions	Field Strength of Fundamental Emissions
20dB Spectrum Bandwidth	Frequency Stability
Radiated Emissions 9kHz~30MHz	Radiated Emissions 30MHz~1GHz

Test Cases	
AC Conducted Emission	Mode 1 : WLC 13.56 Charging + AC Adapter

### 2.2 Connection Diagram of Test System

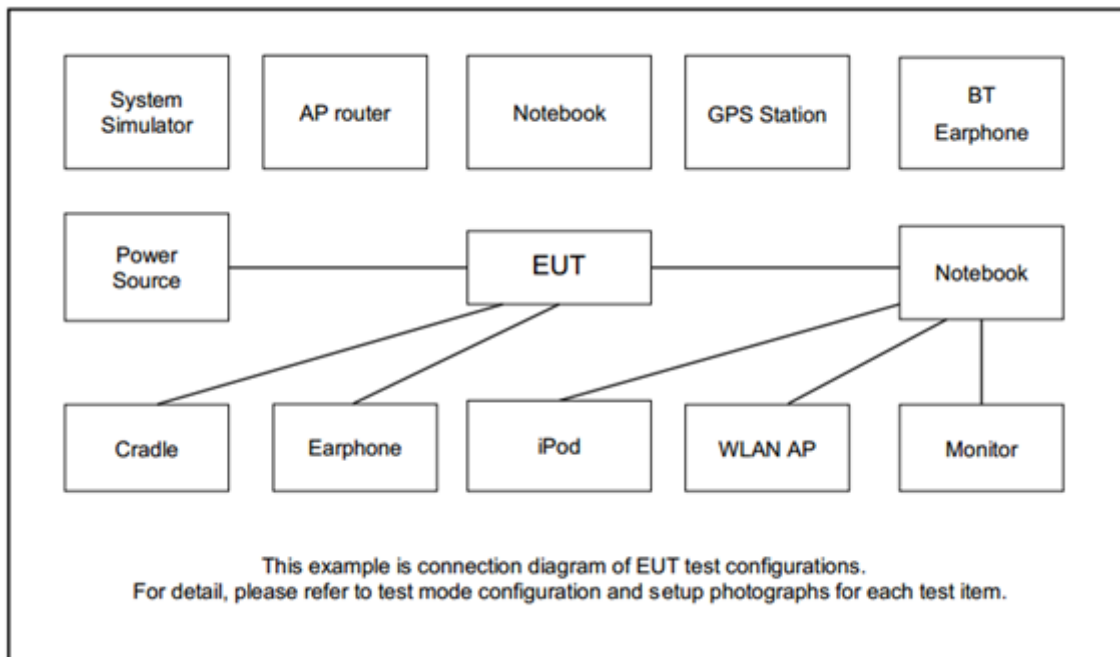

### 2.3 EUT Operation Test Setup

The Stylus Pen is charged via EUT.



### 3. Test Results

#### 3.1 AC Power Line Conducted Emissions Measurement

##### 3.1.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of Emission (MHz)	Conducted Limit (dBµV)	
	Quasi-Peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

\*Decreases with the logarithm of the frequency.

##### 3.1.2 Measuring Instruments


Please refer to the measuring equipment list in this test report.

##### 3.1.3 Test Procedures

1. The EUT is placed 0.4 meter away from the conducting wall of the shielding room, and is kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN shall be used.
6. Both Line and Neutral shall be tested in order to find out the maximum conducted emission.
7. The frequency range from 150 kHz to 30 MHz is scanned.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth (IF Bandwidth = 9 kHz) with Maximum Hold Mode. Then measurement is also conducted by Average Detector and Quasi-Peak Detector Function respectively.



### 3.1.4 Test setup

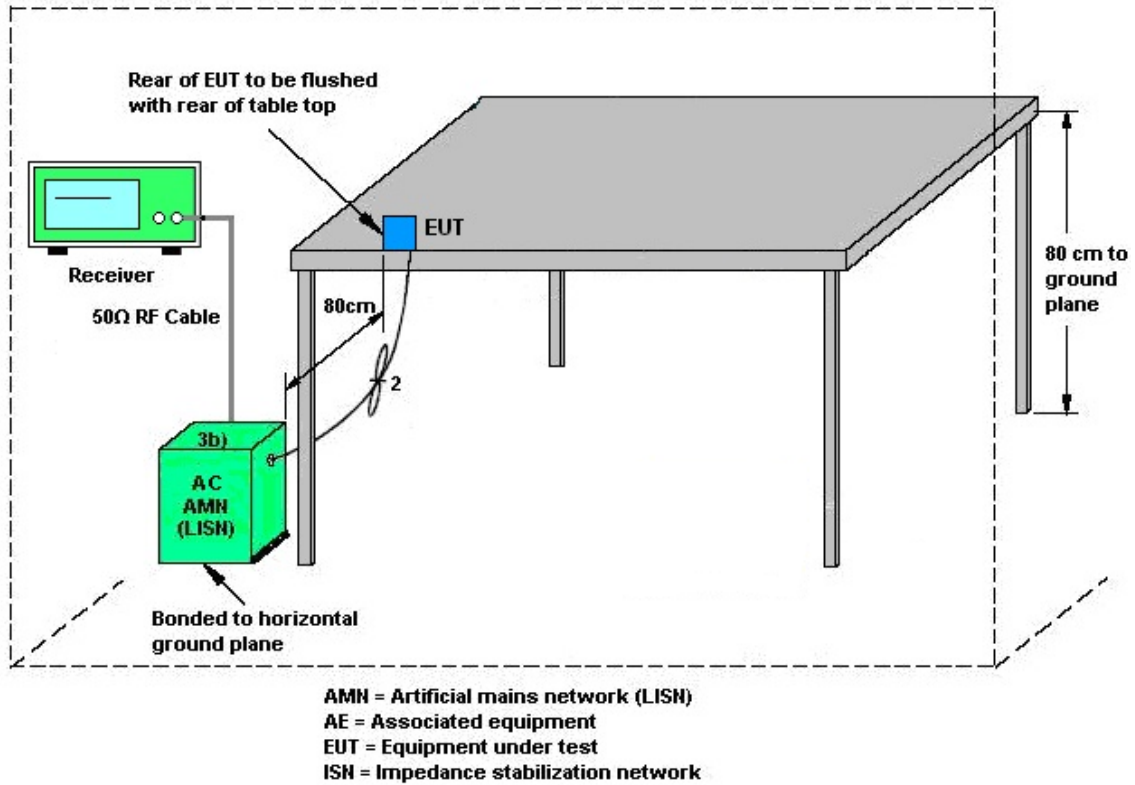

### 3.1.5 Test Result of AC Conducted Emission

Please refer to Appendix A.

## 3.2 20dB and 99% OBW Spectrum Bandwidth Measurement

### 3.2.1 Limit

Intentional radiators must be designed to ensure that the 20 dB and 99% emission bandwidth in the specific band 13.553~13.567 MHz.


### 3.2.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

### 3.2.3 Test Procedures

1. The spectrum analyzer connected via a receive antenna placed near the EUT in peak Max Hold Mode.
2. The resolution bandwidth of 1 kHz and the video bandwidth of 3 kHz were used.
3. Measured the spectrum width with power higher than 20 dB below carrier.
4. Measured the 99% OBW.

### 3.2.4 Test Setup

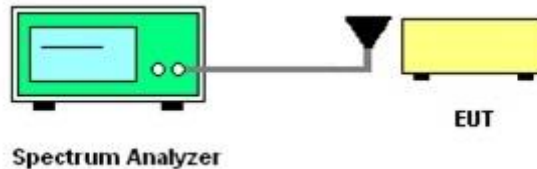

### 3.2.5 Test Result of Near Field Test Items

Please refer to Appendix B.

### 3.3 Frequency Stability Measurement

#### 3.3.1 Limit

The frequency tolerance of the carrier signal shall be maintained within +/- 0.01% (100ppm) of the operating frequency over a temperature variation of -20 degrees to +50 degrees C at normal supply voltage, and for a variation in the primary supply voltage from 85% to 115% of the rated supply voltage at a temperature of 20 degrees C. For battery operated equipment, the equipment tests shall be performed by using a new battery.


#### 3.3.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

#### 3.3.3 Test Procedures

1. The spectrum analyzer connected via a receive antenna placed near the EUT.
2. EUT has transmitted signal and fixed channelize.
3. Set the spectrum analyzer span to view the entire emissions bandwidth.
4. Set RBW = 1 kHz, VBW = 3 kHz with peak detector and maxhold settings.
5. The  $f_c$  is declaring of channel frequency. Then the frequency error formula is  $(f_c - f) / f_c \times 10^6$  ppm and the limit is less than  $\pm 100$ ppm.
6. Extreme temperature rule is -20°C~50°C.

#### 3.3.4 Test Setup

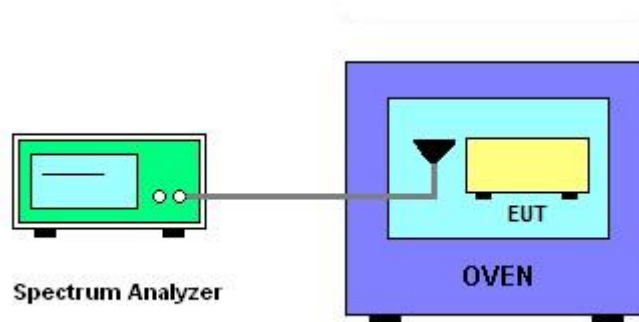

#### 3.3.5 Test Result of Near Field Test Items

Please refer to Appendix B.



### 3.4 Field Strength of Fundamental Emissions and Mask Measurement

#### 3.4.1 Limit

Rules and specifications	FCC CFR 47 Part 15 section 15.225			
Description	Compliance with the spectrum mask is tested with RBW set to 9kHz.			
Freq. of Emission (MHz)	Field Strength (μV/m) at 30m	Field Strength (dBμV/m) at 30m	Field Strength (dBμV/m) at 10m	Field Strength (dBμV/m) at 3m
1.705~13.110	30	29.5	48.58	69.5
13.110~13.410	106	40.5	59.58	80.5
13.410~13.553	334	50.5	69.58	90.5
13.553~13.567	15848	84.0	103.08	124.0
13.567~13.710	334	50.5	69.58	90.5
13.710~14.010	106	40.5	59.58	80.5
14.010~30.000	30	29.5	48.58	69.5

**Remark:**

1. The field strength test result is in 3m test distance, follow test rules the test data use distance extrapolation factor and reported in this report at 30m test result.
2. Distance extrapolation factor = 40 log (specific distance / test distance) (dB)

#### 3.4.2 Measuring Instruments


Please refer to the measuring equipment list in this test report.

### 3.4.3 Test Procedures

1. Configure the EUT according to ANSI C63.10. The EUT is placed on the top of the turntable 0.8 meter above ground. The phase center of the loop receiving antenna mounted antenna tower is placed 3 meters far away from the turntable.
2. Power on the EUT and all the supporting units. The turntable is rotated by 360 degrees to determine the position of the highest radiation.
3. The height of the receiving antenna is fixed at one meter above ground to find the maximum emissions field strength.
4. For Fundamental emissions, use the receiver to measure QP reading.
5. When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum value.
6. Compliance with the spectrum mask is tested with RBW set to 9 kHz.  
Note: Emission level (dB $\mu$ V/m) = 20 log Emission level ( $\mu$ V/m).

### 3.4.4 Test Setup

For radiated test below 30MHz

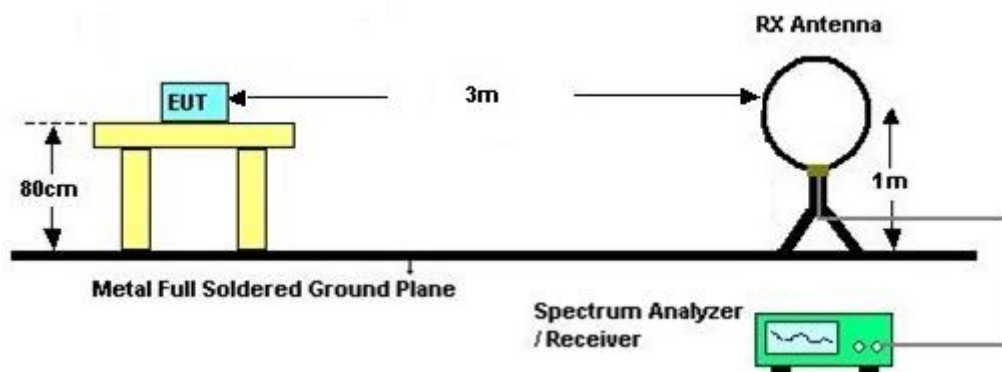

### 3.4.5 Test Result of Field Strength of Fundamental Emissions and Mask

Please refer to Appendix C.



### 3.5 Radiated Emissions Measurement

#### 3.5.1 Limit

The field strength of any emissions which appear outside of 13.110 ~14.010MHz band shall not exceed the general radiated emissions limits.

Frequencies (MHz)	Field Strength (µV/m)	Measurement Distance (meters)
0.009~0.490	2400/F(kHz)	300
0.490~1.705	24000/F(kHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

#### 3.5.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

#### 3.5.3 Measuring Instrument Setting

The following table is the setting of receiver:

Receiver Parameter	Setting
Attenuation	Auto
Frequency Range: 9kHz~150kHz	RBW 200Hz for QP
Frequency Range: 150kHz~30MHz	RBW 9kHz for QP
Frequency Range: 30MHz~1000MHz	RBW 120kHz for Peak

**Note:** The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90 kHz and 110-490 kHz. Radiated emission limits in these two bands are based on measurements employing an average detector.




### 3.5.4 Test Procedures


1. Configure the EUT according to ANSI C63.10. The EUT is placed on the top of the turntable 0.8 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower is placed 3 meters far away from the turntable.
2. Power on the EUT and all the supporting units. The turntable is rotated by 360 degrees to determine the position of the highest radiation.
3. The height of the broadband receiving antenna is varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
4. For each suspected emissions, the antenna tower is scanned (from 1 M to 4 M) and then the turntable is rotated (from 0 degree to 360 degrees) to find the maximum reading.
5. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
6. When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum value.
7. In case the emission is lower than 30 MHz, loop antenna has to be used for measurement and the recorded data shall be QP measured by receiver.
8. Radiated testing below 1 GHz is performed by adjusting the antenna tower from 1 m to 4 m and by rotating the turn table from 0 degree to 360 degrees to find the peak maximum hold reading. When there is no suspected emission found and the emission level is with at least 6 dB margin against QP limit line, the position is marked as “-“.

### 3.5.5 Test Setup

For radiated test below 30MHz

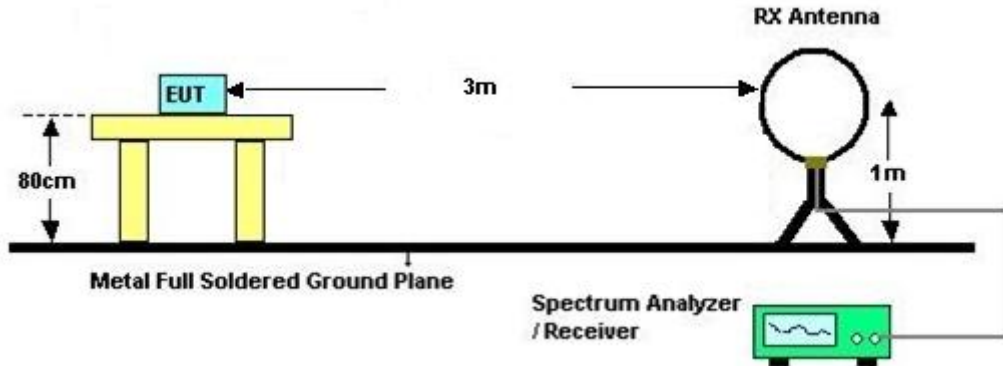

For radiated test above 30MHz

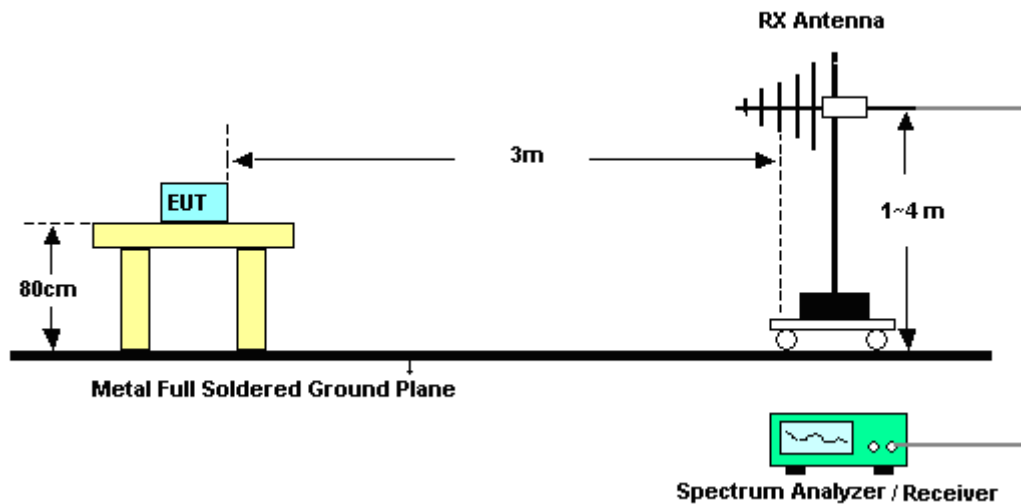

### 3.5.6 Test Result of Radiated Emissions Measurement

Please refer to Appendix C.

**Remark:** There is adequate comparison measurement of both open-field test site and alternative test site - semi-Anechoic chamber according to 414788 D01 Radiated Test Site v01r01, and the result came out very similar.





## **3.6 Antenna Requirements**

### **3.6.1 Standard Applicable**

Except for special regulations, the Low-power Radio-frequency Devices must not be equipped with any jacket for installing an antenna with extension cable. An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that the user can replace a broken antenna, but the use of a standard antenna jack or electrical connector is prohibited.

The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the rule.

### **3.6.2 Antenna Anti-Replacement Construction**

An embedded-in antenna design is used.



### 4. List of Measuring Equipment

Instrument	Brand Name	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
AC Power Source	ChainTek	APC-1000W	N/A	N/A	N/A	Feb. 20, 2023	N/A	Conduction (CO05-HY)
EMI Test Receiver	Rohde & Schwarz	ESR3	102388	9kHz~3.6GHz	Dec. 01, 2022	Feb. 20, 2023	Nov. 30, 2023	Conduction (CO05-HY)
Hygrometer	Testo	608-H1	34913912	N/A	Nov. 17, 2022	Feb. 20, 2023	Nov. 16, 2023	Conduction (CO05-HY)
LISN	Rohde & Schwarz	ENV216	100081	9kHz~30MHz	Nov. 17, 2022	Feb. 20, 2023	Nov. 16, 2023	Conduction (CO05-HY)
Software	Rohde & Schwarz	EMC32	N/A	N/A	N/A	Feb. 20, 2023	N/A	Conduction (CO05-HY)
Pulse Limiter	SCHWARZBECK	VTSD 9561-FN	00691	N/A	Aug. 01, 2022	Feb. 20, 2023	Jul. 31, 2023	Conduction (CO05-HY)
LISN Cable	MVE	RG-400	260260	N/A	Dec. 29, 2022	Feb. 20, 2023	Dec. 28, 2023	Conduction (CO05-HY)
EMI Test Receiver	Rohde & Schwarz	ESU26	100472	20Hz~26.5GHz	Feb. 13, 2023	Feb. 23, 2023	Feb. 12, 2024	Radiation (03CH07-HY)
Bilog Antenna	TESEQ	CBL 6111D & 00800N1D01N-06	35419 & 03	30MHz~1GHz	Apr. 24, 2022	Feb. 23, 2023	Apr. 23, 2023	Radiation (03CH07-HY)
Preamplifier	COM-POWER	PA-103A	161241	10MHz~1GHz	Oct. 03, 2022	Feb. 23, 2023	Oct. 02, 2023	Radiation (03CH07-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 104	MY15682/4	30MHz to 18GHz	Feb. 22, 2023	Feb. 23, 2023	Feb. 21, 2024	Radiation (03CH07-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 104	MY24971/4	9kHz to 18GHz	Feb. 22, 2023	Feb. 23, 2023	Feb. 21, 2024	Radiation (03CH07-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 104	MY28655/4	9kHz to 18GHz	Feb. 22, 2023	Feb. 23, 2023	Feb. 21, 2024	Radiation (03CH07-HY)
Controller	EMEC	EM1000	N/A	Control Ant Mast	N/A	Feb. 23, 2023	N/A	Radiation (03CH07-HY)
Controller	MF	MF-7802	N/A	Control Turn table	N/A	Feb. 23, 2023	N/A	Radiation (03CH07-HY)
Antenna Mast	EMEC	AM-BS-4500E	N/A	Boresight mast 1M~4M	N/A	Feb. 23, 2023	N/A	Radiation (03CH07-HY)
Turn Table	ChainTek	Chaintek 3000	N/A	0~360 Degree	N/A	Feb. 23, 2023	N/A	Radiation (03CH07-HY)
Software	Audix	E3	N/A	N/A	N/A	Feb. 23, 2023	N/A	Radiation (03CH07-HY)
USB Data Logger	TECPEL	TR-32	HE17XB2495	N/A	Mar. 07, 2022	Feb. 23, 2023	Mar. 06, 2023	Radiation (03CH07-HY)
Loop Antenna	Rohde & Schwarz	HFH2-Z2	100488	9 kHz~30 MHz	Sep. 20, 2022	Feb. 23, 2023	Sep. 19, 2023	Radiation (03CH07-HY)
Hygrometer	TECPEL	DTM-303A	TP201996	N/A	Nov. 17, 2022	Jun. 19, 2023	Nov. 16, 2023	RF Near Field (TH03-HY)
Spectrum Analyzer	Rohde & Schwarz	FSP30	101329	9kHz~30GHz	Sep. 27, 2022	Jun. 19, 2023	Sep. 26, 2023	RF Near Field (TH03-HY)
Thermal Chamber	ESPEC	SH-641	92013720	-40°C ~90°C	Sep. 07, 2022	Jun. 19, 2023	Sep. 06, 2023	RF Near Field (TH03-HY)
AC Power Source	AC POWER	AFC-500W	F104070011	50Hz~60Hz	Sep. 16, 2022	Jun. 19, 2023	Sep. 15, 2023	RF Near Field (TH03-HY)



## 5. Measurement Uncertainty

### Uncertainty of Conducted Emission Measurement (150 kHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2Uc(y)$ )	3.5 dB
---	--------

### Uncertainty of Radiated Emission Measurement (9 kHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2Uc(y)$ )	3.8 dB
---	--------

### Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2Uc(y)$ )	6.5 dB
---	--------




## **Appendix A. Test Results of Conducted Emission Test**

# EUT Information

Report NO : 321001-04  
 Test Mode : Mode 1  
 Test Voltage : 120Vac/60Hz  
 Phase : Line

Full Spectrum

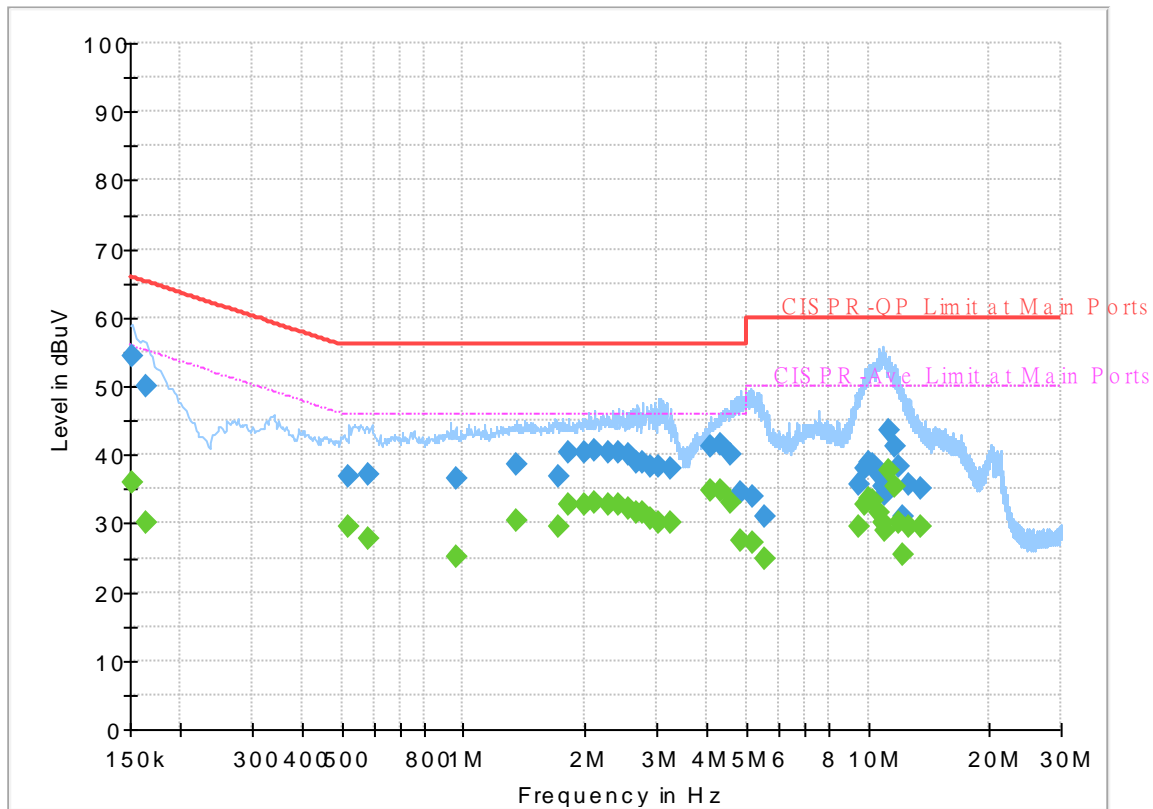

## Final\_Result


Frequency (MHz)	QuasiPeak (dBuV)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Line	Filter	Corr. (dB)
0.152250	---	35.87	55.88	20.01	L1	OFF	19.8
0.152250	54.25	---	65.88	11.63	L1	OFF	19.8
0.163500	---	30.07	55.28	25.21	L1	OFF	19.8
0.163500	50.04	---	65.28	15.24	L1	OFF	19.8
0.521250	---	29.64	46.00	16.36	L1	OFF	19.8
0.521250	36.87	---	56.00	19.13	L1	OFF	19.8
0.579750	---	27.83	46.00	18.17	L1	OFF	19.8
0.579750	37.02	---	56.00	18.98	L1	OFF	19.8
0.955500	---	25.09	46.00	20.91	L1	OFF	19.8
0.955500	36.53	---	56.00	19.47	L1	OFF	19.8
1.351500	---	30.43	46.00	15.57	L1	OFF	19.8
1.351500	38.72	---	56.00	17.28	L1	OFF	19.8
1.718250	---	29.55	46.00	16.45	L1	OFF	19.8
1.718250	36.79	---	56.00	19.21	L1	OFF	19.8
1.824000	---	32.80	46.00	13.20	L1	OFF	19.8
1.824000	40.42	---	56.00	15.58	L1	OFF	19.8
1.986000	---	32.75	46.00	13.25	L1	OFF	19.8
1.986000	40.24	---	56.00	15.76	L1	OFF	19.8
2.116500	---	33.12	46.00	12.88	L1	OFF	19.9
2.116500	40.51	---	56.00	15.49	L1	OFF	19.9
2.287500	---	32.76	46.00	13.24	L1	OFF	19.9

2.287500	40.28	---	56.00	15.72	L1	OFF	19.9
2.411250	---	32.83	46.00	13.17	L1	OFF	19.9
2.411250	40.25	---	56.00	15.75	L1	OFF	19.9
2.566500	---	32.23	46.00	13.77	L1	OFF	19.9
2.566500	40.16	---	56.00	15.84	L1	OFF	19.9
2.694750	---	31.49	46.00	14.51	L1	OFF	19.9
2.694750	38.92	---	56.00	17.08	L1	OFF	19.9
2.773500	---	31.50	46.00	14.50	L1	OFF	19.9
2.773500	38.77	---	56.00	17.23	L1	OFF	19.9
2.913000	---	30.64	46.00	15.36	L1	OFF	19.9
2.913000	38.40	---	56.00	17.60	L1	OFF	19.9
3.050250	---	30.26	46.00	15.74	L1	OFF	19.9
3.050250	38.30	---	56.00	17.70	L1	OFF	19.9
3.234750	---	30.02	46.00	15.98	L1	OFF	19.9
3.234750	38.02	---	56.00	17.98	L1	OFF	19.9
4.087500	---	34.72	46.00	11.28	L1	OFF	19.9
4.087500	41.23	---	56.00	14.77	L1	OFF	19.9
4.328250	---	34.90	46.00	11.10	L1	OFF	19.9
4.328250	41.63	---	56.00	14.37	L1	OFF	19.9
4.593750	---	33.09	46.00	12.91	L1	OFF	19.9
4.593750	39.99	---	56.00	16.01	L1	OFF	19.9
4.868250	---	27.45	46.00	18.55	L1	OFF	19.9
4.868250	34.52	---	56.00	21.48	L1	OFF	19.9
5.199000	---	27.19	50.00	22.81	L1	OFF	19.9
5.199000	33.96	---	60.00	26.04	L1	OFF	19.9
5.572500	---	24.77	50.00	25.23	L1	OFF	19.9
5.572500	31.08	---	60.00	28.92	L1	OFF	19.9
9.494250	---	29.52	50.00	20.48	L1	OFF	20.0
9.494250	35.70	---	60.00	24.30	L1	OFF	20.0
9.786750	---	32.68	50.00	17.32	L1	OFF	20.0
9.786750	38.11	---	60.00	21.89	L1	OFF	20.0
10.072500	---	33.56	50.00	16.44	L1	OFF	20.0
10.072500	38.89	---	60.00	21.11	L1	OFF	20.0
10.225500	---	33.23	50.00	16.77	L1	OFF	20.0
10.225500	38.61	---	60.00	21.39	L1	OFF	20.0
10.603500	---	31.70	50.00	18.30	L1	OFF	20.0
10.603500	37.01	---	60.00	22.99	L1	OFF	20.0
10.846500	---	30.06	50.00	19.94	L1	OFF	20.0
10.846500	35.45	---	60.00	24.55	L1	OFF	20.0
11.008500	---	28.88	50.00	21.12	L1	OFF	20.0
11.008500	34.22	---	60.00	25.78	L1	OFF	20.0
11.265000	---	37.70	50.00	12.30	L1	OFF	20.0
11.265000	43.58	---	60.00	16.42	L1	OFF	20.0
11.593500	---	35.40	50.00	14.60	L1	OFF	20.0
11.593500	41.27	---	60.00	18.73	L1	OFF	20.0
11.931000	---	30.06	50.00	19.94	L1	OFF	20.0
11.931000	38.17	---	60.00	21.83	L1	OFF	20.0
12.228000	---	25.48	50.00	24.52	L1	OFF	20.0
12.228000	30.87	---	60.00	29.13	L1	OFF	20.0
12.691500	---	29.67	50.00	20.33	L1	OFF	20.0
12.691500	35.70	---	60.00	24.30	L1	OFF	20.0
13.560000	---	29.43	50.00	20.57	L1	OFF	20.0
13.560000	35.22	---	60.00	24.78	L1	OFF	20.0

# EUT Information

Report NO : 321001-04  
 Test Mode : Mode 1  
 Test Voltage : 120Vac/60Hz  
 Phase : Neutral

Full Spectrum

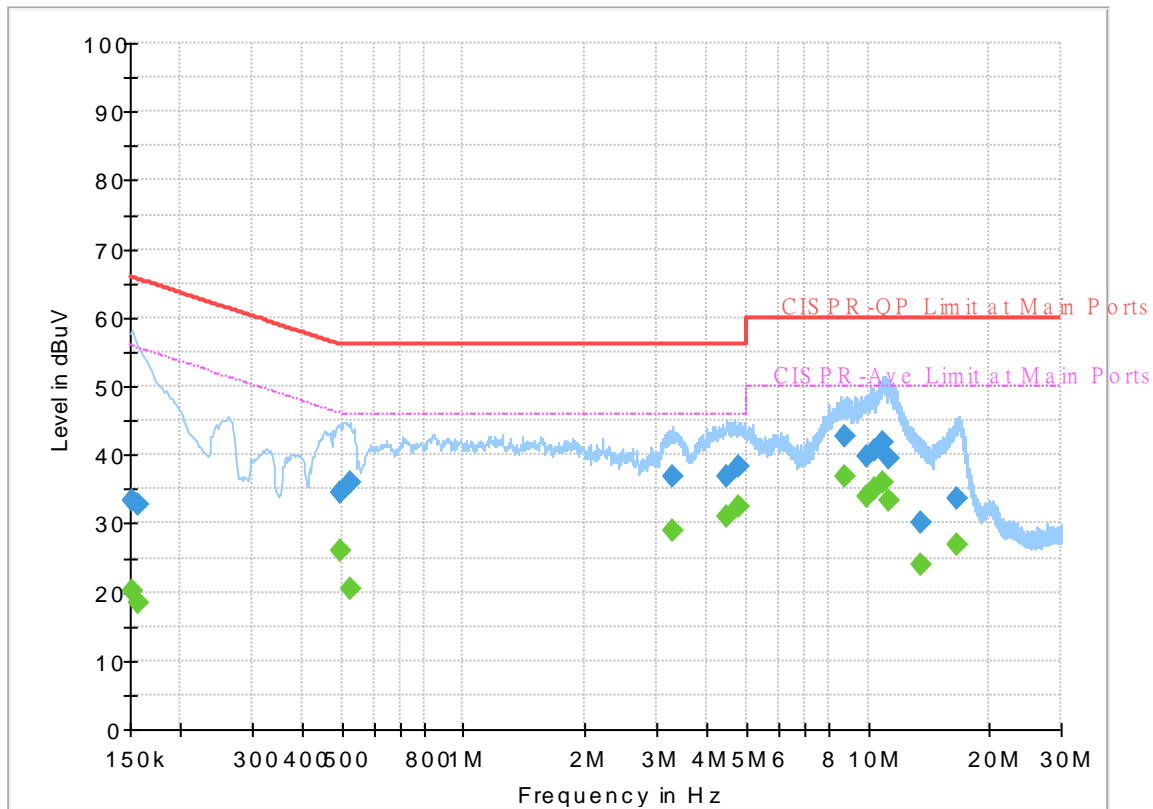

## Final Result

Frequency (MHz)	QuasiPeak (dBuV)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Line	Filter	Corr. (dB)
0.152250	---	20.16	55.88	35.72	N	OFF	19.8
0.152250	33.30	---	65.88	32.58	N	OFF	19.8
0.156750	---	18.48	55.63	37.15	N	OFF	19.8
0.156750	32.84	---	65.63	32.79	N	OFF	19.8
0.496500	---	26.05	46.06	20.01	N	OFF	19.8
0.496500	34.41	---	56.06	21.65	N	OFF	19.8
0.523500	---	20.50	46.00	25.50	N	OFF	19.8
0.523500	35.89	---	56.00	20.11	N	OFF	19.8
3.293250	---	28.89	46.00	17.11	N	OFF	19.9
3.293250	36.96	---	56.00	19.04	N	OFF	19.9
4.472250	---	31.05	46.00	14.95	N	OFF	19.9
4.472250	36.84	---	56.00	19.16	N	OFF	19.9
4.780500	---	32.43	46.00	13.57	N	OFF	19.9
4.780500	38.21	---	56.00	17.79	N	OFF	19.9
8.799000	---	36.72	50.00	13.28	N	OFF	20.0
8.799000	42.65	---	60.00	17.35	N	OFF	20.0
9.982500	---	33.93	50.00	16.07	N	OFF	20.0
9.982500	39.83	---	60.00	20.17	N	OFF	20.0
10.437000	---	34.99	50.00	15.01	N	OFF	20.0
10.437000	40.74	---	60.00	19.26	N	OFF	20.0
10.936500	---	35.90	50.00	14.10	N	OFF	20.0

10.936500	41.83	---	60.00	18.17	N	OFF	20.0
11.310000	---	33.23	50.00	16.77	N	OFF	20.0
11.310000	39.42	---	60.00	20.58	N	OFF	20.0
13.560000	---	23.93	50.00	26.07	N	OFF	20.1
13.560000	30.20	---	60.00	29.80	N	OFF	20.1
16.658250	---	26.84	50.00	23.16	N	OFF	20.1
16.658250	33.62	---	60.00	26.38	N	OFF	20.1





# Appendix B. Test Results of Near Field Test Items

## B1. Test Result of 20dB Spectrum Bandwidth

Test mode	WLC Tx	Test Frequency (MHz)	13.56
Date: 19.JUN.2023 14:41:56		Date: 19.JUN.2023 14:41:15	
<b>20dB Bandwidth (kHz)</b>	2.660	<b>99% OccupiedBW(kHz)</b>	2.240
<b>Frequency range (MHz)</b>	$f_L > 13.553$	13.55894	<b>Test Result</b>
	$f_H < 13.567$	13.56160	<b>Complies</b>

**Remark:** Because the measured signal is CW adjusting the RBW per C63.10 would not be practical since measured bandwidth will always follow the RBW and the result will be approximately twice the RBW.



B2. Test Result of Frequency Stability

Voltage vs. Frequency Stability		Temperature vs. Frequency Stability		
Voltage (Vdc)	Measurement Frequency (MHz)	Temperature (°C)	Time	Measurement Frequency (MHz)
11.5	13.560270	-20	0	13.560220
			2	13.560220
			5	13.560220
			10	13.560220
9	13.560260	-10	0	13.560250
			2	13.560250
			5	13.560240
			10	13.560260
13.2	13.560270	0	0	13.560270
			2	13.560280
			5	13.560270
			10	13.560260
		10	0	13.560280
			2	13.560280
			5	13.560280
			10	13.560280
		20	0	13.560280
			2	13.560280
			5	13.560270
			10	13.560280
		30	0	13.560260
			2	13.560260
			5	13.560260
			10	13.560260
		40	0	13.560260
			2	13.560260
			5	13.560260
			10	13.560260




Voltage vs. Frequency Stability		Temperature vs. Frequency Stability		
Voltage (Vdc)	Measurement Frequency (MHz)	Temperature (°C)	Time	Measurement Frequency (MHz)
		50	0	13.560280
			2	13.560260
			5	13.560280
			10	13.560270
Max.Deviation (MHz)	0.000270	Max.Deviation (MHz)		0.000280
Max.Deviation (ppm)	19.9115	Max.Deviation (ppm)		20.6490
Limit	FS < ±100 ppm	Limit		FS < ±100 ppm
Test Result	PASS	Test Result		PASS




## Appendix C. Test Results of Radiated Test Items

### C1. Test Result of Field Strength of Fundamental Emissions

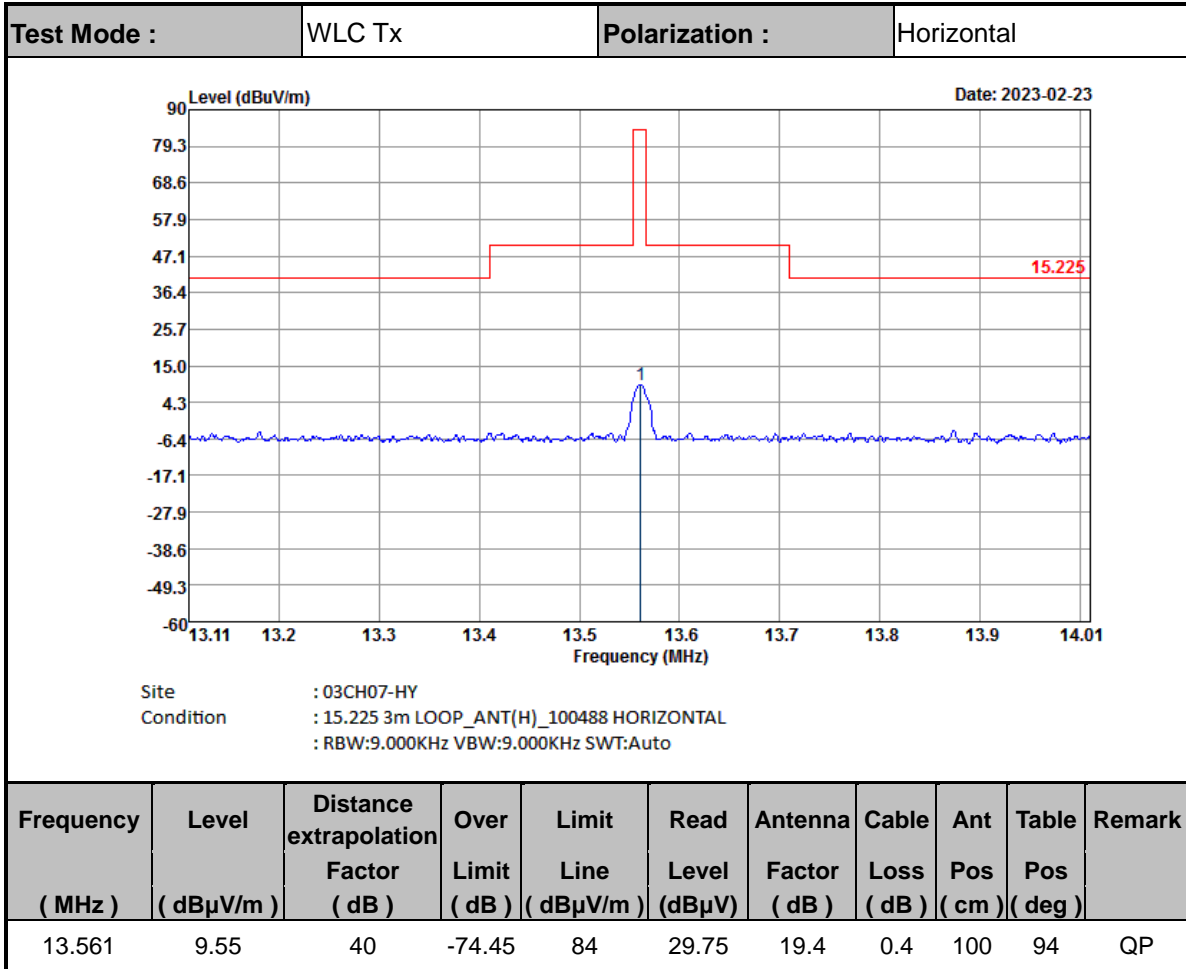



Test Mode :	WLC Tx	Polarization :	Vertical
-------------	--------	----------------	----------

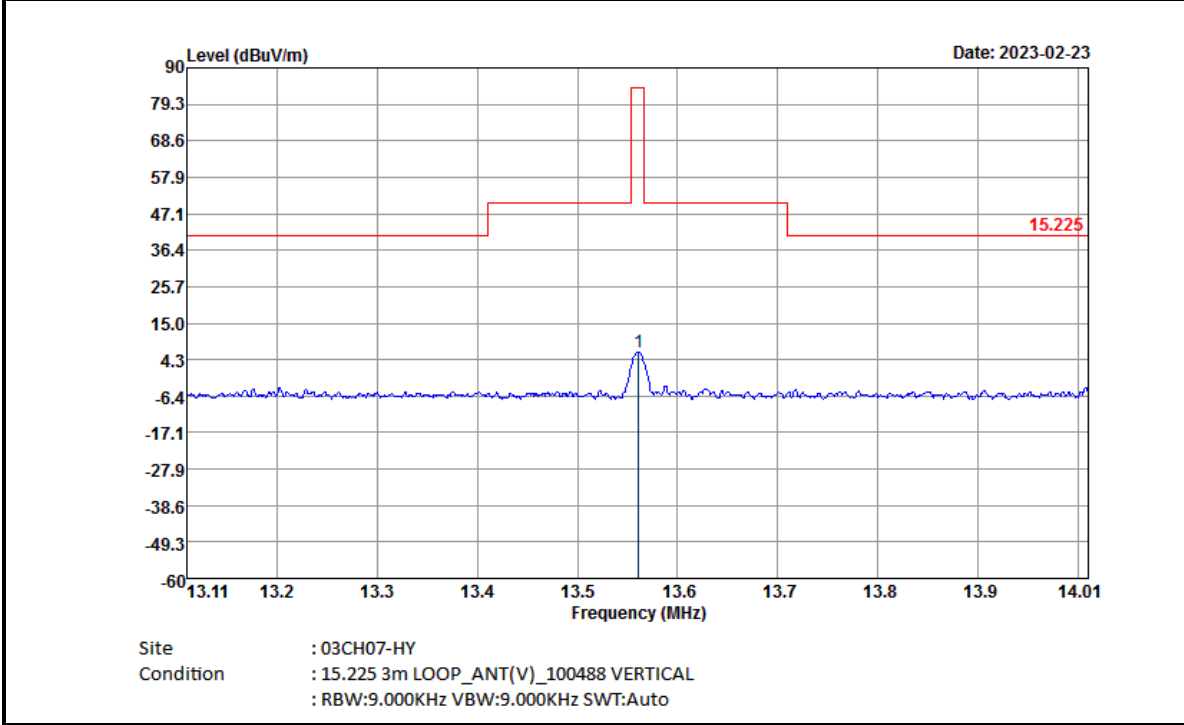

Frequency (MHz)	Level (dBμV/m)	Distance extrapolation Factor (dB)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
13.561	6.55	40	-77.45	84	26.75	19.4	0.4	100	205	QP


**Note :**

- Distance extrapolation factor = 40 log (specific distance / test distance) (dB)
- Level = Antenna Factor + Cable Loss + Read Level - Distance extrapolation factor.



C2. Results of Radiated Spurious Emissions (9 kHz~30MHz)

Test Mode :	WLC Tx	Polarization :	Horizontal
-------------	--------	----------------	------------

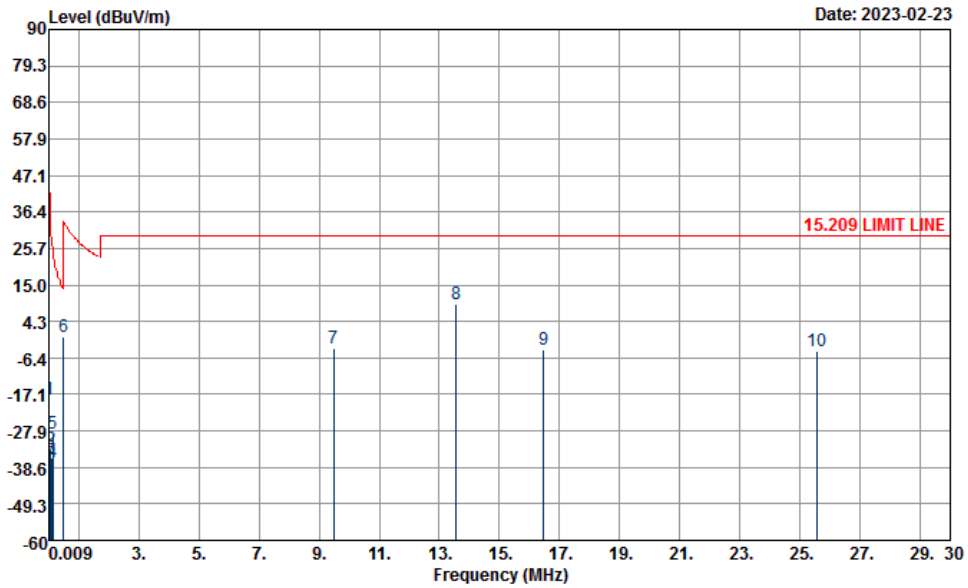


Site : 03CH07-HY  
 Condition : 15.209 LIMIT LINE 3m LOOP ANT(H) 100488 HORIZONTAL

Frequency ( MHz )	Level ( dBμV/m )	Distance extrapolation Factor ( dB )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB )	Cable Loss ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
0.0192	-18.55	80	-60.49	41.94	41.61	19.82	0.02	-	-	Average
0.06	-33.34	80	-65.38	32.04	26.93	19.7	0.03	-	-	Average
0.10256	-35.73	80	-63.11	27.38	24.63	19.6	0.04	-	-	QP
0.15	-36.98	80	-61.06	24.08	23.37	19.6	0.05	-	-	Average
0.15136	-28.64	80	-52.64	24	31.71	19.6	0.05	-	-	Average
0.49	-0.39	40	-14.19	13.8	20.07	19.5	0.04	-	-	QP
9.48	-3.67	40	-33.17	29.5	16.6	19.4	0.33	-	-	QP
13.56	9.55	40	-19.95	29.5	29.75	19.4	0.4	-	-	QP
16.477	-3.89	40	-33.39	29.5	16.21	19.45	0.45	-	-	QP
25.545	-4.41	40	-33.91	29.5	14.8	20.15	0.64	-	-	QP



Test Mode :	WLC Tx	Polarization :	Vertical
-------------	--------	----------------	----------

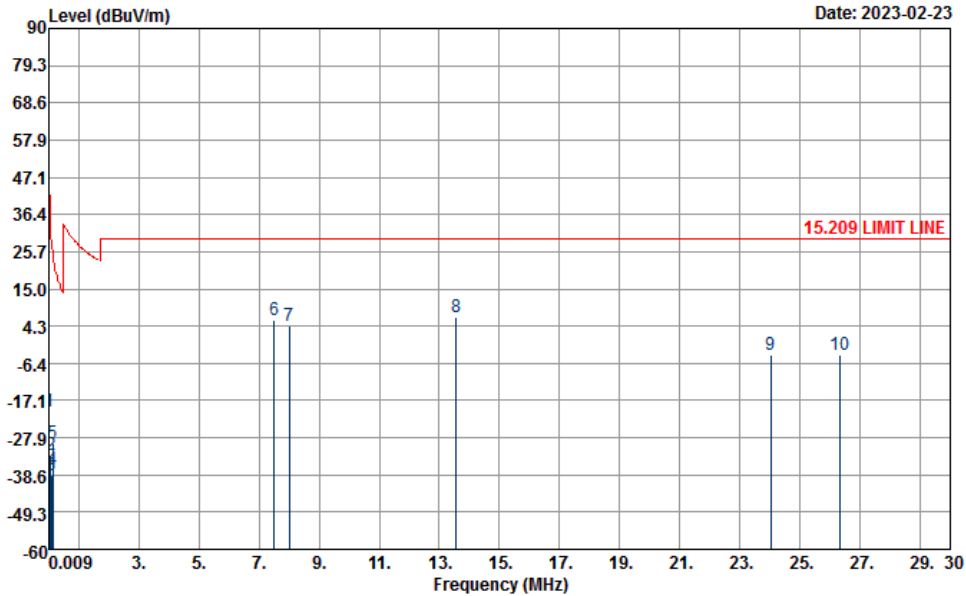

Site : 03CH07-HY  
 Condition : 15.209 LIMIT LINE 3m LOOP ANT(V) 100488 VERTICAL

Frequency ( MHz )	Level ( dBμV/m )	Distance extrapolation Factor ( dB )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB )	Cable Loss ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
0.0192	-20.17	80	-62.11	41.94	39.99	19.82	0.02	-	-	Average
0.06	-32.87	80	-64.91	32.04	27.4	19.7	0.03	-	-	Average
0.09838	-38.72	80	-66.47	27.75	21.62	19.62	0.04	-	-	QP
0.15	-37.19	80	-61.27	24.08	23.16	19.6	0.05	-	-	Average
0.15068	-29.48	80	-53.52	24.04	30.87	19.6	0.05	-	-	Average
7.497	6.05	40	-23.45	29.5	26.25	19.5	0.3	-	-	QP
8	4.41	40	-25.09	29.5	24.6	19.5	0.31	-	-	QP
13.56	6.66	40	-22.84	29.5	26.86	19.4	0.4	-	-	QP
24.037	-4.18	40	-33.68	29.5	15.14	20.1	0.58	-	-	QP
26.31	-4.02	40	-33.52	29.5	15.07	20.2	0.71	-	-	QP


**Note :**

1. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.
2. Distance extrapolation factor = 40 log (specific distance / test distance) (dB)
3. Level = Antenna Factor + Cable Loss + Read Level - Distance extrapolation factor.
4. 13.56 MHz is fundamental signal which can be ignored



C3. Results of Radiated Spurious Emissions (30MHz~1GHz)

Test Mode :	WLC Tx	Polarization :	Horizontal
-------------	--------	----------------	------------

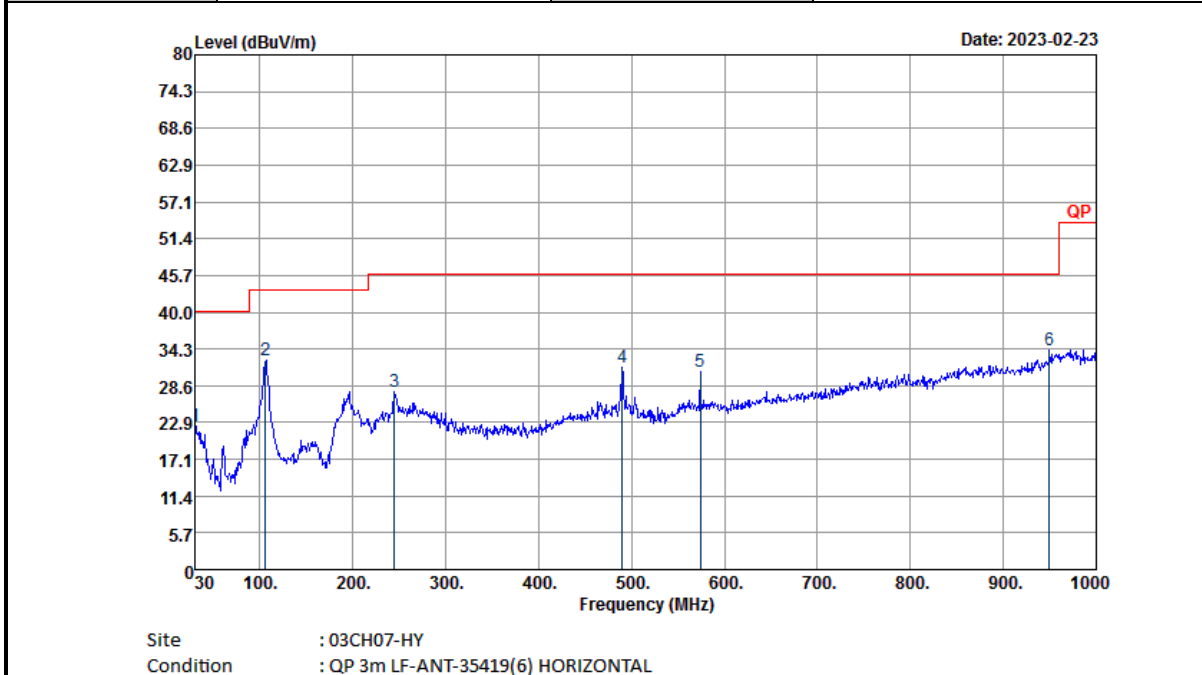


Frequency ( MHz )	Level ( dB $\mu$ V/m )	Over Limit ( dB )	Limit Line ( dB $\mu$ V/m )	Read Level ( dB $\mu$ V )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
30.54	22.25	-17.75	40	27.03	24.27	1.02	30.07	-	-	Peak
106.14	32.46	-11.04	43.5	44.33	16.51	1.62	30	-	-	Peak
244.38	27.65	-18.35	46	37.53	17.54	2.51	29.93	-	-	Peak
489.7	31.44	-14.56	46	34.16	23.62	3.61	29.95	-	-	Peak
573.7	30.76	-15.24	46	31.19	25.66	3.93	30.02	-	-	Peak
949.6	34.06	-11.94	46	27.48	30.27	5.14	28.83	-	-	Peak





Test Mode :	WLC Tx	Polarization :	Vertical
-------------	--------	----------------	----------

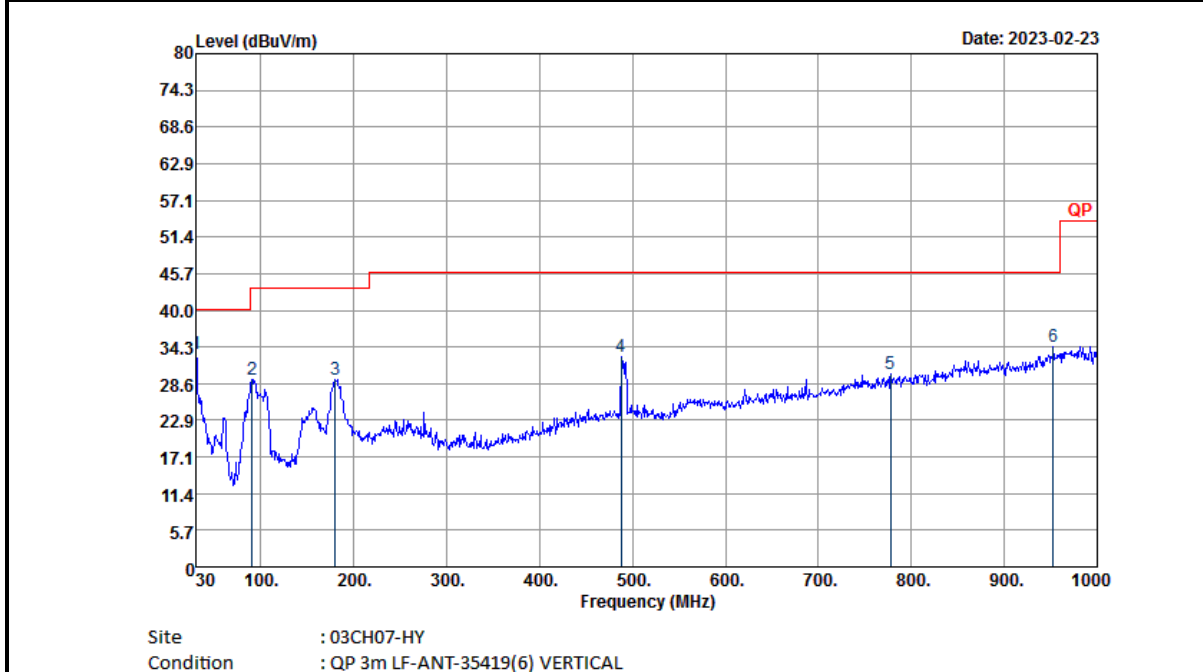

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
30	33.12	-6.88	40	37.68	24.51	1.01	30.08	-	-	Peak
90.21	29.19	-14.31	43.5	43.04	14.6	1.54	29.99	-	-	Peak
179.85	29.28	-14.22	43.5	42.23	14.88	2.18	30.01	-	-	Peak
487.6	32.67	-13.33	46	35.44	23.58	3.6	29.95	-	-	Peak
777.4	30.02	-15.98	46	27.19	27.82	4.66	29.65	-	-	Peak
952.4	34.23	-11.77	46	27.46	30.44	5.15	28.82	-	-	Peak

**Note:**

1. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.
2. Emission level (dBμV/m) = 20 log Emission level (μV/m).
3. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor= Level.
4. The emission position marked as "-" means no suspected emission found with sufficient margin against limit line or noise floor only.