



FCC Test Report

FCC Part 15.407 for UNII Devices

For the
Hewlett Packard Company

Notebook PC

Model Number: HSTNN-W26C

FCC ID: B944965AG

TEST REPORT #: HEWL4_016_07001_15.407a_KEDRON_AG

DATE: 06/20/2007



**FCC
accredited**

CETECOM Inc.

411 Dixon Landing Road • Milpitas, CA 95035 • U.S.A.

Phone: + 1 (408) 586 6200 • Fax: + 1 (408) 586 6299 • E-mail: info@cetecomusa.com • <http://www.cetecom.com>

CETECOM Inc. is a Delaware Corporation with Corporation number: 2113686

Board of Directors: Dr. Harald Ansorge, Dr. Klaus Matkey, Hans Peter May

© Copyright by CETECOM



TABLE OF CONTENTS

1	Assessment	3
	Technical responsibility for area of testing:	3
	EMC & Radio	3
	This report is prepared by:	3
	EMC & Radio	3
2	Administrative Data	4
2.1	Identification of the Testing Laboratory	4
2.2	Identification of the Client	4
2.3	Identification of the Manufacturer	4
3	Equipment under Test (EUT)	5
3.1	Specification of the Equipment under Test	5
4	Subject Of Investigation	6
5	Measurements	7
5.1	MAXIMUM PEAK OUTPUT POWER § 15.407 (RADIATED)	7
5.1.1	EIRP 802.11 (a) MODE:	7
5.2	RESTRICTED BAND EDGE COMPLIANCE RADIATED §15.407(b)/15.205	14
5.2.1	LIMITS	14
5.2.2	802.11 (a) MODE (5180MHz) Chain A	15
5.2.3	802.11 (a) MODE (5180MHz) Chain B	17
5.2.4	802.11 (a) MODE (5320MHz) Chain A	19
5.2.5	802.11 (a) MODE (5320MHz) Chain B	21
5.3	TRANSMITTER SPURIOUS EMISSIONS RADIATED § 15.407(b)/15.205/15.209	23
5.3.1	LIMITS	23
5.3.2	RESULTS 802.11 (a) MODE Chain A	24
5.3.3	RESULTS 802.11 (a) MODE Chain B	32
5.4	AC POWER LINE CONDUCTED EMISSIONS § 15.107/207	40
5.4.1	LIMITS	40
5.4.2	RESULTS	41
6	TEST EQUIPMENT AND ANCILLARIES USED FOR TESTS	43
6.1	BLOCK DIAGRAMS	44

Test Report #: HEWL4_016_07001_15.407a_KEDRON_AG

Date of Report: 6/20/2007

Page 3 of 44



1 Assessment

The following is in compliance with the applicable criteria specified in FCC rules Part 15.407 of the Code of Federal Regulations.

Company	Description	Model #
Hewlett Packard Company	Notebook PC	HSTNN-W26C

Technical responsibility for area of testing:

Peter Mu

06-20-07 EMC & Radio (EMC Project Engineer)

Date	Section	Name	Signature
-------------	----------------	-------------	------------------

This report is prepared by:

Satya Radhakrishna

06-20-07 EMC & Radio (EMC Project Engineer)

Date	Section	Name	Signature
-------------	----------------	-------------	------------------

The test results of this test report relate exclusively to the test item specified in Identification of the Equipment under Test. The CETECOM Inc. USA does not assume responsibility for any conclusions and generalizations drawn from the test results with regard to other specimens or samples of the type of the equipment represented by the test item. The test report may only be reproduced or published in full. Reproduction or publication of extracts from the report requires the prior written approval of the CETECOM Inc USA.



2 Administrative Data

2.1 Identification of the Testing Laboratory

Company Name:	CETECOM Inc.
Department:	EMC
Address:	411 Dixon Landing Road Milpitas, CA 95035 U.S.A.
Telephone:	+1 (408) 586 6200
Fax:	+1 (408) 586 6299
Responsible Test Lab Manager:	Lothar Schmidt

2.2 Identification of the Client

Applicant's Name:	Hewlett Packard Company
Address Line 1:	20555 SH 249
Address Line 2:	MS 1208-10
City/ Zip Code	Houston, TX 77070
Country:	U.S.A
Contact Person:	Glenn Meyer
Phone No.:	281-514-9391
Fax:	281-518-0979
e-mail:	Glenn.meyer@hp.com

2.3 Identification of the Manufacturer

Manufacturer's Name:	Hewlett Packard Company
Manufacturer's Address:	20555 SH 249, MS 1208-10, Houston, TX 77070, U.S.A



3 Equipment under Test (EUT)

3.1 Specification of the Equipment under Test

Product Type	Notebook PC
Marketing Name:	HP Compaq 2701p notebook PC
Model No:	HSTNN-W26C
HW Version:	1.0
SW Version :	N/A
Min/Nominal/Max Voltage:	18.5 V/19 V/ 19 V
Type(s) of Modulation:	OFDM
Antenna Type:	Stamped metal, 3dBi/2.4GHz; 5dBi/5GHz
Output Power ¹ :	20.27 dBm (0.1064W) EIRP WLAN 802.11a



4 Subject Of Investigation

All testing was performed on the product referred to in Section 3 as EUT. EUT contains Intel 4965AG WLAN module, FCC ID: B944965AG, which supports the following mode and frequency bands:

2400-2483.4MHz: 802.11b, 802.11g

5150-5350MHz: 802.11a

5725-5850MHz: 802.11a

The objective of the measurements done by Cetecom Inc. was to measure the performance of the EUT operating under 802.11a mode in the 5150-5350MHz range as specified by requirements listed in FCC rules Part 15.407 of Title 47 of the Code of Federal Regulations. The maximization of portable equipment is conducted in accordance with ANSI C63.4

5 Measurements

5.1 MAXIMUM PEAK OUTPUT POWER § 15.407 (RADIATED)

5.1.1 EIRP 802.11 (a) MODE:

TEST CONDITIONS			MAXIMUM PEAK OUTPUT POWER (dBm)		
Frequency (MHz)			5180	5260	5320
Chain A	T _{nom} (23)°C	V _{nom} VDC	20.27	20.24	19.63
Chain B	T _{nom} (23)°C	V _{nom} VDC	19.60	18.49	15.39
Measurement uncertainty			±0.5dBm		

Test Report #: HEWL4_016_07001_15.407a_KEDRON_AG

Date of Report: 6/20/2007

Page 8 of 44



EIRP 802.11 (a) Mode (5180) Chain A

CETECOM Inc., 411 Dixon Landing Road, Milpitas CA 95035, USA

EUT: Kedron AG

Customer: HP Texas

Test Mode: WLAN 802.11a, 6 Mbps, ch36, chain a

ANT Orientation: H

EUT Orientation: H

Test Engineer: Satya Radhakrishna

Power Supply: AC Adapter

SWEEP TABLE: "EIRP 802.11a 36"


Short Description: EIRP

Unit: dBm Detector: MaxPeak

RBW: 10MHZ VBW:10MHZ

Marker: 5.176442886 GHz 20.27 dBm

Level [dBm]

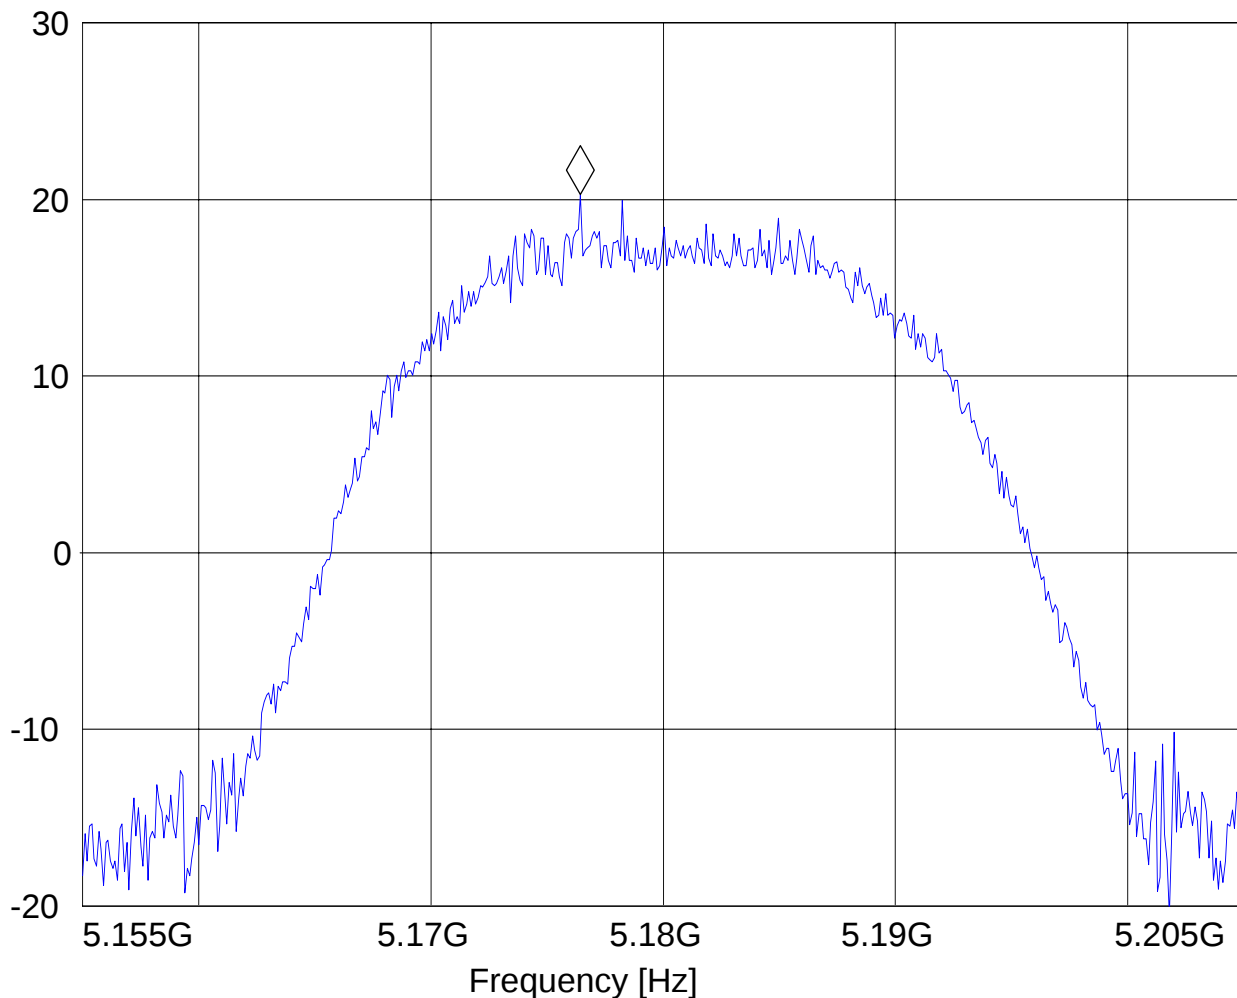

Test Report #: HEWL4_016_07001_15.407a_KEDRON_AG

Date of Report: 6/20/2007

Page 9 of 44



EIRP 802.11 (a) Mode (5260MHz) Chain A

CETECOM Inc., 411 Dixon Landing Road, Milpitas CA 95035, USA

EUT: Kedron AG

Customer: HP Texas

Test Mode: WLAN 802.11a, 6 Mbps, ch52, chain a

ANT Orientation: H

EUT Orientation: H

Test Engineer: Satya Radhakrishna

Power Supply: AC Adapter

SWEEP TABLE: "EIRP 802.11a 52"


Short Description: EIRP

Unit: dBm Detector: MaxPeak

RBW: 10MHZ VBW:10MHZ

Marker: 5.257845691 GHz 20.24 dBm

Level [dBm]

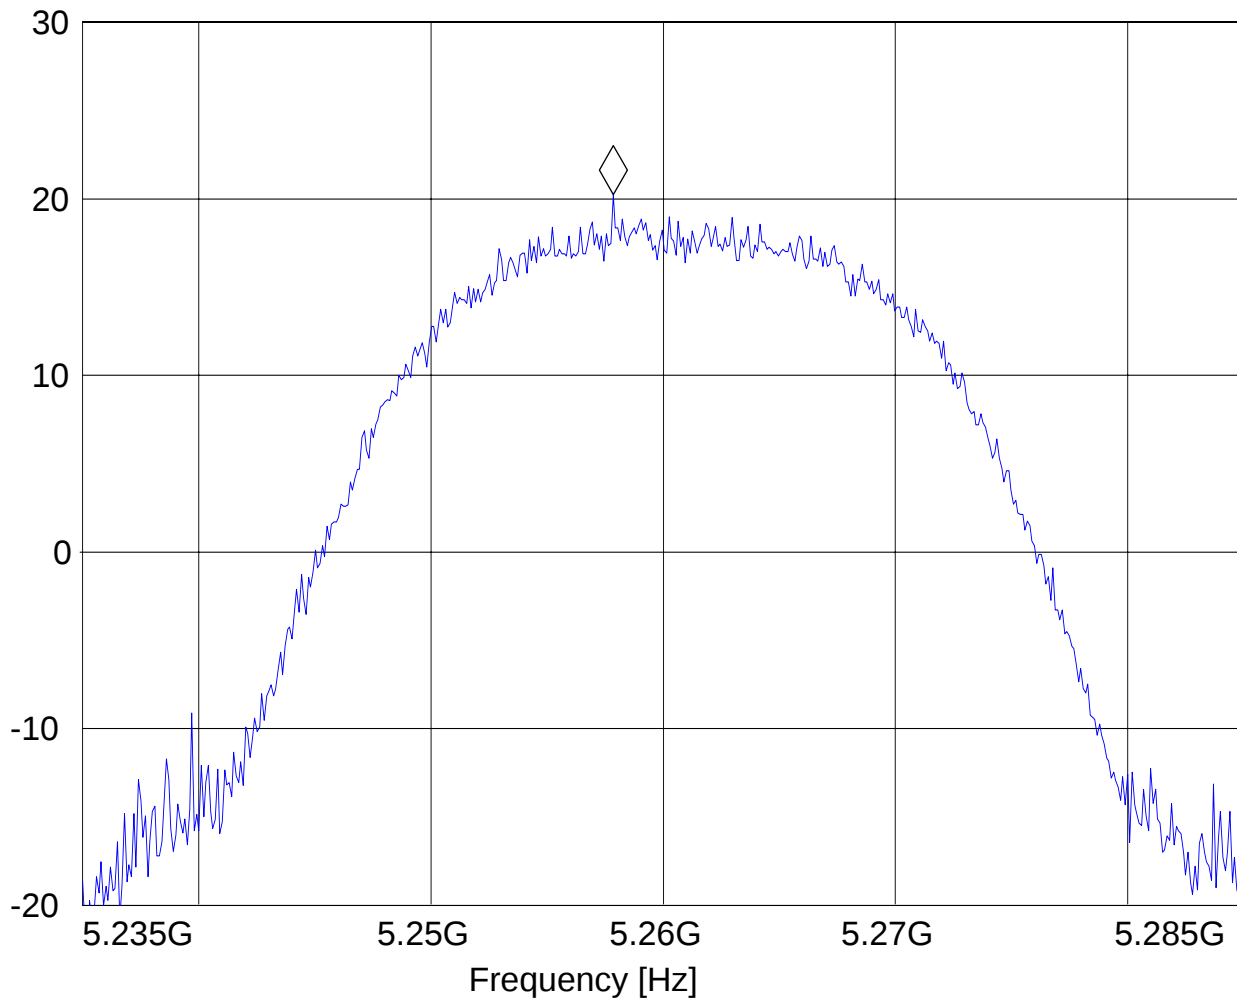

Test Report #: HEWL4_016_07001_15.407a_KEDRON_AG

Date of Report: 6/20/2007

Page 10 of 44



EIRP 802.11 (a) Mode (5320MHz) Chain A

CETECOM Inc., 411 Dixon Landing Road, Milpitas CA 95035, USA

EUT: Kedron AG

Customer: HP Texas

Test Mode: WLAN 802.11a, 6 Mbps, ch64, chain a

ANT Orientation: H

EUT Orientation: H

Test Engineer: Satya Radhakrishna

Power Supply: AC Adapter

SWEEP TABLE: "EIRP 802.11a 64"


Short Description: EIRP

Unit: dBm Detector: MaxPeak

RBW: 10MHZ VBW:10MHZ

Marker: 5.318146293 GHz 19.63 dBm

Level [dBm]

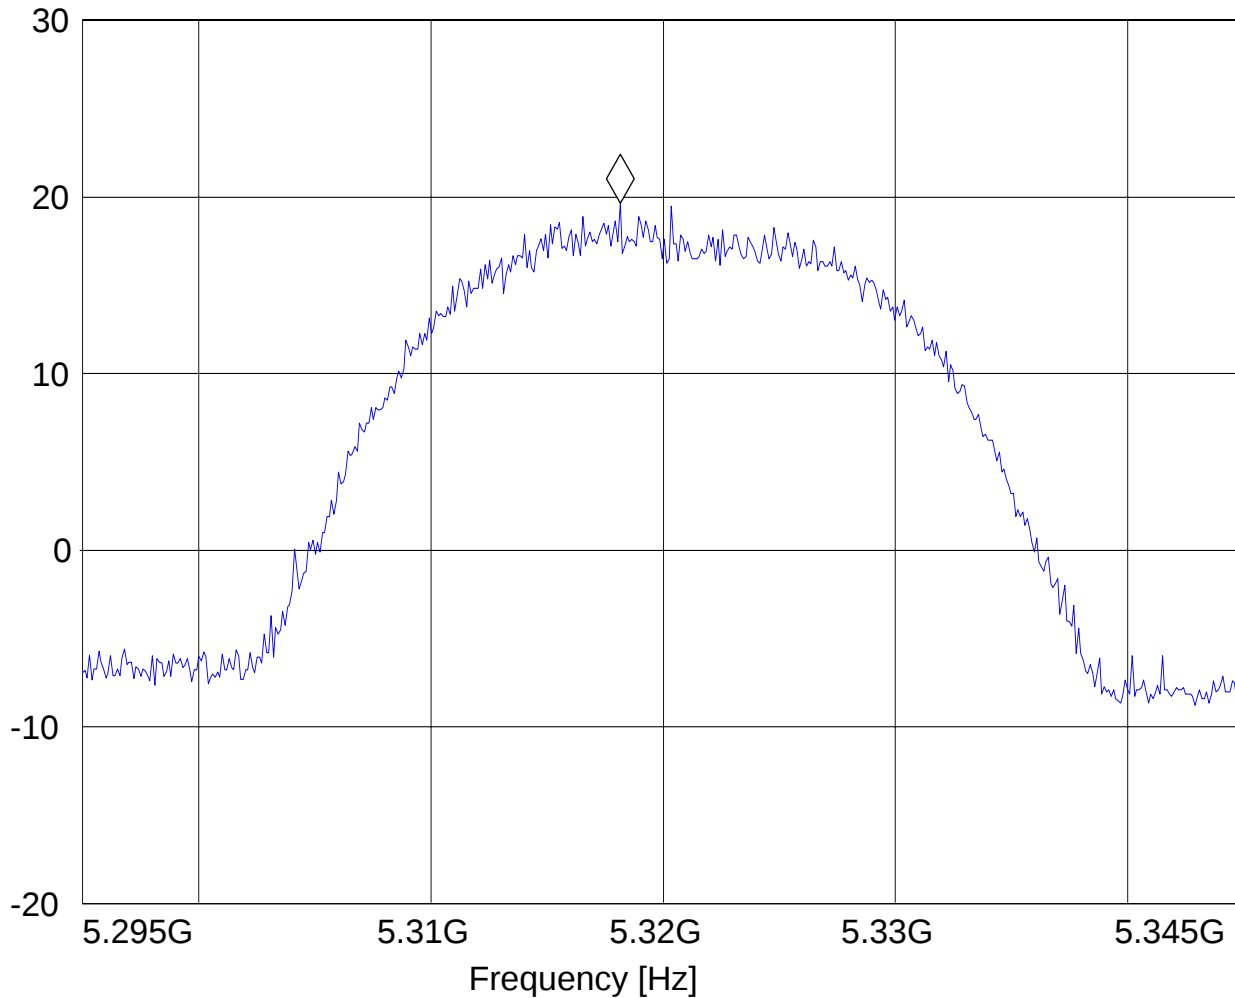

Test Report #: HEWL4_016_07001_15.407a_KEDRON_AG

Date of Report: 6/20/2007

Page 11 of 44



EIRP 802.11 (a) Mode (5180) Chain B

CETECOM Inc., 411 Dixon Landing Road, Milpitas CA 95035, USA

EUT: Kedron AG

Customer: HP Texas

Test Mode: WLAN 802.11a, 6 Mbps, ch36, chain b

ANT Orientation: H

EUT Orientation: H

Test Engineer: Satya Radhakrishna

Power Supply: AC Adapter

SWEEP TABLE: "EIRP 802.11a 36"


Short Description: EIRP

Unit: dBm Detector: MaxPeak

RBW: 10MHZ VBW:10MHZ

Marker: 5.180651303 GHz 19.6 dBm

Level [dBm]

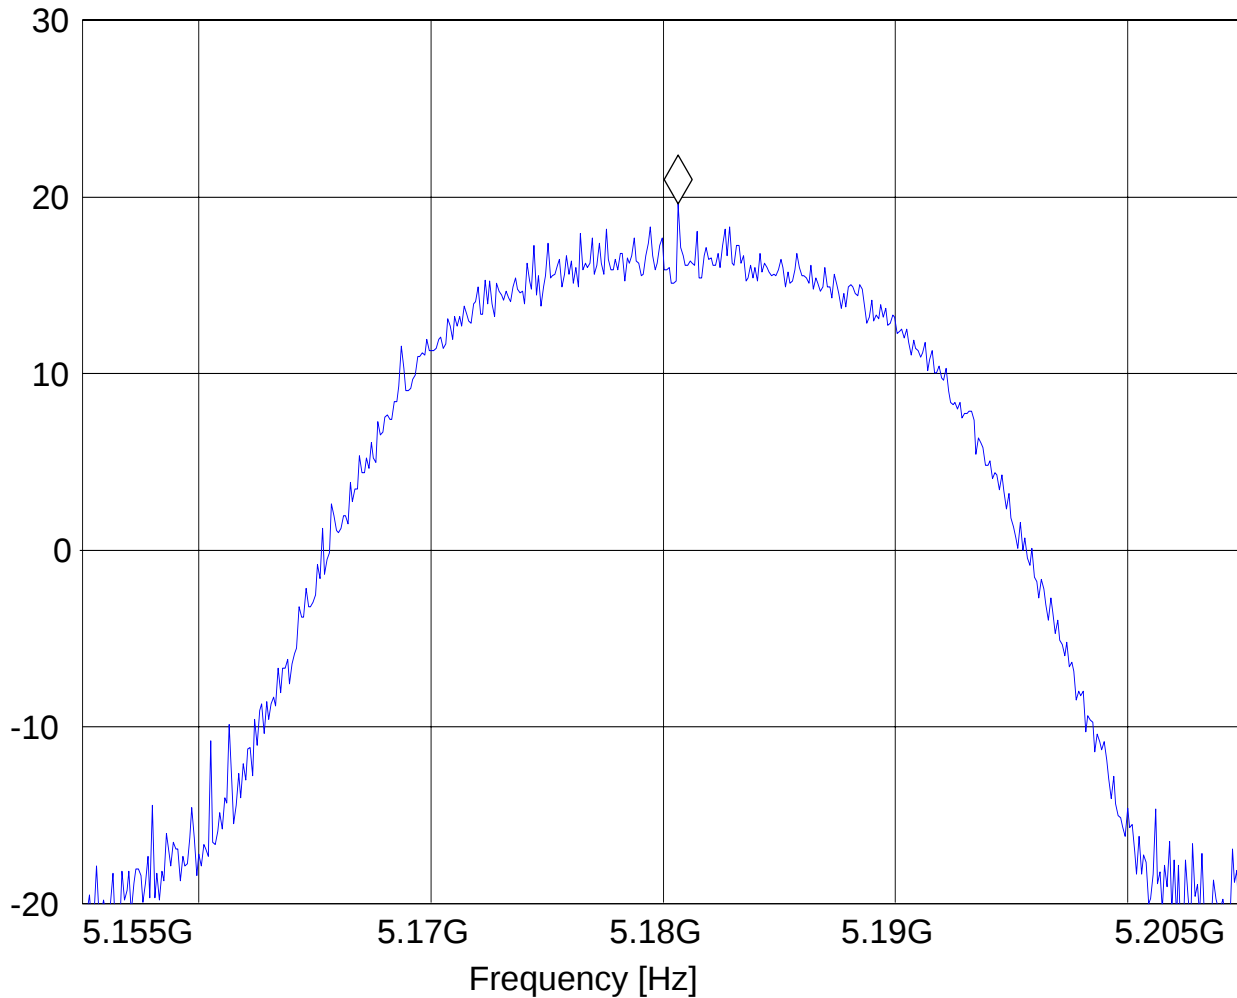



EIRP 802.11 (a) Mode (5260MHz) Chain B


CETECOM Inc., 411 Dixon Landing Road, Milpitas CA 95035, USA

EUT: Kedron AG
Customer: HP Texas
Test Mode: WLAN 802.11a, 6 Mbps, ch52, chain b
ANT Orientation: H
EUT Orientation: H
Test Engineer: Satya Radhakrishna
Power Supply: AC Adapter

SWEEP TABLE: "EIRP 802.11a 52"

Short Description: EIRP
Unit: dBm Detector: MaxPeak RBW: 10MHZ VBW:10MHZ

Marker: 5.259348697 GHz 18.49 dBm

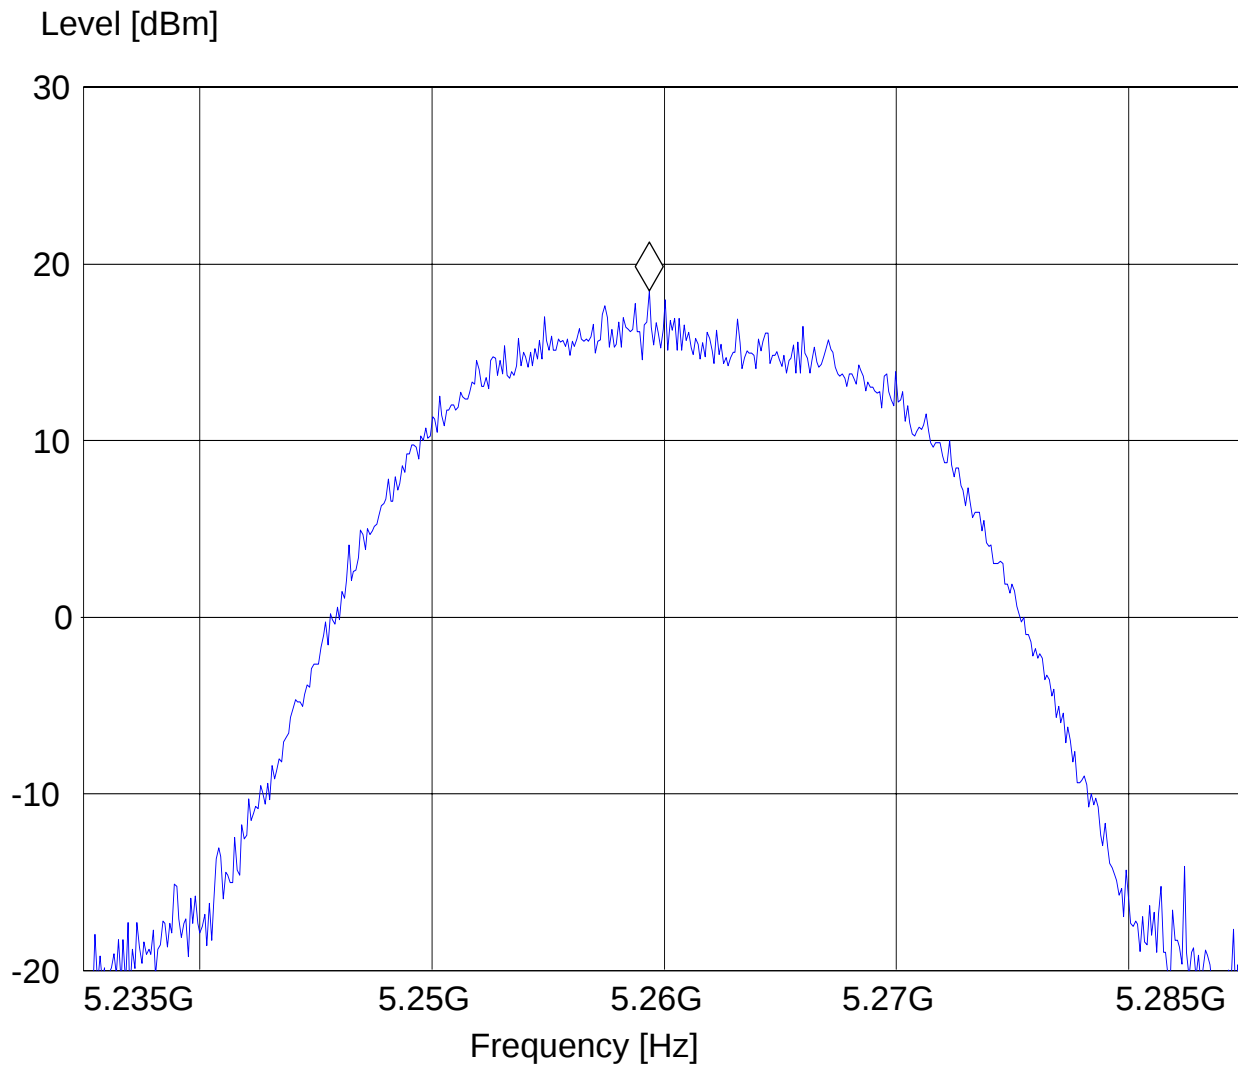

Test Report #: HEWL4_016_07001_15.407a_KEDRON_AG

Date of Report: 6/20/2007

Page 13 of 44



EIRP 802.11 (a) Mode (5320MHz) Chain B

CETECOM Inc., 411 Dixon Landing Road, Milpitas CA 95035, USA

EUT: Kedron AG

Customer: HP Texas

Test Mode: WLAN 802.11a, 6 Mbps, ch64, chain b

ANT Orientation: H

EUT Orientation: H

Test Engineer: Satya Radhakrishna

Power Supply: AC Adapter


SWEEP TABLE: "EIRP 802.11a 64"

Short Description: EIRP

Unit: dBm Detector: MaxPeak

RBW: 10MHZ VBW:10MHz

Marker: 5.319649299 GHz 15.34 dBm

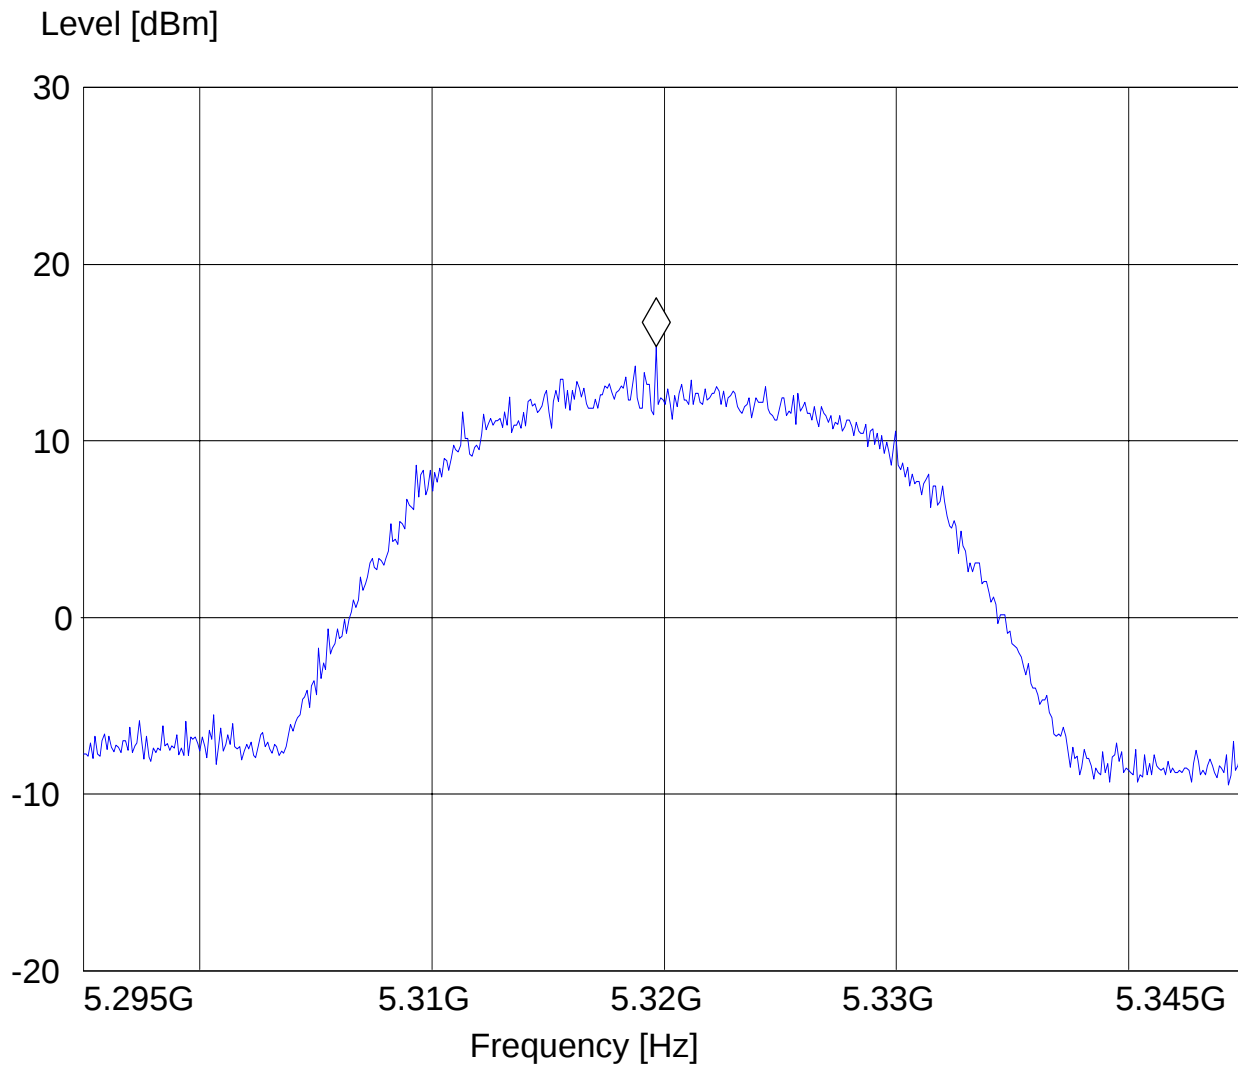

5.2 RESTRICTED BAND EDGE COMPLIANCE RADIATED §15.407(b)/15.205

5.2.1 LIMITS

(a) Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
¹ 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2690 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	(²)
13.36 - 13.41			

*PEAK LIMIT= 74dB μ V/m

*AVG. LIMIT= 54dB μ V/m

**5.2.2 802.11 (a) MODE (5180MHz) Chain A****PEAK****CETECOM Inc., 411 Dixon Landing Road, Milpitas CA 95035, USA**

EUT: Kedron AG

Customer: HP Texas

Test Mode: WLAN 802.11a, 6 Mbps, ch36, chain a

ANT Orientation: H

EUT Orientation: H

Test Engineer: Satya R

Power Supply: AC Adapter

SWEEP TABLE: "FCC15.407 A_LBE_PK"

Unit: dBμV/m


Detector:

Mode:

Curve 1: MaxPeak MaxHold VBW: 1MHz RBW: 1MHz

Marker: 5.141603206 GHz 62.83 dBμV/m

Level [dBμV/m]

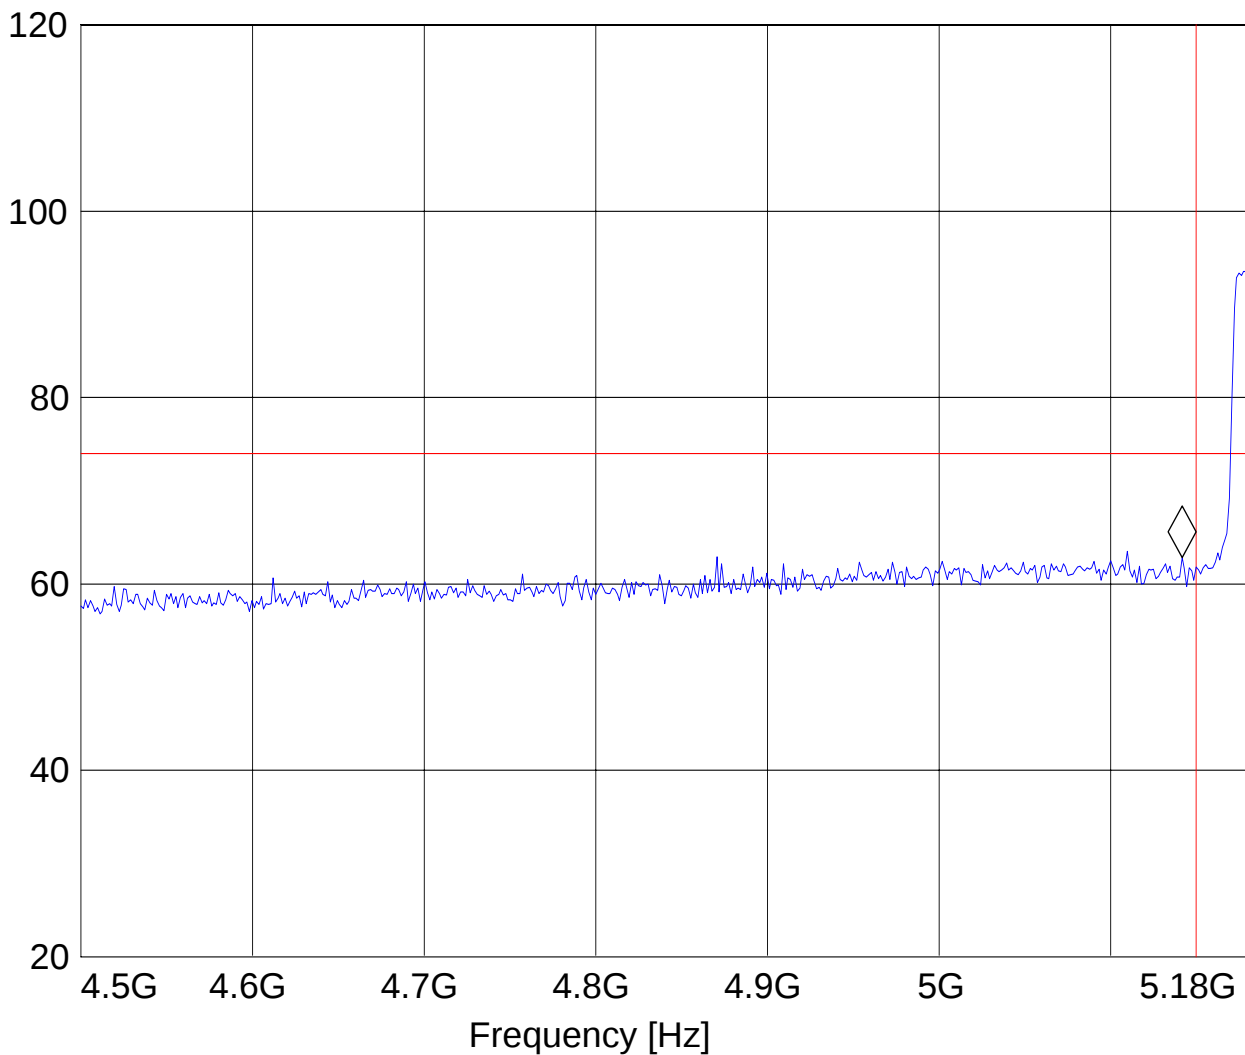

Test Report #: HEWL4_016_07001_15.407a_KEDRON_AG

Date of Report: 6/20/2007

Page 16 of 44



802.11 (a) MODE (5180MHz) Chain A

AVG

CETECOM Inc., 411 Dixon Landing Road, Milpitas CA 95035, USA

EUT: Kedron AG

Customer: HP Texas

Test Mode: WLAN 802.11a, 6 Mbps, ch36, chain a

ANT Orientation: H

EUT Orientation: H

Test Engineer: Satya R

Power Supply: AC Adapter

SWEEP TABLE: "FCC15.407 A_LBE_AVG"

Unit: dBμV/m


Detector:

Mode:

Curve 1: MaxPeak MaxHold VBW: 1MHz RBW: 1MHz

Marker: 5.137294589 GHz 50.39 dBμV/m

Level [dBμV/m]

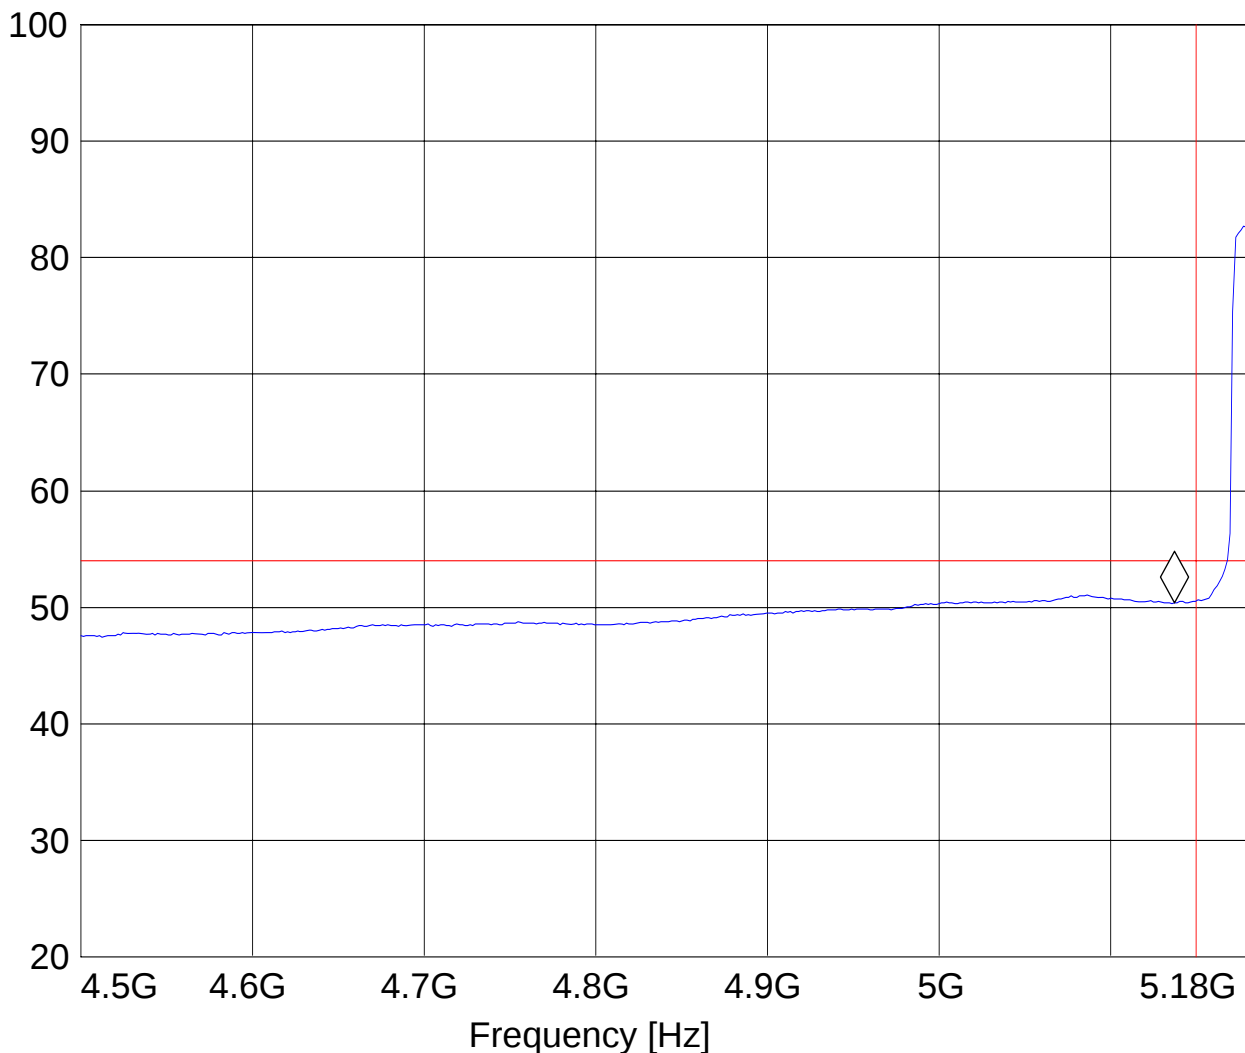

**5.2.3 802.11 (a) MODE (5180MHz) Chain B****PEAK****CETECOM Inc., 411 Dixon Landing Road, Milpitas CA 95035, USA**

EUT: Kedron AG

Customer: HP Texas

Test Mode: WLAN 802.11a, 6 Mbps, ch36, chain b

ANT Orientation: H

EUT Orientation: H

Test Engineer: Satya R

Power Supply: AC Adapter

SWEEP TABLE: "FCC15.407 A_LBE_PK"

Unit: dBμV/m


Detector:

Mode:

Curve 1: MaxPeak MaxHold VBW: 1MHz RBW: 1MHz

Marker: 5.130541082 GHz 62.96 dBμV/m

Level [dBμV/m]

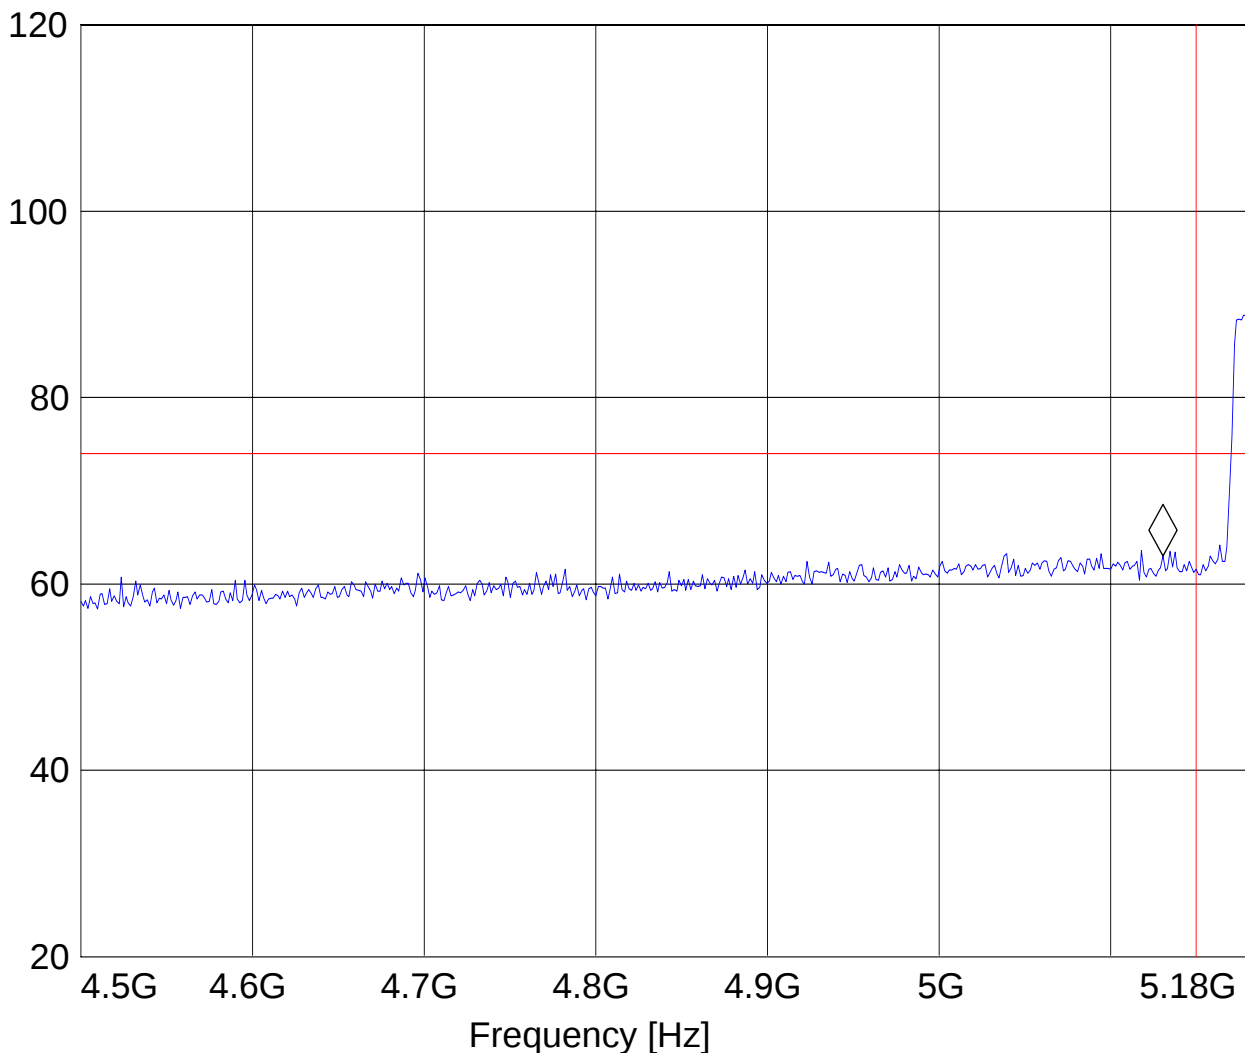

Test Report #: HEWL4_016_07001_15.407a_KEDRON_AG

Date of Report: 6/20/2007

Page 18 of 44



802.11 (a) MODE (5180MHz) Chain B

AVG

CETECOM Inc., 411 Dixon Landing Road, Milpitas CA 95035, USA

EUT: Kedron AG

Customer: HP Texas

Test Mode: WLAN 802.11a, 6 Mbps, ch36, chain b

ANT Orientation: H

EUT Orientation: H

Test Engineer: Satya R

Power Supply: AC Adapter

SWEEP TABLE: "FCC15.407 A_LBE_AVG"

Unit: dBμV/m


Detector:

Mode:

Curve 1: MaxPeak MaxHold VBW: 1MHz RBW: 1MHz

Marker: 5.140380762 GHz 50.45 dBμV/m

Level [dBμV/m]

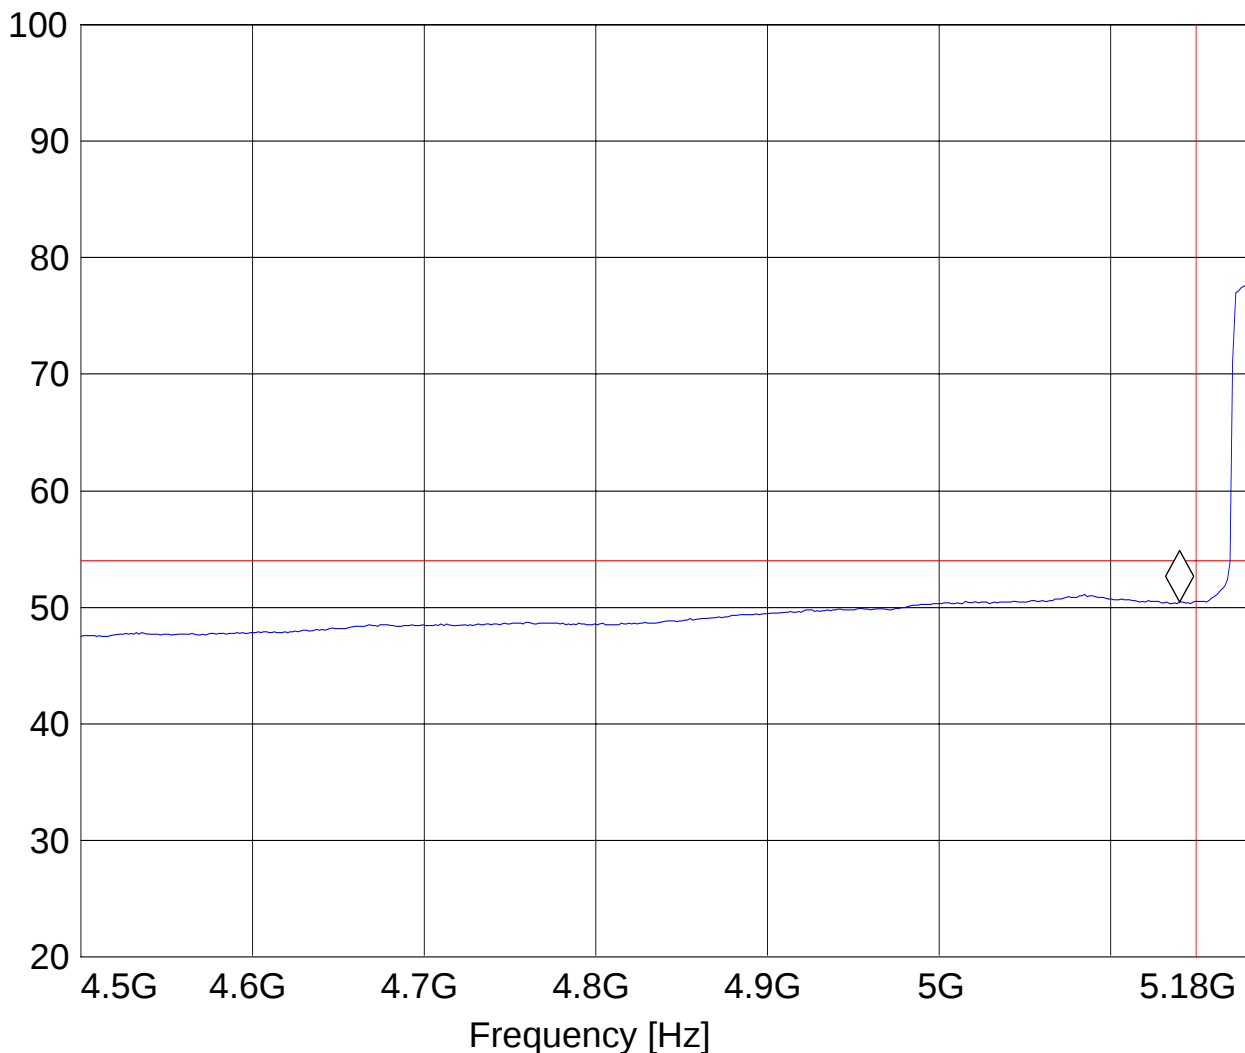



5.2.4 802.11 (a) MODE (5320MHz) Chain A

PEAK

CETECOM Inc., 411 Dixon Landing Road, Milpitas CA 95035, USA


EUT: Kedron AG
Customer: HP Texas
Test Mode: WLAN 802.11a, 6 Mbps, ch64, chain a
ANT Orientation: H
EUT Orientation: H
Test Engineer: Satya R
Power Supply: AC Adapter

SWEEP TABLE: "FCC15.407 A_HBE_PK"

Unit: dBμV/m
Detector: Mode:
Curve 1: MaxPeak MaxHold VBW: 1MHz RBW: 1MHz

Marker: 5.355511022 GHz 52.96 dBμV/m

Level [dBμV/m]

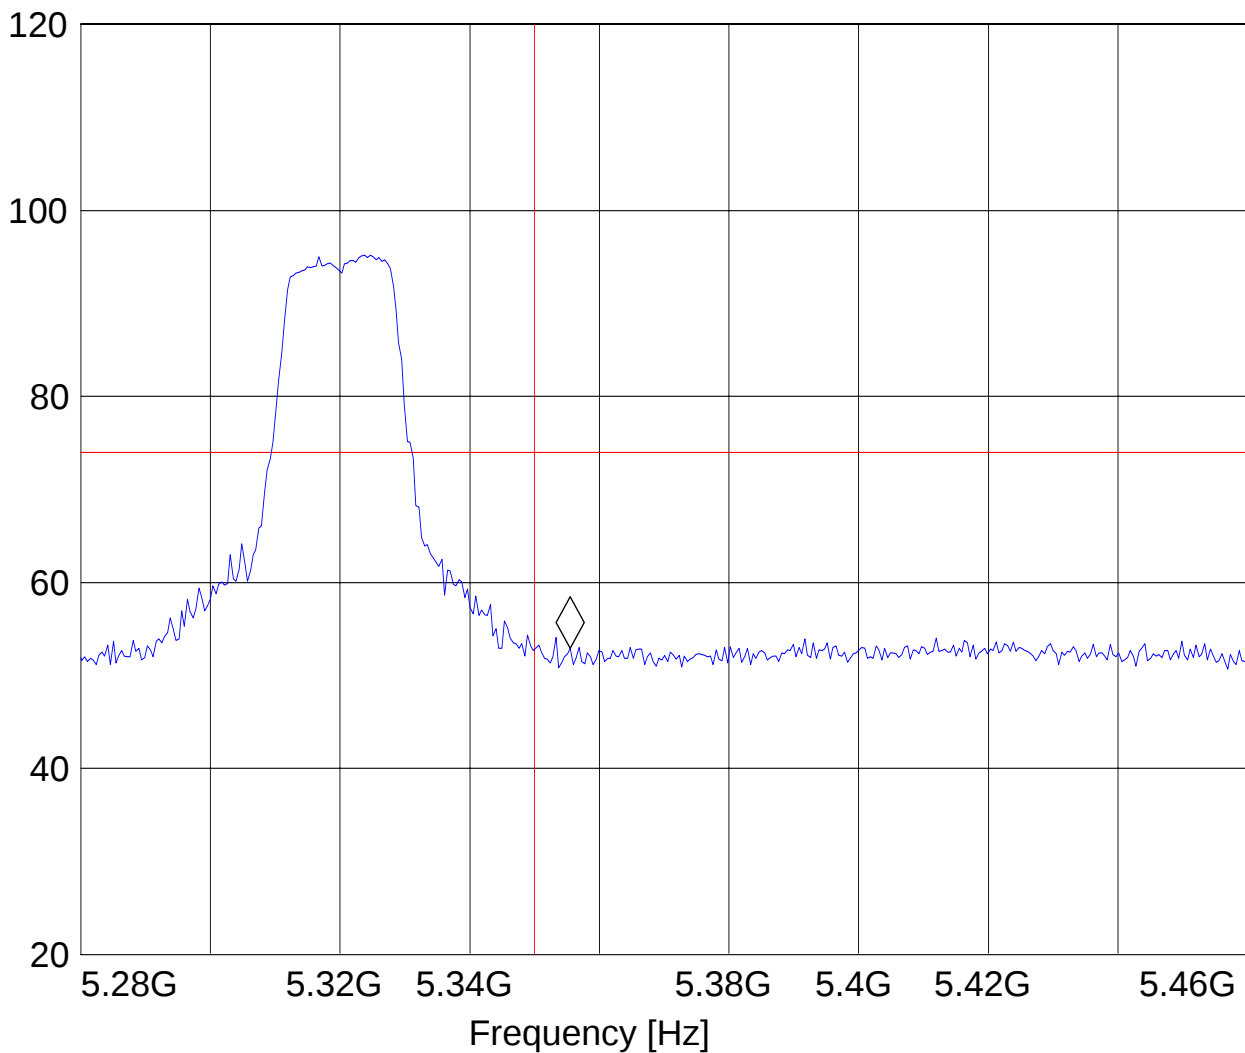

**802.11 (a) MODE (5320MHz) Chain A****AVG****CETECOM Inc., 411 Dixon Landing Road, Milpitas CA 95035, USA**

EUT: Kedron AG

Customer: HP Texas

Test Mode: WLAN 802.11a, 6 Mbps, ch64, chain a

ANT Orientation: H

EUT Orientation: H

Test Engineer: Satya R

Power Supply: AC Adapter

SWEEP TABLE: "FCC15.407 A_HBE_AVG"

Unit: dBμV/m


Detector:

Mode:

Curve 1: MaxPeak MaxHold VBW: 1MHz RBW: 1MHz

Marker: 5.355511022 GHz 40.86 dBμV/m

Level [dBμV/m]

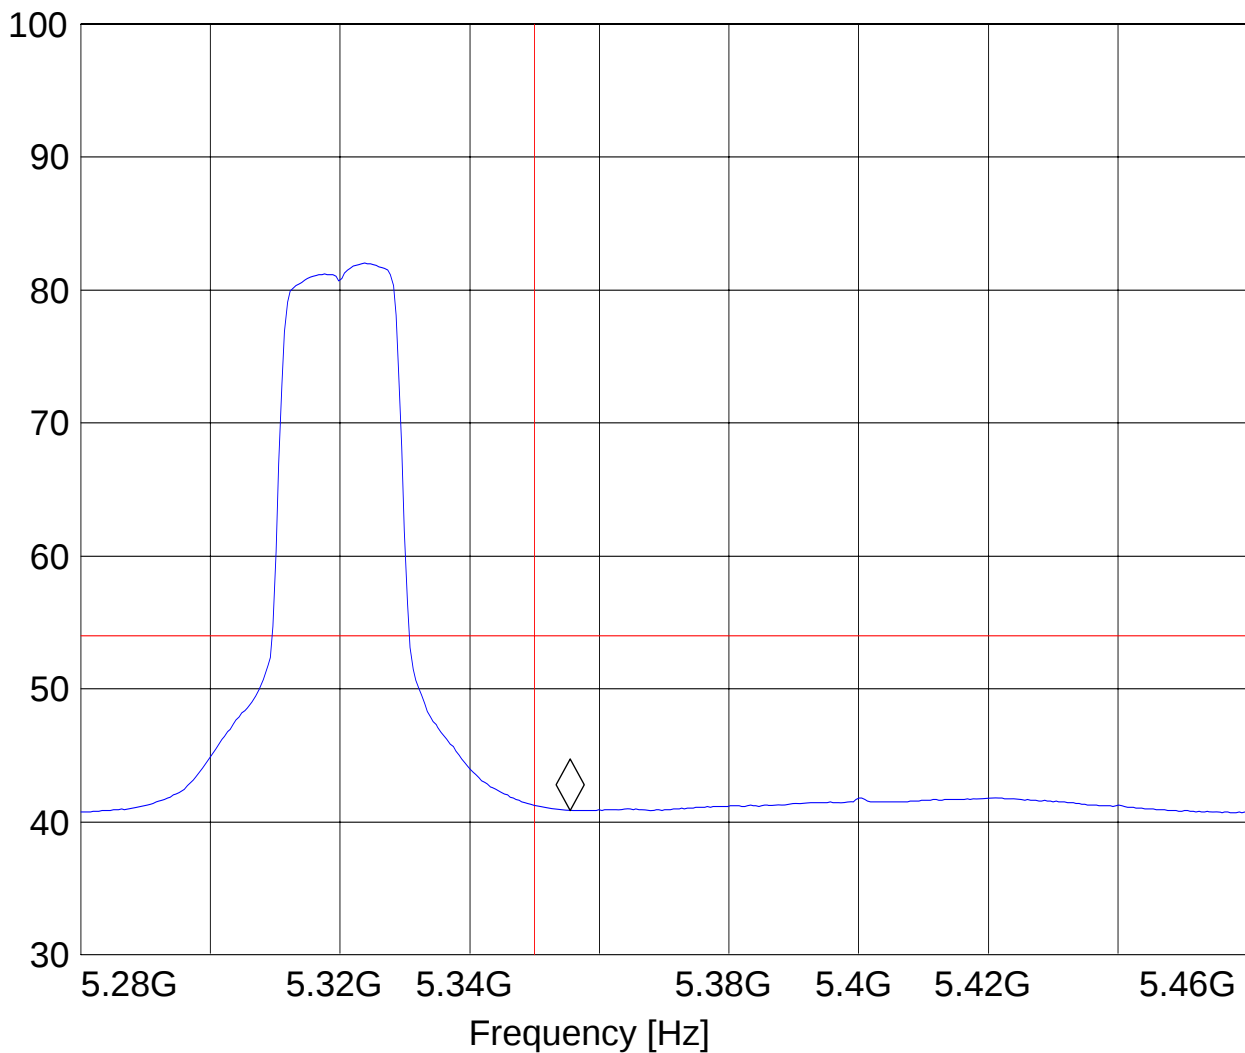

**5.2.5 802.11 (a) MODE (5320MHz) Chain B****PEAK****CETECOM Inc., 411 Dixon Landing Road, Milpitas CA 95035, USA**

EUT: Kedron AG

Customer: HP Texas

Test Mode: WLAN 802.11a, 6 Mbps, ch64, chain b

ANT Orientation: H

EUT Orientation: H

Test Engineer: Satya R


Power Supply: AC Adapter

SWEEP TABLE: "FCC15.407 A_HBE_PK"Unit: dB μ V/m

Detector:

Mode:

Curve 1: MaxPeak MaxHold VBW: 1MHz RBW: 1MHz

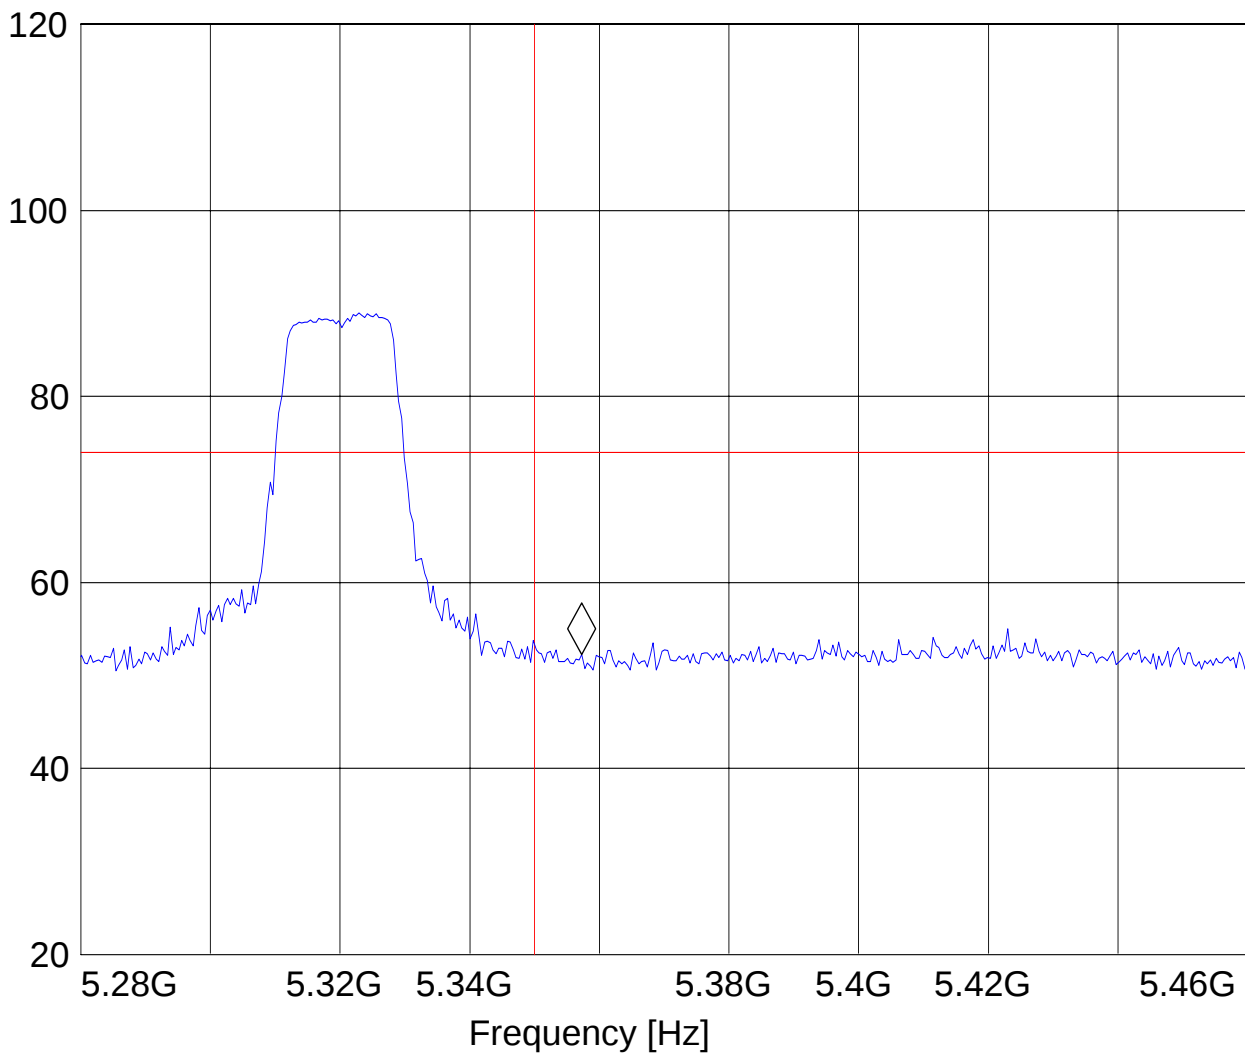Marker: 5.357274549 GHz 52.3 dB μ V/mLevel [dB μ V/m]

**802.11 (a) MODE (5320MHz) Chain B****AVG****CETECOM Inc., 411 Dixon Landing Road, Milpitas CA 95035, USA**

EUT: Kedron AG

Customer: HP Texas

Test Mode: WLAN 802.11a, 6 Mbps, ch64, chain b

ANT Orientation: H

EUT Orientation: H

Test Engineer: Satya R

Power Supply: AC Adapter

SWEEP TABLE: "FCC15.407 A_HBE_AVG"

Unit: dBμV/m


Detector:

Mode:

Curve 1: MaxPeak MaxHold VBW: 1MHz RBW: 1MHz

Marker: 5.354188377 GHz 40.85 dBμV/m

Level [dBμV/m]

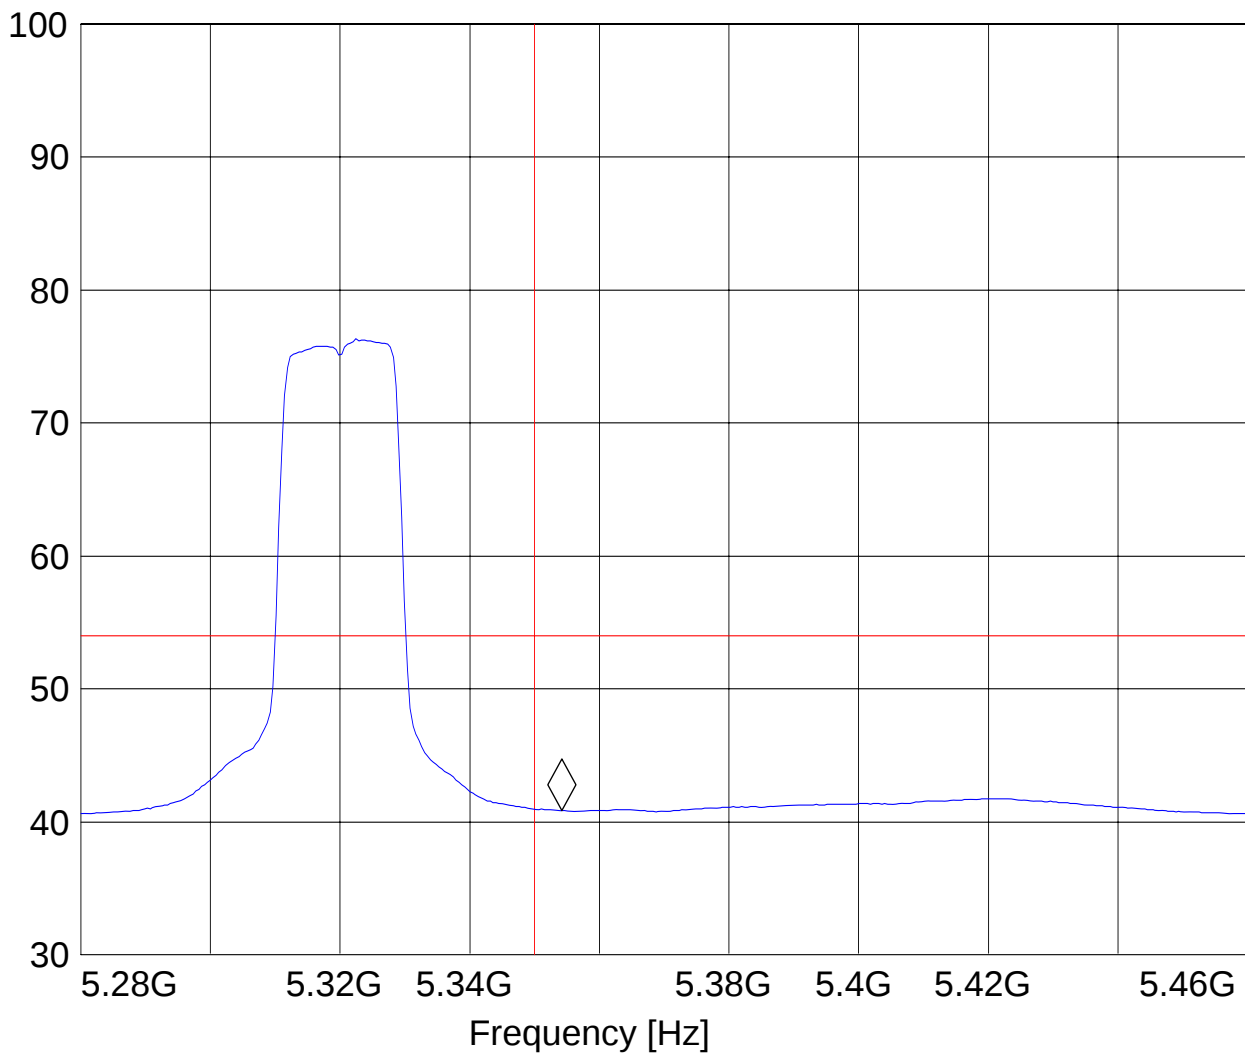

5.3 TRANSMITTER SPURIOUS EMISSIONS RADIATED § 15.407(b)/15.205/15.209

5.3.1 LIMITS

(a) Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
¹ 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2690 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	(²)
13.36 - 13.41			

*PEAK LIMIT= 74dB μ V/m for spurious in restricted bands

*AVG. LIMIT= 54dB μ V/m for spurious in restricted bands

*PEAK LIMIT= 68.2dB μ V/m for spurious NOT in restricted bands

NOTE:

1. The radiated emissions were done with different settings, using the relevant pre-amplifiers for the relevant frequency ranges. This is the reason that the graphs show different noise levels. In the range between 3 and 25 GHz very short cable connections to the antenna was used to minimize the noise level.

2. All measurements are done in peak mode using an average limit , unless specified with the plots.

Results for the radiated measurements below 30MHz according § 15.33

Frequency	Measured values	Remarks
9KHz – 30MHz	No emissions found, caused by the EUT	This is valid for all the tested channels

5.3.2 RESULTS 802.11 (a) MODE Chain A

30MHz – 1GHz

Antenna: Horizontal


Note: This plot is valid for low, mid, high channels horizontal and vertical polarities (worst-case plot).

CETECOM Inc., 411 Dixon Landing Road, Milpitas CA 95035, USA

EUT: Kedron AG
Customer: HP Texas
Test Mode: WLAN 802.11a, 6 Mbps, ch 36, chain A
ANT Orientation: H
EUT Orientation: H
Test Engineer: Satya Radhakrishna
Power Supply: AC Adapter

SWEEP TABLE: "FCC15.247_30M-1G_Hor"

Start Frequency	Stop Frequency	Detector	Meas. Time	IF Bandw.	Transducer
30.0 MHz	1.0 GHz	MaxPeak	Coupled	100 kHz	3141-#1186_Vert

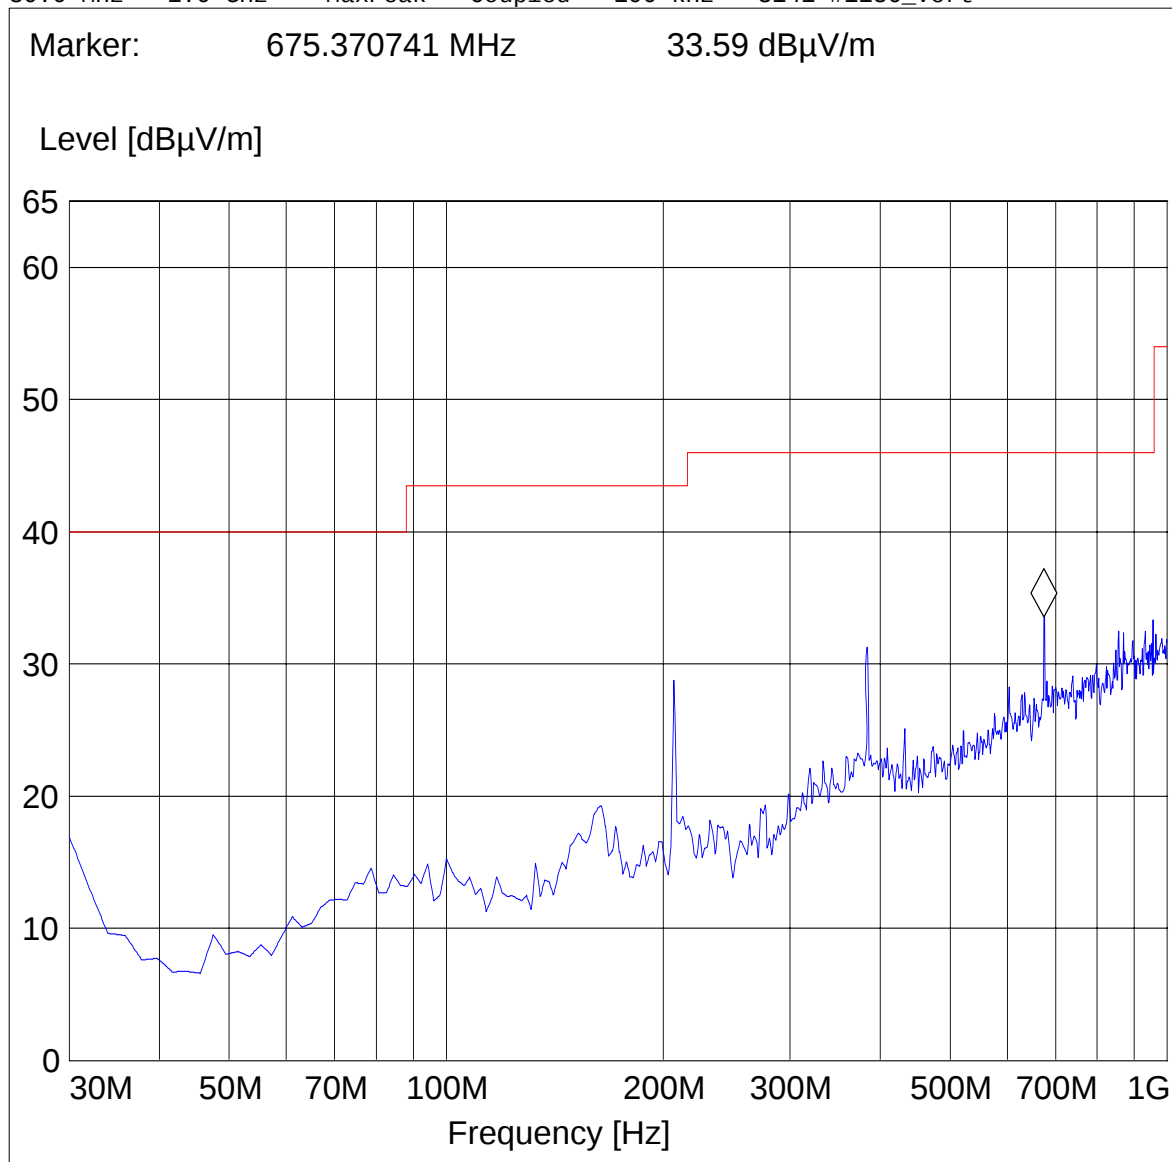

**1-18GHz (5180MHz) Chain A**

Note: The peak above the limit line is the carrier freq. **Note:** Peak Reading vs. Average limit

CETECOM Inc., 411 Dixon Landing Road; Milpitas, CA 95035

EUT / Description: Kedron AG

Manufacturer: HP Texas

Test mode: WLAN 802.11a, 6 Mbps, ch36, chain a

ANT Orientation: H

EUT Orientation: H

Test Engineer: Satya R

Voltage: AC Adapter


Comments: Marker is placed on transmit signal

SWEEP TABLE: "FCC 15.407 1-18G"

Start Frequency	Stop Frequency	Detector	Meas. Time	IF Bandw.	Transducer
1.0 GHz	18.0 GHz	MaxPeak	Coupled	1 MHz	#326horn_AF_vert

Marker: 5.156312625 GHz 55.14 dB μ V/m

Level [dB μ V/m]

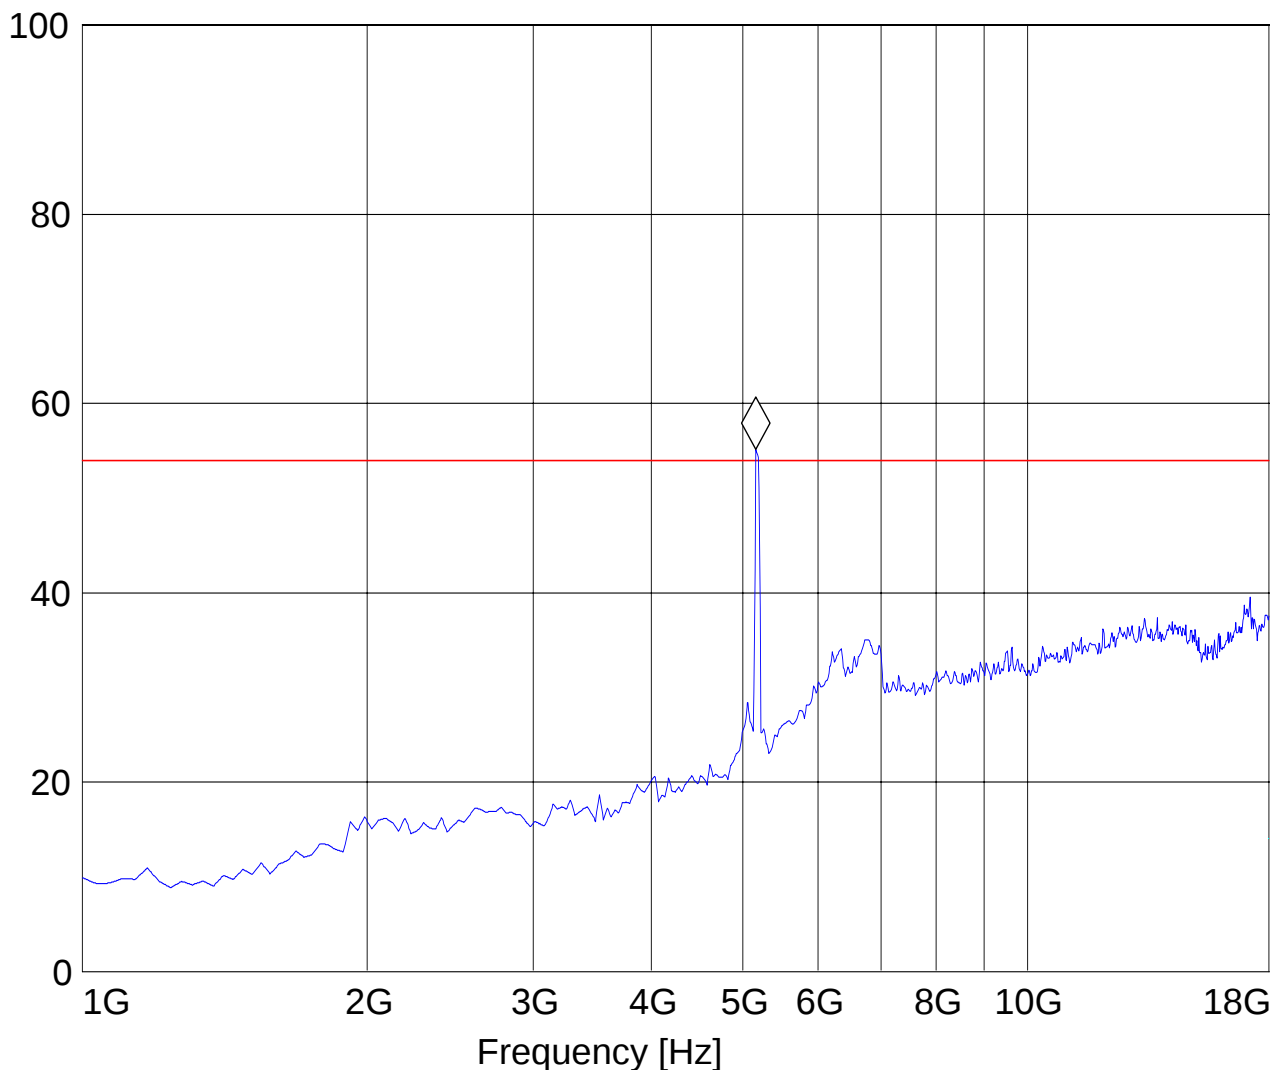

1-18GHz (5260MHz) Chain A

Note:The peak above the limit line is the carrier freq.**Note:**Peak Reading vs. Average limit
CETECOM Inc., 411 Dixon Landing Road; Milpitas, CA 95035

EUT / Description: Kedron AG

Manufacturer: HP Texas

Test mode: WLAN 802.11a, 6 Mbps, ch52, chain a

ANT Orientation: H

EUT Orientation: H


Test Engineer: Satya R

Voltage: AC Adapter

Comments: Marker is placed on transmit signal

SWEEP TABLE: "FCC 15.407 1-18G"

Start Frequency	Stop Frequency	Detector	Meas. Time	IF Bandw.	Transducer
1.0 GHz	18.0 GHz	MaxPeak	Coupled	1 MHz	#326horn_AF_vert

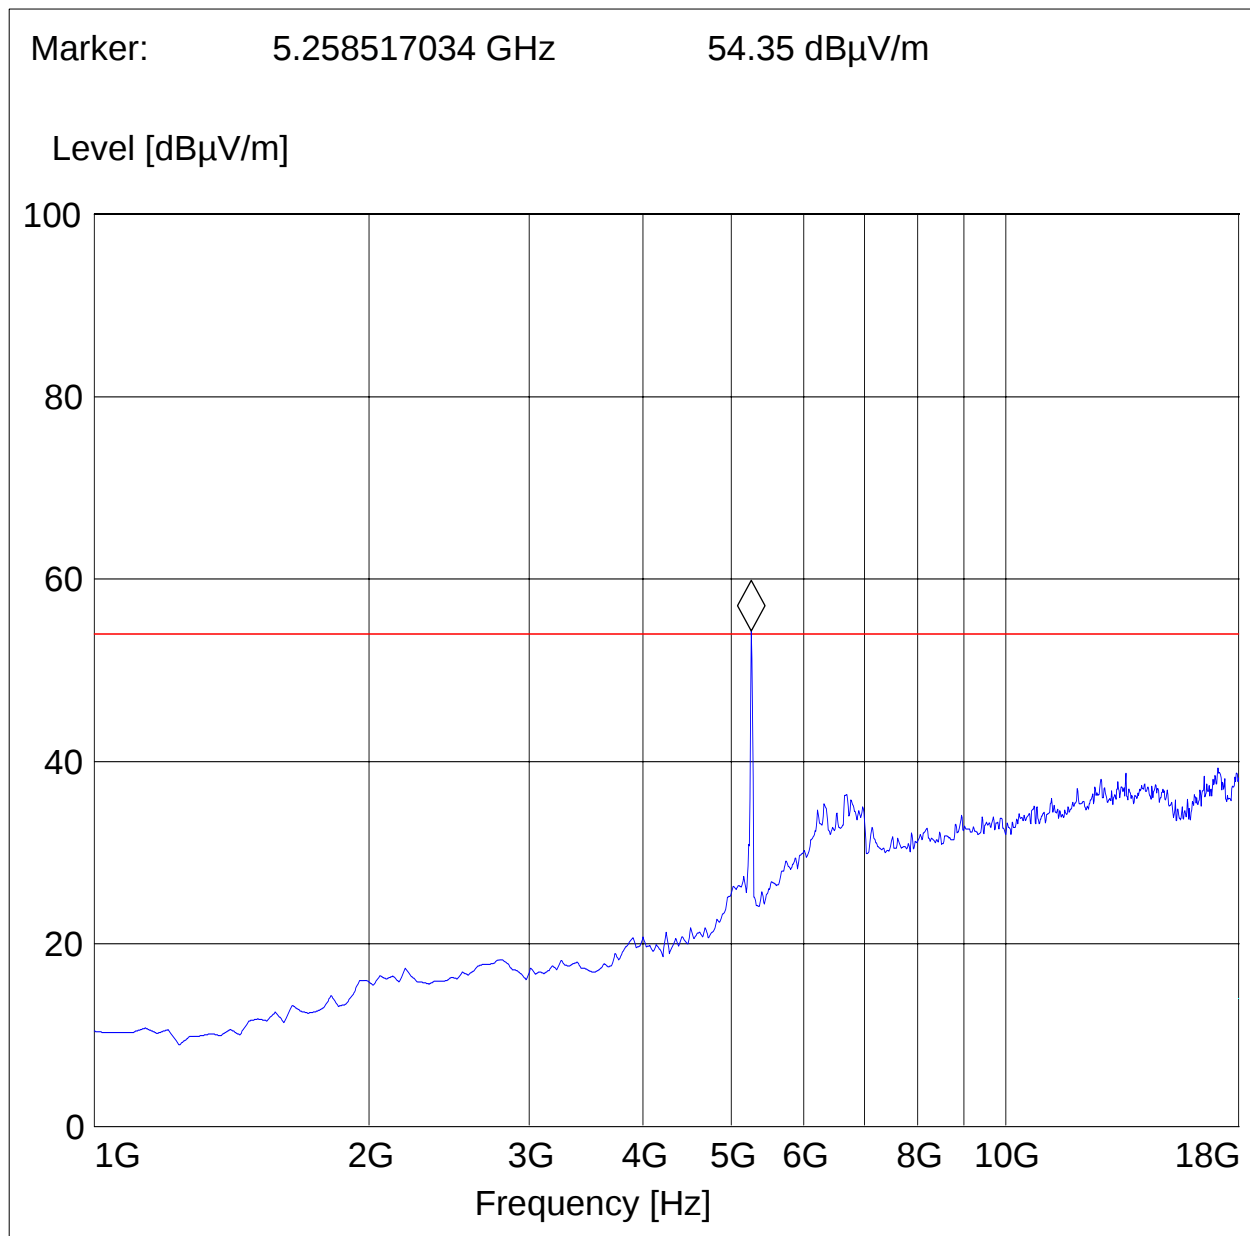

1-18GHz (5320MHz) Chain A

Note:The peak above the limit line is the carrier freq.**Note:**Peak Reading vs. Average limit
CETECOM Inc., 411 Dixon Landing Road; Milpitas, CA 95035

EUT / Description: Kedron AG

Manufacturer: HP Texas

Test mode: WLAN 802.11a, 6 Mbps, ch64, chain a

ANT Orientation: H

EUT Orientation: H


Test Engineer: Satya R

Voltage: AC Adapter

Comments: Marker is placed on transmit signal

SWEEP TABLE: "FCC 15.407 1-18G"

Start	Stop	Detector	Meas.	IF	Transducer
Frequency	Frequency		Time	Bandw.	
1.0 GHz	18.0 GHz	MaxPeak	Coupled	1 MHz	#326horn_AF_vert

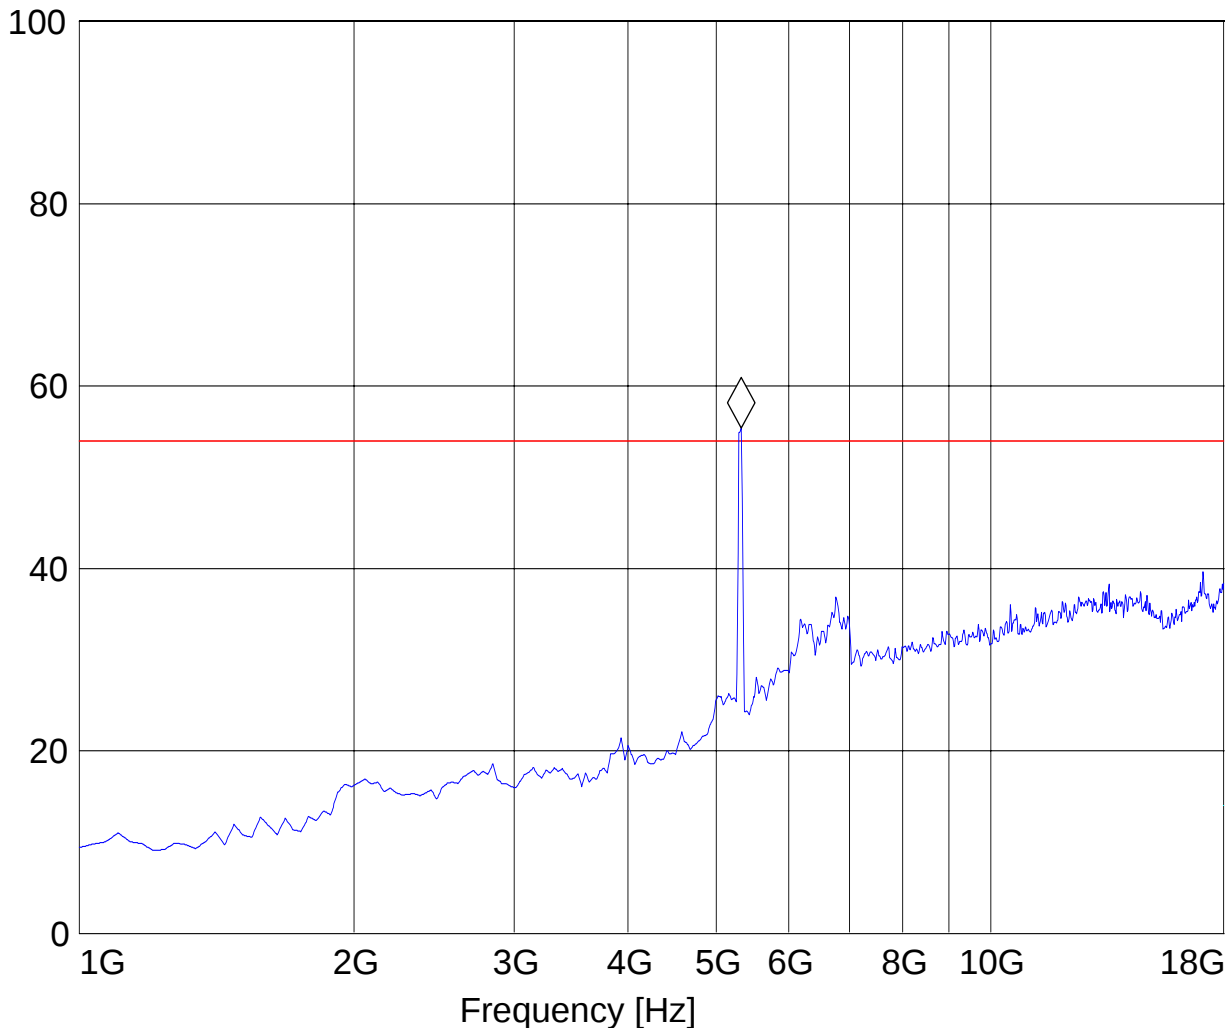Marker: 5.326653307 GHz 55.4 dB μ V/mLevel [dB μ V/m]

Test Report #: HEWL4_016_07001_15.407a_KEDRON_AG

Date of Report: 6/20/2007

Page 28 of 44



18-26.5GHz (5180MHz) Chain A

Note: Peak Reading vs. Average limit

CETECOM Inc., 411 Dixon Landing Road, Milpitas CA 95035, USA

EUT: Kedron AG

Customer: HP Texas

Test Mode: WLAN 802.11a, 6 Mbps, ch 36, chain a

ANT Orientation: H

EUT Orientation: H

Test Engineer: Ed


Power Supply: AC Adapter

SWEEP TABLE: "FCC15.247_18-26.5G"

Start Frequency	Stop Frequency	Detector	Meas. Time	IF Bandw.	Transducer
18.0 GHz	26.5 GHz	MaxPeak	Coupled	1 MHz	3160 Horn 18-26.5G

Marker: 22.701402806 GHz 26.57 dB μ V/m

Level [dB μ V/m]

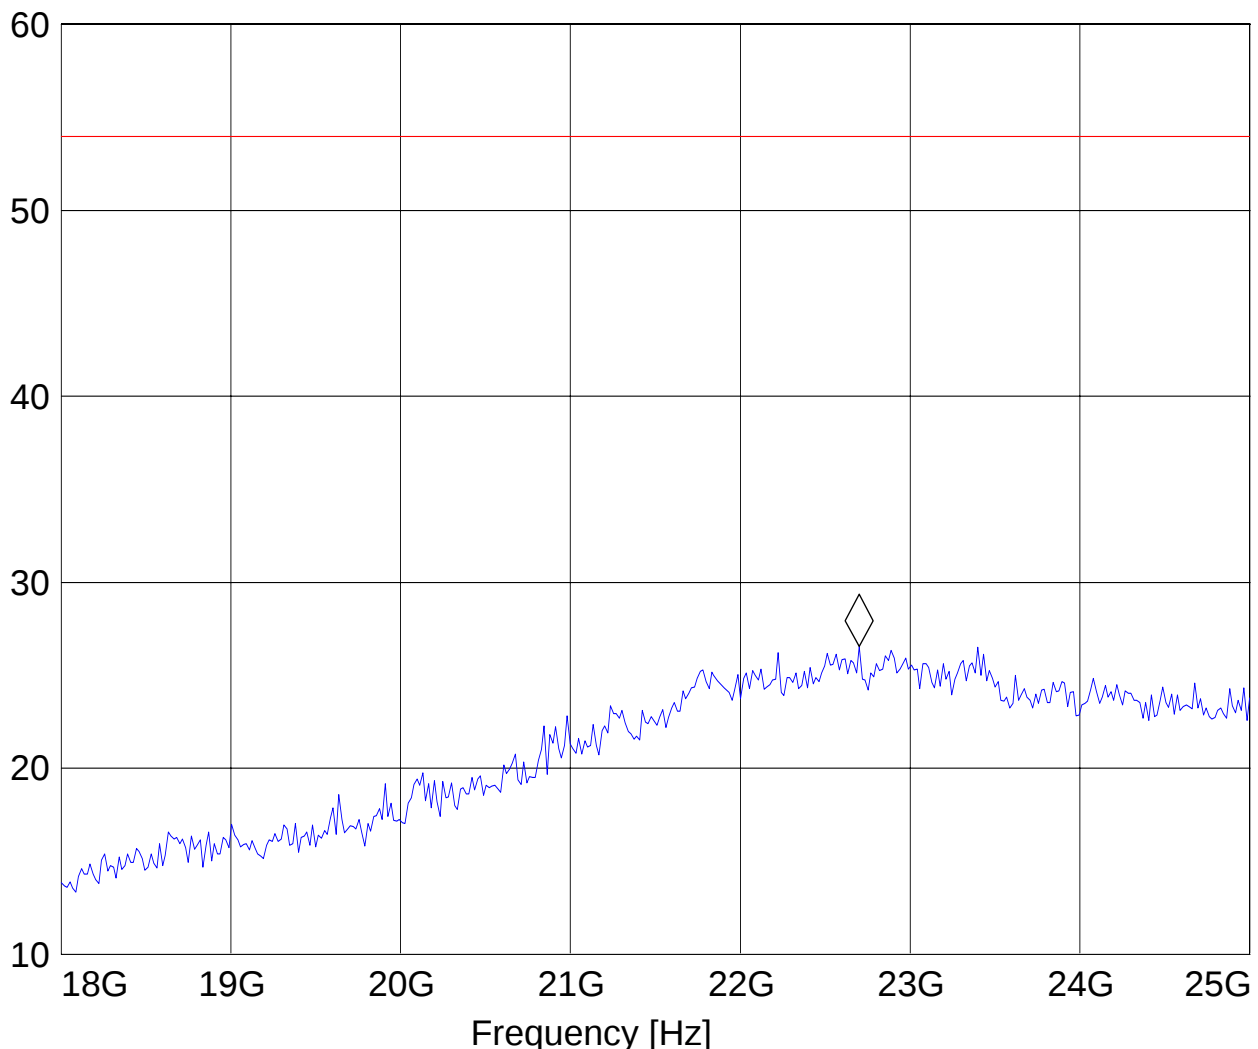

Test Report #: HEWL4_016_07001_15.407a_KEDRON_AG

Date of Report: 6/20/2007

Page 29 of 44



18-26.5GHz (5260MHz) Chain A

Note: Peak Reading vs. Average limit

CETECOM Inc., 411 Dixon Landing Road, Milpitas CA 95035, USA

EUT: Kedron AG

Customer: HP Texas

Test Mode: WLAN 802.11a, 6 Mbps, ch 52, chain a

ANT Orientation: H

EUT Orientation: H

Test Engineer: Ed


Power Supply: AC Adapter

SWEEP TABLE: "FCC15.247_18-26.5G"

Start Frequency	Stop Frequency	Detector	Meas. Time	IF Bandw.	Transducer
18.0 GHz	26.5 GHz	MaxPeak	Coupled	1 MHz	3160 Horn 18-26.5G

Marker: 22.633266533 GHz 27.07 dBμV/m

Level [dBμV/m]

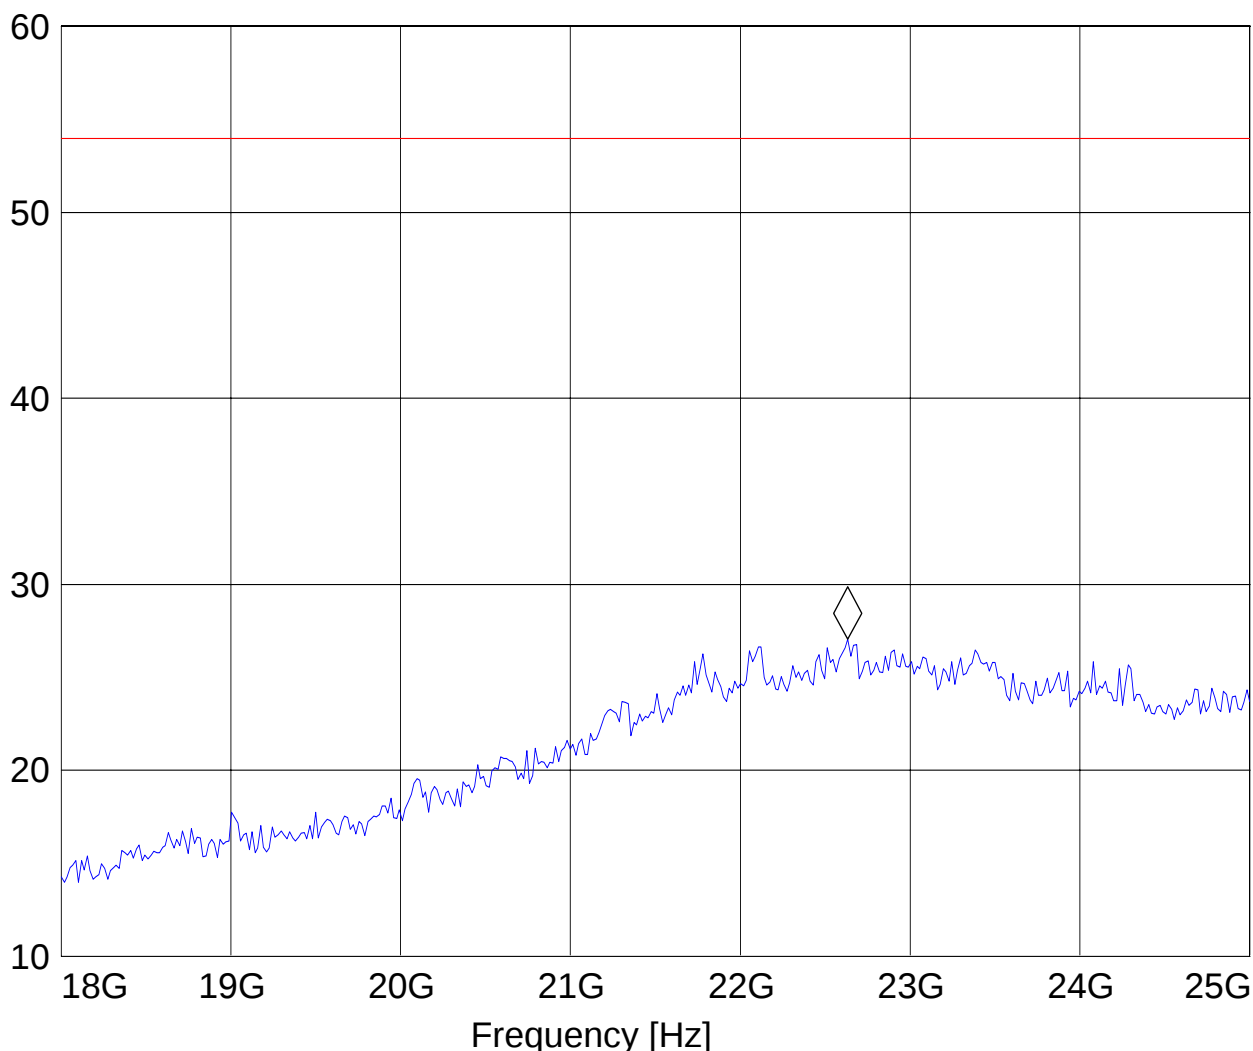

Test Report #: HEWL4_016_07001_15.407a_KEDRON_AG

Date of Report: 6/20/2007

Page 30 of 44



18-26.5GHz (5320MHz) Chain A

Note: Peak Reading vs. Average limit

CETECOM Inc., 411 Dixon Landing Road, Milpitas CA 95035, USA

EUT: Kedron AG

Customer: HP Texas

Test Mode: WLAN 802.11a, 6 Mbps, ch 64, chain a

ANT Orientation: H

EUT Orientation: H

Test Engineer: Ed


Power Supply: AC Adapter

SWEEP TABLE: "FCC15.247_18-26.5G"

Start Frequency	Stop Frequency	Detector	Meas. Time	IF Bandw.	Transducer
18.0 GHz	26.5 GHz	MaxPeak	Coupled	1 MHz	3160 Horn 18-26.5G

Marker: 22.582164329 GHz 26.89 dBμV/m

Level [dBμV/m]

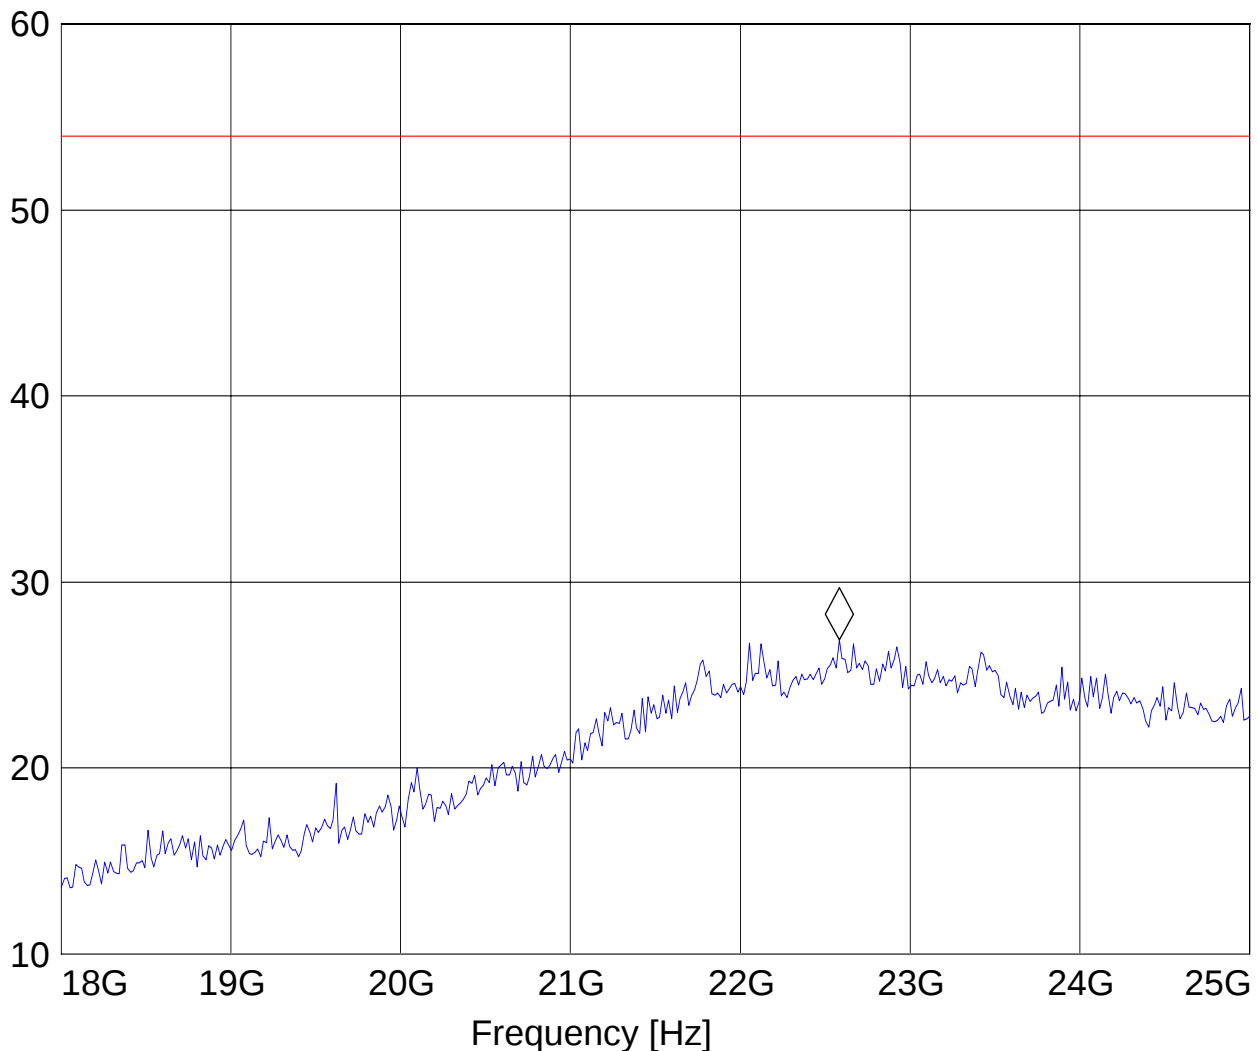

Test Report #: HEWL4_016_07001_15.407a_KEDRON_AG

Date of Report: 6/20/2007

Page 31 of 44



26-40GHz Chain A

Note: This plot is valid for low, mid, high channels (worst-case plot) **Note:** Peak Reading vs. Average limit

CETECOM Inc., 411 Dixon Landing Road; Milpitas, CA 95035

EUT / Description: Kedron AG

Manufacturer: HP Texas

Test mode: WLAN 802.11a, 6 Mbps, ch36, chain a

ANT Orientation: H

EUT Orientation: H

Test Engineer: Ed


Voltage: AC Adapter

SWEEP TABLE: "FCC15.247_26.5-40G"

Start	Stop	Detector	Meas.	IF	Transducer
Frequency	Frequency		Time	Bandw.	
26.5 GHz	40 GHz	MaxPeak	Coupled	1 MHz	

Marker: 29.881763527 GHz 36.3 dBμV/m

Level [dBμV/m]

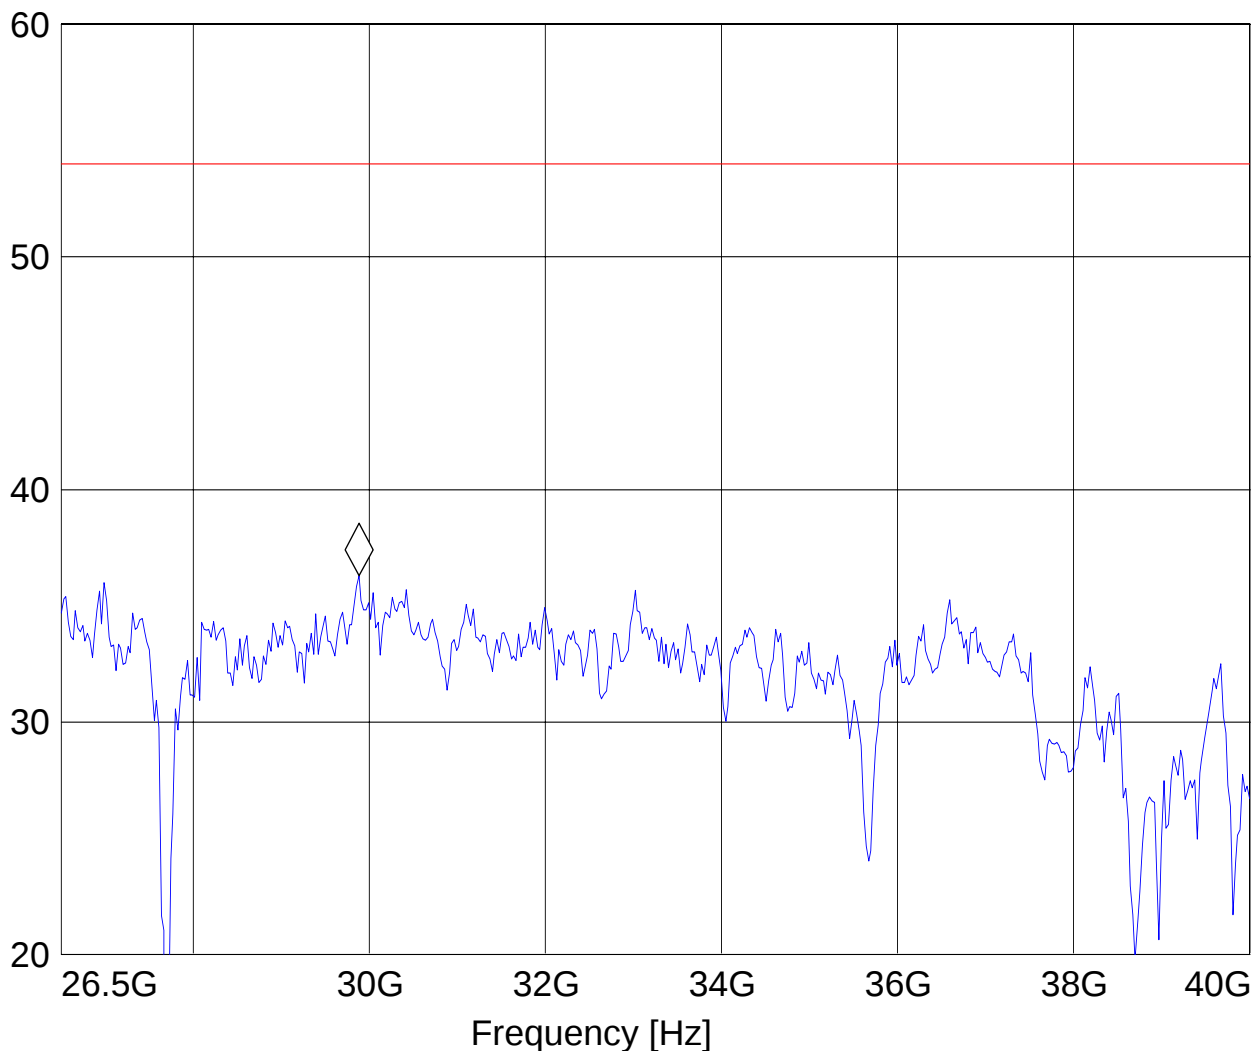



5.3.3 RESULTS 802.11 (a) MODE Chain B

30MHz – 1GHz

Antenna: Horizontal

Note: This plot is valid for low, mid, high channels horizontal and vertical polarities (worst-case plot).


EUT: Kedron AG
Customer: HP Texas
Test Mode: WLAN 802.11a, 6 Mbps, ch 64, chain B
ANT Orientation: H
EUT Orientation: H
Test Engineer: Satya Radhakrishna
Power Supply: AC Adapter

SWEEP TABLE: "FCC15.247_30M-1G_Hor"

Start	Stop	Detector	Meas.	IF	Transducer
Frequency	Frequency		Time	Bandw.	
30.0 MHz	1.0 GHz	MaxPeak	Coupled	100 kHz	3141-#1186_Vert

Marker: 675.370741 MHz 35.61 dB μ V/m

Level [dB μ V/m]

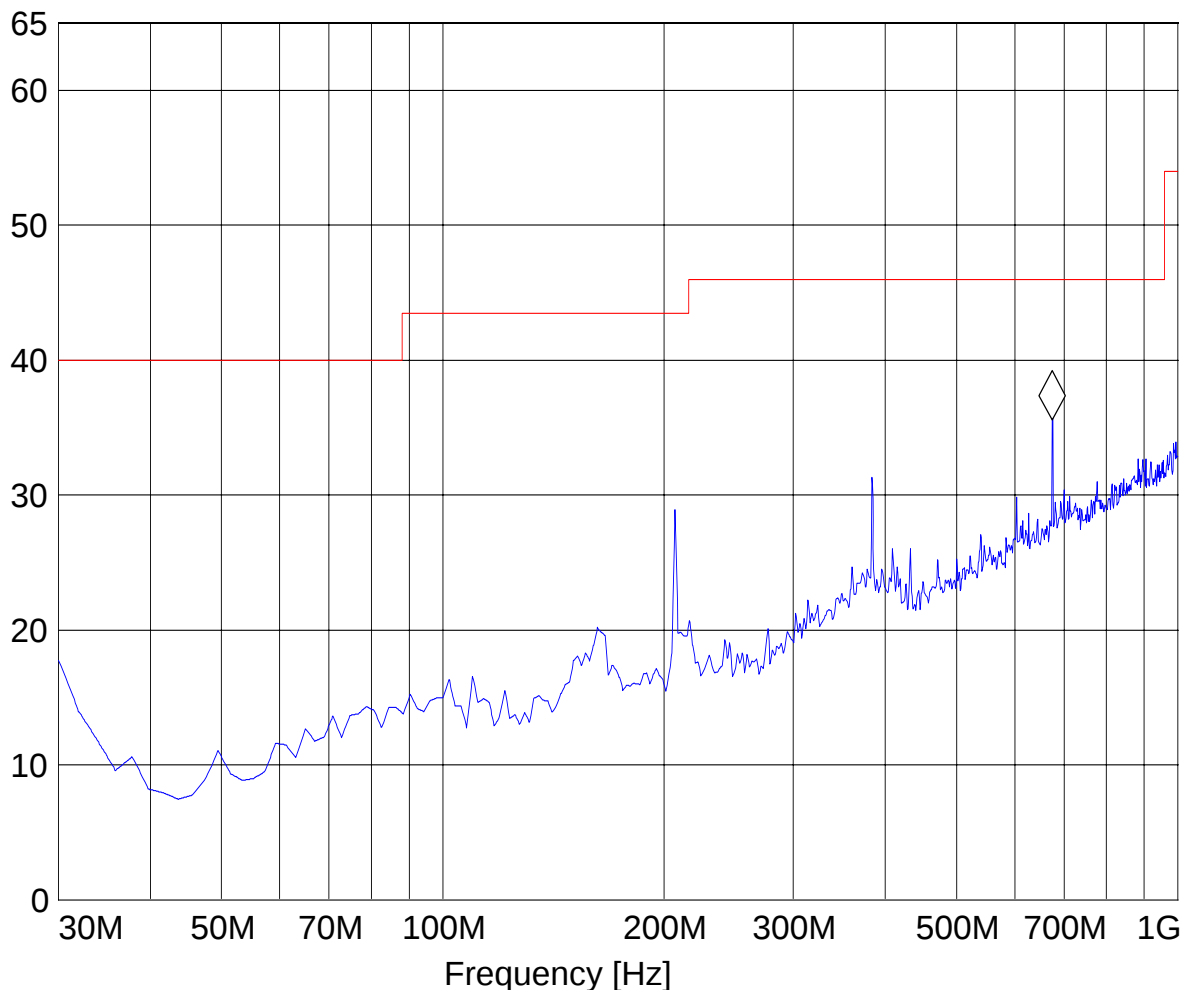

**1-18GHz (5180MHz) Chain B**

Note: The peak above the limit line is the carrier freq. **Note:** Peak Reading vs. Average limit
CETECOM Inc., 411 Dixon Landing Road; Milpitas, CA 95035

EUT / Description: Kedron AG

Manufacturer: HP Texas

Test mode: WLAN 802.11a, 6 Mbps, ch36, chain B

ANT Orientation: H

EUT Orientation: H

Test Engineer: Satya R


Voltage: AC Adapter

Comments: Marker is placed on transmit signal

SWEEP TABLE: "FCC 15.407 1-18G"

Start	Stop	Detector	Meas.	IF	Transducer
Frequency	Frequency		Time	Bandw.	
1.0 GHz	18.0 GHz	MaxPeak	Coupled	1 MHz	#326horn_AF_vert

Marker: 5.156312625 GHz 50.36 dB μ V/m

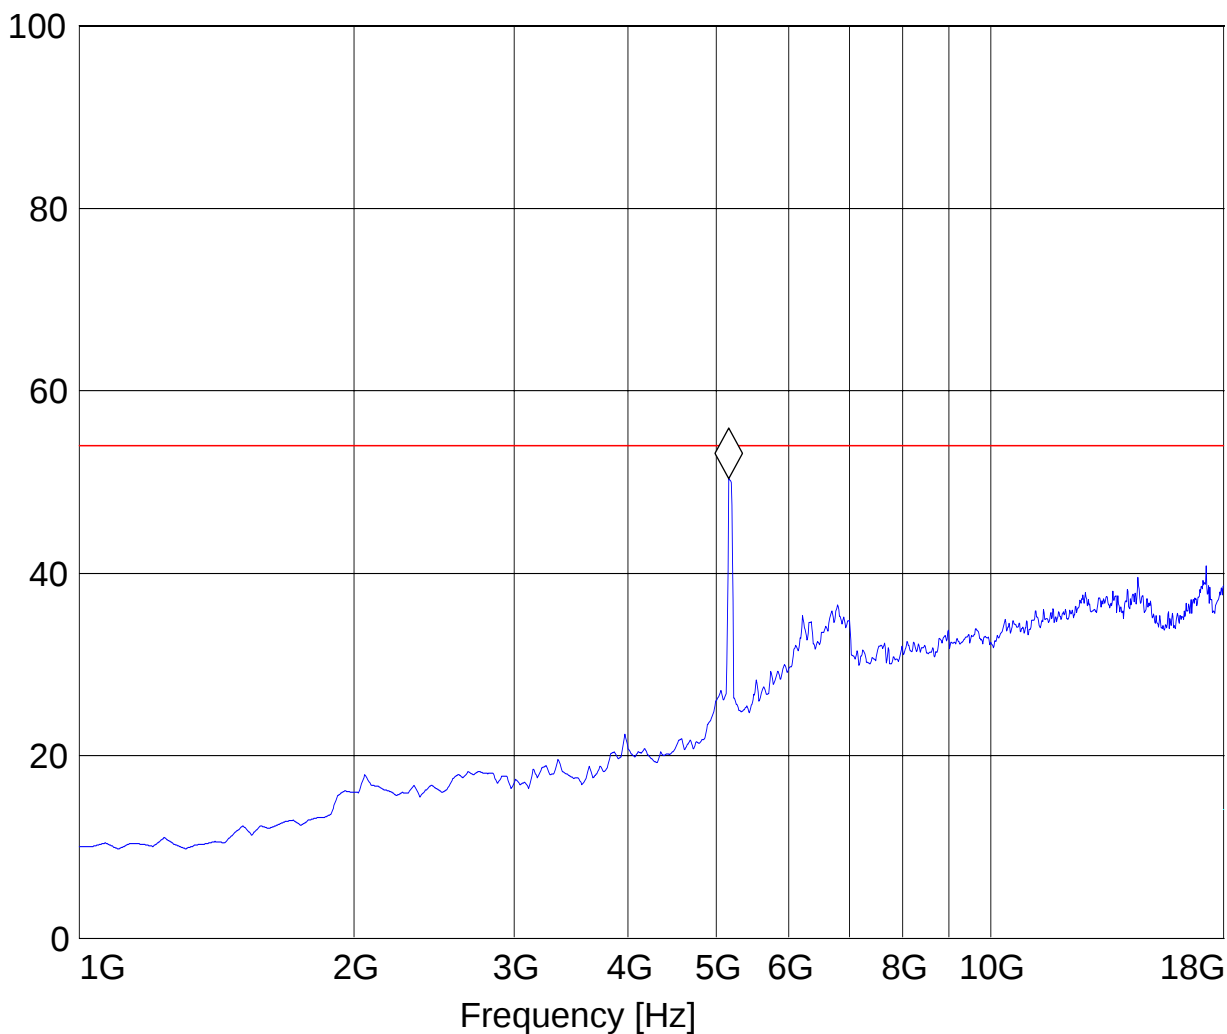Level [dB μ V/m]

**1-18GHz (5260MHz) Chain B**

Note: The peak above the limit line is the carrier freq. **Note:** Peak Reading vs. Average limit
CETECOM Inc., 411 Dixon Landing Road; Milpitas, CA 95035

EUT / Description: Kedron AG

Manufacturer: HP Texas

Test mode: WLAN 802.11a, 6 Mbps, ch52, chain B

ANT Orientation: H

EUT Orientation: H

Test Engineer: Satya R


Voltage: AC Adapter

Comments: Marker is placed on transmit signal

SWEEP TABLE: "FCC 15.407 1-18G"

Start	Stop	Detector	Meas.	IF	Transducer
Frequency	Frequency		Time	Bandw.	
1.0 GHz	18.0 GHz	MaxPeak	Coupled	1 MHz	#326horn_AF_vert

Marker: 5.258517034 GHz 51.77 dB μ V/m

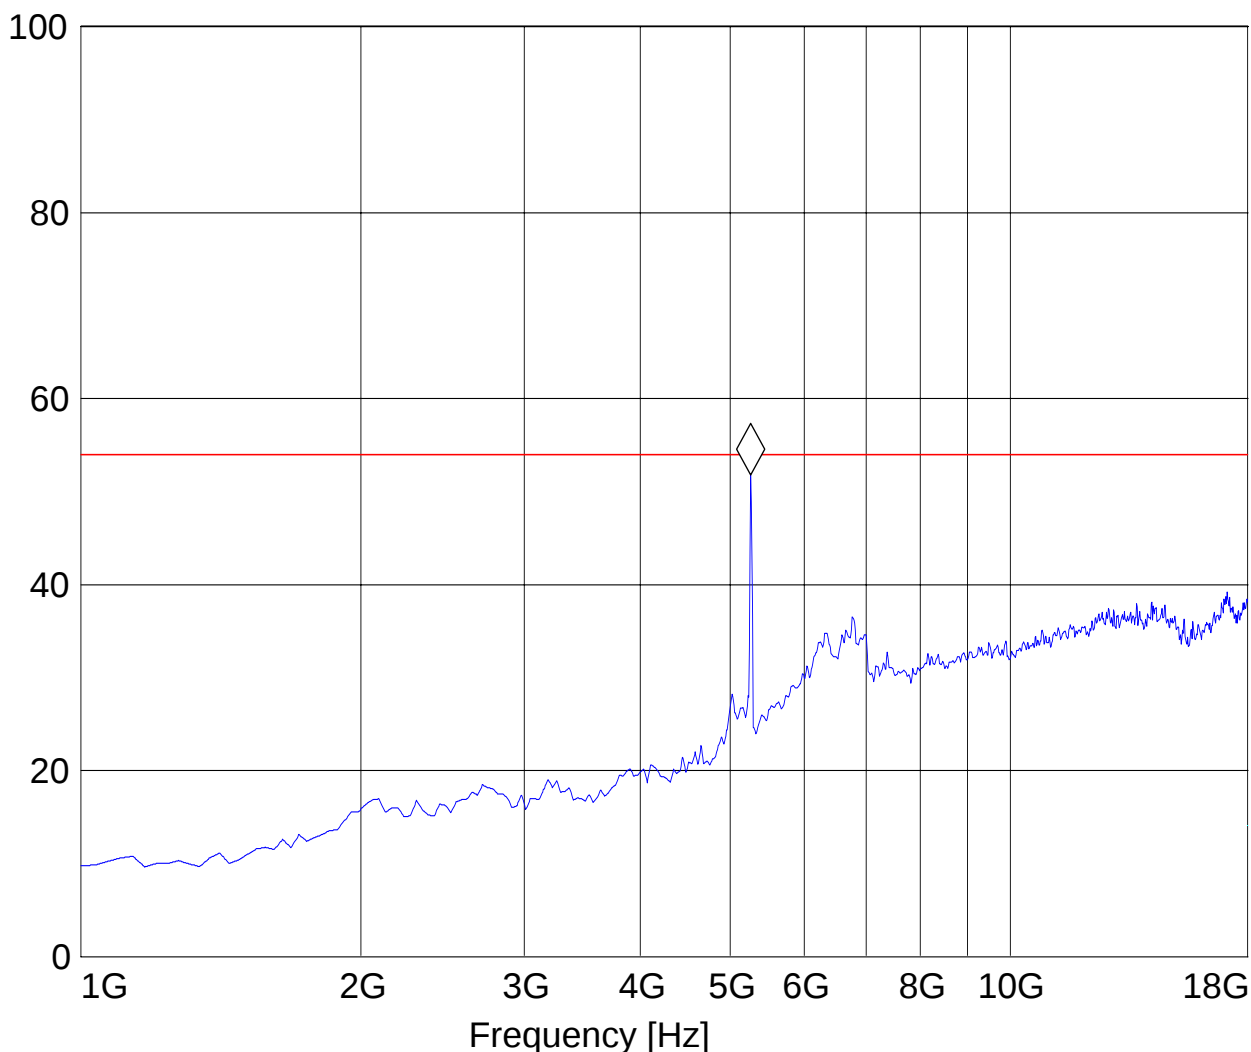Level [dB μ V/m]

**1-18GHz (5320MHz) Chain B**

Note: The peak above the limit line is the carrier freq. **Note:** Peak Reading vs. Average limit
CETECOM Inc., 411 Dixon Landing Road; Milpitas, CA 95035

EUT / Description: Kedron AG

Manufacturer: HP Texas

Test mode: WLAN 802.11a, 6 Mbps, ch64, chain B

ANT Orientation: H

EUT Orientation: H

Test Engineer: Satya R


Voltage: AC Adapter

Comments: Marker is placed on transmit signal

SWEEP TABLE: "FCC 15.407 1-18G"

Start	Stop	Detector	Meas.	IF	Transducer
Frequency	Frequency		Time	Bandw.	
1.0 GHz	18.0 GHz	MaxPeak	Coupled	1 MHz	#326horn_AF_vert

Marker: 5.326653307 GHz 50.74 dB μ V/m

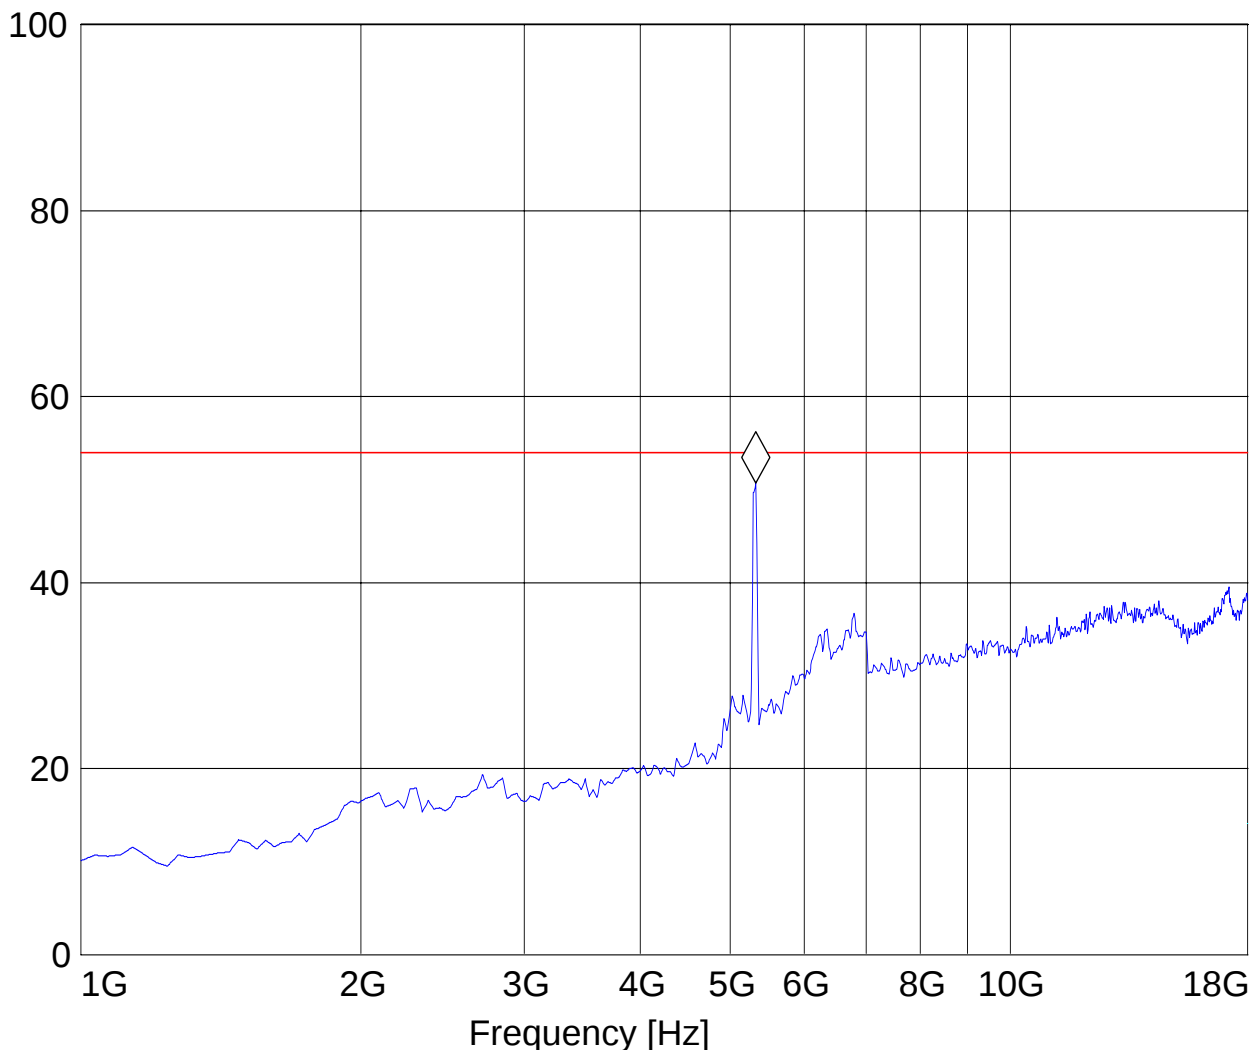Level [dB μ V/m]

Test Report #: HEWL4_016_07001_15.407a_KEDRON_AG

Date of Report: 6/20/2007

Page 36 of 44



18-26.5GHz (5180MHz) Chain B

Note: Peak Reading vs. Average limit

CETECOM Inc., 411 Dixon Landing Road, Milpitas CA 95035, USA

EUT: Kedron AG

Customer: HP Texas

Test Mode: WLAN 802.11a, 6 Mbps, ch 36, chain b

ANT Orientation: H

EUT Orientation: H

Test Engineer: Ed


Power Supply: AC Adapter

SWEEP TABLE: "FCC15.247_18-26.5G"

Start	Stop	Detector	Meas.	IF	Transducer
Frequency	Frequency		Time	Bandw.	
18.0 GHz	26.5 GHz	MaxPeak	Coupled	1 MHz	3160 Horn 18-26.5G

Marker: 22.599198397 GHz 26.33 dBμV/m

Level [dBμV/m]

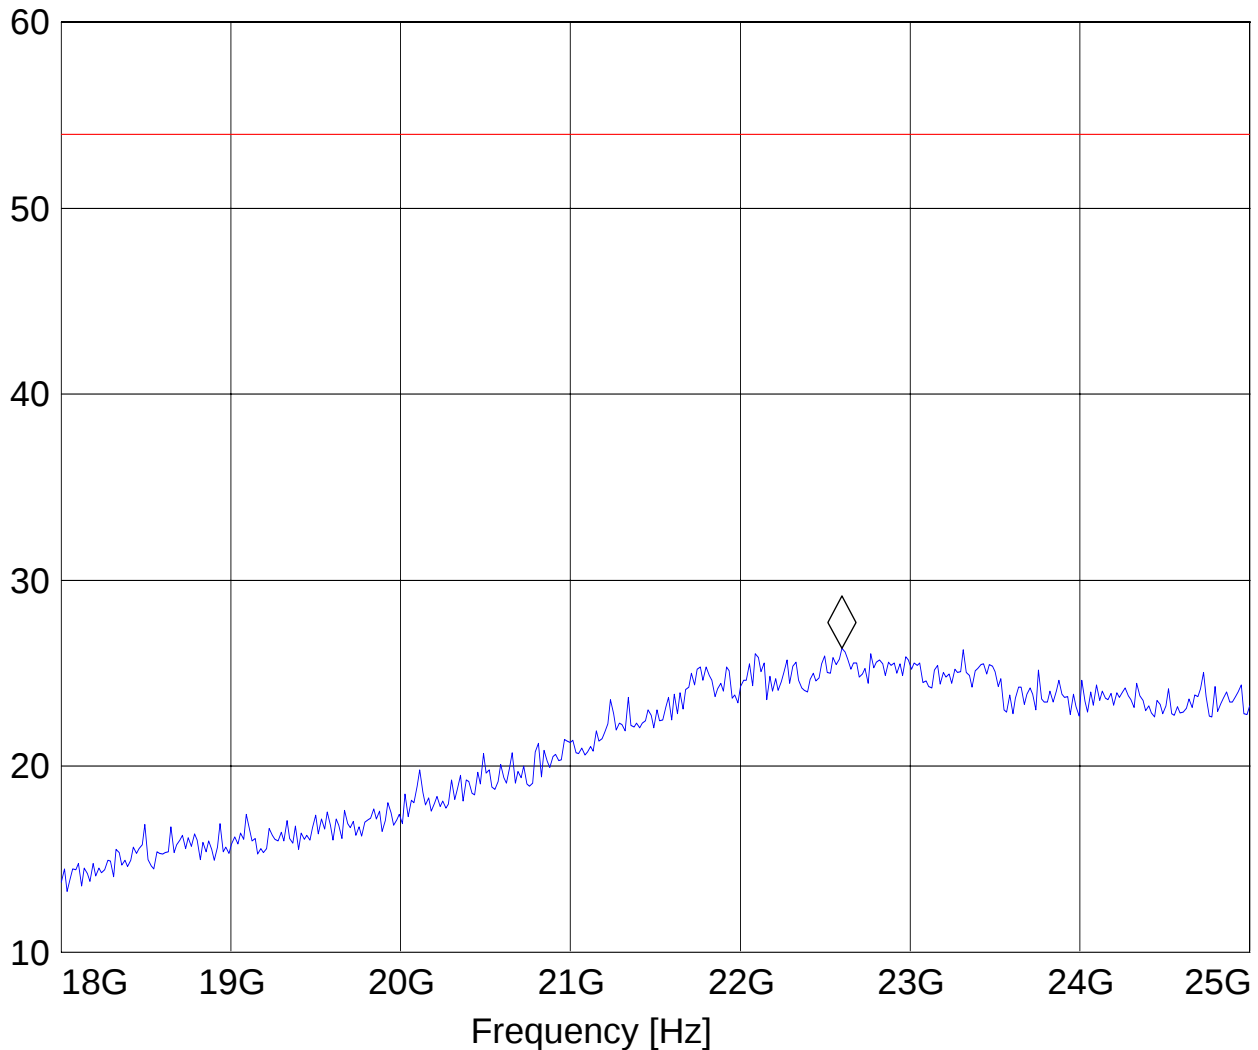

Test Report #: HEWL4_016_07001_15.407a_KEDRON_AG

Date of Report: 6/20/2007

Page 37 of 44



18-26.5GHz (5260MHz) Chain B

Note: Peak Reading vs. Average limit

CETECOM Inc., 411 Dixon Landing Road, Milpitas CA 95035, USA

EUT: Kedron AG

Customer: HP Texas

Test Mode: WLAN 802.11a, 6 Mbps, ch 52, chain b

ANT Orientation: H

EUT Orientation: H

Test Engineer: Ed


Power Supply: AC Adapter

SWEEP TABLE: "FCC15.247_18-26.5G"

Start Frequency	Stop Frequency	Detector	Meas. Time	IF Bandw.	Transducer
18.0 GHz	26.5 GHz	MaxPeak	Coupled	1 MHz	3160 Horn 18-26.5G

Marker: 22.599198397 GHz 26.65 dBμV/m

Level [dBμV/m]

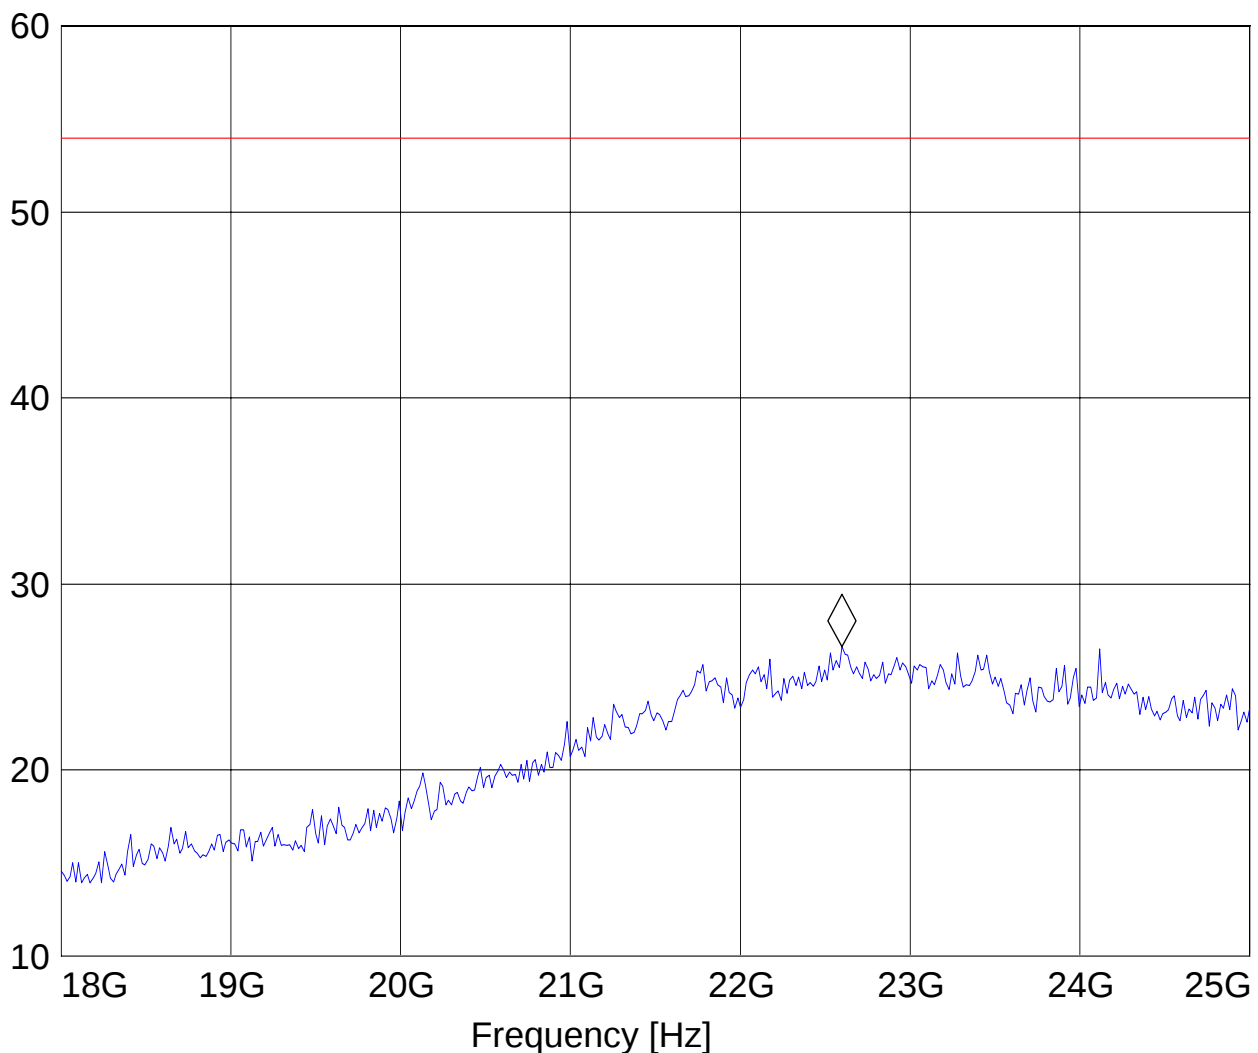

Test Report #: HEWL4_016_07001_15.407a_KEDRON_AG

Date of Report: 6/20/2007

Page 38 of 44



18-26.5GHz (5320MHz) Chain B

Note: Peak Reading vs. Average limit

CETECOM Inc., 411 Dixon Landing Road, Milpitas CA 95035, USA

EUT: Kedron AG

Customer: HP Texas

Test Mode: WLAN 802.11a, 6 Mbps, ch 64, chain b

ANT Orientation: H

EUT Orientation: H

Test Engineer: Ed


Power Supply: AC Adapter

SWEEP TABLE: "FCC15.247_18-26.5G"

Start Frequency	Stop Frequency	Detector	Meas. Time	IF Bandw.	Transducer
18.0 GHz	26.5 GHz	MaxPeak	Coupled	1 MHz	3160 Horn 18-26.5G

Marker: 23.348697395 GHz 26.76 dBμV/m

Level [dBμV/m]

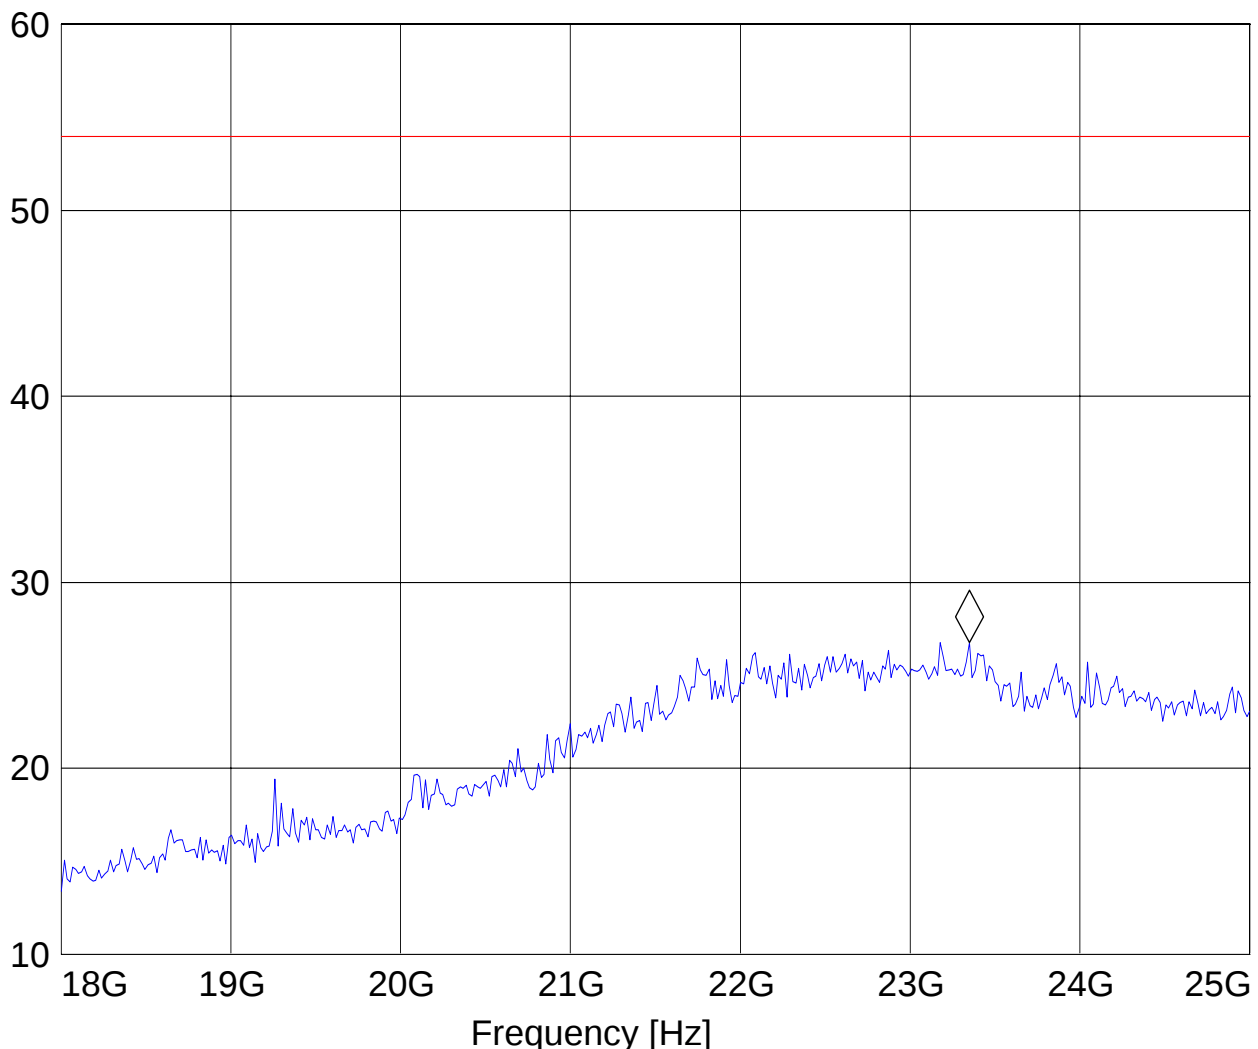

**26-40GHz Chain B**

Note: This plot is valid for low, mid, high channels (worst-case plot) **Note:** Peak Reading vs. Average limit

CETECOM Inc., 411 Dixon Landing Road; Milpitas, CA 95035

EUT / Description: Kedron AG

Manufacturer: HP Texas

Test mode: WLAN 802.11a, 6 Mbps, ch64, chain b

ANT Orientation: H


EUT Orientation: H

Test Engineer: Ed

Voltage: AC Adapter

SWEEP TABLE: "FCC15.247_26.5-40G"

Start	Stop	Detector	Meas.	IF	Transducer
Frequency	Frequency		Time	Bandw.	
26.5 GHz	40 GHz	MaxPeak	Coupled	1 MHz	

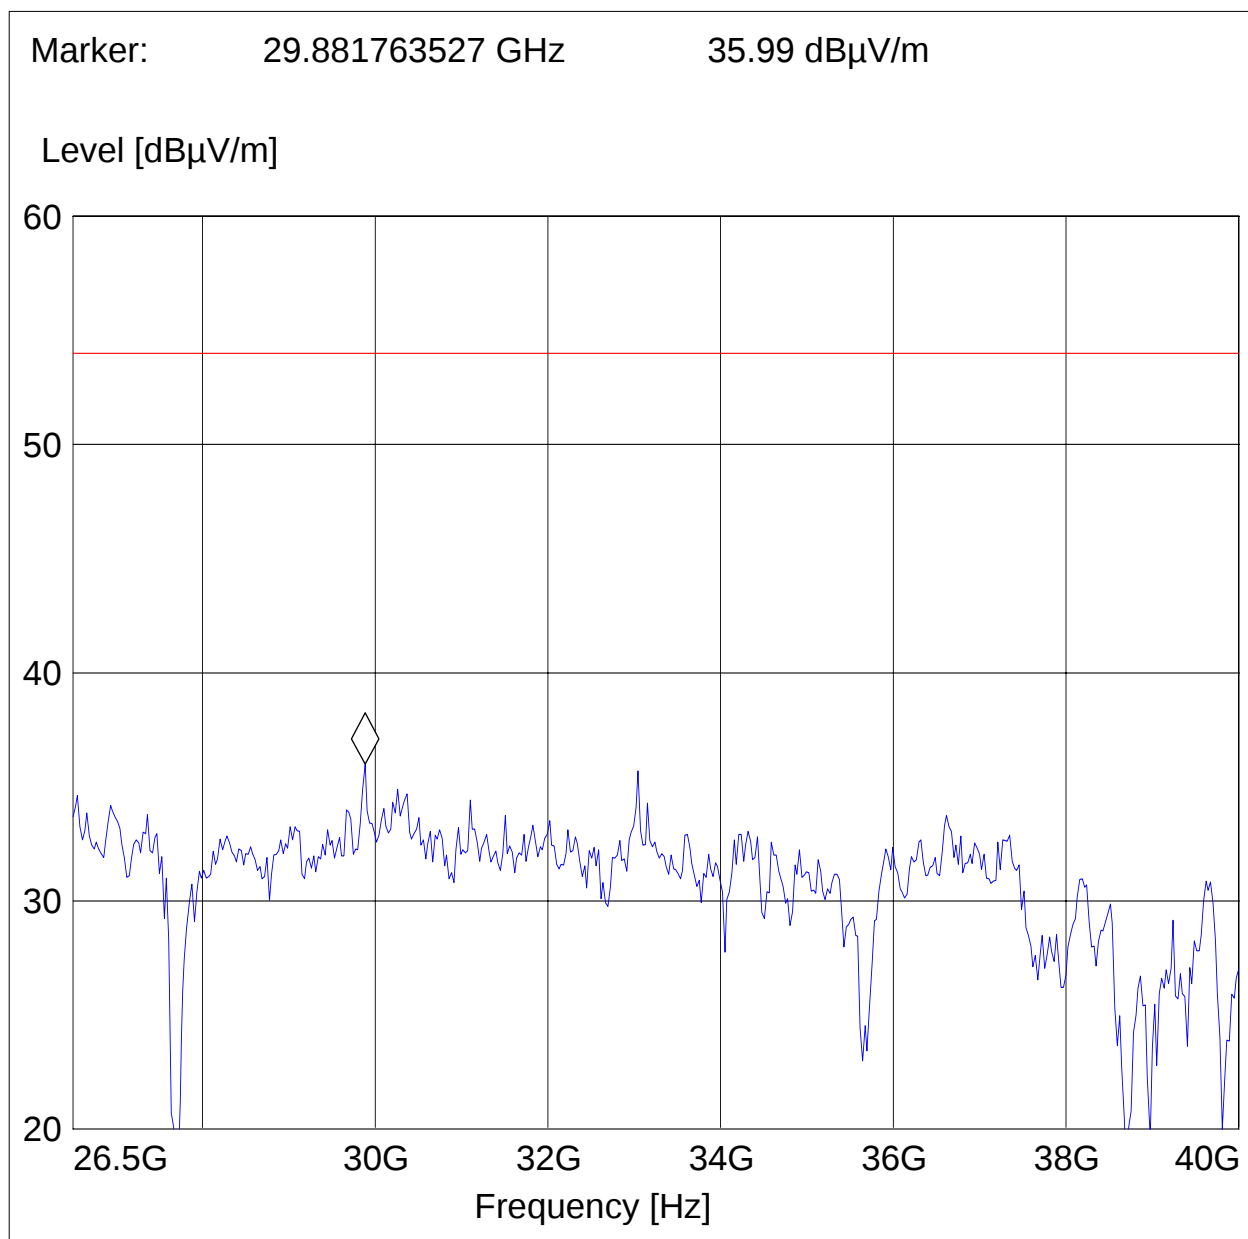

5.4 AC POWER LINE CONDUCTED EMISSIONS § 15.107/207

5.4.1 LIMITS

Technical specification: 15.107 / 15.207 (Revised as of August 20, 2002)

Limit

Frequency of Emission (MHz)	Conducted Limit (dB μ V)	
	Quasi-Peak	Average
0.15 – 0.5	66 to 56*	56 to 46*
0.5 – 5	56	46
5 – 30	60	50

* Decreases with logarithm of the frequency

ANALYZER SETTINGS: RBW = 10KHz

VBW = 10KHz

5.4.2 RESULTS

Line:


EUT: Kedron AG
Manufacturer: HP Texas
Operating Condition: WLAN 802.11a, 6 Mbps, ch 52, chain A
Test Site: Cetecom Inc.
Operator: Ed
Comment: 120V, L
Start of Test: 6/13/2007 / 4:08:12PM

SWEEP TABLE: "55022 cond"

Short Description:		EN 55022 for 150KHz-30MHz			
Start	Stop	Detector	Meas. Time	IF Bandw.	Transducer
150.0 kHz	30.0 MHz	MaxPeak	Coupled	10 kHz	None

Marker: 209.82 kHz 40.81 dBμV L

Level [dBμV]

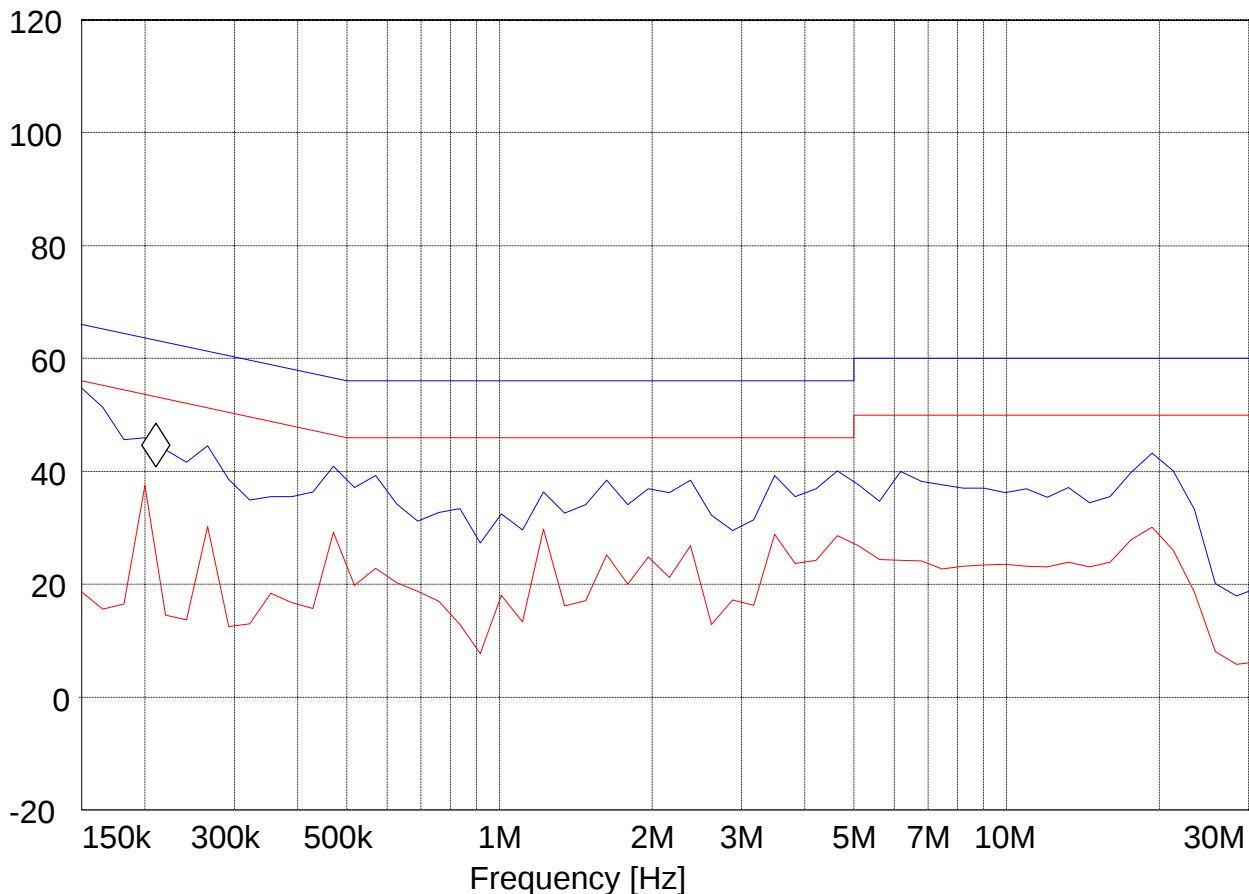

MES 55022 cond MaxPk	
MES 55022 cond Avg	
LIM EN 55022 V AV	Voltage AV Limit
LIM EN 55022 V QP	Voltage QP Limit


**Neutral:**

EUT: Kedron AG
Manufacturer: HP Texas
Operating Condition: WLAN 802.11a, 6 Mbps, ch 52, chain A
Test Site: Cetecom Inc.
Operator: Ed
Comment: 120V, N
Start of Test: 6/13/2007 / 4:14:24PM

SWEEP TABLE: "55022 cond"

Short Description: EN 55022 for 150KHz-30MHz
Start Stop Detector Meas. IF Transducer
Frequency Frequency Time Bandw.
150.0 kHz 30.0 MHz MaxPeak Coupled 10 kHz None

Marker: 209.82 kHz 40.81 dBμV N

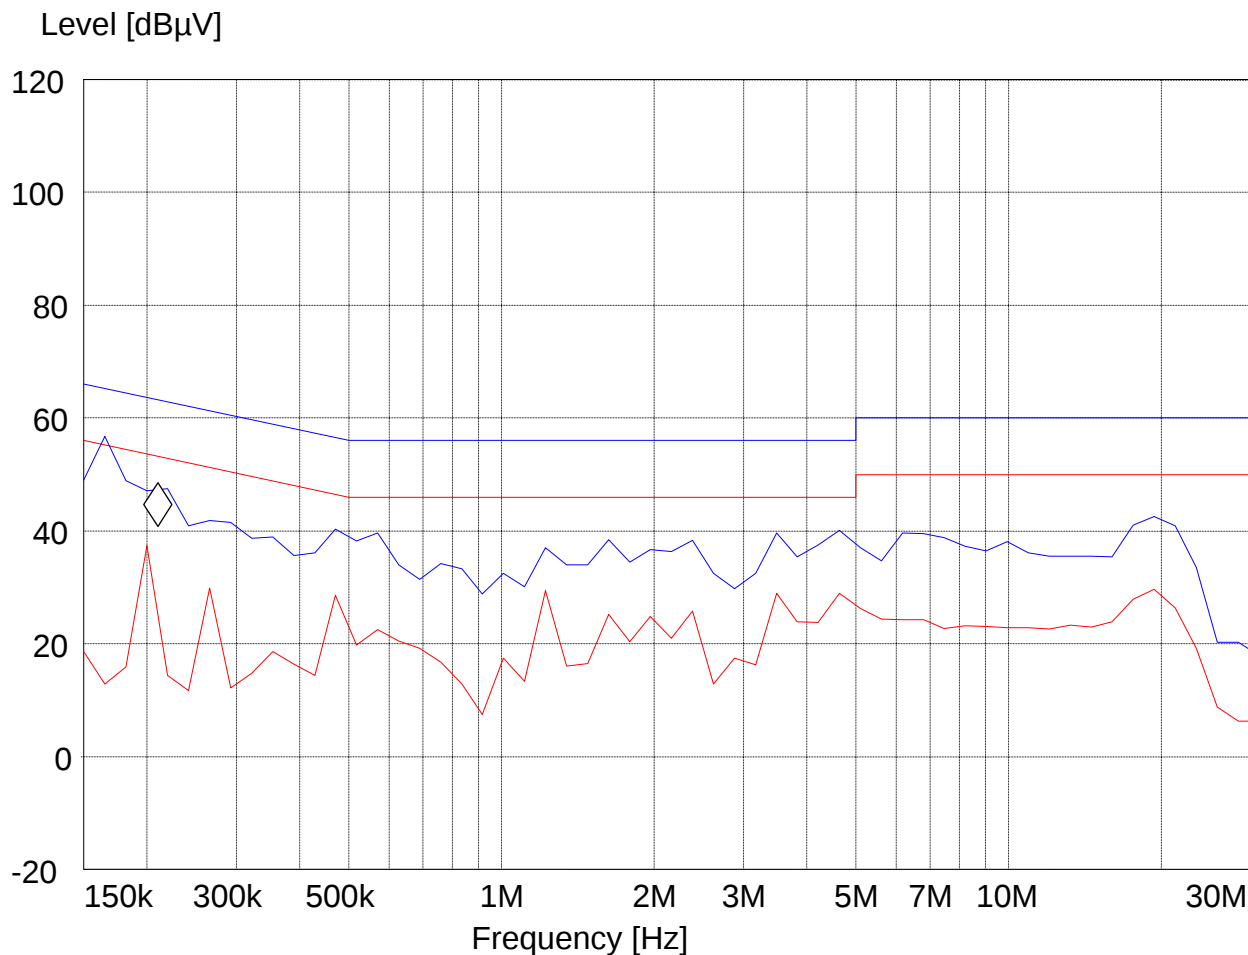

MES 55022 cond MaxPk
MES 55022 cond Avg
LIM EN 55022 V AV Voltage AV Limit
LIM EN 55022 V QP Voltage QP Limit



6 TEST EQUIPMENT AND ANCILLARIES USED FOR TESTS

No	Instrument/Ancillary	Type	Manufacturer	Serial No.	Cal Due	Interval
01	Spectrum Analyzer	ESIB 40	Rohde & Schwarz	100107	May 2008	1 year
02	Spectrum Analyzer	FSEM 30	Rohde & Schwarz	100017	August 2008	1 year
03	Signal Generator	SMY02	Rohde & Schwarz	836878/011	May 2008	1 year
04	Power-Meter	NRVD	Rohde & Schwarz	0857.8008.02	May 2008	1 year
05	Biconilog Antenna	3141	EMCO	0005-1186	June 2008	1 year
06	Horn Antenna (1-18GHz)	SAS-200/571	AH Systems	325	June 2008	1 year
07	Horn Antenna (18-26.5GHz)	3160-09	EMCO	1240	June 2008	1 year
08	Power Splitter	11667B	Hewlett Packard	645348	n/a	n/a
09	Climatic Chamber	VT4004	Voltsch	G1115	May 2008	1 year
10	High Pass Filter	5HC2700	Trilithic Inc.	9926013	n/a	n/a
11	High Pass Filter	4HC1600	Trilithic Inc.	9922307	n/a	n/a
12	Pre-Amplifier	JS4-00102600	Miteq	00616	May 2008	1 year
13	Power Sensor	URV5-Z2	Rohde & Schwarz	DE30807	May 2008	1 year
14	Digital Radio Comm. Tester	CMD-55	Rohde & Schwarz	847958/008	May 2008	1 year
15	Universal Radio Comm. Tester	CMU 200	Rohde & Schwarz	832221/06	May 2008	1 year
16	LISN	ESH3-Z5	Rohde & Schwarz	836679/003	May 2008	1 year
17	Loop Antenna	6512	EMCO	00049838	July 2008	2 years

6.1 BLOCK DIAGRAMS

Radiated Testing

ANECHOIC CHAMBER

