



# FCC RADIO TEST REPORT

FCC ID : B94HNI29CPK  
Equipment : Notebook Computer  
Brand Name : HP  
Model Name : HSN-I29C  
Applicant : HP Inc.  
1501 Page Mill Road, Palo Alto CA 94304 USA  
Standard : FCC 47 CFR Part 2, Part 27(D)

The product was received on Mar. 20, 2019 and testing was started from Mar. 28, 2019 and completed on Apr. 16, 2019. We, SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory, would like to declare that the tested sample has been evaluated in accordance with the test procedures given in ANSI / TIA-603-E and has been in compliance with the applicable technical standards.

The report must not be used by the client to claim product certification, approval, or endorsement by TAF or any agency of government.

The test results in this partial report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory, the test report shall not be reproduced except in full.

Approved by: Jones Tsai

**SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory**  
No. 52, Huaya 1st Rd., Guishan Dist., Taoyuan City, Taiwan (R.O.C.)



## Table of Contents

History of this test report.....	3
Summary of Test Result.....	4
<b>1 General Description .....</b>	<b>5</b>
1.1 Product Feature of Equipment Under Test.....	5
1.2 Modification of EUT .....	5
1.3 Testing Site.....	5
1.4 Applied Standards .....	6
<b>2 Test Configuration of Equipment Under Test .....</b>	<b>7</b>
2.1 Test Mode.....	7
2.2 Connection Diagram of Test System.....	7
2.3 Support Unit used in test configuration and system .....	8
2.4 Frequency List of Low/Middle/High Channels .....	8
<b>3 Conducted Test Items.....</b>	<b>9</b>
3.1 Measuring Instruments .....	9
3.2 Conducted Output Power Measurement and EIRP Measurement .....	10
<b>4 Radiated Test Items .....</b>	<b>11</b>
4.1 Measuring Instruments .....	11
4.2 Radiated Spurious Emission Measurement .....	12
<b>5 List of Measuring Equipment.....</b>	<b>13</b>
<b>6 Uncertainty of Evaluation .....</b>	<b>14</b>
<b>Appendix A. Test Results of Conducted Test</b>	
<b>Appendix B. Test Results of Radiated Test</b>	
<b>Appendix C. Test Setup Photographs</b>	



### History of this test report

Report No.	Version	Description	Issued Date
FG912412-01D	01	Initial issue of report	Apr. 25, 2019



### Summary of Test Result

Report Clause	Ref Std. Clause	Test Items	Result (PASS/FAIL)	Remark
3.2	§2.1046	Conducted Output Power and Effective Isotropic Radiated Power	Reporting only	-
-	§27.50 (a)(3)	EIRP Power Density	Pass	-
4.2	§2.1053 §27.53 (a)(4)	Radiated Spurious Emission	Pass	Under limit 18.52 dB at 9222.000 MHz

**Declaration of Conformity:**

The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers.

**Comments and Explanations:**

The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.

Reviewed by: Wii Chang

Report Producer: Yimin Ho



# 1 General Description

## 1.1 Product Feature of Equipment Under Test

WCDMA/LTE

Product Specification subjective to this standard	
Integrated WWAN Module	Brand Name: Fibocom Model Name: L860-GL
Antenna Type	WWAN: <Ant 1.>: PIFA Antenna <Ant 2.>: PIFA Antenna

## 1.2 Modification of EUT

No modifications are made to the EUT during all test items.

## 1.3 Testing Site

Test Site	SPORTON INTERNATIONAL INC.
Test Site Location	No.52, Huaya 1st Rd., Guishan Dist., Taoyuan City, Taiwan (R.O.C.) TEL: +886-3-327-3456 FAX: +886-3-328-4978
Test Site No.	<b>Sporton Site No.</b> TH05-HY
Test Engineer	George Chen
Temperature	24~25°C
Relative Humidity	50~52%

**Note:** The test site complies with ANSI C63.4 2014 requirement.

Test Site	SPORTON INTERNATIONAL INC.
Test Site Location	No.58, Aly. 75, Ln. 564, Wenhua 3rd, Rd., Guishan Dist., Taoyuan City, Taiwan (R.O.C.) TEL: +886-3-327-0868 FAX: +886-3-327-0855
Test Site No.	<b>Sporton Site No.</b> 03CH15-HY
Test Engineer	Watt Tseng, Karl Hou, and BigShow Wang
Temperature	23~24°C
Relative Humidity	55~56%

**Note:** The test site complies with ANSI C63.4 2014 requirement.

FCC Designation No. TW1190 and TW0007



## **1.4 Applied Standards**

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ ANSI C63.26-2015
- ♦ 47 CFR Part 2, Part 27(D)
- ♦ ANSI / TIA-603-E
- ♦ FCC KDB 971168 Power Meas License Digital Systems D01 v03r01
- ♦ FCC KDB 412172 D01 Determining ERP and EIRP v01r01

**Remark:** All test items were verified and recorded according to the standards and without any deviation during the test.

## 2 Test Configuration of Equipment Under Test


### 2.1 Test Mode

Antenna port conducted and radiated test items listed below are performed according to KDB 971168 D01 Power Meas. License Digital Systems v03r01 with maximum output power.

For radiated measurement, pre-scanned in Notebook type and three orthogonal panels, X, Y, Z. The worst cases (Notebook type) were recorded in this report.

Test Items	Band	Bandwidth (MHz)						Modulation			RB #			Test Channel		
		1.4	3	5	10	15	20	QPSK	16QAM	64QAM	1	Half	Full	L	M	H
Max. Output Power	30	-	-	v	v	-	-	v	v	v	v	v	v	v	v	v
E.I.R.P	30	-	-	v	v	-	-	v	v	v	v	v	v	v	v	v
Radiated Spurious Emission	30	Worst Case											v	v	v	
Remark	<ol style="list-style-type: none"> <li>The mark "v " means that this configuration is chosen for testing</li> <li>The mark "- " means that this bandwidth is not supported.</li> <li>The device is investigated from 30MHz to 10 times of fundamental signal for radiated spurious emission test under different RB size/offset and modulations in exploratory test. Subsequently, only the worst case emissions are reported.</li> </ol>															

### 2.2 Connection Diagram of Test System

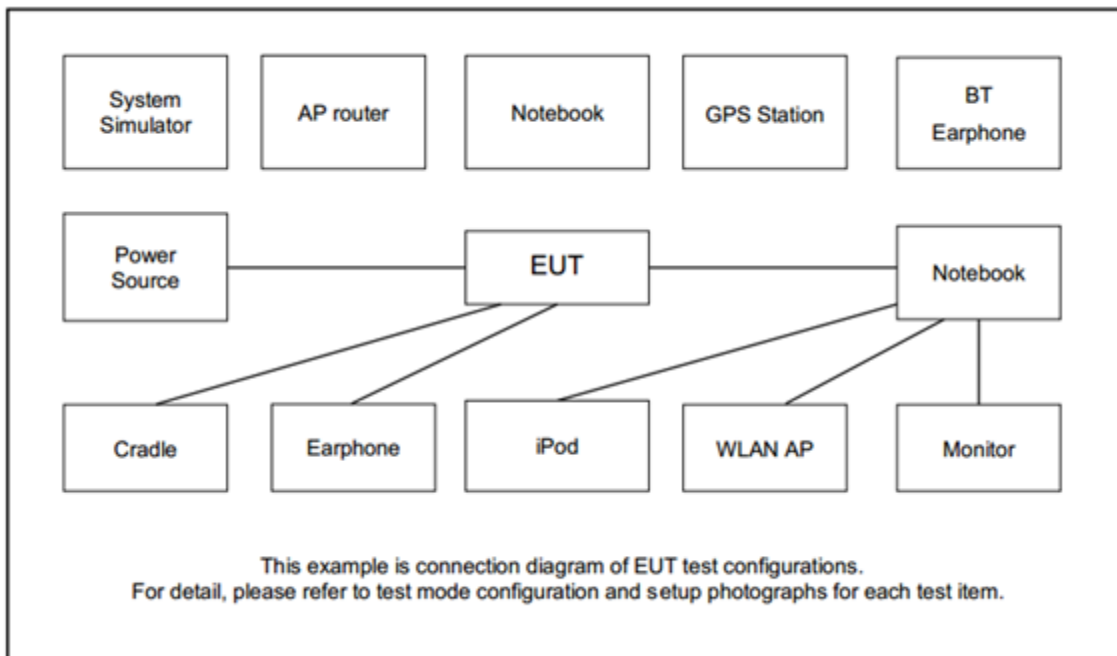



### 2.3 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model No.	FCC ID	Data Cable	Power Cord
1.	System Simulator	Anritsu	MT8820C	N/A	N/A	Unshielded, 1.8 m
2.	iPod Earphone	Apple	N/A	Verification	Unshielded, 1.0 m	N/A

### 2.4 Frequency List of Low/Middle/High Channels

LTE Band 30 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
10	Channel	-	27710	-
	Frequency	-	2310	-
5	Channel	27685	27710	27735
	Frequency	2307.5	2310	2312.5




### 3 Conducted Test Items

#### 3.1 Measuring Instruments

See list of measuring instruments of this test report.

##### 3.1.1 Test Setup

##### 3.1.2 Conducted Output Power

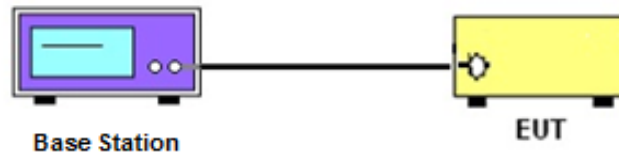

##### 3.1.3 Test Result of Conducted Test

Please refer to Appendix A.



## 3.2 Conducted Output Power Measurement and EIRP Measurement

### 3.2.1 Description of the Conducted Output Power Measurement and EIRP Measurement

A base station simulator was used to establish communication with the EUT. Its parameters were set to transmit the maximum power on the EUT. The measured power in the radio frequency on the transmitter output terminals shall be reported.

The EIRP of mobile transmitters must not exceed 0.25 Watts for LTE Band 30

According to KDB 412172 D01 Power Approach,

$EIRP = P_T + G_T - L_C$ , where

$P_T$  = transmitter output power in dBm

$G_T$  = gain of the transmitting antenna in dBi

$L_C$  = signal attenuation in the connecting cable between the transmitter and antenna in dB

### 3.2.2 Test Procedures

1. The transmitter output port was connected to the system simulator.
2. Set EUT at maximum power through the system simulator.
3. Select lowest, middle, and highest channels for each band and different modulation.
4. Measure and record the power level from the system simulator.


## 4 Radiated Test Items

### 4.1 Measuring Instruments


See list of measuring instruments of this test report.

#### 4.1.1 Test Setup

For radiated test from 30MHz to 1GHz

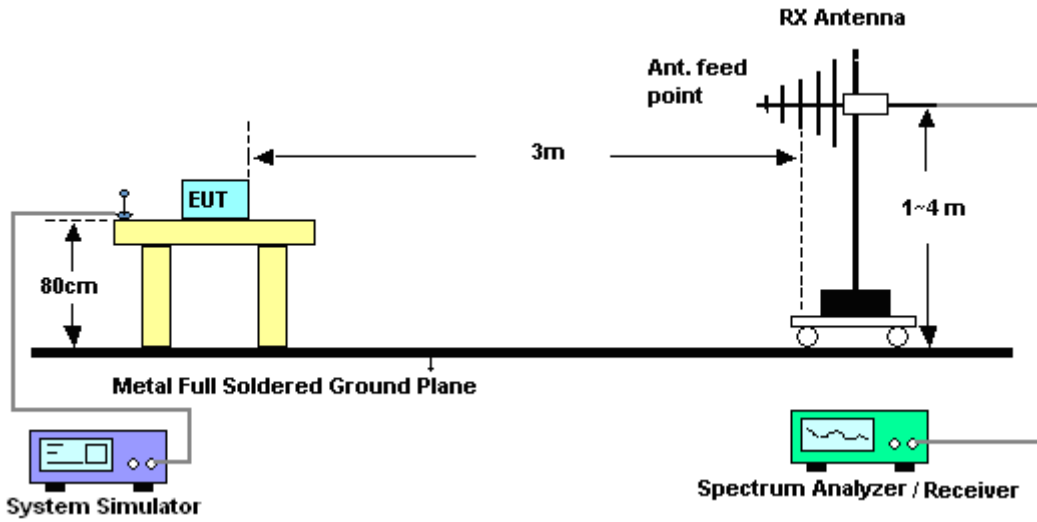

For radiated test above 1GHz

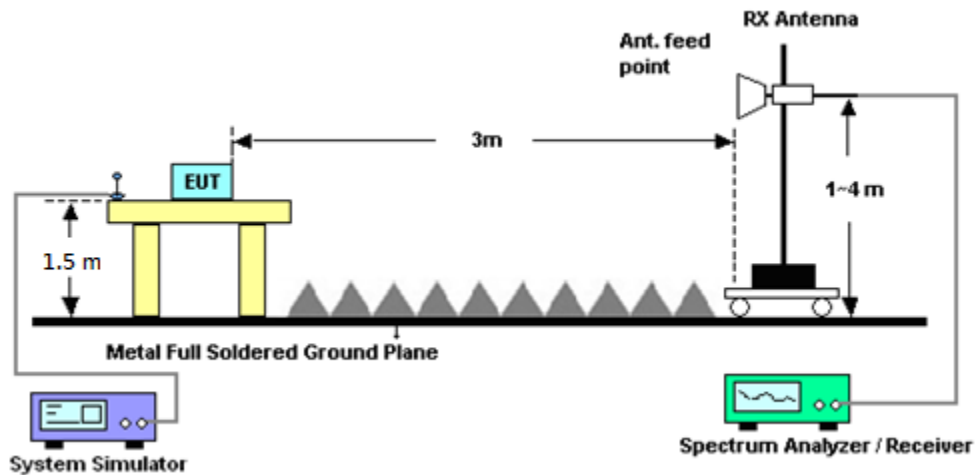

#### 4.1.2 Test Result of Radiated Test

Please refer to Appendix B.



## 4.2 Radiated Spurious Emission Measurement

### 4.2.1 Description of Radiated Spurious Emission Measurement

The radiated spurious emission was measured by substitution method according to ANSI / TIA-603-E  
The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitter power (P) by a factor of at least  $70 + 10 \log (P)$  dB.  
The spectrum is scanned from 30 MHz up to a frequency including its 10th harmonic.

### 4.2.2 Test Procedures

The testing follows FCC KDB 971168 D01 v03r01 Section 5.8 and ANSI / TIA-603-E Section 2.2.12.

1. The EUT was placed on a turntable with 0.8 meter height for frequency below 1GHz and 1.5 meter height for frequency above 1GHz respectively above ground.
2. The EUT was set 3 meters from the receiving antenna mounted on the antenna tower.
3. The table was rotated 360 degrees to determine the position of the highest spurious emission.
4. The height of the receiving antenna is varied between 1m to 4m to search the maximum spurious emission for both horizontal and vertical polarizations.
5. During the measurement, the system simulator parameters were set to force the EUT transmitting at maximum output power.
6. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz, taking the record of maximum spurious emission.
7. A horn antenna was substituted in place of the EUT and was driven by a signal generator.
8. Tune the output power of signal generator to the same emission level with EUT maximum spurious emission.  
$$\text{EIRP (dBm)} = \text{S.G. Power} - \text{Tx Cable Loss} + \text{Tx Antenna Gain}$$
$$\text{ERP (dBm)} = \text{EIRP} - 2.15$$
9. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.  
The limit line is derived from  $70 + 10\log(P)$ dB below the transmitter power P(Watts)  
$$= P(\text{W}) - [70 + 10\log(P)] (\text{dB})$$
$$= [30 + 10\log(P)] (\text{dBm}) - [70 + 10\log(P)] (\text{dB})$$
$$= -40\text{dBm}.$$



## 5 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Preamplifier	EMEC	EM18G40G	060715	18GHz ~ 40GHz	Dec. 06, 2018	Apr. 13, 2019~ Apr. 16, 2019	Dec. 05, 2019	Radiation (03CH15-HY)
Loop Antenna	Rohde & Schwarz	HFH2-Z2	100488	9 kHz~30 MHz	Jan. 07, 2019	Apr. 13, 2019~ Apr. 16, 2019	Jan. 06, 2020	Radiation (03CH15-HY)
SHF-EHF Horn Antenna	SCHWARZBECK	BBHA 9170	BBHA9170 576	18GHz ~ 40GHz	May 08, 2018	Apr. 13, 2019~ Apr. 16, 2019	May 07, 2019	Radiation (03CH15-HY)
Amplifier	SONOMA	310N	363440	9kHz~1GHz	Dec. 28, 2018	Apr. 13, 2019~ Apr. 16, 2019	Dec. 27, 2019	Radiation (03CH15-HY)
Bilog Antenna	TESEQ	CBL6111D&0 0800N1D01N- 06	41912&05	30MHz to 1GHz	Feb. 12, 2019	Apr. 13, 2019~ Apr. 16, 2019	Feb. 11, 2020	Radiation (03CH15-HY)
Horn Antenna	SCHWARZBECK	BBHA 9120D	9120D-162 0	1G~18GHz	Oct. 17, 2018	Apr. 13, 2019~ Apr. 16, 2019	Oct. 16, 2019	Radiation (03CH15-HY)
Preamplifier	Keysight	83017A	MY532701 95	1GHz~26.5GHz	Aug. 23, 2018	Apr. 13, 2019~ Apr. 16, 2019	Aug. 22, 2019	Radiation (03CH15-HY)
Preamplifier	Jet-Power	JPA0118-55-3 03	171000180 00550006	1GHz~18GHz	Jul. 10, 2018	Apr. 13, 2019~ Apr. 16, 2019	Jul. 09, 2019	Radiation (03CH15-HY)
Spectrum Analyzer	Agilent	E4446A	MY501801 36	3Hz~44GHz	Apr. 25, 2018	Apr. 13, 2019~ Apr. 16, 2019	Apr. 24, 2019	Radiation (03CH15-HY)
Antenna Mast	ChainTek	MBS-520-1	N/A	1m~4m	N/A	Apr. 13, 2019~ Apr. 16, 2019	N/A	Radiation (03CH15-HY)
Turn Table	ChainTek	T-200-S-1	N/A	0~360 Degree	N/A	Apr. 13, 2019~ Apr. 16, 2019	N/A	Radiation (03CH15-HY)
SHF-EHF Horn Antenna	SCHWARZBECK	BBHA 9170	BBHA9170 251	18GHz- 40GHz	Nov. 20, 2018	Apr. 13, 2019~ Apr. 16, 2019	Nov. 19, 2019	Radiation (03CH15-HY)
Signal Generator	Rohde & Schwarz	SMF100A	101107	100kHz~40GHz	May 22, 2018	Apr. 13, 2019~ Apr. 16, 2019	May 21, 2019	Radiation (03CH15-HY)
Horn Antenna	SCHWARZBECK	BBHA 9120 D	9120D-152 2	1G~18GHz	Sep. 07, 2018	Apr. 13, 2019~ Apr. 16, 2019	Sep. 06, 2019	Radiation (03CH15-HY)
Software	Audix	E3 6.2009-8-24	RK-00045 1	N/A	N/A	Apr. 13, 2019~ Apr. 16, 2019	N/A	Radiation (03CH15-HY)
Base Station	Anritsu	MT8820C	620110750 9	-	Mar. 02, 2018	Mar. 28, 2019	Mar. 01, 2020	Conducted (TH05-HY)



## 6 Uncertainty of Evaluation

### Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2Uc(y)$ )	3.37
---	------

### Uncertainty of Radiated Emission Measurement (1 GHz ~ 18 GHz)

Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2Uc(y)$ )	3.67
---	------

### Uncertainty of Radiated Emission Measurement (18 GHz ~ 40 GHz)

Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2Uc(y)$ )	4.03
---	------



## Appendix A. Test Results of Conducted Test

### Conducted Output Power(Average power)

LTE Band 30 Maximum Average Power [dBm]						
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
10	1	0	QPSK		<b>23.81</b>	
10	1	25			23.69	
10	1	49			23.80	
10	25	0			22.56	
10	25	12			22.50	
10	25	25			22.55	
10	50	0			22.69	
10	1	0	16-QAM	-	22.89	-
10	1	25			22.88	
10	1	49			22.99	
10	25	0			21.70	
10	25	12			21.73	
10	25	25			21.71	
10	50	0			21.78	
10	1	0	64-QAM		21.88	
10	1	25			21.79	
10	1	49			21.91	
10	25	0			20.66	
10	25	12			20.74	
10	25	25			20.72	
10	50	0			20.82	
5	1	0	QPSK	23.67	23.54	23.78
5	1	12		23.54	23.69	23.73
5	1	24		23.61	23.61	23.69
5	12	0		22.55	22.47	22.70
5	12	7		22.39	22.55	22.59
5	12	13		22.41	22.65	22.67
5	25	0		22.41	22.57	22.60
5	1	0	16-QAM	22.88	22.73	22.94
5	1	12		22.73	22.87	22.92
5	1	24		22.76	22.79	22.90
5	12	0		21.63	21.55	21.79
5	12	7		21.51	21.62	21.65
5	12	13		21.52	21.72	21.74
5	25	0		21.48	21.58	21.61
5	1	0	64-QAM	21.86	21.76	21.89
5	1	12		21.72	21.81	21.86
5	1	24		21.72	21.82	21.78
5	12	0		20.69	20.58	20.80
5	12	7		20.51	20.66	20.69
5	12	13		20.50	20.76	20.79
5	25	0		20.45	20.60	20.62



## Appendix B. Test Results of EIRP and Radiated Test

### EIRP

#### <Reporting Only>

LTE Band 30 / 5MHz (Average) (GT - LC = -4.11 dB)							
Channel	Mode	RB		Conducted		EIRP	
		Size	Offset	Power (dBm)	Power (Watts)	EIRP(dBm)	EIRP(W)
Lowest	QPSK	1	0	23.67	0.2328	19.56	0.0904
Middle		1	0	23.54	0.2259	19.43	0.0877
Highest		1	0	23.78	0.2388	19.67	0.0927
Lowest	16QAM	1	0	22.88	0.1941	18.77	0.0753
Middle		1	0	22.73	0.1875	18.62	0.0728
Highest		1	0	22.94	0.1968	18.83	0.0764
Lowest	64QAM	1	0	21.86	0.1535	17.75	0.0596
Middle		1	0	21.76	0.1500	17.65	0.0582
Highest		1	0	21.89	0.1545	17.78	0.0600
Limit	EIRP < 0.25W			Result		PASS	

LTE Band 30 / 10MHz (Average) (GT - LC = -4.11 dB)							
Channel	Mode	RB		Conducted		EIRP	
		Size	Offset	Power (dBm)	Power (Watts)	EIRP(dBm)	EIRP(W)
Lowest	QPSK	-	-	-	-	-	-
Middle		1	0	23.81	0.2404	19.70	0.0933
Highest		-	-	-	-	-	-
Lowest	16QAM	-	-	-	-	-	-
Middle		1	49	22.99	0.1991	18.88	0.0773
Highest		-	-	-	-	-	-
Lowest	64QAM	-	-	-	-	-	-
Middle		1	49	21.91	0.1552	17.80	0.0603
Highest		-	-	-	-	-	-
Limit	EIRP < 0.25W			Result		PASS	





**Radiated Spurious Emission**

**LTE Band 30**

LTE Band 30 / 5MHz / QPSK									
Channel	Frequency ( MHz )	ERP ( dBm )	Limit ( dBm )	Over Limit ( dB )	SPA Reading (dBm)	S.G. Power ( dBm )	TX Cable loss ( dB )	TX Antenna Gain (dBi)	Polarization (H/V)
Lowest	4610	-64.81	-40	-24.81	-59.75	-75.61	1.83	12.62	H
	6915	-62.60	-40	-22.60	-60.87	-71.77	2.35	11.53	H
	9221	-58.93	-40	-18.93	-62.08	-67.70	2.39	11.17	H
									H
									H
									H
	4610	-62.48	-40	-22.48	-57.73	-73.28	1.83	12.62	V
	6915	-62.72	-40	-22.72	-61.03	-71.89	2.35	11.53	V
	9221	-59.65	-40	-19.65	-62.04	-68.42	2.39	11.17	V
									V
									V
									V
Middle	4615	-64.44	-40	-24.44	-59.39	-75.24	1.83	12.62	H
	6923	-62.80	-40	-22.80	-61.14	-72.00	2.36	11.55	H
	9231	-58.53	-40	-18.53	-61.69	-67.32	2.39	11.18	H
									H
									H
									H
	4615	-63.09	-40	-23.09	-58.34	-73.89	1.83	12.62	V
	6923	-62.70	-40	-22.70	-61.15	-71.90	2.36	11.55	V
	9231	-59.47	-40	-19.47	-61.86	-68.26	2.39	11.18	V
									V
									V
									V



Highest	4620	-64.71	-40	-24.71	-59.68	-75.51	1.83	12.62	H
	6930	-62.66	-40	-22.66	-61.08	-71.88	2.36	11.58	H
	9243	-58.76	-40	-18.76	-61.94	-67.56	2.39	11.19	H
									H
									H
									H
									H
	4620	-63.22	-40	-23.22	-58.47	-74.02	1.83	12.62	V
	6930	-62.58	-40	-22.58	-61.12	-71.80	2.36	11.58	V
	9243	-59.60	-40	-19.60	-61.99	-68.40	2.39	11.19	V
									V
									V
									V
									V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.



LTE Band 30 / 10MHz / QPSK									
Channel	Frequency ( MHz )	ERP ( dBm )	Limit ( dBm )	Over Limit ( dB )	SPA Reading (dBm)	S.G. Power ( dBm )	TX Cable loss ( dB )	TX Antenna Gain (dBi)	Polarization (H/V)
Middle	4611	-63.73	-40	-23.73	-58.68	-74.53	1.83	12.62	H
	6918	-61.53	-40	-21.53	-59.83	-70.71	2.36	11.54	H
	9222	-58.52	-40	-18.52	-61.67	-67.29	2.39	11.17	H
									H
									H
									H
									H
	4611	-61.96	-40	-21.96	-57.21	-72.76	1.83	12.62	V
	6918	-62.49	-40	-22.49	-60.85	-71.67	2.36	11.54	V
	9222	-59.21	-40	-19.21	-61.6	-67.98	2.39	11.17	V
									V
									V
									V
									V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.