

Antenna Sample / Antenna Data Requirements for worldwide regulatory approval

Section	Description of Required OEM / ODM Antenna Information	US / IC	EU	Japan	Taiwan	S.Korea
1A	Part Number for Antenna Assembly	Required	Required	Required	Required	Required
1B	Antenna Manufacturer Name	Required	Required	Required	Required	Required
1C	Description of Antenna Type	Required	N/A	N/A	N/A	N/A
1D	Tx antenna Gain(Peak Gain W/ cable loss) *	Required	Required	Required	Required	Required
2	Dimensioned Photographs and Drawings of Tx and Rx antennas	Required	Required	Required	Required	Required
3	Radiation patterns of antennas loaded in the host platform.	N/A	Required	Required	Required	N/A
4	Platform model name / number - correlated to antenna manufacturer and antenna part number	Required	Required	Desired	Required	Desired
5	Photograph(s) or Drawings showing location of antennas in platform. <u>(S. Korea requires photographs of antennas for approval submission). Taiwan requires pictures of each antenna type shown in the system.</u>	Required	Required	Desired	<u>Required (Photos)</u>	<u>Required (Photos)</u>
6	Mech. drawings / photos with dimensions of antenna locations and distance from end-user (For evaluation of SAR testing requirement).	Required	N/A	N/A	N/A	N/A
7	Photograph(s) or Drawings showing the location of all antennas (WLAN, other) and distance between those transmitting antennas. Information will be used to evaluate whether co-location testing is required.	Required	N/A	N/A	N/A	N/A
8	Local representative contact information for LMA/ PARS process.	Required	N/A	N/A	N/A	N/A

Antenna Information

Section 1. Antenna Assembly Specifications


Communication System	Band	Frequency(MHz) from low to high spectrum		1A Part Number for Antenna Assembly	1B Antenna Manufacturer Name	1C Description of Antenna Type	1D Tx Antenna Gain(dBi) Ant5
WCDMA/ LTE	1	1920	1980	Ant5 : 6036B0317401 (00-3302701450)	Hong Bo	PIFA	-0.39
WCDMA/ LTE	2	1850	1910				-0.80
LTE	3	1710	1785				-1.06
WCDMA/ LTE	4	1710	1755				-1.06
WCDMA/ LTE	5	824	849				-9.08
LTE	7	2500	2570				-0.66
WCDMA/ LTE	8	880	915				-9.07
LTE	12	699	716				-5.46
LTE	13	777	787				-8.09
LTE	14	788	798				-8.21
LTE	17	704	716				-5.46
LTE	18	815	830				-8.82
LTE	19	830	845				-9.04
LTE	20	832	862				-9.04
LTE	25	1850	1915				-0.80
LTE	26	814	849				-8.82
LTE	28	703	748				-5.61
LTE	30	2305	2315				-1.33
LTE	34	2010	2025				-1.94
LTE	38	2570	2620				-2.32
LTE	39	1880	1920				-0.82
LTE	40	2300	2400				-1.28
LTE	41	2496	2690				-0.56
LTE	42	3400	3600				-0.83
LTE	43	3600	3800				-0.83
LTE	48	3550	3700				-0.25
LTE	66	1710	1780	-1.06			
LTE	71	663	698	-6.10			

- Antenna Peak Gain required being test in system basis.


Section 2. Dimensioned Photos or Drawings of Antennas

	Ant supplier	Part number	Drawing	Photo
Ant5	Hong Bo	6036B0317401 (00-3302701450)	V	V
Ant6	Hong Bo	6036B0317401 (00-3302701450)	V	V
Ant7	Hong Bo	6036B0317301 (00-2602751750)	V	V
Ant8	Hong Bo	6036B0317501 (00-2602751850)	V	V


Ant5 Dimensioned Drawing:

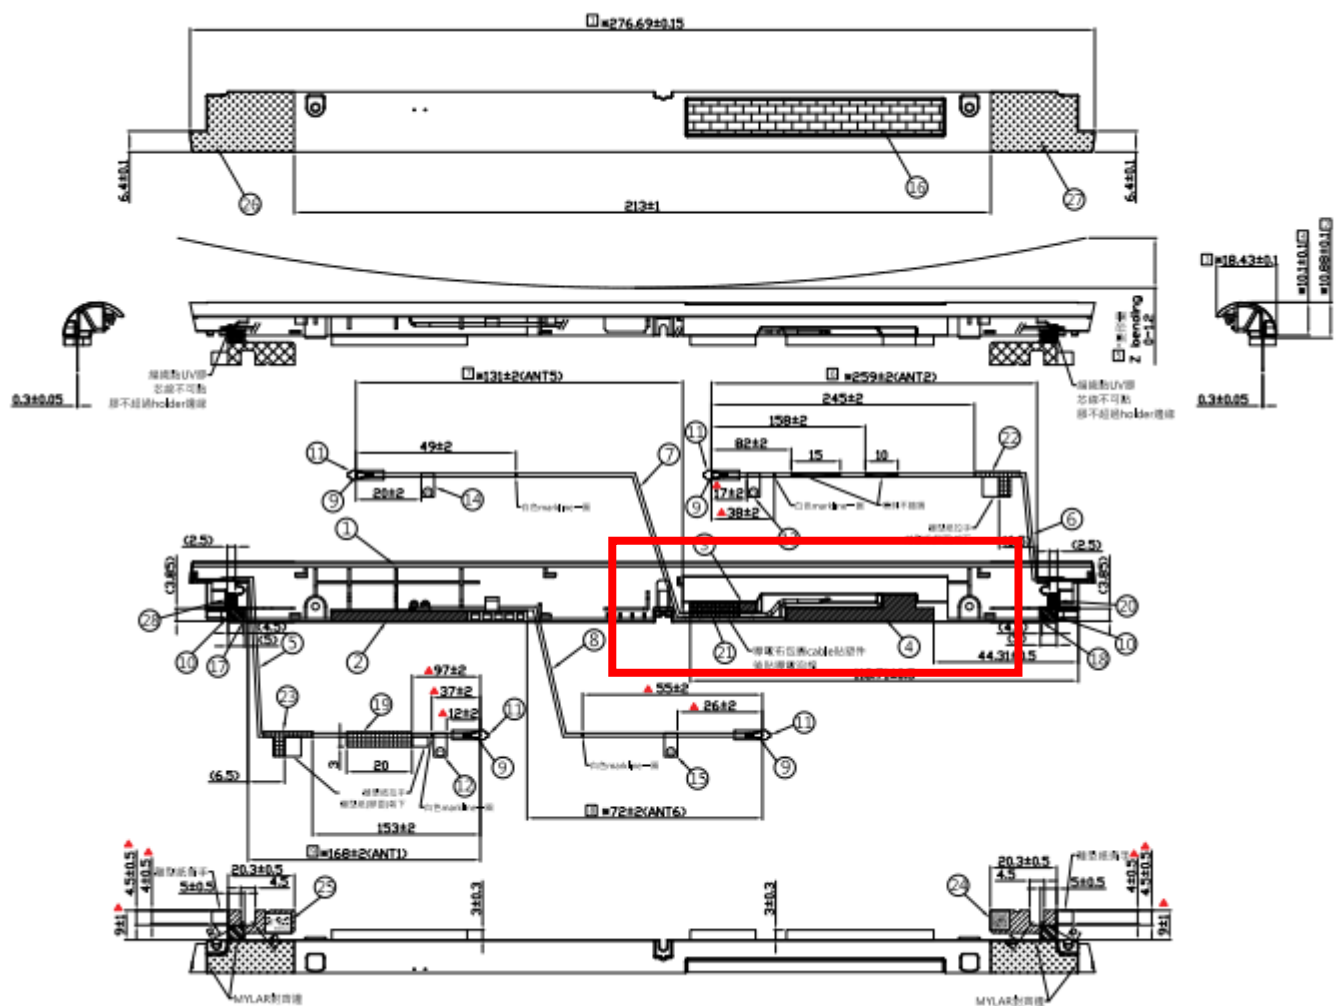


Ant6 Photo:

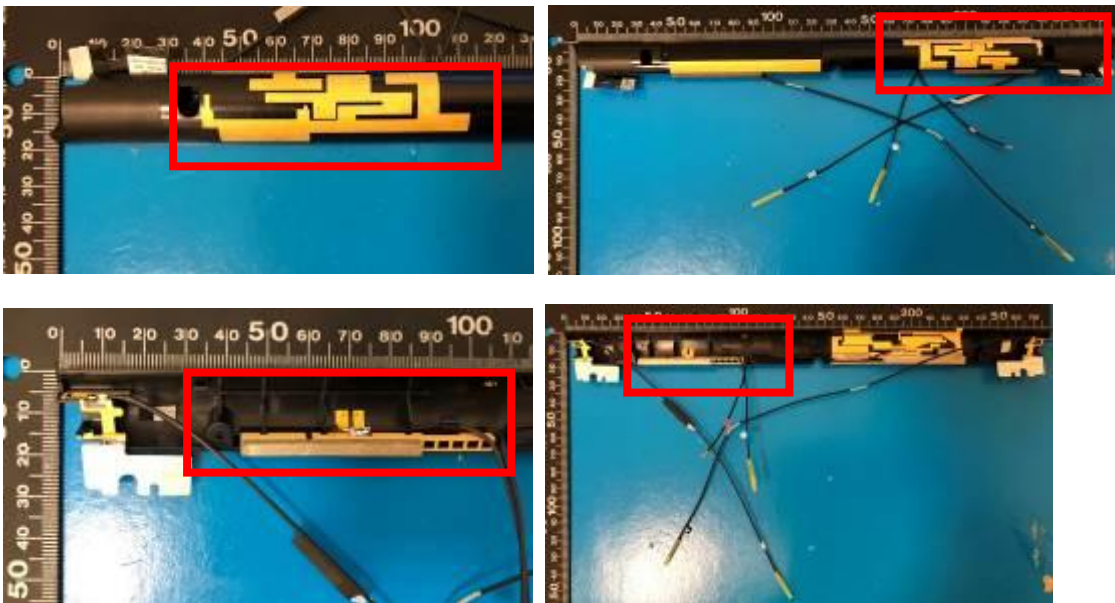

Ant7 Dimensioned Drawing:

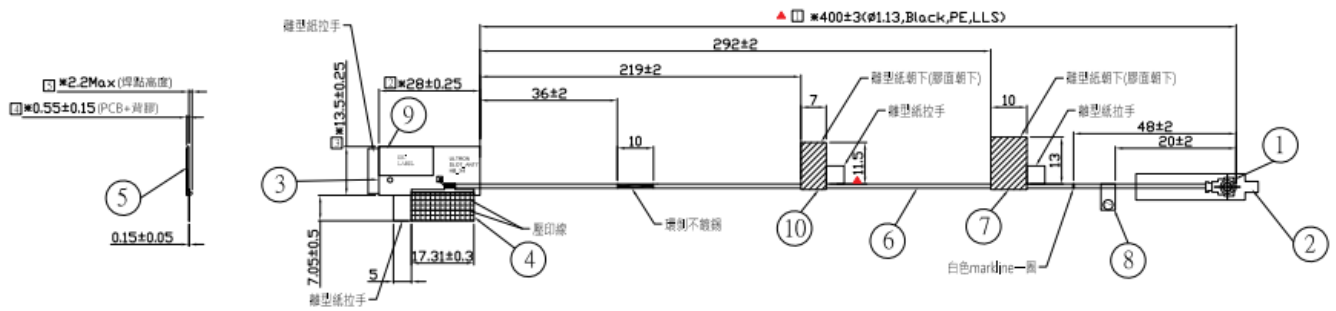


Ant7 Photo:

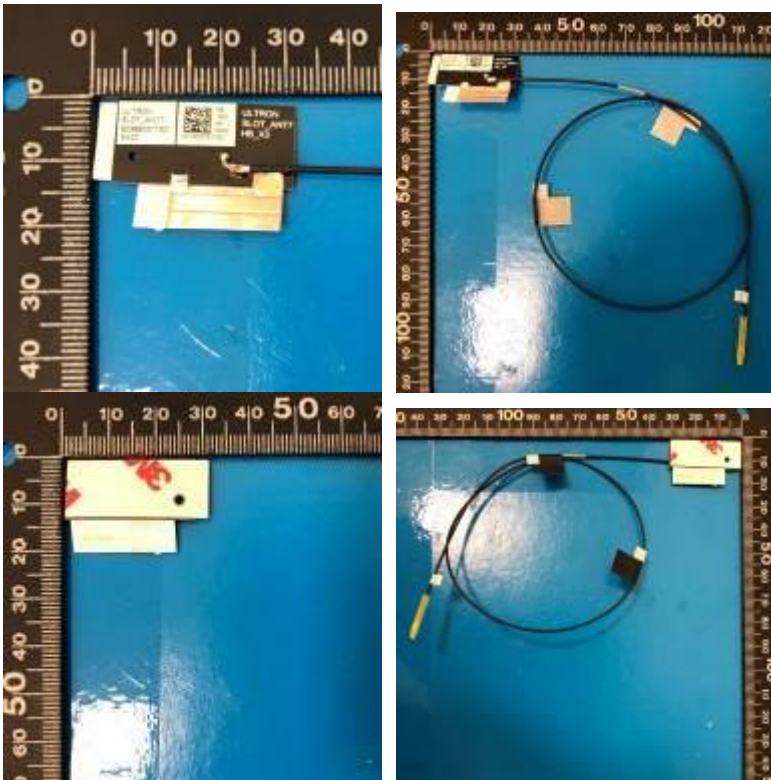

Section 3. Radiation characteristics of antennae Loaded in Host Platform


- The listed frequency 2D radiation pattern is required
- [Ant5:](#)

[814MHz](#)

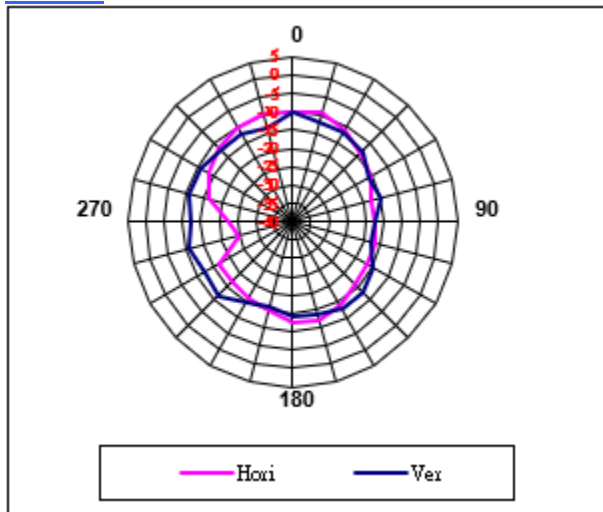


Frequency (MHz)	814
Horizontal peak gain (dBi)	-8.82
Vertical peak gain (dBi)	-10.02

[832MHz](#)

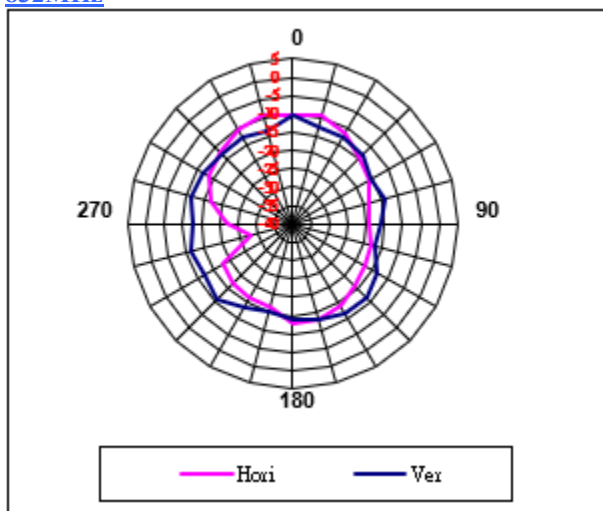


Frequency (MHz)	832
Horizontal peak gain (dBi)	-9.24
Vertical peak gain (dBi)	-10.46

[837MHz](#)

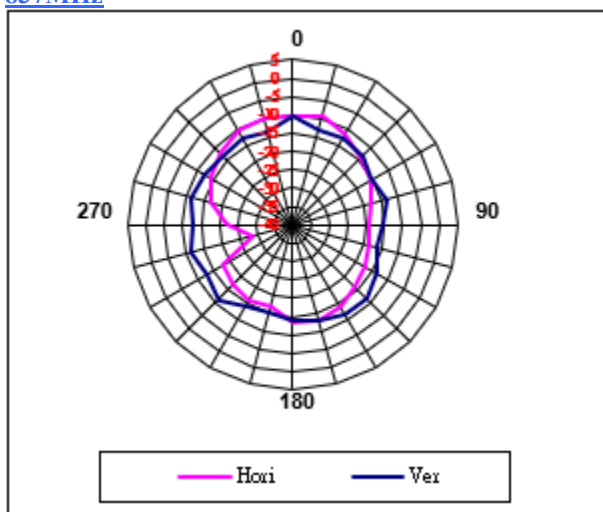


Frequency (MHz)	837
Horizontal peak gain (dBi)	-9.16
Vertical peak gain (dBi)	-10.56

845MHz

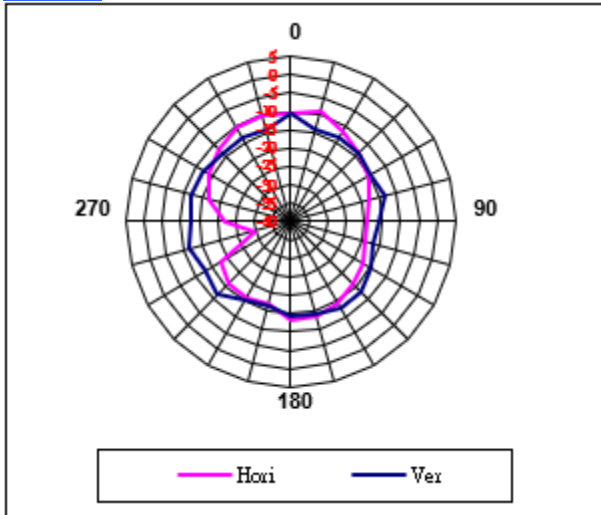


Frequency (MHz)	845
Horizontal peak gain (dBi)	-9.04
Vertical peak gain (dBi)	-10.78

849MHz

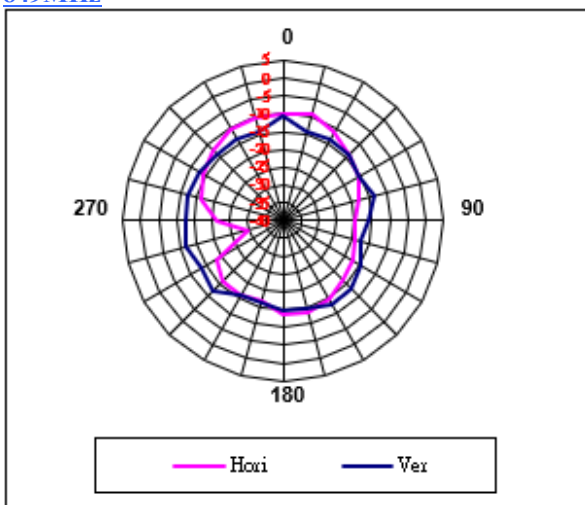


Frequency (MHz)	849
Horizontal peak gain (dBi)	-9.08
Vertical peak gain (dBi)	-10.88

880MHz

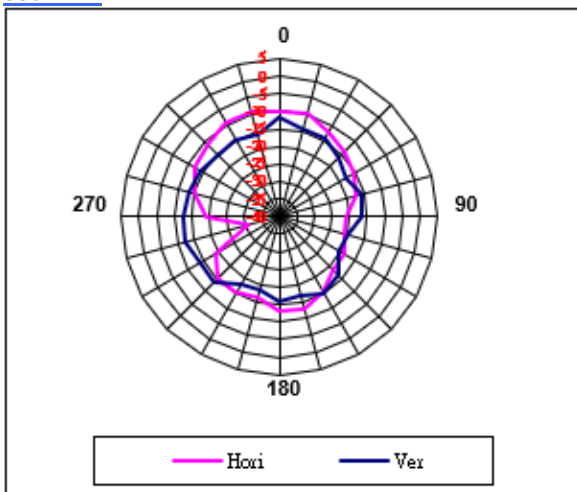


Frequency (MHz)	880
Horizontal peak gain (dBi)	-9.25
Vertical peak gain (dBi)	-11.52

894MHz

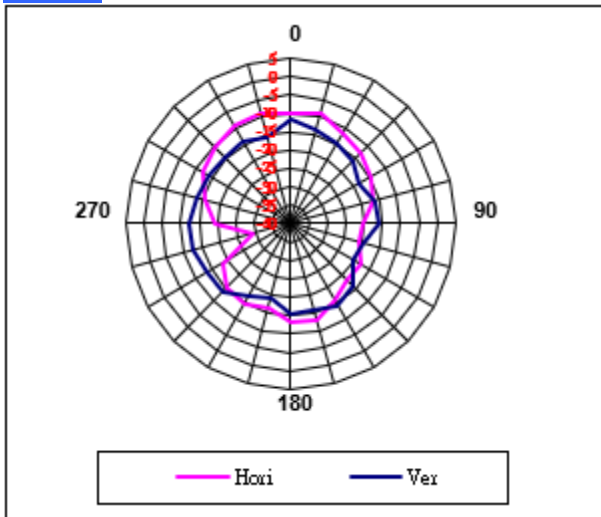


Frequency (MHz)	894
Horizontal peak gain (dBi)	-9.01
Vertical peak gain (dBi)	-11.45

915MHz

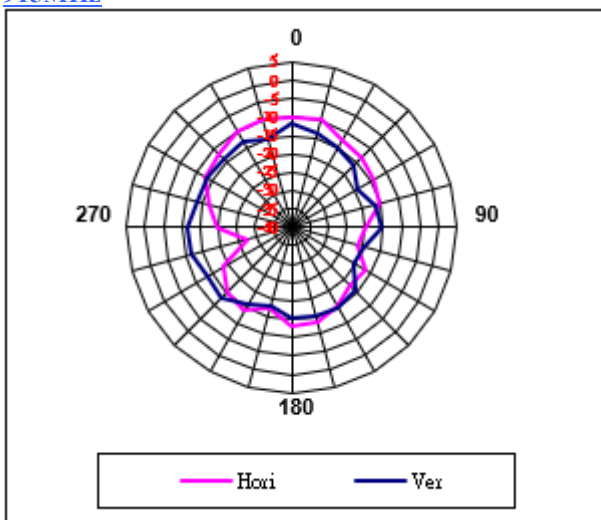


Frequency (MHz)	915
Horizontal peak gain (dBi)	-9.34
Vertical peak gain (dBi)	-11.53

1710MHz

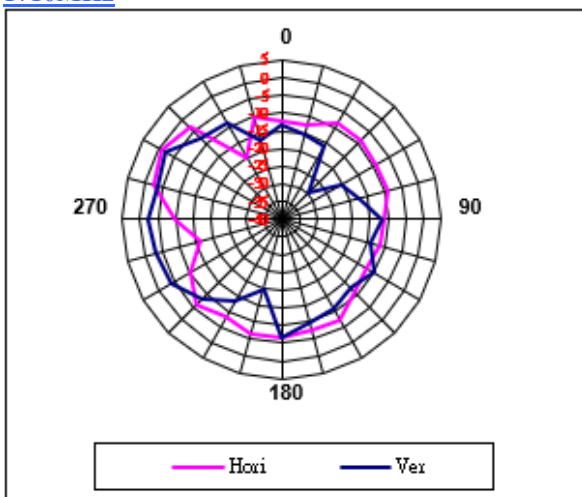


Frequency (MHz)	1710
Horizontal peak gain (dBi)	-1.06
Vertical peak gain (dBi)	-1.84

1750MHz

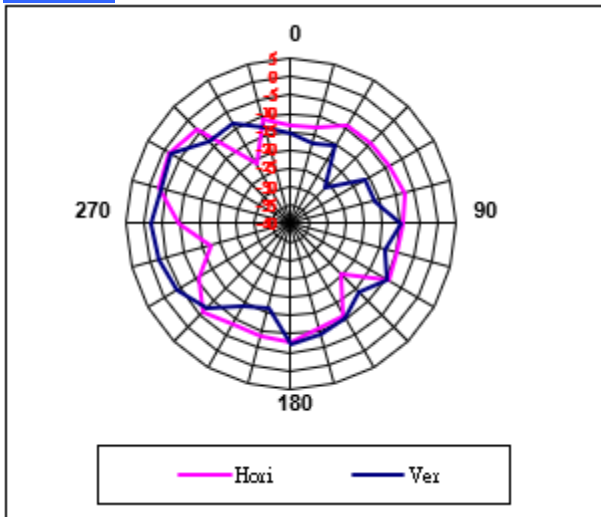


Frequency (MHz)	1750
Horizontal peak gain (dBi)	-1.62
Vertical peak gain (dBi)	-1.97

1780MHz

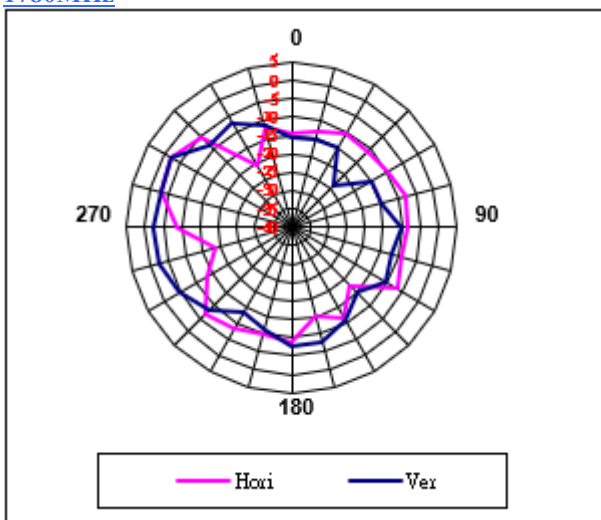


Frequency (MHz)	1780
Horizontal peak gain (dBi)	-2.11
Vertical peak gain (dBi)	-2.03

1785MHz

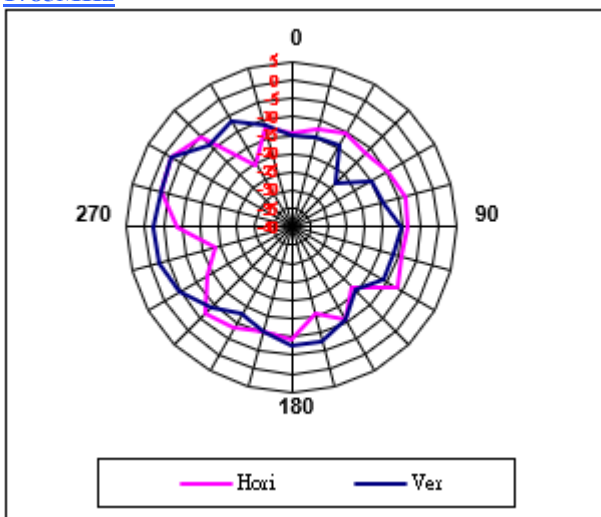


Frequency (MHz)	1785
Horizontal peak gain (dBi)	-2.13
Vertical peak gain (dBi)	-2.10

1880MHz

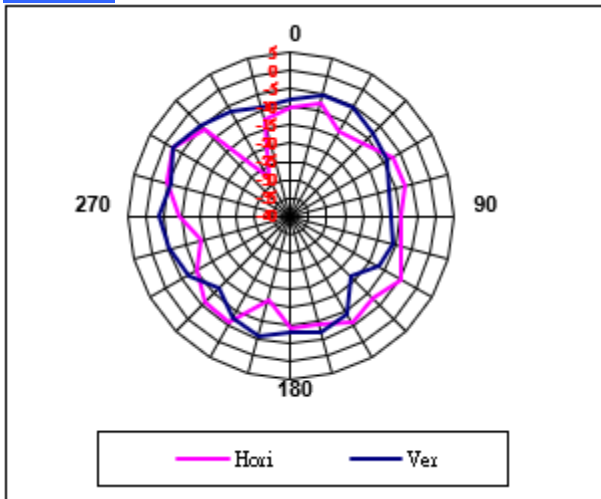


Frequency (MHz)	1880
Horizontal peak gain (dBi)	-2.23
Vertical peak gain (dBi)	-2.07

1900MHz

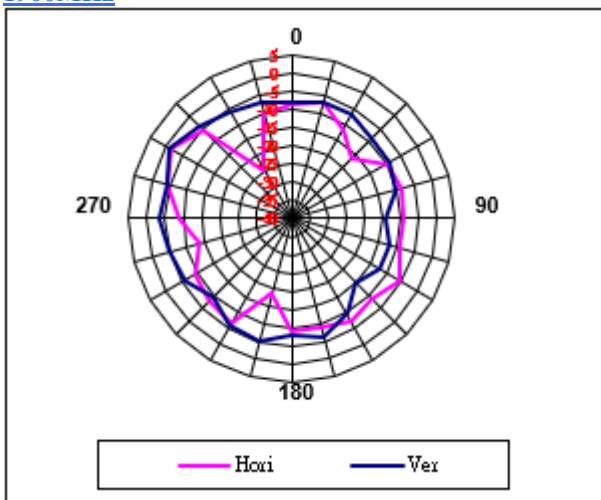


Frequency (MHz)	1900
Horizontal peak gain (dBi)	-1.45
Vertical peak gain (dBi)	-0.99

1920MHz

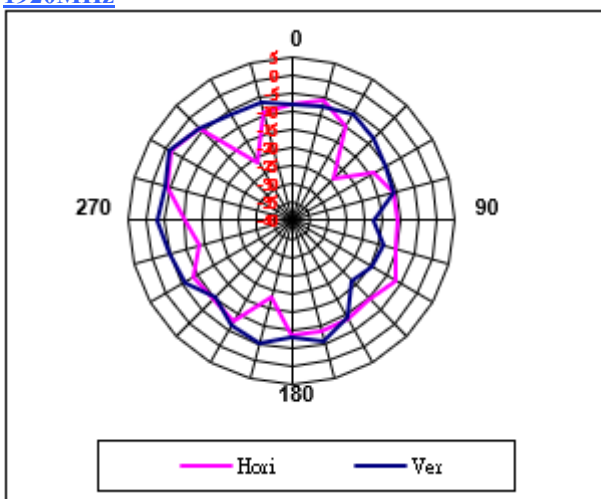


Frequency (MHz)	1920
Horizontal peak gain (dBi)	-1.25
Vertical peak gain (dBi)	-0.82

1950MHz

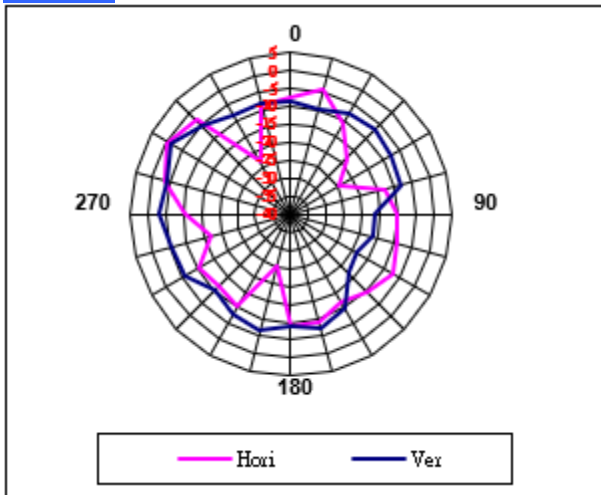


Frequency (MHz)	1950
Horizontal peak gain (dBi)	-0.39
Vertical peak gain (dBi)	-1.13

1980MHz

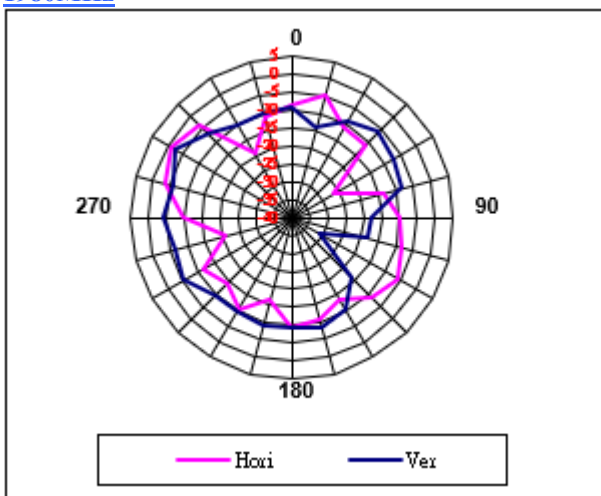


Frequency (MHz)	1980
Horizontal peak gain (dBi)	-1.00
Vertical peak gain (dBi)	-2.31

2496MHz

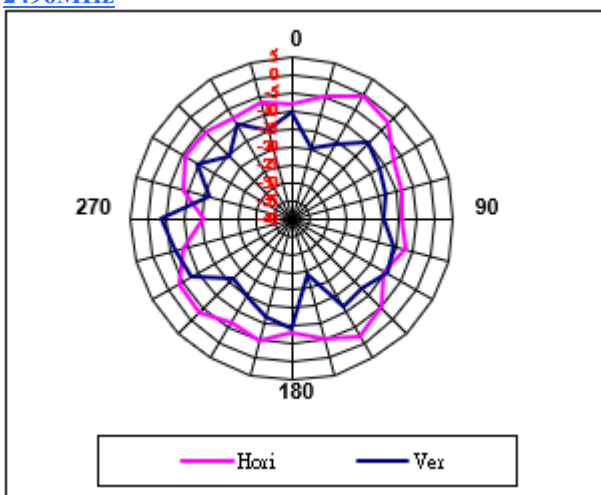


Frequency (MHz)	2496
Horizontal peak gain (dBi)	-0.56
Vertical peak gain (dBi)	-3.58

2595MHz

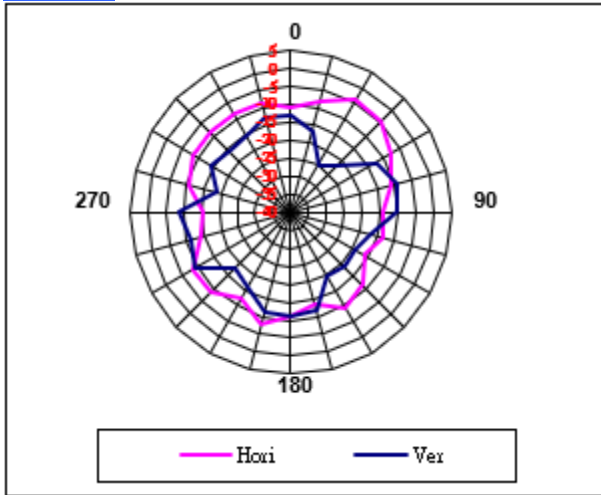


Frequency (MHz)	2595
Horizontal peak gain (dBi)	-3.91
Vertical peak gain (dBi)	-8.86

2690MHz

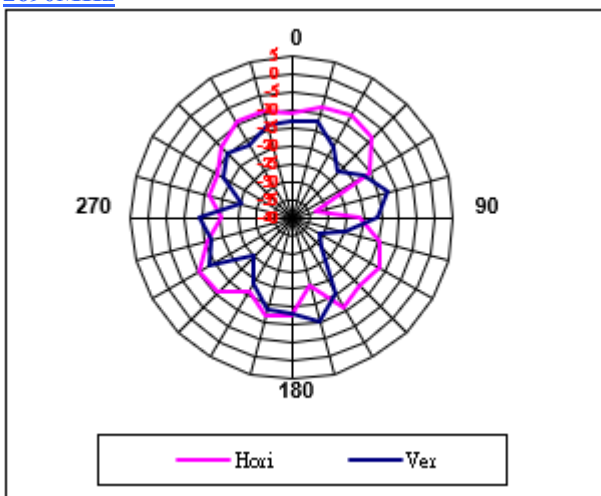


Frequency (MHz)	2690
Horizontal peak gain (dBi)	-6.79
Vertical peak gain (dBi)	-10.02

3300MHz

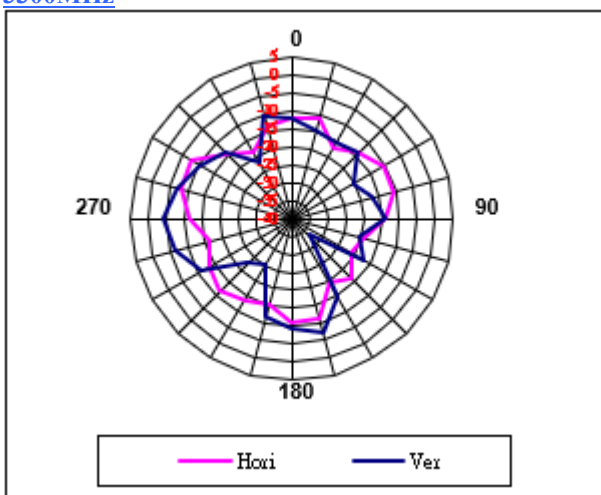


Frequency (MHz)	3300
Horizontal peak gain (dBi)	-7.87
Vertical peak gain (dBi)	-4.20

3400MHz

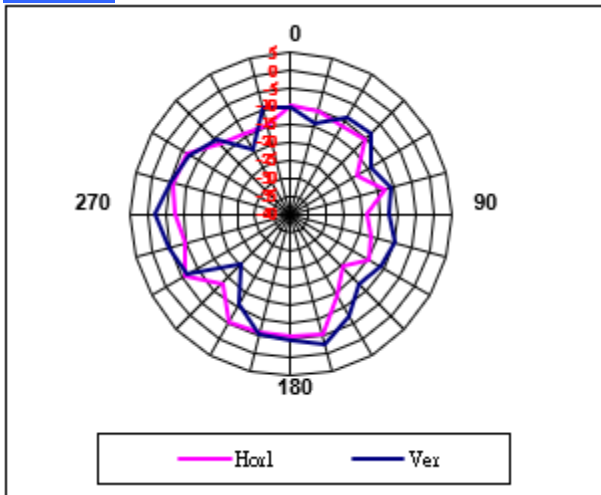


Frequency (MHz)	3400
Horizontal peak gain (dBi)	-5.50
Vertical peak gain (dBi)	-2.16

3500MHz

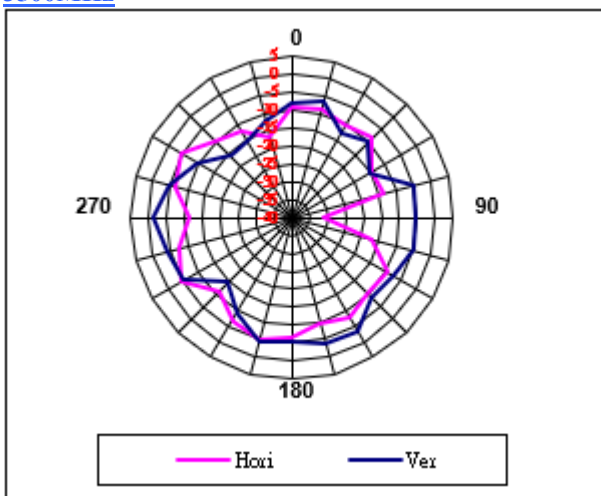


Frequency (MHz)	3500
Horizontal peak gain (dBi)	-4.15
Vertical peak gain (dBi)	-1.20

3600MHz

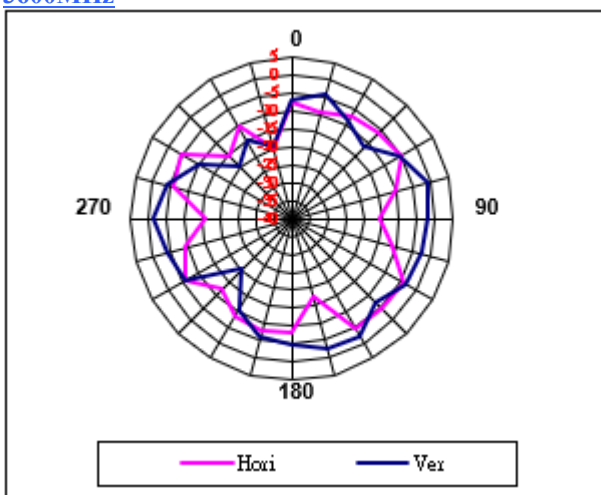


Frequency (MHz)	3600
Horizontal peak gain (dBi)	-4.00
Vertical peak gain (dBi)	-0.83

3750MHz

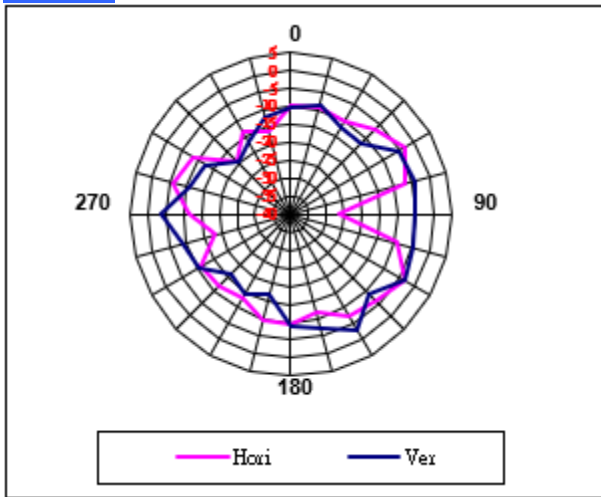


Frequency (MHz)	3750
Horizontal peak gain (dBi)	-3.00
Vertical peak gain (dBi)	-2.81

4200MHz

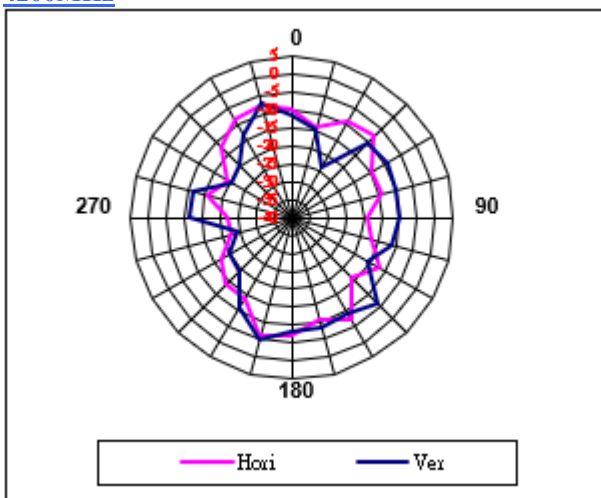


Frequency (MHz)	4200
Horizontal peak gain (dBi)	-6.06
Vertical peak gain (dBi)	-4.94

4400MHz

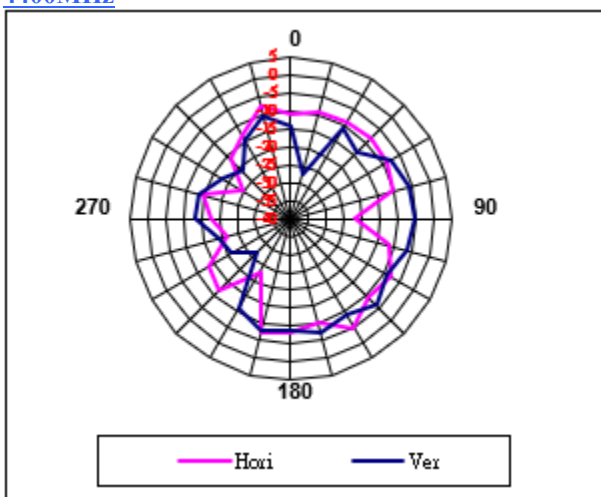


Frequency (MHz)	4400
Horizontal peak gain (dBi)	-4.95
Vertical peak gain (dBi)	-5.21

4800MHz

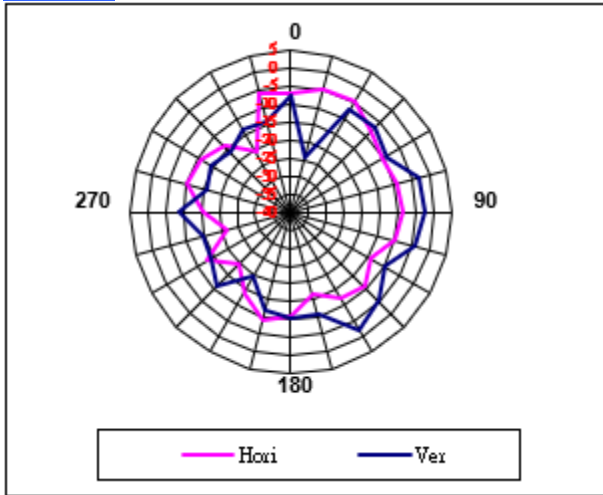

Frequency (MHz)	4800
Horizontal peak gain (dBi)	-4.29
Vertical peak gain (dBi)	-2.02

5000MHz

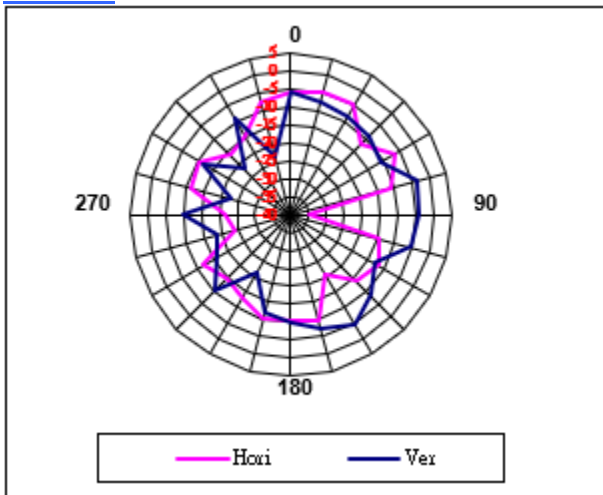


Frequency (MHz)	5000
Horizontal peak gain (dBi)	-4.67
Vertical peak gain (dBi)	-3.38

Section 4. Host Platform Information

OEM / ODM Host platform: platform correlated to antenna data


Rating Label Photo:

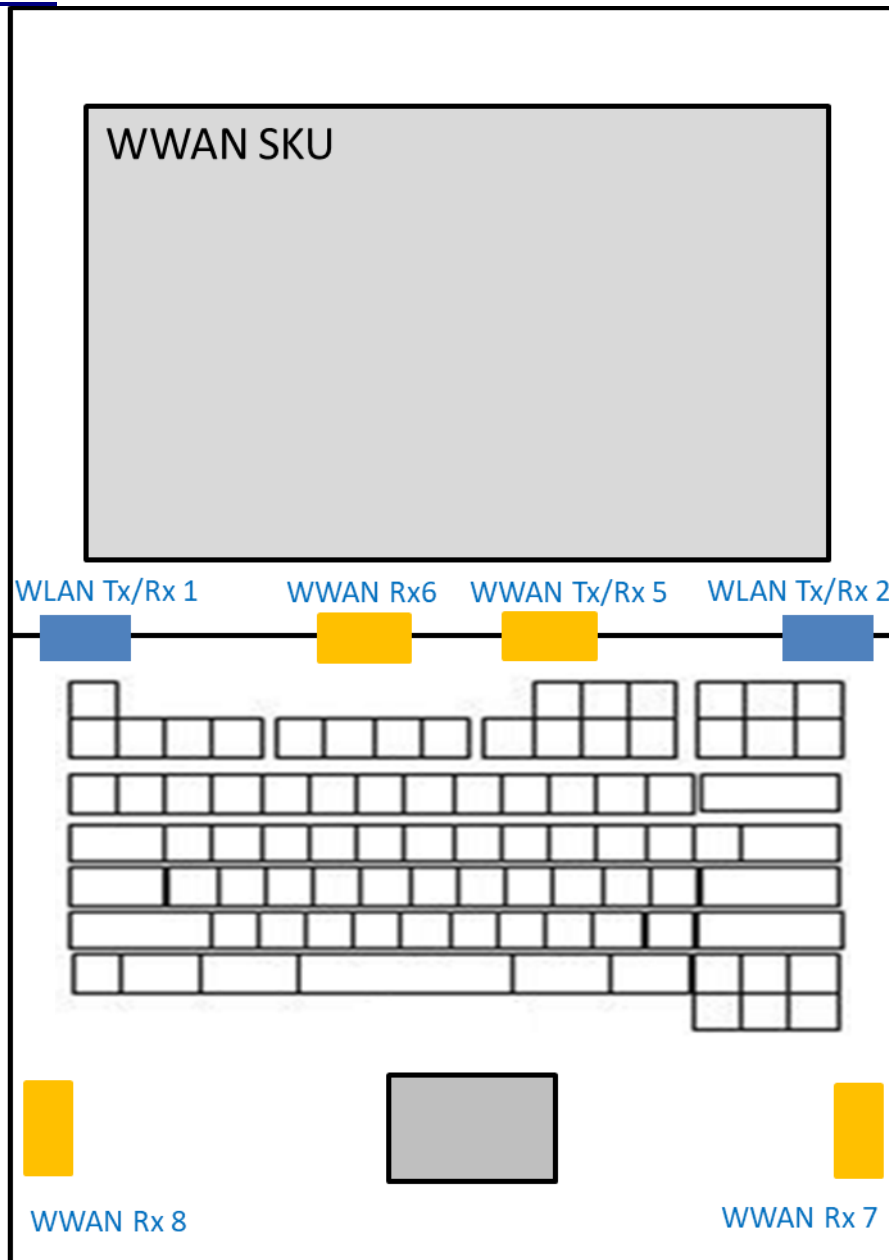

Section 5. Antenna Host Platform Location Information


Include a **dimensioned photo(s) or dimensioned drawing(s)** of Ant5, Ant6, Ant7, Ant8 placements (measurements are not required for receive-only antenna).

Any antenna that transmits must show dimensions to bottom of laptop. Provide a description of the materials that are used for supporting or surrounding transmit antennas; for example, non-conductive plastics vs. conductive coated plastic or metallic materials.

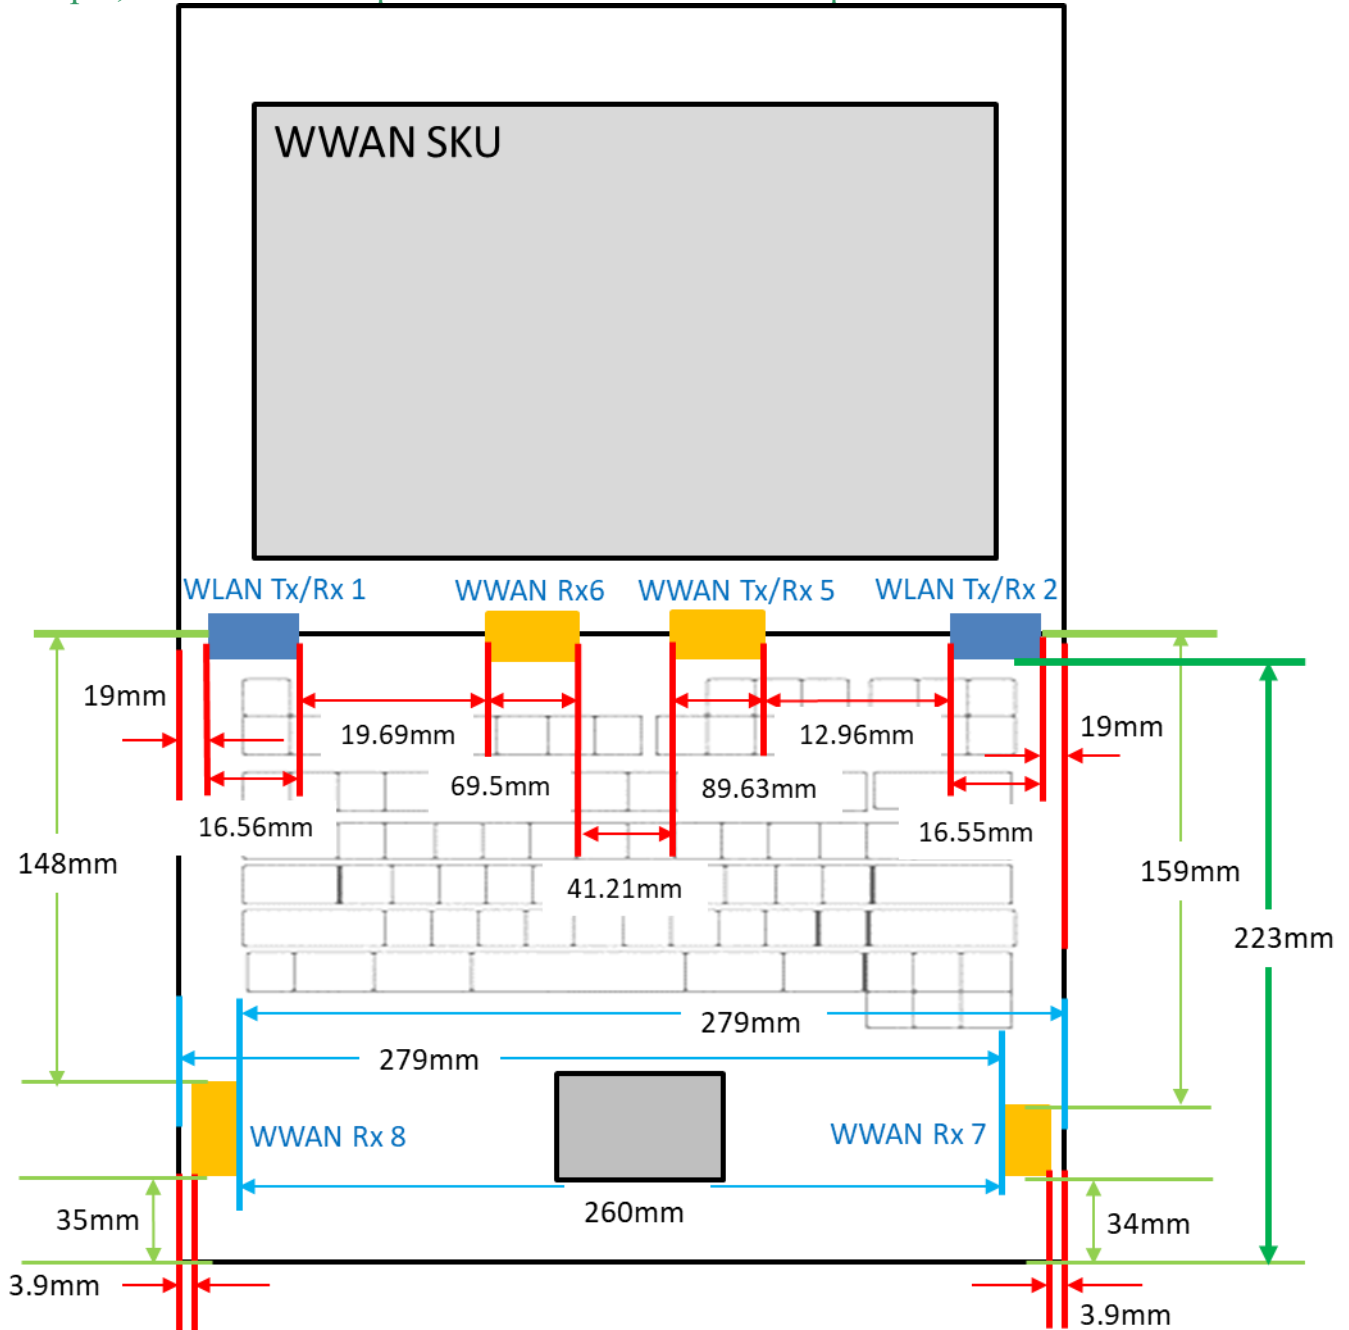



Section 6. Antenna dimensional information for SAR evaluation

Include a **dimensioned photo(s) or dimensioned drawing(s)** showing the distance (mm) between the transmit antennas and the user (excluding hands, wrist, feet, and ankle). For notebook/laptop hosts show lapheld position (example below). For tablet hosts show all orientations including lapheld, primary & secondary portrait, primary & secondary landscape positions. Include a description of any proximity sensors or power throttling implementations that limit or exclude use of any host orientation.

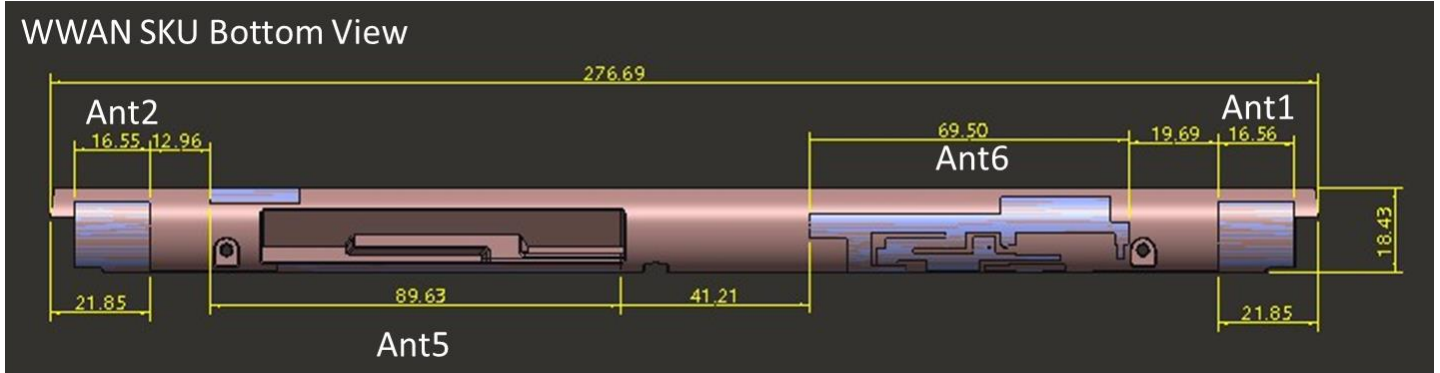


WWAN ANT 5 NB_Mode


WLAN ANT 1/2 NB_Mode

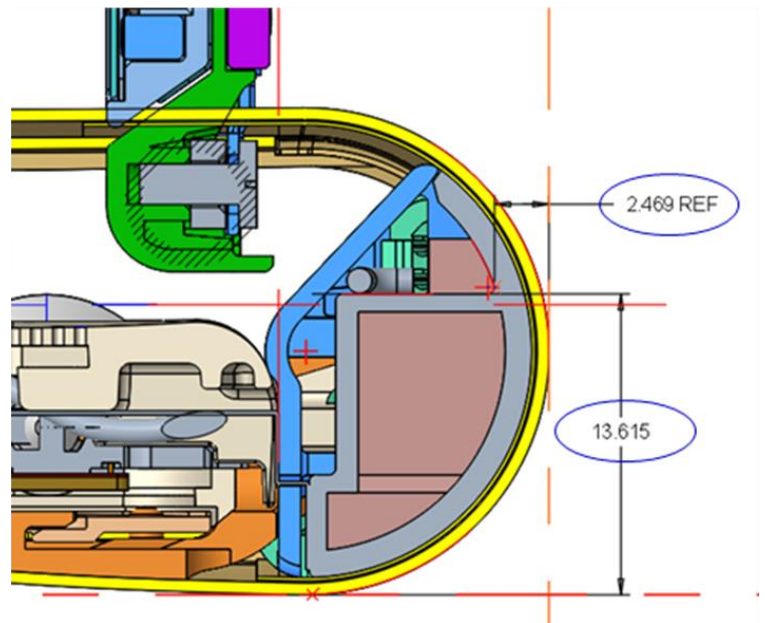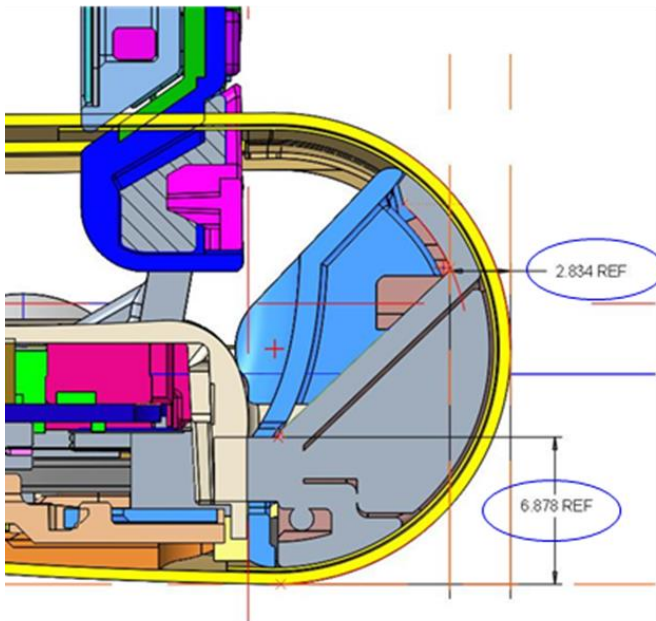


WWAN ANT 8 NB_Mode

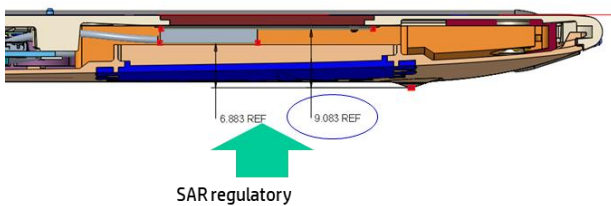


WWAN ANT 5 TB_Mode

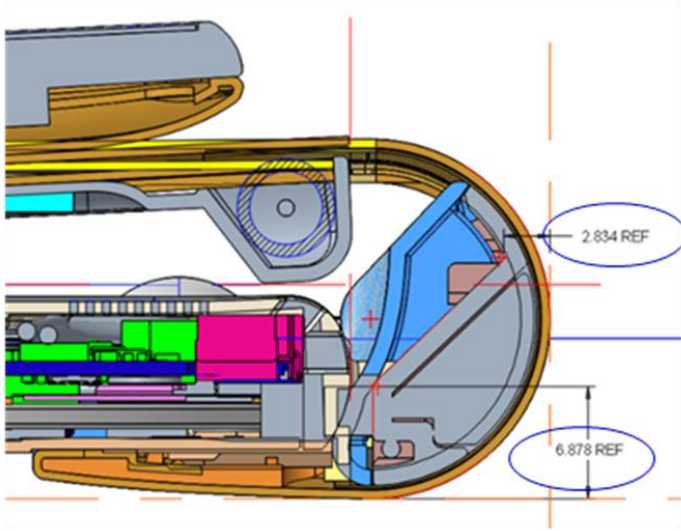



WLAN ANT 1/2 TB_Mode

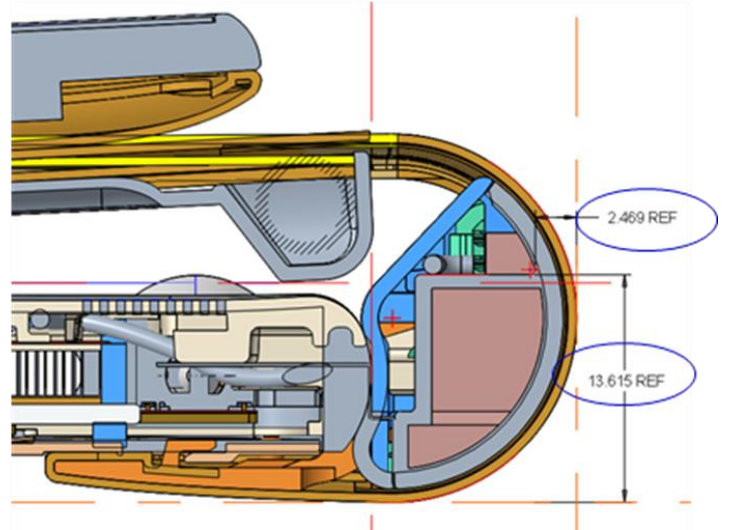



WWAN ANT 8 TB_Mode

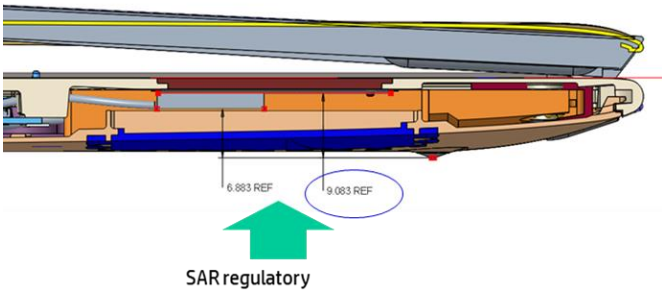

WWAN SKU NB Mode

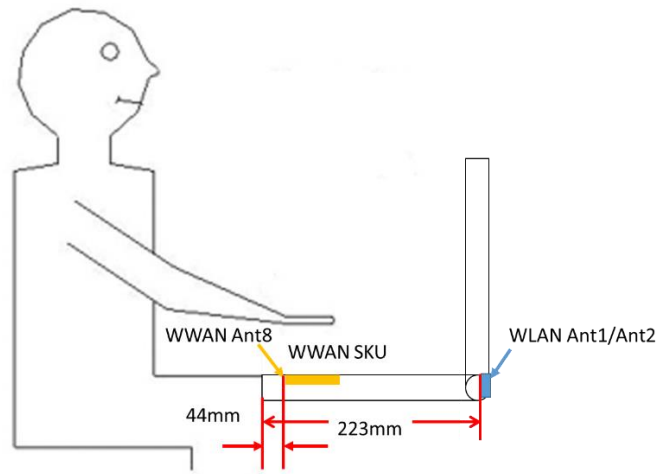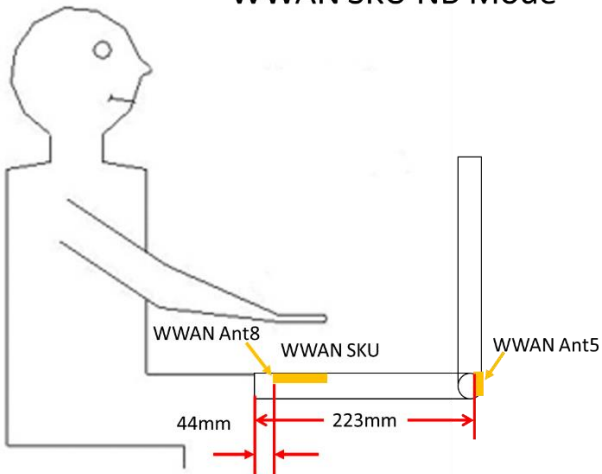

WWAN SKU TB Mode

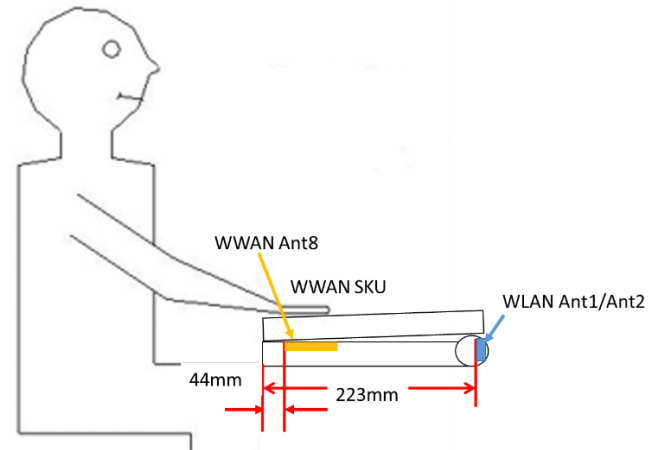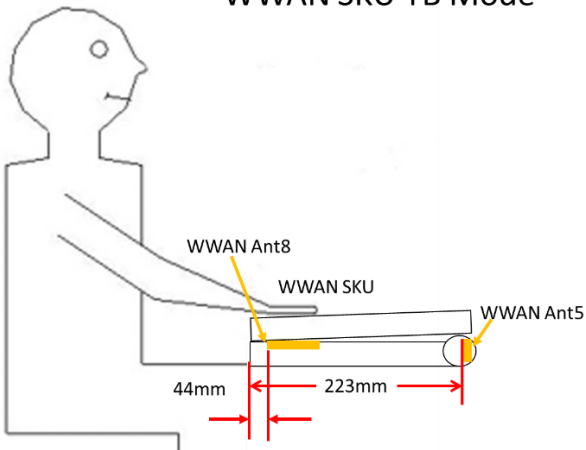


Section 7. Diagram Example of Co-Location Antenna Separation

Include a **dimensioned photo or dimensioned drawing** showing the distance (mm) between **all WLAN transmit antennas** and other co-located radiator transmit antenna such as Bluetooth, WWAN,..

Example:

(Note: Due to the evolving rules regarding co-location, each platform will need to be reviewed on a case by case basis)

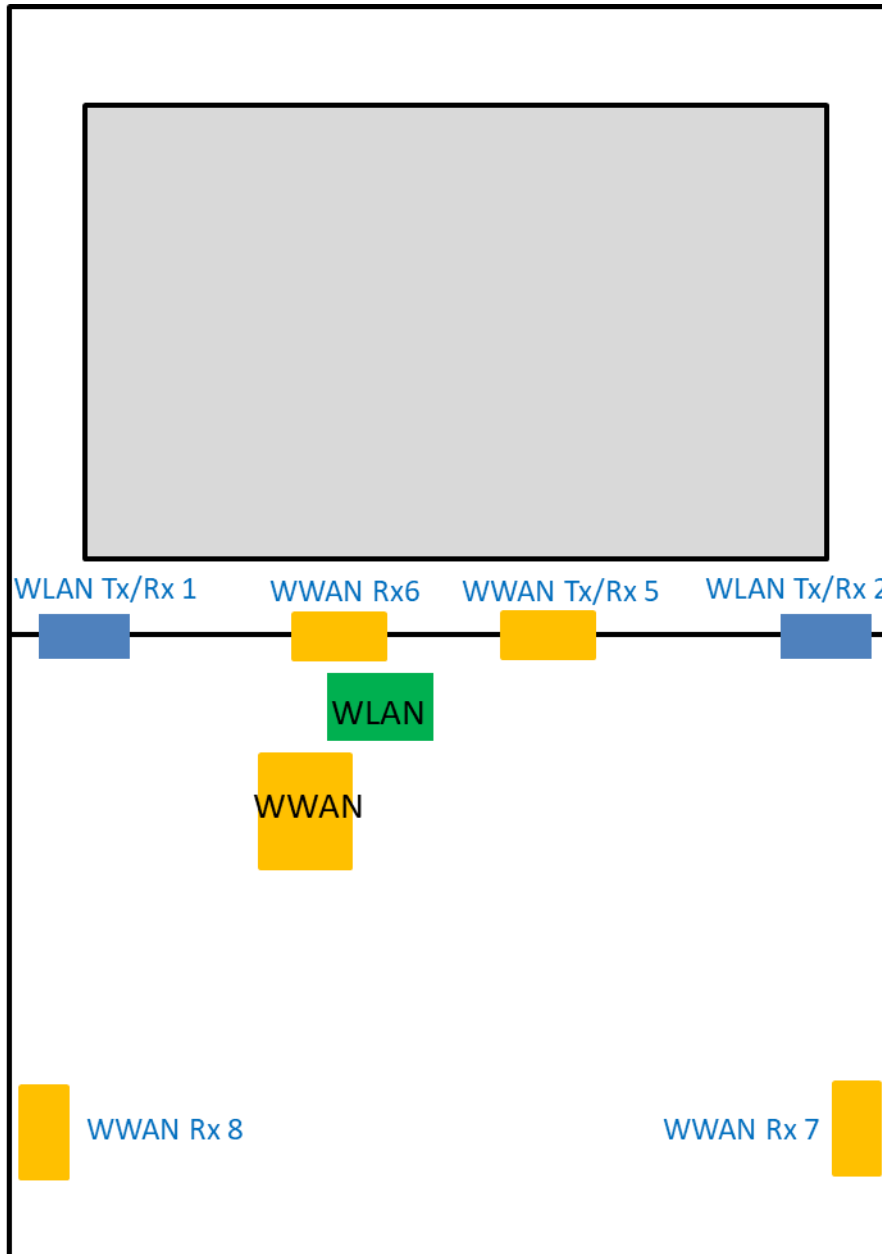

Section 8. Local representative contact information

Local representative contact information is required for regulatory support for target countries below.

	Local company name	Contact name	Phone number	FAX Number	e-Mail Address	Notes
Argentina						
Azerbaijan						
Cambodia						
Indonesia						
Israel						
Malaysia						
Philippines						
Singapore						Telecommunication Equipment Dealer License Required
South Africa						
USA, Canada						
Vietnam						