

ELECTROMAGNETIC EMISSIONS COMPLIANCE REPORT

OF

INTENTIONAL RADIATOR CERTIFICATION TO FCC PART 15 SUBPART C REOUIREMENT

Product Name: Tablet PC Brand Name: hp Model No.: HSTNN-093C FCC ID: **B94HNQ93CSPNAC Report No.:** E2/2015/30018 **Issue Date:** Apr. 30, 2015 **FCC Rule Part:** §15.247, Cat: DSS **Hewlett-Packard Company Prepared for:** 1501 Page Mill Road, M/S1419, Palo Alto, CA 94304, United States SGS Taiwan Ltd. **Electronics & Communication Laboratory Prepared by:** No.2, Keji 1st Rd., Guishan District, Taoyuan City, Taiwan 333 *Note: This report shall not be reproduced except in full,* without the written approval of SGS Taiwan Ltd. This document may be altered or revised by SGS Taiwan Ltd. perng Laboratory sonnel only, and shall be noted in the revision section of the 0513 document.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

WeifS of all weights and the results and state the four result of the state of th Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law



Report No.: E2/2015/30018 Issue Date: Apr. 30, 2015 Page: 2 of 83

VERIFICATION OF COMPLIANCE

Applicant:	Hewlett-Packard Company
	1501 Page Mill Road, M/S1419, Palo Alto, CA, 94304, United States
Product Name:	Tablet PC
Brand Name:	hp
Model No.:	HSTNN-Q93C
FCC ID:	B94HNQ93CSPNAC
File Number:	E2/2015/30018
Brand Name: Model No.: FCC ID:	Mar. 16, 2015 ~ Apr. 13, 2015
Date of EUT Received:	Mar. 16, 2015
We hereby cortify the	at.

We hereby certify that:

The above equipment was tested by SGS Taiwan Ltd. Electronics & Communication Laboratory The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.10:2013 and the energy emitted by the sample EUT tested as described in this report is in compliance with conducted and radiated emission limits.

The test results of this report relate only to the tested sample identified in this report.

Test By:	Jazz Huang	Date:	Apr. 30, 2015
Prepared By:	Jazz Huang /Asst. Supervisor VTO lette Tang	Date:	Apr. 30, 2015
Approved By:	Violetta Tang / Clerk Jim Ch ang	Date:	Apr. 30, 2015

Jim Chang / Asst. Manager

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Revision History

Report Number	Revision	Description	Issue Date
E2/2015/30018	Rev.00	Initial creation of document	Apr. 30, 2015

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_e-document.htm</u></u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document is advised any be prosecuted to the fulle at vent of the law. pearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134號



Table of Contents

1.	GEN	ERAL INFORMATION	7
	1.1.	Product description	7
	1.2.	Product Feature of Equipment Under Test	
	1.3.	Test Methodology of Applied Standards	9
	1.4.	Test Facility	9
	1.5.	Special Accessories	9
	1.6.	Equipment Modifications	9
2.	SYST	FEM TEST CONFIGURATION	
	2.1.	EUT Configuration	
	2.2.	EUT Exercise	
	2.3.	Test Procedure	
	2.4.	Measurement Results Explanation Example	
	2.5.	Configuration of Tested System	
3.	SUM	IMARY OF TEST RESULTS	
4.	DES	CRIPTION OF TEST MODES	
	4.1.	Operated in 2400 ~ 2483.5MHz Band	
	4.2.	The Worst Test Modes and Channel Details	14
5.	MEA	ASUREMENT UNCERTAINTY	
6.	CON	DUCTED EMISSION TEST	
	6.1.	Standard Applicable	16
	6.2.	Measurement Equipment Used	16
	6.3.	EUT Setup	16
	6.4.	Test SET-UP (Block Diagram of Configuration)	17
	6.5.	Measurement Procedure	17
	6.6.	Measurement Result	17
7.	PEA	K OUTPUT POWER MEASUREMENT	
	7.1.	Standard Applicable	
	7.2.	Measurement Equipment Used	
	7.3.	Test Set-up:	
	7.4.	Measurement Procedure:	24
	7.5.	Measurement Result	25



8.	20dB	BANDWIDTH MEASUREMENT	
	8.1.	Standard Applicable	
	8.2.	Measurement Equipment Used	
	8.3.	Test Set-up	
	8.4.	Measurement Procedure	
	8.5.	Measurement Result	
9.	CON	DUCTED BAND EDGES AND SPURIOUS EMISSION MEASUREMENT	
	9.1.	Standard Applicable	
	9.2.	Measurement Equipment Used	
	9.3.	Test SET-UP	
	9.4.	Measurement Procedure	
	9.5.	Measurement Result	
10.	RADI	ATED BANDEDGE AND SPURIOUS EMISSION MEASUREMENT	
	10.1.	Standard Applicable	
	10.2.	Measurement Equipment Used	
	10.3.	Test SET-UP	47
	10.4.	Measurement Procedure	
	10.5.	Field Strength Calculation	
	10.6.	Test Results of Radiated Spurious Emissions form 9 KHz to 30 MHz	
	10.7.	Measurement Result	
11	FREC	UENCY SEPARATION	66
	11.1.	Standard Applicable	
	11.2.	Measurement Equipment Used	
	11.3.	Test Set-up	
	11.4.	Measurement Procedure	
	11.5.		
12	NIM	BER OF HOPPING FREQUENCY	
14,	12.1.	Standard Applicable	
	12.2.	Measurement Equipment Used	
	12.3.	Test Set-up	
	12.3.	Measurement Procedure	
	12.5.	Measurement Result	
	12.0.	The as an entreme in the same	



13.	TIME	OF OCCUPANCY (DWELL TIME)	. 70
	13.1.	Standard Applicable	. 70
	13.2.	Measurement Equipment Used	. 70
	13.3.	Test Set-up	. 70
		Measurement Procedure	
	13.5.	Tabular Result of the Measurement	.72
	13.6.	Measurement Result	.73
14.	ANTE	INNA REQUIREMENT	. 83
	14.1.	Standard Applicable	. 83
	14.2.	Antenna Connected Construction	. 83



GENERAL INFORMATION 1.

1.1. Product description

General:

Product Name:	Tablet PC			
Brand Name:	hp	hp		
Model No.:	HSTNN-Q93	3C		
Product SW/HW version	Win 8.1 / 1.0)		
Radio SW/HW version	7.7.2.0 / 1.0			
	3.8Vdc form Rechargeable Li-ion Battery or 5.25V from AC/DC Adapter			
	Battery:	1. Model No.: HSTNH-C408M-SD, Supplier: Dynapack		
		2. Model No.: HSTNH-C408M-SS, Supplier: SDI (SQ)		
Power Supply:		1. Model No.: TPN-AA01, Supplier: AcBel		
	Adapter:	2. Model No.: TPN-DA01, Supplier: Delta		
		3. Model No.: TPN-LA01, Supplier: Lite-On		

Bluetooth_BR+EDR:

Bluetooth Version:	V4.0 dual mode + HS
Channel number:	79 channels
Modulation type:	$GFSK + \pi/4DQPSK + 8DPSK$
Transmit Power:	4.41dBm
Frequency Range:	2.402GHz – 2.480GHz
Antenna Designation:	PIFA Antenna, Gain: -3.79dBi (Aux) Part No.: DQ6R15GAW00, Supplier: Wistron Neweb Corp.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u></u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document is advised to the fullet at vector of the Law pearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



1.2. Product Feature of Equipment Under Test

The equipment under Test (Hereafter Called: EUT) is Tablet PC supporting, GSM / WCDMA / CDMA / LTE, Wi-Fi 802.11abgn & ac, Bluetooth with NFC and GPS features, and below is details of information.

Product Feature			
Product Name:	Tablet PC		
Brand Name:	hp		
Model No.:	HSTNN-Q93C		
FCC ID	B94HNQ93CSPNAC		
GSM Operating Band(s)	GSM 850/1900MHz		
GPRS / EGPRS Multi Slot Class	GPRS Class 12 / Class 12		
CDMA / EVDO	BC0 / BC1		
WCDMA Operating Band(s)	FDD Band II / IV / V		
WCDMA Rel. Version	Rel.8		
LTE Operating Band(s)	FCC Band 2 / 4 / 5 / 13 / 17 / 25		
LTE Rel. Version	Rel.9		
Wi-Fi Specification	802.11a/b/g/n/ac		
Bluetooth Version	V4.0 dual mode + HS		
NFC Specification	NFC		

Note: The above EUT information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



1.3. **Test Methodology of Applied Standards**

FCC Part 15, Subpart C §15.247 FCC KDB 558074 D01 DTS Meas. Guidance V03r02 ANSI C63.10:2013

Note:

- All test items have been performed and record as per the above standards. 1.
- The composite system is compliance with FCC Subpart B is authorized under the certification 2. procedure.
- The EUT was placed 1.5m height for frequency above 1GHz in accordance with 3. ANSI C63. 10:2013

1.4. Test Facility

SGS Taiwan Ltd. Electronics & Communication Laboratory o.2, Keji 1st Rd., Guishan District, Taoyuan City, Taiwan 333. (TAF code 0513)

FCC Registration Numbers are: 628985

Canada Registration Number: 4620A-5

1.5. Special Accessories

There is no special accessory used while test was conducted.

1.6. Equipment Modifications

There was no modification incorporated into the EUT.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

WeifS of all weights and the results and state the four result of the state of th Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law



2. SYSTEM TEST CONFIGURATION

2.1. EUT Configuration

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

2.2. EUT Exercise

An engineering test mode (software/firmware) that applicant provided was utilized to manipulate the EUT into transmit, selection of the test channel, and modulation scheme.

2.3. Test Procedure

2.3.1 Conducted Emissions

The EUT is a placed on as turn table which is 0.8 m above ground plane. Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz,. The CISPR Quasi-Peak and Average detector mode is employed according to \$15.107. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.

2.3.2 Radiated Emissions

The EUT is a placed on as turn table which is 0.8 m above ground plane. The turn table shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3m away from the receiving antenna which varied from 1m to 4m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the max. emission, the relative positions of this hand-held transmitter (EUT) was rotated through three orthogonal axes and measurement procedures for electric field radiated emissions above 1 GHz the EUT measurement is to be made "while keeping the antenna in the 'cone of radiation' from that area and pointed at the area both in azimuth and elevation, with polarization oriented for maximum response." is still within the 3dB illumination BW of the measurement antenna.

2.4. Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuation factor between EUT conducted port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly EUT RF output level.

Note:

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Following shows an offset computation example with cable loss 1.2dB.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



2.5. Configuration of Tested System

Fig. 2-1 Radiated Emission & Conducted (Antenna Port) Configuration




Table 2-1 Equipment Used in Tested System

Item	Equipment	Mfr/Brand	Model/Type No.	Series No.	Data Cable	Power Cord
1.	Bluetooth Test Software	DRTU	N/A	N/A	N/A	N/A

Fig. 2-2 AC Power Line Conducted Emission




Table 2-2 Equipment Used in Tested System

Item	Equipment	Mfr/Brand	Model/Type No.	Series No.	Data Cable	Power Cord
1.	Bluetooth Test Software	DRTU	N/A	N/A	N/A	N/A



SUMMARY OF TEST RESULTS 3.

FCC Rules	Description Of Test	Result
§15.207(a)	AC Power Line Conducted Emission	Compliant
§15.247(b) (3)	Peak Output Power	Compliant
§15.247(a)(2)	20dB Bandwidth	Compliant
§15.247(d)	Conducted Band Edge and Spurious Emission	Compliant
§15.247(d)	Radiated Band Edge and Spurious Emission	Compliant
§15.247(a)(1)	Frequency Separation	Compliant
§15.247(a)(1)(iii)	Number of hopping frequency	Compliant
§15.247(a)(1)(iii)	Time of Occupancy	Compliant
\$15.203 \$15.247(b)	Antenna Requirement	Compliant

4. DESCRIPTION OF TEST MODES

4.1. Operated in 2400 ~ 2483.5MHz Band

79 channels are provided for Bluetooth

CH	FREQUENCY	СН	FREQUENCY	СН	FREQUENCY	СН	FREQUENCY
0	2402 MHz	20	2422 MHz	40	2442 MHz	70	2462 MHz
1	2403 MHz	21	2423 MHz	41	2443 MHz	71	2463 MHz
2	2404 MHz	22	2424 MHz	42	2444 MHz	72	2464 MHz
3	2405 MHz	23	2425 MHz	43	2445 MHz	73	2465 MHz
4	2406 MHz	24	2426 MHz	44	2446 MHz	74	2466 MHz
5	2407 MHz	25	2427 MHz	45	2447 MHz	75	2467 MHz
6	2408 MHz	26	2428 MHz	46	2448 MHz	76	2468 MHz
7	2409 MHz	27	2429 MHz	47	2449 MHz	77	2469 MHz
8	2410 MHz	28	2430 MHz	48	2450 MHz	78	2470 MHz
9	2411 MHz	29	2431 MHz	49	2451 MHz	79	2471 MHz
10	2412 MHz	30	2432 MHz	50	2452 MHz	70	2472 MHz
11	2413 MHz	31	2433 MHz	51	2453 MHz	71	2473 MHz
12	2414 MHz	32	2434 MHz	52	2454 MHz	72	2474 MHz
13	2415 MHz	33	2435 MHz	53	2455 MHz	73	2475 MHz
14	2416 MHz	34	2436 MHz	54	2456 MHz	74	2476 MHz
15	2417 MHz	35	2437 MHz	55	2457 MHz	75	2477 MHz
16	2418 MHz	36	2438 MHz	56	2458 MHz	76	2478 MHz
17	2419 MHz	37	2439 MHz	57	2459 MHz	77	2479 MHz
18	2420 MHz	38	2440 MHz	58	2460 MHz	78	2480 MHz
19	2421 MHz	39	2441 MHz	59	2461 MHz		

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_e-document.htm</u></u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134號





4.2. The Worst Test Modes and Channel Details

- The EUT has been tested under operating condition.
- Test program used to control the EUT for staying in continuous transmitting and receiving mode is 2 programmed.
- 3 Investigation has been done on all the possible configurations for searching the worst case.

RADIATED EMISSION TEST:

RADIATED EMISSION TEST (BELOW 1 GHz)									
MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION	PACKET TYPE	ANTENNA PORT				
Bluetooth	0 to 78	0,39,78	GFSK	DH5	AUX				
	RADIATED EMISSION TEST (ABOVE 1 GHz)								
MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION	PACKET TYPE	ANTENNA PORT				
Bluetooth	0 to 78	0,39,78	GFSK	DH5	AUX				

Note:

The field strength of radiation emission was measured as EUT stand-up position (H mode) and lie down position (E1, E2 mode) for Bluetooth BR+EDR Transmitter for channel Low, Mid and High, the worst case E1 position was reported.

	CONDUCTED TEST								
Peak Output Power, 20dB Band Width									
MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION	PACKET TYPE	ANTENNA PORT				
	0 to 78	0,39,78	GFSK	DH5	AUX				
Bluetooth	0 to 78	0,39,78	/4-DQPSK	DH5	AUX				
	0 to 78	0,39,78	8-DPSK	DH5	AUX				
	Band Edge								
Bluetooth	0 to 78	0,78	GFSK	DH5	AUX				
		Frequency Sepa	aration						
Bluetooth	0 to 78	0,1,2	GFSK	DH5	AUX				
	Nu	mber of hopping	frequency						
Bluetooth	0 to 78	0 to 78	GFSK	DH5	AUX				
	Tim	e of Occupancy	(Dwell time)						
Bluetooth	0 to 78	0,39,78	GFSK	DH1/DH3/DH5	AUX				
Bluetooth	0 to 78	39	/4-DQPSK	DH1/DH3/DH5	AUX				
Bluetooth	0 to 78	39	8-DPSK	DH1/DH3/DH5	AUX				

ANTENNA PORT CONDUCTED MEASUREMENT:

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

WeifS of all weights and the results and state the four result of the state of th Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law



5. **MEASUREMENT UNCERTAINTY**

Test Items	Uncertainty
AC Power Line Conducted Emission	+/- 2.586 dB
Peak Output Power	+/- 0.84 dB
20dB Bandwidth	+/- 51.33 Hz
100 KHz Bandwidth Of Frequency Band Edges	+/- 1.55 dB
Frequency Separation	+/- 51.33 Hz
Number of hopping frequency	+/- 51.33 Hz
Time of Occupancy	+/- 51.33 Hz
Temperature	+/- 0.65 °C
Humidity	+/- 4.6 %
DC / AC Power Source	DC= +/- 0.13%, AC= +/- 0.2%

Radiated Spurious Emission:

	30MHz - 180MHz: +/- 3.37dB
	180MHz -417MHz: +/- 3.19dB
Measurement uncertainty (Polarization : Vertical)	0.417GHz-1GHz: +/- 3.19dB
(i onalization : v or treat)	1GHz - 18GHz: +/- 4.04dB
	18GHz - 40GHz: +/- 4.04dB

	30MHz - 167MHz: +/- 4.22dB
Measurement uncertainty	167MHz -500MHz: +/- 3.44dB
(Polarization : Horizontal)	0.5GHz-1GHz: +/- 3.39dB
	1GHz - 18GHz: +/- 4.08dB
	18GHz - 40GHz: +/- 4.08dB

This uncertainty represents an expanded uncertainty expressed at approximately the

95% confidence level using a coverage factor of k=2.



CONDUCTED EMISSION TEST 6.

6.1. Standard Applicable

Frequency within 150 kHz to 30MHz shall not exceed the limit table as below.

	Limits						
Frequency range	dB(uV)					
MHz	Quasi-peak	Average					
0.15 to 0.50	66 to 56	56 to 46					
0.50 to 5	56	46					
5 to 30	60	50					
Note							
1. The lower limit shall apply at the transition frequencies							
2. The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz.							

6.2. Measurement Equipment Used

Conducted Emission Test Site									
Name of Equipment	Manufacturer	Model	Serial Num-	Calibration	Calibration				
			ber	Date	Due				
EMI Test Receiver	R&S	ESCI 3	101311	06/20/2014	06/19/2015				
Coaxial Cables	N/A	N30N30-1042-150cm	N/A	01/06/2015	01/07/2016				
LISN	Schwarzbeck	NSLK 8127	8127-648	06/10/2014	06/09/2015				
LISN	Rolf-Heine	NNB-2/16Z	99012	03/04/2015	03/03/2016				
Test Software	Farad	EZ-EMC	Ver. SGS-03A2	N.C.R.	N.C.R.				

6.3. EUT Setup


- 1. The conducted emission tests were performed in the test site, using the setup in accordance with the ANSI 63.10:2013.
- 2. The AC/DC Power adaptor of EUT was plug-in LISN. The EUT was placed flushed with the rear of the table.
- 3. The LISN was connected with 120Vac/60Hz power source.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

WeifS of all weights and the results and state the four result of the state of th Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law



6.4. Test SET-UP (Block Diagram of Configuration)

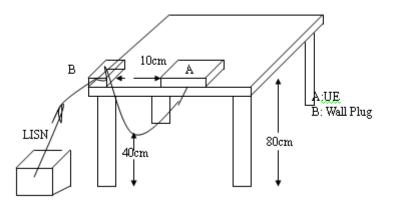

6.5. Measurement Procedure

- 1. The EUT was placed on a table which is 0.8m above ground plane.
- 2. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
- 3. Repeat above procedures until all frequency measured were complete.

6.6. Measurement Result

Note: Refer to next page for measurement data and plots. Note2: The * reveals the worst-case results that closet to the limit


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only

WeifS of all weights and the results and state the four result of the state of th Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law



AC POWER LINE CONDUCTED EMISSION TEST DATA

Operation Mode:	Operation mode	2	Test Date:	Apr. 10, 2015	
Temperature:	re: 20 Humidity:		64 %	Test By:	Ashton
Adapter Model No.:	TPN-AA01				

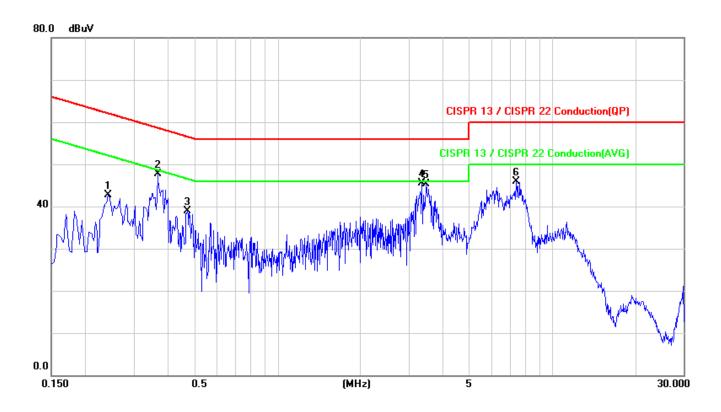


No.¢	Mk.₽	Freq.₽	Reading	Factor	Measurement	Limit₽	Over ₊ ³	Detector ₽	Comment ?
47	÷	(MHz)⊷	dBuV₽	(dB)⊷	(dBuV)∗ ²	(dBuV)↩	(dB)⊷	¢	ę.
1₽	ę	0.2420	42.53₽	0.100	42.63	6 2.03₽	-19.40	peak₽	ę
2₽	ę	0.3660	47.52₽	0.150	47.67 ₽	58.59₽	-10.92+	peak₽	ę
3₽	ę	0.4700	38.63 <i>₽</i>	0.21@	38.84	56.51 ₽	-17.67 ₽	peak₽	ę
4₽	*.,	3.3620+2	44.84∻	0.60₽	45.44~	56.00₽	-10.56e	peak₽	сµ
-5₽	ę	3.4740	44.75₽	0.60₽	45.35₽	56.00₽	-10.650	peak₽	ę
<mark>6</mark> ₽	÷	7.4020₽	45.27₽	0.65+	45.92₽	60.00₽	-14.08	peak⊬	c.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134號



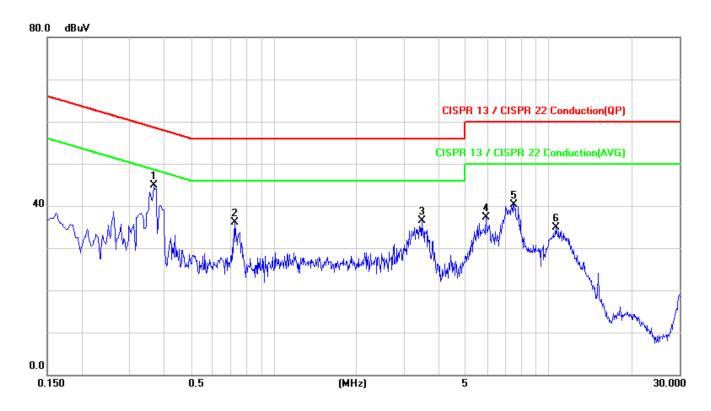


No.e	Mk.₽	Freq.₽	Reading e	Factor	Measurement	Limit₽	Over ₽	Detector @	Comment <i>e</i>
e,	÷	(MHz)⊷	dBuV₽	(dB)⊷	(dBuV)₽	(dBuV)₽	(dB)⊷	ę	e.
1₽	*0	0.3660~	44.81~	0.160	44.97∻	58.59₽	-13.62¢	peak₽	ę
2₽	47	0.7260~	35.72₽	0.330	36.05+	5 6 .00₽	-19.950	peak∉	ę
3₽	÷	3.46200	35.82+	<mark>0.60</mark> ₽	36.42*	5 6 .00₽	-19.580	peak₽	ę
4⊷	47	5.9420₽	36.59 ₽	0.630	37.22*	<mark>60.00</mark> ₽	-22.780	peak∉	ę
- 5₽	÷	7.5140₽	39.71~	0.66₽	40.37~	<mark>60.00</mark> ₽	-19.63@	peak₽	ę
<mark>6</mark> ₽	47	10.6620	34.14@	<mark>0.68</mark> ₽	34.82+	<mark>60.00</mark> ₽	-25.180	peak∉	ę



AC POWER LINE CONDUCTED EMISSION TEST DATA

Operation Mode:	Operation mode		Test Date:	Apr. 10, 2015	
Temperature:	20 Humidity: 64 %		64 %	Test By:	Ashton
Adapter Model No.:	TPN-DA01				

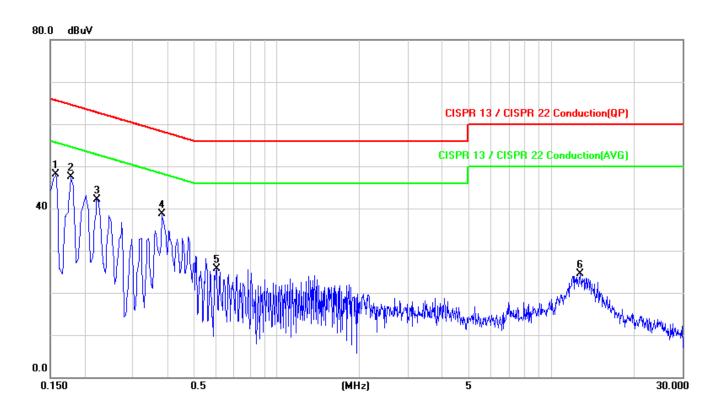


No.e	Mk.₽	Freq.₽	Reading	Factor	Measurement	Limit₽	Over + ²	Detector ₽	Comment -
÷	÷	(MHz)⊷	dBuV₽	(dB)⊷	(dBuV)⊷	(dBuV)⊷	(dB)⊷	4	¢
1₽	÷	0.1580	48.00₽	0.09₽	48.09	6 5.57₽	-17.48	peak₽	ę
2₽	*0	0.1780+2	47.38	0.100	47.48₽	64 .58₽	-17.100	peak∉	ę
-3₽	÷	0.2220*	42.02*	0.100	42.12*	6 2.74₽	-20.62+	peak∉	ę
4⊷	÷	0.3820	38.54~	0.170	38.71+2	58.24	-19.53 <i>e</i>	peak₽	ę
5₽	÷	<mark>0.6060</mark> ₽	25.40₽	0.2 6 ₽	25. 66 ₽	56.00₽	-30.340	peak∉	ę
<mark>6</mark> ₽	47	12.7180	23.82+	0.64	24.46	<mark>60.00</mark> ₽	-35.54+	peak⊬	¢

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Clearly intervention. Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134號



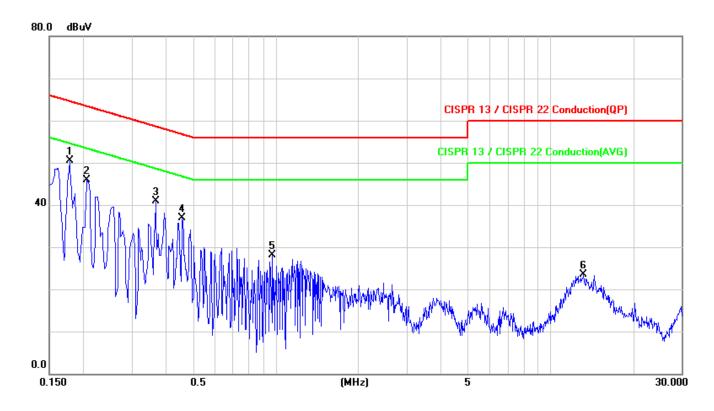


No.₽	Mk.¢	Freq. ₽	Reading₽	Factor ₽	Measurement	Limit₽	Over e	Detector ₽	Comment *
¢	÷	(MHz)⊷	dBuV₽	(dB)⊷	(dBuV)⊷	(dBuV)+ ²	(dB)⊷	сь С	ę
1₽	*	0.1780₽	50.39¢	0.10₽	50. 49 ₽	64 .58₽	-14.09	peak⊬	¢
2₽	ę	0.2060	45.87₽	0.09₽	45.96₽	6 3.37₽	-17.41	peak₽	сь С
3₽	÷	0.3660~	40 .72 <i>₽</i>	0.160	40.88 ₽	58.59÷	-17.71@	peak₽	с,
4₽	ę	0.4580@	36.77₽	0.21	<u>36.98</u> ₽	56 .73₽	-19.75	peak₽	ę
5₽	ę	0.9780₽	27.75₽	0.42*	28.17+2	56.00 <i>₽</i>	-27.83+	peak⊬	сь С
6 ₽	47	13.2140@	22.81	0.64₽	23.45+	60.00₽	-36.550	peak∉	ę



AC POWER LINE CONDUCTED EMISSION TEST DATA

Operation Mode:	Operation mode		Test Date:	Apr. 10, 2015	
Temperature:	ature: 20 Humidity: 64 %		Test By:	Ashton	
Adapter Model No.:	TPN-LA01				

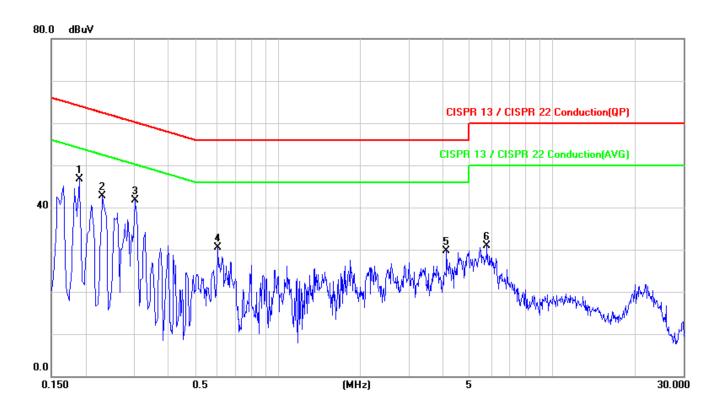


No.e	Mk.₽	Freq.₽	Reading	Factor	Measurement	Limit₽	Over + ²	Detector	Comment ?
¢,	¢,	(MHz)↩	dBuV₽	(dB)⊷	(dBuV)₊∂	(dBuV)₽	(dB)⊷	сµ	¢
1.₽	*0	0.1900@	46 .71₽	0.09₽	46.80	64.04	-17.24	peak₽	¢
2₽	47	0.23000	42.63+	0.100	42.73*	6 2.45₽	-19.72+	peak₽	¢
3₽	¢,	0.3020@	41.61~	0.130	41.74~	60.19 ₽	-18.45@	peak₽	¢
4⊷	47	0.6060₽	30.31@	0.2 6 @	30.57₽	56.00₽	-25.43+	peak₽	¢
- 5₽	÷	4.1140@	29.09	0.61~	29.70	5 6 .00₽	-26.300	peak₽	ę.
6₽	¢,	5.8020+	30.32+2	0.62+2	30.94~	60.00₽	-29.06+	peak₽	4

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134號



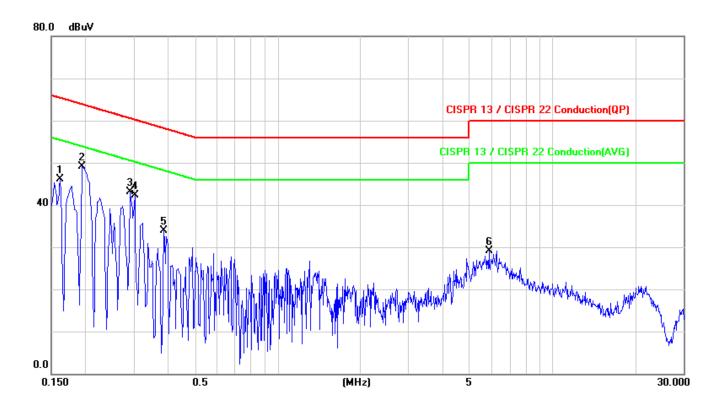

No.₽	Mk.₽	Freq.₽	Reading	Factor ₽	Measurement	Limit₽	Over ₽	Detector @	Comment e
¢.	÷	(MHz)⊷	dBuV₽	(dB)↩	(dBuV)⊷	(dBuV)₀	(dB)⊷	¢	¢
1₽	ę	0.1620¢ ²	46.02 ₽	0.09↩	46.11@	6 5.36₽	-19 .25₽	peak₽	¢
2₽	* ₄ 2	0.1940₽	49.05 ₽	0.09↩	49.14	63.86	-14.72*	peak₽	ę
3₽	÷	0.2900	42.97 ₽	0.13	43.10¢	60 .52₽	-17.42*	peak₽	ę
4₽	ę	0.3020	42.17@	0.130	42.30	60.19 ₽	-17.89+2	peak₽	ę
- 5₽	÷	0.3860	33.64~	0.17~	33.81+	58.15 ₽	-24.340	peak₽	ę
<mark>6</mark> ₽	÷	5. 8860 ₽	28.450	0.62+	29.07	60.00₽	-30.93+2	peak∉	ę

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_e-document.htm</u></u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134 號 SGS Taiwan Ltd.



7. PEAK OUTPUT POWER MEASUREMENT


7.1. Standard Applicable

For frequency hopping systems operating in the 2400-2483.5MHz band employing at least 75 hopping channels, The Limit: 1Watt. For all other frequency hopping systems in the 2400 – 2483.5MHz band: The Limit: 0.125Watts. The power limit for 1Mbps is 1watt, and 2Mbps, 3Mbps and AFH mode are 0.125Watts.

7.2. Measurement Equipment Used

Conducted Emission Test Site										
EQUIPMENT	MFR	MODEL	SERIAL	LAST	CAL DUE.					
ТҮРЕ		NUMBER	NUMBER	CAL.						
Spectrum Analyzer	Agilent	N9010A	MY53400256	10/15/2014	10/14/2015					
DC Block	PASTERNACK	PE8210	RF29	12/19/2014	12/18/2015					
Attenuator	WOKEN	218FS-10	RF23	12/19/2014	12/18/2015					
Splitter	RF-LAMBAD	RFLT2W1G18G	RF35	12/19/2014	12/18/2015					

7.3. Test Set-up:



7.4. Measurement Procedure:

- 1. Place the EUT on the table and set it in transmitting mode.
- 2. The testing follows FCC Public Notice DA 00-705 Measurement Guidelines.
- 3. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the power meter or spectrum. (Max Hold, Detector = Peak, RBW >=20dB bandwidth)
- 4. Record the max. reading.
- 5. Repeat above procedures until all default test channel is completed.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.




7.5. Measurement Result

	GFSK (1 Mbps)						
Channel	Frequency (MHz)	Output Power (dBm)	Output Power (mW)	Limit (mW)			
0	2402.00	4.41	2.76058	1000			
39	2441.00	4.37	2.73527	1000			
78	2480.00	4.31	2.69774	1000			
		π/4-DQPSK	(2 Mbps)				
Channel	Frequency	Output Power	Output Power	Limit			
Channel	hannel i i i	(dBm)	(mW)	(mW)			
0	2402.00	2.91	1.95434	125			
39	2441.00	2.86	1.93197	125			
78	2480.00	2.80	1.90546	125			
		8-DPSK (3 Mbps)				
Channel	Frequency	Output Power	Output Power	Limit			
Channel	(MHz)	(dBm)	(mW)	(mW)			
0	2402.00	2.00	1.58489	125			
39	2441.00	1.99	1.58125	125			
78	2480.00	1.96	1.57036	125			

NOTE: cable loss as 1.2dB that offsets in the spectrum



Peak Power Output Data Plot (CH Low) (GFSK mode)

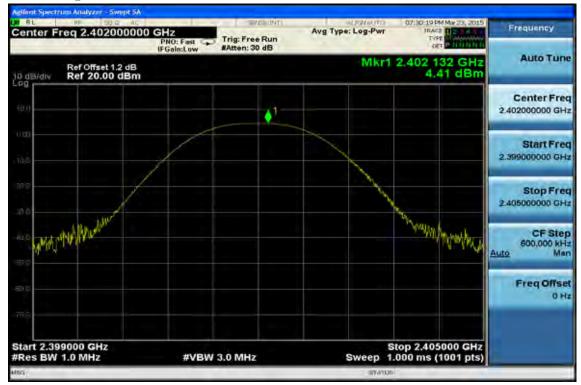

Peak Power Output Data Plot (CH Mid) (GFSK mode)



Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Peak Power Output Data Plot (CH High) (GFSK mode)



Peak Power Output Data Plot (CH Low) (/4-DQPSK mode)



Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Peak Power Output Data Plot (CH Mid) (/4-DQPSK mode)




Peak Power Output Data Plot (CH High) (/4-DQPSK mode)



Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Peak Power Output Data Plot (CH Low) (8-DPSK mode)

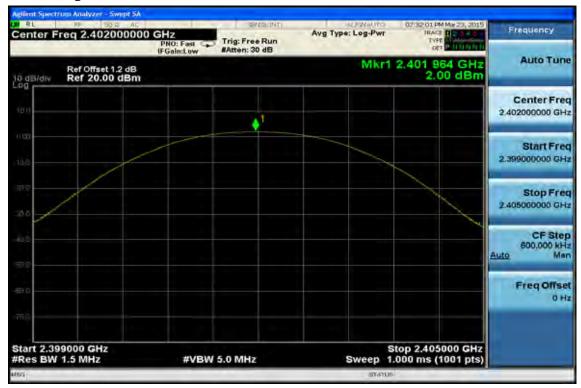

Peak Power Output Data Plot (CH Mid) (8-DPSK mode)

Frequency	07:14:46 PM Mar 23, 2015 TRACE 12 14 1 TVMI DET 2 14:111 M	AUGHAUTO	Trig: Free Run #Atten: 30 dB	PNO: Last	req 2.441000000	Center Fr
Auto Tur	2.440 940 GHz 1.99 dBm	Mkr1			Ref Offset 1.2 dB Ref 20.00 dBm	0 dB/div
Center Fre 2.441000000 GF			•1			00.0
Start Fre 2.438000000 GH						τά.ύ
Stop Fre 2.444000000 GH	\searrow					200
CF Ste 600.000 kF Auto Ma						
Freq Offs						en ja
	top 2.444000 GHz 000 ms (1001 pts)	Sweep 1	5.0 MHz	#VBW 5	8000 GHz 1.5 MHz	Start 2.43 Res BW
_		STATUS				86

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Peak Power Output Data Plot (CH High) (8-DPSK mode)



Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134號



8. 20dB BANDWIDTH MEASUREMENT


8.1. Standard Applicable

For frequency hopping systems operating in the 2400MHz-2483.5 MHz no limit for 20dB bandwidth

8.2. Measurement Equipment Used

Conducted Emission Test Site										
EQUIPMENT	MFR	MODEL	SERIAL	LAST	CAL DUE.					
ТҮРЕ		NUMBER	NUMBER	CAL.						
Spectrum Analyzer	Agilent	N9010A	MY53400256	10/15/2014	10/14/2015					
DC Block	PASTERNACK	PE8210	RF29	12/19/2014	12/18/2015					
Splitter	RF-LAMBAD	RFLT2W1G18G	RF35	12/19/2014	12/18/2015					
Attenuator	WOKEN	218FS-10	RF23	12/19/2014	12/18/2015					

8.3. Test Set-up



8.4. Measurement Procedure

- 1. Place the EUT on the table and set it in transmitting mode.
- 2. The testing follows FCC Public Notice DA 00-705 Measurement Guidelines.
- 3. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
- 4. Set the spectrum analyzer as RBW=10 kHz (1 % of 20 dB Bandwidth.), VBW = 30 kHz, Span= 3MHz, Sweep=auto, Detector = Peak, and Max hold for 20dB Bandwidth test.
- 5. Mark the peak frequency and -20dB (upper and lower) frequency
- 6. Repeat above procedures until all test default channel is completed

NOTE:

- 1. Cable loss as 1.2dB that offsets in the spectrum
- 2. For the plot of bandwidth measurement, the marker of the 20dB BW is arrow-mark



8.5. Measurement Result

GFSK									
Channel	Frequency (MHz)	20 dB Bandwidth (MHz)	2/3 Bandwidth (MHz)						
0	2402	0.884	-						
39	2441	0.883	-						
78	2480	0.882	-						
	/·	4-DQPSK							
Channel	Frequency (MHz)	20 dB Bandwidth (MHz)	2/3 Bandwidth (MHz)						
0	2402	1.408	0.939						
39	2441	1.409	0.939						
78	2480	1.408	0.939						
	8	B-DPSK							
Channel	Frequency (MHz)	20 dB Bandwidth (MHz)	2/3 Bandwidth (MHz)						
0	2402	1.388	0.925						
39	2441	1.386	0.924						
78	2480	1.387	0.925						



20dB Band Width Test Data CH-Low (GFSK mode)



20dB Band Width Test Data CH-Mid (GFSK mode)



Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



20dB Band Width Test Data CH-High (GFSK mode)



20dB Band Width Test Data CH-Low (/4-DQPSK mode)




Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



20dB Band Width Test Data CH-Mid (/4-DQPSK mode)



20dB Band Width Test Data CH-High (/4-DQPSK mode)

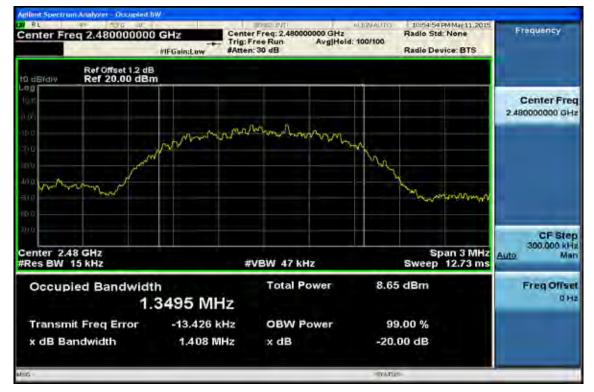

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



20dB Band Width Test Data CH-Low (8-DPSK mode)



20dB Band Width Test Data CH-Mid (8-DPSK mode)




Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Onless other was stated are results and the art report for the form of the state are results and the state are results are results and the state are results tronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms-e-document.htm. Attention is frawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



20dB Width Test Data CH-High (8-DPSK mode)

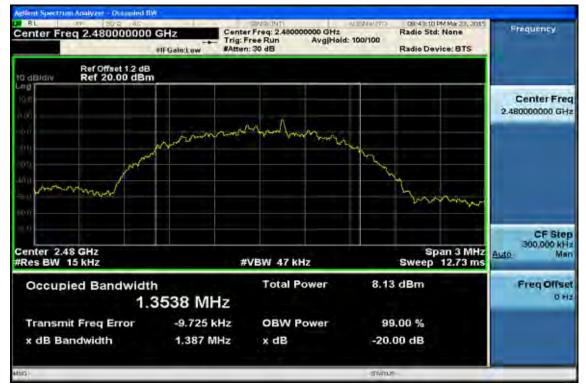

9. CONDUCTED BAND EDGES AND SPURIOUS EMISSION MEASUREMENT


9.1. Standard Applicable

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a).

9.2. Measurement Equipment Used

Conducted Emission Test Site									
EQUIPMENT	LAST	CAL DUE.							
ТҮРЕ		NUMBER	NUMBER	CAL.					
Spectrum Analyzer	Agilent	N9010A	MY53400256	10/15/2014	10/14/2015				
DC Block	PASTERNACK	PE8210	RF29	12/19/2014	12/18/2015				
Splitter	RF-LAMBAD	RFLT2W1G18G	RF35	12/19/2014	12/18/2015				
Attenuator	WOKEN	218FS-10	RF23	12/19/2014	12/18/2015				

9.3. Test SET-UP



Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。



9.4. Measurement Procedure

Conducted Band Edge:

- 1. Place the EUT on the table and set it in transmitting mode.
- 2. The testing follows FCC Public Notice DA 00-705 Measurement Guidelines.
- 3. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
- 4. Set center frequency of spectrum analyzer = operating frequency.
- 5. Set the spectrum analyzer as RBW, VBW=300 kHz, Sweep = auto
- 6. Mark Peak, 2.390GHz and 2.4835GHz and record the max. level.
- 7. Repeat above procedures until all frequency measured were complete.

Conducted Spurious Emission:

- 1. To connect Antenna Port of EUT to Spectrum.
- 2. The testing follows FCC Public Notice DA 00-705 Measurement Guidelines.
- 3. Set RBW = 100K & VBW = 300K, Detector =Peak, Sweep = Auto
- 4. Allow trace to fully stabilize.
- 5. Use the peak marker function to determine the maximum power level in any 100 kHz band segment within the fundamental EBW.
- 6. Repeat above procedures until all default test channel measured were complete.

The field strength is calculated by adding the Antenna Factor and Cable Factor and subtracting the Amplifier Gain and Duty Cycle Correction Factor (if any) from the measured reading. The basic equation with a sample calculation is as follows:

$\mathbf{FS} = \mathbf{RA} + \mathbf{AF} + \mathbf{CL} - \mathbf{AG}$

Where	FS = Field Strength	CL = Cable Attenuation Factor (Cable Loss)
	RA = Reading Amplitude	AG = Amplifier Gain
	AF = Antenna Factor	

9.5. Measurement Result


Note: Refer to next page spectrum analyzer data chart and tabular data sheets.

NOTE:


- 1. Cable loss as 1.2dB that offsets in the spectrum
- 2. The occurrence of the spike on the conducted emission is the signal of the fundamental emission.



Band Edges Test Data CH-Low (Hopping mode)

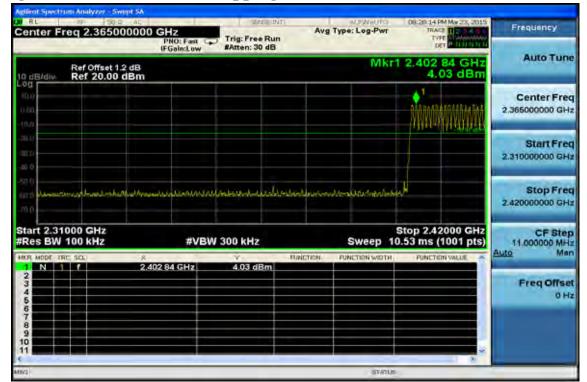

Band Edges Test Data CH-High

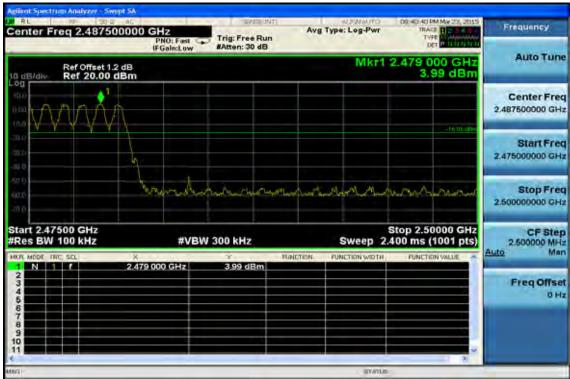

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are relatined to so days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

GS Taiwan Ltd. No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134號



Band Edges Test Data CH-Low (Non-Hopping mode)



Band Edges Test Data CH-High




Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are relatined to so days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.


GS Taiwan Ltd. No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134號



Conducted Spurious Emission Measurement Result Ch Low 30MHz – 3GHz

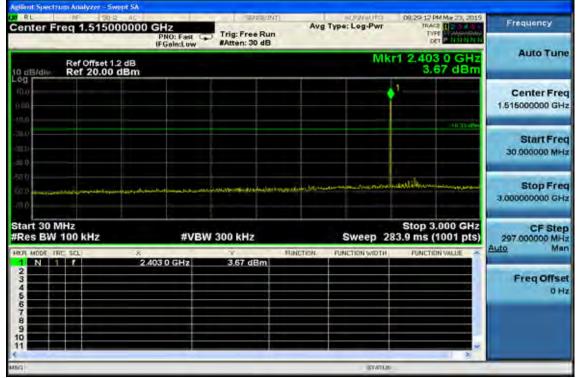

Ch Low 3GHz - 26.5GHz

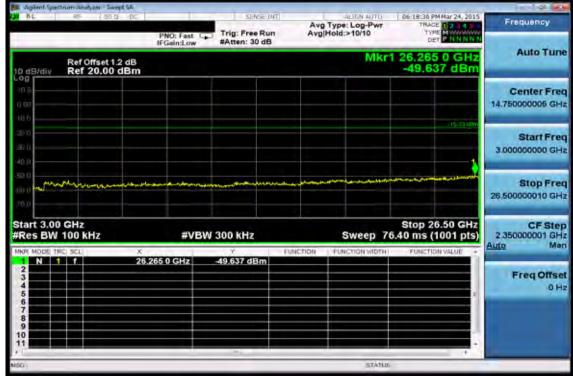


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Ch Mid 30MHz – 3GHz

	rum Analyzer - 1								
		000000 G		Trig: Free Run #Atten: 30 dB		Type: Log-Pwr	TRA	PM Mar 23, 2015	Frequency
10 dB/div.	Ref Offset Ref 20.0			Mk		1 6 GHz 58 dBm	Auto Tune		
(0.0) (0.80							¢1		Center Freq 1.515000000 GHz
-30.0 -30.0 -40.0								518 42 dbs	Start Freq 30.000000 MHz
-50 0 600 - 000	()ee,)ee,	an dense and an open	a Caracter and the second		Nantin	an the second	aluu43han	an a	Stop Fred 3.000000000 GHa
Start 30 M #Res BW	100 kHz	×			RUNICTION.	Sweep 2	83.9 ms	8.000 GHz (1001 pts)	CF Step 297.000000 MHz Auto Mar
1 23 4 5 6 7 8 9 10 1		2.441	6 GHz	3.58 dBm					Freq Offset 0 Hz
(STATUS			


Ch Mid 3GHz – 26.5GHz

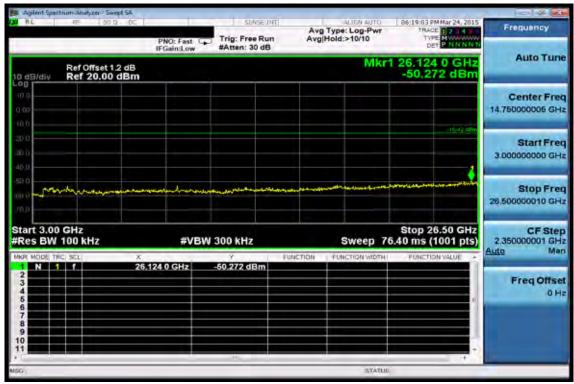


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Ch High 30MHz - 3GHz

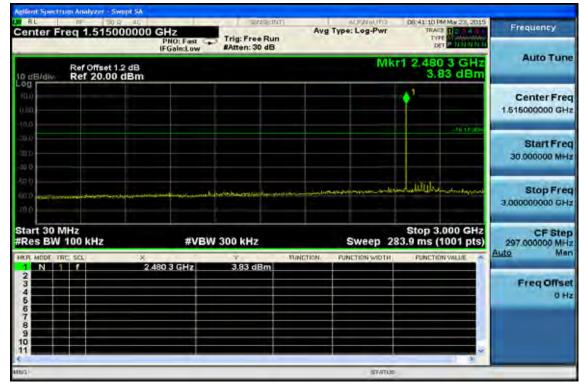

Ch High 3GHz - 26.5GHz

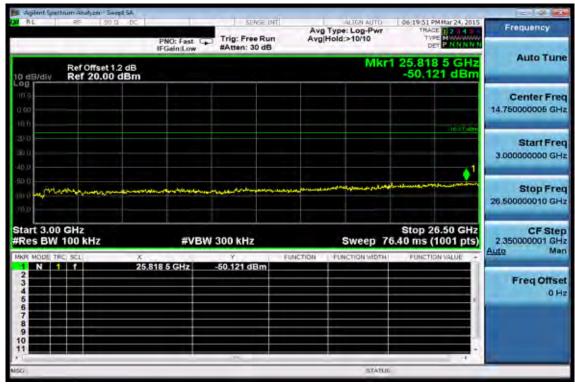

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



10. RADIATED BANDEDGE AND SPURIOUS EMISSION MEASUREMENT 10.1. Standard Applicable

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. In addition, radiated emissions which fall in the restricted bands must also comply with the §15.209 limit as below.

And according to §15.33(a) (1), for an intentional radiator operates below 10GHz, the frequency range of measurements: to the tenth harmonic of the highest fundamental frequency or to 40GHz, whichever is lower.

Frequency (MHz)	Field strength (microvolts/meter)	Distance (meters)
0.009-0.490	2400/F(KHz)	300
0.490-1.705	24000/F(KHz)	30
1.705-30	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

Note:

- 1. The lower limit shall apply at the transition frequencies.
- 2. Emission level $(dB\mu V/m) = 20 \log Emission level (dB\mu V/m)$

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is sized by the Company subject to is General Conditions of Service printed overleaf, available on request or accessible at <u>www.sqs.com/terms and conditions.htm</u> and, for elec-

tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sqs.com/terms</u> e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



10.2. Measurement Equipment Used

		SGS 966 Chamber	r No.C		
Name of Equipment	Manufacturer	Model	Serial Number	Calibration	Calibration
				Date	Due
EMI Test Receiver	R&S	ESU 40	100363	04/09/2015	04/08/2016
Loop Antenna	ETS-Lindgren	6502	00143303	12/09/2014	12/08/2015
Broadband Antenna	TESEQ	CBL 6112D	35240	12/05/2014	12/04/2015
Horn Antenna	ETS-Lindgren	3117	00143272	12/08/2014	12/07/2015
Horn Antenna	ETS-Lindgren	3160-09	00117911	11/13/2014	11/12/2015
Horn Antenna	ETS-Lindgren	3160-10	00117783	11/13/2014	11/12/2015
Pre Amplifier	EMC Instruments	EMC330	980096	12/19/2014	12/18/2015
Pre Amplifier	EMC Instruments	EMC0011830	980199	12/19/2014	12/18/2015
Pre Amplifier	R&S	SCU-18	10204	12/19/2014	12/18/2015
Pre Amplifier	R&S	SCU-26	100780	12/19/2014	12/18/2015
Coaxial Cable	Huber+Suhner	RG 214/U	966Rx 9K-30M	12/19/2014	12/18/2015
Coaxial Cable	Huber+Suhner	RG 214/U SUCOFLEX 104	966Rx 30M-3G	12/19/2014	12/18/2015
Coaxial Cable	Huber+Suhner	SUCOFLEX 104	966Rx 1G-18G	12/19/2014	12/18/2015
Coaxial Cable	Huber+Suhner	mini 141-12 SUCOFLEX 104	966Rx 18G-40G	12/19/2014	12/18/2015
Coaxial Cable	Huber+Suhner	SUCOFLEX 104	966Tx 30M-18G	12/19/2014	12/18/2015
Coaxial Cable	Huber+Suhner	SUCOFLEX 102	966Tx 18G-40G	12/19/2014	12/18/2015
Attenuator	WOKEN	218FS-10	RF27	12/19/2014	12/18/2015
Site NSA	SGS	966 Chamber C	SAC-C	03/04/2015	03/03/2016
Site VSWR	SGS	966 Chamber C	SAC-C	03/04/2015	03/03/2016
DC Power Supply	HOLA	DP-3003	D7070035	05/31/2014	05/30/2015
Controller	MF	MF-7802	N/A	N.C.R.	N.C.R.
Antenna Master	MF	N/A	N/A	N.C.R.	N.C.R.
Turn Table	MF	N/A	N/A	N.C.R.	N.C.R.
Test Software	World-Pallas	Dr. E	V 3.0 Lite	N.C.R.	N.C.R.


NOTE: N.C.R refers to Not Calibrated Required.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u></u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document is advised to the fullet at vector of the Law pearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law

No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134 號 SGS Taiwan Ltd.



10.3. Test SET-UP

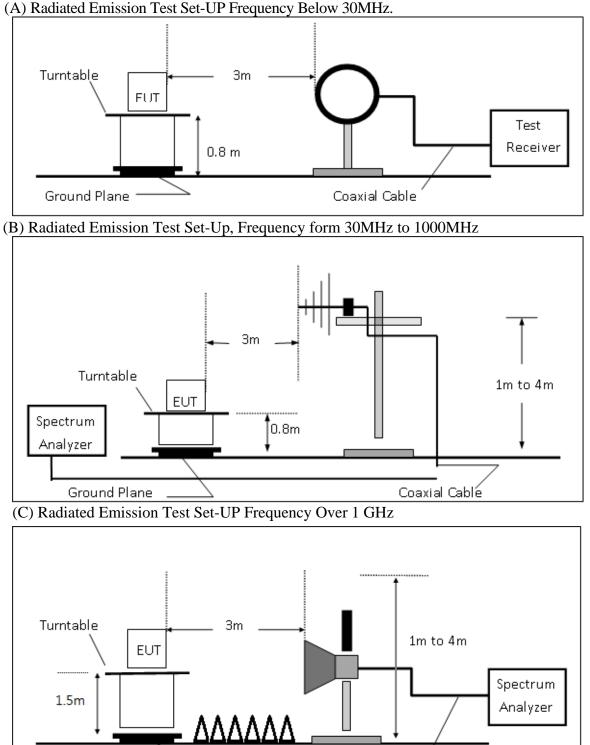

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Absorber

Ground Plane

Chiefs So therwise stated the results shown in this test report refer only to the sample(s) tested and store and refer and refer there in 50 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

S Taiwan Ltd. No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134號

Coaxial Cable



10.4. Measurement Procedure

Radiated Emission

- 1. The testing follows FCC Public Notice DA 00-705 Measurement Guidelines.
- 2. The EUT was placed on a turn table with 0.8m for frequency< 1GHz and 1.5m for frequency> 1GHz above ground plane.
- 3. The turn table shall rotate 360 degrees to determine the position of maximum emission level.
- 4. EUT is set 3m away from the receiving antenna which varied from 1m to 4m to find out the highest emissions.
- 5. Use the follow spectrum analyzer setting:
 - (1) Span = wide enough to fully capture the emission being measured
 - (2) RBW = 1 MHz for $f \ge 1$ GHz, 100 kHz for f < 1 GHz, VBW \ge RBW, Sweep = auto, Detector function = peak, Trace = max hold
 - (3) For average measurement: use duty cycle correction factor method per 15.35(c)

Duty Cycle = On time/100 milliseconds

On time = N1*L1=N2*L2+...+N(n-1)*LN(n-1)+N(n)*L(n)

Where N1 is number of type 1 pulses, L1 is length of type 1 pulses, etc.

Average Emission Level = Peak Emission Level + $20*\log (duty Cycle)$

- 6. When measurement procedures for electric field radiated emissions above 1 GHz the EUT measurement is to be made "while keeping the antenna in the 'cone of radiation' from that area and pointed at the area both in azimuth and elevation, with polarization oriented for maximum response." is still within the 3dB illumination BW of the measurement antenna.
- 7. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
- 8. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
- 9. Repeat above procedures until all frequency of the interest measured were complete.



10.5. Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Factor and subtracting the Amplifier Gain and Duty Cycle Correction Factor (if any) from the measured reading. The basic equation with a sample calculation is as follows:

FS = RA + AF + CL - AG

Where	FS = Field Strength	CL = Cable Attenuation Factor (Cable Loss)
	RA = Reading Amplitude	AG = Amplifier Gain
	AF = Antenna Factor	

The limit of the emission level is expressed in dBuV/m, which converts 20*log(uV/m)

Actual FS($dB\mu V/m$) = SPA. Reading level($dB\mu V$) + Factor(dB)

 $Factor(dB) = Antenna Factor(dB\mu V/m) + Cable Loss(dB) - Pre_Amplifier Gain(dB)$

Note :

"F" : denotes Fundamental Frequency. ; "H" : denotes Harmonic Frequency.

"E" : denotes Band Edge Frequency. ; "S" : denotes Spurious Frequency.

10.6. Test Results of Radiated Spurious Emissions form 9 KHz to 30 MHz

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit per 15.31(o) was not reported.

10.7. Measurement Result

Note: Refer to next page spectrum analyzer data chart and tabular data sheets.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Since Statement is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for elec-this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms-e-document.htm. Attention is frawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law



Radiated Band Edge Measurement Result: (Hopping Mode)

Operation Bar Fundamental I	Frequency	:2402 MHz		Test Date Temp./Humi.		:2015-04-09 :24.8 deg_C / 74 RH		
Operation Mo EUT Pol.	de	:Band Edge I :E1 Plane		Engineer Measurement Antenna Pol.			:Ashton :VERTICAL	
Freq.	Note	Detector Mode	Spectrum Reading Lev	Factor	Actual FS	Limit @3m	Margin	
MHz	F/H/E/S	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB	
2390.00	Е	Peak	38.36	6.62	44.97	74.00	-29.03	
2390.00	Е	Average	26.76	6.62	33.38	54.00	-20.62	

Operation Bar Fundamental I Operation Mo EUT Pol.	Frequency	:BR+Hoppin :2402 MHz :Band Edge I :E1 Plane	LOW	Test Date Temp./Humi. Engineer Measurement An	:2015-04-09 :24.8 deg_C / 74 RH :Ashton :HORIZONTAL		
Freq.	Note	Detector	Spectrum	Factor	Actual	Limit	Margin
		Mode	Reading Lev	rel	FS	@3m	
MHz	F/H/E/S	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
2390.00	Е	Peak	39.45	6.62	46.07	74.00	-27.93
2390.00	Е	Average	31.34	6.62	37.96	54.00	-16.04



Е

2483.50

Average

FCC ID: B94HNQ93CSPNAC

Report No.: E2/2015/30018 Issue Date: Apr. 30, 2015 Page: 51 of 83

Operation Bar Fundamental I Operation Mo EUT Pol.	Frequency	:BR+Hoppin :2480 MHz :Band Edge I :E1 Plane	80 MHzTemp./Humi.and Edge HIGHEngineer		:2015-04-09 :24.8 deg_C / 74 RH :Ashton :VERTICAL		
Freq. MHz	Note F/H/E/S	Detector Mode PK/QP/AV	Spectrum Reading Lev dBµV		Actual FS dBµV∕m	Limit @3m dBµV/m	Margin dB
2483.50	Е	Peak	42.59	6.96	49.56	74.00	-24.44
2483.50	Е	Average	28.37	6.96	35.33	54.00	-18.67
Operation Bar Fundamental I Operation Mo EUT Pol.	Frequency	:BR+Hoppin :2480 MHz :Band Edge I :E1 Plane	0	Test Date Temp./Humi. Engineer Measurement Ar	ntenna Pol.	:2015-04-09 :24.8 deg_C / :Ashton :HORIZONT.	
Freq.	Note	Detector	Spectrum	Factor	Actual	Limit	Margin
		Mode	Reading Lev	/el	FS	@3m	
MHz	F/H/E/S	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
2483.50	Е	Peak	45.48	6.96	52.44	74.00	-21.56

31.91

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_e-document.htm</u></u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document is advised any be prosecuted to the fulle at vent of the law. pearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

6.96

38.87

54.00

-15.13



Radiated Emission – Band Edge (Non-Hopping Mode):

Operation Ban Fundamental I Operation Mod EUT Pol.	nental Frequency :2402 MHz Temp./Humi. on Mode :Band Edge LOW Engineer			:2015-04-09 :24.8 deg_C / :Ashton :VERTICAL	74 RH		
Freq.	Note	Detector Mode	Spectrum Reading Lev	Factor	Actual FS	Limit @3m	Margin
MHz	F/H/E/S	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
2390.00	Е	Peak	38.91	6.62	45.52	74.00	-28.48
2390.00	Е	Average	25.16	6.62	31.78	54.00	-22.22

Operation Bar Fundamental 1 Operation Mo EUT Pol.	Frequency	:BR :2402 MHz :Band Edge I :E1 Plane	LOW	Test Date Temp./Humi. V Engineer Measurement Antenna Pol.		:2015-04-09 :24.8 deg_C / 74 RH :Ashton :HORIZONTAL	
Freq.	Note	Detector	Spectrum	Factor	Actual	Limit	Margin
		Mode	Reading Lev	el	FS	@3m	
MHz	F/H/E/S	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
2390.00	Е	Peak	38.59	6.62	45.20	74.00	-28.80
2390.00	Е	Average	25.49	6.62	32.11	54.00	-21.89




Report No.: E2/2015/30018 Issue Date: Apr. 30, 2015 Page: 53 of 83

Operation Band:BRFundamental Frequency:2480 MHzOperation Mode:Band Edge HIGHEUT Pol.:E1 Plane		HIGH	Test Date Temp./Humi. Engineer Measurement An	itenna Pol.	:2015-04-09 :24.8 deg_C / 74 RH :Ashton :VERTICAL		
Freq.	Note	Detector	Spectrum	Factor	Actual	Limit	Margin
		Mode	Reading Lev	vel	FS	@3m	
MHz	F/H/E/S	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
2483.50	Е	Peak	40.22	6.96	47.18	74.00	-26.82
2483.50	Е	Average	26.50	6.96	33.46	54.00	-20.54
2484.90	S	Peak	42.95	6.97	49.92	74.00	-24.08
2484.90	S	Average	25.76	6.97	32.73	54.00	-21.27
Operation Bar Fundamental I Operation Mo EUT Pol.	Frequency	:BR :2480 MHz :Band Edge I :E1 Plane	HIGH	Test Date Temp./Humi. Engineer Measurement An	itenna Pol.	:2015-04-09 :24.8 deg_C / :Ashton :HORIZONTA	

Freq.	Note	Detector	Spectrum	Factor	Actual	Limit	Margin
		Mode	Reading Level		FS	@3m	
MHz	F/H/E/S	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
2483.50	Е	Peak	47.73	6.96	54.70	74.00	-19.30
2483.50	E	Average	29.36	6.96	36.32	54.00	-17.68




Radiated Spurious Emission Measurement Result: For Frequency from 30MHz to 1000MHz






Test Date Temp./Humi. Engineer Measurement Antenna Pol. :2015-04-09 :24.8 deg C / 74 RH :Ashton :VERTICAL

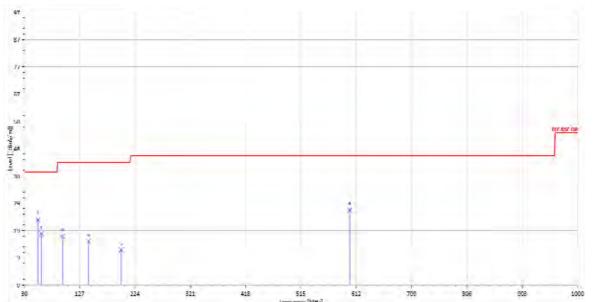

Freq.	Note	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	F/H/E/S	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
54.25	S	Peak	50.03	-26.79	23.24	40.00	-16.76
60.07	S	Peak	46.78	-28.50	18.29	40.00	-21.71
96.93	S	Peak	41.79	-24.36	17.43	43.50	-26.07
142.52	S	Peak	37.42	-21.92	15.51	43.50	-27.99
199.75	S	Peak	35.76	-23.28	12.48	43.50	-31.02
600.36	S	Peak	39.09	-12.45	26.64	46.00	-19.36




Report No.: E2/2015/30018 Issue Date: Apr. 30, 2015 Page: 55 of 83

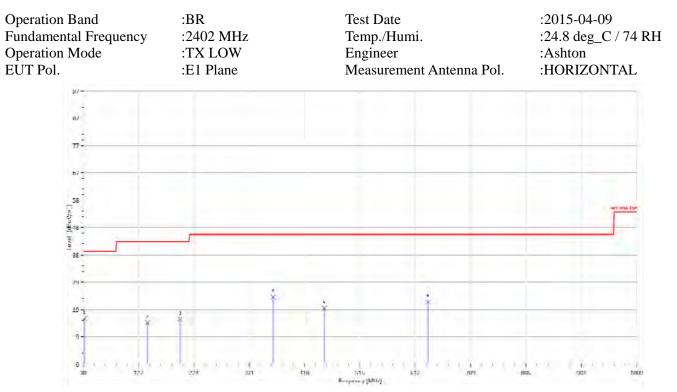

Freq.	Note	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	F/H/E/S	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
31.94	S	Peak	30.32	-14.17	16.15	40.00	-23.85
142.52	S	Peak	36.60	-21.92	14.68	43.50	-28.82
199.75	S	Peak	39.17	-23.28	15.90	43.50	-27.60
362.71	S	Peak	40.90	-17.11	23.78	46.00	-22.22
452.92	S	Peak	34.59	-14.83	19.76	46.00	-26.24
634.31	S	Peak	33.75	-11.62	22.13	46.00	-23.87




Report No.: E2/2015/30018 Issue Date: Apr. 30, 2015 Page: 56 of 83

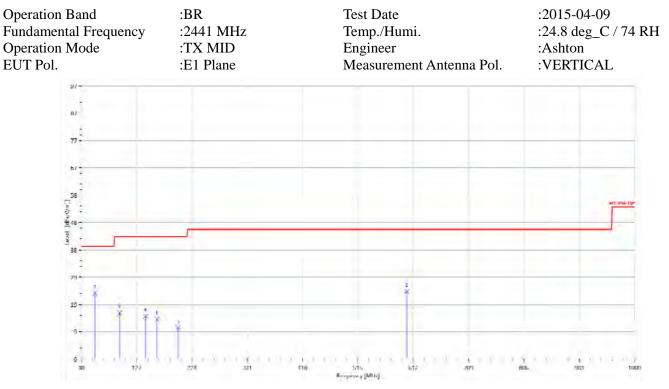

Freq.	Note	Detector	Spectrum	Factor	Actual	Limit	Margin
		Mode	Reading Level		FS	@3m	
MHz	F/H/E/S	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
54.25	S	Peak	50.28	-26.79	23.49	40.00	-16.51
96.93	S	Peak	40.72	-24.36	16.36	43.50	-27.14
142.52	S	Peak	37.18	-21.92	15.27	43.50	-28.23
162.89	S	Peak	37.44	-23.32	14.12	43.50	-29.38
199.75	S	Peak	34.48	-23.28	11.20	43.50	-32.30
600.36	S	Peak	36.37	-12.45	23.92	46.00	-22.08




Report No.: E2/2015/30018 Issue Date: Apr. 30, 2015 Page: 57 of 83

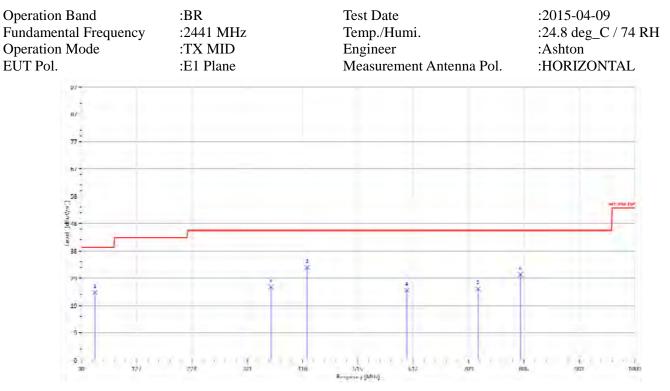

Note	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
F/H/E/S	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
S	Peak	50.79	-26.79	24.00	40.00	-16.00
S	Peak	43.09	-17.11	25.98	46.00	-20.02
S	Peak	48.31	-15.48	32.84	46.00	-13.16
S	Peak	37.25	-12.45	24.80	46.00	-21.20
S	Peak	35.97	-10.71	25.26	46.00	-20.74
S	Peak	39.81	-9.49	30.32	46.00	-15.68
	F/H/E/S S S S S S	KindeF/H/E/SModeF/H/E/SPK/QP/AVSPeakSPeakSPeakSPeakSPeakSPeak	ModeReading LevelF/H/E/SPK/QP/AVdBμVSPeak50.79SPeak43.09SPeak48.31SPeak37.25SPeak35.97	Mode Reading Level F/H/E/S PK/QP/AV dBµV dB S Peak 50.79 -26.79 S Peak 43.09 -17.11 S Peak 48.31 -15.48 S Peak 37.25 -12.45 S Peak 35.97 -10.71	Mode Reading Level FS F/H/E/S PK/QP/AV dBµV dB dBµV/m S Peak 50.79 -26.79 24.00 S Peak 43.09 -17.11 25.98 S Peak 48.31 -15.48 32.84 S Peak 37.25 -12.45 24.80 S Peak 35.97 -10.71 25.26	F/H/E/S Mode Reading Level FS @ 3m F/H/E/S PK/QP/AV dBµV dB dBµV/m dBµV/m S Peak 50.79 -26.79 24.00 40.00 S Peak 43.09 -17.11 25.98 46.00 S Peak 48.31 -15.48 32.84 46.00 S Peak 37.25 -12.45 24.80 46.00 S Peak 35.97 -10.71 25.26 46.00




Report No.: E2/2015/30018 Issue Date: Apr. 30, 2015 Page: 58 of 83

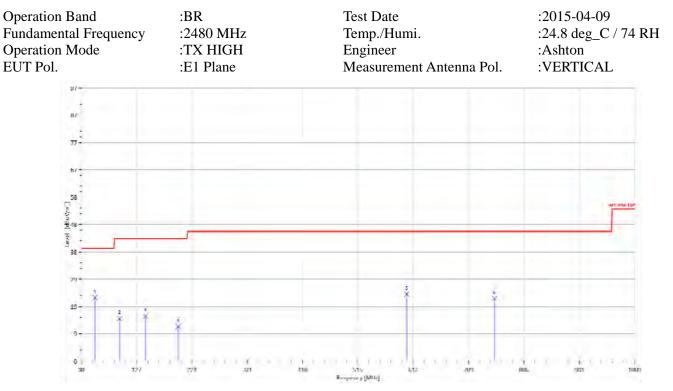

Freq.	Note	Detector	Spectrum	Factor	Actual	Limit	Margin
		Mode	Reading Level		FS	@3m	
MHz	F/H/E/S	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
54.25	S	Peak	49.38	-26.79	22.58	40.00	-17.42
96.93	S	Peak	39.44	-24.36	15.07	43.50	-28.43
142.52	S	Peak	37.86	-21.92	15.94	43.50	-27.56
199.75	S	Peak	35.56	-23.28	12.28	43.50	-31.22
600.36	S	Peak	36.22	-12.45	23.77	46.00	-22.23
754.59	S	Peak	32.27	-9.99	22.28	46.00	-23.72



Report No.: E2/2015/30018 Issue Date: Apr. 30, 2015 Page: 59 of 83

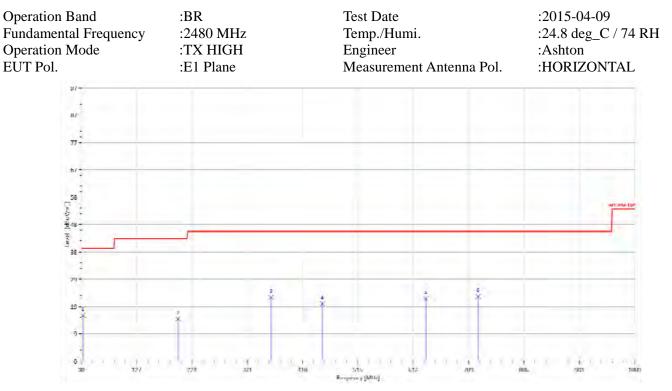

Freq.	Note	Detector	Spectrum	Factor	Actual	Limit	Margin
		Mode	Reading Level		FS	@3m	
MHz	F/H/E/S	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
32.91	S	Peak	30.90	-14.69	16.21	40.00	-23.79
199.75	S	Peak	38.29	-23.28	15.01	43.50	-28.49
362.71	S	Peak	39.75	-17.11	22.63	46.00	-23.37
452.92	S	Peak	35.19	-14.83	20.36	46.00	-25.64
634.31	S	Peak	33.81	-11.62	22.19	46.00	-23.81
725.49	S	Peak	33.60	-10.71	22.89	46.00	-23.11



Radiated Spurious Emission Measurement Result: For Frequency over 1GHz

Operation Band Fundamental Fr Operation Mode EUT Pol.	requency	:BR :2402 MHz :TX LOW :E1 Plane	Te Er	st Date mp./Humi. gineer easurement Ar	ntenna Pol.	:2015-04-09 :24.8 deg_C / :Ashton :VERTICAL	74 RH
67 g) 77 67							- 000 PM
tread moving	ž					10	<u>: 89 N</u>
74 39 9							
2000	3550	6100 8650		150 16300 ф[МН/]	18850 21400	23050	26500
Freq.	Note	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	F/H/E/S	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
4804.00 4804.00	H H	Peak Average	33.55 22.26	10.98 10.98	44.53 33.24	74.00 54.00	-29.47 -20.76




Report No.: E2/2015/30018 Issue Date: Apr. 30, 2015 Page: 61 of 83

Operation Band Fundamental Frequency Operation Mode EUT Pol.	:BR :2402 MHz :TX LOW :E1 Plane	Ter Eng	t Date np./Humi. gineer asurement Ante	enna Pol.	:2015-04-09 :24.8 deg_C :Ashton :HORIZONT	
97 - 112 177 -						
50						17. 1994 FB
2 (Jack 1999) 18	*					
Freq. Note	Detector	Spectrum	1 100.00	Actual	Limit	Margin
	Moda	Pooding Loval		ES	@3m	8

ricq.	Note	Detector	Spectrum	ractor	Actual	Linnt	wiargin	
		Mode	Reading Level		FS	@3m		
MHz	F/H/E/S	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB	
4804.00	Н	Peak	33.85	10.98	44.83	74.00	-29.17	
4804.00	Н	Average	21.90	10.98	32.88	54.00	-21.12	



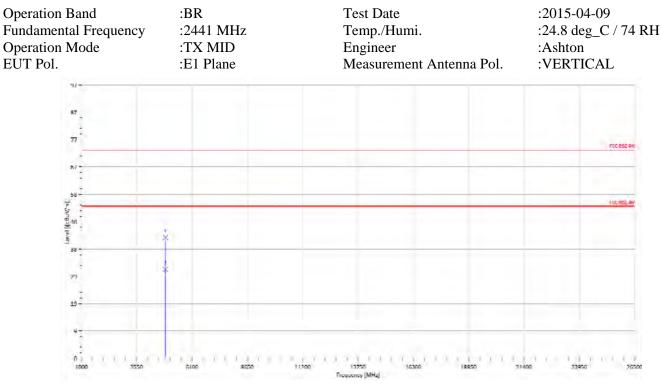

Freq.	Note	Detector	Spectrum	Factor	Actual	Limit	Margin
		Mode	Reading Level		FS	@3m	
MHz	F/H/E/S	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
4882.00	Н	Peak	32.01	10.91	42.92	74.00	-31.08
4882.00	Н	Average	20.63	10.91	31.54	54.00	-22.46




Operation Fundamer Operation EUT Pol.	ntal Frequency	:BR :2441 MHz :TX MID :E1 Plane	Test Date Temp./Humi. Engineer Measurement Antenna Pol.	:2015-04-09 :24.8 deg_C / 74 RH :Ashton :HORIZONTAL
	9/- a/			
	b/			102.054.075
	1	2		
	- 71 - 10 -			
	-9 - - - 10000 - 3550	, (), (r tinan tinan tinan Response(Mitid)	25408 72560 25560

Freq.	Note	Detector	Spectrum	Factor	Actual	Limit	Margin
		Mode	Reading Level		FS	@3m	
MHz	F/H/E/S	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
4882.00	Н	Peak	32.42	10.91	43.33	74.00	-30.67
4882.00	Н	Average	20.28	10.91	31.19	54.00	22.81



Report No.: E2/2015/30018 Issue Date: Apr. 30, 2015 Page: 64 of 83

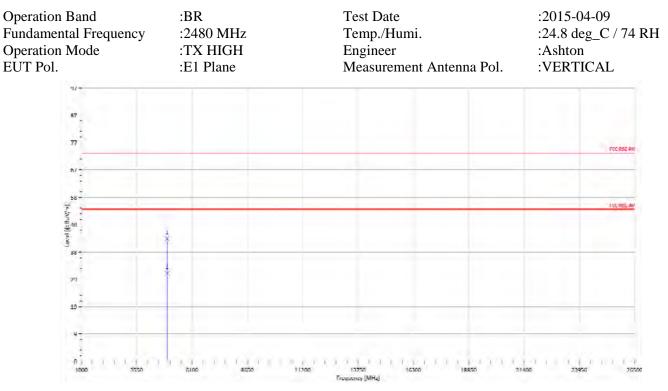

Freq.	Note	Detector	Spectrum	Factor	Actual	Limit	Margin
		Mode	Reading Level		FS	@3m	
MHz	F/H/E/S	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
4960.00	Н	Peak	32.55	10.99	43.54	74.00	-30.46
4960.00	Н	Average	20.23	10.99	31.22	54.00	-22.78



Report No.: E2/2015/30018 Issue Date: Apr. 30, 2015 Page: 65 of 83

Operation Band Fundamental Frequency Operation Mode EUT Pol.	:BR :2480 MHz :TX HIGH :E1 Plane	Test Date Temp./Humi. Engineer Measurement Antenn	:2015-04-09 :24.8 deg_C / 74 RH :Ashton a Pol. :HORIZONTAL
9/- 8/ 77-			
M -			112.112.119
2010 2010 2010 2010 2010 2010 2010 2010			
291 - - 	*		
Freq. Note	Detector	Foregoing (Mile)	La 22408 22754 2000 Actual Limit Mars

Freq.	Note	Detector	Spectrum	Factor	Actual	Limit	Margin
		Mode	Reading Level		FS	@3m	
MHz	F/H/E/S	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
4960.00	Н	Peak	32.77	10.99	43.76	74.00	-30.24
4960.00	Н	Average	19.79	10.99	30.78	54.00	-23.22



11. FREQUENCY SEPARATION


11.1. Standard Applicable

Frequency hopping systems shall have hopping channel carrier frequencies separated by minimum of 25 kHz or the 2/3*20dB bandwidth of the hopping channel, whichever is greater.

11.2. Measurement Equipment Used

Conducted Emission Test Site							
EQUIPMENT	MFR	MODEL	SERIAL	LAST	CAL DUE.		
ТҮРЕ		NUMBER	NUMBER	CAL.			
Spectrum Analyzer	Agilent	N9010A	MY53400256	10/15/2014	10/14/2015		
DC Block	PASTERNACK	PE8210	RF29	12/19/2014	12/18/2015		
Splitter	RF-LAMBAD	RFLT2W1G18G	RF35	12/19/2014	12/18/2015		
Attenuator	WOKEN	218FS-10	RF23	12/19/2014	12/18/2015		

11.3. Test Set-up



11.4. Measurement Procedure

- 1. Place the EUT on the table and set it in transmitting mode.
- 2. The testing follows FCC Public Notice DA 00-705 Measurement Guidelines.
- 3. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
- 4. Set center frequency of spectrum analyzer = middle of hopping channel.
- 5. Set the spectrum analyzer as RBW, VBW=100 kHz, Adjust Span to 5MHz, Sweep = auto.
- 6. Max hold. Mark 3 Peaks of hopping channel and record the 3 peaks frequency.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms-e-document.htm. Attention is frawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only



11.5. Measurement Result

Channel separation (MHz)	Limit	Result	
1	>=25 kHz or 2/3 times 20dB bandwidth	PASS	

Frequency Separation Test Data



Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134號

12. NUMBER OF HOPPING FREQUENCY


12.1. Standard Applicable

Frequency hopping systems operating in the 2400MHz-2483.5 MHz bands shall use at least 15 hopping frequencies.

12.2. Measurement Equipment Used

Conducted Emission Test Site							
EQUIPMENT	MFR	MODEL	SERIAL	LAST	CAL DUE.		
ТҮРЕ		NUMBER	NUMBER	CAL.			
Spectrum Analyzer	Agilent	N9010A	MY53400256	10/15/2014	10/14/2015		
DC Block	PASTERNACK	PE8210	RF29	12/19/2014	12/18/2015		
Splitter	RF-LAMBAD	RFLT2W1G18G	RF35	12/19/2014	12/18/2015		
Attenuator	WOKEN	218FS-10	RF23	12/19/2014	12/18/2015		

12.3. Test Set-up



12.4. Measurement Procedure

- 1. Place the EUT on the table and set it in transmitting mode.
- 2. The testing follows FCC Public Notice DA 00-705 Measurement Guidelines.
- 3. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
- 4. Set spectrum analyzer Start=2400MHz, Stop = 2483.5MHz, Sweep = auto.
- 5. Set the spectrum analyzer as RBW=430 kHz, VBW=1.5MHz., Detector = Peak
- 6. Max hold, view and count how many channel in the band.

12.5. Measurement Result

Tabular Data of Total Channel Number

	Channel Number	Limit
2.4 GHz – 2.441GHz	40	
2.441 GHz – 2.4835GHz	39	>15
2.4GHz ~2.4835GHz	(40+39) = 79	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134 號

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。



Channel Number

n Analyzer Sweet SI 25 PM Mil 23, 2019 Avg Type: Log-Pwr Frequency Center Freq 2.420500000 GHz Trig: Free Run #Atten: 30 dB TVP PNO: Fast IFGain:Low Auto Tune Mkr1 2.402 000 GHz 4.19 dBm Ref Offset 1.2 dB Ref 20.00 dBm ID dB/div Center Fred 2.420500000 GHz Start Freq 2.40000000 GHz Stop Freq 2.441000000 GHz CF Step 4.100000 MHz Man Auto Freq Offset OHZ Start 2.40000 GHz Stop 2.44100 GHz #VBW 1.5 MHz #Res BW 430 kHz Sweep 1.000 ms (1001 pts)

2.4 GHz - 2.441GHz

2.441 GHz - 2.4835GHz



Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms</u>.e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

GS Taiwan Ltd. No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134號



13. TIME OF OCCUPANCY (DWELL TIME)


13.1. Standard Applicable

Frequency hopping systems operating in the 2400MHz-2483.5MHz. The average time of occupancy on any frequency shall not greater than 0.4 s within period of 0.4 seconds multiplied by the number of hopping channel employed.

13.2. Measurement Equipment Used

Conducted Emission Test Site							
EQUIPMENT	MFR	MODEL	SERIAL	LAST	CAL DUE.		
ТҮРЕ		NUMBER	NUMBER	CAL.			
Spectrum Analyzer	Agilent	N9010A	MY53400256	10/15/2014	10/14/2015		
DC Block	PASTERNACK	PE8210	RF29	12/19/2014	12/18/2015		
Splitter	RF-LAMBAD	RFLT2W1G18G	RF35	12/19/2014	12/18/2015		
Attenuator	WOKEN	218FS-10	RF23	12/19/2014	12/18/2015		

13.3. Test Set-up







13.4. Measurement Procedure

- 1. Place the EUT on the table and set it in transmitting mode.
- 2. The testing follows FCC Public Notice DA 00-705 Measurement Guidelines.
- 3. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
- 4. Set center frequency of spectrum analyzer = operating frequency.
- 5. Set the spectrum analyzer as RBW, VBW=1MHz, 3MHz, Span = 0Hz, Detector = Peak, Adjust Sweep = $2 \sim 8ms$.
- 6. Repeat above procedures until all frequency of the interest measured were complete.

Formula Deduced: time occupancy of one time slot X Hopping rate / total slot in one channel / total channel that hops X period of working channels.

Where, standard hopping rate is 1600 hops/s, slot in one channel for DH1, DH3, and DH5 is 2, 4, and 6, respectively.

DH1 consists of single time slot of the uplink, and one slot of the downlink Total Slot: 2

DH3 consists of three time slot of the uplink, and one slot of the downlink. Total Slot: 4

DH5 consists of five time slot of the uplink, and one slot of the downlink. Total Slot: 6

Note: the result of the complete test default channel at 1Mbps is recorded on the test report, 2Mbps, and 3Mbps only records the measurement result at middle channel that reveals no much deviation.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。



13.5. Tabular Result of the Measurement

	GFSK (1Mbps)						
Channel	PACKET TYPE	Measurement Result	Limit				
Channel	PACKEITIPE	(ms)	(ms)				
	DH1	121.60	400ms				
0	DH3	262.08	400ms				
	DH5	307.73	400ms				
	DH1	121.60	400ms				
39	DH3	261.44	400ms				
	DH5	307.73	400ms				
	DH1	120.96	400ms				
78	DH3	262.72	400ms				
	DH5	306.45	400ms				
	/4 DQP	SK (2Mbps)					
		Measurement Result	Limit				
Channel	PACKET TYPE	(ms)	(ms)				
	DH1	125.44	400ms				
0	DH3	262.72	400ms				
	DH5	308.37	400ms				
	8-DPSK	K (3Mbps)					
		Measurement Result	Limit				
Channel	PACKET TYPE	(ms)	(ms)				
	DH1	122.88	400ms				
0	DH3	262.72	400ms				
	DH5	308.37	400ms				

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u></u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document is advised to the fullet at vector of the Law pearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134 號 SGS Taiwan Ltd.



A period time = 0.4 (s) * 79 = 31.6 (s)

GFSK (1Mbps):

CH Low	DH1 time slot =	0.380 (ms) * (1600/2/79)	* 31.6 =	121.60 (ms)
	DH3 time slot =	1.638 (ms) * (1600/4/79)	* 31.6 =	262.08 (ms)
	DH5 time slot =	2.885 (ms) * (1600/6/79)	* 31.6 =	307.73 (ms)

CH Mid DH1 time slot =
$$0.380 \text{ (ms)} * (1600/2/79) * 31.6 = 121.60 \text{ (ms)}$$

DH3 time slot = $1.634 \text{ (ms)} * (1600/4/79) * 31.6 = 261.44 \text{ (ms)}$
DH5 time slot = $2.885 \text{ (ms)} * (1600/6/79) * 31.6 = 307.73 \text{ (ms)}$

CH High DH1 time slot =
$$0.378 \text{ (ms)} * (1600/2/79) * 31.6 = 120.96 \text{ (ms)}$$

DH3 time slot = $1.642 \text{ (ms)} * (1600/4/79) * 31.6 = 262.72 \text{ (ms)}$
DH5 time slot = $2.873 \text{ (ms)} * (1600/6/79) * 31.6 = 306.45 \text{ (ms)}$

/4 -DQPSK (2Mbps):

CH Mid	2DH1 time slot =	0.392 (ms) * (1600/2/79)	* 31.6 =	125.44 (ms)
	2DH3 time slot =	1.642 (ms) * (1600/4/79)	* 31.6 =	262.72 (ms)
	2DH5 time slot =	2.891 (ms) * (1600/6/79)	* 31.6 =	308.37 (ms)
8-DPSK (3Mbps):				
CH Mid	3DH1 time slot =	0.384 (ms) * (1600/2/79)	* 31.6 =	122.88 (ms)
	3DH3 time slot =	1.642 (ms) * (1600/4/79)	* 31.6 =	262.72 (ms)
	3DH5 time slot =	2.891 (ms) * (1600/6/79)	* 31.6 =	308.37 (ms)


13.6. Measurement Result

Note: Refer to next page for plots.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u></u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document is advised to the fullet at vector of the Law pearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



CH-Low DH1

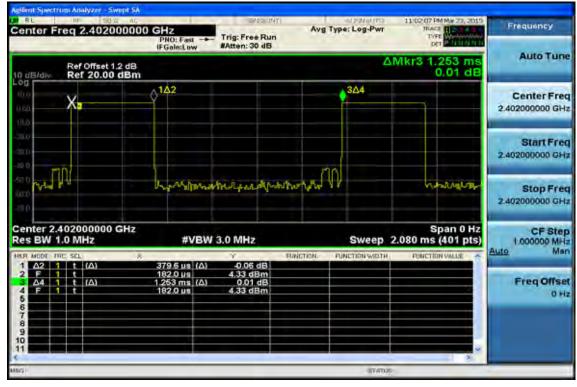


DH3






DH5

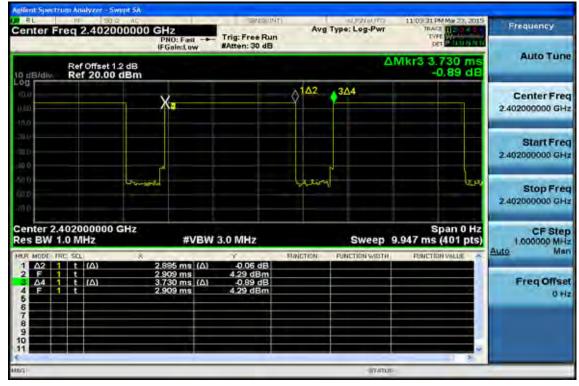

CH-Mid

DH1

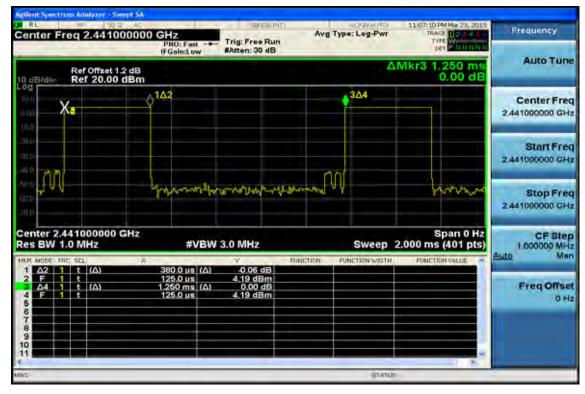




DH3



DH5

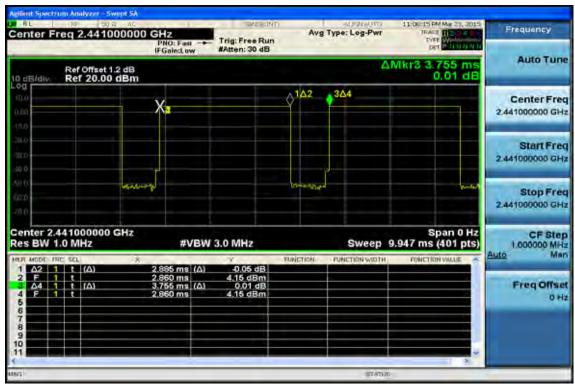

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.


Chiefs あるはのいき Stated the testing south in this test report feer only to the sample(s) tested and such sample(s) are relained to 90 days only. 除非 ある 就可 。 大報告は果 使 對剤試之 様品 身、同時比核品 僅保留 90 天。本報告未提本 公司 書 面許可 ,不可部 份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms</u> and <u>conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms</u> e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the context or ap-compand is underwised and built and offenders more the parties to a transaction form exercising all their rights and obligations under the transaction documents. This document is underwised to the private activate of the hour. pearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



CH-High DH1


or Analyzer - Swept SA PI Frequency Center Freq 2.480000000 GHz Avg Type: Log-Pwr Trig: Free Run #Atten: 30 dB DET PNO: Fast -IFGain:Low Auto Tune ∆Mkr3 Ref Offset 1.2 dB Ref 20.00 dBm 0.01 dE O dB/r 142 314 Center Freq X. 2.480000000 GHz Start Fred 2.48000000 GHz molen المالي in type tur any home man Stop Freq 2.48000000 GHz Center 2.480000000 GHz Res BW 1.0 MHz Span 0 Hz CF Step 1.000000 MHz Man #VBW 3.0 MHz Sweep 3.147 ms (401 pts) Auto t (Δ) t t (Δ) 3776 μs (Δ) 8496 μs .251 ms (Δ) 8496 μs -0.06 dB 4.13 dBm 0.01 dB 4.13 dBm **Freq Offset** 45 OHIZ 6789 10 STATUS

DH3

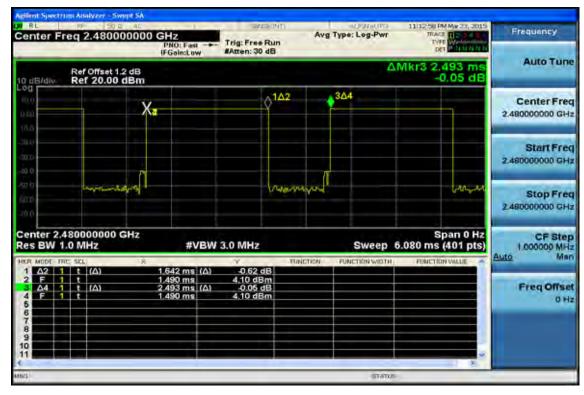



DH5

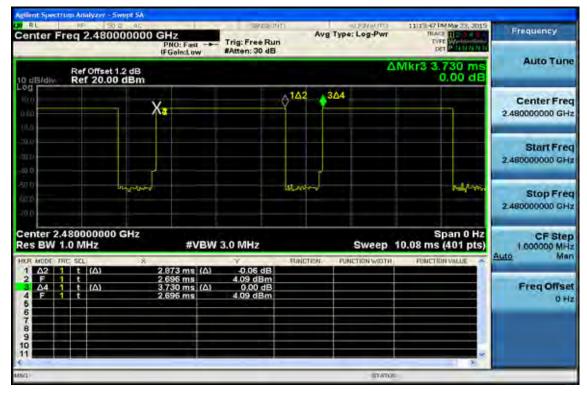


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_e-document.htm</u></u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.


SGS Taiwan Ltd. No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134號



CH-Mid 2DH1

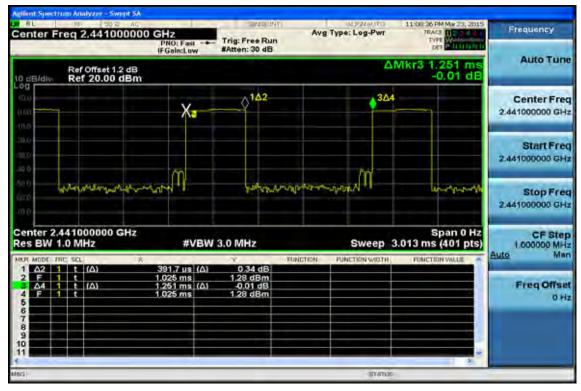


2DH3

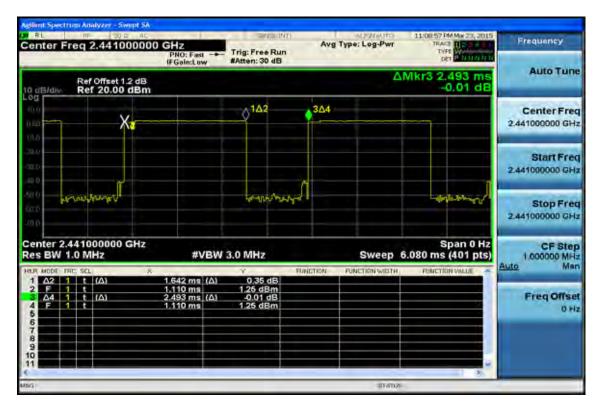



2DH5

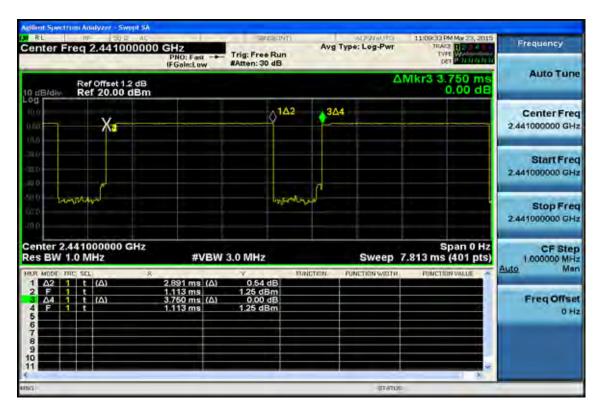


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_e-document.htm</u></u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.


GS Taiwan Ltd. No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134號



CH-Mid **3DH1**

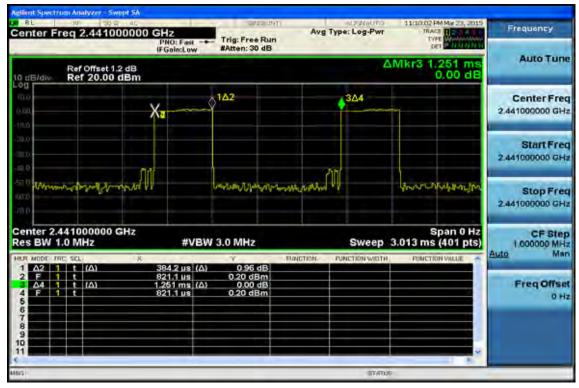


3DH3

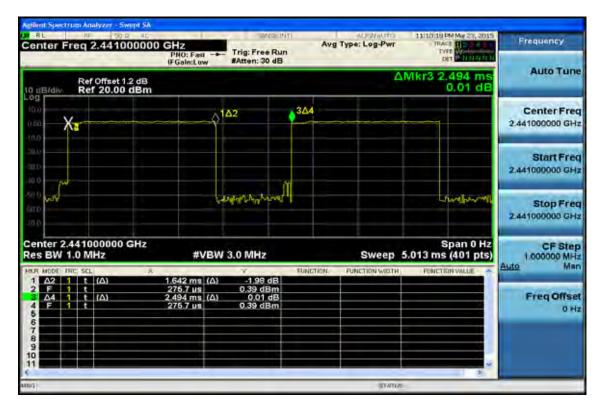



3DH5

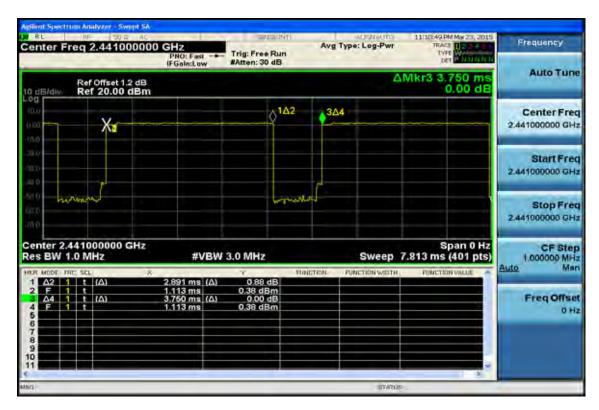

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_e-document.htm</u></u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

GS Taiwan Ltd. No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134號



14. ANTENNA REQUIREMENT

14.1. Standard Applicable

For intentional device, according to §15.203, an intentional radiator shall be designed to ensure that no antenna other than furnished by the responsible party shall be used with the device.

If the transmitting antenna is greater than 6dBi, the power shall be reduced by the same level in dB comparing to gain minus 6dBi.

14.2. Antenna Connected Construction

A PIFA antenna design is used.

The antenna is designed with permanent attached and no consideration of replacement. Please see EUT photo and antenna spec. for details.

The antenna gain is less than 6dBi. Therefore, it is not necessary to reduce maximum output power limit.

~ End of Report ~

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

SGS Taiwan Ltd. No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134 號