



# SPORTON International Inc.

No. 52, Hwa Ya 1st Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C.  
Ph: 886-3-327-3456 / FAX: 886-3-327-0973 / www.sporton.com.tw

## FCC RADIO TEST REPORT

Applicant's company	Hewlett-Packard Company
Applicant Address	3000 Hanover Street Palo Alto, California 94304 U.S.A.
FCC ID	B94MRLBB1403
Manufacturer's company	Joy Technology (ShenZhen) Corporation
Manufacturer Address	Building A,B,C,D, HengKeng Ind., Shangpai, Shangwu,Aiqun Rd., Shiyan Town,Shenzhen 518135 China

Product Name	802.11ac WLAN Radio
Brand Name	HP
Model No.	MRLBB-1403
Product No.	5066-3786
Test Rule Part(s)	47 CFR FCC Part 15 Subpart E § 15.407
Test Freq. Range	5150 ~ 5250 MHz / 5725 ~ 5850 MHz
Received Date	May 28, 2014
Final Test Date	Jul. 30, 2014
Submission Type	Original Equipment
Operating Mode	Master

### Statement

**Test result included is for the IEEE 802.11n and IEEE 802.11 a/ac of the product.**

The test result in this report refers exclusively to the presented test model / sample.

Without written approval of SPORTON International Inc., the test report shall not be reproduced except in full.

The measurements and test results shown in this test report were made in accordance with the procedures and found in compliance with the limit given in **ANSI C63.10-2009, 47 CFR FCC Part 15 Subpart E, KDB789033 D02 v01, KDB662911 D01 v02r01, KDB644545 D01 v01r02.**

The test equipment used to perform the test is calibrated and traceable to NML/ROC.



Testing Laboratory  
1190

## Table of Contents

<b>1. CERTIFICATE OF COMPLIANCE .....</b>	<b>1</b>
<b>2. SUMMARY OF THE TEST RESULT .....</b>	<b>2</b>
<b>3. GENERAL INFORMATION .....</b>	<b>3</b>
3.1. Product Details.....	3
3.2. Accessories.....	5
3.3. Table for Filed Antenna.....	6
3.4. Table for Carrier Frequencies .....	7
3.5. Table for Test Modes .....	8
3.6. Table for Testing Locations.....	9
3.7. Table for Supporting Units .....	9
3.8. Table for Parameters of Test Software Setting .....	10
3.9. EUT Operation during Test .....	10
3.10. Duty Cycle.....	11
3.11. Test Configurations .....	12
<b>4. TEST RESULT .....</b>	<b>14</b>
4.1. AC Power Line Conducted Emissions Measurement.....	14
4.2. 26dB Bandwidth and 99% Occupied Bandwidth Measurement.....	18
4.3. 6dB Spectrum Bandwidth and 99% Occupied Bandwidth Measurement.....	26
4.4. Maximum Conducted Output Power Measurement.....	31
4.5. Power Spectral Density Measurement .....	35
4.6. Radiated Emissions Measurement .....	49
4.7. Band Edge Emissions Measurement .....	74
4.8. Frequency Stability Measurement .....	83
4.9. Antenna Requirements .....	85
<b>5. LIST OF MEASURING EQUIPMENTS .....</b>	<b>86</b>
<b>6. MEASUREMENT UNCERTAINTY.....</b>	<b>88</b>
<b>APPENDIX A. TEST PHOTOS .....</b>	<b>A1 ~ A8</b>





## 1. CERTIFICATE OF COMPLIANCE

**Product Name** : 802.11ac WLAN Radio  
**Brand Name** : HP  
**Model No.** : MRLBB-1403  
**Product No.** : 5066-3786  
**Applicant** : Hewlett-Packard Company  
**Test Rule Part(s)** : 47 CFR FCC Part 15 Subpart E § 15.407

Sporton International as requested by the applicant to evaluate the EMC performance of the product sample received on May 28, 2014 would like to declare that the tested sample has been evaluated and found to be in compliance with the tested rule parts. The data recorded as well as the test configuration specified is true and accurate for showing the sample's EMC nature.

A handwritten signature in blue ink that reads 'Sam Chen'. The signature is written in a cursive style and is positioned above a horizontal line.

**Sam Chen**  
**SPORTON INTERNATIONAL INC.**

## 2. SUMMARY OF THE TEST RESULT

Applied Standard: 47 CFR FCC Part 15 Subpart E				
Part	Rule Section	Description of Test	Result	Under Limit
4.1	15.207	AC Power Line Conducted Emissions	Complies	13.27 dB
4.2	15.407(a)	26dB Spectrum Bandwidth and 99% Occupied Bandwidth	Complies	-
4.3	15.407(e)	6dB Spectrum Bandwidth and 99% Occupied Bandwidth	Complies	-
4.4	15.407(a)	Maximum Conducted Output Power	Complies	4.05 dB
4.5	15.407(a)	Power Spectral Density	Complies	0.06 dB
4.6	15.407(b)	Radiated Emissions	Complies	6.31 dB
4.7	15.407(b)	Band Edge Emissions	Complies	0.02 dB
4.8	15.407(g)	Frequency Stability	Complies	-
4.9	15.203	Antenna Requirements	Complies	-

### 3. GENERAL INFORMATION

#### 3.1. Product Details

##### IEEE 802.11n/ac

Items	Description
Product Type	WLAN (3TX, 3RX)
Radio Type	Intentional Transceiver
Power Type	From host system
Modulation	see the below table for IEEE 802.11n/ac
Data Modulation	For 802.11n: OFDM (BPSK / QPSK / 16QAM / 64QAM) For 802.11ac: OFDM (BPSK / QPSK / 16QAM / 64QAM / 256QAM)
Data Rate (Mbps)	see the below table for IEEE 802.11n/ac
Frequency Range	5150 ~ 5250 MHz / 5725 ~ 5850 MHz
Channel Number	9 for 20MHz bandwidth ; 4 for 40MHz bandwidth 2 for 80MHz bandwidth
Channel Band Width (99%)	Band 1: 802.11ac MCS0/Nss1 (VHT20): 22.72 MHz ; 802.11ac MCS0/Nss1 (VHT40): 40.00 MHz ; 802.11ac MCS0/Nss1 (VHT80): 76.16 MHz Band 4: 802.11ac MCS0/Nss1 (VHT20): 26.00 MHz ; 802.11ac MCS0/Nss1 (VHT40): 36.32 MHz ; 802.11ac MCS0/Nss1 (VHT80): 75.84 MHz
Maximum Conducted Output Power	Band 1: 802.11ac MCS0/Nss1 (VHT20): 25.45 dBm ; 802.11ac MCS0/Nss1 (VHT40): 24.48 dBm ; 802.11ac MCS0/Nss1 (VHT80): 19.70 dBm Band 4: 802.11ac MCS0/Nss1 (VHT20): 24.26 dBm ; 802.11ac MCS0/Nss1 (VHT40): 20.10 dBm ; 802.11ac MCS0/Nss1 (VHT80): 10.68 dBm
Carrier Frequencies	Please refer to section 3.4
Antenna	Please refer to section 3.3

**IEEE 802.11a**

Items	Description
Product Type	WLAN (3TX, 3RX)
Radio Type	Intentional Transceiver
Power Type	From host system
Modulation	OFDM for IEEE 802.11a
Data Modulation	OFDM (BPSK / QPSK / 16QAM / 64QAM)
Data Rate (Mbps)	OFDM (6/9/12/18/24/36/48/54)
Frequency Range	5150 ~ 5250 MHz / 5725 ~ 5850 MHz
Channel Number	9
Channel Band Width (99%)	Band 1: 22.72 MHz ; Band 4: 24.16 MHz
Maximum Conducted Output Power	Band 1: 25.39 dBm ; Band 4: 24.35 dBm
Carrier Frequencies	Please refer to section 3.4
Antenna	Please refer to section 3.3

Items	Description	
Communication Mode	<input checked="" type="checkbox"/> IP Based (Load Based)	<input type="checkbox"/> Frame Based
Beamforming Function	<input type="checkbox"/> With beamforming	<input checked="" type="checkbox"/> Without beamforming

**Antenna and Band width**

Antenna	Three (TX)		
	20 MHz	40 MHz	80 MHz
IEEE 802.11a	V	X	X
IEEE 802.11n	V	V	X
IEEE 802.11ac	V	V	V

**IEEE 11n/ac Spec.**

Protocol	Number of Transmit Chains (NTX)	Data Rate / MCS
802.11n (HT20)	3	MCS 0-23
802.11n (HT40)	3	MCS 0-23
802.11ac (VHT20)	3	MCS 0-9/Nss1-3
802.11ac (VHT40)	3	MCS 0-9/Nss1-3
802.11ac (VHT80)	3	MCS 0-9/Nss1-3

Note 1: IEEE Std. 802.11n modulation consists of HT20 and HT40 (HT: High Throughput).

Then EUT support HT20 and HT40.

Note 2: IEEE Std. 802.11ac modulation consists of VHT20, VHT40, VHT80 and VHT160 (VHT: Very High Throughput). Then EUT supports VHT20, VHT40 and VHT80.

Note 3: Modulation modes consist of below configuration:

HT20/HT40: IEEE 802.11n, VHT20/VHT40/VHT80: IEEE 802.11ac

### 3.2. Accessories

N/A



### 3.3. Table for Filed Antenna


Ant.	Brand	Part No.	Antenna Type	Connector	Gain (dBi)
1	M.gear	120300000095A	PCB Antenna	I-PEX	5.6
2	M.gear	120300000095A	PCB Antenna	I-PEX	5.5
3	M.gear	120300000095A	PCB Antenna	I-PEX	6.5

Note: The EUT has three Antennas.

For IEEE 802.11a/n/ac mode (3TX/3RX):

Ant. 1, Ant. 2 and Ant. 3 can be used as transmitting/receiving antennas.

Ant. 1, Ant. 2 and Ant. 3 could transmit/receive simultaneously.

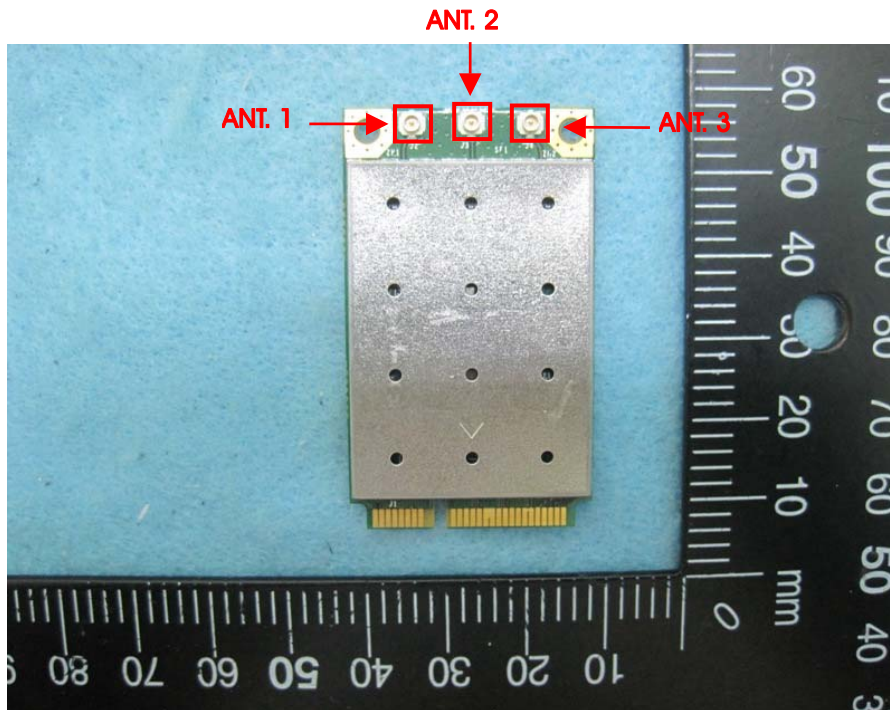

### 3.4. Table for Carrier Frequencies

There are three bandwidth systems.

For 20MHz bandwidth systems, use Channel 36, 40, 44, 48, 149, 153, 157, 161, 165.

For 40MHz bandwidth systems, use Channel 38, 46, 151, 159.

For 80MHz bandwidth systems, use Channel 42, 155.

Frequency Band	Channel No.	Frequency	Channel No.	Frequency
5150~5250 MHz Band 1	36	5180 MHz	44	5220 MHz
	38	5190 MHz	46	5230 MHz
	40	5200 MHz	48	5240 MHz
	42	5210 MHz	-	-
5725~5850 MHz Band 4	149	5745 MHz	157	5785 MHz
	151	5755 MHz	159	5795 MHz
	153	5765 MHz	161	5805 MHz
	155	5775 MHz	165	5825 MHz

### 3.5. Table for Test Modes

Preliminary tests were performed in different data rate to find the worst radiated emission. The data rate shown in the table below is the worst-case rate with respect to the specific test item. Investigation has been done on all the possible configurations for searching the worst cases. The following table is a list of the test modes shown in this test report.

Test Items	Mode		Data Rate	Channel	Antenna
AC Power Conducted Emission	CTX		-	-	-
Max. Conducted Output Power	11ac VHT20	Band 1&4	MCS0/Nss1	36/40/48/149/1 57/165	1+2+3
	11ac VHT40	Band 1&4	MCS0/Nss1	38/46/151/159	1+2+3
	11ac VHT80	Band 1&4	MCS0/Nss1	42/155	1+2+3
	11a/BPSK	Band 1&4	6Mbps	36/40/48/149/1 57/165	1+2+3
Power Spectral Density	11ac VHT20	Band 1&4	MCS0/Nss1	36/40/48/149/1 57/165	1+2+3
	11ac VHT40	Band 1&4	MCS0/Nss1	38/46/151/159	1+2+3
	11ac VHT80	Band 1&4	MCS0/Nss1	42/155	1+2+3
	11a/BPSK	Band 1&4	6Mbps	36/40/48/149/1 57/165	1+2+3
26dB&6dB Spectrum Bandwidth 99% Occupied Bandwidth Measurement	11ac VHT20	Band 1&4	MCS0/Nss1	36/40/48/149/1 57/165	1+2+3
	11ac VHT40	Band 1&4	MCS0/Nss1	38/46/151/159	1+2+3
	11ac VHT80	Band 1&4	MCS0/Nss1	42/155	1+2+3
	11a/BPSK	Band 1&4	6Mbps	36/40/48/149/1 57/165	1+2+3
Radiated Emission Below 1GHz	CTX		-	-	-
Radiated Emission Above 1GHz	11ac VHT20	Band 1&4	MCS0/Nss1	36/40/48/149/1 57/165	1+2+3
	11ac VHT40	Band 1&4	MCS0/Nss1	38/46/151/159	1+2+3
	11ac VHT80	Band 1&4	MCS0/Nss1	42/155	1+2+3
	11a/BPSK	Band 1&4	6Mbps	36/40/48/149/1 57/165	1+2+3
Band Edge Emission	11ac VHT20	Band 1&4	MCS0/Nss1	36/40/48/149/1 57/165	1+2+3
	11ac VHT40	Band 1&4	MCS0/Nss1	38/46/151/159	1+2+3
	11ac VHT80	Band 1&4	MCS0/Nss1	42/155	1+2+3

	11a/BPSK	Band 1&4	6Mbps	36/40/48/149/1 57/165	1+2+3
Frequency Stability	Un-modulation		-	40	1+2+3

Note: VHT20/VHT40 covers HT20/HT40, due to same modulation.

### 3.6. Table for Testing Locations

Test Site Location					
Address:	No.8, Lane 724, Bo-ai St., Jhubei City, Hsinchu County 302, Taiwan, R.O.C.				
TEL:	886-3-656-9065				
FAX:	886-3-656-9085				
Test Site No.	Site Category	Location	FCC Reg. No.	IC File No.	VCCI Reg. No
03CH01-CB	SAC	Hsin Chu	262045	IC 4086D	-
CO01-CB	Conduction	Hsin Chu	262045	IC 4086D	-
TH01-CB	OVEN Room	Hsin Chu	-	-	-

Open Area Test Site (OATS); Semi Anechoic Chamber (SAC).

### 3.7. Table for Supporting Units

For Test Site No: 03CH01-CB

Support Unit	Brand	Model	FCC ID
NB	DELL	M1330	DoC
Test Fixture	ACCTON	AC46074246	N/A

For Test Site No: CO01-CB

Support Unit	Brand	Model	FCC ID
NB	DELL	E6430	DoC
Test Fixture	ACCTON	AC46074246	N/A

For Test Site No: TH01-CB

Support Unit	Brand	Model	FCC ID
NB	DELL	E6430	DoC
Test Fixture	ACCTON	AC46074246	N/A

### 3.8. Table for Parameters of Test Software Setting

During testing, Channel and Power Controlling Software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product.

#### Power Parameters of IEEE 802.11ac MCS0/Nss1 VHT20

Test Software Version	DOS					
Frequency	5180 MHz	5200 MHz	5240 MHz	5745 MHz	5785 MHz	5825 MHz
MCS0/Nss1 VHT20	17.5	22.5	21.5	12.5	21	14.5

#### Power Parameters of IEEE 802.11ac MCS0/Nss1 VHT40

Test Software Version	DOS			
Frequency	5190 MHz	5230 MHz	5755 MHz	5795 MHz
MCS0/Nss1 VHT40	15	21.5	14	16

#### Power Parameters of IEEE 802.11ac MCS0/Nss1 VHT80

Test Software Version	DOS	
Frequency	5210 MHz	5775 MHz
MCS0/Nss1 VHT80	16.5	7.5

#### Power Parameters of IEEE 802.11a

Test Software Version	DOS					
Frequency	5180 MHz	5200 MHz	5240 MHz	5745 MHz	5785 MHz	5825 MHz
802.11a	19	22.5	21.5	11.5	21	15.5

### 3.9. EUT Operation during Test


The EUT was programmed to be in continuously transmitting mode.

### 3.10. Duty Cycle

Mode	On Time(ms)	On+Off Time(ms)	Duty Cycle(%)	1/T Minimum VBW (kHz)
802.11ac MCS0/Nss1 VHT20	2.020	2.060	98.06%	0.09
802.11ac MCS0/Nss1 VHT40	1.880	1.940	96.91%	0.14
802.11ac MCS0/Nss1 VHT80	0.924	0.984	93.90%	0.27
802.11a	0.456	0.504	90.48%	0.43


### 3.11. Test Configurations

#### 3.11.1. AC Power Line Conduction Emissions Test Configuration

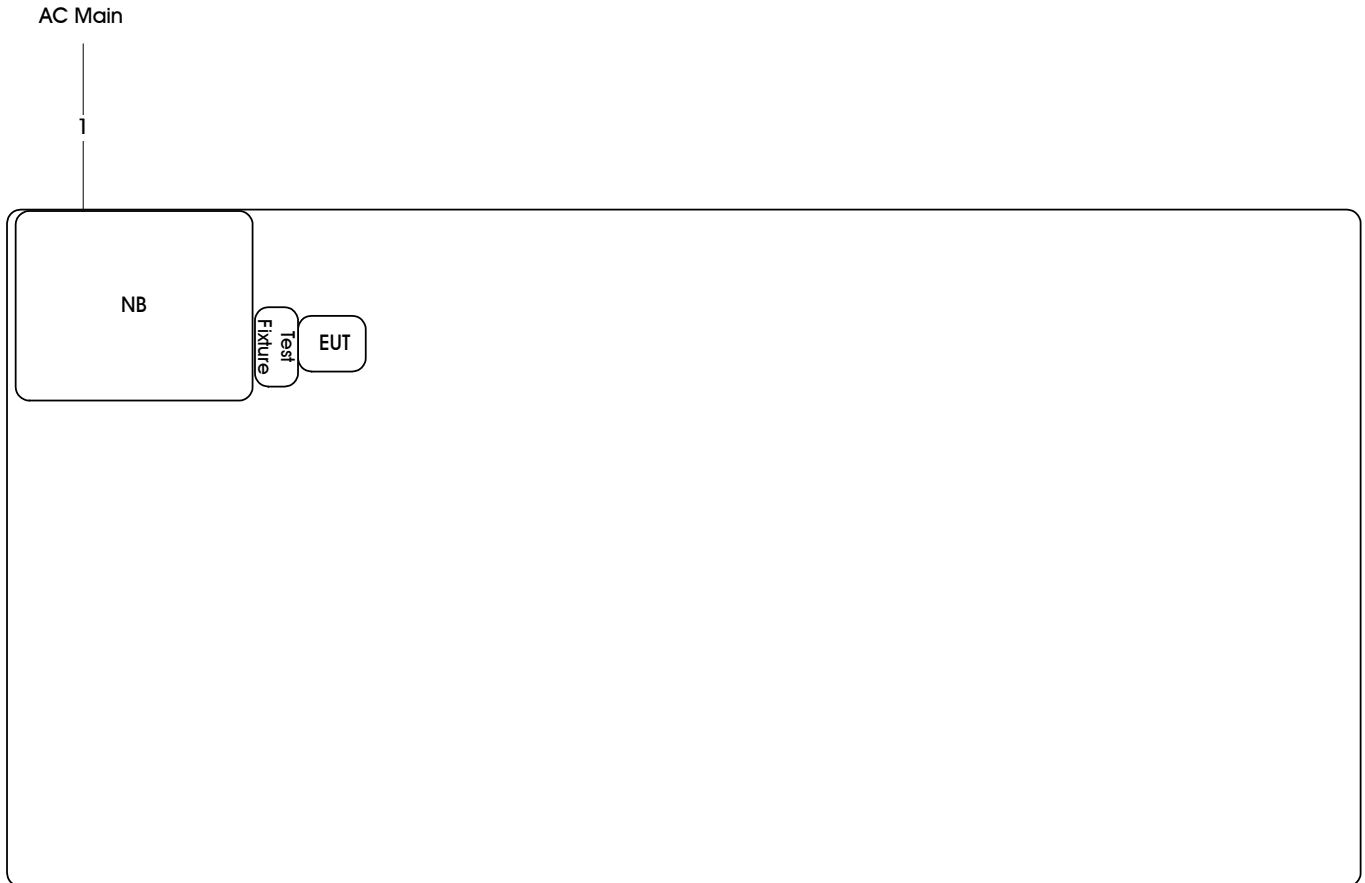

Item	Connection	Shield	Length
1	Power cable	No	1.8m

### 3.11.2. Radiation Emissions Test Configuration

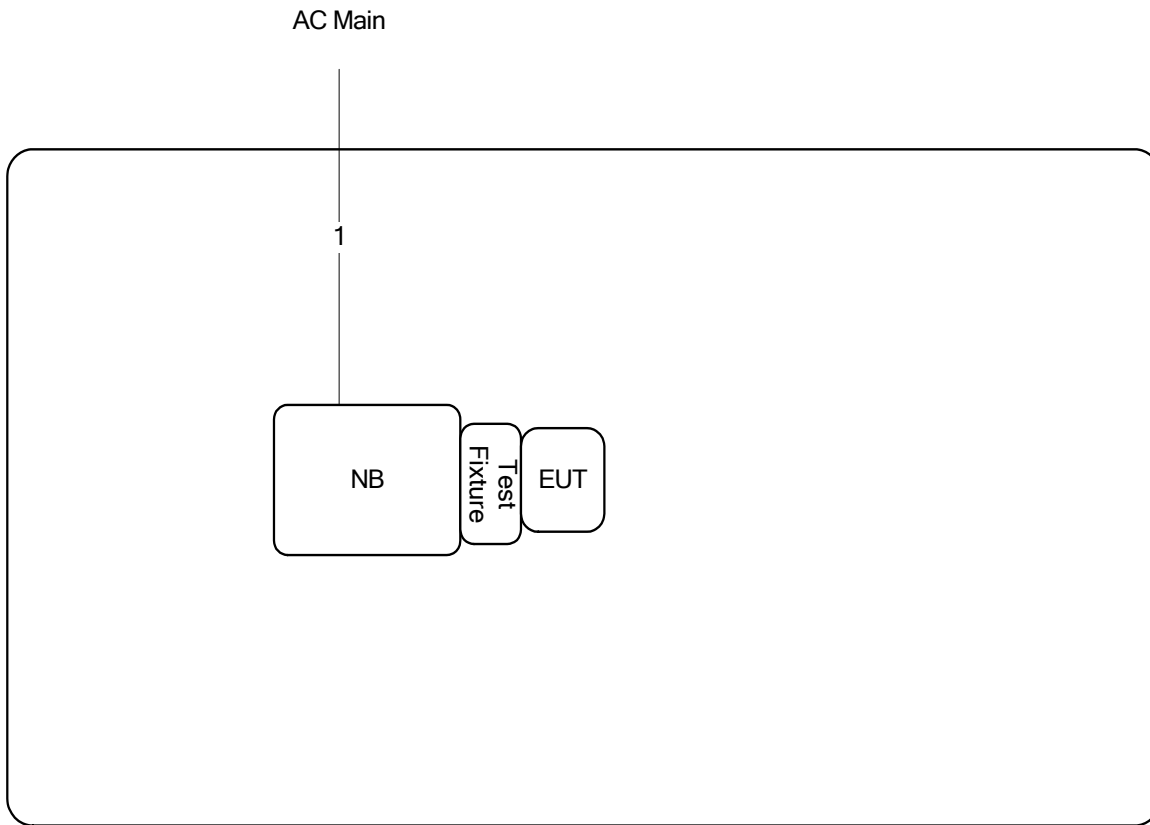

Item	Connection	Shielded	Length(m)
1	Power cable	No	2.6m



## 4. TEST RESULT

### 4.1. AC Power Line Conducted Emissions Measurement

#### 4.1.1. Limit

For this product that is designed to connect to the AC power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed below limits table.

Frequency (MHz)	QP Limit (dBuV)	AV Limit (dBuV)
0.15~0.5	66~56	56~46
0.5~5	56	46
5~30	60	50

#### 4.1.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the receiver.

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz

#### 4.1.3. Test Procedures

1. Configure the EUT according to ANSI C63.10. The EUT or host of EUT has to be placed 0.4 meter far from the conducting wall of the shielding room and at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT or host of EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connected to the other LISNs. The LISN should provide 50uH/50ohms coupling impedance.
4. The frequency range from 150 kHz to 30 MHz was searched.
5. Set the test-receiver system to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
6. The measurement has to be done between each power line and ground at the power terminal.

#### 4.1.4. Test Setup Layout

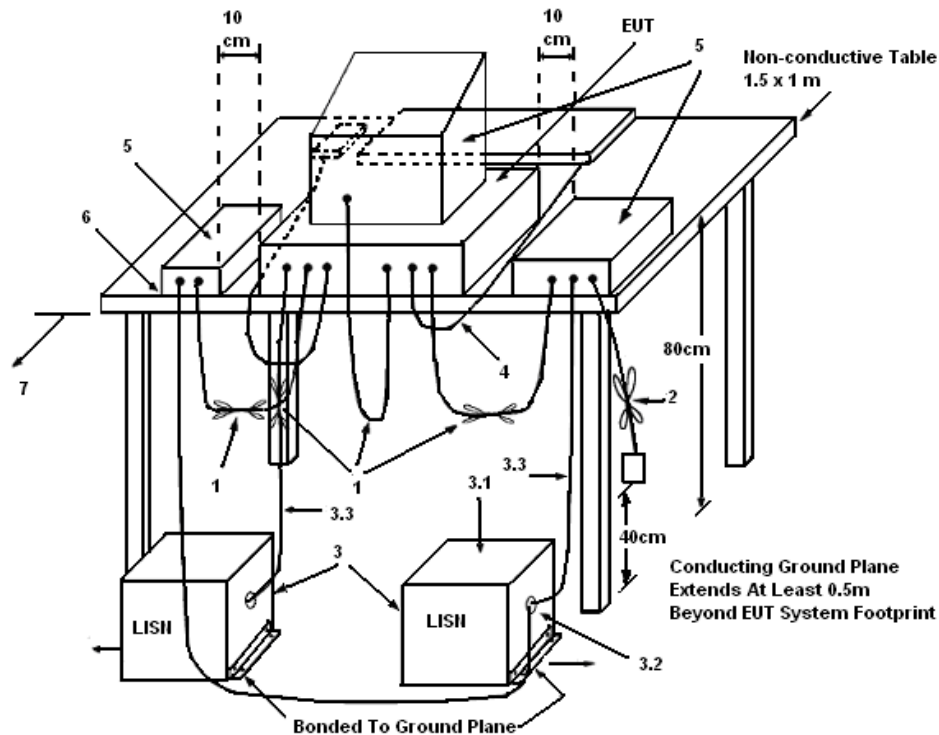

#### LEGEND:

- (1) Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- (2) I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- (3) EUT connected to one LISN. Unused LISN measuring port connectors shall be terminated in 50  $\Omega$ . LISN can be placed on top of, or immediately beneath, reference ground plane.
  - (3.1) All other equipment powered from additional LISN(s).
  - (3.2) Multiple outlet strip can be used for multiple power cords of non-EUT equipment.
  - (3.3) LISN at least 80 cm from nearest part of EUT chassis.
- (4) Cables of hand-operated devices, such as keyboards, mice, etc., shall be placed as for normal use.
- (5) Non-EUT components of EUT system being tested.
- (6) Rear of EUT, including peripherals, shall all be aligned and flush with rear of tabletop.
- (7) Rear of tabletop shall be 40 cm removed from a vertical conducting plane that is bonded to the ground plane.

#### 4.1.5. Test Deviation


There is no deviation with the original standard.

#### 4.1.6. EUT Operation during Test

The EUT was placed on the test table and programmed in normal function.


## 4.1.7. Results of AC Power Line Conducted Emissions Measurement

Temperature	25°C	Humidity	52%
Test Engineer	Parody Lin	Phase	Line
Configuration	CTX		

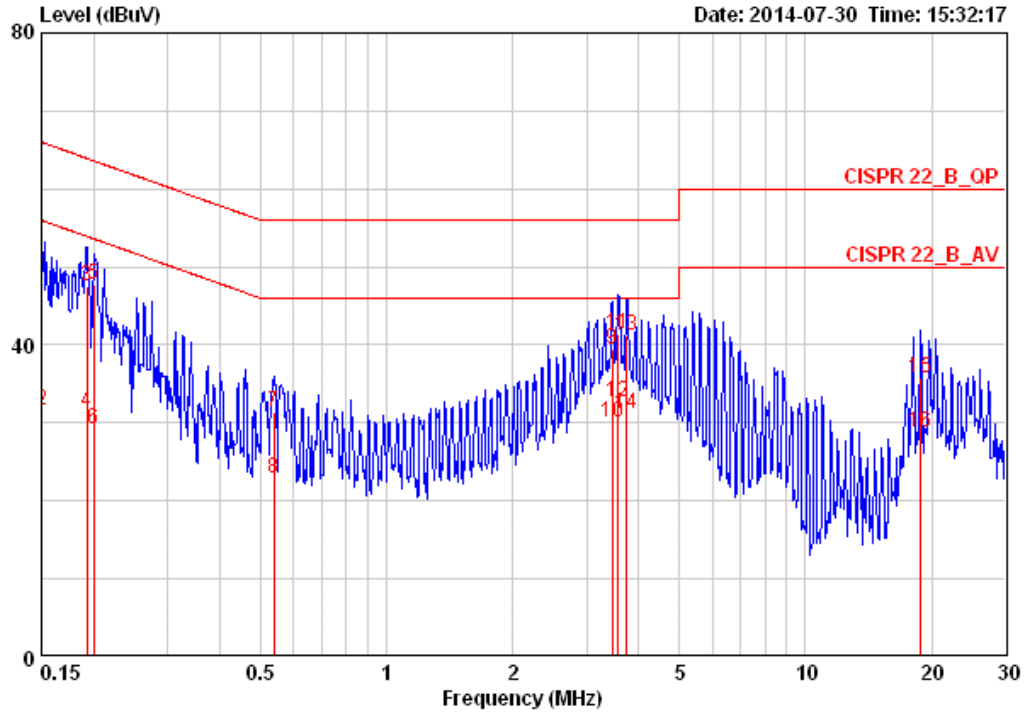

	Freq	Level	Over Limit	Limit	LISN Factor	Read Level	Cable Loss	Pol/Phase	Remark
	MHz	dBuV	dB	dBuV	dB	dBuV	dB		
1	0.15000	47.24	-18.76	66.00	0.10	46.98	0.16	LINE	QP
2	0.15000	31.50	-24.50	56.00	0.10	31.24	0.16	LINE	AVERAGE
3	0.19242	47.43	-16.50	63.93	0.10	47.17	0.16	LINE	QP
4	0.19242	31.29	-22.64	53.93	0.10	31.03	0.16	LINE	AVERAGE
5	0.19969	47.64	-15.98	63.62	0.10	47.38	0.16	LINE	QP
6	0.19969	29.20	-24.42	53.62	0.10	28.94	0.16	LINE	AVERAGE
7	0.53782	31.34	-24.66	56.00	0.11	31.04	0.19	LINE	QP
8	0.53782	23.00	-23.00	46.00	0.11	22.70	0.19	LINE	AVERAGE
9	3.454	39.48	-16.52	56.00	0.20	38.99	0.29	LINE	QP
10	3.454	30.10	-15.90	46.00	0.20	29.61	0.29	LINE	AVERAGE
11	3.565	41.34	-14.66	56.00	0.20	40.85	0.29	LINE	QP
12	3.565	32.73	-13.27	46.00	0.20	32.24	0.29	LINE	AVERAGE
13	3.720	41.11	-14.89	56.00	0.20	40.61	0.29	LINE	QP
14	3.720	31.15	-14.85	46.00	0.20	30.65	0.29	LINE	AVERAGE
15	18.721	35.70	-24.30	60.00	0.47	34.74	0.50	LINE	QP
16	18.721	28.76	-21.24	50.00	0.47	27.80	0.50	LINE	AVERAGE

Temperature	25°C	Humidity	52%
Test Engineer	Parody Lin	Phase	Neutral
Configuration	CTX		

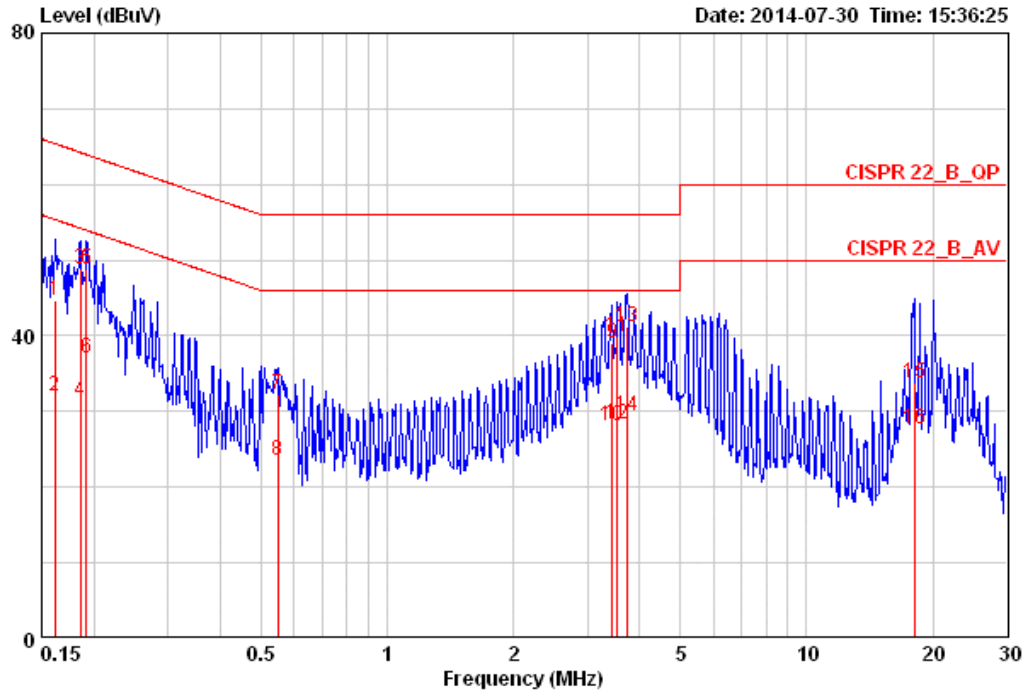

	Freq	Level	Over Limit	Limit	LISN	Read	Cable	Pol/Phase	Remark
	MHz	dBuV	dB	dBuV	dB	dBuV	dB		
1	0.16155	44.70	-20.68	65.38	0.09	44.45	0.16	NEUTRAL	QP
2	0.16155	32.12	-23.26	55.38	0.09	31.87	0.16	NEUTRAL	AVERAGE
3	0.18541	48.75	-15.49	64.24	0.09	48.50	0.16	NEUTRAL	QP
4	0.18541	31.38	-22.86	54.24	0.09	31.13	0.16	NEUTRAL	AVERAGE
5	0.19140	48.74	-15.23	63.98	0.09	48.49	0.16	NEUTRAL	QP
6	0.19140	36.99	-16.98	53.98	0.09	36.74	0.16	NEUTRAL	AVERAGE
7	0.54934	32.24	-23.76	56.00	0.10	31.95	0.19	NEUTRAL	QP
8	0.54934	23.57	-22.43	46.00	0.10	23.28	0.19	NEUTRAL	AVERAGE
9	3.436	39.11	-16.89	56.00	0.18	38.64	0.29	NEUTRAL	QP
10	3.436	28.14	-17.86	46.00	0.18	27.67	0.29	NEUTRAL	AVERAGE
11	3.547	39.91	-16.09	56.00	0.18	39.44	0.29	NEUTRAL	QP
12	3.547	28.33	-17.67	46.00	0.18	27.86	0.29	NEUTRAL	AVERAGE
13	3.720	41.29	-14.71	56.00	0.18	40.81	0.29	NEUTRAL	QP
14	3.720	29.49	-16.51	46.00	0.18	29.01	0.29	NEUTRAL	AVERAGE
15	18.039	33.76	-26.24	60.00	0.42	32.85	0.49	NEUTRAL	QP
16	18.039	27.58	-22.42	50.00	0.42	26.67	0.49	NEUTRAL	AVERAGE

Note:

Level = Read Level + LISN Factor + Cable Loss.

## 4.2. 26dB Bandwidth and 99% Occupied Bandwidth Measurement

### 4.2.1. Limit

No restriction limits.

### 4.2.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

26dB Bandwidth	
Spectrum Parameters	Setting
Attenuation	Auto
Span Frequency	> 26dB Bandwidth
RBW	Approximately 1% of the emission bandwidth
VBW	VBW > RBW
Detector	Peak
Trace	Max Hold
Sweep Time	Auto
99% Occupied Bandwidth	
Spectrum Parameters	Setting
Span	1.5 times to 5.0 times the OBW
RBW	1 % to 5 % of the OBW
VBW	$\geq 3 \times \text{RBW}$
Detector	Peak
Trace	Max Hold

### 4.2.3. Test Procedures

For Radiated 26dB Bandwidth and 99% Occupied Bandwidth Measurement:

1. The transmitter was radiated to the spectrum analyzer in peak hold mode.
2. Measure the maximum width of the emission that is 26 dB down from the peak of the emission. Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%.

### 4.2.4. Test Setup Layout

For Radiated 26dB Bandwidth and 99% Occupied Bandwidth Measurement:

This test setup layout is the same as that shown in section 4.6.4.

### 4.2.5. Test Deviation

There is no deviation with the original standard.

### 4.2.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

#### 4.2.7. Test Result of 26dB Bandwidth and 99% Occupied Bandwidth

Temperature	21°C	Humidity	62%
Test Engineer	Benson Peng	Configurations	IEEE 802.11ac

##### Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Ant. 1 + Ant. 2 + Ant. 3

Channel	Frequency	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
36	5180 MHz	23.52	18.08
40	5200 MHz	35.04	22.72
48	5240 MHz	33.76	20.16

##### Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Ant. 1 + Ant. 2 + Ant. 3

Channel	Frequency	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
38	5190 MHz	43.20	36.48
46	5230 MHz	74.88	40.00

##### Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / Ant. 1 + Ant. 2 + Ant. 3


Channel	Frequency	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
42	5210 MHz	92.16	76.16

<b>Temperature</b>	21°C	<b>Humidity</b>	62%
<b>Test Engineer</b>	Benson Peng	<b>Configurations</b>	IEEE 802.11a

**Configuration IEEE 802.11a / Ant. 1 + Ant. 2 + Ant. 3**


<b>Channel</b>	<b>Frequency</b>	<b>26dB Bandwidth (MHz)</b>	<b>99% Occupied Bandwidth (MHz)</b>
36	5180 MHz	24.00	17.12
40	5200 MHz	36.48	22.72
48	5240 MHz	34.40	20.64

**26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Ant. 1 + Ant. 2 + Ant. 3 / 5180 MHz**

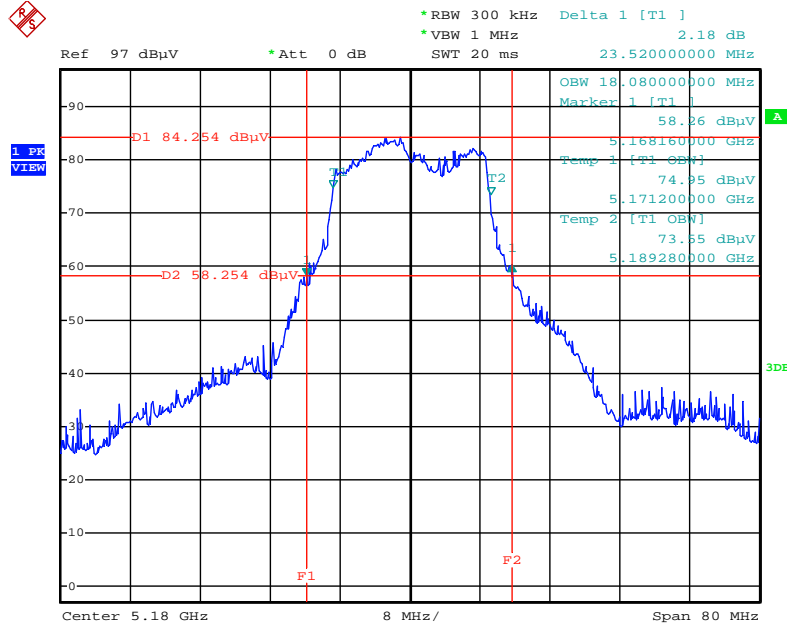

Date: 29.JUL.2014 21:26:08


**26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Ant. 1 + Ant. 2 + Ant. 3 / 5200 MHz**

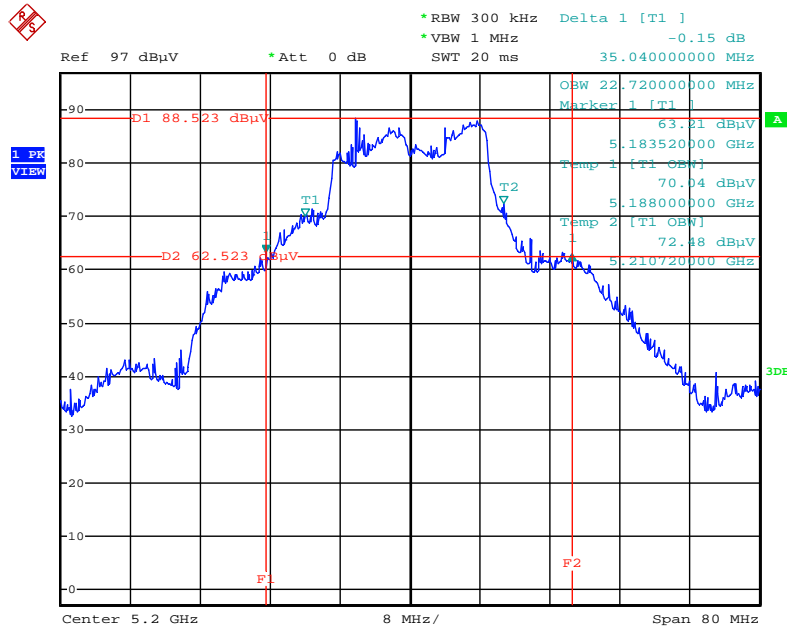

Date: 29.JUL.2014 21:25:40




**26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Ant. 1 + Ant. 2 + Ant. 3 / 5240 MHz**

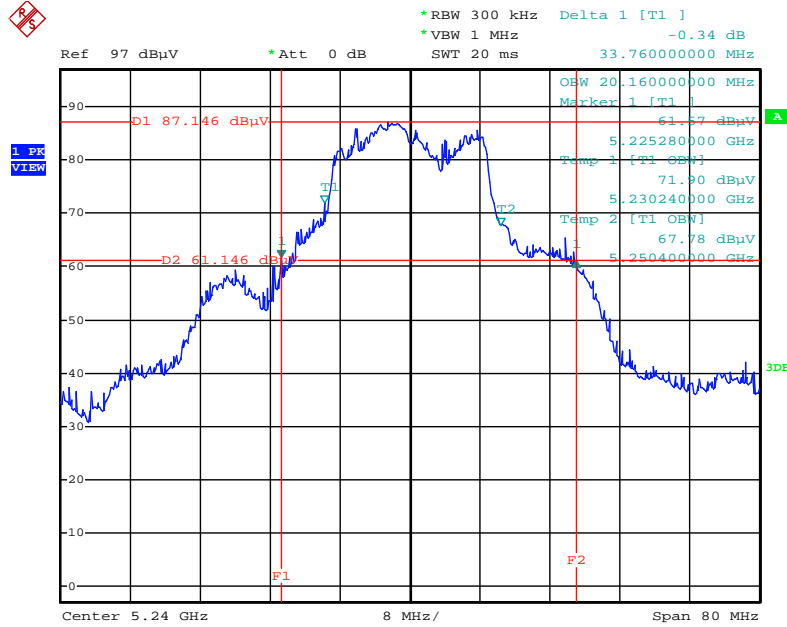


Date: 29.JUL.2014 21:25:06

**26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Ant. 1 + Ant. 2 + Ant. 3 / 5190 MHz**

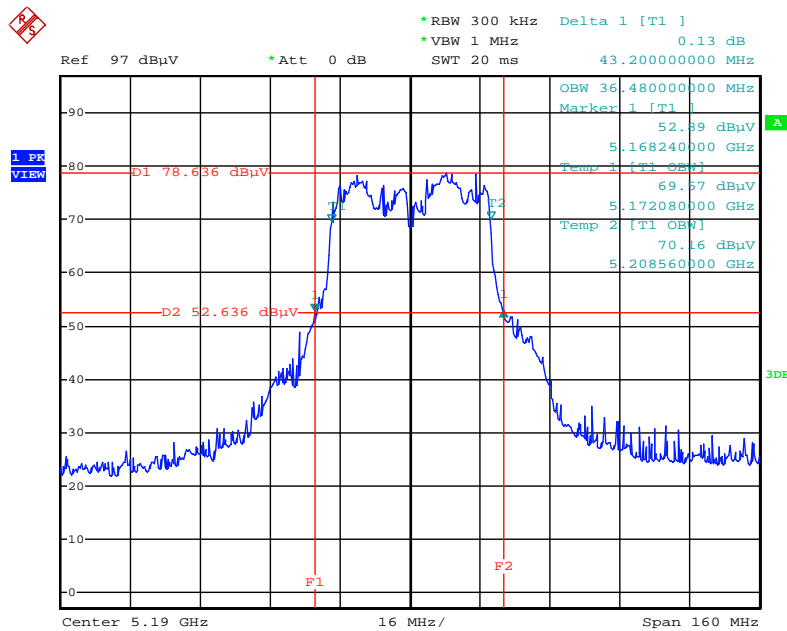


Date: 29.JUL.2014 21:27:11

**26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Ant. 1 + Ant. 2 + Ant. 3 / 5230 MHz**

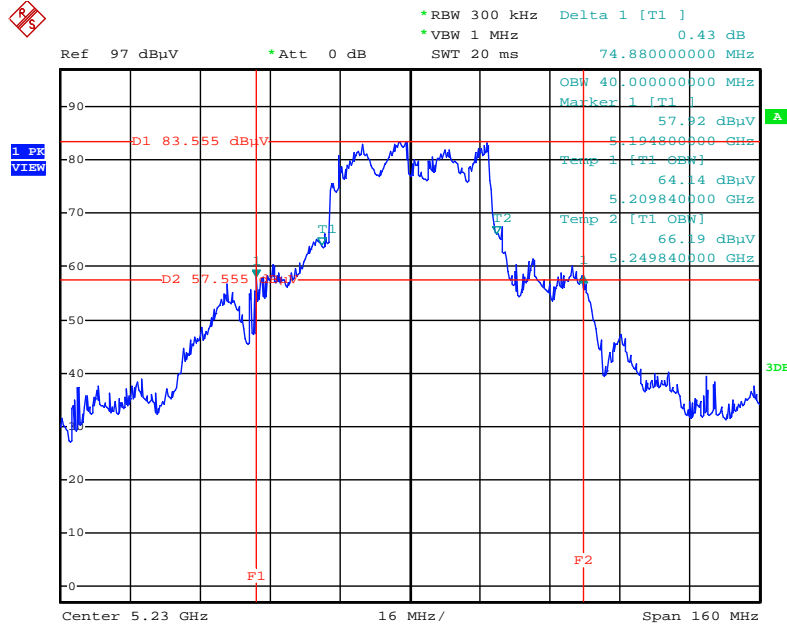


Date: 29.JUL.2014 21:27:59

**26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / Ant. 1 + Ant. 2 + Ant. 3 / 5210 MHz**

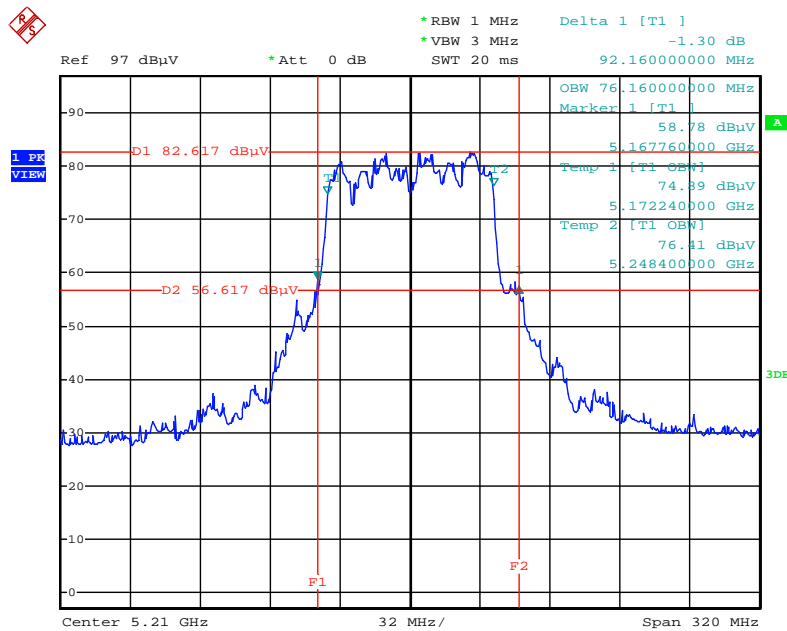


Date: 29.JUL.2014 21:28:35

**26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11a / Ant. 1 + Ant. 2 + Ant. 3 / 5180 MHz**

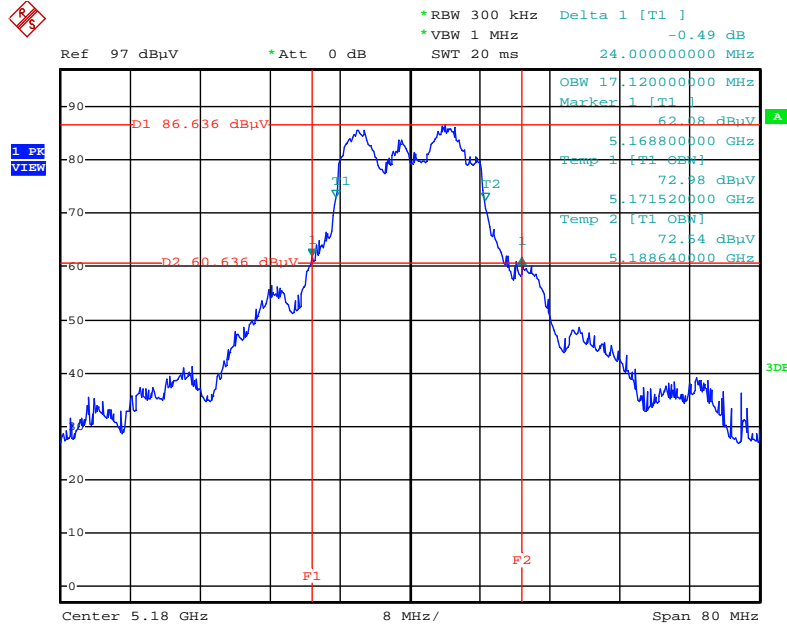


Date: 29.JUL.2014 21:23:00

**26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11a / Ant. 1 + Ant. 2 + Ant. 3 / 5200 MHz**

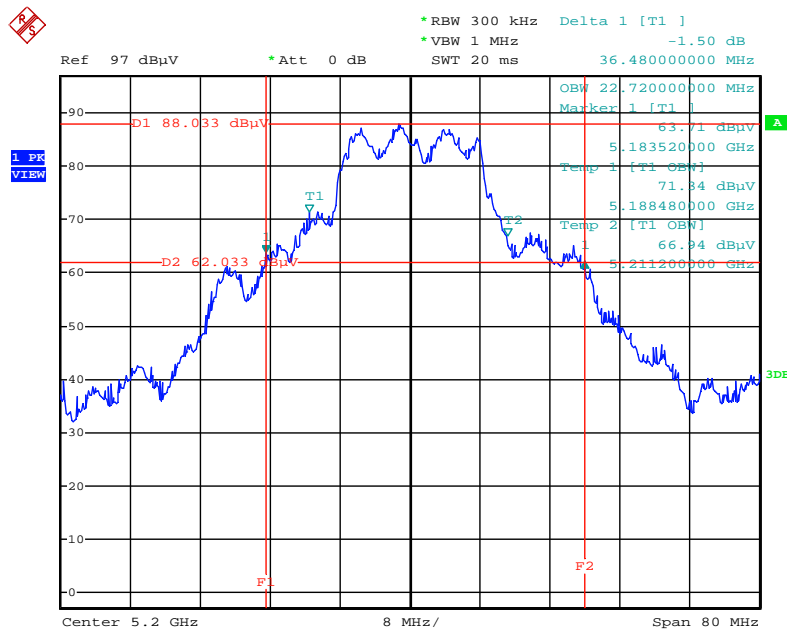

Date: 29.JUL.2014 21:23:42

**26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11a / Ant. 1 + Ant. 2 + Ant. 3 / 5240 MHz**

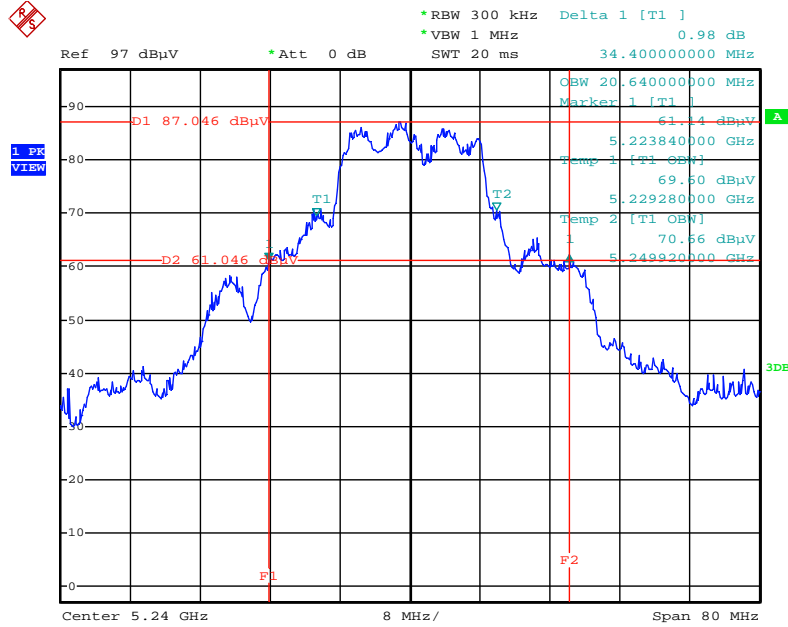

Date: 29.JUL.2014 21:24:16

### 4.3. 6dB Spectrum Bandwidth and 99% Occupied Bandwidth Measurement

#### 4.3.1. Limit

For digital modulation systems, the minimum 6dB bandwidth shall be at least 500 kHz.

#### 4.3.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of spectrum analyzer.

Spectrum Parameters	Setting
Attenuation	Auto
Span Frequency	> 6dB Bandwidth
RBW	approximately 1% of the emission bandwidth
VBW	VBW > RBW
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

#### 4.3.3. Test Procedures

For Radiated 6dB Bandwidth Measurement:

1. The transmitter was radiated to the spectrum analyzer in peak hold mode.
2. Test was performed in accordance with KDB789033 D02 v01 for Compliance Testing of Unlicensed National Information Infrastructure (U-NII) Devices - section (C) Emission Bandwidth.
3. Multiple antenna system was performed in accordance with KDB662911 D01 v02r01 Emissions Testing of Transmitters with Multiple Outputs in the Same Band.
4. Measured the spectrum width with power higher than 6dB below carrier.

#### 4.3.4. Test Setup Layout

For Radiated 6dB Bandwidth Measurement:

This test setup layout is the same as that shown in section 4.6.4.

#### 4.3.5. Test Deviation

There is no deviation with the original standard.

#### 4.3.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

#### 4.3.7. Test Result of 6dB Spectrum Bandwidth and 99% Occupied Bandwidth

Temperature	21°C	Humidity	62%
Test Engineer	Benson Peng	Configurations	IEEE 802.11n/ac

##### Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Ant. 1 + Ant. 2 + Ant. 3

Channel	Frequency	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Min. Limit (kHz)	Test Result
149	5745 MHz	16.40	17.60	500	Complies
157	5785 MHz	16.72	26.00	500	Complies
165	5825 MHz	16.32	17.68	500	Complies

##### Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Ant. 1 + Ant. 2 + Ant. 3

Channel	Frequency	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Min. Limit (kHz)	Test Result
151	5755 MHz	35.20	36.32	500	Complies
159	5795 MHz	35.04	36.32	500	Complies

##### Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / Ant. 1 + Ant. 2 + Ant. 3

Channel	Frequency	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Min. Limit (kHz)	Test Result
155	5775 MHz	71.36	75.84	500	Complies

<b>Temperature</b>	21°C	<b>Humidity</b>	62%
<b>Test Engineer</b>	Benson Peng	<b>Configurations</b>	IEEE 802.11a


**Configuration IEEE 802.11a / Ant. 1 + Ant. 2 + Ant. 3**

Channel	Frequency	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Min. Limit (kHz)	Test Result
149	5745 MHz	16.08	16.64	500	<b>Complies</b>
157	5785 MHz	16.24	24.16	500	<b>Complies</b>
165	5825 MHz	16.00	16.64	500	<b>Complies</b>

Note: All the test values were listed in the report.


For plots, only the channel with worse result was shown.

**6 dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Ant. 1 + Ant. 2 + Ant. 3 / 5825 MHz**

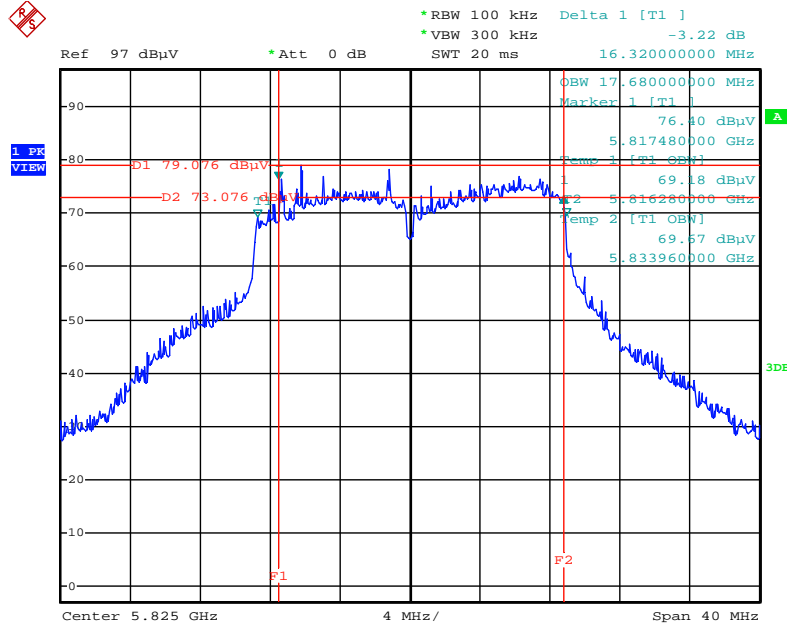

Date: 29.JUL.2014 21:14:43


**6 dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Ant. 1 + Ant. 2 + Ant. 3 / 5795MHz**

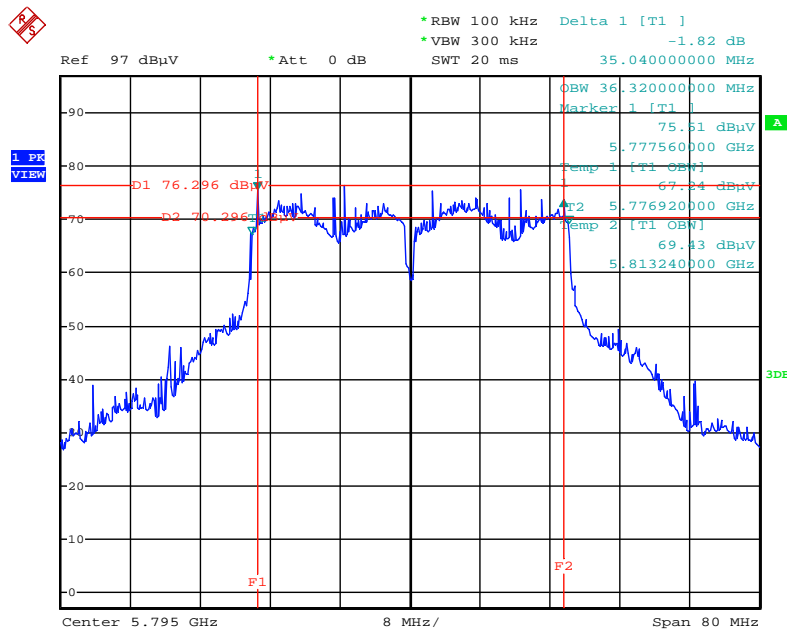

Date: 29.JUL.2014 21:19:59




**6 dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / Ant. 1 + Ant. 2 + Ant. 3 / 5775 MHz**

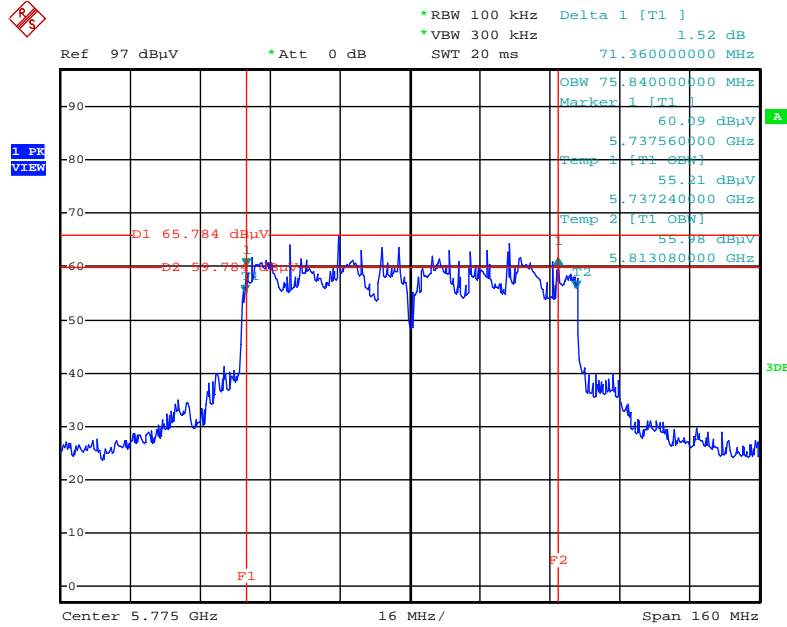

Date: 29.JUL.2014 21:20:45

**6 dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11a / Ant. 1 + Ant. 2 + Ant. 3 / 5825 MHz**

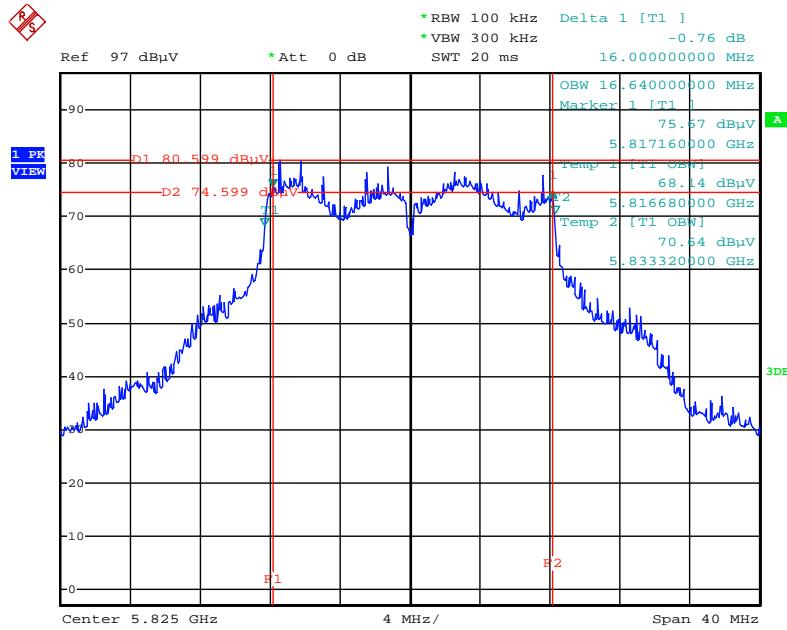

Date: 29.JUL.2014 21:13:51

## 4.4. Maximum Conducted Output Power Measurement

### 4.4.1. Limit

For the band 5.15~5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W (30dBm) provided the maximum antenna gain does not exceed 6 dBi. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

For the band 5.725~5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W (30dBm). If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. However, fixed point-to-point U-NII devices operating in this band may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted power. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

### 4.4.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the power meter.

Power Meter Parameter	Setting
Detector	AVERAGE

### 4.4.3. Test Procedures

1. The transmitter output (antenna port) was connected to the power meter.
2. Test was performed in accordance with KDB789033 D02 v01 for Compliance Testing of Unlicensed National Information Infrastructure (U-NII) Devices - section (E) Maximum conducted output power =>3. Measurement using a Power Meter (PM) =>b) Method PM-G (Measurement using a gated RF average power meter).
3. Multiple antenna systems was performed in accordance with KDB662911 D01 v02r01 Emissions Testing of Transmitters with Multiple Outputs in the Same Band.
4. When measuring maximum conducted output power with multiple antenna systems, add every result of the values by mathematic formula.

#### 4.4.4. Test Setup Layout

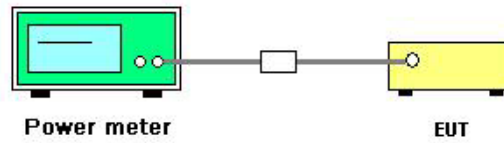

#### 4.4.5. Test Deviation

There is no deviation with the original standard.

#### 4.4.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

#### 4.4.7. Test Result of Maximum Conducted Output Power

Temperature	21°C	Humidity	62%
Test Engineer	Benson Peng	Configurations	IEEE 802.11ac
Test Date	Jul. 29, 2014		

##### Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Ant. 1 + Ant. 2 + Ant. 3

Channel	Frequency	Conducted Power (dBm)				Max. Limit (dBm)	Result
		Ant. 1	Ant. 2	Ant. 3	Total		
36	5180 MHz	17.26	17.72	16.42	21.94	29.50	Complies
40	5200 MHz	20.53	20.92	20.59	25.45	29.50	Complies
48	5240 MHz	20.02	20.11	19.74	24.73	29.50	Complies
149	5745 MHz	12.22	12.85	11.51	17.00	29.50	Complies
157	5785 MHz	19.61	19.81	19.02	24.26	29.50	Complies
165	5825 MHz	14.62	15.15	13.22	19.17	29.50	Complies

Note : Max Ant Gain=6.5dBi > 6dBi , so power limit=30-(6.5-6)=29.5dBm

##### Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Ant. 1 + Ant. 2 + Ant. 3

Channel	Frequency	Conducted Power (dBm)				Max. Limit (dBm)	Result
		Ant. 1	Ant. 2	Ant. 3	Total		
38	5190 MHz	13.91	14.38	13.62	18.75	29.50	Complies
46	5230 MHz	19.82	19.77	19.52	24.48	29.50	Complies
151	5755 MHz	13.33	13.85	12.59	18.06	29.50	Complies
159	5795 MHz	15.41	15.82	14.68	20.10	29.50	Complies

Note : Max Ant Gain=6.5dBi > 6dBi , so power limit=30-(6.5-6)=29.5dBm

##### Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / Ant. 1 + Ant. 2 + Ant. 3

Channel	Frequency	Conducted Power (dBm)				Max. Limit (dBm)	Result
		Ant. 1	Ant. 2	Ant. 3	Total		
42	5210 MHz	14.84	15.29	14.62	19.70	29.50	Complies
155	5775 MHz	5.89	6.22	5.59	10.68	29.50	Complies

Note : Max Ant Gain=6.5dBi > 6dBi , so power limit=30-(6.5-6)=29.5dBm

<b>Temperature</b>	21°C	<b>Humidity</b>	62%
<b>Test Engineer</b>	Benson Peng	<b>Configurations</b>	IEEE 802.11a
<b>Test Date</b>	Jul. 29, 2014		

**Configuration IEEE 802.11a / Ant. 1 + Ant. 2 + Ant. 3**

Channel	Frequency	Conducted Power (dBm)				Max. Limit (dBm)	Result
		Ant. 1	Ant. 2	Ant. 3	Total		
36	5180 MHz	18.43	18.65	17.92	23.12	29.50	Complies
40	5200 MHz	20.62	20.71	20.51	25.39	29.50	Complies
48	5240 MHz	20.04	20.13	19.88	24.79	29.50	Complies
149	5745 MHz	11.26	11.65	10.67	15.98	29.50	Complies
157	5785 MHz	19.68	19.91	19.12	24.35	29.50	Complies
165	5825 MHz	15.81	16.31	14.37	20.34	29.50	Complies

Note : Max Ant Gain=6.5dBi > 6dBi , so power limit=30-(6.5-6)=29.5dBm

## 4.5. Power Spectral Density Measurement

### 4.5.1. Limit

The power spectral density is defined as the highest level of power in dBm per MHz generated by the transmitter within the power envelope. The following table is power spectral density limits and decrease power density limit rule refer to section 4.4.1.

Frequency Range	Power Spectral Density limit
5.15~5.25 GHz	17 dBm/MHz
5.725~5.85 GHz	30 dBm/500kHz

### 4.5.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

For 5.15~5.25 GHz

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	Encompass the entire emissions bandwidth (EBW) of the signal
RBW	1000 kHz
VBW	3000 kHz
Detector	RMS
Trace	AVERAGE
Sweep Time	Auto
Trace Average	100 times

For 5.725~5.85 GHz

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	Set the span to 1.5 times the DTS channel bandwidth.
RBW	$RBW \geq 1/T$
VBW	$VBW \geq 3 RBW$
Detector	Peak
Trace	Max Hold
Sweep Time	Auto couple
Note: If measurement bandwidth of Maximum PSD is specified in 500 kHz, add $10\log(500\text{kHz}/RBW)$ to the measured result, whereas $RBW (< 500 \text{ kHz})$ is the reduced resolution bandwidth of the spectrum analyzer set during measurement.	

### 4.5.3. Test Procedures

For 5.15~5.25 GHz


1. The transmitter output (antenna port) was connected RF switch to the spectrum analyzer.
2. Test was performed in accordance with KDB789033 D02 v01 for Compliance Testing of Unlicensed National Information Infrastructure (U-NII) Devices - section (F) Maximum Power Spectral Density (PSD).
3. Multiple antenna systems was performed in accordance KDB662911 D01 v02r01 in-Band Power Spectral Density (PSD) Measurements (a) Measure and sum the spectra across the outputs.
4. When measuring first spectral bin of output 1 is summed with that in the first spectral bin of output 2 and that from the first spectral bin of output 3 and so on up to the Nth output to obtain the value for the first frequency bin of the summed spectrum. The summed spectrum value for each of the other frequency bins is computed in the same way.

For 5.725~5.85 GHz


1. Test procedures refer KDB662911 D01 v02r01 section In-Band Power Spectral Density (PSD) Measurements option (b) Measure and sum spectral maximal across the outputs.
2. Use this procedure when the maximum conducted output power in the fundamental emission is used to demonstrate compliance. The EUT must be configured to transmit continuously at full power over the measurement duration.
3. Ensure that the number of measurement points in the sweep  $\geq 2 \times \text{span/RBW}$  (use of a greater number of measurement points than this minimum requirement is recommended).
4. Use the peak marker function to determine the maximum level in any 3 kHz band segment within the fundamental EBW.
5. The measured result of PSD level must add  $10\log(500\text{kHz/RBW})$  and the final result should  $\leq 30$  dBm.

#### 4.5.4. Test Setup Layout

For 5.15~5.25 GHz

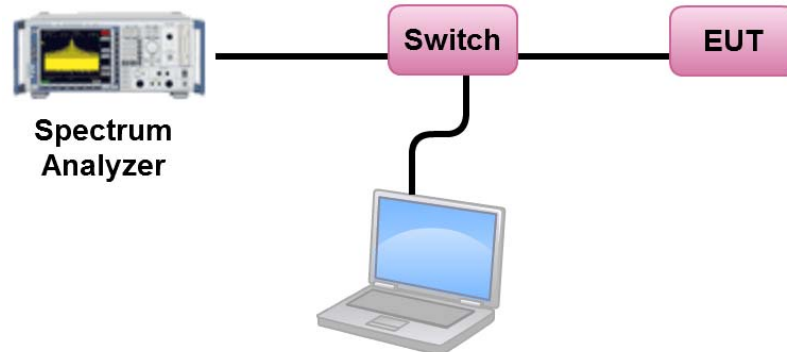

For 5.725~5.85 GHz

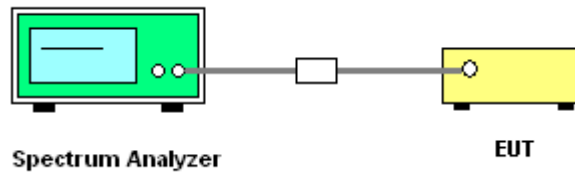

#### 4.5.5. Test Deviation

There is no deviation with the original standard.

#### 4.5.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.



#### 4.5.7. Test Result of Power Spectral Density

Temperature	21°C	Humidity	62%
Test Engineer	Benson Peng	Configurations	IEEE 802.11ac

##### Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Ant. 1 + Ant. 2 + Ant. 3

Channel	Frequency	Total Power Density (dBm/MHz)	Max. Limit (dBm/MHz)	Result
36	5180 MHz	8.56	12.34	Complies
40	5200 MHz	12.12	12.34	Complies
48	5240 MHz	12.28	12.34	Complies

Note:  $DirectionalGain = 10 \cdot \log \left[ \frac{\sum_{j=1}^{N_{ANT}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 10.66\text{dBi} > 6\text{dBi}$ , So Band1 Limit =  $17 - (10.66 - 6) = 12.34\text{dBm/MHz}$

Channel	Frequency	Power Density (dBm/3kHz)				BWCF factor 3kHz to 500kHz	Total Power Density dBm/500kHz	Power Density Limit dBm/500kHz	Result
		Ant. 1	Ant. 2	Ant. 3	Total				
149	5745 MHz	-13.41	-13.14	-14.79	-8.95	22.22	13.27	25.34	Complies
157	5785 MHz	-7.63	-6.58	-8.56	-2.74	22.22	19.48	25.34	Complies
165	5825 MHz	-11.75	-11.16	-13.02	-7.14	22.22	15.08	25.34	Complies

Note:  $DirectionalGain = 10 \cdot \log \left[ \frac{\sum_{j=1}^{N_{ANT}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 10.66\text{dBi} > 6\text{dBi}$ , So Power Density Limit =  $30 - (10.66 - 6) = 25.34\text{dBm/500KHz}$

**Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Ant. 1 + Ant. 2 + Ant. 3**

Channel	Frequency	Total Power Density (dBm/MHz)	Max. Limit (dBm/MHz)	Result
38	5190 MHz	2.13	12.34	Complies
46	5230 MHz	7.91	12.34	Complies

Note:  $DirectionalGain = 10 \cdot \log \left[ \frac{\sum_{j=1}^{N_{ANT}} \left\{ \sum_{k=1}^{N_{MCS}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 10.66\text{dBi} > 6\text{dBi}$ , So Band1 Limit = 17-(10.66-6)=12.34dBm/MHz

Channel	Frequency	Power Density (dBm/3kHz)				BWCF factor	Total Power Density	Power Density Limit	Result
		Ant. 1	Ant. 2	Ant. 3	Total				
151	5755 MHz	-16.08	-15.08	-16.24	-11.00	22.22	11.22	25.34	Complies
159	5795 MHz	-14.18	-13.71	-14.96	-9.48	22.22	12.74	25.34	Complies

Note:  $DirectionalGain = 10 \cdot \log \left[ \frac{\sum_{j=1}^{N_{ANT}} \left\{ \sum_{k=1}^{N_{MCS}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 10.66\text{dBi} > 6\text{dBi}$ , So Power Density Limit = 30-(10.66-6)=25.34dBm/500KHz

**Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / Ant. 1 + Ant. 2 + Ant. 3**

Channel	Frequency	Total Power Density (dBm/MHz)	Max. Limit (dBm/MHz)	Result
42	5210 MHz	0.23	12.34	Complies

Note:  $DirectionalGain = 10 \cdot \log \left[ \frac{\sum_{j=1}^{N_{ANT}} \left\{ \sum_{k=1}^{N_{MCS}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 10.66\text{dBi} > 6\text{dBi}$ , So Band1 Limit = 17-(10.66-6)=12.34dBm/MHz

Channel	Frequency	Power Density (dBm/3kHz)				BWCF factor	Total Power Density	Power Density Limit	Result
		Ant. 1	Ant. 2	Ant. 3	Total				
155	5775 MHz	-25.76	-24.33	-26.31	-20.61	22.22	1.61	25.34	Complies

Note:  $DirectionalGain = 10 \cdot \log \left[ \frac{\sum_{j=1}^{N_{ANT}} \left\{ \sum_{k=1}^{N_{MCS}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 10.66\text{dBi} > 6\text{dBi}$ , So Power Density Limit = 30-(10.66-6)=25.34dBm/500KHz

Temperature	21°C	Humidity	62%
Test Engineer	Benson Peng	Configurations	IEEE 802.11a

**Configuration IEEE 802.11a / Ant. 1 + Ant. 2 + Ant. 3**

Channel	Frequency	Total Power Density (dBm/MHz)	Max. Limit (dBm/MHz)	Result
36	5180 MHz	9.70	12.34	Complies
40	5200 MHz	12.22	12.34	Complies
48	5240 MHz	12.14	12.34	Complies

Note:  $DirectionalGain = 10 \cdot \log \left[ \frac{\sum_{j=1}^{N_{ANT}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 10.66\text{dBi} > 6\text{dBi}$ , So Band1 Limit = 17-(10.66-6)=12.34dBm/MHz


Channel	Frequency	Power Density (dBm/3kHz)				BWCF factor 3kHz to 500kHz	Total Power Density dBm/500kHz	Power Density Limit dBm/500kHz	Result
		Ant. 1	Ant. 2	Ant. 3	Total				
149	5745 MHz	-15.69	-14.94	-15.82	-10.69	22.22	11.53	25.34	Complies
157	5785 MHz	-7.06	-6.11	-6.97	-1.92	22.22	20.30	25.34	Complies
165	5825 MHz	-10.84	-10.05	-12.04	-6.13	22.22	16.09	25.34	Complies

Note:  $DirectionalGain = 10 \cdot \log \left[ \frac{\sum_{j=1}^{N_{ANT}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right]$   
 = 10.66dBi > 6dBi, So Power Density Limit = 30-(10.66-6)=25.34dBm/500KHz


Note: All the test values were listed in the report.

For plots, only the channel with worse result was shown.

Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Ant. 1 + Ant. 2 + Ant. 3 / 5240 MHz

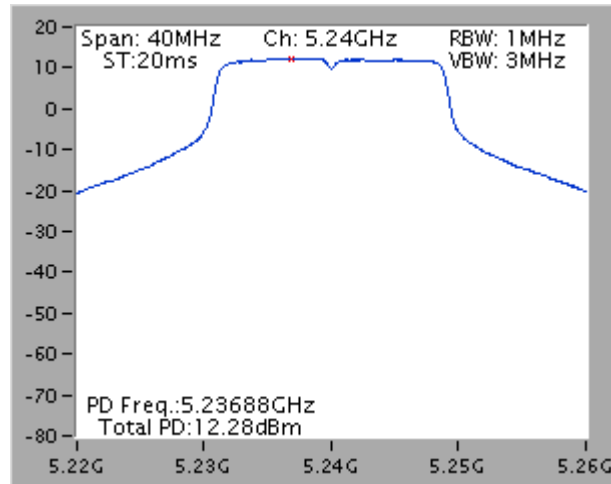


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Ant. 1 / 5785 MHz

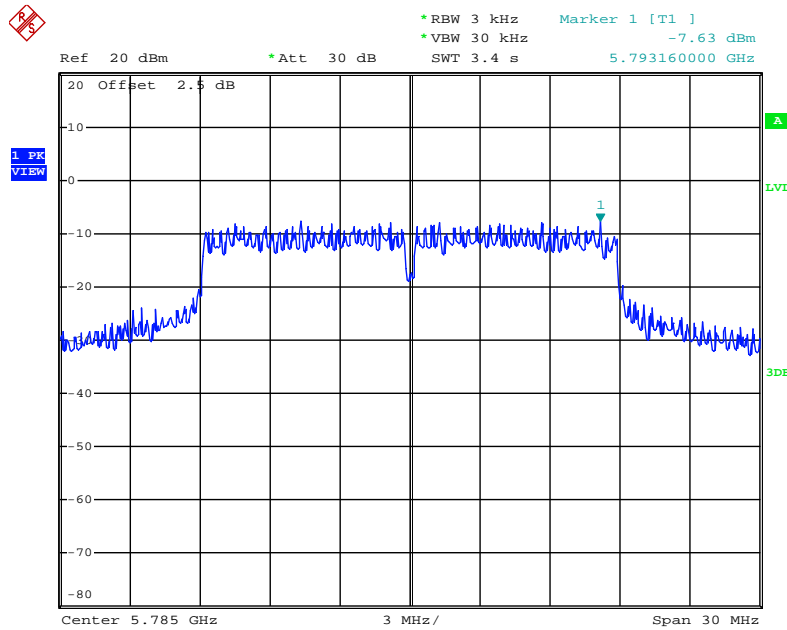


Date: 29.JUL.2014 20:39:52

### Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Ant. 2 / 5785 MHz

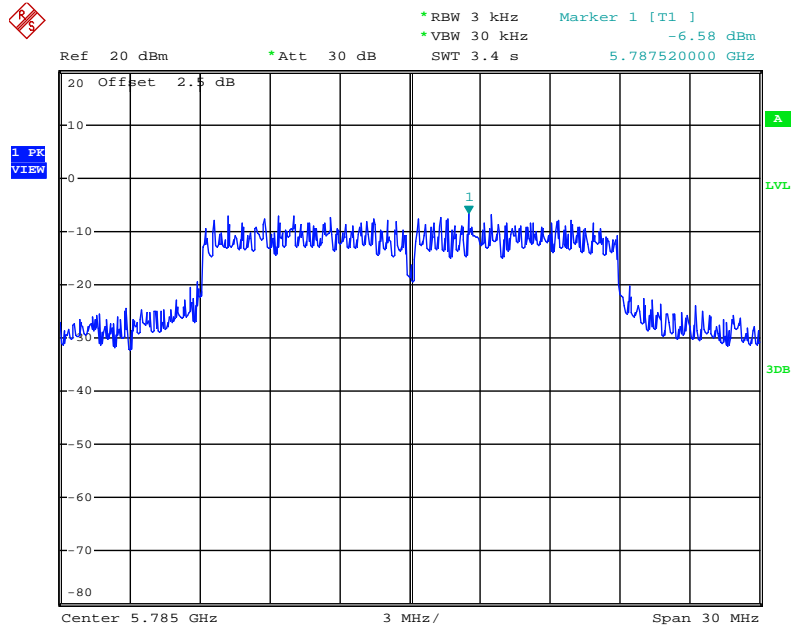


Date: 29.JUL.2014 20:40:55

### Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Ant. 3 / 5785 MHz

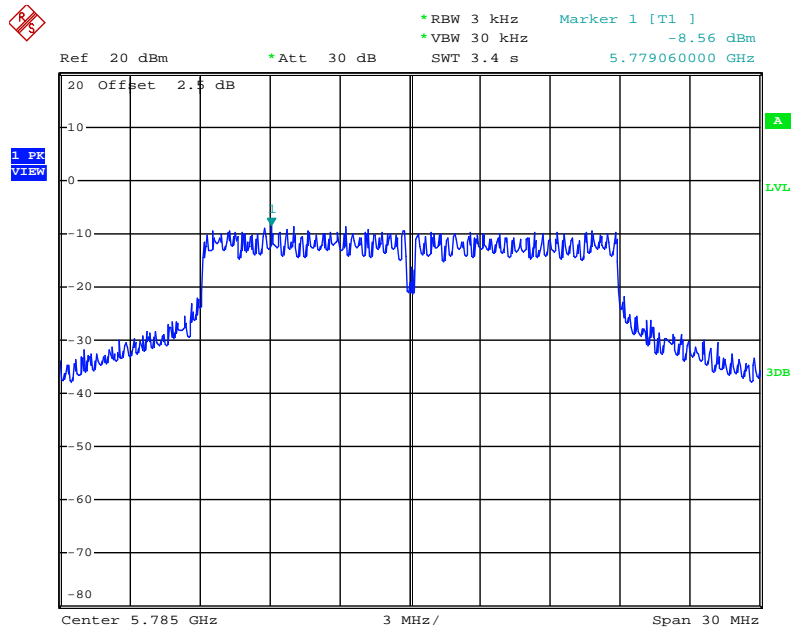


Date: 29.JUL.2014 20:41:58

Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Ant. 1 + Ant. 2 + Ant. 3 / 5230 MHz

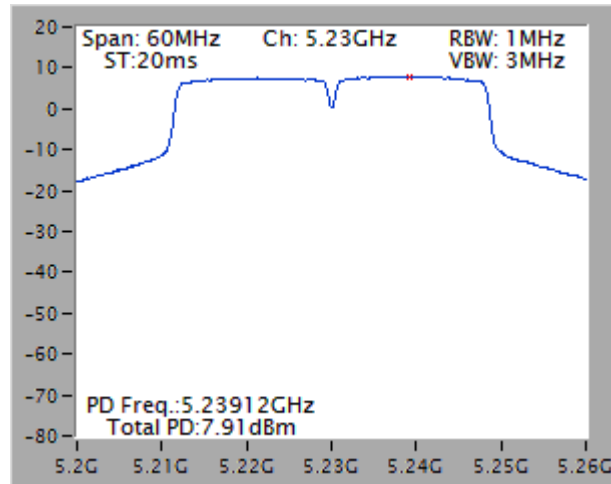


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Ant. 1 / 5795MHz

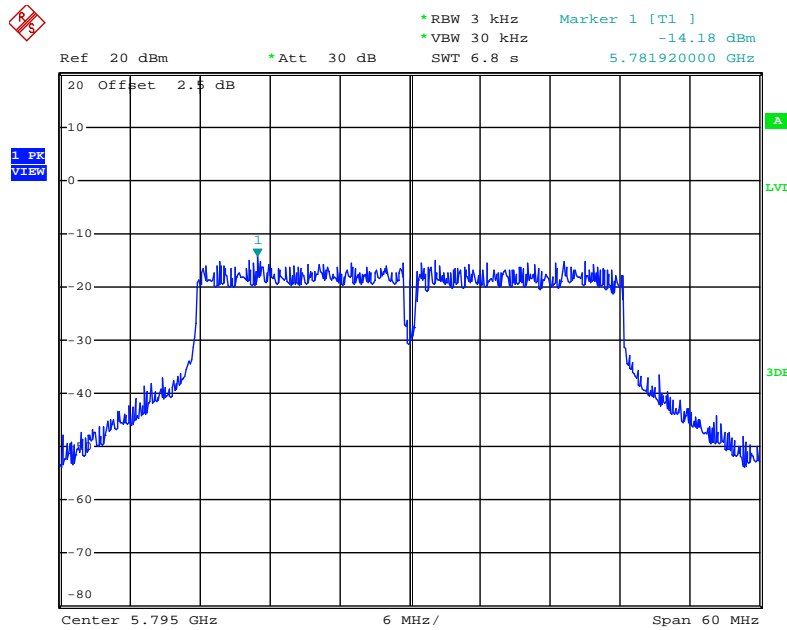


Date: 29.JUL.2014 20:52:48

**Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Ant. 2 / 5795MHz**

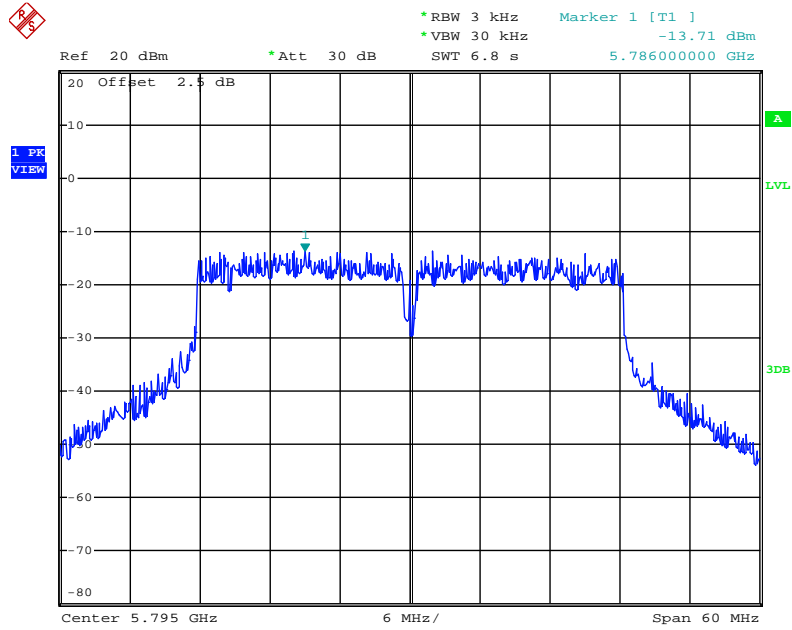


Date: 29.JUL.2014 20:51:51

**Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Ant. 3 / 5795MHz**

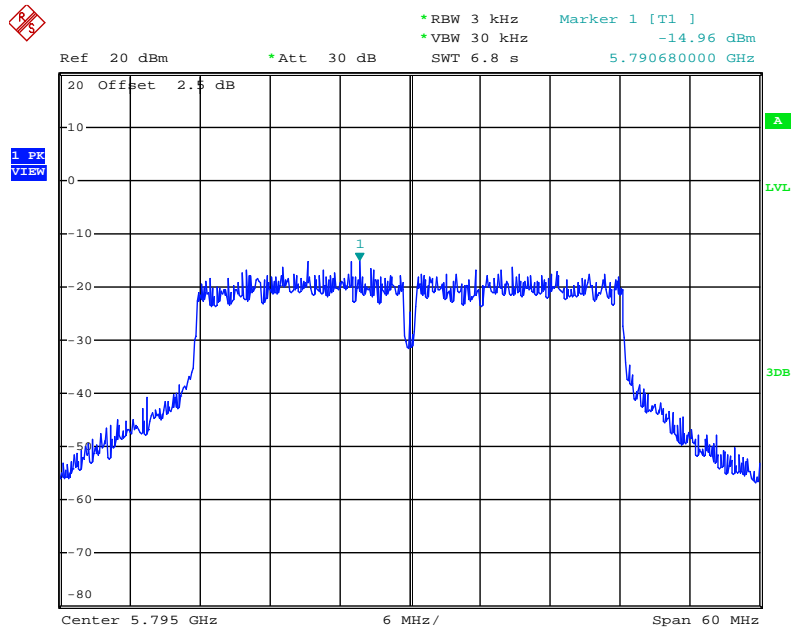


Date: 29.JUL.2014 20:50:59

Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / Ant. 1 + Ant. 2 + Ant. 3 / 5210 MHz

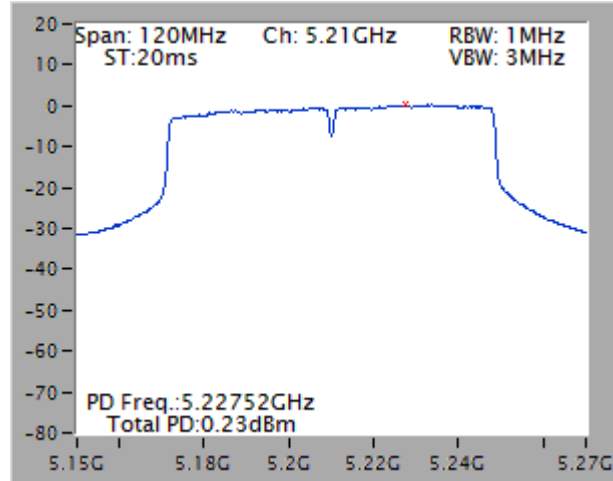


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / Ant. 1 / 5775 MHz

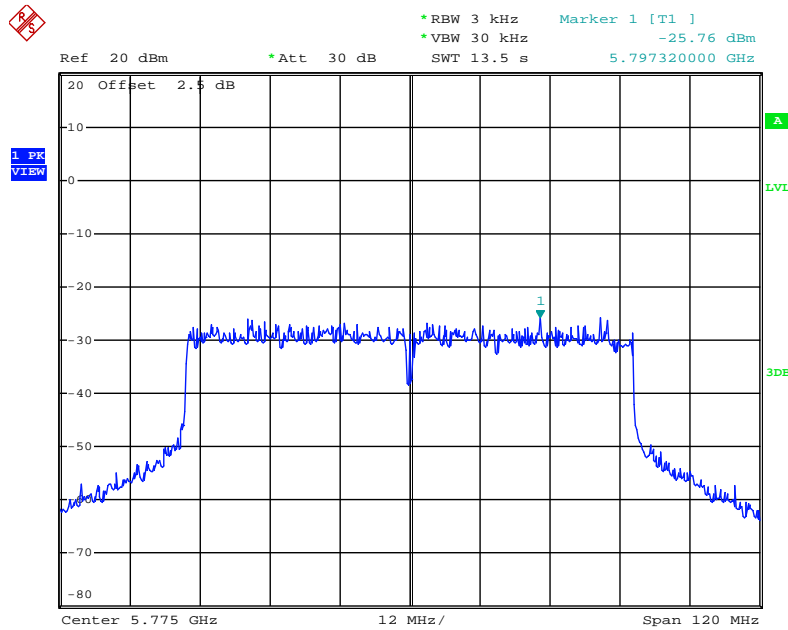

Date: 29.JUL.2014 20:55:00




**Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / Ant. 2 / 5775 MHz**

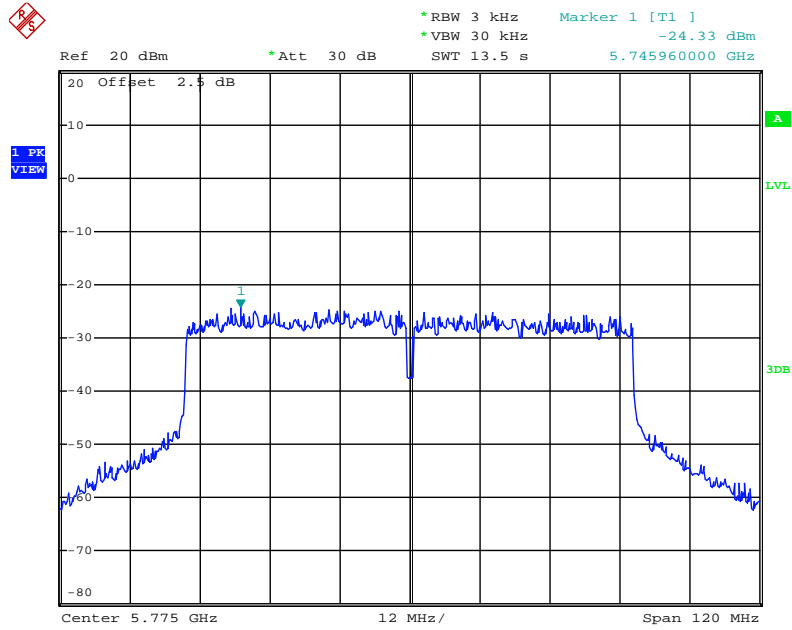


Date: 29.JUL.2014 20:56:05

**Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / Ant. 3 / 5775 MHz**

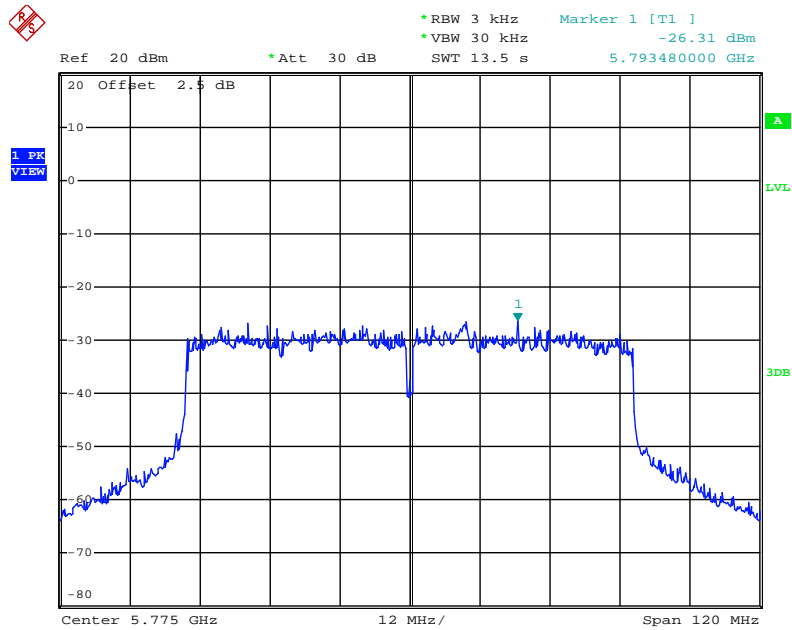


Date: 29.JUL.2014 20:56:54

Power Density Plot on Configuration IEEE 802.11a / Ant. 1 + Ant. 2 + Ant. 3 / 5200 MHz

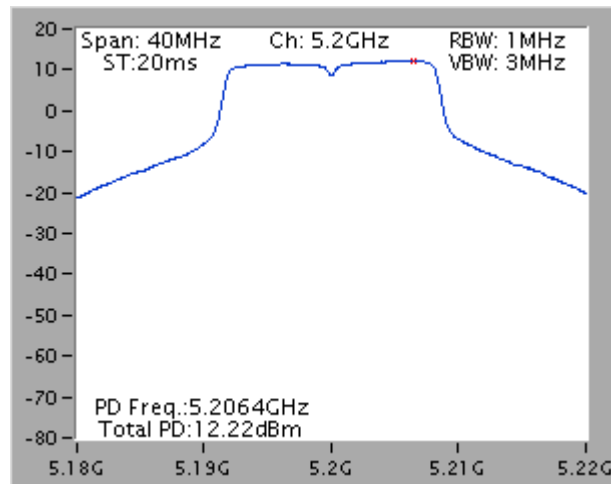


Power Density Plot on Configuration IEEE 802.11a / Ant. 1 / 5785 MHz

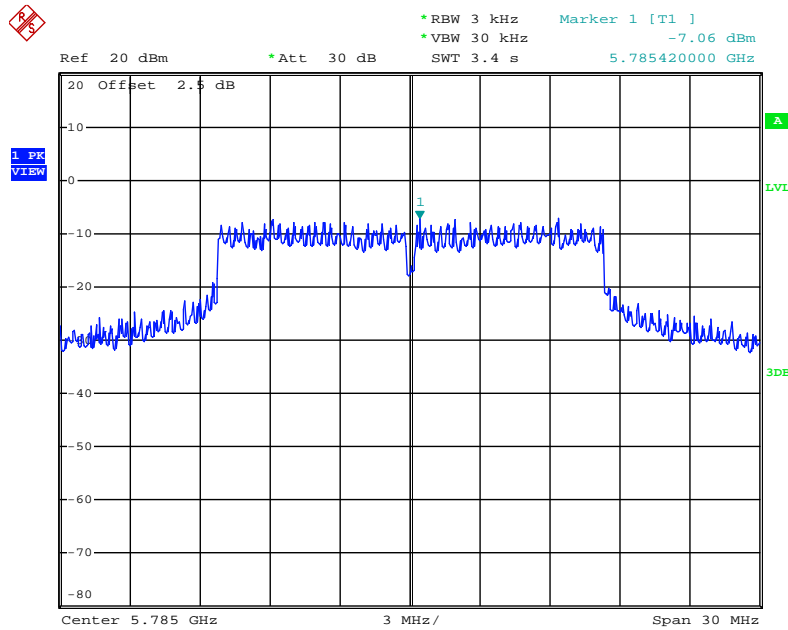


Date: 29.JUL.2014 20:32:36

**Power Density Plot on Configuration IEEE 802.11a / Ant. 2 / 5785 MHz**

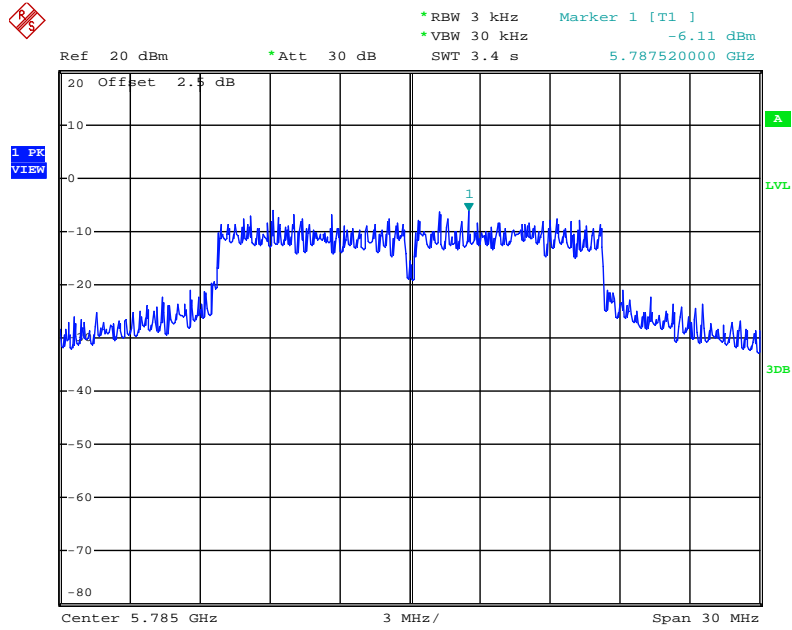

Date: 29.JUL.2014 20:29:55

**Power Density Plot on Configuration IEEE 802.11a / Ant. 3 / 5785 MHz**

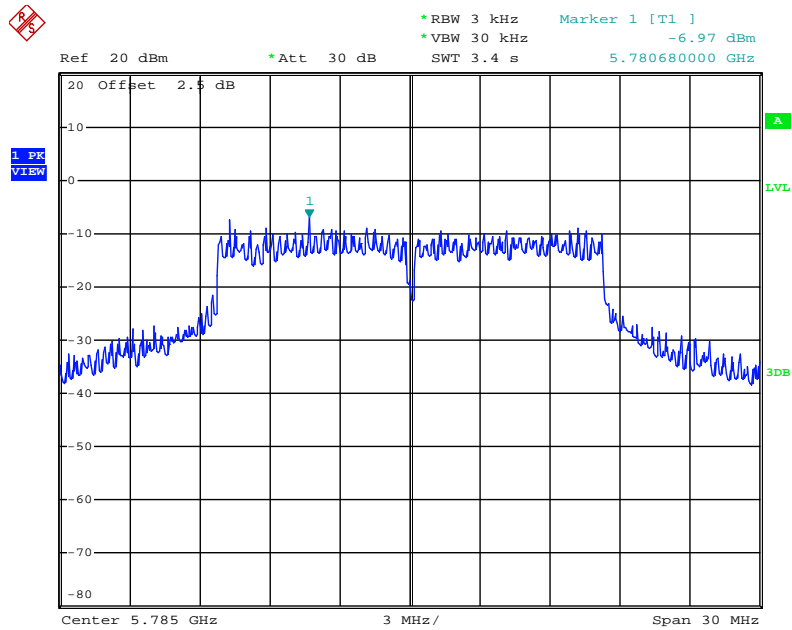

Date: 29.JUL.2014 20:31:25

## 4.6. Radiated Emissions Measurement

### 4.6.1. Limit

For transmitters operating in the 5.15-5.25 GHz band: all emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of  $-27$  dBm/MHz.

For transmitters operating in the 5.725-5.85 GHz band: all emissions within the frequency range from the band edge to 10 MHz above or below the band edge shall not exceed an e.i.r.p. of  $-17$  dBm/MHz; for frequencies 10 MHz or greater above or below the band edge, emissions shall not exceed an e.i.r.p. of  $-27$  dBm/MHz.

In addition, In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(kHz)	300
0.490~1.705	24000/F(kHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

### 4.6.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of spectrum analyzer and receiver.

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	40 GHz
RBW / VBW (Emission in restricted band)	1 MHz / 3MHz for Peak, Please refer to section 3.10 for Average
RBW / VBW (Emission in non-restricted band)	1 MHz / 3MHz for peak


Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RBW 200Hz for QP
Start ~ Stop Frequency	150kHz~30MHz / RBW 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RBW 120kHz for QP

#### 4.6.3. Test Procedures


1. Configure the EUT according to ANSI C63.10. The EUT was placed on the top of the turntable 0.8 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
4. For each suspected emissions, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
5. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
6. For emissions above 1GHz, use 1MHz VBW and RBW for peak reading. Then 1MHz RBW and 10Hz VBW for average reading in spectrum analyzer.
7. If the emissions level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method for below 1GHz.
8. For testing above 1GHz, the emissions level of the EUT in peak mode was lower than average limit (that means the emissions level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
9. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High – Low scan is not required in this case.

#### 4.6.4. Test Setup Layout


For Radiated Emissions: 9kHz ~30MHz

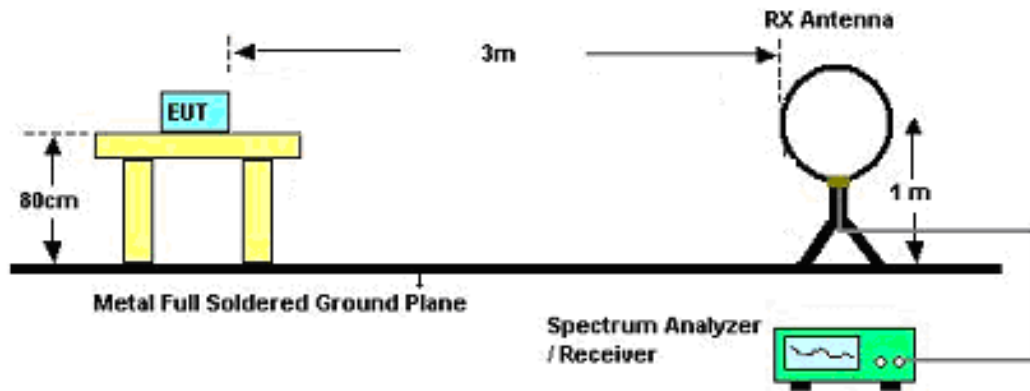

For Radiated Emissions: 30MHz~1GHz

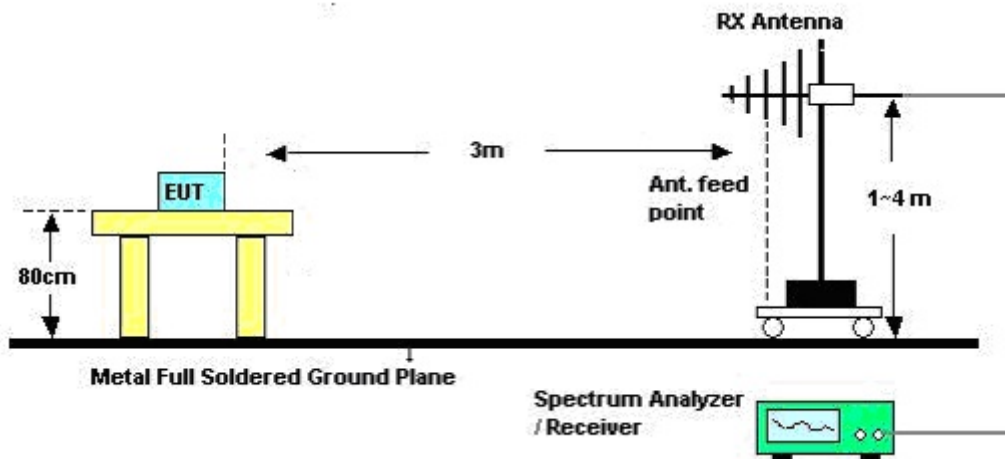

For Radiated Emissions: Above 1GHz

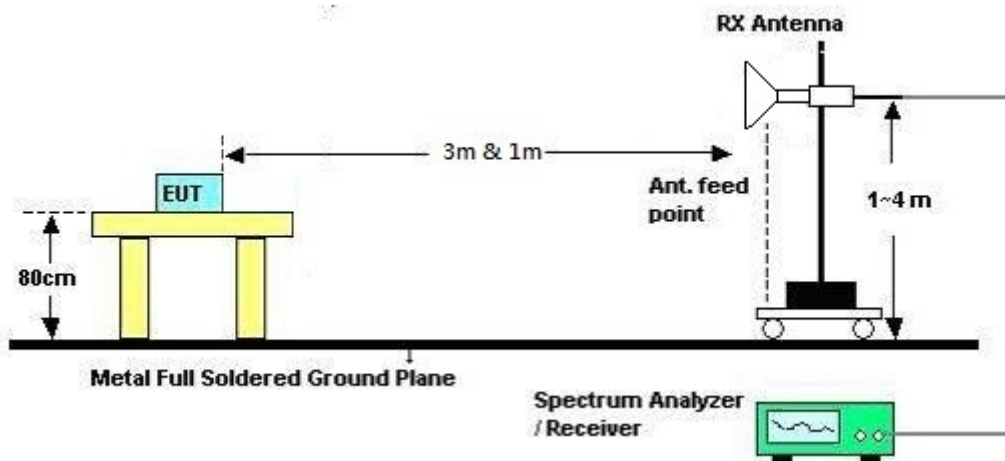

#### **4.6.5. Test Deviation**

There is no deviation with the original standard.

#### **4.6.6. EUT Operation during Test**

The EUT was programmed to be in continuously transmitting mode.

#### 4.6.7. Results of Radiated Emissions (9kHz~30MHz)

<b>Temperature</b>	23°C	<b>Humidity</b>	61%
<b>Test Engineer</b>	Magic Lai	<b>Configurations</b>	CTX
<b>Test Date</b>	Jul. 29, 2014		

<b>Freq. (MHz)</b>	<b>Level (dBuV)</b>	<b>Over Limit (dB)</b>	<b>Limit Line (dBuV)</b>	<b>Remark</b>
-	-	-	-	See Note

Note:

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Distance extrapolation factor =  $40 \log(\text{specific distance} / \text{test distance})$  (dB);


Limit line = specific limits (dBuV) + distance extrapolation factor.



4.6.8. Results of Radiated Emissions (30MHz~1GHz)


Temperature	23°C	Humidity	61%
Test Engineer	Magic Lai	Configurations	CTX

Horizontal

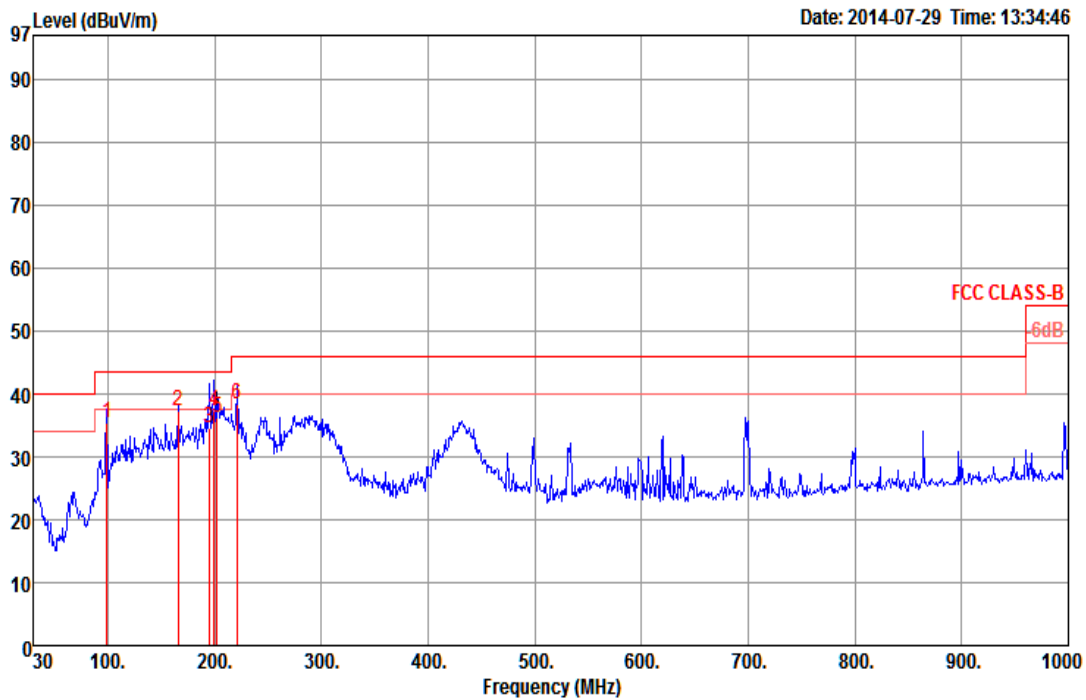

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	A/Pos	T/Pos	Remark	
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	Pol/Phase	cm	deg	
1	98.87	35.47	43.50	-8.03	51.27	0.82	11.20	27.82	HORIZONTAL	100	134	QP
2	165.80	37.19	43.50	-6.31	52.94	1.14	10.52	27.41	HORIZONTAL	157	211	QP
3	194.90	34.69	43.50	-8.81	50.51	1.26	10.20	27.28	HORIZONTAL	214	167	QP
4	199.75	37.16	43.50	-6.34	52.74	1.27	10.40	27.25	HORIZONTAL	100	310	QP
5	202.66	36.20	43.50	-7.30	51.72	1.28	10.43	27.23	HORIZONTAL	189	284	QP
6	221.09	38.27	46.00	-7.73	53.06	1.32	10.99	27.10	HORIZONTAL	157	95	QP

**Vertical**

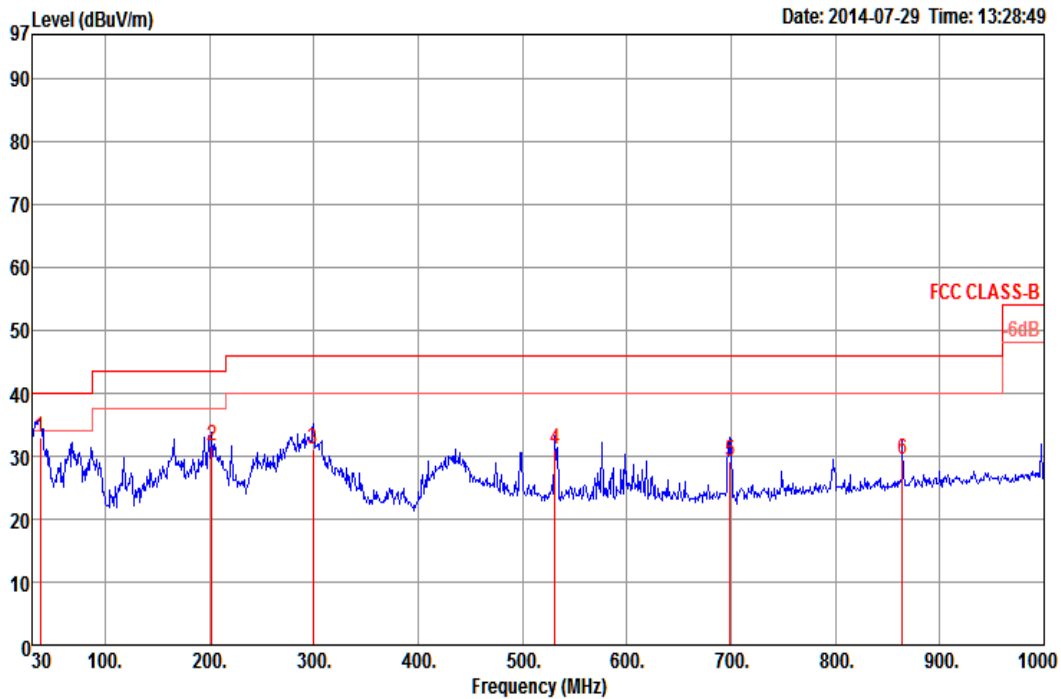

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	A/Pos	T/Pos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	cm	deg	
1	37.76	33.06	40.00	-6.94	45.58	0.47	15.00	27.99	100	248	QP
2	202.66	31.71	43.50	-11.79	47.23	1.28	10.43	27.23	164	68	QP
3	299.66	31.06	46.00	-14.94	42.39	1.60	13.90	26.83	100	89	QP
4	531.49	31.15	46.00	-14.85	38.32	2.18	18.55	27.90	100	186	QP
5	699.30	29.08	46.00	-16.92	33.69	2.58	19.90	27.09	154	276	QP
6	864.20	29.45	46.00	-16.55	31.77	2.87	21.69	26.88	100	328	QP

**Note:**

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

#### 4.6.9. Results for Radiated Emissions (1GHz~40GHz)

<b>Temperature</b>	23°C	<b>Humidity</b>	61%
<b>Test Engineer</b>	Magic Lai	<b>Configurations</b>	IEEE 802.11ac MCS0/Nss1 VHT20 CH 36 / Ant. 1 + Ant. 2 + Ant. 3
<b>Test Date</b>	Jul. 21, 2014		

##### Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		deg	cm	
1	15492.72	54.44	74.00	-19.56	42.57	7.84	38.70	34.67	Peak	135	100	HORIZONTAL
2	15541.28	40.93	54.00	-13.07	29.13	7.85	38.67	34.72	Average	135	100	HORIZONTAL

##### Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		deg	cm	
1	15510.35	41.80	54.00	-12.20	29.96	7.85	38.69	34.70	Average	248	100	VERTICAL
2	15541.28	54.61	74.00	-19.39	42.81	7.85	38.67	34.72	Peak	248	100	VERTICAL

<b>Temperature</b>	23°C	<b>Humidity</b>	61%
<b>Test Engineer</b>	Magic Lai	<b>Configurations</b>	IEEE 802.11ac MCS0/Nss1 VHT20 CH 40 / Ant. 1 + Ant. 2 + Ant. 3
<b>Test Date</b>	Jul. 21, 2014		

### Horizontal

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	Remark	T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm	
1	15589.10	54.18	74.00	-19.82	42.45	7.87	38.63	34.77	Peak	219	100 HORIZONTAL
2	15603.85	42.02	54.00	-11.98	30.31	7.88	38.62	34.79	Average	219	100 HORIZONTAL

### Vertical

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	Remark	T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm	
1	15599.84	55.31	74.00	-18.69	43.60	7.88	38.62	34.79	Peak	353	100 VERTICAL
2	15612.50	41.01	54.00	-12.99	29.32	7.88	38.60	34.79	Average	353	100 VERTICAL



<b>Temperature</b>	23°C	<b>Humidity</b>	61%
<b>Test Engineer</b>	Magic Lai	<b>Configurations</b>	IEEE 802.11ac MCS0/Nss1 VHT20 CH 48 / Ant. 1 + Ant. 2 + Ant. 3
<b>Test Date</b>	Jul. 21, 2014		

**Horizontal**

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		deg	cm	
1	15719.01	42.09	54.00	-11.91	30.53	7.92	38.52	34.88	Average	147	100	HORIZONTAL
2	15725.58	54.10	74.00	-19.90	42.54	7.92	38.52	34.88	Peak	147	100	HORIZONTAL

**Vertical**

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		deg	cm	
1	15716.28	52.15	74.00	-21.85	40.59	7.92	38.52	34.88	Peak	159	100	VERTICAL
2	15716.28	42.83	54.00	-11.17	31.27	7.92	38.52	34.88	Average	159	100	VERTICAL

<b>Temperature</b>	23°C	<b>Humidity</b>	61%
<b>Test Engineer</b>	Magic Lai	<b>Configurations</b>	IEEE 802.11ac MCS0/Nss1 VHT20 CH 149 / Ant. 1 + Ant. 2 + Ant. 3
<b>Test Date</b>	Jul. 21, 2014		

### Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		deg	cm	
1	11485.06	51.35	74.00	-22.65	40.97	6.74	38.30	34.66	Peak	136	100	HORIZONTAL
2	11488.65	38.33	54.00	-15.67	27.95	6.74	38.30	34.66	Average	136	100	HORIZONTAL

### Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		deg	cm	
1	11485.77	38.39	54.00	-15.61	28.01	6.74	38.30	34.66	Average	322	100	VERTICAL
2	11488.65	51.55	74.00	-22.45	41.17	6.74	38.30	34.66	Peak	322	100	VERTICAL



<b>Temperature</b>	23°C	<b>Humidity</b>	61%
<b>Test Engineer</b>	Magic Lai	<b>Configurations</b>	IEEE 802.11ac MCS0/Nss1 VHT20 CH 157 / Ant. 1 + Ant. 2 + Ant. 3
<b>Test Date</b>	Jul. 21, 2014		

**Horizontal**

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		deg	cm	
1	11570.58	38.91	54.00	-15.09	28.50	6.77	38.33	34.69	Average	186	100	HORIZONTAL
2	11576.83	52.59	74.00	-21.41	42.18	6.77	38.33	34.69	Peak	186	100	HORIZONTAL

**Vertical**

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		deg	cm	
1	11567.56	54.27	74.00	-19.73	43.85	6.77	38.33	34.68	Peak	358	100	VERTICAL
2	11567.76	40.94	54.00	-13.06	30.52	6.77	38.33	34.68	Average	358	100	VERTICAL



<b>Temperature</b>	23°C	<b>Humidity</b>	61%
<b>Test Engineer</b>	Magic Lai	<b>Configurations</b>	IEEE 802.11ac MCS0/Nss1 VHT20 CH 165 / Ant. 1 + Ant. 2 + Ant. 3
<b>Test Date</b>	Jul. 21, 2014		

**Horizontal**

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		deg	cm	
1	11649.62	38.77	54.00	-15.23	28.33	6.80	38.36	34.72	Average	149	100	HORIZONTAL
2	11659.39	51.70	74.00	-22.30	41.26	6.80	38.36	34.72	Peak	149	100	HORIZONTAL

**Vertical**

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		deg	cm	
1	11646.06	38.76	54.00	-15.24	28.31	6.80	38.36	34.71	Average	279	100	VERTICAL
2	11658.21	51.97	74.00	-22.03	41.53	6.80	38.36	34.72	Peak	279	100	VERTICAL



<b>Temperature</b>	23°C	<b>Humidity</b>	61%
<b>Test Engineer</b>	Magic Lai	<b>Configurations</b>	IEEE 802.11ac MCS0/Nss1 VHT40 CH 38 / Ant. 1 + Ant. 2 + Ant. 3
<b>Test Date</b>	Jul. 21, 2014		

### Horizontal

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp		T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	deg	cm	
1	15564.87	53.92	74.00	-20.08	42.16	7.86	38.64	34.74	109	100	HORIZONTAL
2	15576.57	41.36	54.00	-12.64	29.63	7.86	38.64	34.77	236	100	HORIZONTAL

### Vertical

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp		T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	deg	cm	
1	15562.76	41.42	54.00	-12.58	29.66	7.86	38.64	34.74	237	100	VERTICAL
2	15564.33	54.19	74.00	-19.81	42.43	7.86	38.64	34.74	237	100	VERTICAL



<b>Temperature</b>	23°C	<b>Humidity</b>	61%
<b>Test Engineer</b>	Magic Lai	<b>Configurations</b>	IEEE 802.11ac MCS0/Nss1 VHT40 CH 46 / Ant. 1 + Ant. 2 + Ant. 3
<b>Test Date</b>	Jul. 21, 2014		

**Horizontal**

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		deg	cm	
1	15689.49	54.74	74.00	-19.26	43.14	7.90	38.55	34.85	Peak	294	100	HORIZONTAL
2	15690.61	41.48	54.00	-12.52	29.88	7.90	38.55	34.85	Average	294	100	HORIZONTAL

**Vertical**

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		deg	cm	
1	15684.29	41.58	54.00	-12.42	29.98	7.90	38.55	34.85	Average	200	100	VERTICAL
2	15694.71	54.16	74.00	-19.84	42.56	7.90	38.55	34.85	Peak	200	100	VERTICAL



<b>Temperature</b>	23°C	<b>Humidity</b>	61%
<b>Test Engineer</b>	Magic Lai	<b>Configurations</b>	IEEE 802.11ac MCS0/Nss1 VHT40 CH 151 / Ant. 1 + Ant. 2 + Ant. 3
<b>Test Date</b>	Jul. 21, 2014		

**Horizontal**

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		deg	cm	
1	10979.49	51.04	74.00	-22.96	41.00	6.47	38.30	34.73	Peak	248	100	HORIZONTAL
2	11002.05	38.18	54.00	-15.82	28.13	6.46	38.30	34.71	Average	248	100	HORIZONTAL

**Vertical**

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		deg	cm	
1	10977.44	51.45	74.00	-22.55	41.41	6.47	38.30	34.73	Peak	104	100	VERTICAL
2	10994.23	38.46	54.00	-15.54	28.41	6.46	38.30	34.71	Average	104	100	VERTICAL

<b>Temperature</b>	23°C	<b>Humidity</b>	61%
<b>Test Engineer</b>	Magic Lai	<b>Configurations</b>	IEEE 802.11ac MCS0/Nss1 VHT40 CH 159 / Ant. 1 + Ant. 2 + Ant. 3
<b>Test Date</b>	Jul. 21, 2014		

### Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		deg	cm	
1	11584.23	51.41	74.00	-22.59	40.99	6.78	38.33	34.69	Peak	195	100	HORIZONTAL
2	11589.36	38.95	54.00	-15.05	28.53	6.78	38.33	34.69	Average	195	100	HORIZONTAL

### Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		deg	cm	
1	11588.46	51.24	74.00	-22.76	40.82	6.78	38.33	34.69	Peak	135	100	VERTICAL
2	11610.00	38.72	54.00	-15.28	28.29	6.79	38.34	34.70	Average	135	100	VERTICAL

<b>Temperature</b>	23°C	<b>Humidity</b>	61%
<b>Test Engineer</b>	Magic Lai	<b>Configurations</b>	IEEE 802.11ac MCS0/Nss1 VHT80 CH 42 / Ant. 1 + Ant. 2 + Ant. 3
<b>Test Date</b>	Jul. 21, 2014		

### Horizontal

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp		T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm	
1	15655.00	42.68	54.00	-11.32	31.04	7.89	38.58	34.83	Average	157	100 HORIZONTAL
2	15666.70	56.15	74.00	-17.85	44.52	7.90	38.56	34.83	Peak	157	100 HORIZONTAL

### Vertical

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp		T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm	
1	15584.65	54.53	74.00	-19.47	42.80	7.87	38.63	34.77	Peak	234	100 VERTICAL
2	15675.99	41.53	54.00	-12.47	29.92	7.90	38.56	34.85	Average	234	100 VERTICAL



<b>Temperature</b>	23°C	<b>Humidity</b>	61%
<b>Test Engineer</b>	Magic Lai	<b>Configurations</b>	IEEE 802.11ac MCS0/Nss1 VHT80 CH 155 / Ant. 1 + Ant. 2 + Ant. 3
<b>Test Date</b>	Jul. 21, 2014		

**Horizontal**

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		deg	cm	
1	11506.73	52.94	74.00	-21.06	42.55	6.75	38.30	34.66	Peak	205	100	HORIZONTAL
2	11514.58	40.52	54.00	-13.48	30.11	6.76	38.31	34.66	Average	205	100	HORIZONTAL

**Vertical**

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		deg	cm	
1	11503.21	52.54	74.00	-21.46	42.15	6.75	38.30	34.66	Peak	311	100	VERTICAL
2	11510.42	40.45	54.00	-13.55	30.06	6.75	38.30	34.66	Average	311	100	VERTICAL

<b>Temperature</b>	23°C	<b>Humidity</b>	61%
<b>Test Engineer</b>	Magic Lai	<b>Configurations</b>	IEEE 802.11a CH 36 / Ant. 1 + Ant. 2 + Ant. 3
<b>Test Date</b>	Jul. 21, 2014		

### Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		deg	cm	
1	15536.35	41.48	54.00	-12.52	29.68	7.85	38.67	34.72	Average	213	100	HORIZONTAL
2	15537.79	54.35	74.00	-19.65	42.55	7.85	38.67	34.72	Peak	213	100	HORIZONTAL

### Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		deg	cm	
1	15540.67	54.96	74.00	-19.04	43.16	7.85	38.67	34.72	Peak	96	100	VERTICAL
2	15543.27	43.73	54.00	-10.27	31.93	7.85	38.67	34.72	Average	96	100	VERTICAL

<b>Temperature</b>	23°C	<b>Humidity</b>	61%
<b>Test Engineer</b>	Magic Lai	<b>Configurations</b>	IEEE 802.11a CH 40 / Ant. 1 + Ant. 2 + Ant. 3
<b>Test Date</b>	Jul. 21, 2014		

**Horizontal**

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		deg	cm	
1	15595.96	54.97	74.00	-19.03	43.24	7.88	38.62	34.77	Peak	263	100	HORIZONTAL
2	15602.12	41.57	54.00	-12.43	29.86	7.88	38.62	34.79	Average	263	100	HORIZONTAL

**Vertical**

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		deg	cm	
1	15601.96	42.70	54.00	-11.30	30.99	7.88	38.62	34.79	Average	5	100	VERTICAL
2	15602.12	55.10	74.00	-18.90	43.39	7.88	38.62	34.79	Peak	5	100	VERTICAL



<b>Temperature</b>	23°C	<b>Humidity</b>	61%
<b>Test Engineer</b>	Magic Lai	<b>Configurations</b>	IEEE 802.11a CH 48 / Ant. 1 + Ant. 2 + Ant. 3
<b>Test Date</b>	Jul. 21, 2014		

### Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		deg	cm	
1	15724.04	55.09	74.00	-18.91	43.53	7.92	38.52	34.88	Peak	124	100	HORIZONTAL
2	15728.72	41.52	54.00	-12.48	29.98	7.92	38.52	34.90	Average	124	100	HORIZONTAL

### Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		deg	cm	
1	15717.21	42.22	54.00	-11.78	30.66	7.92	38.52	34.88	Average	276	100	VERTICAL
2	15724.04	54.53	74.00	-19.47	42.97	7.92	38.52	34.88	Peak	276	100	VERTICAL

<b>Temperature</b>	23°C	<b>Humidity</b>	61%
<b>Test Engineer</b>	Magic Lai	<b>Configurations</b>	IEEE 802.11a CH 149 / Ant. 1 + Ant. 2 + Ant. 3
<b>Test Date</b>	Jul. 21, 2014		

### Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		deg	cm	
1	11480.64	39.13	54.00	-14.87	28.75	6.74	38.30	34.66	Average	73	100	HORIZONTAL
2	11483.04	52.59	74.00	-21.41	42.21	6.74	38.30	34.66	Peak	73	100	HORIZONTAL

### Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		deg	cm	
1	11481.38	39.43	54.00	-14.57	29.05	6.74	38.30	34.66	Average	250	100	VERTICAL
2	11495.74	52.13	74.00	-21.87	41.75	6.74	38.30	34.66	Peak	250	100	VERTICAL

<b>Temperature</b>	23°C	<b>Humidity</b>	61%
<b>Test Engineer</b>	Magic Lai	<b>Configurations</b>	IEEE 802.11a CH 157 / Ant. 1 + Ant. 2 + Ant. 3
<b>Test Date</b>	Jul. 21, 2014		

### Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		deg	cm	
1	11567.79	39.96	54.00	-14.04	29.54	6.77	38.33	34.68	Average	264	100	HORIZONTAL
2	11578.75	51.71	74.00	-22.29	41.30	6.77	38.33	34.69	Peak	264	100	HORIZONTAL

### Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		deg	cm	
1	11567.53	52.91	74.00	-21.09	42.49	6.77	38.33	34.68	Peak	182	100	VERTICAL
2	11568.40	42.00	54.00	-12.00	31.58	6.77	38.33	34.68	Average	182	100	VERTICAL

<b>Temperature</b>	23°C	<b>Humidity</b>	61%
<b>Test Engineer</b>	Magic Lai	<b>Configurations</b>	IEEE 802.11a CH 165 / Ant. 1 + Ant. 2 + Ant. 3
<b>Test Date</b>	Jul. 21, 2014		

#### Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		deg	cm	
1	11644.46	39.18	54.00	-14.82	28.73	6.80	38.36	34.71	Average	307	100	HORIZONTAL
2	11651.83	51.76	74.00	-22.24	41.32	6.80	38.36	34.72	Peak	307	100	HORIZONTAL

#### Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		deg	cm	
1	11642.56	51.88	74.00	-22.12	41.43	6.80	38.36	34.71	Peak	165	100	VERTICAL
2	11643.40	39.52	54.00	-14.48	29.07	6.80	38.36	34.71	Average	165	100	VERTICAL

#### Note:

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

## 4.7. Band Edge Emissions Measurement

### 4.7.1. Limit

For transmitters operating in the 5.15-5.25 GHz band: all emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of  $-27$  dBm/MHz.

For transmitters operating in the 5.725-5.85 GHz band: all emissions within the frequency range from the band edge to 10 MHz above or below the band edge shall not exceed an e.i.r.p. of  $-17$  dBm/MHz; for frequencies 10 MHz or greater above or below the band edge, emissions shall not exceed an e.i.r.p. of  $-27$  dBm/MHz.

In addition, In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(kHz)	300
0.490~1.705	24000/F(kHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

### 4.7.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	100 MHz
RBW / VBW (Emission in restricted band)	1 MHz / 3MHz for Peak, Please refer to section 3.10 for Average
RBW / VBW (Emission in non-restricted band)	1 MHz / 3MHz for Peak

### 4.7.3. Test Procedures

- The test procedure is the same as section 4.6.3, only the frequency range investigated is limited to 100MHz around band edges.

### 4.7.4. Test Setup Layout

This test setup layout is the same as that shown in section 4.6.4.

### 4.7.5. Test Deviation

There is no deviation with the original standard.

#### 4.7.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

#### 4.7.7. Test Result of Band Edge and Fundamental Emissions

Temperature	23°C	Humidity	61%
Test Engineer	Magic Lai	Configurations	IEEE 802.11ac MCS0/Nss1 VHT20 CH 36, 40, 48 / Ant. 1 + Ant. 2 + Ant. 3
Test Date	Jul. 20, 2014		

##### Channel 36

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	Remark	T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm	
1	5148.24	71.56	74.00	-2.44	68.61	4.34	33.14	34.53	Peak	193	109 VERTICAL
2	5148.88	53.92	54.00	-0.08	50.97	4.34	33.14	34.53	Average	193	109 VERTICAL
3	5187.53	106.35			103.33	4.36	33.19	34.53	Average	193	109 VERTICAL
4	5187.69	119.00			115.98	4.36	33.19	34.53	Peak	193	109 VERTICAL

Item 3, 4 are the fundamental frequency at 5180 MHz.

##### Channel 40

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	Remark	T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm	
1	5149.68	68.96	74.00	-5.04	66.01	4.34	33.14	34.53	Peak	261	111 VERTICAL
2	5150.00	53.86	54.00	-0.14	50.91	4.34	33.14	34.53	Average	261	111 VERTICAL
3	5192.63	122.13			119.07	4.37	33.22	34.53	Peak	261	111 VERTICAL
4	5192.63	109.40			106.34	4.37	33.22	34.53	Average	261	111 VERTICAL

Item 3, 4 are the fundamental frequency at 5200 MHz.

##### Channel 48

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	Remark	T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm	
1	5135.10	64.34	74.00	-9.66	61.43	4.33	33.11	34.53	Peak	191	108 VERTICAL
2	5143.75	44.87	54.00	-9.13	41.92	4.34	33.14	34.53	Average	191	108 VERTICAL
3	5247.21	111.11			107.94	4.40	33.30	34.53	Average	191	108 VERTICAL
4	5247.69	123.14			119.97	4.40	33.30	34.53	Peak	191	108 VERTICAL
5	5350.00	44.14	54.00	-9.86	40.74	4.47	33.46	34.53	Average	191	108 VERTICAL
6	5350.48	61.89	74.00	-12.11	58.49	4.47	33.46	34.53	Peak	191	108 VERTICAL

Item 3, 4 are the fundamental frequency at 5240 MHz.

<b>Temperature</b>	23°C	<b>Humidity</b>	61%
<b>Test Engineer</b>	Magic Lai	<b>Configurations</b>	IEEE 802.11ac MCS0/Nss1 VHT20 CH 149, 157, 165 / Ant. 1 + Ant. 2 + Ant. 3
<b>Test Date</b>	Jul. 20, 2014		

**Channel 149**

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	Remark	T/Pos	A/Pos	Pol/Phase	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	5711.96	68.09	68.20	-0.11	63.64	4.71	34.32	34.58	Peak	176	108	VERTICAL
2	5723.88	75.17	78.20	-3.03	70.66	4.72	34.37	34.58	Peak	176	108	VERTICAL
3	5748.37	104.30			99.73	4.73	34.42	34.58	Average	176	108	VERTICAL
4	5748.53	116.85			112.28	4.73	34.42	34.58	Peak	176	108	VERTICAL

Item 3, 4 are the fundamental frequency at 5745 MHz.

**Channel 157**

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	Remark	T/Pos	A/Pos	Pol/Phase	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	5715.00	67.99	68.20	-0.21	63.54	4.71	34.32	34.58	Peak	3	102	VERTICAL
2	5723.08	72.19	78.20	-6.01	67.68	4.72	34.37	34.58	Peak	3	102	VERTICAL
3	5776.83	121.38			116.68	4.75	34.53	34.58	Peak	3	102	VERTICAL
4	5777.31	108.36			103.66	4.75	34.53	34.58	Average	3	102	VERTICAL
5	5856.25	72.19	78.20	-6.01	67.19	4.81	34.79	34.60	Peak	3	102	VERTICAL
6	5860.00	67.04	68.20	-1.16	62.04	4.81	34.79	34.60	Peak	3	102	VERTICAL

Item 3, 4 are the fundamental frequency at 5785 MHz.

**Channel 165**

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	Remark	T/Pos	A/Pos	Pol/Phase	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	5706.67	64.93	68.20	-3.27	60.48	4.71	34.32	34.58	Peak	124	128	HORIZONTAL
2	5720.51	67.44	78.20	-10.76	62.93	4.72	34.37	34.58	Peak	124	128	HORIZONTAL
3	5778.27	115.71			111.01	4.75	34.53	34.58	Peak	124	128	HORIZONTAL
4	5778.27	103.01			98.31	4.75	34.53	34.58	Average	124	128	HORIZONTAL
5	5854.49	65.87	78.20	-12.33	60.87	4.81	34.79	34.60	Peak	124	128	HORIZONTAL
6	5860.32	63.51	68.20	-4.69	58.51	4.81	34.79	34.60	Peak	124	128	HORIZONTAL

Item 3, 4 are the fundamental frequency at 5825 MHz.



<b>Temperature</b>	23°C	<b>Humidity</b>	61%
<b>Test Engineer</b>	Magic Lai	<b>Configurations</b>	IEEE 802.11ac MCS0/Nss1 VHT40 CH 38, 46 / Ant. 1 + Ant. 2 + Ant. 3
<b>Test Date</b>	Jul. 20, 2014		

**Channel 38**

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		deg	cm	
1	5150.00	68.44	74.00	-5.56	65.49	4.34	33.14	34.53	Peak	260	112	VERTICAL
2	5150.00	53.89	54.00	-0.11	50.94	4.34	33.14	34.53	Average	260	112	VERTICAL
3	5191.92	113.43			110.37	4.37	33.22	34.53	Peak	260	112	VERTICAL
4	5192.24	99.42			96.36	4.37	33.22	34.53	Average	260	112	VERTICAL

Item 3, 4 are the fundamental frequency at 5190 MHz.

**Channel 46**

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		deg	cm	
1	5147.44	69.27	74.00	-4.73	66.32	4.34	33.14	34.53	Peak	12	100	VERTICAL
2	5147.76	53.83	54.00	-0.17	50.88	4.34	33.14	34.53	Average	12	100	VERTICAL
3	5231.60	117.63			114.50	4.39	33.27	34.53	Peak	12	100	VERTICAL
4	5231.60	103.60			100.47	4.39	33.27	34.53	Average	12	100	VERTICAL

Item 3, 4 are the fundamental frequency at 5230 MHz.

<b>Temperature</b>	23°C	<b>Humidity</b>	61%
<b>Test Engineer</b>	Magic Lai	<b>Configurations</b>	IEEE 802.11ac MCS0/Nss1 VHT40 CH 151, 159 / Ant. 1 + Ant. 2 + Ant. 3
<b>Test Date</b>	Jul. 20, 2014		

**Channel 151**

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		deg	cm	
1	5715.00	68.08	68.20	-0.12	63.63	4.71	34.32	34.58	Peak	176	109	VERTICAL
2	5722.76	76.81	78.20	-1.39	72.30	4.72	34.37	34.58	Peak	176	109	VERTICAL
3	5758.53	100.87			96.23	4.74	34.48	34.58	Average	176	109	VERTICAL
4	5759.49	115.00			10.36	4.74	34.48	34.58	Peak	176	109	VERTICAL

Item 3, 4 are the fundamental frequency at 5755 MHz.

**Channel 159**

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		deg	cm	
1	5700.90	64.28	68.20	-3.92	59.82	4.71	34.32	34.57	Peak	180	107	VERTICAL
2	5720.83	66.84	78.20	-11.36	62.33	4.72	34.37	34.58	Peak	180	107	VERTICAL
3	5797.24	116.24			111.49	4.76	34.58	34.59	Peak	180	107	VERTICAL
4	5797.89	102.26			97.51	4.76	34.58	34.59	Average	180	107	VERTICAL
5	5855.77	68.94	78.20	-9.26	63.94	4.81	34.79	34.60	Peak	180	107	VERTICAL
6	5860.32	67.51	68.20	-0.69	62.51	4.81	34.79	34.60	Peak	180	107	VERTICAL

Item 3, 4 are the fundamental frequency at 5795 MHz.



<b>Temperature</b>	23°C	<b>Humidity</b>	61%
<b>Test Engineer</b>	Magic Lai	<b>Configurations</b>	IEEE 802.11ac MCS0/Nss1 VHT80 CH 42, 155 / Ant. 1 + Ant. 2 + Ant. 3
<b>Test Date</b>	Jul. 20, 2014		

**Channel 42**

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	Remark	T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm	
1	5150.00	69.26	74.00	-4.74	66.31	4.34	33.14	34.53	Peak	21	101 VERTICAL
2	5150.00	53.98	54.00	-0.02	51.03	4.34	33.14	34.53	Average	21	101 VERTICAL
3	5219.62	110.61			107.51	4.38	33.25	34.53	Peak	21	101 VERTICAL
4	5227.95	93.25			90.12	4.39	33.27	34.53	Average	21	101 VERTICAL

Item 3, 4 are the fundamental frequency at 5210 MHz.

**Channel 155**

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	Remark	T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm	
1	5149.68	67.42	74.00	-6.58	64.47	4.34	33.14	34.53	Peak	261	113 VERTICAL
2	5150.00	53.70	54.00	-0.30	50.75	4.34	33.14	34.53	Average	261	113 VERTICAL
3	5201.60	121.58			118.52	4.37	33.22	34.53	Peak	261	113 VERTICAL
4	5201.60	109.67			106.61	4.37	33.22	34.53	Average	261	113 VERTICAL

Item 3, 4 are the fundamental frequency at 5775 MHz.

<b>Temperature</b>	23°C	<b>Humidity</b>	61%
<b>Test Engineer</b>	Magic Lai	<b>Configurations</b>	IEEE 802.11a CH 36, 40, 48 / Ant. 1 + Ant. 2 + Ant. 3
<b>Test Date</b>	Jul. 20, 2014		

**Channel 36**

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		deg	cm	
1	5145.83	70.83	74.00	-3.17	67.88	4.34	33.14	34.53	Peak	174	121	VERTICAL
2	5147.28	53.93	54.00	-0.07	50.98	4.34	33.14	34.53	Average	174	121	VERTICAL
3	5185.93	108.61			105.59	4.36	33.19	34.53	Average	174	121	VERTICAL
4	5186.41	120.36			117.34	4.36	33.19	34.53	Peak	174	121	VERTICAL

Item 3, 4 are the fundamental frequency at 5180 MHz.

**Channel 40**

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		deg	cm	
1	5149.68	67.42	74.00	-6.58	64.47	4.34	33.14	34.53	Peak	261	113	VERTICAL
2	5150.00	53.70	54.00	-0.30	50.75	4.34	33.14	34.53	Average	261	113	VERTICAL
3	5201.60	121.58			118.52	4.37	33.22	34.53	Peak	261	113	VERTICAL
4	5201.60	109.67			106.61	4.37	33.22	34.53	Average	261	113	VERTICAL

Item 3, 4 are the fundamental frequency at 5200 MHz.

**Channel 48**

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		deg	cm	
1	5145.67	44.56	54.00	-9.44	41.61	4.34	33.14	34.53	Average	182	108	VERTICAL
2	5150.00	64.20	74.00	-9.80	61.25	4.34	33.14	34.53	Peak	182	108	VERTICAL
3	5245.77	123.45			120.28	4.40	33.30	34.53	Peak	182	108	VERTICAL
4	5245.77	111.84			108.67	4.40	33.30	34.53	Average	182	108	VERTICAL
5	5350.00	55.12	74.00	-18.88	51.72	4.47	33.46	34.53	Peak	182	108	VERTICAL
6	5350.00	43.95	54.00	-10.05	40.55	4.47	33.46	34.53	Average	182	108	VERTICAL

Item 3, 4 are the fundamental frequency at 5240 MHz.

<b>Temperature</b>	23°C	<b>Humidity</b>	61%
<b>Test Engineer</b>	Magic Lai	<b>Configurations</b>	IEEE 802.11a CH 149, 157, 165 / Ant. 1 + Ant. 2 + Ant. 3
<b>Test Date</b>	Jul. 20, 2014		

**Channel 149**

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	Remark	T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm	
1	5714.68	68.12	68.20	-0.08	63.67	4.71	34.32	34.58 Peak	176	107	VERTICAL
2	5724.36	74.10	78.20	-4.10	69.59	4.72	34.37	34.58 Peak	176	107	VERTICAL
3	5741.15	117.26			112.69	4.73	34.42	34.58 Peak	176	107	VERTICAL
4	5741.64	104.13			99.56	4.73	34.42	34.58 Average	176	107	VERTICAL

Item 3, 4 are the fundamental frequency at 5745 MHz.

**Channel 157**

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	Remark	T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm	
1	5713.08	68.04	68.20	-0.16	63.59	4.71	34.32	34.58 Peak	146	108	VERTICAL
2	5724.04	76.46	78.20	-1.74	71.95	4.72	34.37	34.58 Peak	146	108	VERTICAL
3	5783.72	121.15			16.46	4.75	34.53	34.59 Peak	146	108	VERTICAL
4	5784.04	107.70			03.01	4.75	34.53	34.59 Average	146	108	VERTICAL
5	5853.21	71.16	78.20	-7.04	66.23	4.80	34.73	34.60 Peak	146	108	VERTICAL
6	5864.49	66.63	68.20	-1.57	61.63	4.81	34.79	34.60 Peak	146	108	VERTICAL

Item 3, 4 are the fundamental frequency at 5785 MHz.

**Channel 165**

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	Remark	T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm	
1	5820.67	118.00			113.13	4.79	34.68	34.60 Peak	354	101	VERTICAL
2	5820.83	105.43			100.56	4.79	34.68	34.60 Average	354	101	VERTICAL
3	5850.32	73.19	78.20	-5.01	68.26	4.80	34.73	34.60 Peak	354	101	VERTICAL
4	5860.16	68.09	68.20	-0.11	63.09	4.81	34.79	34.60 Peak	354	101	VERTICAL

Item 1, 2 are the fundamental frequency at 5825 MHz.

Note:

Emission level (dBuV/m) = 20 log Emission level (uV/m)

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level

## 4.8. Frequency Stability Measurement

### 4.8.1. Limit

In-band emission is maintained within the band of operation under all conditions of normal operation as specified in the user's manual.

The transmitter center frequency tolerance shall be  $\pm 20$  ppm maximum for the 5 GHz band (IEEE 802.11n specification).

### 4.8.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	Entire absence of modulation emissions bandwidth
RBW	10 kHz
VBW	10 kHz
Sweep Time	Auto

### 4.8.3. Test Procedures

1. The transmitter output (antenna port) was connected to the spectrum analyzer.
2. EUT have transmitted absence of modulation signal and fixed channelize.
3. Set the spectrum analyzer span to view the entire absence of modulation emissions bandwidth.
4. Set RBW = 10 kHz, VBW = 10 kHz with peak detector and maxhold settings.
5.  $f_c$  is declaring of channel frequency. Then the frequency error formula is  $(f_c - f) / f_c \times 10^6$  ppm and the limit is less than  $\pm 20$  ppm (IEEE 802.11n specification).
6. The test extreme voltage is to change the primary supply voltage from 85 to 115 percent of the nominal value
7. Extreme temperature is  $5^\circ\text{C} \sim 40^\circ\text{C}$ .

### 4.8.4. Test Setup Layout

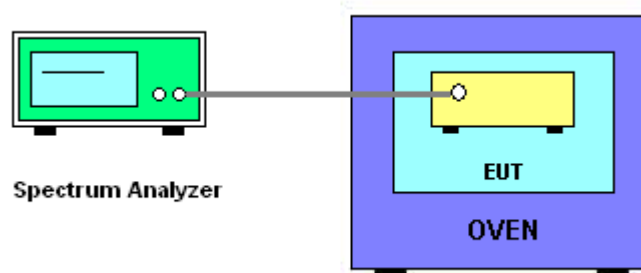

#### 4.8.5. Test Deviation

There is no deviation with the original standard.

#### 4.8.6. EUT Operation during Test

The EUT was programmed to be in continuously un-modulation transmitting mode.

#### 4.8.7. Test Result of Frequency Stability

<b>Temperature</b>	21°C	<b>Humidity</b>	62%
<b>Test Engineer</b>	Magic Lai	<b>Test Date</b>	Jul. 29, 2014

#### Voltage vs. Frequency Stability

Voltage	Measurement Frequency (MHz)
(V)	5200 MHz
126.50	5199.9972
110.00	5199.9976
93.50	5199.9980
Max. Deviation (MHz)	0.002800
Max. Deviation (ppm)	0.54

#### Temperature vs. Frequency Stability

Temperature	Measurement Frequency (MHz)
(°C)	5200 MHz
5	5199.9970
20	5199.9976
30	5199.9986
40	5199.9982
Max. Deviation (MHz)	0.003000
Max. Deviation (ppm)	0.58

## 4.9. Antenna Requirements

### 4.9.1. Limit

Except for special regulations, the Low-power Radio-frequency Devices must not be equipped with any jacket for installing an antenna with extension cable. An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that the user can replace a broken antenna, but the use of a standard antenna jack or electrical connector is prohibited. Further, this requirement does not apply to intentional radiators that must be professionally installed.

### 4.9.2. Antenna Connector Construction

Please refer to section 3.3 in this test report; antenna connector complied with the requirements.



## 5. LIST OF MEASURING EQUIPMENTS

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
EMI Test Receiver	R&S	ESCS 30	100355	9 kHz ~ 2.75 GHz	Apr. 23, 2014	Conduction (CO01-CB)
LISN	F.C.C.	FCC-LISN-50-16-2	04083	150 kHz ~ 100 MHz	Nov. 23, 2013	Conduction (CO01-CB)
LISN	Schwarzbeck	NSLK 8127	8127478	9kHz ~ 30MHz	Nov. 11, 2013	Conduction (CO01-CB)
COND Cable	Woken	Cable	01	150 kHz ~ 30 MHz	Dec. 04, 2013	Conduction (CO01-CB)
Software	Audix	E3	5.410e	-	N.C.R.	Conduction (CO01-CB)
BILOG ANTENNA	Schaffner	CBL6112B	2928	30MHz ~ 2GHz	Dec. 27, 2013	Radiation (03CH01-CB)
Loop Antenna	Teseq	HLA 6120	24155	9 kHz - 30 MHz	Nov. 05, 2012*	Radiation (03CH01-CB)
Horn Antenna	EMCO	3115	00075790	750MHz~18GHz	Nov. 01, 2013	Radiation (03CH01-CB)
Horn Antenna	SCHWARZBEAK	BBHA 9170	BBHA9170252	15GHz ~ 40GHz	Dec. 17, 2013	Radiation (03CH01-CB)
Pre-Amplifier	Agilent	8447D	2944A10991	0.1MHz ~ 1.3GHz	Nov. 12, 2013	Radiation (03CH01-CB)
Pre-Amplifier	Agilent	8449B	3008A02310	1GHz ~ 26.5GHz	Dec. 16, 2013	Radiation (03CH01-CB)
Pre-Amplifier	WM	TF-130N-R1	923365	26GHz ~ 40GHz	Oct. 23, 2013	Radiation (03CH01-CB)
Spectrum analyzer	R&S	FSP40	100019	9kHz~40GHz	Dec. 02, 2013	Radiation (03CH01-CB)
EMI Test Receiver	Agilent	N9038A	MY52260123	9kHz ~ 8GHz	Dec. 12, 2013	Radiation (03CH01-CB)
Turn Table	INN CO	CO 2000	N/A	0 ~ 360 degree	N.C.R.	Radiation (03CH01-CB)
Antenna Mast	INN CO	CO2000	N/A	1 m - 4 m	N.C.R.	Radiation (03CH01-CB)
RF Cable-low	Woken	Low Cable-1	N/A	30 MHz - 1 GHz	Nov. 17, 2013	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-3	N/A	1 GHz - 40 GHz	Nov. 17, 2013	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-4	N/A	1 GHz - 40 GHz	Nov. 17, 2013	Radiation (03CH01-CB)
Signal analyzer	R&S	FSV40	100979	9kHz~40GHz	Nov. 29, 2013	Conducted (TH01-CB)
Signal analyzer	Agilent	N9010A	MY52220519	10Hz~44GHz	Dec. 11, 2013	Conducted (TH01-CB)
Temp. and Humidity Chamber	Ten Billion	TTH-D3SP	TBN-931011	-30~100 degree	Jun. 03, 2014	Conducted (TH01-CB)
RF Cable-high	Woken	High Cable-7	-	1 GHz - 26.5 GHz	Nov. 17, 2013	Conducted (TH01-CB)
RF Cable-high	Woken	High Cable-8	-	1 GHz - 26.5 GHz	Nov. 17, 2013	Conducted (TH01-CB)



Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
RF Cable-high	Woken	High Cable-9	-	1 GHz – 26.5 GHz	Nov. 17, 2013	Conducted (TH01-CB)
RF Cable-high	Woken	High Cable-10	-	1 GHz – 26.5 GHz	Nov. 17, 2013	Conducted (TH01-CB)
RF Cable-high	Woken	High Cable-11	-	1 GHz – 26.5 GHz	Nov. 17, 2013	Conducted (TH01-CB)
Power Sensor	Anritsu	MA2411B	0917223	300MHz~40GHz	Sep. 18, 2013	Conducted (TH01-CB)
Power Meter	Anritsu	ML2495A	1035008	300MHz~40GHz	Sep. 18, 2013	Conducted (TH01-CB)

Note: Calibration Interval of instruments listed above is one year.

“\*” Calibration Interval of instruments listed above is two years.

NCR means Non-Calibration required.

## 6. MEASUREMENT UNCERTAINTY

Test Items	Uncertainty	Remark
Conducted Emission (150kHz ~ 30MHz)	2.4 dB	Confidence levels of 95%
Radiated Emission (30MHz ~ 1,000MHz)	3.6 dB	Confidence levels of 95%
Radiated Emission (1GHz ~ 18GHz)	3.7 dB	Confidence levels of 95%
Radiated Emission (18GHz ~ 40GHz)	3.5 dB	Confidence levels of 95%
Conducted Emission	1.7 dB	Confidence levels of 95%