

# Regulatory WLAN Antenna Information (Template)

*English Language Required for Intel Regulatory Review / Approval*

**(OEM/ODM or antenna vendor is required to complete this document with platform antenna information.**

**Remove Intel references and make this your own document)**

Platform information										
Brand	ODM	RMN	Intel platform (ex: Yes, No or NA)	Platform type (ex: regular NB, convertible PC, AIO...etc)	*SAR minimum separation (mm)					
HP Inc.	Wistron	Gracebay (TPN-W157)	Yes	Convertible PC (NB)	3.6					
*****Please fill in exact product model name and make sure the model name is visible on product cover or any parts for end users recognize for authority inspection.										
Antenna information										
Vendor		Type	Antenna Part number (Main/Tx2)				Antenna Part number (Aux/Tx1)			
INPAQ TECHNOLOGY CO., LTD		PIFA	025.9027T.0001 (WA-P-LE-03-018)				025.9027U.0001 (WA-P-LE-03-019)			
Peak gain w/ cable loss (dBi)*										
	2.4GHz 2400-2483.5 MHz	5.2GHz 5150-5250MHz	5.3GHz 5250-5350MHz	5.6GHz 5470-5725MHz	5.8GHz 5725-5850MHz	5.9GHz 5850-5895MHz	6.2GHz 5925-6425MHz	6.5GHz 6425-6525MHz	6.7GHz 6525-6875MHz	7.0 GHz 6875-7125MHz
Main	1.80	1.91	1.85	2.51	1.68	2.55	2.42	1.86	2.06	2.46
Aux	2.11	1.97	1.67	2.13	2.38	2.04	1.75	1.60	1.83	2.51
Module Information										
Model	Form factor and suffixes									
MT7921 (Tequila)	Mediatek Wi-Fi 6 MT7921 + BT5.2 (802.11ax 2x2, MU-MIMO supported, supporting gigabit data rate)									



# Antenna Information

## Section 1. Antenna Assembly Specifications

1A Antenna Part Number	1B Manufacturer	1C Antenna Type	1D Cable Assembly Part Number and Information	Freq Range MHz	1E * Peak Gain W/ Cable loss (dBi)	1F Peak Gain w/o Cable Loss (dBi)	1G Max VSWR	1H Cable Loss (dB)
(P/N: 025.9027T.0001 (WA-P-LE-03-018) Main Antenna	INPAQ TECHNOLOGY CO., LTD	PIFA	50 ohm Coaxial  length: 377 mm diameter: 1.13 LLS  Connector Type: IPEX  MHF-4L 20565-001R-13	2400-2495	1.80	2.85	3.00 max	1.05
				5150-5250	1.91	3.47	3.00 max	1.56
				5250-5350	1.85	3.42	3.00 max	1.57
				5470-5725	2.51	4.12	3.00 max	1.61
				5725-5850	1.68	3.31	3.00 max	1.63
				5850-5895	2.55	4.19	3.00 max	1.64
				5925-6425	2.42	4.13	3.00 max	1.71
				6425-6525	1.86	3.60	3.00 max	1.74
				6525-6875	2.06	3.85	3.00 max	1.79
6875-7125	2.46	4.30	3.00 max	1.84				
(P/N: 025.9027U.0001 (WA-P-LE-03-019) Aux Antenna	INPAQ TECHNOLOGY CO., LTD	PIFA	50 ohm Coaxial  length:297 mm diameter: 1.13 LLS  Connector Type: IPEX  MHF-4L 20565-001R-13	2400-2495	2.11	2.93	3.00 max	0.82
				5150-5250	1.97	3.20	3.00 max	1.23
				5250-5350	1.67	2.91	3.00 max	1.24
				5470-5725	2.13	3.39	3.00 max	1.26
				5725-5850	2.38	3.66	3.00 max	1.28
				5850-5895	2.04	3.34	3.00 max	1.30
				5925-6425	1.75	3.10	3.00 max	1.35
				6425-6525	1.60	2.97	3.00 max	1.37
				6525-6875	1.83	3.24	3.00 max	1.41
6875-7125	2.51	3.96	3.00 max	1.45				


## Section 3. Radiation characteristics of antenna loaded in Host Platform

### Main Antenna

#### Max Antenna 2D Radiation Pattern 2400 – 2495 MHz

Frequency (MHz)	Horizontal+ Vertical (dBi) peak (dBi)
2400-2495	1.80


- TOTAL
- H\_POL
- V\_POL

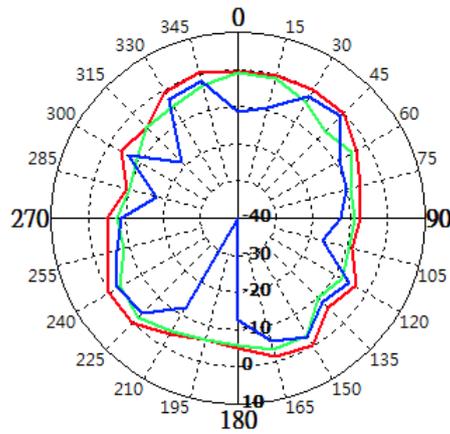

#### Max Antenna 2D Radiation Pattern 5150-5250 MHz

Frequency (MHz)	Horizontal+ Vertical (dBi) peak (dBi)
5150-5250	1.91


- TOTAL
- H\_POL
- V\_POL

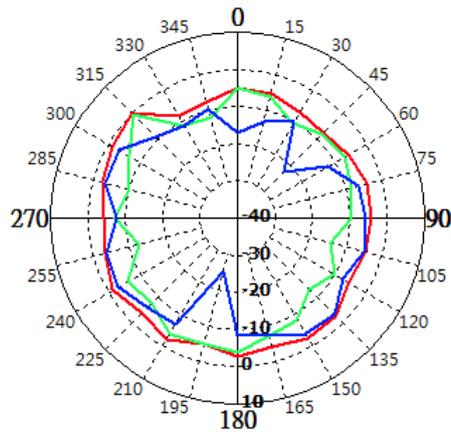

### Max Antenna 2D Radiation Pattern 5250-5350 MHz

Frequency (MHz)	Horizontal+ Vertical (dBi) peak (dBi)
5250-5350	1.85


- TOTAL
- H\_POL
- V\_POL

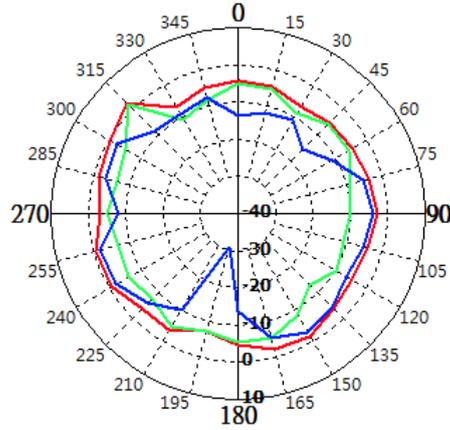

### Max Antenna 2D Radiation Pattern 5470-5725 MHz

Frequency (MHz)	Horizontal+ Vertical (dBi) peak (dBi)
5470-5725	2.51


- TOTAL
- H\_POL
- V\_POL

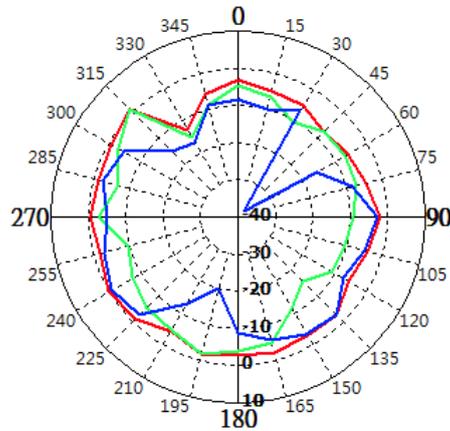

### Max Antenna 2D Radiation Pattern 5725-5850 MHz

Frequency (MHz)	Horizontal+ Vertical (dBi) peak (dBi)
5725-5850	1.68


- TOTAL
- H\_POL
- V\_POL

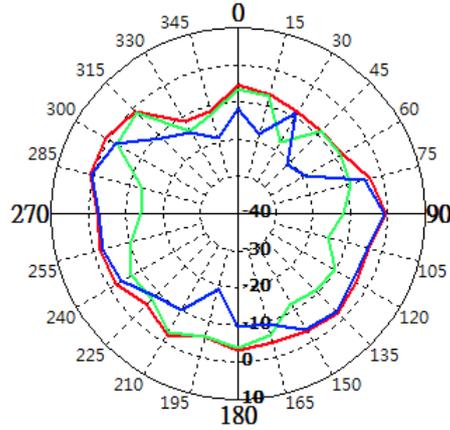

### Max Antenna 2D Radiation Pattern 5850-5895 MHz

Frequency (MHz)	Horizontal+ Vertical (dBi) peak (dBi)
5850-5895	2.55


- TOTAL
- H\_POL
- V\_POL

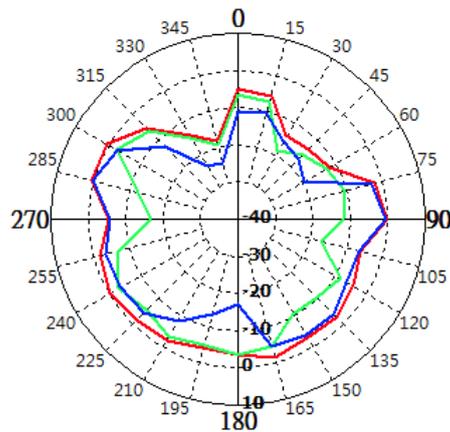

### Max Antenna 2D Radiation Pattern 5925-6425 MHz

Frequency (MHz)	Horizontal+ Vertical (dBi) peak (dBi)
5925-6425	2.42


- TOTAL
- H\_POL
- V\_POL

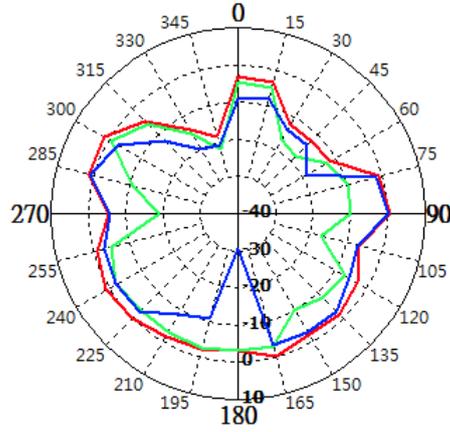

### Max Antenna 2D Radiation Pattern 6425-6525 MHz

Frequency (MHz)	Horizontal+ Vertical (dBi) peak (dBi)
6425-6525	1.86


- TOTAL
- H\_POL
- V\_POL

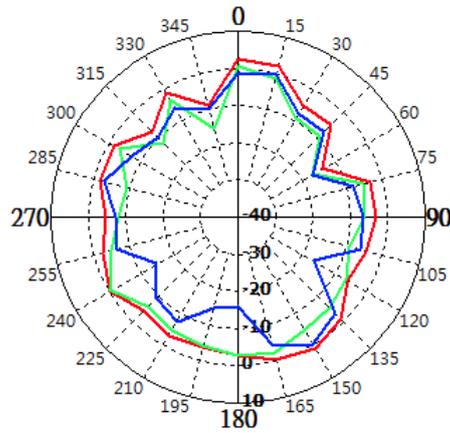

### Max Antenna 2D Radiation Pattern 6525-6875 MHz

Frequency (MHz)	Horizontal+ Vertical (dBi) peak (dBi)
6525-6875	2.06


- TOTAL
- H\_POL
- V\_POL

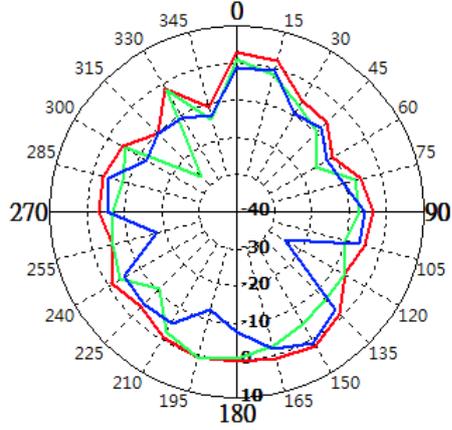

### Max Antenna 2D Radiation Pattern 6875-7125 MHz

Frequency (MHz)	Horizontal+ Vertical (dBi) peak (dBi)
6875-7125	2.46

- TOTAL
- H\_POL
- V\_POL

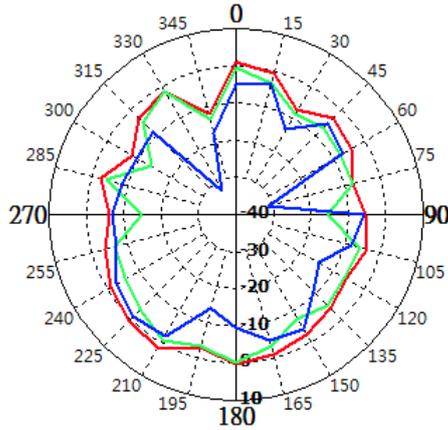


## Auxiliary Antenna

### Max Antenna 2D Radiation Pattern 2400 – 2483.5 MHz

Frequency (MHz)	Horizontal+ Vertical (dBi) peak (dBi)
2400-2483.5	2.11


- TOTAL
- H\_POL
- V\_POL

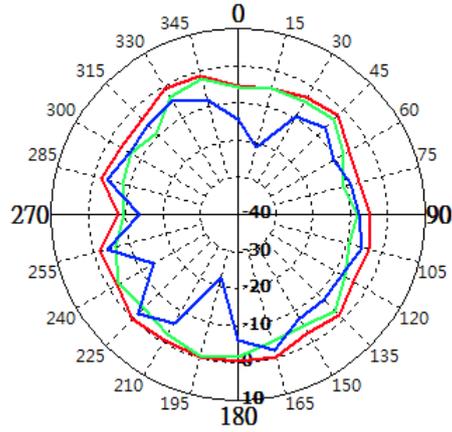

### Max Antenna 2D Radiation Pattern 5150-5250 MHz

Frequency (MHz)	Horizontal+ Vertical (dBi) peak (dBi)
5150-5250	1.97


- TOTAL
- H\_POL
- V\_POL

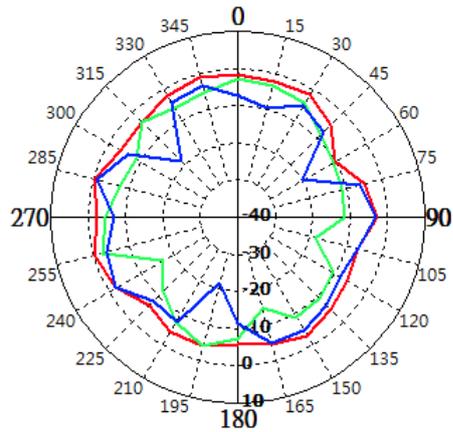

### Max Antenna 2D Radiation Pattern 5250-5350 MHz

Frequency (MHz)	Horizontal+ Vertical (dBi) peak (dBi)
5250-5350	1.67


- TOTAL
- H\_POL
- V\_POL

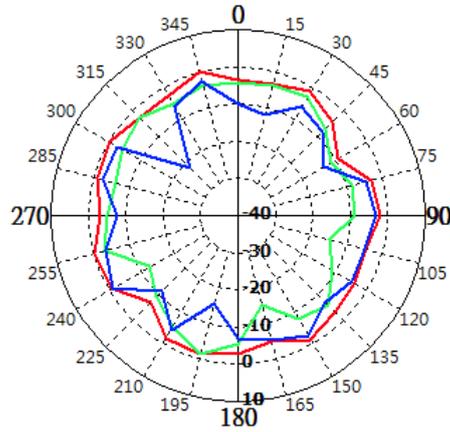

### Max Antenna 2D Radiation Pattern 5470-5725 MHz

Frequency (MHz)	Horizontal+ Vertical (dBi) peak (dBi)
5470-5725	2.13


- TOTAL
- H\_POL
- V\_POL

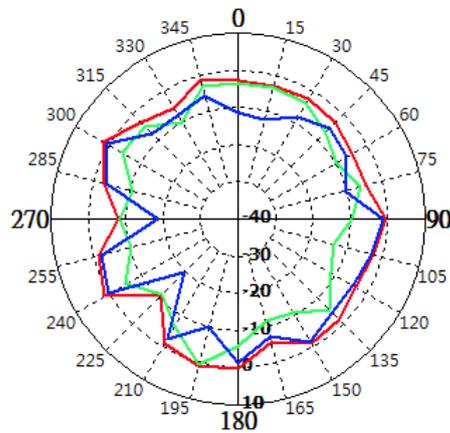

### Max Antenna 2D Radiation Pattern 5725-5850 MHz

Frequency (MHz)	Horizontal+ Vertical (dBi) peak (dBi)
5725-5850	2.38


- TOTAL
- H\_POL
- V\_POL

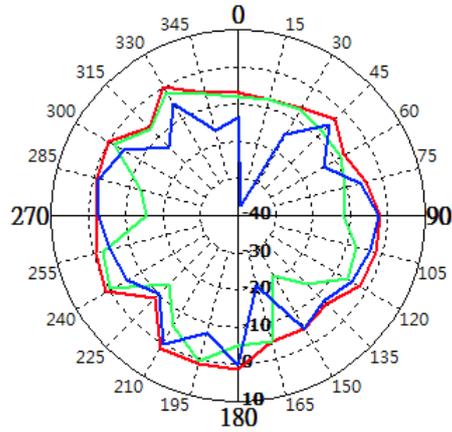

### Max Antenna 2D Radiation Pattern 5850-5895 MHz

Frequency (MHz)	Horizontal+ Vertical (dBi) peak (dBi)
5850-5895	2.04


- TOTAL
- H\_POL
- V\_POL

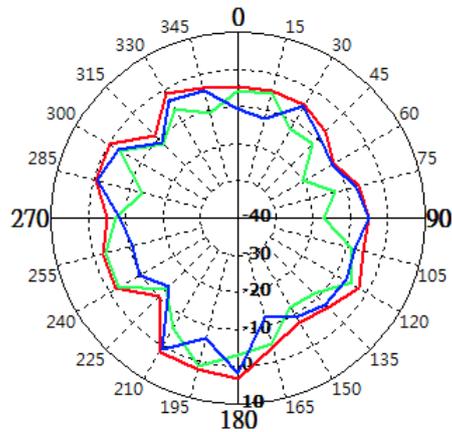

### Max Antenna 2D Radiation Pattern 5925-6425 MHz

Frequency (MHz)	Horizontal+ Vertical (dBi) peak (dBi)
5925-6425	1.75


- TOTAL
- H\_POL
- V\_POL

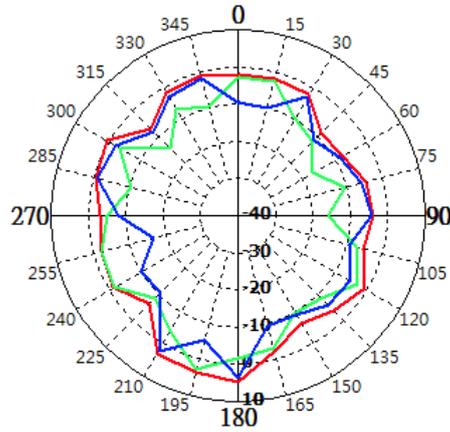

### Max Antenna 2D Radiation Pattern 6425-6525 MHz

Frequency (MHz)	Horizontal+ Vertical (dBi) peak (dBi)
6425-6525	1.60


- TOTAL
- H\_POL
- V\_POL

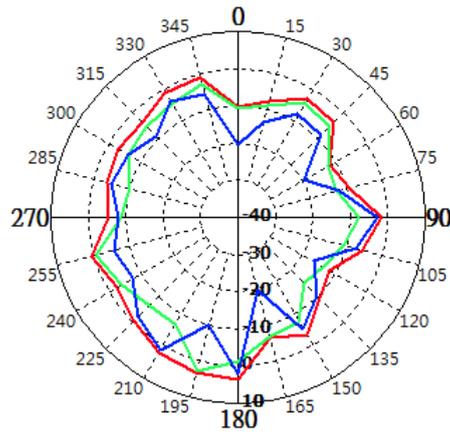

### Max Antenna 2D Radiation Pattern 6525-6875 MHz

Frequency (MHz)	Horizontal+ Vertical (dBi) peak (dBi)
6525-6875	1.83

- TOTAL
- H\_POL
- V\_POL

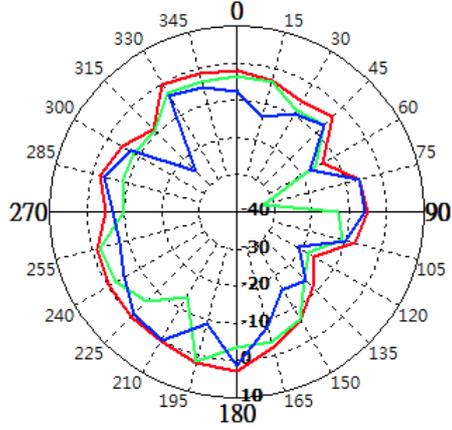

### Max Antenna 2D Radiation Pattern 6875-7125 MHz

Frequency (MHz)	Horizontal+ Vertical (dBi) peak (dBi)
6875-7125	2.51

- TOTAL
- H\_POL
- V\_POL

