

#01_WLAN2.4GHz_802.11b 1Mbps_Bottom of Laptop_0mm_Ch6 ;Ant 1+2

Communication System: 802.11b; Frequency: 2437 MHz; Duty Cycle: 1:1.019

Medium: HSL_2450_210428 Medium parameters used : $f = 2437$ MHz; $\sigma = 1.83$ S/m; $\epsilon_r = 40.088$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.4 °C ; Liquid Temperature : 22.4 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7439; ConvF(7.52, 7.52, 7.52) @ 2437 MHz; Calibrated: 2021/2/23
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn656; Calibrated: 2021/1/22
- Phantom: ELI v4.0; Type: QDOVA001BB; Serial: 1026
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Area Scan (61x231x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 1.68 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 26.45 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 2.29 W/kg

SAR(1 g) = 0.993 W/kg; SAR(10 g) = 0.465 W/kg

Maximum value of SAR (measured) = 1.80 W/kg


Zoom Scan 2 (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 26.45 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 1.23 W/kg

SAR(1 g) = 0.561 W/kg; SAR(10 g) = 0.257 W/kg

Maximum value of SAR (measured) = 0.637 W/kg

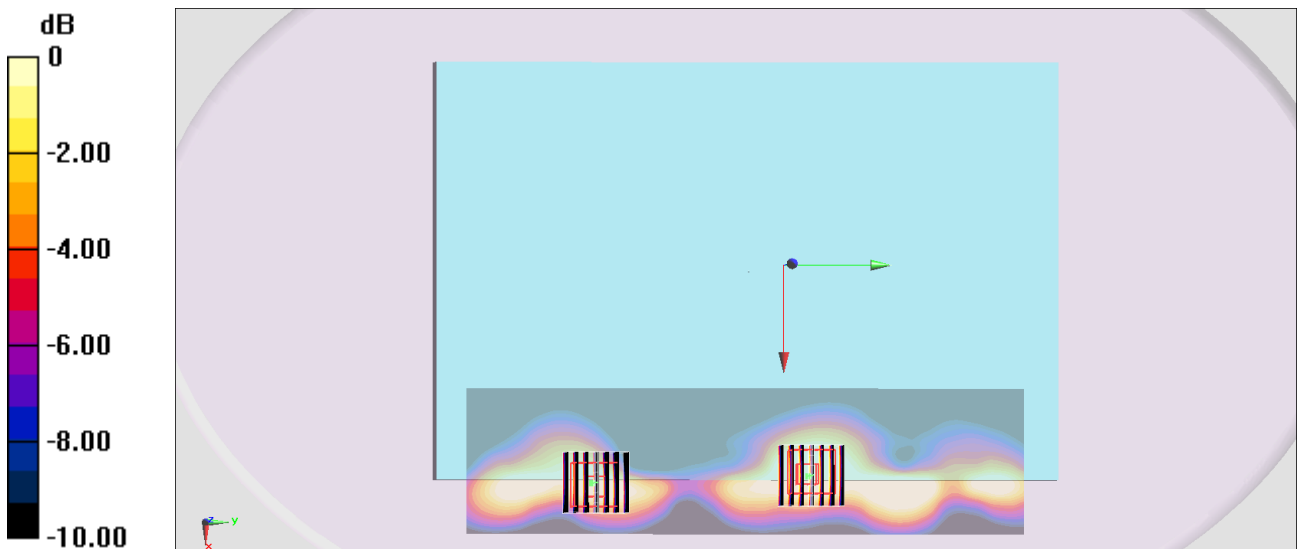

0 dB = 0.637 W/kg = -1.96 dBW/kg

#02_WLAN5GHz_802.11n-HT40 MCS0_Bottom of Laptop_0mm_Ch62 ;Ant 1+2

Communication System: 802.11n; Frequency: 5310 MHz; Duty Cycle: 1:1.003

Medium: HSL_5G_210428 Medium parameters used: $f = 5310$ MHz; $\sigma = 4.646$ S/m; $\epsilon_r = 34.894$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.4 °C ; Liquid Temperature : 22.4 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7439; ConvF(5.23, 5.23, 5.23) @ 5310 MHz; Calibrated: 2021/2/23
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn656; Calibrated: 2021/1/22
- Phantom: ELI v4.0; Type: QDOVA001BB; Serial: 1026
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Area Scan (71x281x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 1.68 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 19.24 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 3.07 W/kg

SAR(1 g) = 0.800 W/kg; SAR(10 g) = 0.272 W/kg

Maximum value of SAR (measured) = 1.93 W/kg


Zoom Scan 2 (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 19.24 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 1.22 W/kg

SAR(1 g) = 0.303 W/kg; SAR(10 g) = 0.096 W/kg

Maximum value of SAR (measured) = 0.742 W/kg

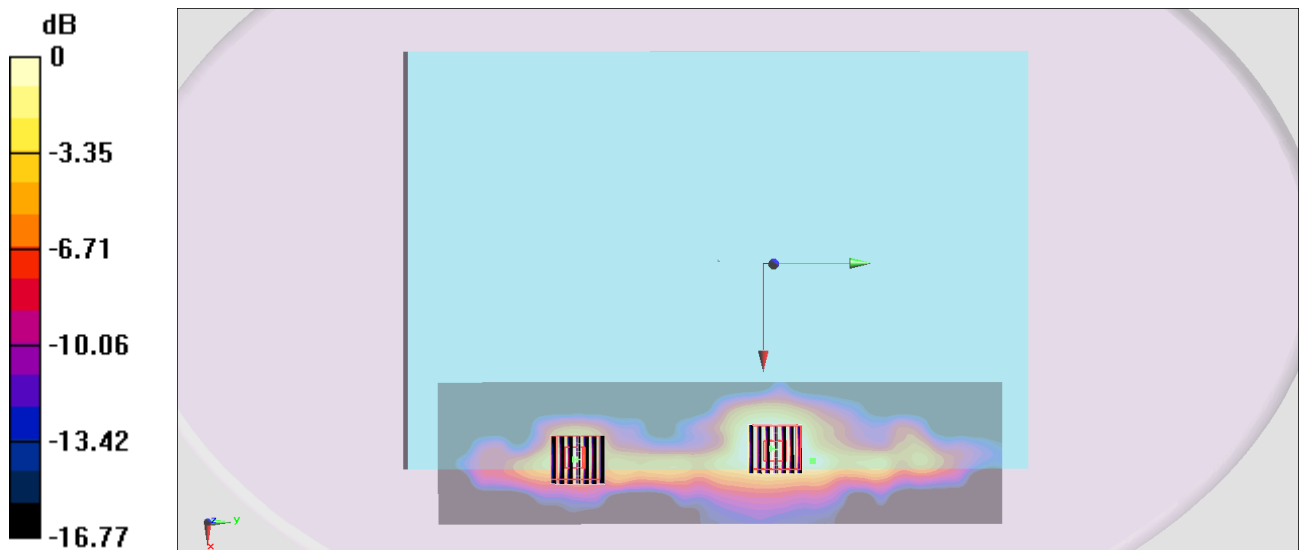

0 dB = 0.742 W/kg = -1.30 dBW/kg

#03_WLAN5GHz_802.11ac-VHT80 MCS0_Bottom of Laptop_0mm_Ch138 ;Ant1+2

Communication System: 802.11ac; Frequency: 5690 MHz; Duty Cycle: 1:1.006

Medium: HSL_5G_210429 Medium parameters used: $f = 5690$ MHz; $\sigma = 4.935$ S/m; $\epsilon_r = 36.205$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.3 °C ; Liquid Temperature : 22.3 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7439; ConvF(4.81, 4.81, 4.81) @ 5690 MHz; Calibrated: 2021/2/23
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn656; Calibrated: 2021/1/22
- Phantom: ELI v4.0; Type: QDOVA001BB; Serial: 1026
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Area Scan (71x281x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 1.31 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 16.99 V/m; Power Drift = 0.08 dB

Peak SAR (extrapolated) = 2.46 W/kg

SAR(1 g) = 0.637 W/kg; SAR(10 g) = 0.199 W/kg

Maximum value of SAR (measured) = 1.47 W/kg


Zoom Scan 2 (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 16.99 V/m; Power Drift = 0.08 dB

Peak SAR (extrapolated) = 1.56 W/kg

SAR(1 g) = 0.359 W/kg; SAR(10 g) = 0.109 W/kg

Maximum value of SAR (measured) = 0.889 W/kg

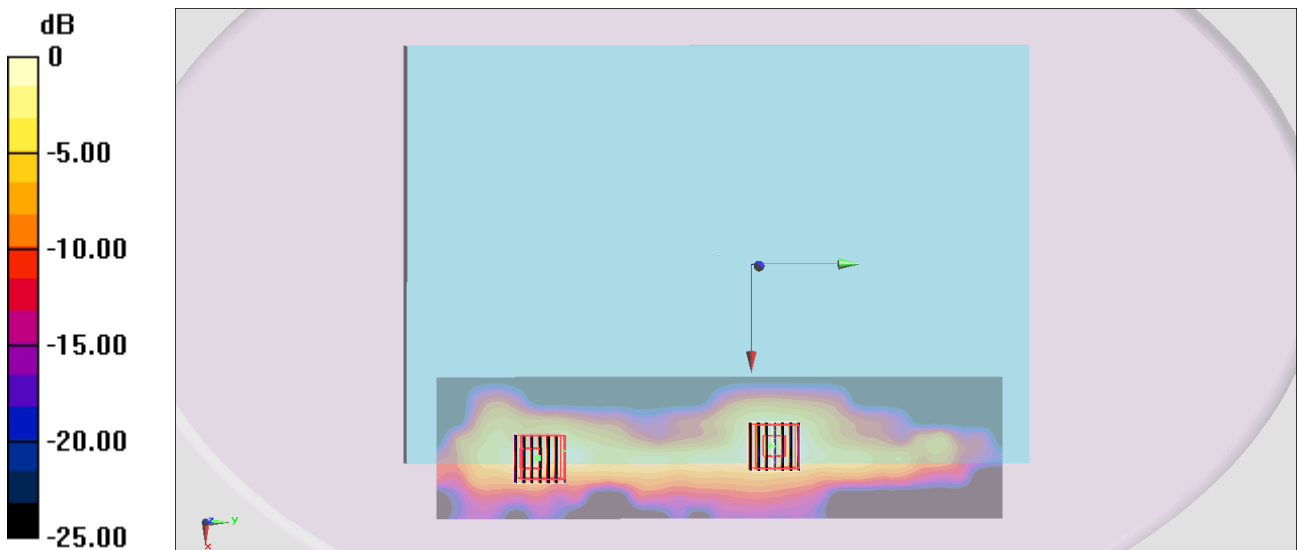

0 dB = 0.889 W/kg = -0.51 dBW/kg

#04_WLAN5GHz_802.11ac-VHT80 MCS0_Bottom of Laptop_0mm_Ch155 ;Ant 1+2

Communication System: 802.11ac ; Frequency: 5775 MHz;Duty Cycle: 1:1.006

Medium: HSL_5G_210429 Medium parameters used: $f = 5775$ MHz; $\sigma = 5.033$ S/m; $\epsilon_r = 36.118$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.3 °C ; Liquid Temperature : 22.3 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7439; ConvF(4.81, 4.81, 4.81) @ 5775 MHz; Calibrated: 2021/2/23
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn656; Calibrated: 2021/1/22
- Phantom: ELI v4.0; Type: QDOVA001BB; Serial: 1026
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

Area Scan (71x281x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 1.57 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 18.41 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 2.99 W/kg

SAR(1 g) = 0.707 W/kg; SAR(10 g) = 0.235 W/kg

Maximum value of SAR (measured) = 1.79 W/kg


Zoom Scan 2 (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 18.41 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 1.62 W/kg

SAR(1 g) = 0.375 W/kg; SAR(10 g) = 0.112 W/kg

Maximum value of SAR (measured) = 0.962 W/kg

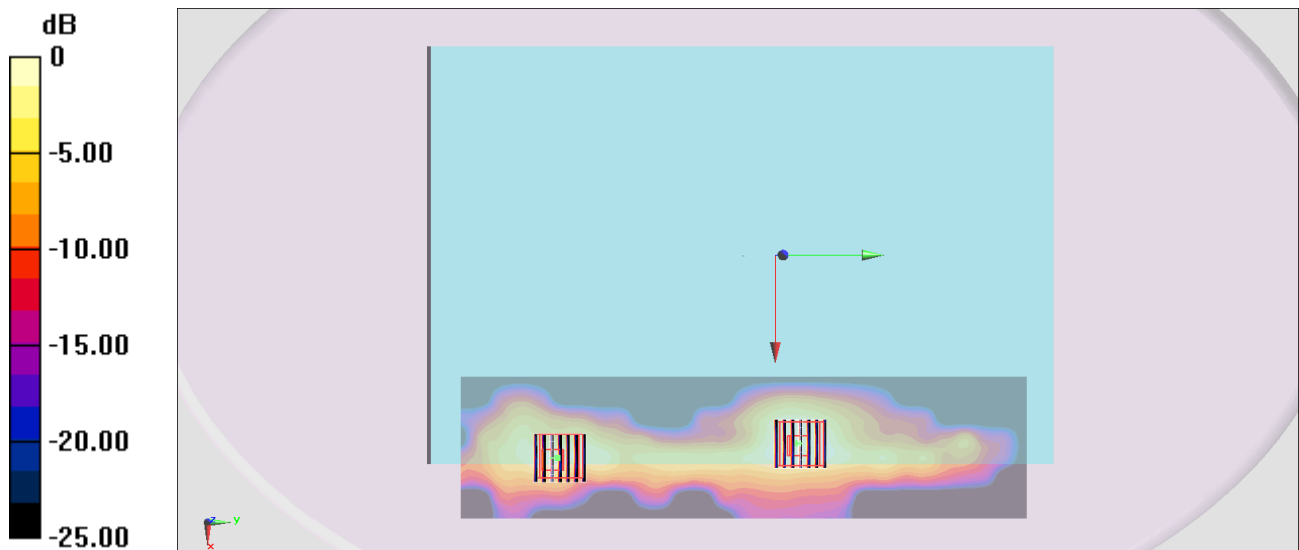

0 dB = 0.962 W/kg = -0.17 dBW/kg

#05_Bluetooth_1Mbps_Bottom of Laptop_0mm_Ch39 ;Ant 1

Communication System: Bluetooth; Frequency: 2441 MHz; Duty Cycle: 1:1.302

Medium: HSL_2450_210430 Medium parameters used: $f = 2441$ MHz; $\sigma = 1.777$ S/m; $\epsilon_r = 39.559$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5 °C ; Liquid Temperature : 22.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7439; ConvF(7.52, 7.52, 7.52) @ 2441 MHz; Calibrated: 2021/2/23
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn656; Calibrated: 2021/1/22
- Phantom: ELI v4.0; Type: QDOVA001BB; Serial: 1026
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Area Scan (61x151x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.374 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 14.89 V/m; Power Drift = 0.10 dB

Peak SAR (extrapolated) = 0.507 W/kg

SAR(1 g) = 0.223 W/kg; SAR(10 g) = 0.098 W/kg

Maximum value of SAR (measured) = 0.383 W/kg

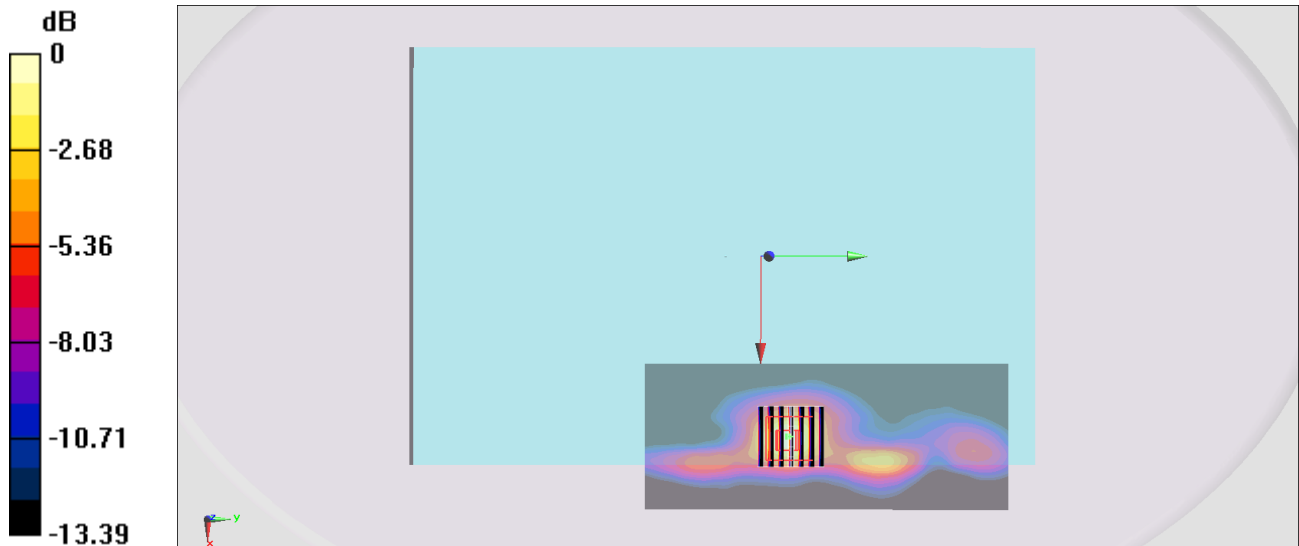

0 dB = 0.383 W/kg = -4.17 dBW/kg

#06_WLAN6GHz_802.11ax-HE160 MCS0_Bottom of Laptop_0mm_Ch15;Ant 1+2

Communication System: 802.11ax; Frequency: 6025.0

Medium: HSL. Medium parameters used: $f = 6025.0$ MHz; $\sigma = 5.48$ S/m; $\epsilon_r = 36.1$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7439; ConvF(5.7, 5.7, 5.7); Calibrated: 2021-02-23
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn656; Calibrated: 2021-01-22
- Phantom: ELI V5.0 (20deg probe tilt); Serial: 1238; Section: Flat
- Measurement Software: cDASY6 V6.6.0.13926
- UID: WLAN, 10755-AAC
- MAIA: Area Scan: N/A; Zoom Scan: N/A

Area Scan (102.0 mm x 255.0 mm): Measurement Grid: 8.5 mm x 8.5 mm

SAR (1g) = 0.256 W/kg; SAR (10g) = 0.087 W/kg;

Zoom Scan (22.0 mm x 22.0 mm x 22.0 mm)/Cube 0: Measurement Grid: 3.4 mm x 3.4 mm x 1.4 mm

Power Drift = 0.14 dB

SAR (1g) = 0.172 W/kg; SAR (10g) = 0.050 W/kg;

Zoom Scan (22.0 mm x 22.0 mm x 22.0 mm)/Cube 1: Measurement Grid: 3.4 mm x 3.4 mm x 1.4 mm

Power Drift = 0.14 dB

SAR (1g) = 0.285 W/kg; SAR (10g) = 0.093 W/kg;

