FCC RF Test Report

Report No.: FW051802

: 1 of 21

: Rev. 01

Report Issued Date: Apr. 02, 2021

Report Template No.: BU5-FWLTE Version 2.0

Page Number

Report Version

APPLICANT : Fibocom Wireless Inc.

EQUIPMENT : 5G Module
BRAND NAME : Fibocom
MODEL NAME : FM350-GL

FCC ID : ZMOFM350GL

STANDARD : 47 CFR Part 2, and 90(S)

CLASSIFICATION : PCS Licensed Transmitter (PCB)

The product was received on May 18, 2020 and completely tested on Jan. 19, 2021. We, Sporton International (Shenzhen) Inc., would like to declare that the tested sample has been evaluated in accordance with the procedures given in ANSI C63.26-2015 and shown compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International (Shenzhen) Inc., the test report shall not be reproduced except in full.

Reviewed by: Derreck Chen / Supervisor

Frie Shih

Donale Chen

Approved by: Eric Shih / Manager

Sporton International (ShenZhen) Inc.

1/F, 2/F, Bldg 5, Shiling Industrial Zone, Xinwei Village, Xili, Nanshan, Shenzhen, 518055 People's Republic of China

TABLE OF CONTENTS

| RE | VISIC | ON HISTORY | 3 |
|----|-------|--|----|
| SL | IMMA | RY OF TEST RESULT | 4 |
| 1 | GEN | ERAL DESCRIPTION | 5 |
| | 1.1 | Applicant | 5 |
| | 1.2 | Manufacturer | |
| | 1.3 | Feature of Equipment Under Test | |
| | 1.4 | Product Specification of Equipment Under Test | |
| | 1.5 | Modification of EUT | 5 |
| | 1.6 | Maximum Conducted Power, Frequency Tolerance and Emission Designator | 6 |
| | 1.7 | Testing Site | |
| | 1.8 | Test Software | |
| | 1.9 | Applied Standards | 7 |
| 2 | TES | T CONFIGURATION OF EQUIPMENT UNDER TEST | 8 |
| | 2.1 | Test Mode | 8 |
| | 2.2 | Connection Diagram of Test System | 9 |
| | 2.3 | Support Unit used in test configuration and system | 9 |
| | 2.4 | Measurement Results Explanation Example | 9 |
| | 2.5 | Frequency List of Low/Middle/High Channels | 10 |
| 3 | TES | T RESULT | 11 |
| | 3.1 | Conducted Output Power Measurement | 11 |
| | 3.2 | 99% Occupied Bandwidth and 26dB Bandwidth Measurement | |
| | 3.3 | Emissions Mask Measurement | 13 |
| | 3.4 | Emissions Mask – Out Of Band Emissions Measurement | 15 |
| | 3.5 | Field Strength of Spurious Radiation Measurement | |
| | 3.6 | Frequency Stability Measurement | 18 |
| 4 | LIST | OF MEASURING EQUIPMENT | 20 |
| 5 | UNC | ERTAINTY OF EVALUATION | 21 |
| ΑF | PEND | DIX A. TEST RESULTS OF CONDUCTED TEST | |
| | | DIX B. TEST RESULTS OF RADIATED TEST | |
| Αħ | TENL | DIA B. 1631 REGULTS OF RADIATED 1631 | |
| ΑF | PEND | DIX C. SETUP PHOTOGRAPHS | |

TEL: 86-755-8637-9589 FAX: 86-755-8637-9595 FCC ID: ZMOFM350GL Page Number : 2 of 21
Report Issued Date : Apr. 02, 2021
Report Version : Rev. 01

Report No. : FW051802

REVISION HISTORY

| REPORT NO. | VERSION | DESCRIPTION | ISSUED DATE |
|------------|---------|-------------------------|---------------|
| FW051802 | Rev. 01 | Initial issue of report | Apr. 02, 2021 |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |

TEL: 86-755-8637-9589 FAX: 86-755-8637-9595 FCC ID: ZMOFM350GL Page Number : 3 of 21
Report Issued Date : Apr. 02, 2021
Report Version : Rev. 01

Report Template No.: BU5-FWLTE Version 2.0

SUMMARY OF TEST RESULT

| Report FCC Rule | | Description | Limit | Result | Remark |
|-----------------|--------------------|--|-------------------------------------|--------|--|
| 3.1 | §2.1046 | Conducted Output Power | Reporting only | PASS | - |
| 3.2 | §2.1049 §90.209 | Occupied Bandwidth and 26dB Bandwidth | Reporting only | PASS | - |
| 3.3 | §2.1051 §90.691 | Emission masks – In-band emissions | < 50+10log ₁₀ (P[Watts]) | PASS | - |
| 3.4 | §2.1051 §90.691 | Emission masks – Out of band emissions | < 43+10log ₁₀ (P[Watts]) | PASS | - |
| 3.5 | §2.1053 §90.691 | Field Strength of Spurious Radiation | < 43+10log ₁₀ (P[Watts]) | PASS | Under limit 49.37 dB at 3258.000 MHz |
| 3.6 | §2.1055 §90.213 | Frequency Stability for Temperature & Voltage | < 2.5 ppm | PASS | - |

Declaration of Conformity:

The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers.

Comments and Explanations:

The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.

TEL: 86-755-8637-9589 FAX: 86-755-8637-9595 FCC ID: ZMOFM350GL Page Number : 4 of 21
Report Issued Date : Apr. 02, 2021
Report Version : Rev. 01

Report Template No.: BU5-FWLTE Version 2.0

1 General Description

1.1 Applicant

Fibocom Wireless Inc.

1101, Tower A, Building 6, Shenzhen International Innovation Valley, Dashi 1st Rd, Nanshan, Shenzhen, China

Report No. : FW051802

1.2 Manufacturer

Fibocom Wireless Inc.

1101, Tower A, Building 6, Shenzhen International Innovation Valley, Dashi 1st Rd, Nanshan, Shenzhen, China

1.3 Feature of Equipment Under Test

| | Product Feature |
|---------------------------------|----------------------------|
| Equipment | 5G Module |
| Brand Name | Fibocom |
| Model Name | FM350-GL |
| FCC ID | ZMOFM350GL |
| EUT supports Radios application | WCDMA/LTE/5G NR |
| EOT Supports Radios application | GNSS |
| IMEI Code | Conducted: 862146050001310 |
| IIWEI Code | Radiation: 882146050002276 |
| HW Version | V1.0.6 |
| SW Version | 81600.0000.00.09.03.03 |
| EUT Stage | Identical Prototype |

Remark: The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.

1.4 Product Specification of Equipment Under Test

| Product Specification subjective to this standard | | | | | | | |
|---|--------------------------------------|--|--|--|--|--|--|
| Tx Frequency | 814 ~ 824 MHz | | | | | | |
| Rx Frequency | 859 ~ 869 MHz | | | | | | |
| Bandwidth | 1.4MHz / 3MHz / 5MHz / 10MHz / 15MHz | | | | | | |
| Maximum Output Power to Antenna | 23.69 dBm | | | | | | |
| Antenna Gain | 3.0 dBi | | | | | | |
| Type of Modulation | QPSK / 16QAM / 64QAM / 256QAM | | | | | | |

1.5 Modification of EUT

No modifications are made to the EUT during all test items.

 Sporton International (ShenZhen) Inc.
 Page Number
 : 5 of 21

 TEL: 86-755-8637-9589
 Report Issued Date
 : Apr. 02, 2021

 FAX: 86-755-8637-9595
 Report Version
 : Rev. 01

FCC ID : ZMOFM350GL Report Template No.: BU5-FWLTE Version 2.0

1.6 Maximum Conducted Power, Frequency Tolerance and Emission Designator

| L | TE Band 26 | | QPSK | | 16QAM | | | | |
|-------------|-----------------------------|------------------------------------|---------------------------------|-----------------------------|------------------------------------|---------------------------------|-----------------------------|--|--|
| BW (MHz) | Frequency Range (MHz) | Emission Designator (99%OBW) | Frequency Tolerance (ppm) | Maximum Conducted power (W) | Emission Designator (99%OBW) | Frequency Tolerance (ppm) | Maximum Conducted power (W) | | |
| 1.4 | 814.7 ~ 823.3 | 1M10G7D | - | 0.2291 | 1M10W7D | • | 0.1982 | | |
| 3 | 815.5 ~ 822.5 | 2M72G7D | - | 0.2307 | 2M72W7D | - | 0.2056 | | |
| 5 | 816.5 ~ 821.5 | 4M50G7D | - | 0.2339 | 4M50W7D | - | 0.2046 | | |
| 10 | 819.0 | 9M03G7D | 0.0028 | 0.2265 | 8M97W7D | - | 0.1901 | | |
| 15 | 821.5 | 13M5G7D | 0.0059 | 0.2249 | 13M5W7D | - | 0.1914 | | |
| Ľ | TE Band 26 | | | 64Q | QAM | | | | |
| BW (MHz) | Frequency Range (MHz) | Emission I (99%) | • | • | r Tolerance om) | Maximum Conducted power (W) | | | |
| 1.4 | 814.7 ~ 823.3 | 1M10 | W7D | | - | | 476 | | |
| 3 | 815.5 ~ 822.5 | 2M73 | W7D | | - | 0.1578 | | | |
| 5 | 816.5 ~ 821.5 | 4M50 | W7D | | - | 0.1567 | | | |
| 10 | 819.0 | 8M99 | W7D | | - | 0.1521 | | | |
| 15 | 821.5 | 13M4 | W7D | | - | 0.1510 | | | |

TEL: 86-755-8637-9589 FAX: 86-755-8637-9595 FCC ID: ZMOFM350GL Page Number : 6 of 21
Report Issued Date : Apr. 02, 2021
Report Version : Rev. 01

Report Template No.: BU5-FWLTE Version 2.0

1.7 Testing Site

Sporton International (Shenzhen) Inc. is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.01.

| Test Firm | Sporton International (Shenzhen) Inc. | | | | | | | | | |
|--------------------|---|---------------------|--------------------------------|--|--|--|--|--|--|--|
| Test Site Location | 1/F, 2/F, Bldg 5, Shiling Industrial Zone, Xinwei Village, Xili, Nanshan, Shenzhen, 518055 People's Republic of China TEL: +86-755-86379589 FAX: +86-755-86379595 | | | | | | | | | |
| Test Site No. | Sporton Site No. | FCC Designation No. | FCC Test Firm Registration No. | | | | | | | |
| | TH01-SZ | CN1256 | 421272 | | | | | | | |

| Test Firm | Sporton International (Shenzhen) Inc. | | | | | | | |
|--------------------|--|---------------------|--------------------------------|--|--|--|--|--|
| Test Site Location | 101, 1st Floor, Block B, Building 1, No. 2, Tengfeng 4th Road, Fenghuang Community, Fuyong Street, Baoan District, Shenzhen City Guangdong Province China 518103 TEL: +86-755-33202398 | | | | | | | |
| Test Site No. | Sporton Site No. | FCC Designation No. | FCC Test Firm Registration No. | | | | | |
| | 03CH03-SZ | CN1256 | 421272 | | | | | |

1.8 Test Software

| lt | Item Site | | Manufacturer | Name | Version | |
|----|-----------|-----------|--------------|------|-------------|--|
| | 1. | 03CH03-SZ | AUDIX | E3 | 6.2009-8-24 | |

1.9 Applied Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- 47 CFR Part 2, 90(S)
- ANSI C63.26-2015
- FCC KDB 971168 D01 Power Meas. License Digital Systems v03r01
- FCC KDB 971168 D02 Misc Rev Approv License Devices v02r01

Remark:

- All test items were verified and recorded according to the standards and without any deviation during the test.
- 2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.

Sporton International (ShenZhen) Inc.

TEL: 86-755-8637-9589 FAX: 86-755-8637-9595 FCC ID: ZMOFM350GL Page Number : 7 of 21
Report Issued Date : Apr. 02, 2021
Report Version : Rev. 01

Report No. : FW051802

2 Test Configuration of Equipment Under Test

2.1 Test Mode

During all testing, EUT is in link mode with base station emulator at maximum power level. The spurious emission measurements were carried out in semi-anechoic chamber with 3-meter test range, and EUT is rotated on three test planes to find out the worst emission.

Frequency range investigated for radiated emission is 30 MHz to 9000 MHz.


| | | Bandwidth (MHz) | | | | | | Modulation | | | RB# | | | Test Channel | | | |
|--|------|-----------------|---|---|-------|----|----|------------|-----------|-----------|------------|---|------|-----------------|---|---|---|
| Test Items | Band | 1.4 | 3 | 5 | 10 | 15 | 20 | QPS K | 16 QAM | 64 QAM | 256 QAM | 1 | Half | Full | L | М | н |
| Max. Output Power | 26 | v | v | ٧ | > | v | • | > | ٧ | v | v | v | v | v | > | > | v |
| 26dB and 99% Bandwidth | 26 | v | v | v | v | v | - | v | v | v | | | | v | v | v | v |
| Emission masks In-band emissions | 26 | v | v | v | v | v | - | v | v | v | | v | | v | v | | v |
| Emission masks – Out of band emissions | 26 | v | v | v | V | v | - | v | v | v | | v | | | V | ٧ | v |
| Frequency Stability | 26 | | | | > | v | - | ٧ | | | | | | v | | ٧ | |
| Radiated Spurious Emission | 26 | | | v | v | v | | ٧ | | | | ٧ | | | v | v | v |
| Note 1. The mark "v" means that this configuration is chosen for testing 2. The mark "-" means that this bandwidth is not supported. 3. LTE Band26 transmit frequency for part22 rule is 824MHz-849MHz, for part90 rule is 814MHz-824M over 15MHz bandwidth complies the ERP limit line of part22 rule, therefore ERP of the partial frequency spectrum which falls within part 22 also complies. 4. For modulation of 256QAM, the maximum power of 256QAM is lower than other modulation (QPSK/16QAM/64QAM), therefore, according to engineering evaluation, we choose higher power (QPSK/16QAM/64QAM) to perform all tests and show in the report | | | | | uency | | | | | | | | | | | | |

Sporton International (ShenZhen) Inc.

TEL: 86-755-8637-9589 FAX: 86-755-8637-9595 FCC ID: ZMOFM350GL Page Number : 8 of 21
Report Issued Date : Apr. 02, 2021
Report Version : Rev. 01

Report Template No.: BU5-FWLTE Version 2.0

2.2 Connection Diagram of Test System

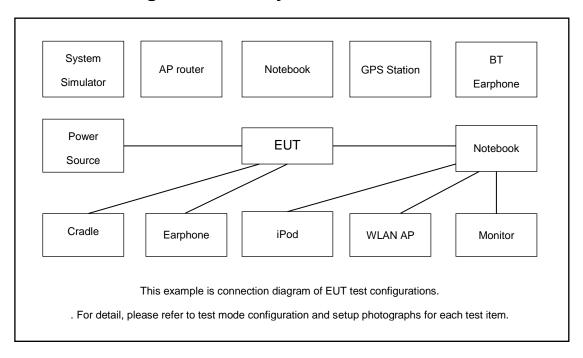

2.3 Support Unit used in test configuration and system

| Item Equipment | | Equipment | Trade Name | Model No. | FCC ID | Data Cable | Power Cord |
|----------------|----|------------------|------------|-----------|--------|------------|-------------------|
| | 1. | System Simulator | Anritsu | MT8820C | N/A | N/A | Unshielded, 1.8 m |
| | 2. | Test jig | N/A | N/A | N/A | N/A | N/A |

2.4 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between RF conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level will be exactly the RF output level.

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

The following shows an offset computation example with RF cable loss 4.0 dB and a 10dB attenuator.

Example:

 $Offset(dB) = RF \ cable \ loss(dB) + attenuator \ factor(dB).$

$$= 4.0 + 10 = 14.0 (dB)$$

TEL: 86-755-8637-9589 FAX: 86-755-8637-9595 FCC ID: ZMOFM350GL **Report No. : FW051802**

2.5 Frequency List of Low/Middle/High Channels

| LTE Band 26 Channel and Frequency List | | | | | | | | | | | |
|---|-----------|-------|-------|-------|--|--|--|--|--|--|--|
| BW [MHz] Channel/Frequency(MHz) Lowest Middle Highest | | | | | | | | | | | |
| 45 | Channel | 26765 | - | - | | | | | | | |
| 15 | Frequency | 821.5 | - | - | | | | | | | |
| 40 | Channel | - | 26740 | - | | | | | | | |
| 10 | Frequency | - | 819 | - | | | | | | | |
| 5 | Channel | 26715 | 26740 | 26765 | | | | | | | |
| 5 | Frequency | 816.5 | 819 | 821.5 | | | | | | | |
| 3 | Channel | 26705 | 26740 | 26775 | | | | | | | |
| 3 | Frequency | 815.5 | 819 | 822.5 | | | | | | | |
| 1 1 | Channel | 26697 | 26740 | 26783 | | | | | | | |
| 1.4 | Frequency | 814.7 | 819 | 823.3 | | | | | | | |

TEL: 86-755-8637-9589 FAX: 86-755-8637-9595 FCC ID: ZMOFM350GL Page Number : 10 of 21
Report Issued Date : Apr. 02, 2021
Report Version : Rev. 01

Report Template No.: BU5-FWLTE Version 2.0

3 Test Result

3.1 Conducted Output Power Measurement

3.1.1 Description of the Conducted Output Power Measurement

A system simulator was used to establish communication with the EUT. Its parameters were set to enforce EUT transmitting at the maximum power. The measured power in the radio frequency on the transmitter output terminals shall be reported.


3.1.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.1.3 Test Procedures

- 1. The transmitter output port was connected to the system simulator.
- 2. Set EUT at maximum power through the system simulator.
- 3. Select lowest, middle, and highest channels for each band and different modulation.
- 4. Measure and record the power level from the system simulator.

3.1.4 Test Setup



3.1.5 Test Result of Conducted Output Power

Please refer to Appendix A.

TEL: 86-755-8637-9589 FAX: 86-755-8637-9595 FCC ID: ZMOFM350GL Page Number : 11 of 21
Report Issued Date : Apr. 02, 2021
Report Version : Rev. 01

Report No. : FW051802

3.2 99% Occupied Bandwidth and 26dB Bandwidth Measurement

3.2.1 Description of (Occupied) Bandwidth Limitations Measurement

The 99% occupied bandwidth is the width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5% of the total mean transmitted power.

The emission bandwidth is defined as the width of the signal between two points, located at the 2 sides of the carrier frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.


3.2.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.2.3 Test Procedures

- 1. The EUT was connected to spectrum analyzer and system simulator via a power divider.
- 2. The 26dB and 99% occupied bandwidth (BW) of the middle channel for the highest RF power with full RB sizes were measured.

3.2.4 Test Setup

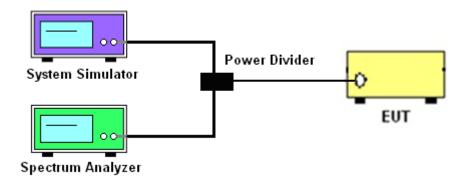

3.2.5 Test Result of 99% Occupied Bandwidth and 26dB Bandwidth

Please refer to Appendix A.

Sporton International (ShenZhen) Inc.

TEL: 86-755-8637-9589 FAX: 86-755-8637-9595 FCC ID: ZMOFM350GL Page Number : 12 of 21
Report Issued Date : Apr. 02, 2021
Report Version : Rev. 01

Report No. : FW051802

3.3 Emissions Mask Measurement

3.3.1 Description of Emissions Mask Measurement

Equipment used in this licensed to EA or non-EA systems shall comply with the emission mask provisions of FCC Part 90.691.(a):

- (a) Out-of-band emission requirement shall apply only to the "outer" channels included in an EA license and to spectrum adjacent to interior channels used by incumbent licensees. The emission limits are as follows:
- (1) For any frequency removed from the EA licensee's frequency block by up to and including 37.5 kHz, the power of any emission shall be attenuated below the transmitter power (P) in watts by at least 116 Log₁₀(f/6.1) decibels or 50 + 10 Log₁₀(P) decibels or 80 decibels, whichever is the lesser attenuation, where f is the frequency removed from the center of the outer channel in the block in kilohertz and where f is greater than 12.5 kHz.
- (2) For any frequency removed from the EA licensee's frequency block greater than 37.5 kHz, the power of any emission shall be attenuated below the transmitter power (P) in watts by at least 43 + 10Log₁₀(P) decibels or 80 decibels, whichever is the lesser attenuation, where f is the frequency removed from the center of the outer channel in the block in kilohertz and where f is greater than 37.5 kHz.

3.3.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.3.3 Test Procedures

- 1. The EUT was connected to spectrum analyzer and base station via power divider.
- 2. The emissions mask of low and high channels for the highest RF powers were measured.
- The measured RBW and the VBW set 3 times of RBW are then set in spectrum analyzer, and the RBW correction factor 10log (1% of OBW/measured RBW)(dB) was compensated, if required.
- 4. The test results were shown below plots with a correction offset factor including cable loss, insertion loss of power divider.


Report Issued Date : Apr. 02, 2021 Report Version : Rev. 01

Page Number

Report Template No.: BU5-FWLTE Version 2.0

: 13 of 21

3.3.4 Test Setup

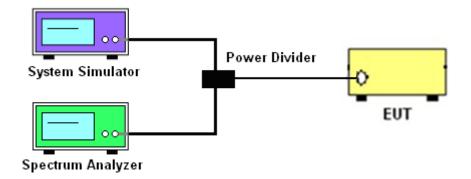

3.3.5 Test Result (Plots) of Conducted Emissions Mask

Please refer to Appendix A.

TEL: 86-755-8637-9589 FAX: 86-755-8637-9595 FCC ID: ZMOFM350GL Page Number : 14 of 21
Report Issued Date : Apr. 02, 2021
Report Version : Rev. 01
Report Template No.: BU5-FWLTE Version 2.0

3.4 Emissions Mask - Out Of Band Emissions Measurement

3.4.1 Description of Conducted Emissions Out of band emissions measurement

The power of any emission FCC Part 90.691 (a)(2) on any frequency removed from the assigned frequency by out of the authorized bandwidth at least 43 + 10 log (P) dB. It is measured by means of a calibrated spectrum analyzer and scanned from 30 MHz up to a frequency including its 10th harmonic.


3.4.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.4.3 Test Procedures

- 1. The EUT was connected to spectrum analyzer and system simulator via a power divider.
- The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator.
 The path loss was compensated to the results for each measurement.
- 3. The middle channel for the highest RF power within the transmitting frequency was measured.
- 4. The conducted spurious emission for the whole frequency range was taken.
- 5. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz, taking the record of maximum spurious emission.
- 6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
- 7. The limit line is derived from 43 + 10log(P)dB below the transmitter power P(Watts)

3.4.4 Test Setup

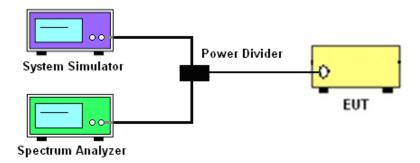

3.4.5 Test Result (Plots) of Conducted Emission

Please refer to Appendix A.

Sporton International (ShenZhen) Inc.

TEL: 86-755-8637-9589 FAX: 86-755-8637-9595 FCC ID: ZMOFM350GL Page Number : 15 of 21
Report Issued Date : Apr. 02, 2021
Report Version : Rev. 01

Report No.: FW051802

3.5 Field Strength of Spurious Radiation Measurement

3.5.1 Description of Field Strength of Spurious Radiated Measurement

The radiated spurious emission was measured by substitution method according to ANSI/TIA-603-E. The power of any emission FCC Part 90.691 on any frequency removed from the assigned frequency by more than 250 percent of the authorized bandwidth at least 43 + 10 log (P) dB. The spectrum is scanned from 30 MHz up to a frequency including its 10th harmonic.

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitter power (P) by a factor of at least $43+10\log_{10}(P[Watts])$ dB. The spectrum is scanned from 30 MHz up to a frequency including its 10th harmonic.

3.5.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.5.3 Test Procedures


- The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
- 2. The EUT was set 3 meters from the receiving antenna, which was mounted on the antenna tower.
- 3. The table was rotated 360 degrees to determine the position of the highest spurious emission.
- 4. The height of the receiving antenna is varied between one meter and four meters to search the maximum spurious emission for both horizontal and vertical polarizations.
- 5. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz, Sweep = 500ms, Taking the record of maximum spurious emission.
- 6. A horn antenna was substituted in place of the EUT and was driven by a signal generator.
- 7. Tune the output power of signal generator to the same emission level with EUT maximum spurious emission.
- 8. Taking the record of output power at antenna port.
- 9. Repeat step 7 to step 8 for another polarization.
- 10. EIRP (dBm) = S.G. Power Tx Cable Loss + Tx Antenna Gain
- 11. ERP (dBm) = EIRP 2.15
- 12. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
- 13. The limit line is derived from 43 + 10log(P) dB below the transmitter power P(Watts)

TEL: 86-755-8637-9589 FAX: 86-755-8637-9595 FCC ID: ZMOFM350GL Page Number : 16 of 21
Report Issued Date : Apr. 02, 2021
Report Version : Rev. 01


Report No.: FW051802

3.5.4 Test Setup

For radiated test from 30MHz to 1GHz

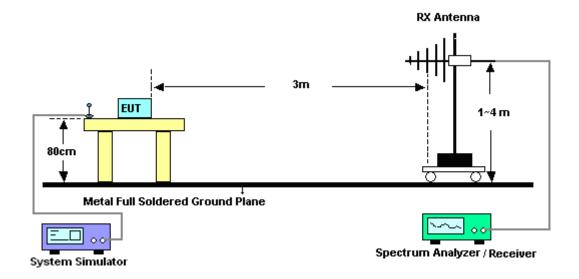

For radiated test above 1GHz

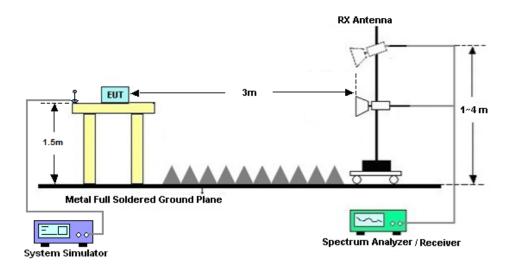

3.5.5 Test Result of Field Strength of Spurious Radiated

Please refer to Appendix B.

Sporton International (ShenZhen) Inc.

TEL: 86-755-8637-9589 FAX: 86-755-8637-9595 FCC ID: ZMOFM350GL Page Number : 17 of 21
Report Issued Date : Apr. 02, 2021
Report Version : Rev. 01

Report Template No.: BU5-FWLTE Version 2.0

3.6 Frequency Stability Measurement

3.6.1 Description of Frequency Stability Measurement

The frequency stability shall be measured by variation of ambient temperature and variation of primary supply voltage to ensure that the fundamental emission stays within the authorized frequency block. The frequency stability of the transmitter shall be maintained within ±0.00025% (±2.5ppm) of the center frequency according to FCC Part 90.213.

3.6.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.6.3 Test Procedures for Temperature Variation

- 1. The EUT was set up in the thermal chamber and connected with the base station.
- With power OFF, the temperature was decreased to -30°C and the EUT was stabilized for three
 hours. Power was applied and the maximum change in frequency was recorded within one
 minute.
- 3. With power OFF, the temperature was raised in 10°C step up to 50°C. The EUT was stabilized at each step for at least half an hour. Power was applied and the maximum frequency change was recorded within one minute.

3.6.4 Test Procedures for Voltage Variation

- 1. The EUT was placed in a temperature chamber at 20±5°C and connected with the system simulator.
- The power supply voltage to the EUT was varied from 85% to 115% of the nominal value for other than hand carried battery equipment.
- 3. For hand carried, battery powered equipment, reduce the primary ac or dc supply voltage to the
- 4. battery operating end point, which shall be specified by the manufacturer.
- 5. The variation in frequency was measured for the worst case.

Report Template No.: BU5-FWLTE Version 2.0

Report Issued Date: Apr. 02, 2021


Page Number

Report Version

: 18 of 21

: Rev. 01

3.6.5 Test Setup

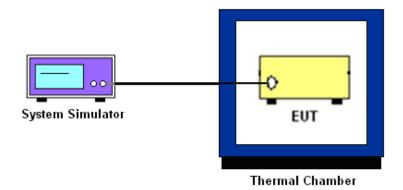

3.6.6 Test Result of Temperature Variation

Please refer to Appendix A.

TEL: 86-755-8637-9589 FAX: 86-755-8637-9595 FCC ID: ZMOFM350GL Page Number : 19 of 21
Report Issued Date : Apr. 02, 2021
Report Version : Rev. 01

Report No. : FW051802

4 List of Measuring Equipment

| Instrument | Manufacturer | Model No. | Serial No. | Characteristics | Calibration Date | Test Date | Due Date | Remark |
|------------------------------|----------------------------------|-------------------|------------------|--------------------|---------------------|---------------|---------------|--------------------------|
| Spectrum Analyzer | R&S | FSV40 | 101078 | 10Hz~40GHz | Apr. 17, 2020 | Dec. 18, 2020 | Apr. 16, 2021 | Conducted (TH01-SZ) |
| Thermal Chamber | Ten Billion Hongzhangrou p | LP-150U | H201408180 3 | -40~+150°C | Jul. 22, 2020 | Dec. 18, 2020 | Jul. 21, 2021 | Conducted (TH01-SZ) |
| EMI Test Receiver&SA | KEYSIGHT | N9038A | MY5445008 3 | 20Hz~8.4GHz | Apr. 17, 2020 | Jan. 19, 2021 | Apr. 16, 2021 | Radiation (03CH03-SZ) |
| EXA Spectrum Anaiyzer | KEYSIGHT | N9010A | MY5515024 6 | 10Hz~44GHz; | Apr. 17, 2020 | Jan. 19, 2021 | Apr. 16, 2021 | Radiation (03CH03-SZ) |
| Bilog Antenna | TeseQ | CBL6112D | 35408 | 30MHz-2GHz | Jun. 22, 2020 | Jan. 19, 2021 | Jun. 21, 2021 | Radiation (03CH03-SZ) |
| Double Ridge Horn Antenna | SCHWARZBE CK | BBHA9120 D | 9120D-1355 | 1GHz~18GHz | Apr. 30, 2020 | Jan. 19, 2021 | Apr. 29, 2021 | Radiation (03CH03-SZ) |
| Amplifier | Burgeon | BPA-530 | 102210 | 0.01Hz ~3000MHz | Oct. 17, 2020 | Jan. 19, 2021 | Oct. 16, 2021 | Radiation (03CH03-SZ) |
| HF Amplifier | MITEQ | TTA1840-35 -HG | 1871923 | 18GHz~40GHz | Jul. 21, 2020 | Jan. 19, 2021 | Jul. 20, 2021 | Radiation (03CH03-SZ) |
| SHF-EHF Horn | com-power | AH-840 | 101071 | 18Ghz-40GHz | Apr. 23, 2020 | Jan. 19, 2021 | Apr. 22, 2021 | Radiation (03CH03-SZ) |
| Amplifier | Agilent Technologies | 83017A | MY3950130 2 | 500MHz~26.5G Hz | Dec. 25, 2020 | Jan. 19, 2021 | Dec. 24, 2021 | Radiation (03CH03-SZ) |
| AC Power Source | Chroma | 61601 | 6160100019 85 | N/A | NCR | Jan. 19, 2021 | NCR | Radiation (03CH03-SZ) |
| Turn Table | EM | EM1000 | N/A | 0~360 degree | NCR | Jan. 19, 2021 | NCR | Radiation (03CH03-SZ) |
| Antenna Mast | EM | EM1000 | N/A | 1 m~4 m | NCR | Jan. 19, 2021 | NCR | Radiation (03CH03-SZ) |

NCR: No Calibration Required

Sporton International (ShenZhen) Inc.

TEL: 86-755-8637-9589 FAX: 86-755-8637-9595 FCC ID: ZMOFM350GL Page Number : 20 of 21
Report Issued Date : Apr. 02, 2021
Report Version : Rev. 01

Report No. : FW051802

5 Uncertainty of Evaluation

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI 63.26-2015. All the measurement uncertainty value were shown with a coverage K=2 to indicate 95% level of confidence. The measurement data show herein meets or exceeds the CISPR measurement uncertainty values specified in CISPR 16-4-2 and can be compared directly to specified limit to determine compliance.

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

| Measuring Uncertainty for a Level of | 3 04B |
|--------------------------------------|-------|
| Confidence of 95% (U = 2Uc(y)) | 3.0dB |

Uncertainty of Radiated Emission Measurement (1 GHz ~ 18 GHz)

| Measuring Uncertainty for a Level of | 3.6dB |
|--------------------------------------|-------|
| Confidence of 95% (U = 2Uc(y)) | 3.0dB |

Uncertainty of Radiated Emission Measurement (18 GHz ~ 40 GHz)

| ı | Measuring Uncertainty for a Level of | 3.8dB |
|---|--------------------------------------|-------|
| | Confidence of 95% (U = 2Uc(y)) | 3.0UD |

Sporton International (ShenZhen) Inc.

TEL: 86-755-8637-9589 FAX: 86-755-8637-9595 FCC ID: ZMOFM350GL Page Number : 21 of 21
Report Issued Date : Apr. 02, 2021
Report Version : Rev. 01

Report No. : FW051802

Appendix A. Test Results of Conducted Test

Conducted Output Power (Average power)

| BW [MHz] | Modulation | RB Size | RB Offset | Power Low Ch. / Freq. | Power Middle Ch. / Freq. | Power High Ch. / Freq. |
|----------|------------|----------|-----------|-----------------------------|--------------------------------|------------------------------|
| | Cha | nnel | | 26765 | S, 1.15q. | 3,q. |
| | Frequenc | cy (MHz) | | 821.5 | | |
| 15 | QPSK | 1 | 0 | 23.49 | | |
| 15 | QPSK | 1 | 37 | 23.40 | | |
| 15 | QPSK | 1 | 74 | 23.52 | | |
| 15 | QPSK | 36 | 0 | 22.45 | | |
| 15 | QPSK | 36 | 20 | 22.57 | | |
| 15 | QPSK | 36 | 39 | 22.49 | | |
| 15 | QPSK | 75 | 0 | 22.54 | | |
| 15 | 16QAM | 1 | 0 | 22.37 | | |
| 15 | 16QAM | 1 | 37 | 22.69 | | |
| 15 | 16QAM | 1 | 74 | 22.82 | | |
| 15 | 16QAM | 36 | 0 | 21.43 | | |
| 15 | 16QAM | 36 | 20 | 21.56 | | |
| 15 | 16QAM | 36 | 39 | 21.49 | | |
| 15 | 16QAM | 75 | 0 | 21.55 | | |
| 15 | 64QAM | 1 | 0 | 21.77 | | |
| 15 | 64QAM | 1 | 37 | 21.76 | | |
| 15 | 64QAM | 1 | 74 | 21.79 | | |
| 15 | 64QAM | 36 | 0 | 20.43 | | |
| 15 | 64QAM | 36 | 20 | 20.53 | | |
| 15 | 64QAM | 36 | 39 | 20.58 | | |
| 15 | 64QAM | 75 | 0 | 20.42 | | |
| | Cha | nnel | | | 26740 | |
| | Frequenc | cy (MHz) | | | 819 | |
| 10 | QPSK | 1 | 0 | | 23.39 | |
| 10 | QPSK | 1 | 25 | | 23.54 | |
| 10 | QPSK | 1 | 49 | | 23.55 | |
| 10 | QPSK | 25 | 0 | | 22.54 | |
| 10 | QPSK | 25 | 12 | | 22.52 | |
| 10 | QPSK | 25 | 25 | | 22.50 | |
| 10 | QPSK | 50 | 0 | | 22.57 | |
| 10 | 16QAM | 1 | 0 | | 22.79 | |
| 10 | 16QAM | 1 | 25 | | 22.66 | |
| 10 | 16QAM | 1 | 49 | | 22.65 | |
| 10 | 16QAM | 25 | 0 | | 21.42 | |
| 10 | 16QAM | 25 | 12 | | 21.57 | |
| 10 | 16QAM | 25 | 25 | | 21.50 | |
| 10 | 16QAM | 50 | 0 | | 21.60 | |
| 10 | 64QAM | 1 | 0 | | 21.62 | |
| 10 | 64QAM | 1 | 25 | | 21.76 | |

Sporton International (ShenZhen) Inc.

TEL: 86-755-8637-9589 FAX: 86-755-8637-9595 FCC ID: ZMOFM350GL Page Number : A1 of A45
Report Issued Date : Apr. 02, 2021
Report Version : Rev. 01



FCC RF Test Report

| 10 | 64QAM | 1 | 49 | | 21.82 | |
|----|---------|----------|----|-------|-------|-------|
| | _ | | | | | |
| 10 | 64QAM | 25 | 0 | | 20.54 | |
| 10 | 64QAM | 25 | 12 | | 20.53 | |
| 10 | 64QAM | 25 | 25 | | 20.49 | |
| 10 | 64QAM | 50 | 0 | 20745 | 20.40 | |
| | | innel | | 26715 | 26740 | 26765 |
| _ | | cy (MHz) | | 816.5 | 819 | 821.5 |
| 5 | QPSK | 1 | 0 | 23.60 | 23.64 | 23.50 |
| 5 | QPSK | 1 | 12 | 23.55 | 23.47 | 23.67 |
| 5 | QPSK | 1 | 24 | 23.60 | 23.49 | 23.69 |
| 5 | QPSK | 12 | 0 | 22.50 | 22.56 | 22.60 |
| 5 | QPSK | 12 | 7 | 22.52 | 22.58 | 22.60 |
| 5 | QPSK | 12 | 13 | 22.56 | 22.45 | 22.48 |
| 5 | QPSK | 25 | 0 | 22.55 | 22.53 | 22.54 |
| 5 | 16QAM | 1 | 0 | 22.94 | 22.86 | 23.08 |
| 5 | 16QAM | 1 | 12 | 22.67 | 23.11 | 23.09 |
| 5 | 16QAM | 1 | 24 | 23.10 | 22.45 | 22.68 |
| 5 | 16QAM | 12 | 0 | 21.45 | 21.48 | 21.63 |
| 5 | 16QAM | 12 | 7 | 21.49 | 21.41 | 21.51 |
| 5 | 16QAM | 12 | 13 | 21.44 | 21.54 | 21.54 |
| 5 | 16QAM | 25 | 0 | 21.56 | 21.57 | 21.65 |
| 5 | 64QAM | 1 | 0 | 21.78 | 21.36 | 21.50 |
| 5 | 64QAM | 1 | 12 | 21.68 | 21.32 | 21.89 |
| 5 | 64QAM | 1 | 24 | 21.95 | 21.82 | 21.84 |
| 5 | 64QAM | 12 | 0 | 20.56 | 20.52 | 20.70 |
| 5 | 64QAM | 12 | 7 | 20.54 | 20.48 | 20.58 |
| 5 | 64QAM | 12 | 13 | 20.47 | 20.58 | 20.58 |
| 5 | 64QAM | 25 | 0 | 20.57 | 20.44 | 20.53 |
| | Cha | innel | | 26705 | 26740 | 26775 |
| | Frequen | cy (MHz) | | 815.5 | 819 | 822.5 |
| 3 | QPSK | 1 | 0 | 23.53 | 23.54 | 23.48 |
| 3 | QPSK | 1 | 8 | 23.47 | 23.49 | 23.63 |
| 3 | QPSK | 1 | 14 | 23.49 | 23.45 | 23.56 |
| 3 | QPSK | 8 | 0 | 22.46 | 22.54 | 22.56 |
| 3 | QPSK | 8 | 4 | 22.50 | 22.54 | 22.59 |
| 3 | QPSK | 8 | 7 | 22.47 | 22.50 | 22.52 |
| 3 | QPSK | 15 | 0 | 22.55 | 22.51 | 22.59 |
| 3 | 16QAM | 1 | 0 | 22.53 | 22.72 | 23.13 |
| 3 | 16QAM | 1 | 8 | 22.54 | 22.77 | 23.09 |
| 3 | 16QAM | 1 | 14 | 23.01 | 22.92 | 23.07 |
| 3 | 16QAM | 8 | 0 | 21.51 | 21.44 | 21.65 |
| 3 | 16QAM | 8 | 4 | 21.55 | 21.49 | 21.57 |
| 3 | 16QAM | 8 | 7 | 21.66 | 21.63 | 21.63 |
| 3 | 16QAM | 15 | 0 | 21.57 | 21.59 | 21.64 |
| 3 | 64QAM | 1 | 0 | 21.61 | 21.98 | 21.56 |
| 3 | 64QAM | 1 | 8 | 21.50 | 21.76 | 21.63 |
| 3 | 64QAM | 1 | 14 | 21.91 | 21.46 | 21.96 |
| 3 | 64QAM | 8 | 0 | 20.53 | 20.64 | 20.56 |
| 3 | 64QAM | 8 | 4 | 20.57 | 20.45 | 20.59 |
| 3 | 64QAM | 8 | 7 | 20.53 | 20.53 | 20.55 |
| | O TOUTH | | | 20.00 | 20.00 | 20.00 |

Sporton International (ShenZhen) Inc.

TEL: 86-755-8637-9589 FAX: 86-755-8637-9595 FCC ID: ZMOFM350GL Page Number : A2 of A45
Report Issued Date : Apr. 02, 2021
Report Version : Rev. 01



FCC RF Test Report

| | 0.40414 | 15 | | 00.50 | 00.40 | 00.04 |
|-----|---------|-----------|---|-------|-------|-------|
| 3 | 64QAM | 15 | 0 | 20.58 | 20.43 | 20.61 |
| | | annel | | 26697 | 26740 | 26783 |
| | Frequer | ncy (MHz) | | 814.7 | 819 | 823.3 |
| 1.4 | QPSK | 1 | 0 | 23.37 | 23.43 | 23.47 |
| 1.4 | QPSK | 1 | 3 | 23.34 | 23.33 | 23.60 |
| 1.4 | QPSK | 1 | 5 | 23.37 | 23.42 | 23.49 |
| 1.4 | QPSK | 3 | 0 | 23.39 | 23.41 | 23.39 |
| 1.4 | QPSK | 3 | 1 | 23.28 | 23.37 | 23.52 |
| 1.4 | QPSK | 3 | 3 | 23.33 | 23.34 | 23.58 |
| 1.4 | QPSK | 6 | 0 | 22.37 | 22.32 | 22.48 |
| 1.4 | 16QAM | 1 | 0 | 22.54 | 22.85 | 22.35 |
| 1.4 | 16QAM | 1 | 3 | 22.94 | 22.56 | 22.93 |
| 1.4 | 16QAM | 1 | 5 | 22.62 | 22.63 | 22.97 |
| 1.4 | 16QAM | 3 | 0 | 22.42 | 22.40 | 22.40 |
| 1.4 | 16QAM | 3 | 1 | 22.45 | 22.40 | 22.52 |
| 1.4 | 16QAM | 3 | 3 | 22.28 | 22.44 | 22.49 |
| 1.4 | 16QAM | 6 | 0 | 21.40 | 21.52 | 21.51 |
| 1.4 | 64QAM | 1 | 0 | 21.67 | 21.64 | 21.42 |
| 1.4 | 64QAM | 1 | 3 | 21.64 | 21.69 | 21.46 |
| 1.4 | 64QAM | 1 | 5 | 21.62 | 21.62 | 21.48 |
| 1.4 | 64QAM | 3 | 0 | 21.55 | 21.57 | 21.44 |
| 1.4 | 64QAM | 3 | 1 | 21.47 | 21.38 | 21.48 |
| 1.4 | 64QAM | 3 | 3 | 21.40 | 21.35 | 21.50 |
| 1.4 | 64QAM | 6 | 0 | 20.27 | 20.48 | 20.45 |

Sporton International (ShenZhen) Inc.


TEL: 86-755-8637-9589 FAX: 86-755-8637-9595 FCC ID: ZMOFM350GL Page Number : A3 of A45
Report Issued Date : Apr. 02, 2021
Report Version : Rev. 01

26dB Bandwidth


| Mode | | LTE Band 26 : 26dB BW(MHz) | | | | | | | | | | | |
|------------|-------|----------------------------|-------|-------|--------|----------|---------|--------|-------|-------|-------|-------|--|
| BW | 1.4 | ИHz | 3MHz | | 5MHz | | 10MHz | | 15MHz | | 20MHz | | |
| Mod. | QPSK | 16QAM | QPSK | 16QAM | QPSK | 16QAM | QPSK | 16QAM | QPSK | 16QAM | QPSK | 16QAM | |
| Lowest CH | 1.28 | 1.26 | 3.00 | 2.96 | 4.88 | 4.89 | - | - | 14.60 | 14.51 | - | - | |
| Middle CH | 1.26 | 1.28 | 2.96 | 3.00 | 4.94 | 4.91 | 9.87 | 9.71 | - | - | - | - | |
| Highest CH | 1.29 | 1.29 | 2.98 | 2.93 | 4.95 | 4.90 | - | - | - | - | - | - | |
| Mode | | | | | LTE Ba | and 26 : | 26dB BV | V(MHz) | | 1 | | 1 | |
| BW | 1.4 | ИHz | 3M | lHz | 5M | lHz | 101 | 10MHz | | 15MHz | | 20MHz | |
| Mod. | 64QAM | | 64QAM | | 64QAM | | 64QAM | | 64QAM | | 64QAM | | |
| Lowest CH | 1.30 | - | 2.93 | - | 4.89 | - | - | - | 14.18 | - | - | - | |
| Middle CH | 1.26 | - | 2.95 | - | 4.85 | - | 9.73 | - | - | - | - | - | |
| Highest CH | 1.27 | - | 2.98 | - | 4.79 | - | - | - | - | - | - | - | |

Sporton International (ShenZhen) Inc.


TEL: 86-755-8637-9589 FAX: 86-755-8637-9595 FCC ID: ZMOFM350GL Page Number : A4 of A45
Report Issued Date : Apr. 02, 2021
Report Version : Rev. 01

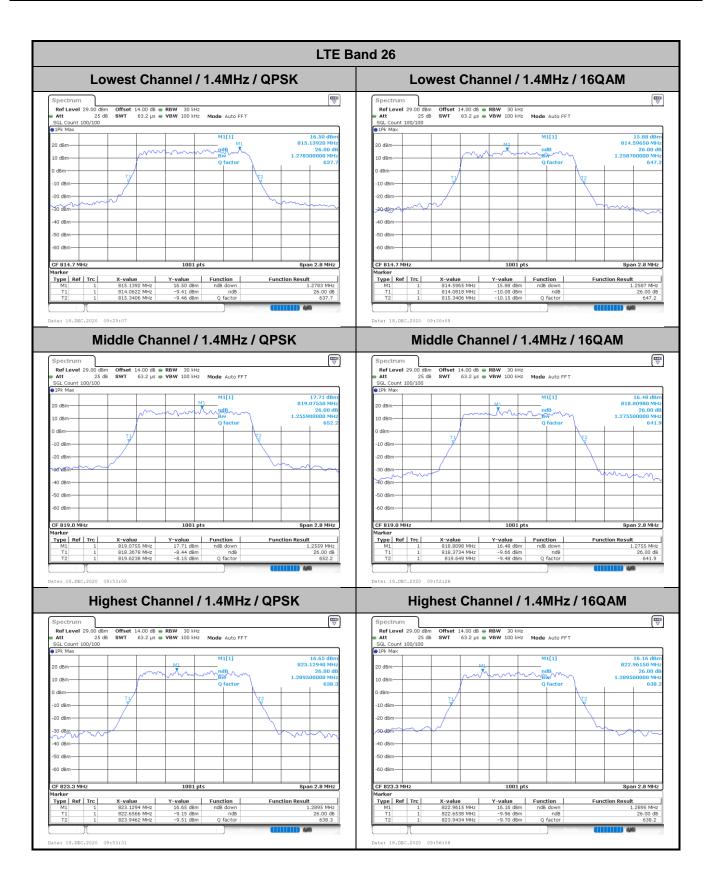


Page Number : A5 of A45
Report Issued Date : Apr. 02, 2021
Report Version : Rev. 01

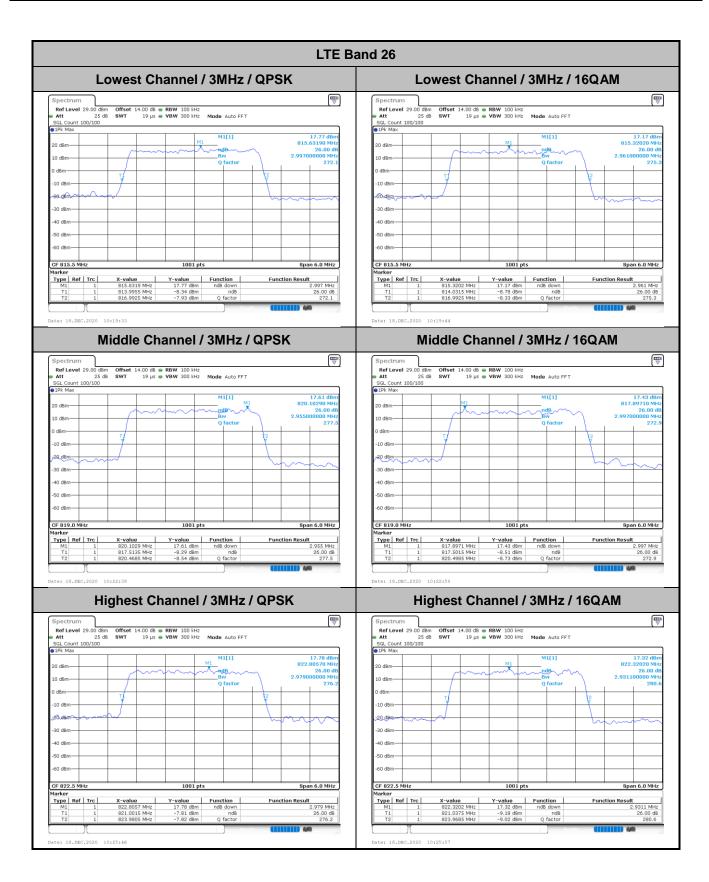


Page Number : A6 of A45
Report Issued Date : Apr. 02, 2021
Report Version : Rev. 01

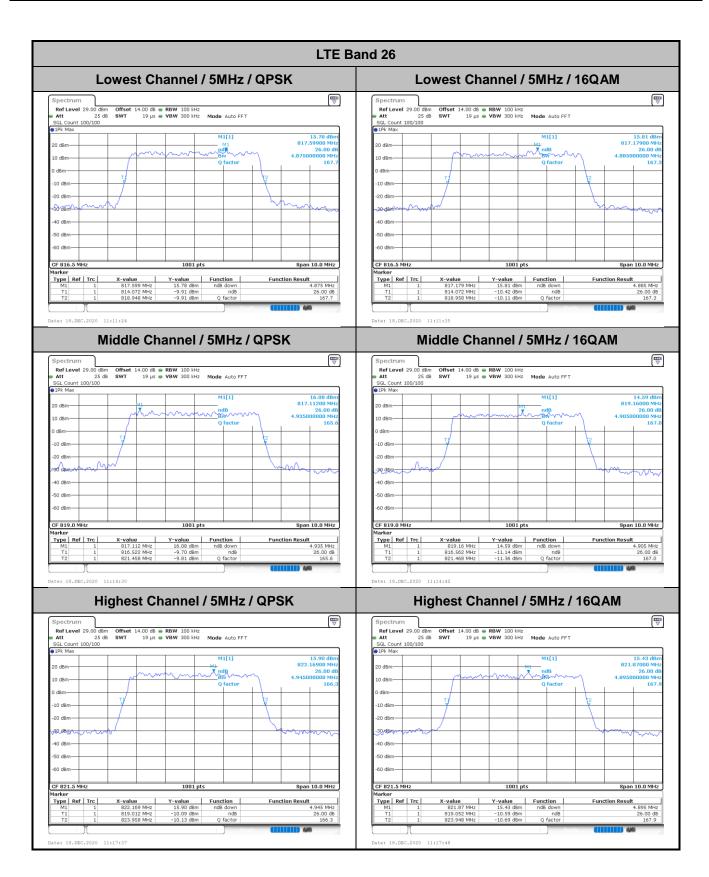


Page Number : A7 of A45
Report Issued Date : Apr. 02, 2021
Report Version : Rev. 01

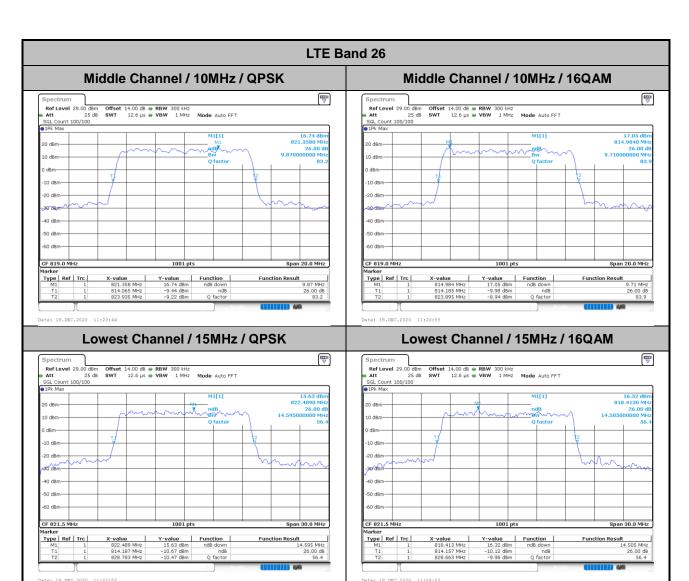


Page Number : A8 of A45
Report Issued Date : Apr. 02, 2021
Report Version : Rev. 01

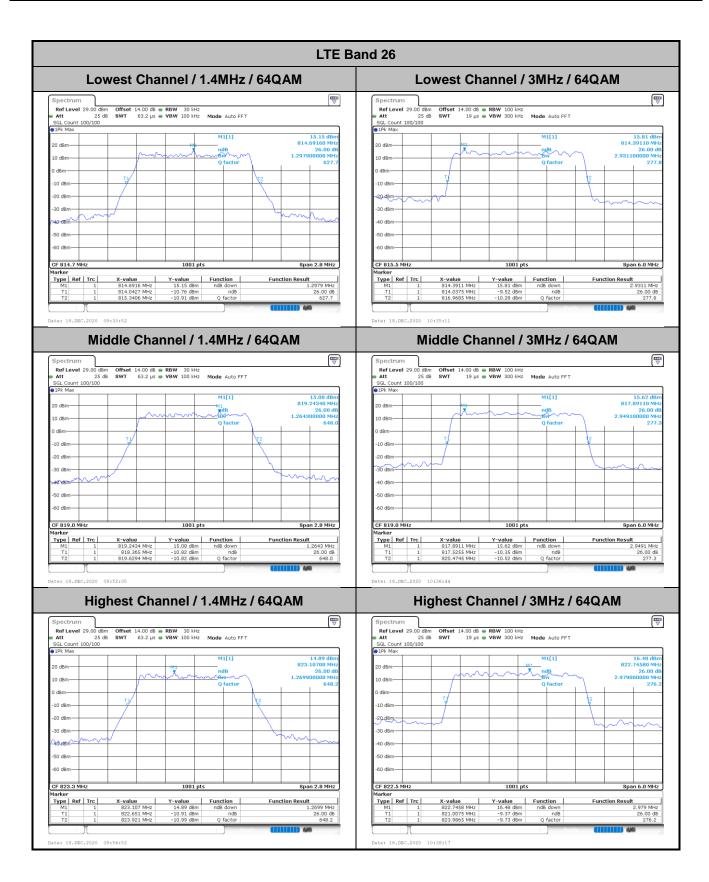

Page Number : A9 of A45 Report Issued Date : Apr. 02, 2021 Report Version : Rev. 01

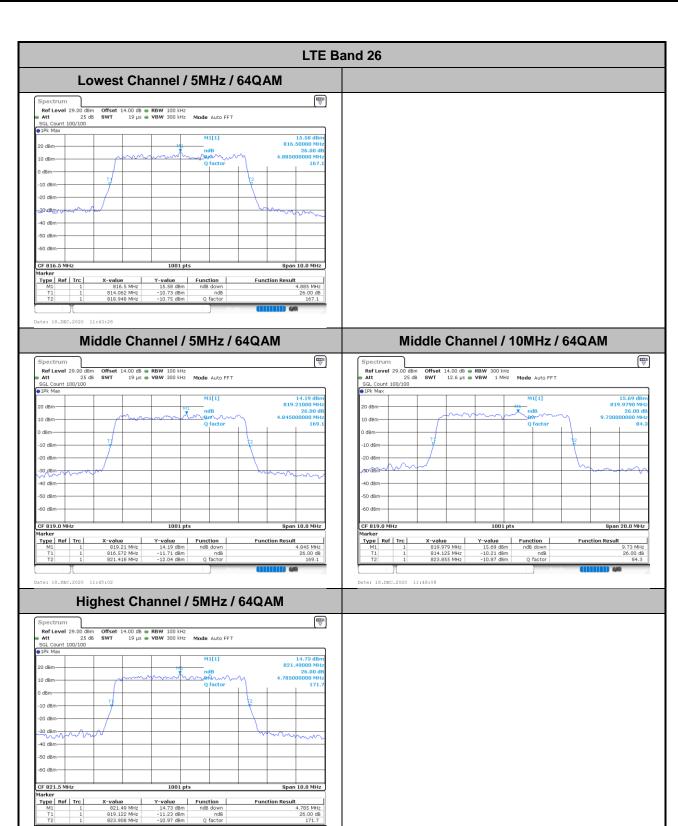

Page Number : A10 of A45
Report Issued Date : Apr. 02, 2021
Report Version : Rev. 01

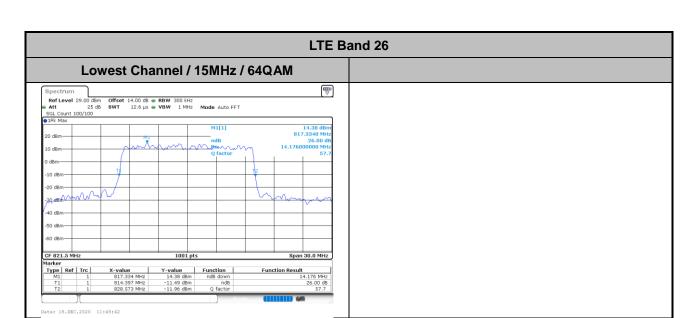

Page Number : A11 of A45
Report Issued Date : Apr. 02, 2021
Report Version : Rev. 01

Occupied Bandwidth


| Mode | | LTE Band 26 : 99%OBW(MHz) | | | | | | | | | | |
|------------|--------|---------------------------|-------|-----------|--------|----------|--------|--------|-------|-------|-------|-------|
| BW | 1.4MHz | | | 3MHz 5MHz | | lHz | 10MHz | | 15MHz | | 20MHz | |
| Mod. | QPSK | 16QAM | QPSK | 16QAM | QPSK | 16QAM | QPSK | 16QAM | QPSK | 16QAM | QPSK | 16QAM |
| Lowest CH | 1.09 | 1.09 | 2.72 | 2.71 | 4.49 | 4.49 | - | - | 13.46 | 13.46 | - | - |
| Middle CH | 1.10 | 1.09 | 2.71 | 2.72 | 4.49 | 4.46 | 9.03 | 8.97 | - | - | - | - |
| Highest CH | 1.09 | 1.10 | 2.70 | 2.71 | 4.50 | 4.50 | - | - | - | - | - | - |
| Mode | | | | | LTE Ba | and 26 : | 99%OBV | V(MHz) | | | | |
| BW | 1.4 | ИНz | 3M | lHz | 5M | Hz | 10MHz | | 15MHz | | 20MHz | |
| Mod. | 64QAM | | 64QAM | | 64QAM | | 64QAM | | 64QAM | | 64QAM | |
| Lowest CH | 1.10 | - | 2.72 | - | 4.50 | - | - | - | 13.43 | - | - | - |
| Middle CH | 1.09 | - | 2.73 | - | 4.48 | - | 8.99 | - | - | - | - | - |
| Highest CH | 1.09 | - | 2.71 | - | 4.50 | - | - | - | - | - | - | - |

Sporton International (ShenZhen) Inc.


TEL: 86-755-8637-9589 FAX: 86-755-8637-9595 FCC ID: ZMOFM350GL Page Number : A12 of A45 Report Issued Date : Apr. 02, 2021

Report No. : FW051802


Report Version : Rev. 01

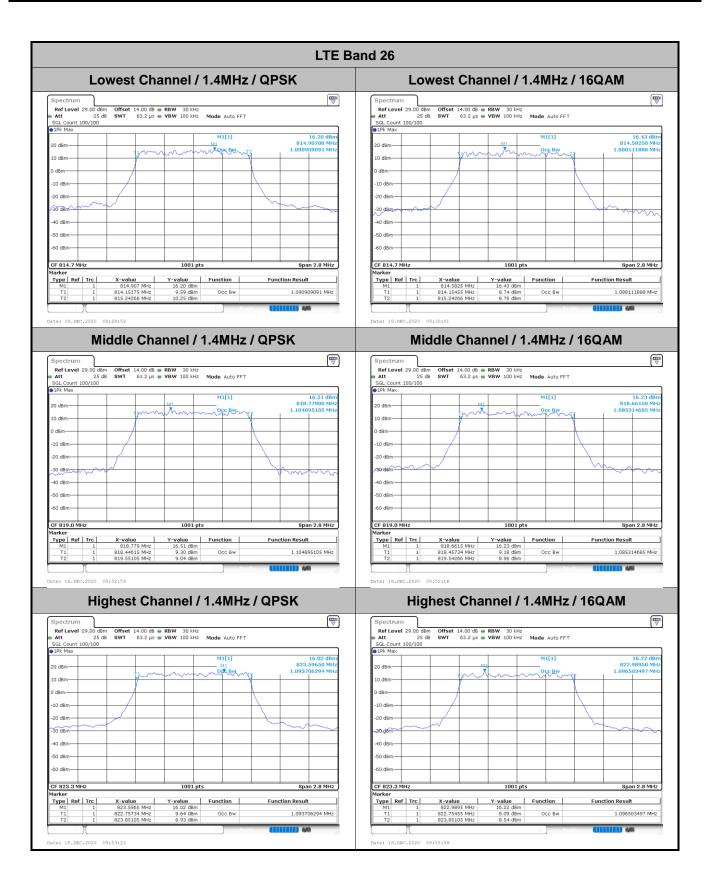


Page Number : A13 of A45
Report Issued Date : Apr. 02, 2021
Report Version : Rev. 01

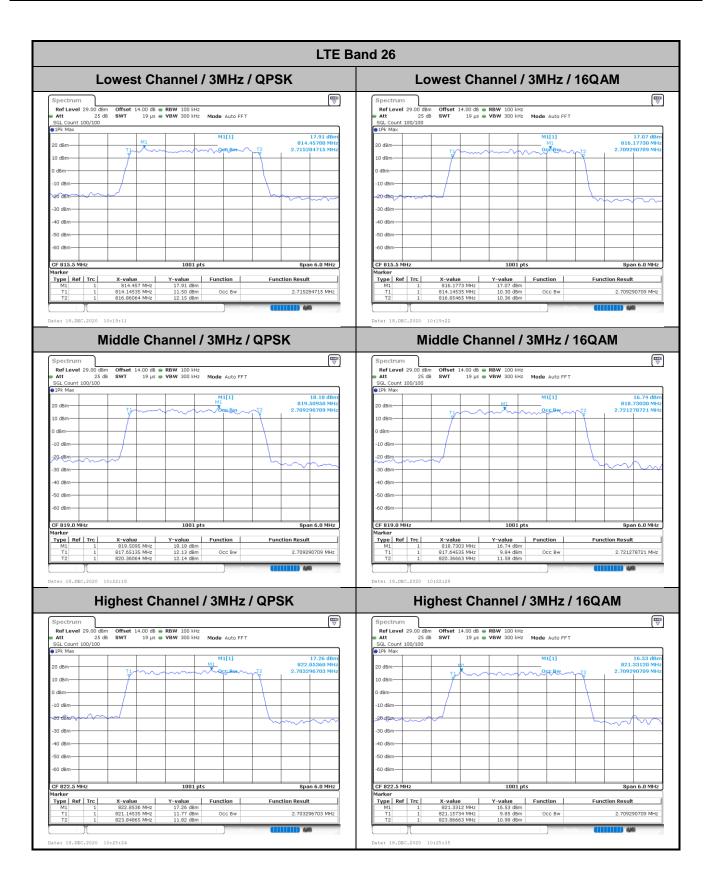


Page Number : A14 of A45 Report Issued Date : Apr. 02, 2021 Report Version : Rev. 01

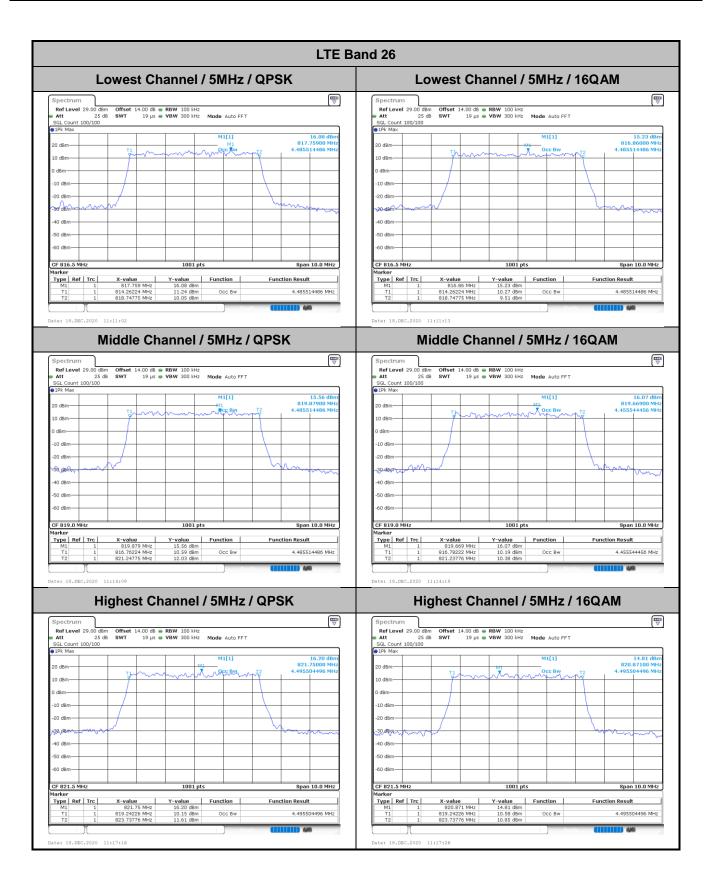

Page Number : A15 of A45 Report Issued Date : Apr. 02, 2021 Report Version : Rev. 01

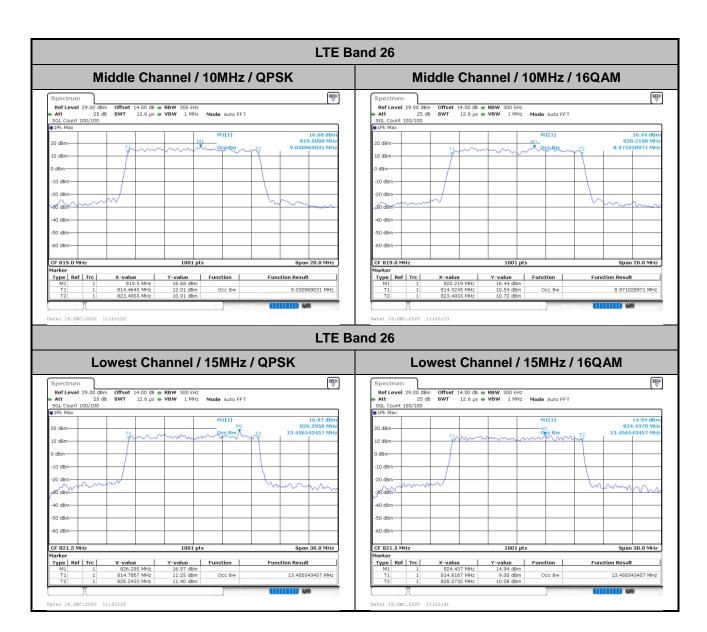

Page Number : A16 of A45 Report Issued Date : Apr. 02, 2021 Report Version : Rev. 01

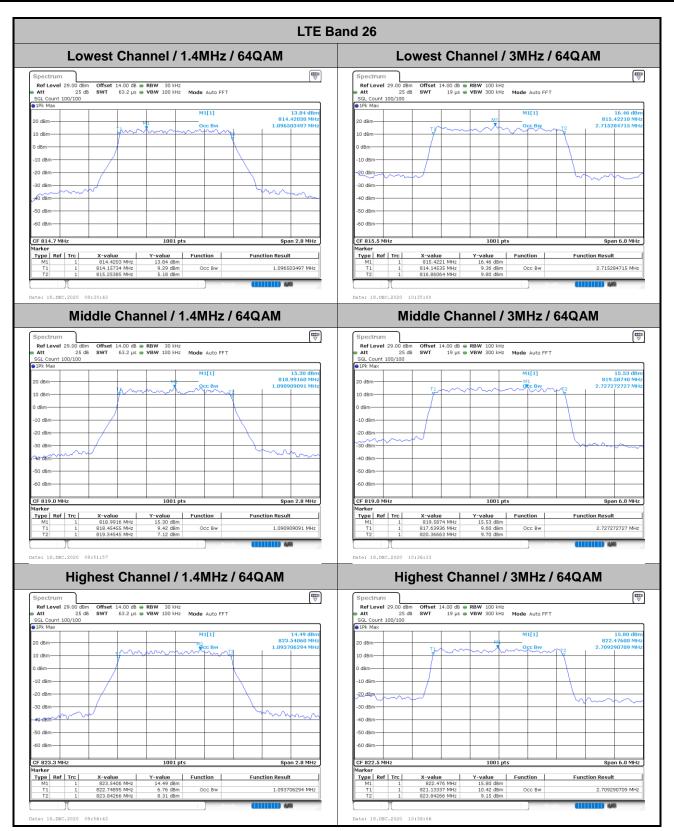

Page Number : A17 of A45
Report Issued Date : Apr. 02, 2021
Report Version : Rev. 01

LTE Band 26 Lowest Channel / 5MHz / 64QAM Y-value Function

14.51 dBm

9.64 dBm Occ Bw

7.75 dBm Type Ref Trc **Function Result** 4.495504496 MHz Middle Channel / 5MHz / 64QAM Middle Channel / 10MHz / 64QAM Offset 14.00 dB ● RBW 300 kHz SWT 12.6 µs ● VBW 1 MHz Mode Auto FFT
 X-value
 Y-value
 Function

 820.948 MHz
 14.25 dBm

 816.77223 MHz
 8.75 dBm
 Occ Bw

 821.24775 MHz
 8.91 dBm

 X-value
 Y-value


 822.277 MHz
 14.50 dB

 814.5245 MHz
 8.28 dB

 823.5155 MHz
 9.48 dB
 Type | Ref | Trc | Type | Ref | Trc | Function Function Result **Function Result** 4.475524476 MHz Occ Bw 8.991008991 MHz Highest Channel / 5MHz / 64QAM M1[1] Type Ref Trc Function Result 9.31 dBm Occ Bw 9.07 dBm 4.495504496 MHz


Sporton International (ShenZhen) Inc.

TEL: 86-755-8637-9589 FAX: 86-755-8637-9595 FCC ID: ZMOFM350GL Page Number : A18 of A45
Report Issued Date : Apr. 02, 2021
Report Version : Rev. 01

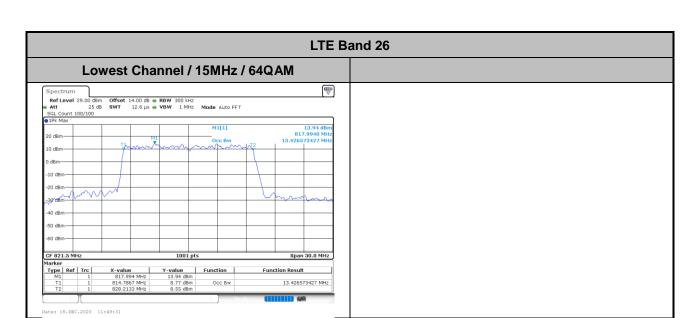


Page Number : A19 of A45
Report Issued Date : Apr. 02, 2021
Report Version : Rev. 01

Conducted Band Edge

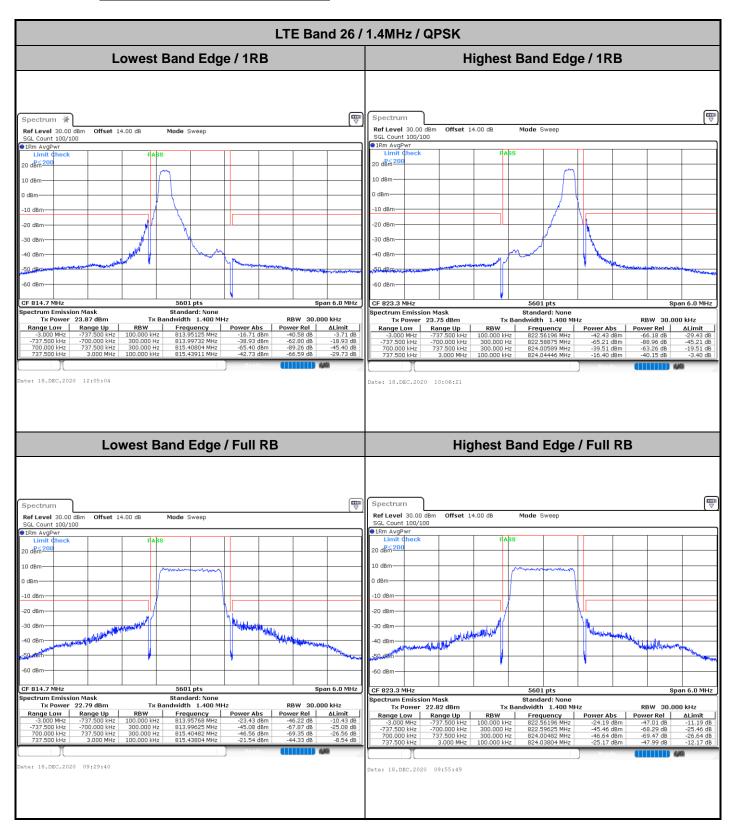


Sporton International (ShenZhen) Inc.

TEL: 86-755-8637-9589 FAX: 86-755-8637-9595 FCC ID: ZMOFM350GL Page Number : A20 of A45
Report Issued Date : Apr. 02, 2021
Report Version : Rev. 01

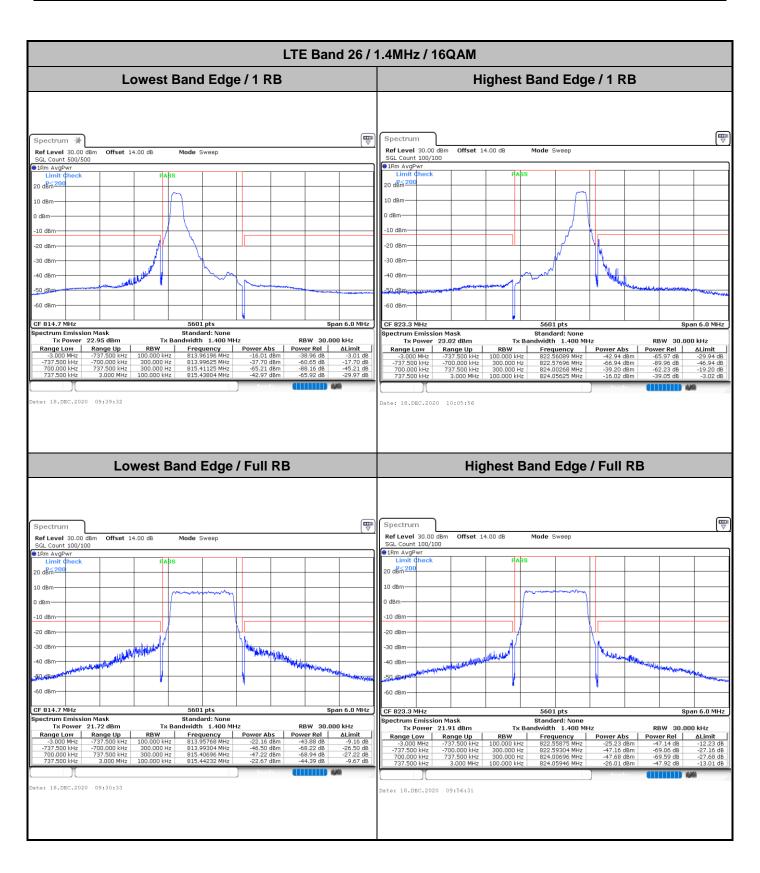


Sporton International (ShenZhen) Inc.


TEL: 86-755-8637-9589 FAX: 86-755-8637-9595 FCC ID: ZMOFM350GL Page Number : A21 of A45
Report Issued Date : Apr. 02, 2021
Report Version : Rev. 01

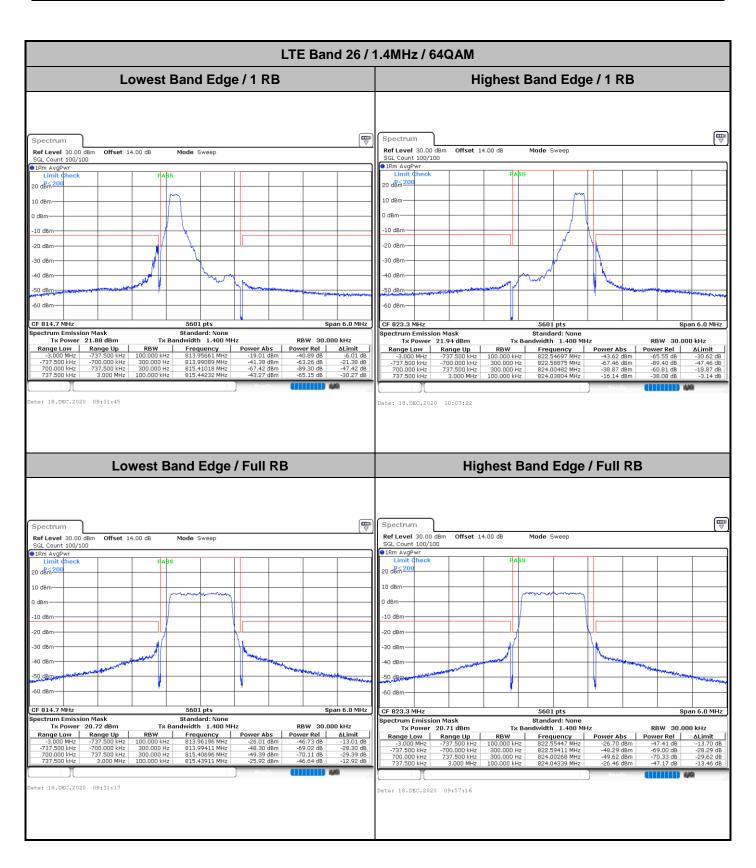

Page Number : A22 of A45
Report Issued Date : Apr. 02, 2021
Report Version : Rev. 01

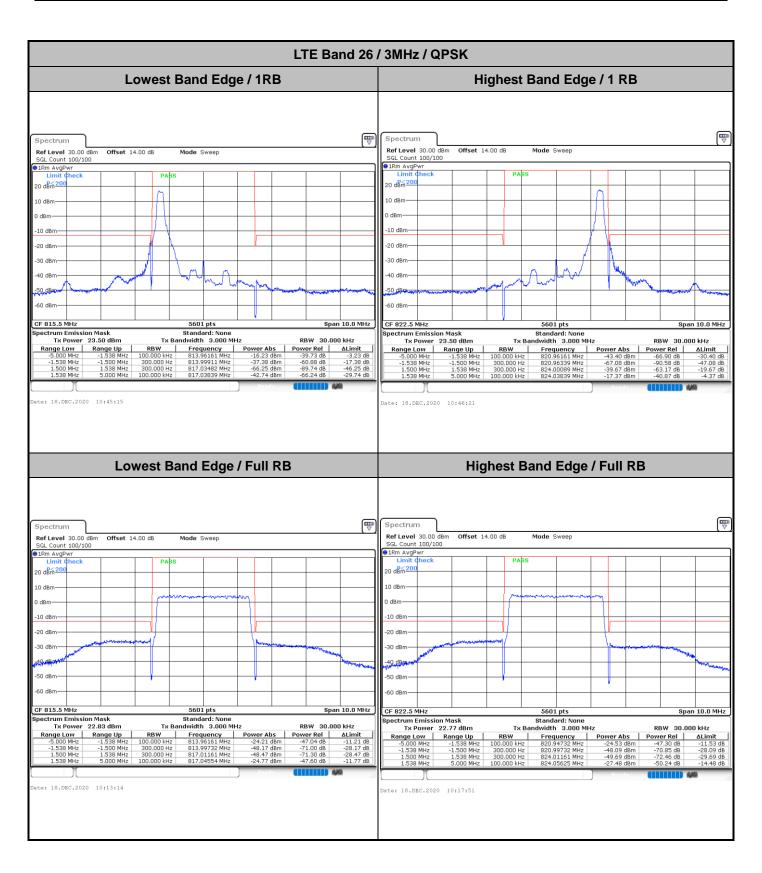


Page Number : A23 of A45
Report Issued Date : Apr. 02, 2021
Report Version : Rev. 01

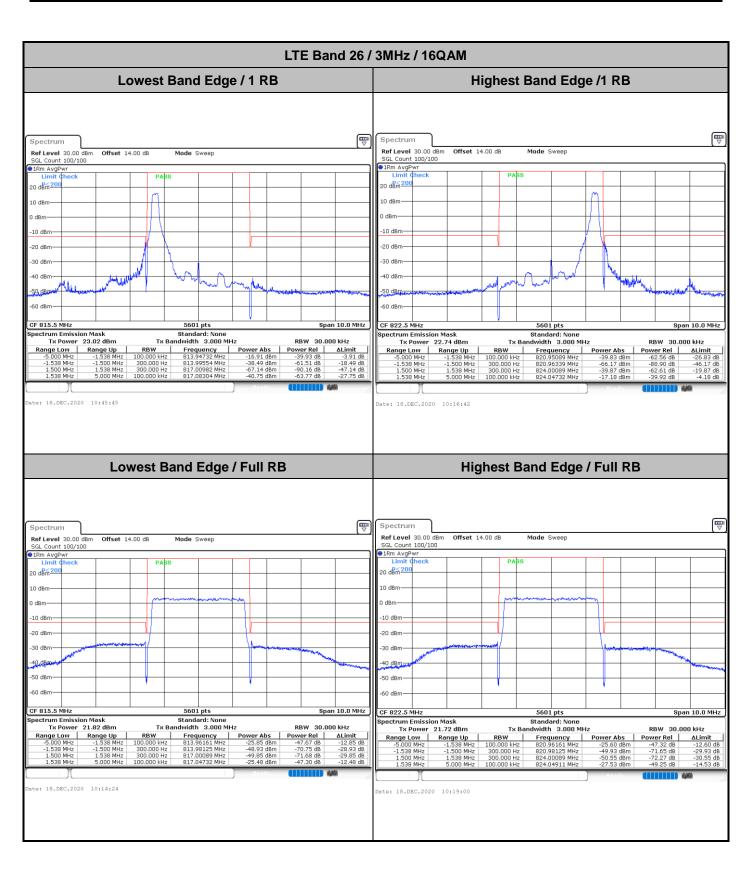

Sporton International (ShenZhen) Inc.

TEL: 86-755-8637-9589 FAX: 86-755-8637-9595 FCC ID: ZMOFM350GL Page Number : A24 of A45
Report Issued Date : Apr. 02, 2021
Report Version : Rev. 01

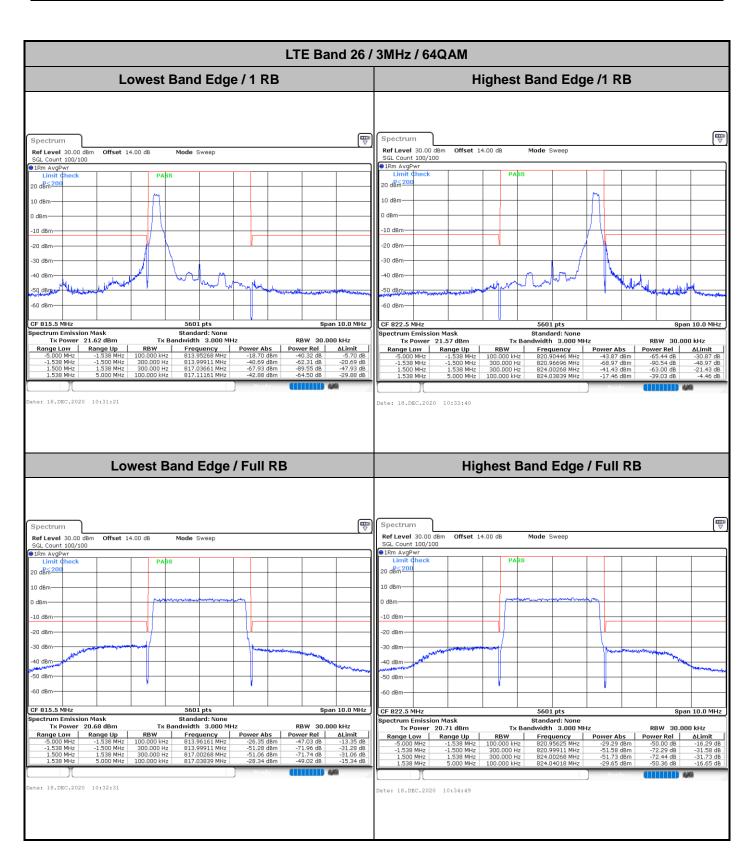

Sporton International (ShenZhen) Inc.

TEL: 86-755-8637-9589 FAX: 86-755-8637-9595 FCC ID: ZMOFM350GL Page Number : A25 of A45
Report Issued Date : Apr. 02, 2021
Report Version : Rev. 01