
Conducted Spurious Emission for Antenna 6

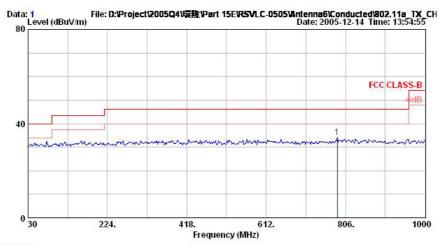

Site : 03CH06-HY


Condition :

EUT: 802.11a/b/g WLAN Radio Port-220

Power : 120Vac/60Hz Model : RSVLC-0502

Memo : 802.11a TX CH36 5180MHz

Read LISM Cable Preamp Table Over Limit Ant Freq Level Limit Line Level Factor Pos Remark Loss Factor Pos MHz dBuV/m dB dBuV/m dBuV dB/m dB cm deg 1 @ 785.63 34.18 -11.82 46.00 34.18 0 Peak 0.00 0.00 0.00 100

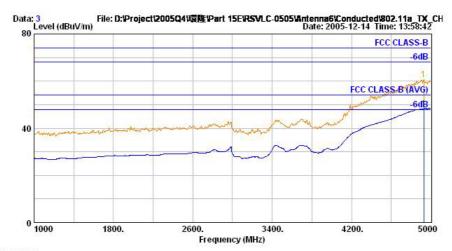

Site : 03CH06-HY

Condition : EUT : 802.11a/b/g WLAN Radio Port-220

Power : 120Vac/60Hz Model : RSVLC-0502

Memo : 802.11a TX CH36 5180MHz

Over Limit Read LISN Cable Preamp Ant Table Line Level Factor Freq Level Limit Loss Factor Pos Pos Remark dBuV -MHz dBuV/m dB dBuV/m dB/m dΒ \overline{dB} cm deg 4928.00 48.32 -5.68 54.00 48.32 0.00 0.00 0.00 100 O Average

Data: 2 File: D:\Project\2005\Q4\環隆\Part 15E\RSVLC-0505\Antenna6\Conducted\802.11a_TX_CH36.EMI Date: 2005-12-14 Time: 13:55:27

Site : 03CH06-HY

Condition


1 @

EUT : 802.11a/b/g WLAN Radio Port-220

Power : 120Vac/60Hz
Model : RSVLC-0502

Memo : 802.11a TX CH36 5180MHz

	Freq	Level		Limit Line						Table Pos	Remark
	<u>M</u> Hz	$\overline{dBuV7m}$	\overline{dB}	$\overline{d}\overline{B}\overline{u}\overline{V}\overline{/}\overline{m}$	dBu∇	<u>dB</u> /m	\overline{dB}	$\overline{-}\overline{d}\overline{B}$		deg	
1 @	4928.00	60.74	-13.26	74.00	60.74	0.00	0.00	0.00	100	0	Peak

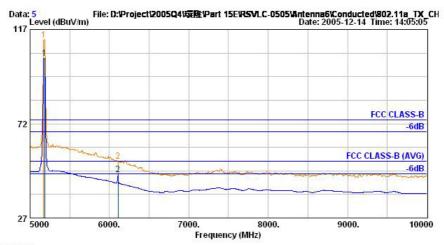

Site Condition : 03CH06-HY

802.11a/b/g WLAN Radio Port-220 120Vac/60Hz EUT

Power

Model

: RSVLC-0502 : 802.11a TX CH36 5180MHz Memo

	Freq	Level				Factor			Ant Pos	lable Pos	Remark
	<u>M</u> Hz	$\overline{\mathtt{d}}\overline{\mathtt{B}}\overline{\mathtt{u}}\overline{\mathtt{V}}7\overline{\mathtt{m}}$	\overline{dB}	$\overline{d}\overline{B}\overline{u}\overline{V}\overline{/}\overline{m}$	\overline{dBuV}	$-\overline{dB7m}$	<u>dB</u>	<u>dB</u>	cm	deg	
1 @ 2 @	5185.00 6110.00						0.00 0.00	0.00 0.00	100 100		Average Average

Condition

1 @ 2


EUT 802.11a/b/g WLAN Radio Port-220

120Vac/60Hz RSVLC-0502 Model

Memo

: 802.11a TX CH36 5180MHz

	Freq	Level				LISN Factor				Table Pos	Remark
	MHz	$\overline{\mathtt{dBuV/m}}$	\overline{dB}	$\overline{\mathtt{dBuV/m}}$	\overline{dBuV}	$-\overline{dB/m}$	−−−−dB	<u>dB</u>	cm	deg	
Ò	5170.00 6110.00							0.00	100 100		Peak Peak

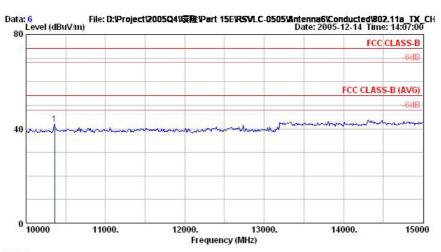

: 03CH06-HY

Condition


EUT 802.11a/b/g WLAN Radio Port-220

: 120Vac/60Hz : RSVLC-0502

Power Model

Memo : 802.11a TX CH36 5180MHz

	Freq			Limit Line						Table Pos	Remark
	<u>M</u> Hz	$\overline{d}\overline{B}\overline{u}\overline{V}\overline{/m}$	$\phantom{aaaaaaaaaaaaaaaaaaaaaaaaaaaaaaaaaaa$	$\overline{d}\overline{B}\overline{u}\overline{V}\overline{/}\overline{m}$	$-\overline{dBuV}$	$-\overline{dB/m}$	$\phantom{aaaaaaaaaaaaaaaaaaaaaaaaaaaaaaaaaaa$	$\phantom{aaaaaaaaaaaaaaaaaaaaaaaaaaaaaaaaaaa$		deg	
1	10360.00	41.93	-32.07	74.00	41.93	0.00	0.00	0.00	100	0	Peak

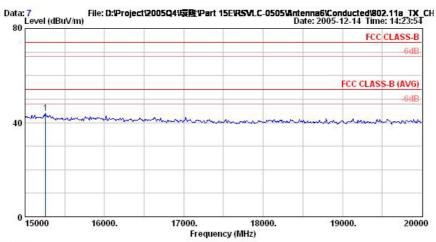

: 03CH06-HY

Site Condition


1

802.11a/b/g WLAN Radio Port-220 120Vac/60Hz

EUT Power Model Memo

: RSVLC-0502 : 802.11a TX CH36 5180MHz

Freq	Level						Preamp Factor		Table Pos	
<u>M</u> Hz	$\overline{d}\overline{B}\overline{u}\overline{V}\overline{/}\overline{m}$	$\phantom{aaaaaaaaaaaaaaaaaaaaaaaaaaaaaaaaaaa$	$\overline{d}\overline{B}\overline{u}\overline{V}\overline{/}\overline{m}$	\overline{dBuV}	$-\overline{dB/m}$	\overline{dB}	$\phantom{aaaaaaaaaaaaaaaaaaaaaaaaaaaaaaaaaaa$	cm	deg	
15260.00	44.03	-29.97	74.00	44.03	0.00	0.00	0.00	100	0	Peak

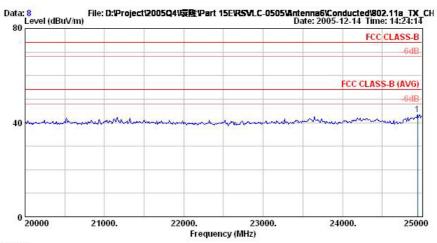


Site Condition EUT : 03CH06-HY

802.11a/b/g WLAN Radio Port-220

Power Model 120Vac/60Hz RSVLC-0502

802.11a TX CH36 5180MHz

	Freq	Level		Limit Line							
	MHz	$\overline{d}\overline{B}\overline{u}\overline{V}\overline{/m}$	$\overline{d}\overline{B}$	$\overline{d}\overline{B}\overline{u}\overline{V}\overline{/}\overline{m}$	$\overline{-d}\overline{B}\overline{u}\overline{V}$	$-\overline{dB/m}$	<u>dB</u>	$\phantom{aaaaaaaaaaaaaaaaaaaaaaaaaaaaaaaaaaa$		deg	
1	24945.00	43.35	-30.65	74.00	43.35	0.00	0.00	0.00	100	0	Peak

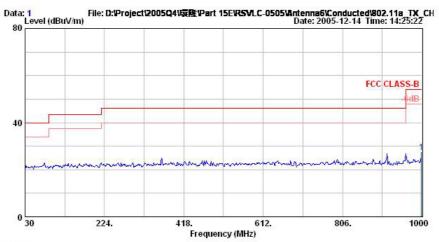

Site : 03СН06-НҮ

Condition


1

802.11a/b/g WLAN Radio Port-220 120Vac/60Hz EUT

Power Model

: RSVLC-0502 : 802.11a TX CH48 5240MHz Memo

Freq	Level				LISN Factor					
MHz	$\overline{d}\overline{B}\overline{u}\overline{V}\overline{/}\overline{m}$	$\overline{d}\overline{B}$	$\overline{d}\overline{B}\overline{u}\overline{V}\overline{/}\overline{m}$	$\overline{-d}\overline{B}\overline{u}\overline{V}$	$-\overline{dB/m}$	<u>dB</u>	$\phantom{aaaaaaaaaaaaaaaaaaaaaaaaaaaaaaaaaaa$		deg	
999.03	27.23	-26.77	54.00	27.23	0.00	0.00	0.00	100	0	Peak

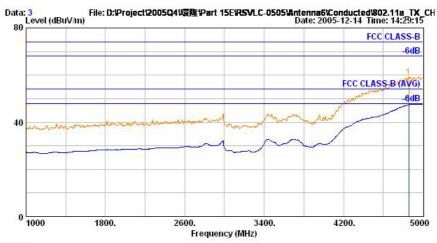

: 03CH06-HY Site

Condition EUT

802.11a/b/g WLAN Radio Port-220

Power Model 120Vac/60Hz RSVLC-0502

: 802.11a TX CH48 5240MHz

	Freq	Level						Preamp Factor			
	<u>M</u> Hz	$\overline{d}\overline{B}\overline{u}\overline{V}/\overline{m}$	<u>dB</u>	$\overline{d}\overline{B}\overline{u}\overline{V}\overline{/}\overline{m}$	\overline{dBuV}	$-\overline{dB/m}$	\overline{dB}	$\phantom{aaaaaaaaaaaaaaaaaaaaaaaaaaaaaaaaaaa$		deg	
@	4856.00	47.44	-6.56	54.00	47.44	0.00	0.00	0.00	100	0	Average

 Data: 2
 File: D:\Project\2005Q4误降\Part 15E\RSVLC-0505\Antenna6\Conducted\802.11a_TX_CH48.EMI
 Date: 2005-12-14
 Time: 14:26:45

 Site
 : 03CH06-HY

Site Condition

1


EUT 802.11a/b/g WLAN Radio Port-220

Power Model 120Vac/60Hz

: RSVLC-0502

: 802.11a TX CH48 5240MHz Memo

	Freq	Level		Limit Line						Table Pos	Remark
	<u>M</u> Hz	$\overline{d}\overline{B}\overline{u}\overline{V}\overline{/}\overline{m}$	\overline{dB}	$\overline{d}\overline{B}\overline{u}\overline{V}\overline{/}\overline{m}$	dBu∇	$-\overline{dB/m}$	\overline{dB}	$\phantom{aaaaaaaaaaaaaaaaaaaaaaaaaaaaaaaaaaa$		deg	
1 @	4856.00	59.19	-14.81	74.00	59.19	0.00	0.00	0.00	100	0	Peak

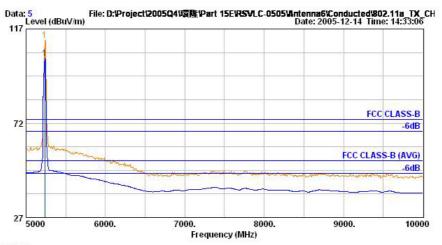

: 03CH06-HY Site

Condition

802.11a/b/g WLAN Radio Port-220 120Vac/60Hz EUT

Power Model

Memo

: RSVLC-0502 : 802.11a TX CH48 5240MHz

	Freq	Level				LISN Factor					Remark
	MHz	$\overline{\mathtt{dBuV/m}}$	<u>dB</u>	$\overline{d}\overline{B}\overline{u}\overline{V}\overline{/}\overline{m}$	—dBu∇	$-\overline{dB/m}$	<u>dB</u>	$\phantom{aaaaaaaaaaaaaaaaaaaaaaaaaaaaaaaaaaa$	cm	deg	
1 @	5235.00	102.86	48.86	54.00	102.86	0.00	0.00	0.00	100	0	Average

Data: 4 File: D:\Project\2005\Q4\環隆\Part 15E\RS\VLC-0505\Antenna6\Conducted\802.11a_TX_CH48.EMI Date: 2005-12-14 Time: 14:29:55 Site : 03CH06-HY

1 @


Condition EUT : 802.11a/b/g WLAN Radio Port-220 : 120Vac/60Hz : RSVLC-0502

Power

Model

Memo : 802.11a TX CH48 5240MHz

Freq	Level				LISN Factor				Table Pos	
<u>M</u> Hz	$\overline{\mathtt{dBuV/m}}$	$\phantom{aaaaaaaaaaaaaaaaaaaaaaaaaaaaaaaaaaa$	$\overline{\mathtt{dBuV/m}}$	\overline{dBuV}	<u></u> dB7m	<u>dB</u>	\overline{dB}	cm	deg	
5235.00	111.64	37.64	74.00	111.64	0.00	0.00	0.00	100	0	Peak

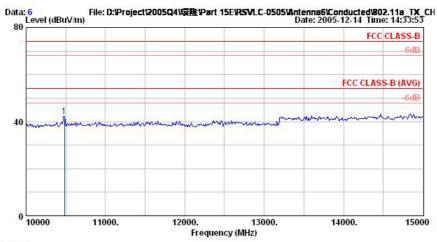

: 03CH06-HY Site

Condition


802.11a/b/g WLAN Radio Port-220 120Vac/60Hz EUT

Power

Model

: RSVLC-0502 : 802.11a TX CH48 5240MHz Memo

	Freq	Level		Limit Line							
	<u>M</u> Hz	$\overline{d}\overline{B}\overline{u}\overline{V}\overline{/m}$	$\overline{d}\overline{B}$	$\overline{d}\overline{B}\overline{u}\overline{V}\overline{/}\overline{m}$	$\overline{-d}\overline{B}\overline{u}\overline{V}$	$-\overline{dB/m}$	$\overline{d}\overline{B}$	$\phantom{aaaaaaaaaaaaaaaaaaaaaaaaaaaaaaaaaaa$		deg	
1	10485.00	42.24	-31.76	74.00	42.24	0.00	0.00	0.00	100	0	Peak

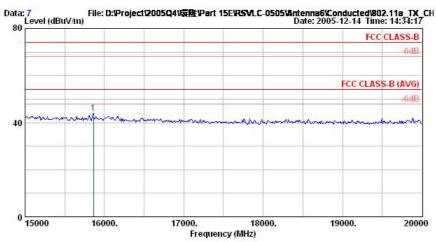

: 03CH06-HY

Site Condition


1

802.11a/b/g WLAN Radio Port-220 120Vac/60Hz

EUT Power Model Memo

: RSVLC-0502 : 802.11a TX CH48 5240MHz

Freq	Level		Limit Line						Table Pos	Remark
MHz	$\overline{d}\overline{B}\overline{u}\overline{V}\overline{/}\overline{m}$	$\phantom{aaaaaaaaaaaaaaaaaaaaaaaaaaaaaaaaaaa$	$\overline{d}\overline{B}\overline{u}\overline{V}\overline{/}\overline{m}$	dBuV	$-\overline{dB/m}$	\overline{dB}	$\phantom{aaaaaaaaaaaaaaaaaaaaaaaaaaaaaaaaaaa$		deg	
15860.00	44.11	-29.89	74.00	44.11	0.00	0.00	0.00	100	0	Peak

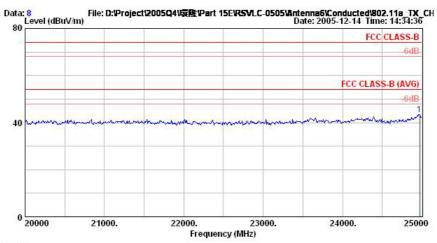


Site Condition EUT : 03CH06-HY

802.11a/b/g WLAN Radio Port-220

Power Model 120Vac/60Hz RSVLC-0502

802.11a TX CH48 5240MHz

	Freq	Level		Limit Line							
	<u>M</u> Hz	$\overline{dBuV/m}$	\overline{dB}	$\overline{d}\overline{B}\overline{u}\overline{V}\overline{/}\overline{m}$	—dBu∇	$-\overline{dB/m}$	\overline{dB}	$\overline{} \overline{d} \overline{B}$	cm	deg	
1	24970.00	43.34	-30.66	74.00	43.34	0.00	0.00	0.00	100	0	Peak

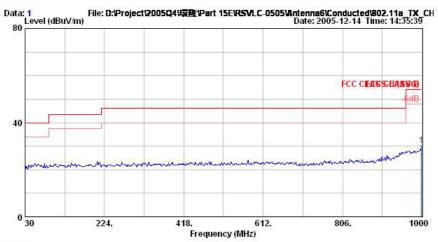

: 03СН06-НҮ Site


Condition

802.11a/b/g WLAN Radio Port-220 120Vac/60Hz EUT

Power Model

: RSVLC-0502 : 802.11a TX CH52 5260MHz Memo

	Freq	Level		Limit Line							
	MHz	$\overline{d}\overline{B}\overline{u}\overline{V}\overline{/m}$	$\overline{d}\overline{B}$	$\overline{d}\overline{B}\overline{u}\overline{V}\overline{/}\overline{m}$	$-\overline{d}\overline{B}\overline{u}\overline{V}$	$-\overline{dB/m}$	$\overline{d}\overline{B}$	$\phantom{aaaaaaaaaaaaaaaaaaaaaaaaaaaaaaaaaaa$		deg	
1 @	999.03	30.21	-23.79	54.00	30.21	0.00	0.00	0.00	100	0	Peak

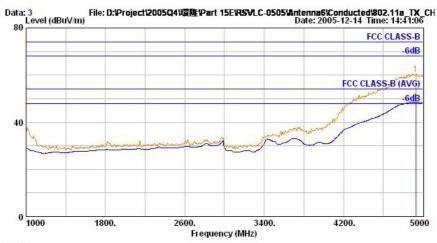

Site : 03CH06-HY

Condition EUT

802.11a/b/g WLAN Radio Port-220

Power Model 120Vac/60Hz RSVLC-0502

: 802.11a TX CH52 5260MHz

	Freq	Level		Limit Line							Remark
	M Hz	$\overline{d}\overline{B}\overline{u}\overline{V}\overline{/}\overline{m}$	<u>dB</u>	$\overline{d}\overline{B}\overline{u}\overline{V}\overline{/}\overline{m}$	—dBu∀	$-\overline{dB/m}$	<u>dB</u>	$\phantom{aaaaaaaaaaaaaaaaaaaaaaaaaaaaaaaaaaa$		deg	
1 @	4928.00	48.38	-5.62	54.00	48.38	0.00	0.00	0.00	100	0	Average

 Data: 2
 File: D:\Project\2005Q4误降\Part 15E\RSVLC-0505\Antenna6\Conducted\802.11a_TX_CH52.EMI
 Date: 2005-12-14
 Time: 14:36:17

 Site
 : 03CH06-HY

Site Condition


EUT 802.11a/b/g WLAN Radio Port-220

Power Model 120Vac/60Hz

: RSVLC-0502

Memo : 802.11a TX CH52 5260MHz

	Freq	Level		Limit Line							
	<u>M</u> Hz	$\overline{\mathtt{d} \mathtt{B} \mathtt{u} \mathtt{V} / \mathtt{m}}$	<u>dB</u>	$\overline{\tt dBuV7m}$	—dBu∀	$-\overline{dB/m}$	<u>dB</u>	$\phantom{aaaaaaaaaaaaaaaaaaaaaaaaaaaaaaaaaaa$	cm	deg	
1 @	4928.00	60.45	-13.55	74.00	60.45	0.00	0.00	0.00	100	0	Peak

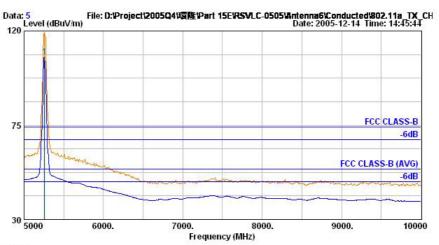

: 03CH06-HY Site

Condition

802.11a/b/g WLAN Radio Port-220 120Vac/60Hz EUT

Power Model

Memo

: RSVLC-0502 : 802.11a TX CH52 5260MHz

Freq	Level				LISN Factor					Remark
<u>M</u> Hz	$\overline{dBuV/m}$	<u>dB</u>	$\overline{d}\overline{B}\overline{u}\overline{V}\overline{/}\overline{m}$	\overline{dBuV}	$-\overline{dB/m}$	\overline{dB}	$\phantom{aaaaaaaaaaaaaaaaaaaaaaaaaaaaaaaaaaa$		deg	
5260.00	107.72	53.72	54.00	107.72	0.00	0.00	0.00	100	0	Average

Data: 4 File: D:\Project\2005\Q4\環隆\Part 15E\RS\VLC-0505\Antenna6\Conducted\802.11a_TX_CH52.EMI Date: 2005-12-14 Time: 14:42:07 Site : 03CH06-HY

Condition EUT

1 @

1 @


: 802.11a/b/g WLAN Radio Port-220 : 120Vac/60Hz : RSVLC-0502

Power

Model

Memo : 802.11a TX CH52 5260MHz

Freq	Level				LISN Factor				Table Pos	Remark
MHz	$\overline{d}\overline{B}\overline{u}\overline{V}\overline{/m}$	<u>dB</u>	$\overline{d}\overline{B}\overline{u}\overline{V}\overline{/}\overline{m}$	—dBu∀	<u>dB</u> /m	\overline{dB}	$\overline{-}\overline{d}\overline{B}$	cm	deg	
5260.00	119.31	45.31	74.00	119.31	0.00	0.00	0.00	100	0	Peak

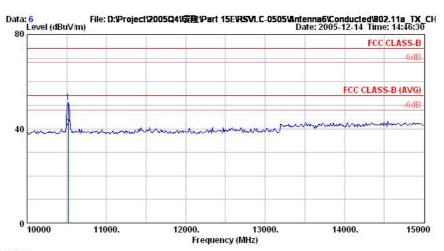


Site Condition : 03CH06-HY

: 802.11a/b/g WLAN Radio Port-220 : 120Vac/60Hz : RSVLC-0502 EUT

Power Model

Memo : 802.11a TX CH52 5260MHz

	Freq	Level		Limit Line						Table Pos	Remark
	MHz	$\overline{\mathtt{d}}\overline{\mathtt{B}}\overline{\mathtt{u}}\overline{\mathtt{V}}7\overline{\mathtt{m}}$	\overline{dB}	$\overline{\mathtt{d} \mathtt{B} \mathtt{u} \mathtt{V} 7m}$	—dBu∇	$-\overline{dB/m}$	\overline{dB}	$\phantom{aaaaaaaaaaaaaaaaaaaaaaaaaaaaaaaaaaa$	cm	deg	
1 2	10520.00 10520.00								100 100		Peak Average

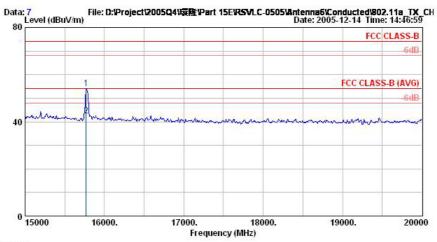


Site Condition EUT : 03CH06-HY

: 802.11a/b/g WLAN Radio Port-220 : 120Vac/60Hz : RSVLC-0502

Power Model

: 802.11a TX CH52 5260MHz

	Freq	Level				LISN Factor				Table Pos	Remark
	MHz	$\overline{dBuV/m}$	$\overline{d}\overline{B}$	$\overline{\mathtt{dBuV/m}}$	—dBu∇	<u>−−dB</u> 7m	\overline{dB}	$\overline{-}\overline{d}\overline{B}$		deg	
1 2	15770.00 15770.00						0.00		100 100		Peak Average

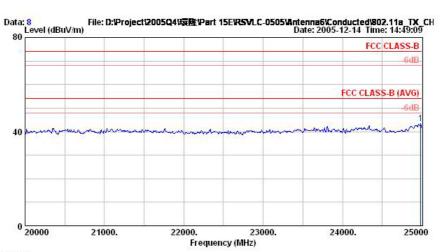


Site Condition EUT : 03CH06-HY

802.11a/b/g WLAN Radio Port-220

Power Model 120Vac/60Hz RSVLC-0502

802.11a TX CH52 5260MHz

	Freq	Level		Limit Line							
	<u>M</u> Hz	$\overline{d}\overline{B}\overline{u}\overline{V}\overline{/}\overline{m}$	<u>dB</u>	$\overline{d}\overline{B}\overline{u}\overline{V}\overline{/}\overline{m}$	$\overline{-d}\overline{B}\overline{u}\overline{V}$	$-\overline{dB/m}$	\overline{dB}	$\phantom{aaaaaaaaaaaaaaaaaaaaaaaaaaaaaaaaaaa$		deg	
1	24985.00	43.30	-30.70	74.00	43.30	0.00	0.00	0.00	100	0	Peak

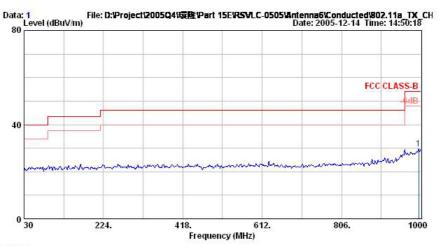

Site : 03CH06-HY

Condition

1


802.11a/b/g WLAN Radio Port-220 120Vac/60Hz EUT

Power Model RSVLC-0502

Memo

: 802.11a TX CH64 5320MHz

		Freq	Level						Preamp Factor			
		MHz	$\overline{d}\overline{B}\overline{u}\overline{V}\overline{/}\overline{m}$	\overline{dB}	$\overline{d}\overline{B}\overline{u}\overline{V}\overline{/}\overline{m}$	$\overline{-d}\overline{B}\overline{u}\overline{V}$	$-\overline{dB/m}$	$\overline{d}\overline{B}$	$\phantom{aaaaaaaaaaaaaaaaaaaaaaaaaaaaaaaaaaa$		deg	
1	@	994.18	29.81	-24.19	54.00	29.81	0.00	0.00	0.00	100	0	Peak

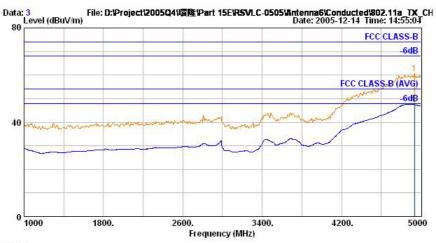

: 03CH06-HY Site

Condition

EUT 802.11a/b/g WLAN Radio Port-220

Power Model 120Vac/60Hz RSVLC-0502

: 802.11a TX CH64 5320MHz

Over Limit Read LISM Cable Preamp Ant Table Freq Level Limit Line Level Factor Loss Factor Pos Pos Remark MHz dBuV7m dB dBuV/m dBuV dB/m dB deg cm 1 @ 4936.00 47.46 -6.54 54.00 47.46 0.00 0.00 0.00 100 0 Average

Data: 2 File: D:\Project\2005Q4\缓降\Part 15E\RSVLC-0505\Antenna6\Conducted\802.11a_TX_CH64.EMI Date: 2005-12-14 Time: 14:50:46

Site 03CH06-HY

Condition


EUT 802.11a/b/g WLAN Radio Port-220

120Vac/60Hz Power

Model RSVLC-0502

: 802.11a TX CH64 5320MHz

	Freq	Level		Limit Line							
	<u>M</u> Hz	$\overline{dBuV7m}$	\overline{dB}	$\overline{d}\overline{B}\overline{u}\overline{V}\overline{/}\overline{m}$	dBu∇	$-\overline{dB/m}$	\overline{dB}	$\overline{-}\overline{d}\overline{B}$		deg	
1 @	4936.00	60.70	-13.30	74.00	60.70	0.00	0.00	0.00	100	0	Peak

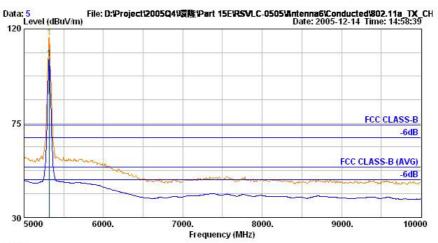

: 03CH06-HY Site

Condition

802.11a/b/g WLAN Radio Port-220 120Vac/60Hz EUT

Power Model

Memo

: RSVLC-0502 : 802.11a TX CH64 5320MHz

Freq	Level				LISN Factor				Table Pos	
M Hz	$\overline{dBuV/m}$	<u>dB</u>	$\overline{d}\overline{B}\overline{u}\overline{V}\overline{/}\overline{m}$	—dBu∇	$-\overline{dB/m}$	<u>dB</u>	$\phantom{aaaaaaaaaaaaaaaaaaaaaaaaaaaaaaaaaaa$		deg	
5320.00	105.86	51.86	54.00	105.86	0.00	0.00	0.00	100	0	Average

Data: 4 File: D:\Project\2005\Q4\環隆\Part 15E\RS\VLC-0505\Antenna6\Conducted\802.11a_TX_CH64.EMI Date: 2005-12-14 Time: 14:55:53 Site : 03CH06-HY

1 @

1 @


Condition EUT : 802.11a/b/g WLAN Radio Port-220 : 120Vac/60Hz : RSVLC-0502

Power

Model

Memo : 802.11a TX CH64 5320MHz

Freq	Level				LISN Factor				Table Pos	Remark
MHz	$\overline{\mathtt{d} \mathtt{B} \mathtt{u}} \overline{\mathtt{V}} / \overline{\mathtt{m}}$	$\phantom{aaaaaaaaaaaaaaaaaaaaaaaaaaaaaaaaaaa$	$\overline{\mathtt{d} \mathtt{B} \mathtt{u} \mathtt{V} 7m}$	\overline{dBuV}	$-\overline{dB/m}$	\overline{dB}	$\phantom{aaaaaaaaaaaaaaaaaaaaaaaaaaaaaaaaaaa$	cm	deg	
5320.00	116.08	42.08	74.00	116.08	0.00	0.00	0.00	100	0	Peak

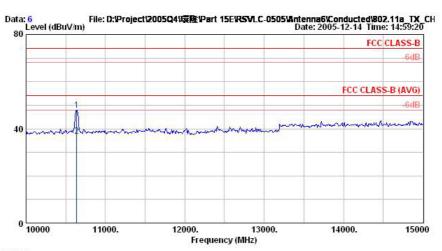


Site Condition : 03CH06-HY

EUT 802.11a/b/g WLAN Radio Port-220

120Vac/60Hz RSVLC-0502 Power Model

Memo : 802.11a TX CH64 5320MHz

	Freq	Level		Limit Line						Table Pos	Remark
	MHz	$\overline{d}\overline{B}\overline{u}\overline{V}\overline{/m}$	$\phantom{aaaaaaaaaaaaaaaaaaaaaaaaaaaaaaaaaaa$	$\overline{\mathtt{d} \mathtt{B} \mathtt{u} \mathtt{V} 7m}$	—dBu∇	$-\overline{dB/m}$	\overline{dB}	$\phantom{aaaaaaaaaaaaaaaaaaaaaaaaaaaaaaaaaaa$	cm	deg	
1 2	10635.00 10635.00						0.00 0.00	0.00 0.00	100 100		Peak Average

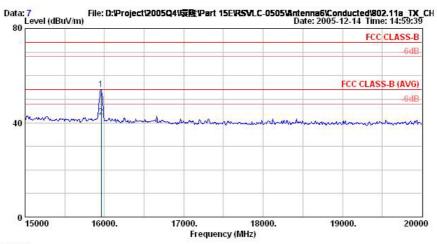


: 03CH06-HY

Site Condition EUT : 802.11a/b/g WLAN Radio Port-220 : 120Vac/60Hz : RSVLC-0502

Power Model

: 802.11a TX CH64 5320MHz

	Freq	Level				LISN Factor				Table Pos	
	<u>M</u> Hz	$\overline{d}\overline{B}\overline{u}\overline{V}\overline{/}\overline{m}$	${dB}$	$\overline{d}\overline{B}\overline{u}\overline{V}\overline{/}\overline{m}$	<u>dBuV</u>	$-\overline{dB/m}$	<u>dB</u>	$\overline{d}\overline{B}$	cm	deg	
1 2	15960.00 15960.00						0.00		100 100		Peak Average

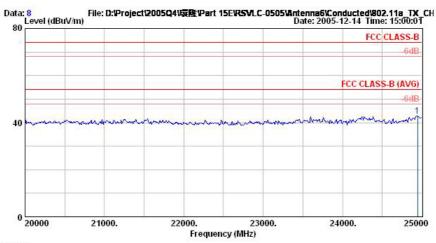

Site Condition EUT : 03CH06-HY

802.11a/b/g WLAN Radio Port-220

Power Model 120Vac/60Hz RSVLC-0502

802.11a TX CH64 5320MHz

	Freq	Level				LISN Factor					
	<u>M</u> Hz	$\overline{d}\overline{B}\overline{u}\overline{V}\overline{/m}$	<u>dB</u>	$\overline{d}\overline{B}\overline{u}\overline{V}\overline{/}\overline{m}$	$\overline{-d}\overline{B}\overline{u}\overline{V}$	$-\overline{dB/m}$	\overline{dB}	$\phantom{aaaaaaaaaaaaaaaaaaaaaaaaaaaaaaaaaaa$		deg	
1	24945.00	42.95	-31.05	74.00	42.95	0.00	0.00	0.00	100	0	Peak