

System Check_Head_5850MHz

DUT: D5GHzV2-1171

Communication System: CW; Frequency: 5850 MHz; Duty Cycle: 1:1

Medium: HSL_5G_221031 Medium parameters used : $f = 5850$ MHz; $\sigma = 5.32$ S/m; $\epsilon_r = 35.533$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.6 °C; Liquid Temperature : 22.6 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7625; ConvF(4.78, 4.78, 4.78) @ 5850 MHz; Calibrated: 2022/1/27
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1424; Calibrated: 2022/1/20
- Phantom: ELI V8.0 (20deg probe tilt); Type: QD OVA 004 Ax; Serial: 2055
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Pin=100mW/Area Scan (71x71x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 23.3 W/kg


Pin=100mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 73.36 V/m; Power Drift = -0.16 dB

Peak SAR (extrapolated) = 42.5 W/kg

SAR(1 g) = 8.38 W/kg; SAR(10 g) = 2.35 W/kg

Maximum value of SAR (measured) = 22.8 W/kg

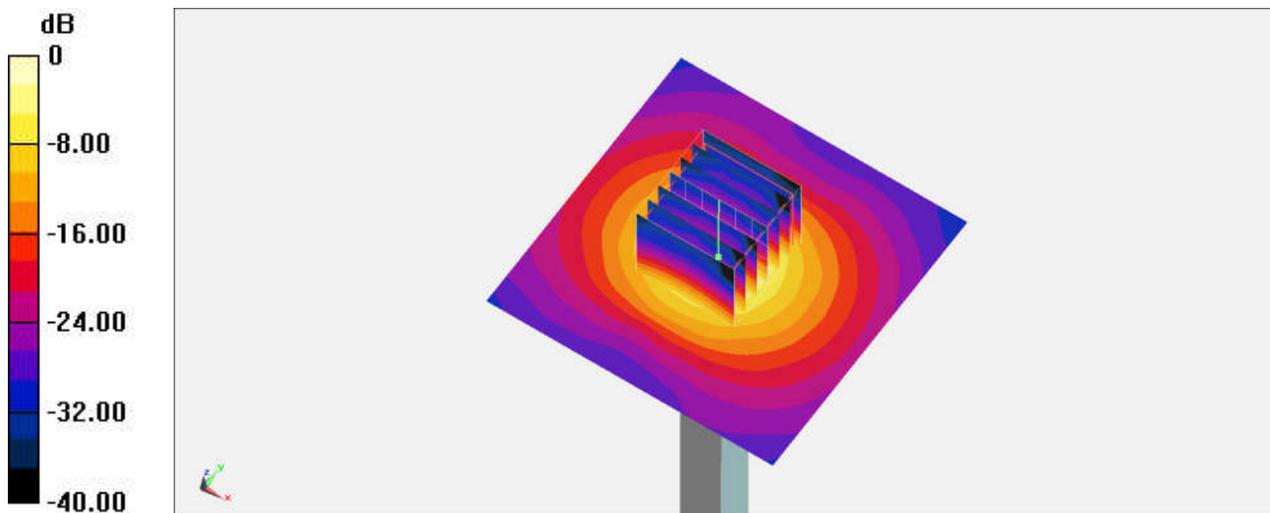

0 dB = 23.3 W/kg = 13.67 dBW/kg