

# Regulatory WLAN Antenna Information (NB mode)

Platform information										
Brand	ODM		RMN	Intel platform (ex: Yes, No or NA)		Platform type (ex: regular NB, convertible PC, AIO...etc)		*SAR minimum separation (mm)		
HP Inc.	Compal		TPN-C157 TPN-C158	Yes No		Convertible PC		1.95		
*****Please fill in exact product model name and make sure the model name is visible on product cover or any parts for end users recognize for authority inspection.										
Antenna information										
Vendor		Type			Antenna Part number (Main/Tx2)			Antenna Part number (Aux/Tx1)		
WNC		PIFA			48EABP01.SGCLOC			48EABP02.SGCLOC		
Peak gain w/ cable loss (dBi)*										
	2.4GHz 2400-2483.5 MHz	5.2GHz 5150-5250MHz	5.3GHz 5250-5350MHz	5.6GHz 5470-5725MHz	5.8GHz 5725-5850MHz	5.9GHz 5850-5895MHz	6.2GHz 5925-6425MHz	6.5GHz 6425-6525MHz	6.7GHz 6525-6875MHz	7.0 GHz 6875-7125MHz
Main	1.84	0.71	2.17	1.26	1.22	1.22	2.64	1.78	2.98	2.98
Aux	0.47	1	-1.17	2.4	2.84	2.84	2.75	2.5	2.5	1.83
Module Information										
Model		Form factor and suffixes								
RTL8852CE		Realtek Champagne 8852CE Wi-Fi 6E +Bluetooth 5.3 M.2 2230 PCI-e+USB WW WLAN								

# Antenna Information

## Section 1. Antenna Assembly Specifications


1A Antenna Part Number	1B Manufacturer	1C Antenna Type	1D Cable Assembly Part Number and Information	Freq Range MHz	1E * Peak Gain W/ Cable loss (dBi)	1F Peak Gain w/o Cable Loss (dBi)	1G Max VSWR	1H Cable Loss (dB)
P/N: 48EABP01.SGCLOC Main Antenna (TX2)	Wistron Neweb Corporation	PIFA	P/N: MHF-4L PLUG -20632-001R-37 50 ohm Coaxial length: 430cm diameter: 1.37mm	2400-2495	1.84	2.84	3.0	1.00
				5150-5250	0.71	2.20	3.0	1.49
				5250-5350	2.17	3.67	3.0	1.50
				5470-5725	1.26	2.80	3.0	1.54
				5725-5850	1.22	2.78	3.0	1.56
				5850-5925	1.22	2.80	3.0	1.58
				5925-6425	2.64	4.26	3.0	1.62
				6425-6525	1.78	3.45	3.0	1.67
				6525-6875	2.98	4.69	3.0	1.71
6875-7125	2.98	4.75	3.0	1.77				
P/N: 48EABP02.SGCLOC Aux Antenna (TX1)	Wistron Neweb Corporation	PIFA	P/N: MHF-4L PLUG -20632-001R-37 50 ohm Coaxial length: 535cm diameter: 1.37mm	2400-2495	0.47	1.71	3.0	1.24
				5150-5250	1.00	2.85	3.0	1.85
				5250-5350	-1.17	0.70	3.0	1.87
				5470-5725	2.40	4.31	3.0	1.91
				5725-5850	2.84	4.79	3.0	1.95
				5850-5925	2.84	4.80	3.0	1.96
				5925-6425	2.75	4.77	3.0	2.02
				6425-6525	2.50	4.58	3.0	2.08
				6525-6875	2.50	4.63	3.0	2.13
6875-7125	1.83	4.03	3.0	2.20				

- Antenna Peak Gain required being test in system basis.
- 1E frame contend absolutely peak antenna gain include H/V


## Section 3. Radiation characteristics of antenna loaded in Host Platform

### Main Antenna


#### Max Antenna 2D Radiation Pattern 2400 – 2495 MHz

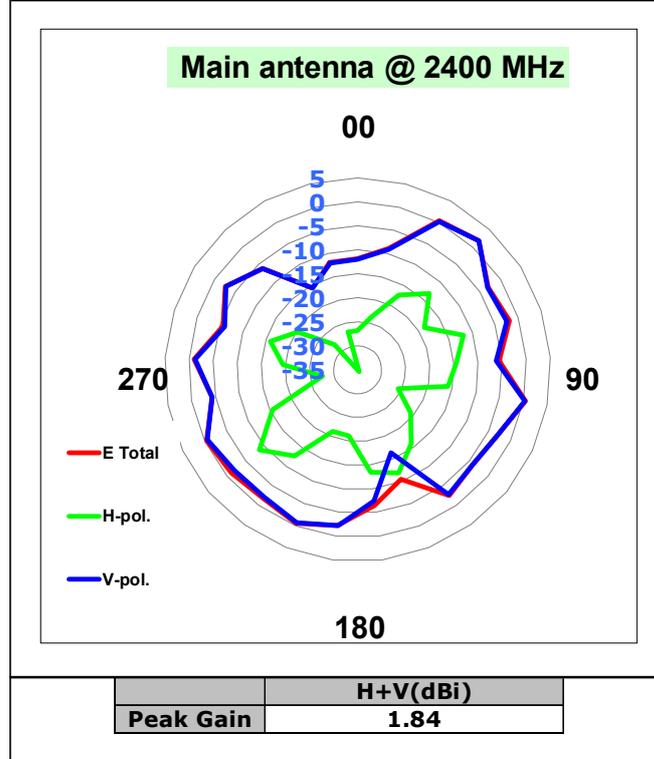


#### Max Antenna 2D Radiation Pattern 5150-5250 MHz

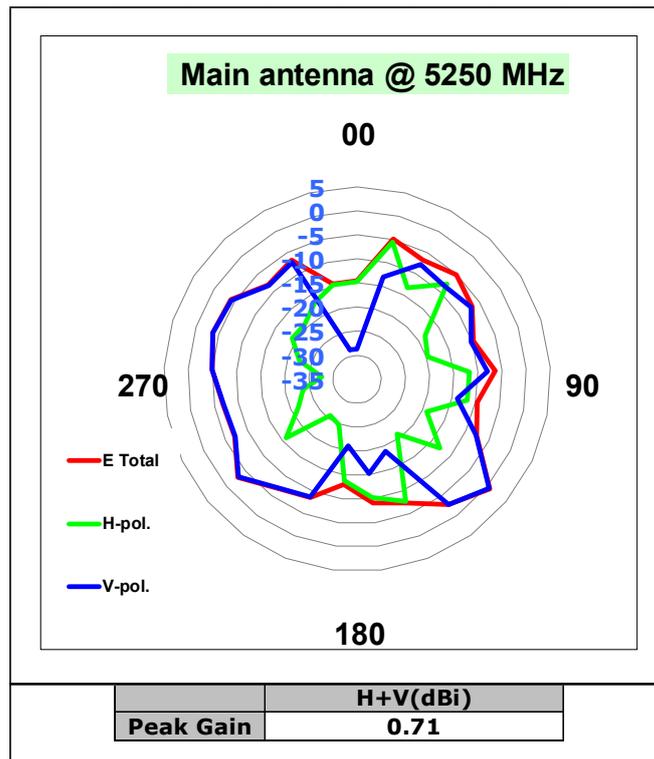


### Max Antenna 2D Radiation Pattern 5250-5350 MHz

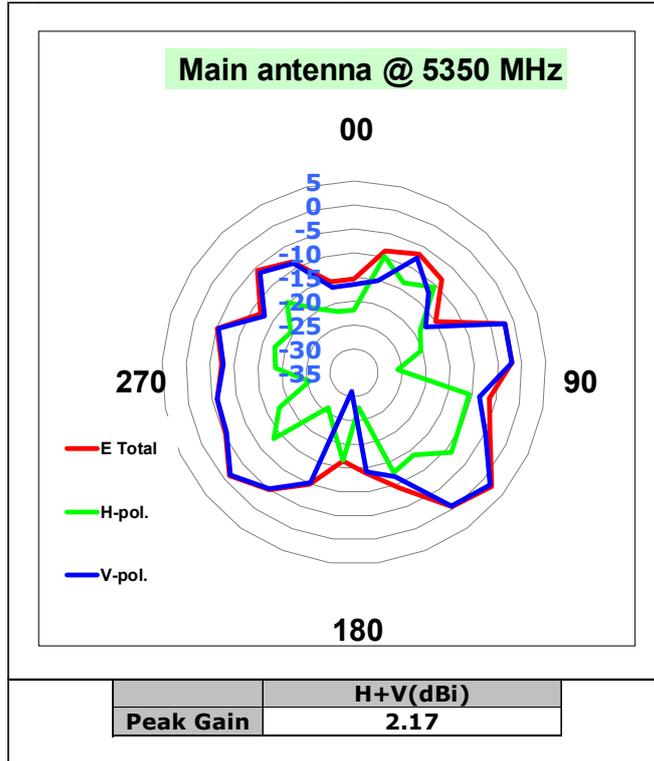


### Max Antenna 2D Radiation Pattern 5470-5725 MHz

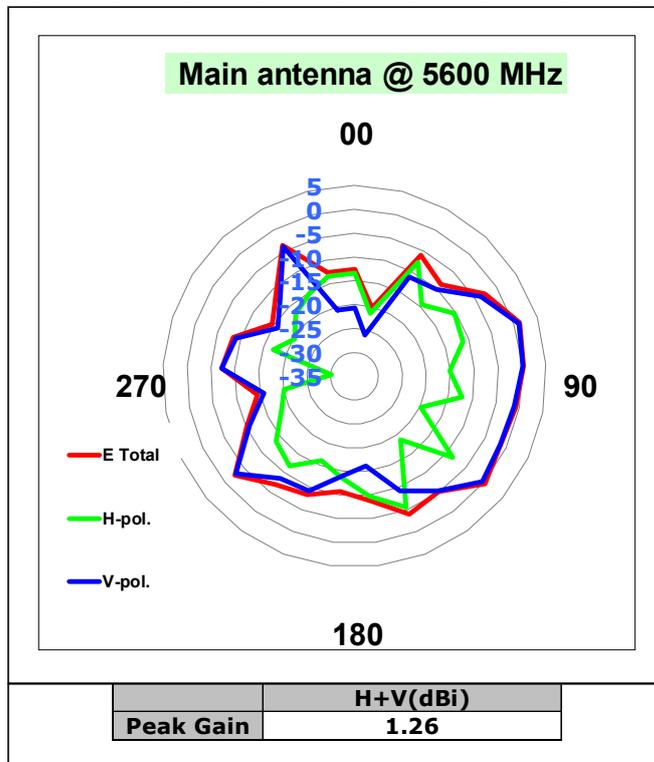


### Max Antenna 2D Radiation Pattern 5725-5850 MHz

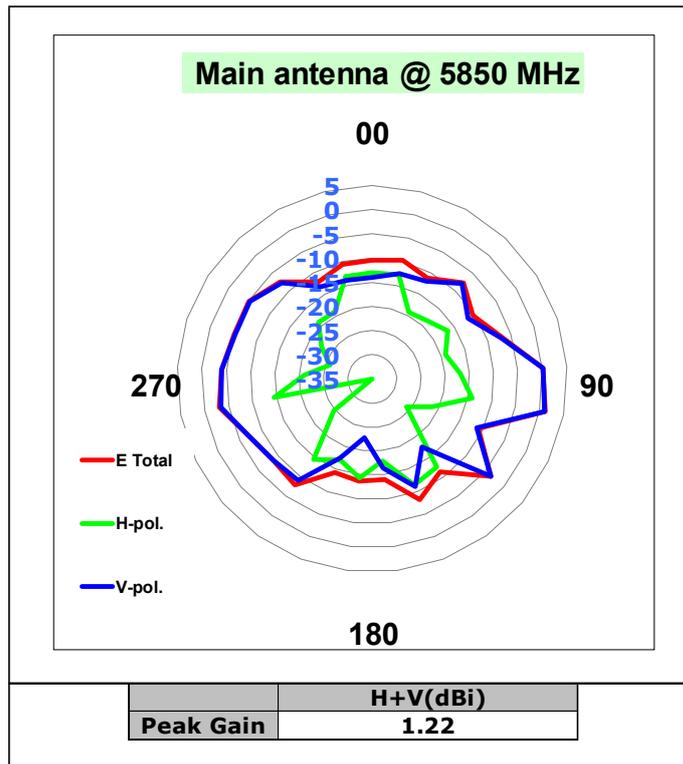


### Max Antenna 2D Radiation Pattern 5850-5895 MHz

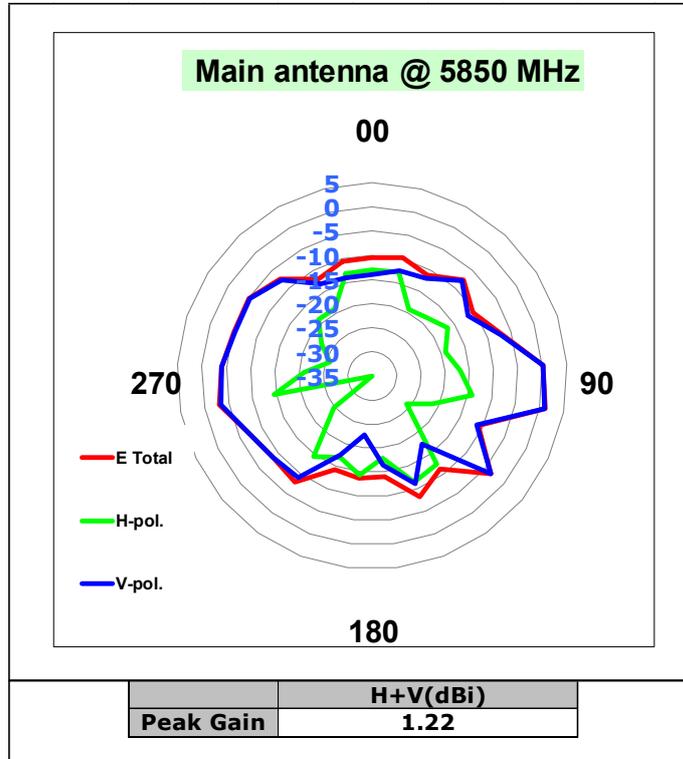


### Max Antenna 2D Radiation Pattern 5925-6425 MHz

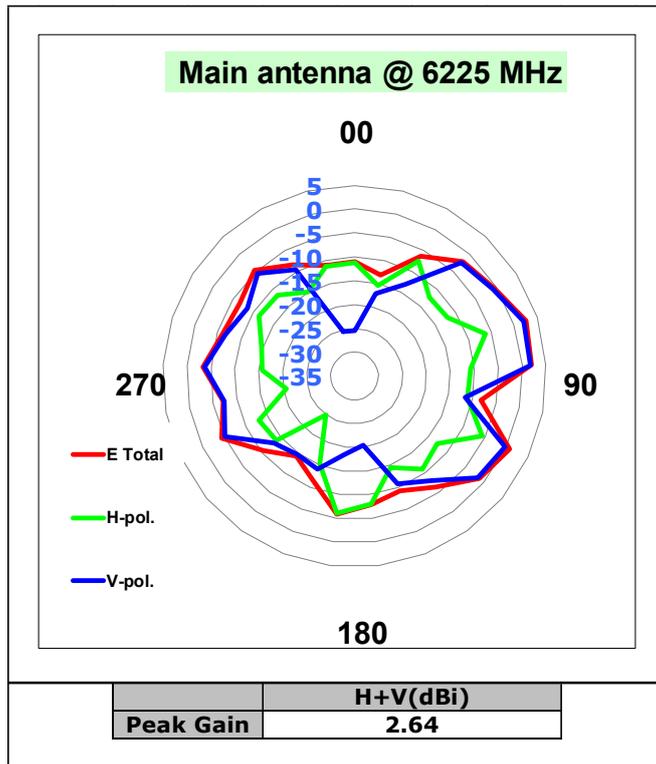


### Max Antenna 2D Radiation Pattern 6425-6525 MHz

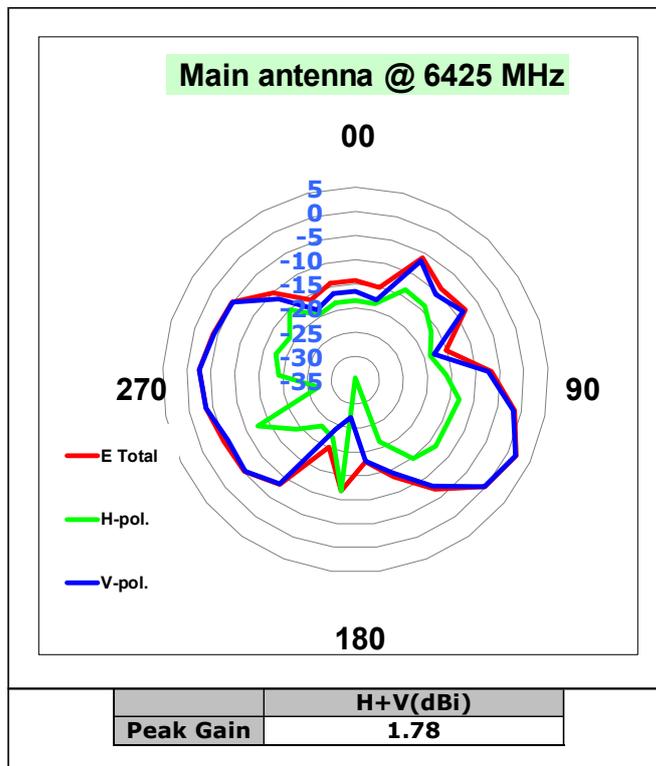

### Max Antenna 2D Radiation Pattern 6525-6875 MHz

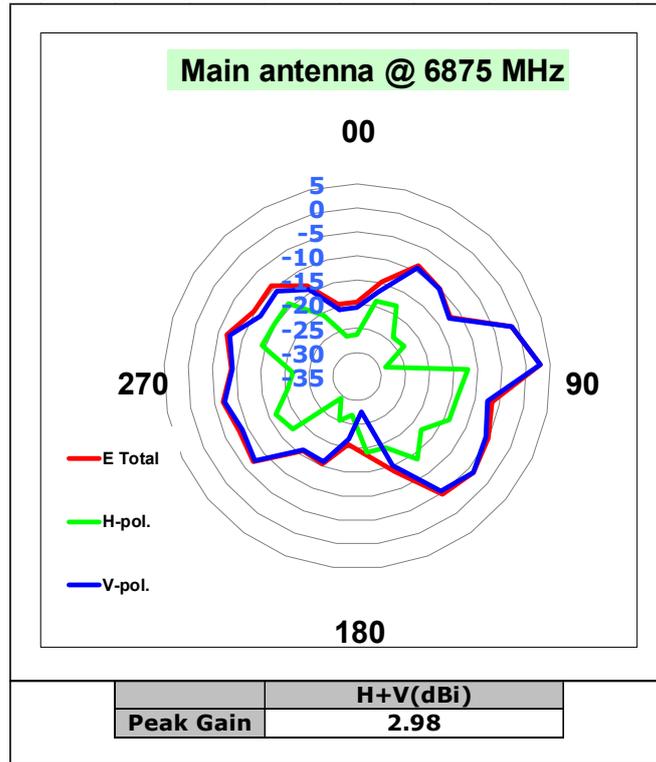


### Max Antenna 2D Radiation Pattern 6875-7125 MHz

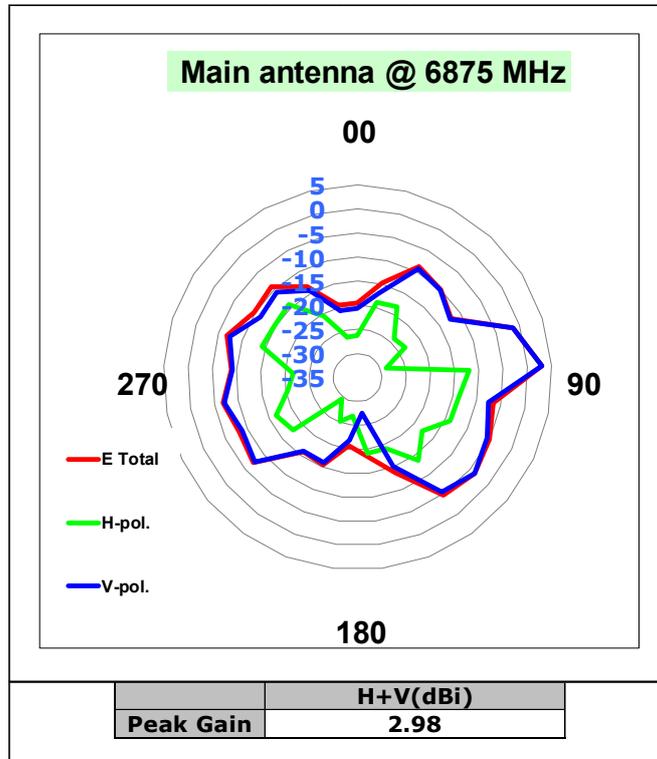


## Auxiliary Antenna


### Max Antenna 2D Radiation Pattern 2400 – 2483.5 MHz

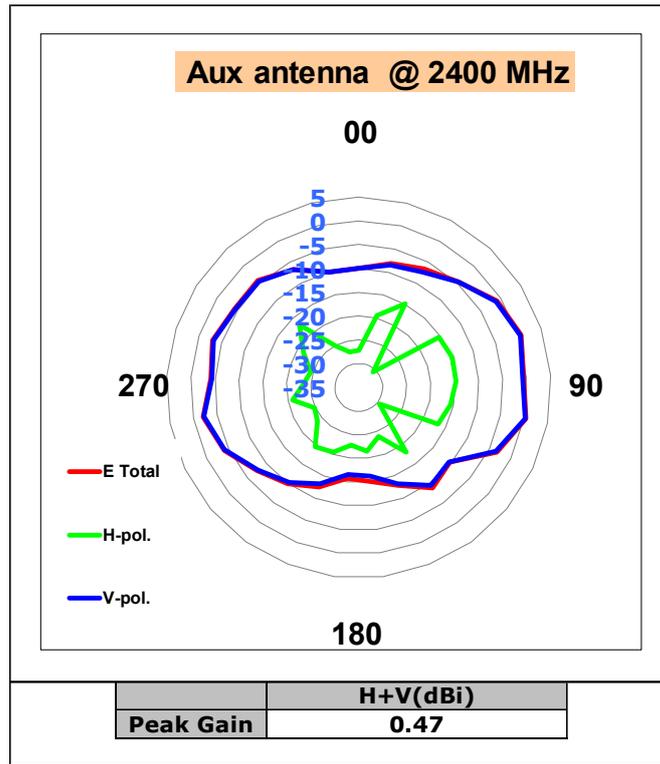


### Max Antenna 2D Radiation Pattern 5150-5250 MHz

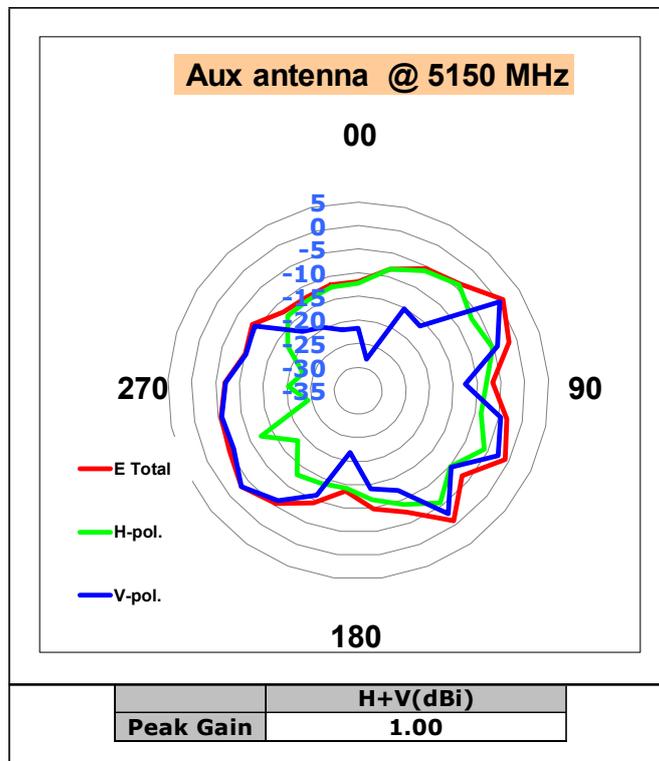


### Max Antenna 2D Radiation Pattern 5250-5350 MHz

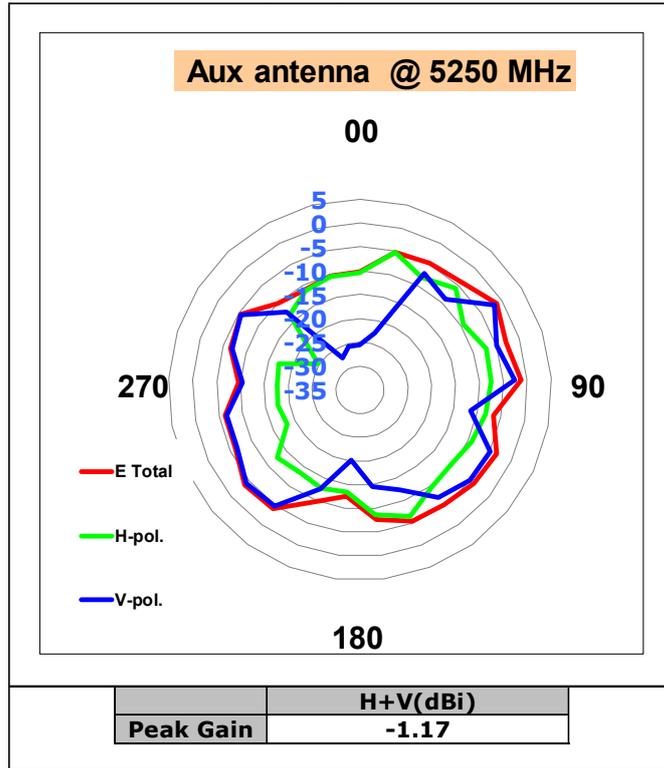


### Max Antenna 2D Radiation Pattern 5470-5725 MHz

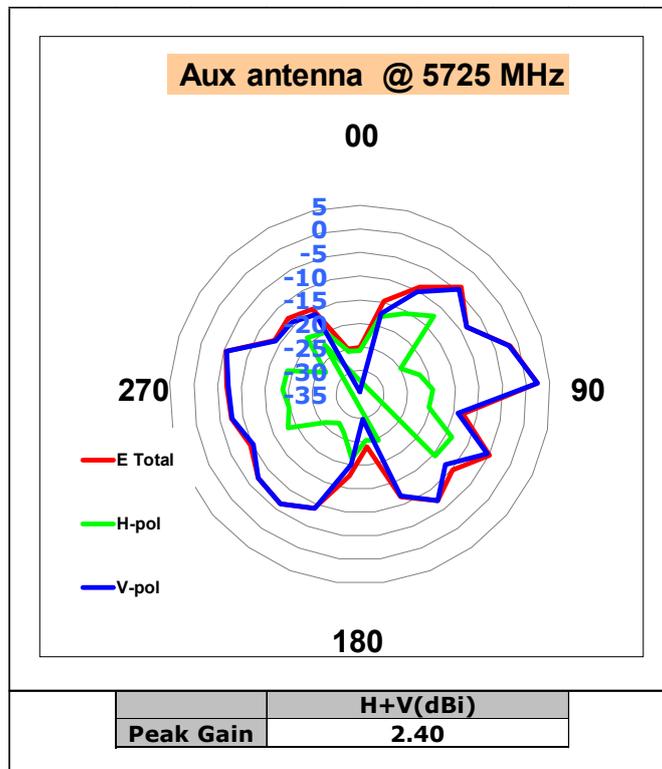


### Max Antenna 2D Radiation Pattern 5725-5850 MHz

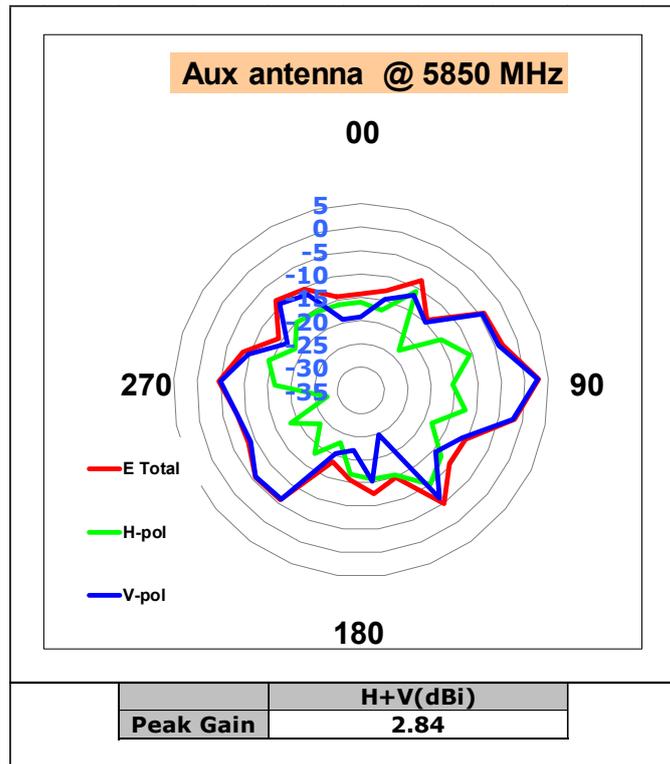


### Max Antenna 2D Radiation Pattern 5850-5895 MHz

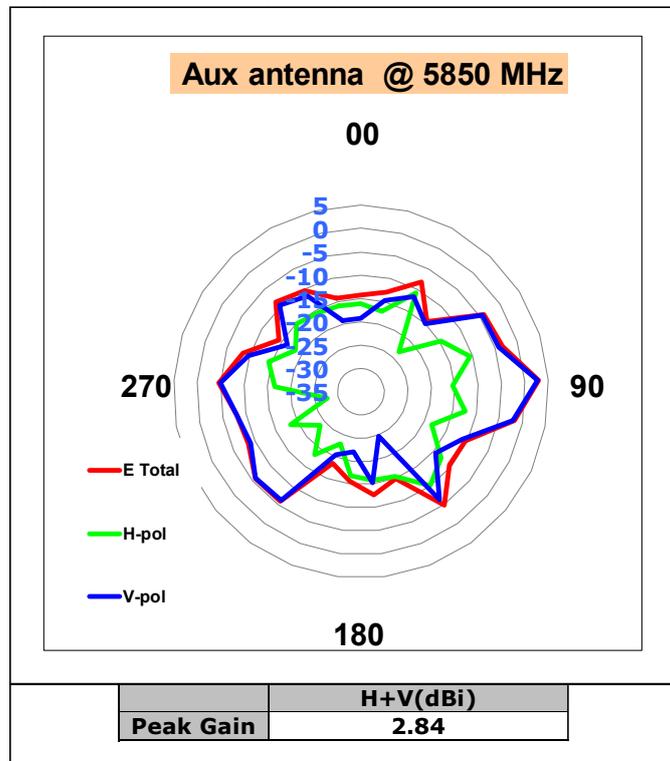


### Max Antenna 2D Radiation Pattern 5925-6425 MHz

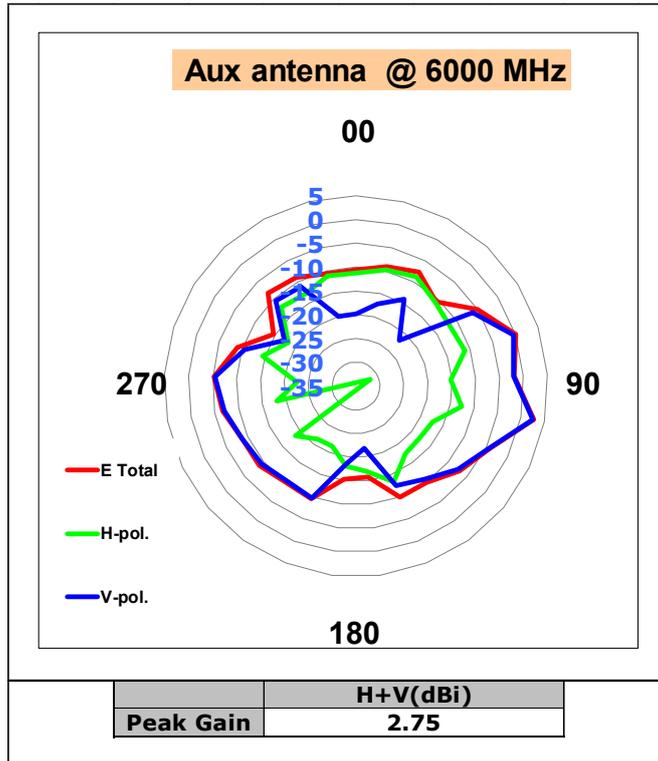

### Max Antenna 2D Radiation Pattern 6425-6525 MHz

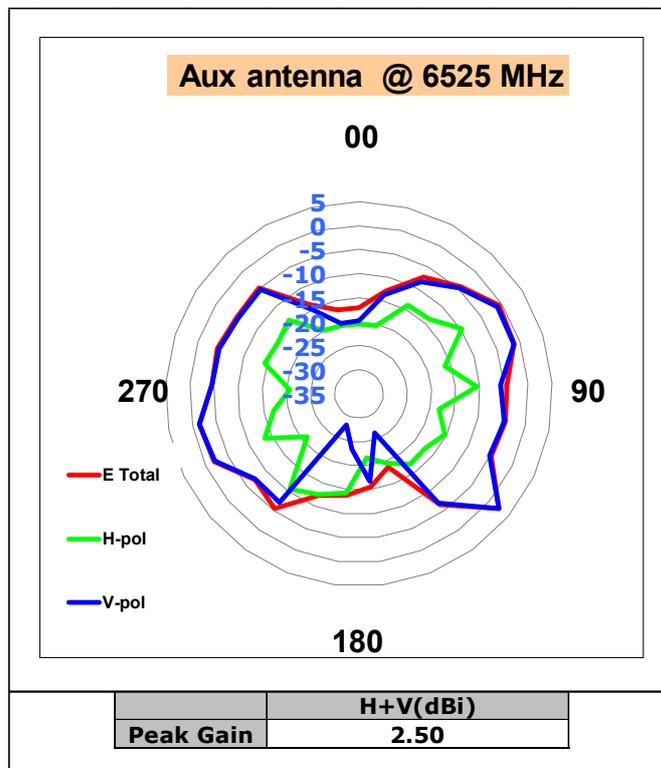

### Max Antenna 2D Radiation Pattern 6525-6875 MHz

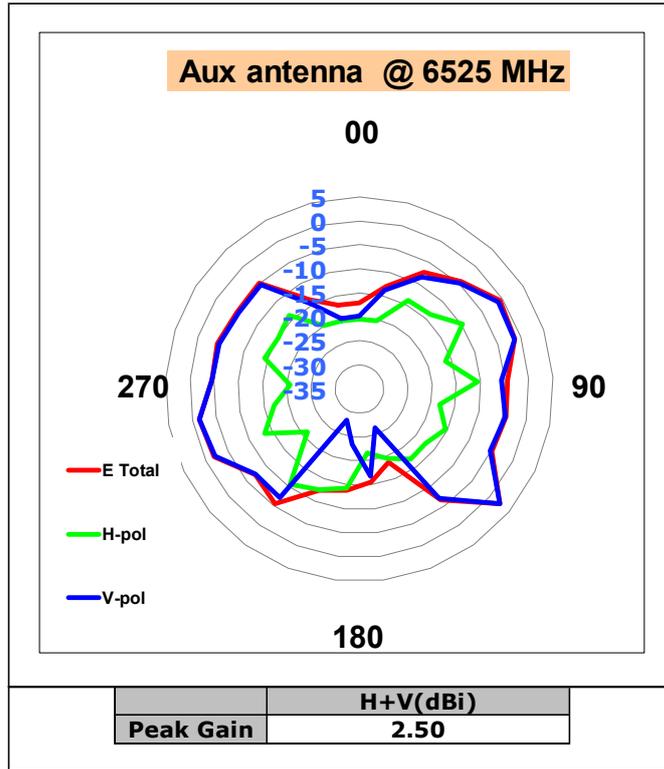

### Max Antenna 2D Radiation Pattern 6875-7125 MHz

