

TEST REPORT

CERTIFICATE OF CONFORMITY

Standard: 47 CFR FCC Part 15, Subpart C (Section 15.247)

Report No.: RFBBUI-WTW-P23110204-2

FCC ID: B94SNPRC235X

Product: 802.11 a/b/g/n/ac/ax WLAN + BT/BLE Radio Module

Brand:



Model No.: SNPRC-2351, SNPRC-2350

Received Date: 2023/11/8

Test Date: 2023/12/22 ~ 2024/3/7

Issued Date: 2024/5/3

Applicant: HP, Inc

Address: 3390 East Harmony Road, Fort Collins, Colorado United States 80528

Issued By: Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch
Hsin Chu Laboratory

Lab Address: E-2, No.1, Li Hsin 1st Road, Hsinchu Science Park, Hsinchu City 300, Taiwan

Test Location: E-2, No.1, Li Hsin 1st Road, Hsinchu Science Park, Hsinchu City 300, Taiwan

FCC Registration / 723255 / TW2022

Designation Number:



Approved by: _____ , **Date:** 2024/5/3

May Chen / Manager

This test report consists of 83 pages in total. It may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The test results in the report only apply to the tested sample. The test results in this report are traceable to the national or international standards.



Prepared by : Vito Lung / Specialist

This report is governed by, and incorporates by reference, the Conditions of Testing as posted at the date of issuance of this report at <http://www.bureauveritas.com/home/about-us/our-business/cps/about-us/terms-conditions/> and is intended for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. Measurement uncertainty is only provided upon request for accredited tests. Statements of conformity are based on simple acceptance criteria without taking measurement uncertainty into account, unless otherwise requested in writing. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence or if you require measurement uncertainty; provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents.

Table of Contents

Release Control Record	4
1 Certificate.....	5
2 Summary of Test Results	6
2.1 Measurement Uncertainty	6
2.2 Supplementary Information	6
3 General Information	7
3.1 General Description.....	7
3.2 Antenna Description of EUT	8
3.3 Channel List.....	9
3.4 Test Mode Applicability and Tested Channel Detail.....	10
3.5 Duty Cycle of Test Signal.....	11
3.6 Test Program Used and Operation Descriptions	12
3.7 Connection Diagram of EUT and Peripheral Devices	12
3.8 Configuration of Peripheral Devices and Cable Connections	13
4 Test Instruments	14
4.1 RF Output Power.....	14
4.2 Number of Hopping Frequency Used.....	14
4.3 Dwell Time on Each Channel	14
4.4 Hopping Channel Separation	14
4.5 20 dB Bandwidth	14
4.6 Conducted Out of Band Emissions	14
4.7 AC Power Conducted Emissions	15
4.8 Unwanted Emissions below 1 GHz	15
4.9 Unwanted Emissions above 1 GHz.....	16
5 Limits of Test Items.....	17
5.1 RF Output Power.....	17
5.2 Number of Hopping Frequency Used.....	17
5.3 Dwell Time on Each Channel	17
5.4 Hopping Channel Separation	17
5.5 20 dB Bandwidth	17
5.6 Conducted Out of Band Emissions	17
5.7 AC Power Conducted Emissions	17
5.8 Unwanted Emissions below 1 GHz	18
5.9 Unwanted Emissions above 1 GHz.....	18
6 Test Arrangements.....	19
6.1 RF Output Power.....	19
6.1.1 Test Setup	19
6.1.2 Test Procedure.....	19
6.2 Number of Hopping Frequency Used.....	19
6.2.1 Test Setup	19
6.2.2 Test Procedure.....	19
6.3 Dwell Time on Each Channel	20
6.3.1 Test Setup	20
6.3.2 Test Procedure.....	20
6.4 Hopping Channel Separation	20
6.4.1 Test Setup	20
6.4.2 Test Procedure.....	20
6.5 20 dB Bandwidth	21
6.5.1 Test Setup	21
6.5.2 Test Procedure.....	21
6.6 Conducted Out of Band Emissions	21
6.6.1 Test Setup	21
6.6.2 Test Procedure.....	21
6.7 AC Power Conducted Emissions	22



BUREAU
VERITAS

6.7.1	Test Setup	22
6.7.2	Test Procedure	22
6.8	Unwanted Emissions below 1 GHz	23
6.8.1	Test Setup	23
6.8.2	Test Procedure	24
6.9	Unwanted Emissions above 1 GHz	25
6.9.1	Test Setup	25
6.9.2	Test Procedure	25
7	Test Results of Test Item	26
7.1	RF Output Power.....	26
7.2	Number of Hopping Frequency Used.....	27
7.3	Dwell Time on Each Channel	28
7.4	Hopping Channel Separation	30
7.5	20 dB Bandwidth	31
7.6	Conducted Out of Band Emissions	32
7.7	AC Power Conducted Emissions	34
7.8	Unwanted Emissions below 1 GHz	42
7.9	Unwanted Emissions above 1 GHz	50
8	Pictures of Test Arrangements	82
9	Information of the Testing Laboratories	83



Release Control Record

Issue No.	Description	Date Issued
RFBBUI-WTW-P23110204-2	Original release.	2024/5/3

1 Certificate

Product: 802.11 a/b/g/n/ac/ax WLAN + BT/BLE Radio Module

Brand:



Test Model: SNPRC-2351, SNPRC-2350

Sample Status: Engineering sample

Applicant: HP, Inc

Test Date: 2023/12/22 ~ 2024/3/7

Standard: 47 CFR FCC Part 15, Subpart C (Section 15.247)

Measurement

ANSI C63.10-2013

procedure: KDB 558074 D01 15.247 Meas Guidance v05r02

The above equipment has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's RF characteristics under the conditions specified in this report.

2 Summary of Test Results

47 CFR FCC Part 15, Subpart C (Section 15.247)			
Standard / Clause	Test Item	Result	Remark
15.247 (a)(1)	RF Output Power	Pass	Meet the requirement of limit.
15.247(a)(1) (iii)	Number of Hopping Frequency Used	Pass	Meet the requirement of limit.
15.247(a)(1) (iii)	Dwell Time on Each Channel	Pass	Meet the requirement of limit.
15.247(a)(1)	Hopping Channel Separation	Pass	Meet the requirement of limit.
15.247(a)(1)	20 dB Bandwidth	-	Refer to Note 1
15.247(d)	Conducted Out of Band Emissions	Pass	Meet the requirement of limit.
15.207	AC Power Conducted Emissions	Pass	Minimum passing margin is -10.77 dB at 0.41953 MHz
15.205 / 15.209 / 15.247(d)	Unwanted Emissions below 1 GHz	Pass	Minimum passing margin is -9.5 dB at 41.59 MHz
15.205 / 15.209 / 15.247(d)	Unwanted Emissions above 1 GHz	Pass	Minimum passing margin is -7.8 dB at 2483.50 MHz
15.203	Antenna Requirement	Pass	Antenna connector is I-PEX, I-PEX 1st not a standard connector.

Notes:

1. If the Frequency Hopping System operating in 2400-2483.5 MHz band and the output power less than 125 mW. The hopping channel carrier frequencies separated by a minimum of 25 kHz or two-thirds of the 20 dB bandwidth of hopping channel whichever is greater.
2. Determining compliance based on the results of the compliance measurement, not taking into account measurement instrumentation uncertainty.

2.1 Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

Parameter	Specification	Expanded Uncertainty (k=2) (±)
RF Output Power	-	1.1 dB
Number of Hopping Frequency Used	-	1050.00 Hz
Dwell Time on Each Channel	-	2.2 ms
Hopping Channel Separation	-	1050.00 Hz
20 dB Bandwidth	-	1050.00 Hz
Conducted Out of Band Emissions	9 kHz ~ 40 GHz	2.6 dB
AC Power Conducted Emissions	150 kHz ~ 30 MHz	1.9 dB
Unwanted Emissions below 1 GHz	9 kHz ~ 30 MHz	3.1 dB
	30 MHz ~ 1 GHz	5.1 dB
Unwanted Emissions above 1 GHz	1 GHz ~ 18 GHz	5.1 dB
	18 GHz ~ 40 GHz	5.3 dB

The other instruments specified are routine verified to remain within the calibrated levels, no measurement uncertainty is required to be calculated.

2.2 Supplementary Information

There is not any deviation from the test standards for the test method, and no modifications required for compliance.

3 General Information

3.1 General Description

Product	802.11 a/b/g/n/ac/ax WLAN + BT/BLE Radio Module
Brand	
Test Model	SNPRC-2351, SNPRC-2350
Status of EUT	Engineering sample
Power Supply Rating	3.3 Vdc from host equipment
Modulation Type	GFSK, π/4-DQPSK, 8DPSK
Modulation Technology	FHSS
Transfer Rate	Up to 3 Mbps
Operating Frequency	2.4 GHz ~ 2.4835 GHz
Number of Channel	79
Output Power	14.791 mW (11.7 dBm)

Note:

1. There are Bluetooth and WLAN (2.4 GHz & 5 GHz) technology used for the EUT.
2. Simultaneously transmission condition.

Condition	Technology	
1	WLAN (5 GHz) _Ant1	Bluetooth _Ant2

3. The EUT has below model names which are identical to each other in all aspects except for the following table:

Product Description	Model Name	Difference
802.11 a/b/g/n/ac/ax WLAN + BT/BLE Radio Module	SNPRC-2350	SDIO Interface
	SNPRC-2351	USB Interface

4. The EUT has the below configurations:

SNPRC-2350	
Part Numbers	Description
0960-5938	milligrid connector, 2 on-board antennas
0960-5936	milligrid connector, 1 on-board antenna + 1 external antenna
0960-5937	FFC connector, 2 on-board antennas
SNPRC-2351	
Part Numbers	Description
0960-5939	milligrid connector, 2 on-board antennas
0960-6141	right angled milligrid connector, 2 on-board antennas
0960-6200	milligrid connector, 1 on-board antenna + 1 external antenna

5. The above EUT information is declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications or user's manual.

3.2 Antenna Description of EUT

1. The antenna information is listed as below.

Antenna No.	RF Port No.	Chain No.	Brand	Model	Antenna Net Gain (dBi)	Frequency Range (GHz)	Antenna Type	Connector Type	Cable Length (mm)
1 (Internal)	1/2	0/1	HP	SNPRC-2351	3.5	2.4~2.4835	PIFA (on-board)	None	NA
					4.5	5.15~5.85			
2 (Internal)	1/2	0/1	HP	SNPRC-2350	3.5	2.4~2.4835	PIFA (on-board)	None	NA
					4.5	5.15~5.85			
3 (External)	2	1	Yageo	ANTX200P002B24553	0.9	2.4~2.4835	PIFA	I-PEX	200
					2.3	5.15~5.85			
4 (External)	2	1	Yageo	ANTX300P002B24553	0.9	2.4~2.4835	PIFA	I-PEX	300
					2.3	5.15~5.85			
5 (External)	2	1	WNC	81EAB815.G23	2	2.4~2.4835	PIFA	I-PEX 1st	200
					3	5.15~5.85			
6 (External)	2	1	WNC	81EAB815.G24	-0.3	2.4~2.4835	PIFA	I-PEX 1st	300
					1.5	5.15~5.85			

* Detail antenna specification please refer to antenna datasheet and/or antenna measurement report.

3.3 Channel List

79 channels are provided for BT-EDR:

Channel	Frequency (MHz)						
0	2402	20	2422	40	2442	60	2462
1	2403	21	2423	41	2443	61	2463
2	2404	22	2424	42	2444	62	2464
3	2405	23	2425	43	2445	63	2465
4	2406	24	2426	44	2446	64	2466
5	2407	25	2427	45	2447	65	2467
6	2408	26	2428	46	2448	66	2468
7	2409	27	2429	47	2449	67	2469
8	2410	28	2430	48	2450	68	2470
9	2411	29	2431	49	2451	69	2471
10	2412	30	2432	50	2452	70	2472
11	2413	31	2433	51	2453	71	2473
12	2414	32	2434	52	2454	72	2474
13	2415	33	2435	53	2455	73	2475
14	2416	34	2436	54	2456	74	2476
15	2417	35	2437	55	2457	75	2477
16	2418	36	2438	56	2458	76	2478
17	2419	37	2439	57	2459	77	2479
18	2420	38	2440	58	2460	78	2480
19	2421	39	2441	59	2461		

3.4 Test Mode Applicability and Tested Channel Detail

Pre-Scan:	<ol style="list-style-type: none"> 1. EUT has variant models as various interfaces: SDIO: 0960-5936/ 0960-5937/ 0960-5938, USB: 0960-5939/ 0960-6141/ 0960-6200. Pre-scan these variant models and find the worst case as a representative test condition in various interfaces. 2. The internal antenna design is identical in variant models/interfaces, and the external antenna models have 0960-5936 and 0960-6200 in various interfaces. Pre-scan this variant model and find the worst case as a representative test condition. 3. EUT can be used in the following ways of the internal/ external antenna: X-axis, Y-axis, and Z-axis. Pre-scan these ways and find the worst case as a representative test condition of the antenna. 4. Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
Worst Case:	<p>1&2. EUT worst variant model in various interfaces used in internal/external antenna:</p> <ul style="list-style-type: none"> ➤ Unwanted Emissions below 1 GHz: SDIO: 0960-5937 (Internal antenna), 0960-5936 (External antenna) USB: 0960-5939 (Internal antenna), 0960-6200 (External antenna) ➤ Unwanted Emissions above 1 GHz: USB: 0960-5939 (Internal antenna), 0960-6200 (External antenna) <p>3. X-axis/ Y-axis/ Z-axis Worst Condition of the internal/ external antenna:</p> <ul style="list-style-type: none"> ➤ Internal antenna: X-axis ➤ External antenna: Z-axis

Following channel(s) was (were) selected for the final test as listed below:

Test Item	EUT Configure Mode	Tested Channel	Modulation	Data Rate Parameter
RF Output Power	-	0, 39, 78	GFSK	DH5
			8DPSK	3DH5
Number of Hopping Frequency Used	-	Hopping	GFSK	DH5
			8DPSK	3DH5
Dwell Time on Each Channel	-	Hopping	GFSK	DH1/DH3/DH5
			8DPSK	3DH1/3DH3/3DH5
Hopping Channel Separation / 20 dB Bandwidth	-	0, 39, 78	GFSK	DH5
			8DPSK	3DH5
Conducted Out of Band Emissions	-	Hopping 0, 78	GFSK	DH5
			8DPSK	3DH5
AC Power Conducted Emissions	A, B, C, D	0	GFSK	DH5
Unwanted Emissions below 1 GHz	A, B, C, D	0	GFSK	DH5
Unwanted Emissions above 1 GHz	C, D	0, 39, 78	GFSK	DH5
			8DPSK	3DH5
EUT Configure Mode:	A	SDIO interface worst variant model using internal antenna No.1		
	B	SDIO interface worst variant model using external antenna No.5		
	C	USB interface worst variant model using internal antenna No.1		
	D	USB interface worst variant model using external antenna No.5		


Note:

1. Bluetooth technology will fix transmission on Chain 1.
2. The external antenna will fix transmission on Chain 1.

3.5 Duty Cycle of Test Signal

GFSK: Duty cycle = $2.941 \text{ ms} / 101 \text{ ms} \times 100\% = 2.9\%$

8DPSK: Duty cycle = $2.898 \text{ ms} / 101 \text{ ms} \times 100\% = 2.9\%$

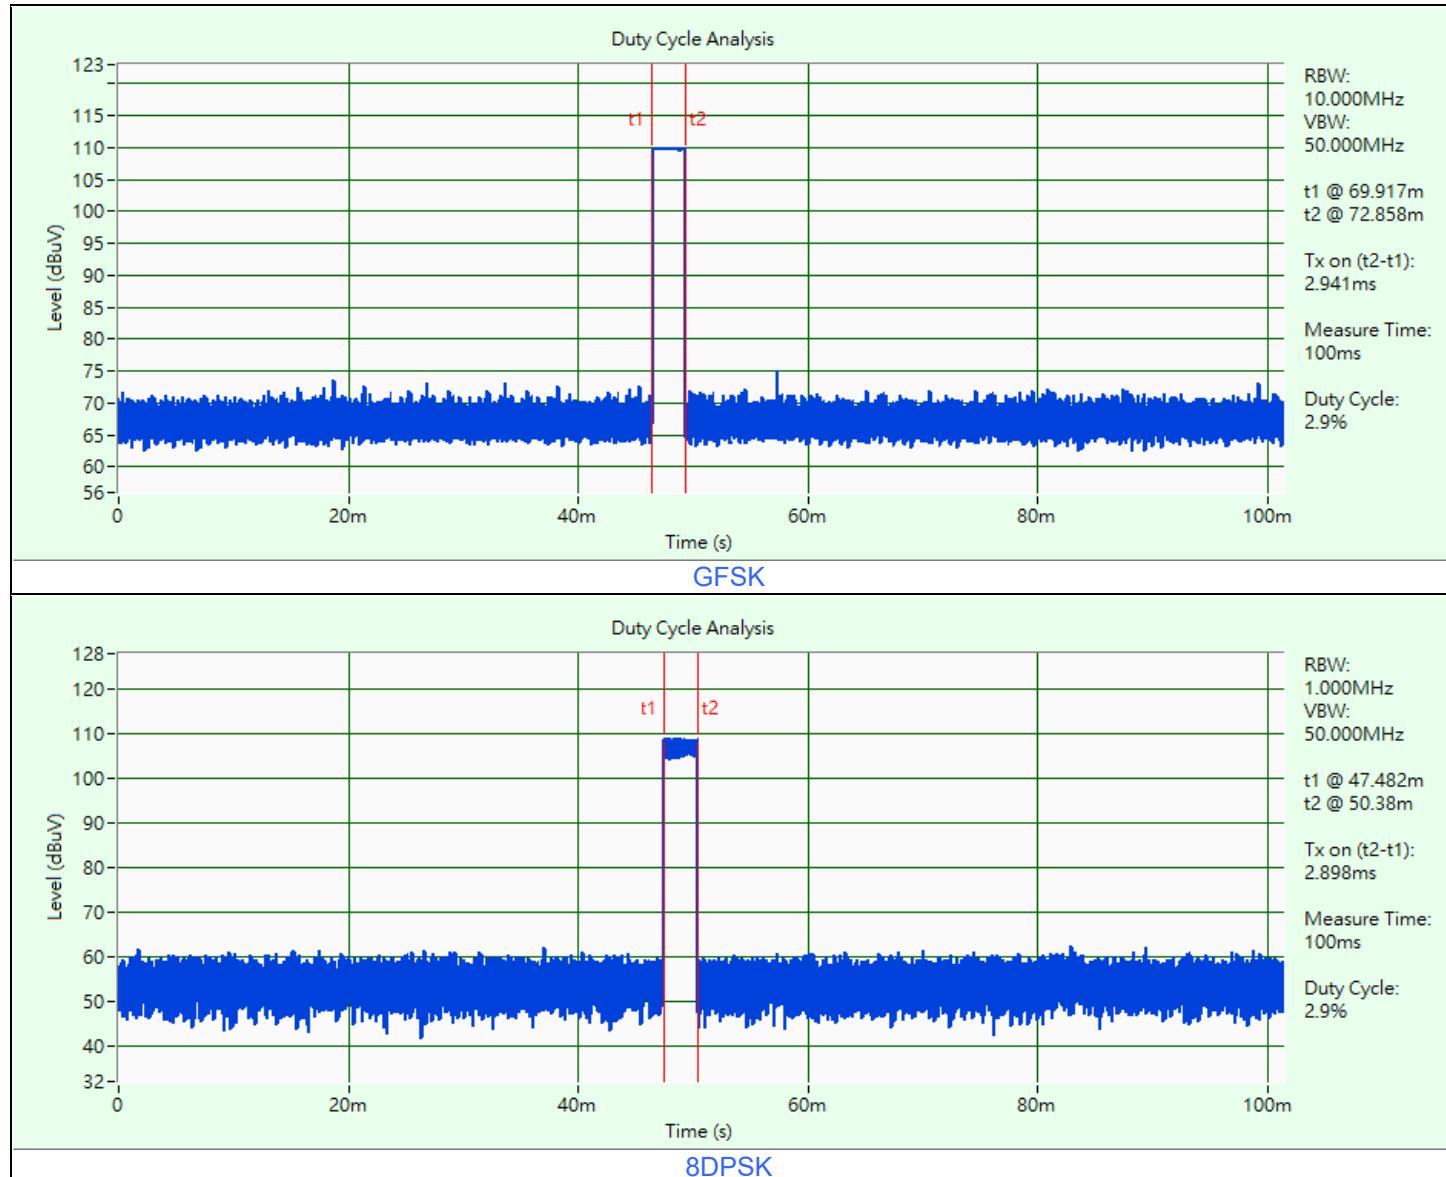


3.6 Test Program Used and Operation Descriptions


Controlling software (HyperTerminal paste BT command.txt command) has been activated to set the EUT under transmission condition continuously at specific channel frequency.

3.7 Connection Diagram of EUT and Peripheral Devices


Mode A (P/N: 0960-5937)

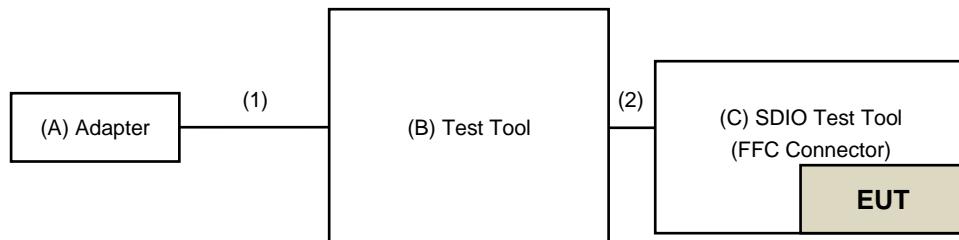


Mode B (P/N: 0960-5936)

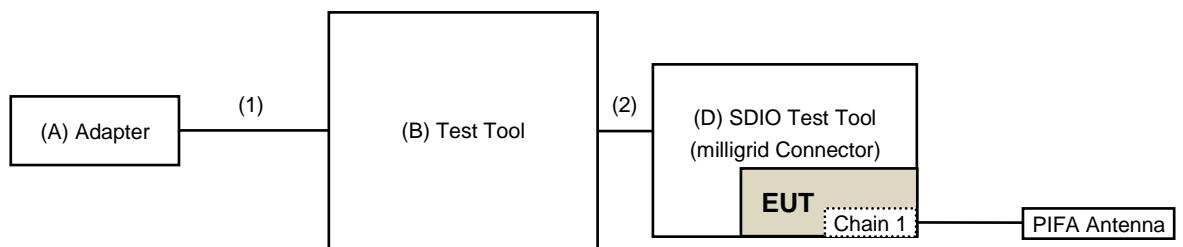

Mode C (P/N: 0960-5939)

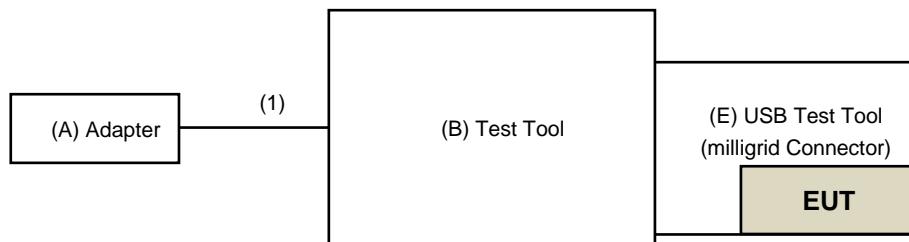

Mode D (P/N: 0960-6200)

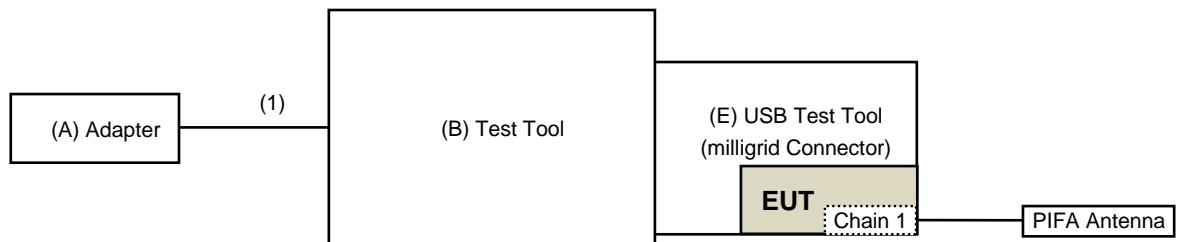

3.8 Configuration of Peripheral Devices and Cable Connections

ID	Product	Brand	Model No.	Serial No.	FCC ID	Remarks
A	Adapter	ASUS	EXA1205UA	N/A	N/A	Provided by Lab
B	Test Tool	Realtek	N/A	N/A	N/A	Supplied by applicant
C	SDIO Test Tool (FFC Connector)	Realtek	N/A	N/A	N/A	Supplied by applicant
D	SDIO Test Tool (milligrid Connector)	Realtek	N/A	N/A	N/A	Supplied by applicant
E	USB Test Tool (milligrid Connector)	Realtek	N/A	N/A	N/A	Supplied by applicant

ID	Cable Descriptions	Qty.	Length (m)	Shielding (Yes/No)	Cores (Qty.)	Remarks
1	USB Cable	1	1.4	Yes	0	Provided by Lab
2	Data Cable	1	0.05	No	0	Supplied by applicant

4 Test Instruments

The calibration interval of the all test instruments are 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

4.1 RF Output Power

Description Manufacturer	Model No.	Serial No.	Calibrated Date	Calibrated Until
Pulse Power Sensor Anritsu	MA2411B	1726434	2023/6/19	2024/6/18
RF Power Meter Anritsu	ML2495A	1529002	2023/6/17	2024/6/16

Notes:

1. The test was performed in Oven room 2.
2. Tested Date: 2024/2/15

4.2 Number of Hopping Frequency Used

Description Manufacturer	Model No.	Serial No.	Calibrated Date	Calibrated Until
MXA Signal Analyzer Keysight	N9020B	MY60112409	2023/2/18	2024/2/17
Software	ADT_RF Test Software V7.6.5.4	N/A	N/A	N/A

Notes:

1. The test was performed in Oven room 2.
2. Tested Date: 2024/2/15

4.3 Dwell Time on Each Channel

Refer to section 4.2 to get information of the instruments.

4.4 Hopping Channel Separation

Refer to section 4.2 to get information of the instruments.

4.5 20 dB Bandwidth

Refer to section 4.2 to get information of the instruments.

4.6 Conducted Out of Band Emissions

Refer to section 4.2 to get information of the instruments.

4.7 AC Power Conducted Emissions

Description Manufacturer	Model No.	Serial No.	Calibrated Date	Calibrated Until
50 ohm terminal resistance Telegartner	50 ohm	3	2023/10/20	2024/10/19
EMI Test Receiver R&S	ESCS 30	847124/029	2023/10/18	2024/10/17
Fixed Attenuator STI	STI02-2200-10	005	2024/2/19	2025/2/18
LISN R&S	ESH3-Z5	835239/001	2023/4/6	2024/4/5
		848773/004	2023/10/13	2024/10/12
RF Coaxial Cable JYEBAO	5D-FB	COCCAB-001	2024/2/19	2025/2/18
Software BVADT	BVADT_Cond_V7.3.7.4	N/A	N/A	N/A

Notes:

1. The test was performed in Conduction 1
2. Tested Date: 2024/2/27

4.8 Unwanted Emissions below 1 GHz

Description Manufacturer	Model No.	Serial No.	Calibrated Date	Calibrated Until
Bi_Log Antenna Schwarzbeck	VULB 9168	9168-0842	2023/10/12	2024/10/11
Boresight Antenna Tower & Turn Table Max-Full	MF-7802BS	MF780208530	N/A	N/A
EMI Test Receiver R&S	ESR7	102026	2023/4/6	2024/4/5
Fixed Attenuator Mini-Circuits	UNAT-5+	PAD-ATT5-02	2023/12/12	2024/12/11
Loop Antenna Electro-Metrics	EM-6879	264	2024/2/23	2025/2/22
Preamplifier EMCI	EMC330N	980538	2023/4/6	2024/4/5
	EMC001340	980142	2024/2/19	2025/2/18
PXA Signal Analyzer Keysight	N9030B	MY57141948	2023/5/19	2024/5/18
RF Coaxial Cable JYEBAO	5D-FB	LOOPCAB-002	2024/2/19	2025/2/18
		LOOPCAB-001	2024/2/19	2025/2/18
RF Coaxial Cable PEWC	8D	966-5-1	2023/4/6	2024/4/5
		966-5-2	2023/4/6	2024/4/5
		966-5-3	2023/4/6	2024/4/5
Software	ADT_Radiated_V8.7.08	N/A	N/A	N/A

Notes:

1. The test was performed in 966 Chamber No. 5.
2. Tested Date: 2024/2/27

4.9 Unwanted Emissions above 1 GHz

Description Manufacturer	Model No.	Serial No.	Calibrated Date	Calibrated Until
Boresight Antenna Tower & Turn Table Max-Full	MF-7802BS	MF780208530	N/A	N/A
EMI Test Receiver R&S	ESR7	102026	2023/4/6	2024/4/5
Horn Antenna Schwarzbeck	BBHA 9120D	9120D-1819	2022/11/13 2023/11/12	2023/11/12 2024/11/11
PXA Signal Analyzer Keysight	N9030B	MY57141948	2023/5/19	2024/5/18
Preamplifier EMCI	EMC12630SE	980509	2023/4/7 2024/1/29	2024/4/6 2025/1/28
	EMC184045SE	980387	2023/8/9	2024/8/8
RF Coaxial Cable EMCI	EMC102-KM-KM-4000	200214	2023/2/20 2024/1/29	2024/2/19 2025/1/28
	EMC102-KM-KM-1200	160924	2023/8/9 2024/1/29	2024/8/8 2025/1/28
	EMC104-SM-SM-6000	180506	2023/4/7	2024/4/6
	EMC104-SM-SM-2000	180501	2023/4/7	2024/4/6
	EMC104-SM-SM-1500	180503	2023/4/7	2024/4/6
Software	ADT_Radiated_V8.7.08	N/A	N/A	N/A

Notes:

1. The test was performed in 966 Chamber No. 5.
2. Tested Date: 2023/12/22 ~ 2024/3/7

5 Limits of Test Items

5.1 RF Output Power

The Maximum Output Power Measurement is 125 mW (21 dBm).

5.2 Number of Hopping Frequency Used

At least 15 channels frequencies, and should be equally spaced.

5.3 Dwell Time on Each Channel

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

5.4 Hopping Channel Separation

At least 25 kHz or two-third of 20 dB hopping channel bandwidth (whichever is greater).

5.5 20 dB Bandwidth

Maximum bandwidth is not specified.

5.6 Conducted Out of Band Emissions

Below 20 dB of the highest emission level of operating band (in 100 kHz Resolution Bandwidth).

5.7 AC Power Conducted Emissions

Frequency (MHz)	Conducted Limit (dBuV)	
	Quasi-peak	Average
0.15 - 0.5	66 - 56	56 - 46
0.50 - 5.0	56	46
5.0 - 30.0	60	50

Notes:

1. The lower limit shall apply at the transition frequencies.
2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50 MHz.

5.8 Unwanted Emissions below 1 GHz

Radiated emissions up to 1 GHz which fall in the restricted bands must comply with the radiated emission limits specified as below table. Other emissions shall be at least 20 dB below the highest level of the desired power:

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

Notes:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).

5.9 Unwanted Emissions above 1 GHz

Radiated emissions above 1 GHz which fall in the restricted bands must comply with the radiated emission limits specified as below table. Other emissions shall be at least 20 dB below the highest level of the desired power:

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
Above 960	500	3


Notes:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. For frequencies above 1000 MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20 dB under any condition of modulation.

6 Test Arrangements

6.1 RF Output Power

6.1.1 Test Setup

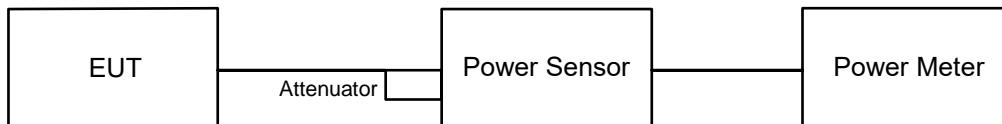

6.1.2 Test Procedure

Peak Power:


A peak power sensor was used on the output port of the EUT. A power meter was used to read the response of the peak power sensor. Record the power level.

Average Power:

Average power sensor was used to perform output power measurement, trigger and gating function of wide band power meter is enabled to measure max output power of TX on burst. Duty factor is not added to measured value.

6.2 Number of Hopping Frequency Used

6.2.1 Test Setup




6.2.2 Test Procedure

- Check the calibration of the measuring instrument (SA) using either an internal calibrator or a known signal from an external generator.
- Turn on the EUT and connect its antenna terminal to measurement via a low loss cable. Then set it to any one measured frequency within its operating range and make sure the instrument is operated in its linear range.
- Set the SA on MaxHold Mode, and then keep the EUT in hopping mode. Record all the signals from each channel until each one has been recorded.
- Set the SA on View mode and then plot the result on SA screen.
- Repeat above procedures until all frequencies measured were complete.

6.3 Dwell Time on Each Channel

6.3.1 Test Setup




6.3.2 Test Procedure

- Check the calibration of the measuring instrument (SA) using either an internal calibrator or a known signal from an external generator.
- Turn on the EUT and connect its antenna terminal to measurement via a low loss cable. Then set it to any one measured frequency within its operating range and make sure the instrument is operated in its linear range.
- Adjust the center frequency of SA on any frequency to be measured and set SA to zero span mode. And then, set RBW and VBW of spectrum analyzer to proper value.
- Measure the time duration of one transmission on the measured frequency. And then plot the result with time difference of this time duration.
- Repeat above procedures until all different time-slot modes have been completed.

6.4 Hopping Channel Separation

6.4.1 Test Setup




6.4.2 Test Procedure

- Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
- Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range.
- By using the MaxHold function record the separation of two adjacent channels.
- Measure the frequency difference of these two adjacent channels by SA MARK function. And then plot the result on SA screen.
- Repeat above procedures until all frequencies measured were complete.

6.5 20 dB Bandwidth

6.5.1 Test Setup

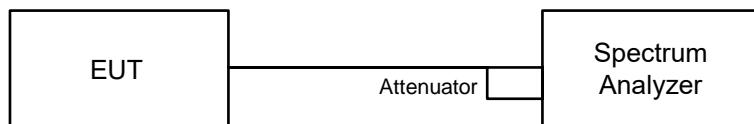


6.5.2 Test Procedure

- Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
- Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
- Measure the frequency difference of two frequencies that were attenuated 20 dB from the reference level. Record the frequency difference as the emission bandwidth.
- Repeat above procedures until all frequencies measured were complete.

6.6 Conducted Out of Band Emissions

6.6.1 Test Setup

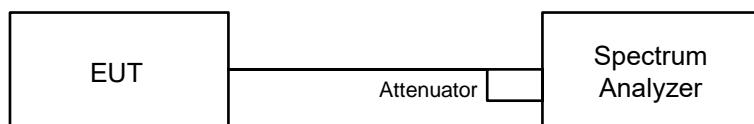

6.6.2 Test Procedure

MEASUREMENT PROCEDURE REF


- Set the RBW = 100 kHz.
- Set the VBW \geq 300 kHz.
- Detector = peak.
- Sweep time = auto couple.
- Trace mode = max hold.
- Allow trace to fully stabilize.
- Use the peak marker function to determine the maximum power level in any 100 kHz band segment within the fundamental EBW.

MEASUREMENT PROCEDURE OOB

- Set RBW = 100 kHz.
- Set VBW \geq 300 kHz.
- Detector = peak.
- Sweep = auto couple.
- Trace Mode = max hold.
- Allow trace to fully stabilize.
- Use the peak marker function to determine the maximum amplitude level.

6.7 AC Power Conducted Emissions

6.7.1 Test Setup

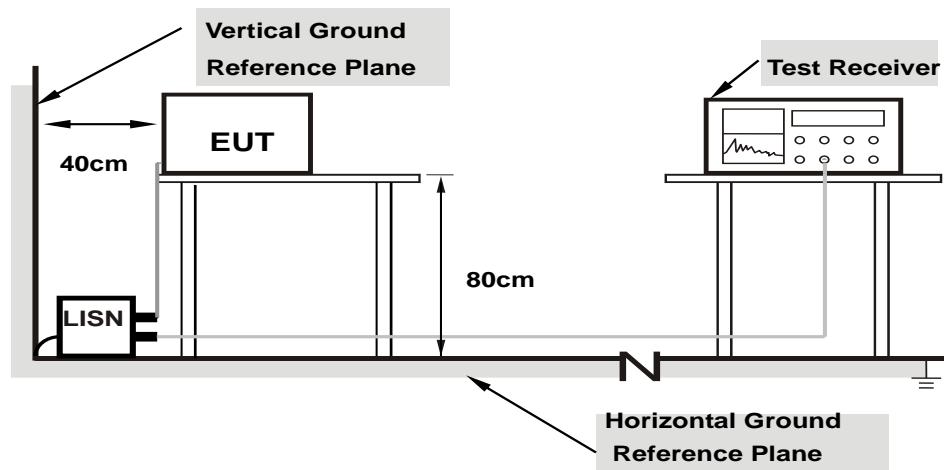

Note: 1. Support units were connected to second LISN.

For the actual test configuration, please refer to the attached file (Test Setup Photo).

6.7.2 Test Procedure


- The EUT was placed on a 0.8 meter to the top of table and placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50 uH of coupling impedance for the measuring instrument.
- Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- The frequency range from 150 kHz to 30 MHz was searched. Emission levels under (Limit – 20 dB) was not recorded.

Note: The resolution bandwidth and video bandwidth of test receiver is 9 kHz for quasi-peak detection (QP) and average detection (AV) at frequency 0.15 MHz-30 MHz.


6.8 Unwanted Emissions below 1 GHz

6.8.1 Test Setup

For Radiated emission below 30 MHz

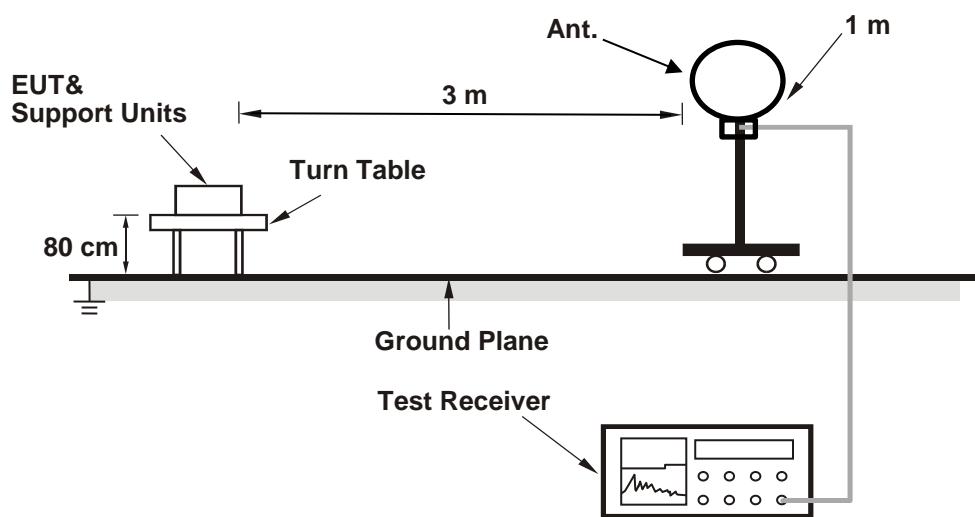

For Radiated emission above 30 MHz

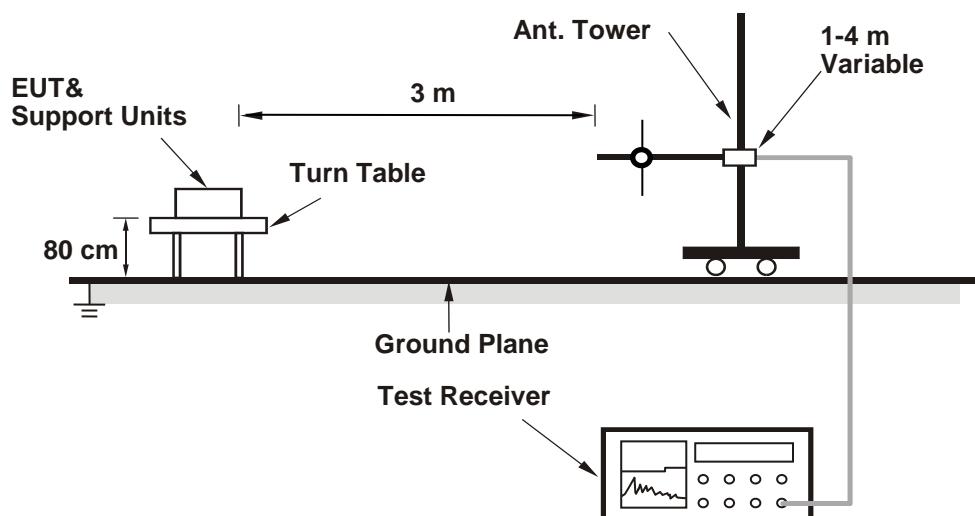

For the actual test configuration, please refer to the attached file (Test Setup Photo).

6.8.2 Test Procedure

For Radiated emission below 30 MHz

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. Parallel, perpendicular, and ground-parallel orientations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Quasi-Peak Detect Function and Specified Bandwidth with Maximum Hold Mode, except for the frequency band (9 kHz to 90 kHz and 110 kHz to 490 kHz) set to average detect function and peak detect function.

Notes:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 200 Hz at frequency below 150 kHz.
2. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 9 kHz or 10 kHz at frequency (150 kHz to 30 MHz).
3. All modes of operation were investigated and the worst-case emissions are reported.

For Radiated emission above 30 MHz


- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1 GHz.

Notes:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120 kHz for Quasi-peak detection (QP) at frequency below 1 GHz.
2. All modes of operation were investigated and the worst-case emissions are reported.

6.9 Unwanted Emissions above 1 GHz

6.9.1 Test Setup

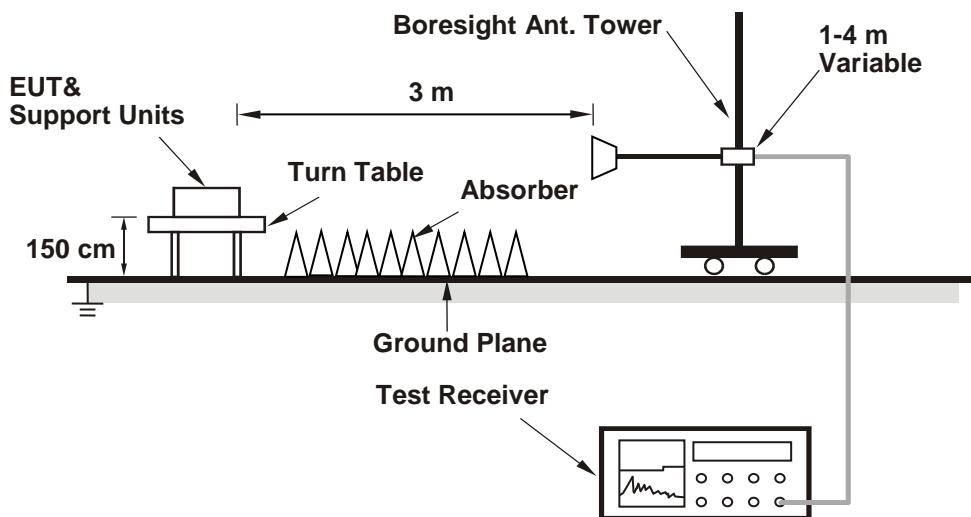

For the actual test configuration, please refer to the attached file (Test Setup Photo).

6.9.2 Test Procedure

- a. The EUT was placed on the top of a rotating table 1.5 meters above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to peak and average detects function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz. If the peak reading value also meets average limit, measurement with the average detector is unnecessary.

Notes:

1. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz for Peak detection (PK) and Average detection (AV) at frequency above 1 GHz.
2. According to ANSI C63.10 section 6.6.4 and 4.1.4.2.2. For fundamental and harmonic signal measurement, according to ANSI C63.10 section 7.5, the average value = peak value + duty cycle correction factor. For duty cycle correction factor values, see the Test Signal Duty Cycle section in this report.
3. All modes of operation were investigated and the worst-case emissions are reported.

7 Test Results of Test Item

7.1 RF Output Power

Input Power:	3.3 Vdc	Environmental Conditions:	25°C, 60% RH	Tested By:	Kevin Ko
--------------	---------	---------------------------	--------------	------------	----------

For Peak Power

GFSK

Chan.	Chan. Freq. (MHz)	Peak Power (mW)	Peak Power (dBm)	Power Limit (dBm)	Test Result
0	2402	14.791	11.70	21	Pass
39	2441	14.158	11.51	21	Pass
78	2480	14.028	11.47	21	Pass

Note: The antenna gain is 3.5 dBi < 6 dBi, so the output power limit shall not be reduced.

8DPSK

Chan.	Chan. Freq. (MHz)	Peak Power (mW)	Peak Power (dBm)	Power Limit (dBm)	Test Result
0	2402	14.06	11.48	21	Pass
39	2441	13.677	11.36	21	Pass
78	2480	13.002	11.14	21	Pass

Note: The antenna gain is 3.5 dBi < 6 dBi, so the output power limit shall not be reduced.

For Average Power

GFSK

Chan.	Chan. Freq. (MHz)	Average Power (mW)	Average Power (dBm)
0	2402	13.868	11.42
39	2441	13.428	11.28
78	2480	13.122	11.18


8DPSK

Chan.	Chan. Freq. (MHz)	Average Power (mW)	Average Power (dBm)
0	2402	6.776	8.31
39	2441	6.934	8.41
78	2480	7.031	8.47

7.2 Number of Hopping Frequency Used


Input Power:	3.3 Vdc	Environmental Conditions:	25°C, 60% RH	Tested By:	Kevin Ko
--------------	---------	---------------------------	--------------	------------	----------

GFSK

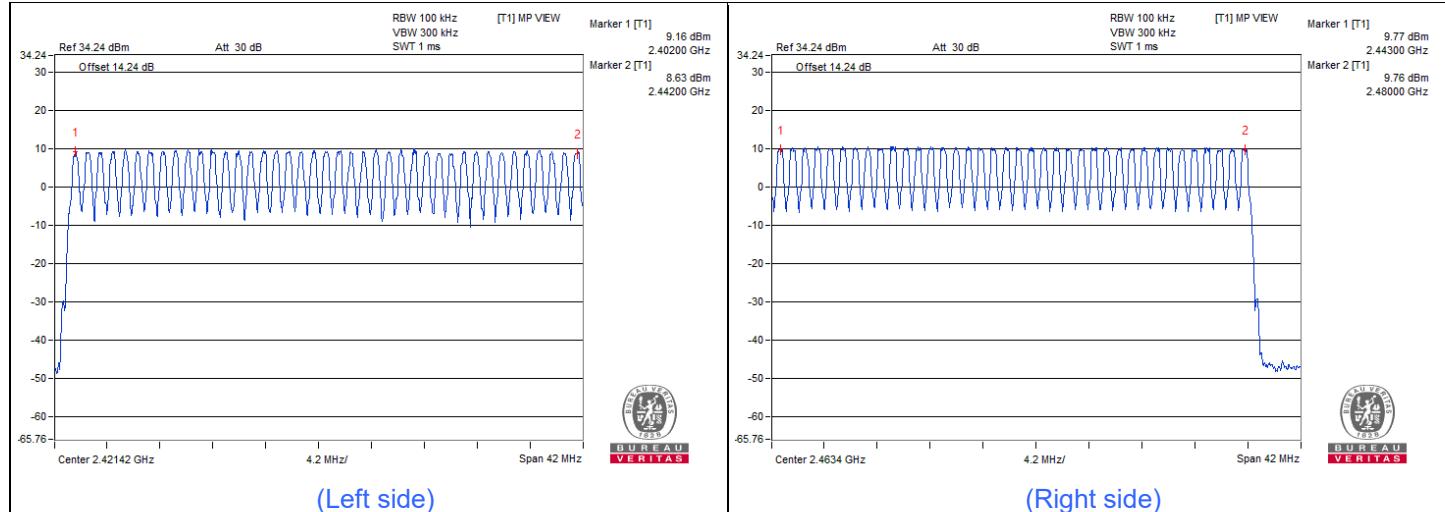

Note: There are 79 hopping frequencies in the hopping mode. On the plots, it shows that the hopping frequencies are equally spaced.

8DPSK

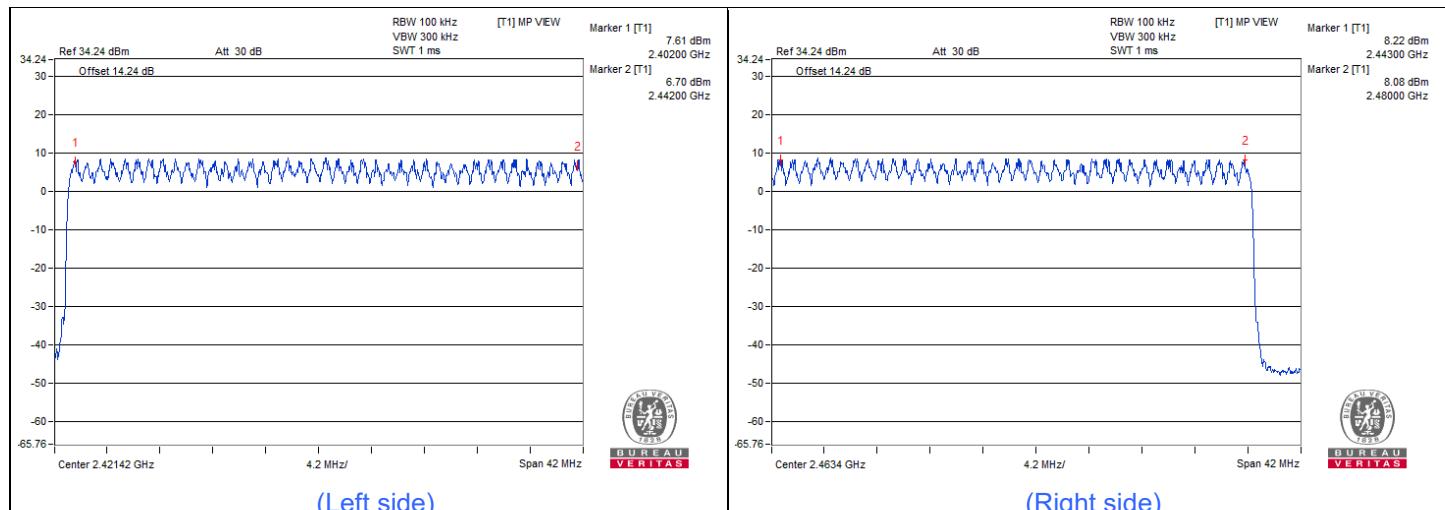


Note: There are 79 hopping frequencies in the hopping mode. On the plots, it shows that the hopping frequencies are equally spaced.

7.3 Dwell Time on Each Channel

Input Power:	3.3 Vdc	Environmental Conditions:	25°C, 60% RH	Tested By:	Kevin Ko
--------------	---------	---------------------------	--------------	------------	----------

GFSK


Mode	Number of transmission in 31.6 sec	Length of transmission time (msec)	Dwell Time (msec)	Limit (msec)	Test Result
DH1	50 (times / 5 sec) * 6.32 = 316 times	0.426	134.62	400	Pass
DH3	26 (times / 5 sec) * 6.32 = 165 times	1.69	278.85	400	Pass
DH5	18 (times / 5 sec) * 6.32 = 114 times	2.984	340.18	400	Pass

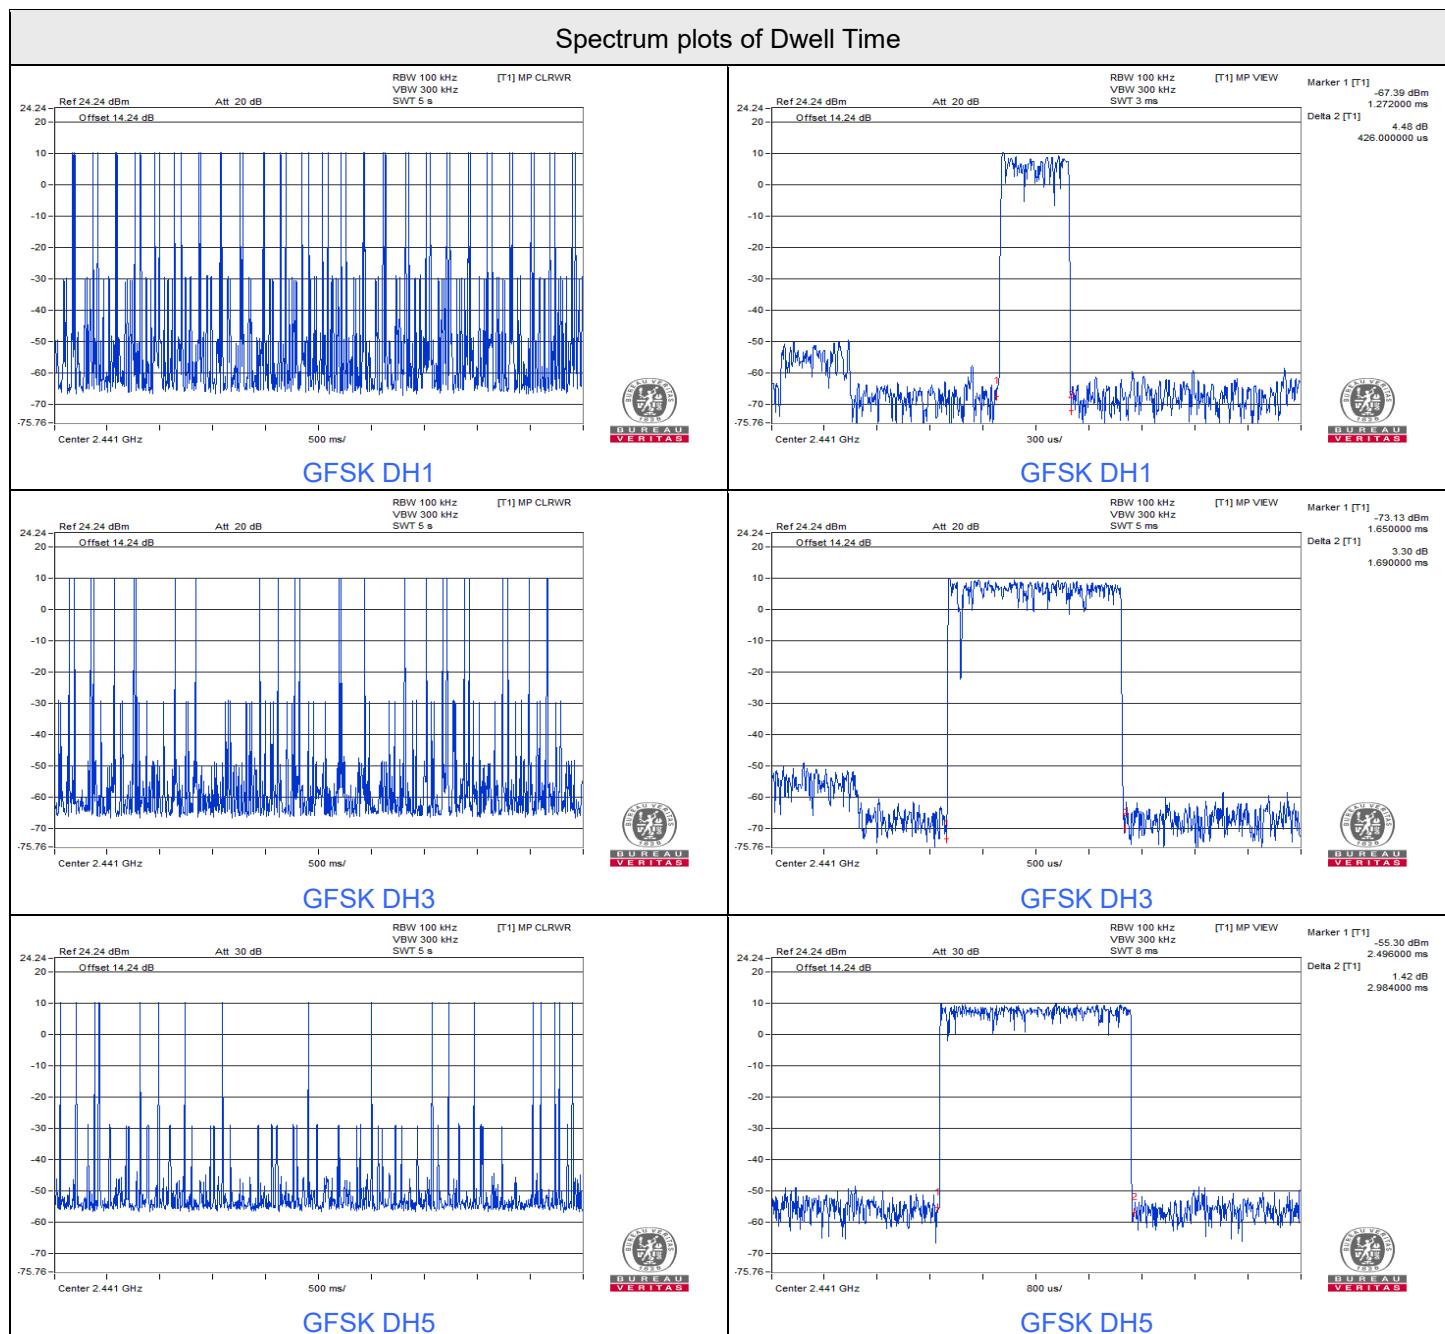

8DPSK

Mode	Number of transmission in 31.6 sec	Length of transmission time (msec)	Dwell Time (msec)	Limit (msec)	Test Result
3DH1	50 (times / 5 sec) * 6.32 = 316 times	0.438	138.41	400	Pass
3DH3	25 (times / 5 sec) * 6.32 = 158 times	1.705	269.39	400	Pass
3DH5	17 (times / 5 sec) * 6.32 = 108 times	2.944	317.95	400	Pass

Spectrum plots of Dwell Time

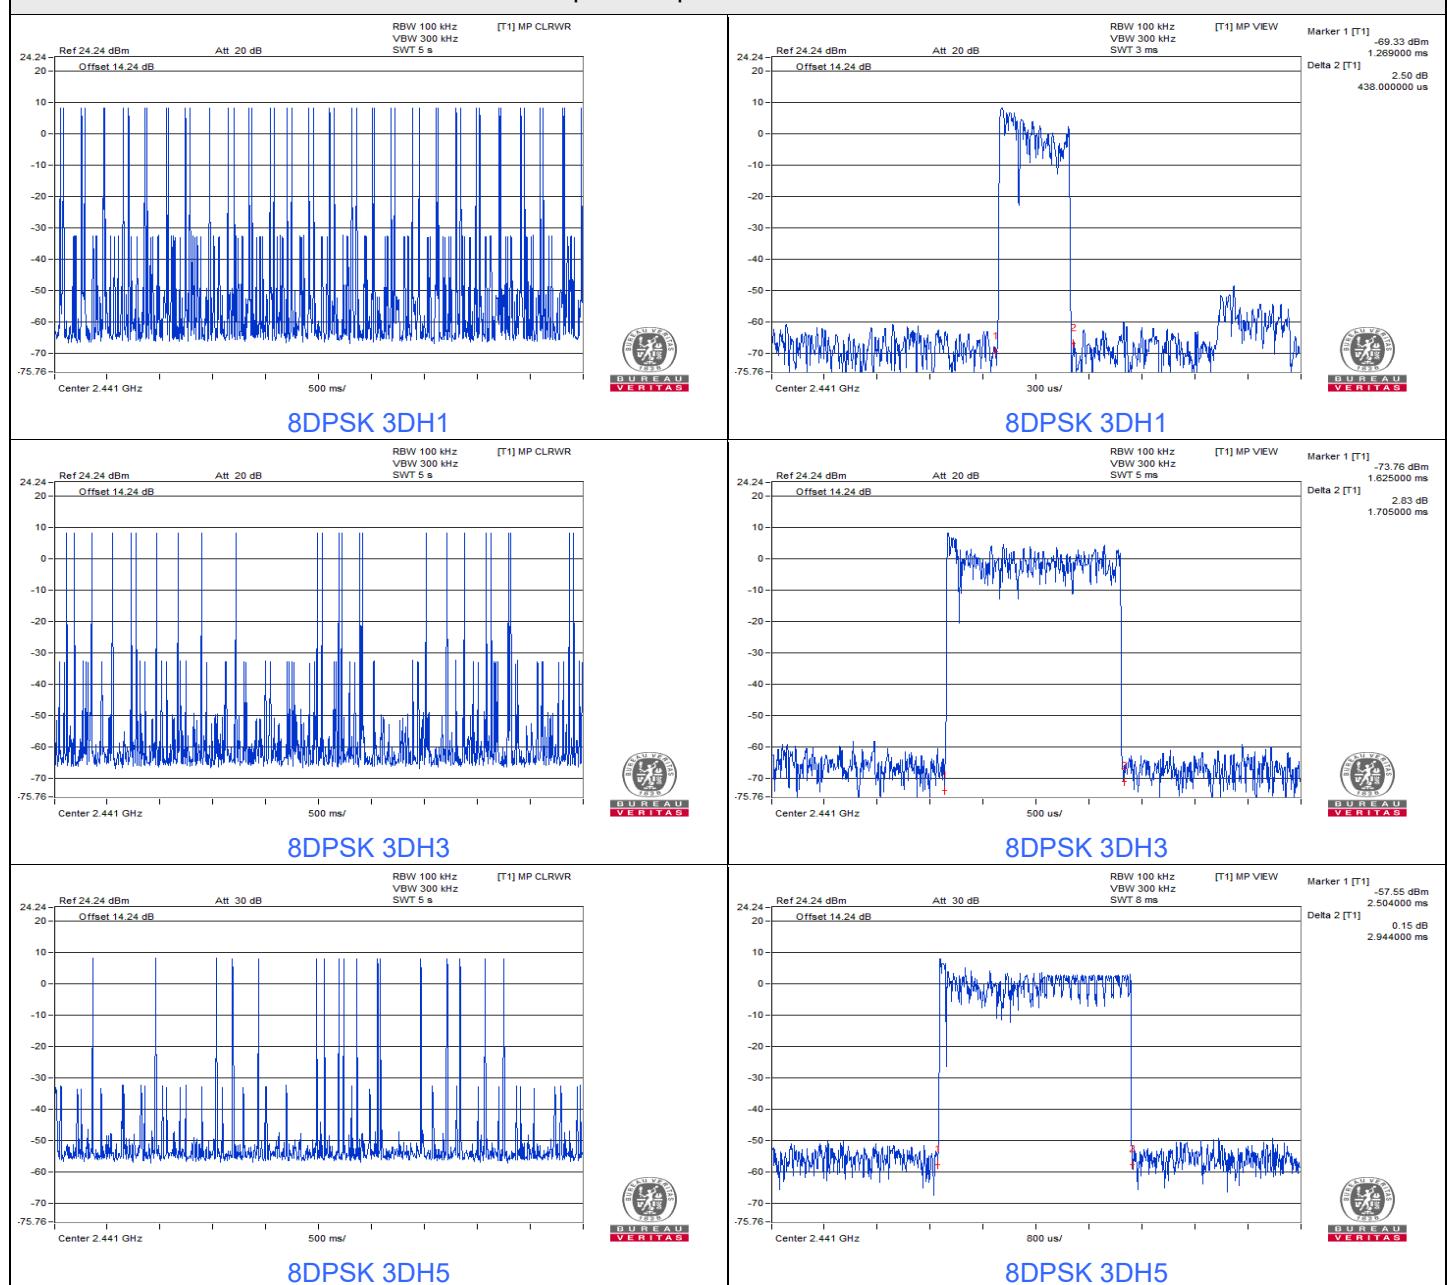

7.4 Hopping Channel Separation

Input Power:	3.3 Vdc	Environmental Conditions:	25°C, 60% RH	Tested By:	Kevin Ko
--------------	---------	---------------------------	--------------	------------	----------

GFSK

Channel	Frequency (MHz)	Hopping Channel Separation (MHz)	Minimum Limit (MHz)	Test Result
0	2402	1.01	0.64	Pass
39	2441	1.00	0.64	Pass
78	2480	1.01	0.64	Pass


Note: The minimum limit is two-third 20dB bandwidth.

8DPSK

Channel	Frequency (MHz)	Hopping Channel Separation (MHz)	Minimum Limit (MHz)	Test Result
0	2402	1.00	0.86	Pass
39	2441	1.00	0.86	Pass
78	2480	1.00	0.86	Pass

Note: The minimum limit is two-third 20dB bandwidth.

Spectrum Plot of Minimum Value

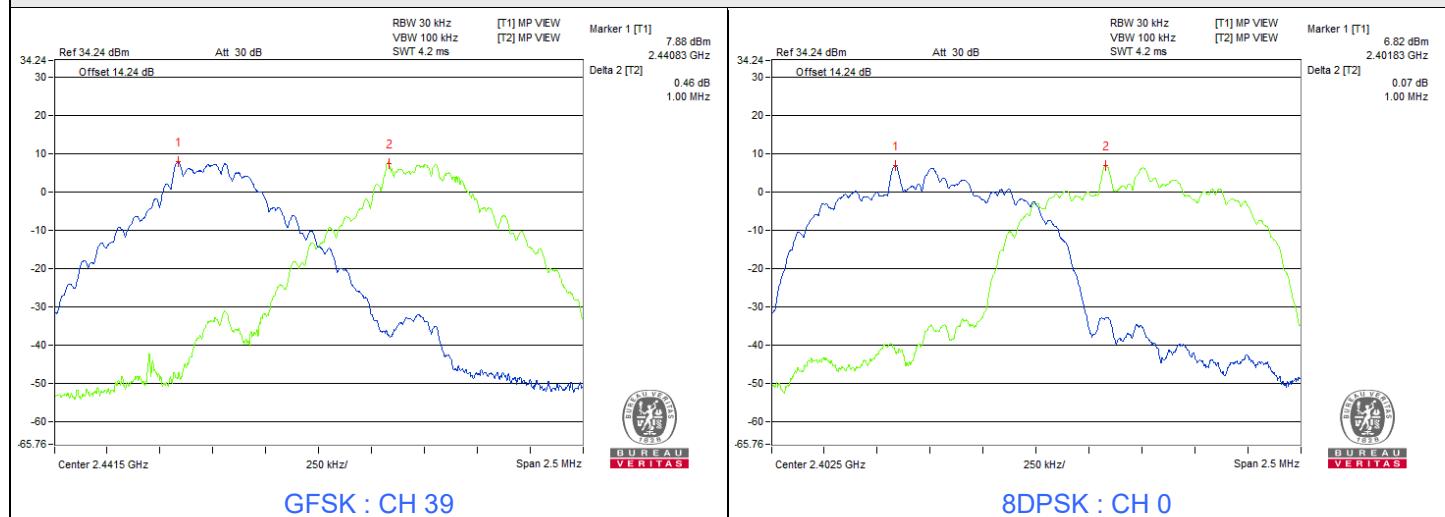

7.5 20 dB Bandwidth


Input Power:	3.3 Vdc	Environmental Conditions:	25°C, 60% RH	Tested By:	Kevin Ko
--------------	---------	---------------------------	--------------	------------	----------

GFSK

Channel	Frequency (MHz)	20dB Bandwidth (MHz)
0	2402	0.95
39	2441	0.95
78	2480	0.95

8DPSK

Channel	Frequency (MHz)	20dB Bandwidth (MHz)
0	2402	1.29
39	2441	1.29
78	2480	1.29

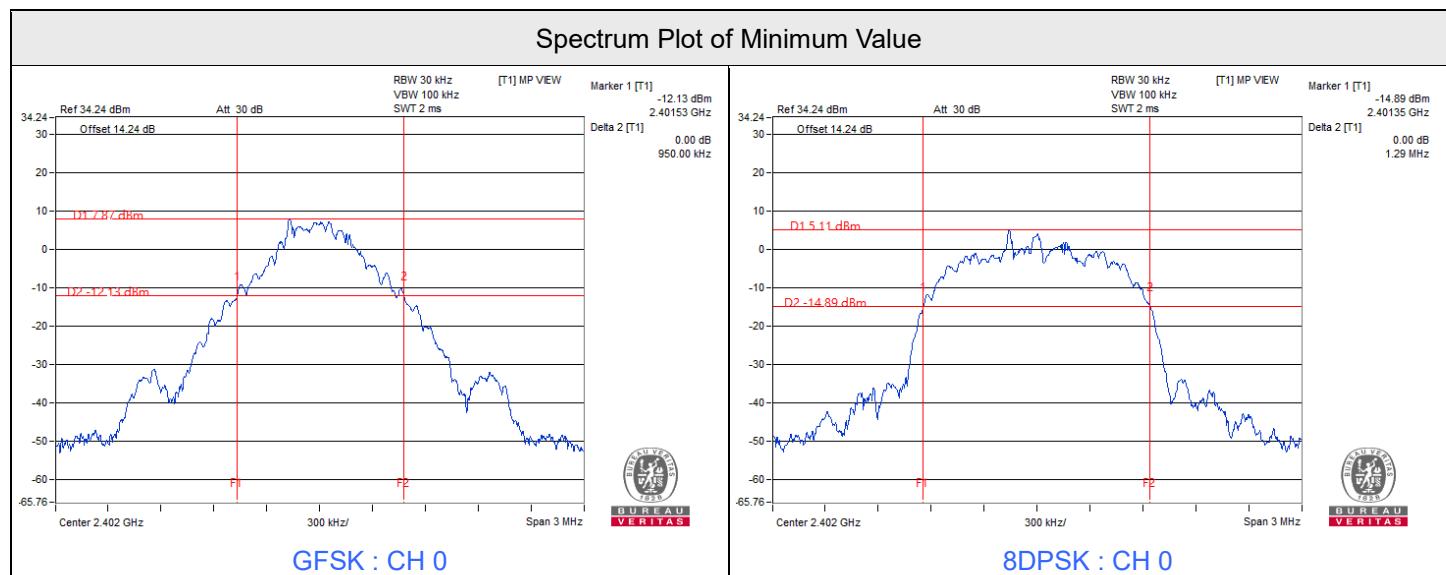

7.6 Conducted Out of Band Emissions

Input Power:	3.3 Vdc	Environmental Conditions:	25°C, 60% RH	Tested By:	Kevin Ko
--------------	---------	---------------------------	--------------	------------	----------

GFSK



8DPSK


7.7 AC Power Conducted Emissions

Mode A (SDIO interface using internal antenna)


RF Mode	BT GFSK	Channel	CH 0 : 2402 MHz
Frequency Range	150 kHz ~ 30 MHz	Detector Function & Resolution Bandwidth	Quasi-Peak (QP) / Average (AV), 9 kHz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23°C, 71% RH
Tested By	Louis Yang		

Phase Of Power : Line (L)

No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.17734	9.93	32.19	20.89	42.12	30.82	64.61	54.61	-22.49	-23.79
2	0.20469	9.93	31.06	20.31	40.99	30.24	63.42	53.42	-22.43	-23.18
3	0.37266	9.94	24.02	12.48	33.96	22.42	58.44	48.44	-24.48	-26.02
4	0.53281	9.95	27.83	16.55	37.78	26.50	56.00	46.00	-18.22	-19.50
5	2.55859	10.05	30.74	23.71	40.79	33.76	56.00	46.00	-15.21	-12.24
6	8.28906	10.37	23.60	17.31	33.97	27.68	60.00	50.00	-26.03	-22.32

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

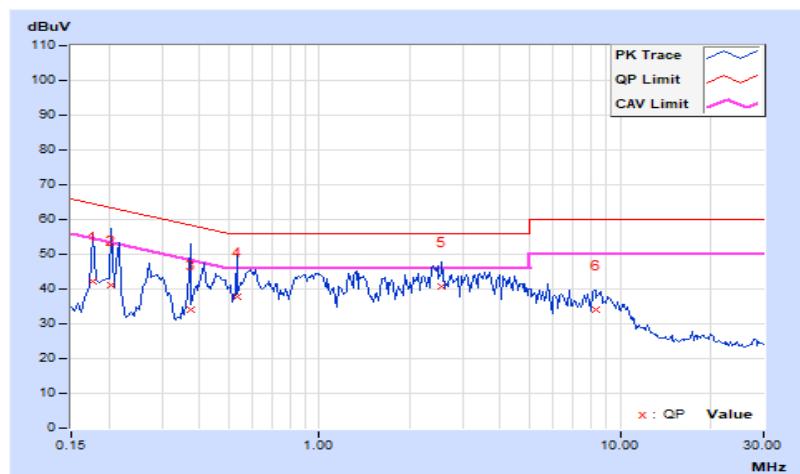


RF Mode	BT GFSK	Channel	CH 0 : 2402 MHz
Frequency Range	150 kHz ~ 30 MHz	Detector Function & Resolution Bandwidth	Quasi-Peak (QP) / Average (AV), 9 kHz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23°C, 71% RH
Tested By	Louis Yang		

Phase Of Power : Neutral (N)										
No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.17734	9.99	25.62	16.05	35.61	26.04	64.61	54.61	-29.00	-28.57
2	0.24766	9.99	22.86	11.82	32.85	21.81	61.84	51.84	-28.99	-30.03
3	0.35703	10.00	18.96	10.33	28.96	20.33	58.80	48.80	-29.84	-28.47
4	0.54844	10.01	25.92	19.35	35.93	29.36	56.00	46.00	-20.07	-16.64
5	2.39063	10.09	28.72	21.09	38.81	31.18	56.00	46.00	-17.19	-14.82
6	6.79688	10.28	19.88	11.60	30.16	21.88	60.00	50.00	-29.84	-28.12

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

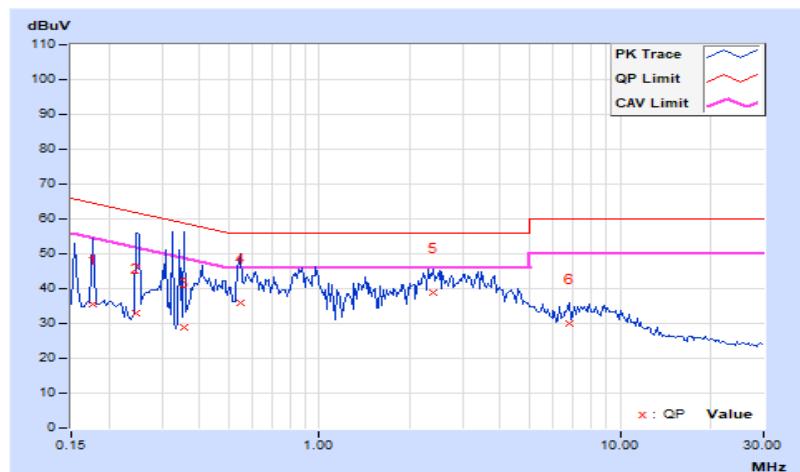


Mode B (SDIO interface using external antenna)

RF Mode	BT GFSK	Channel	CH 0 : 2402 MHz
Frequency Range	150 kHz ~ 30 MHz	Detector Function & Resolution Bandwidth	Quasi-Peak (QP) / Average (AV), 9 kHz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23°C, 71% RH
Tested By	Louis Yang		

Phase Of Power : Line (L)										
No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15000	9.92	30.04	15.63	39.96	25.55	66.00	56.00	-26.04	-30.45
2	0.27109	9.93	31.14	23.98	41.07	33.91	61.08	51.08	-20.01	-17.17
3	0.38438	9.94	26.10	21.00	36.04	30.94	58.18	48.18	-22.14	-17.24
4	0.59531	9.95	32.74	24.00	42.69	33.95	56.00	46.00	-13.31	-12.05
5	2.93750	10.07	30.50	23.26	40.57	33.33	56.00	46.00	-15.43	-12.67
6	5.18359	10.19	26.42	16.03	36.61	26.22	60.00	50.00	-23.39	-23.78

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

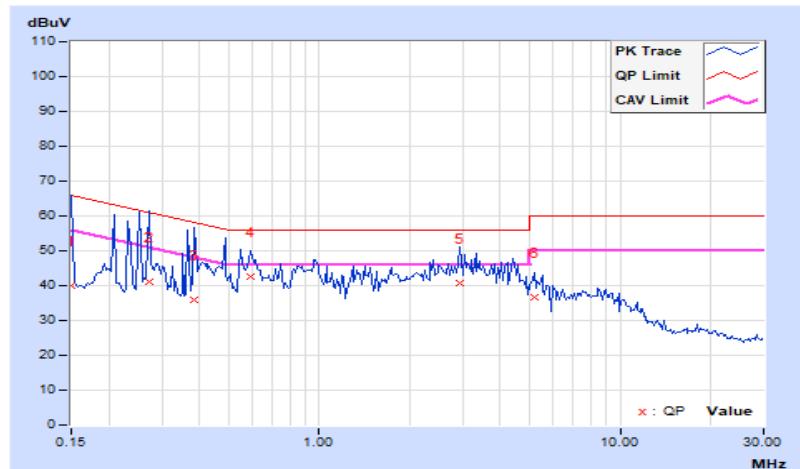

RF Mode	BT GFSK	Channel	CH 0 : 2402 MHz
Frequency Range	150 kHz ~ 30 MHz	Detector Function & Resolution Bandwidth	Quasi-Peak (QP) / Average (AV), 9 kHz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23°C, 71% RH
Tested By	Louis Yang		

Phase Of Power : Neutral (N)										
No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.16172	9.99	28.06	16.16	38.05	26.15	65.38	55.38	-27.33	-29.23
2	0.34141	10.00	22.48	7.87	32.48	17.87	59.17	49.17	-26.69	-31.30
3	0.38438	10.00	29.19	21.64	39.19	31.64	58.18	48.18	-18.99	-16.54
4	1.99609	10.07	27.94	19.91	38.01	29.98	56.00	46.00	-17.99	-16.02
5	3.22656	10.13	28.64	20.99	38.77	31.12	56.00	46.00	-17.23	-14.88
6	9.11719	10.38	19.06	12.54	29.44	22.92	60.00	50.00	-30.56	-27.08

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value



Mode C (USB interface using internal antenna)


RF Mode	BT GFSK	Channel	CH 0 : 2402 MHz
Frequency Range	150 kHz ~ 30 MHz	Detector Function & Resolution Bandwidth	Quasi-Peak (QP) / Average (AV), 9 kHz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23°C, 71% RH
Tested By	Louis Yang		

Phase Of Power : Line (L)

No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.18516	9.93	34.67	21.00	44.60	30.93	64.25	54.25	-19.65	-23.32
2	0.31016	9.94	28.54	20.21	38.48	30.15	59.97	49.97	-21.49	-19.82
3	0.40391	9.94	31.95	26.71	41.89	36.65	57.77	47.77	-15.88	-11.12
4	0.98594	9.98	30.76	24.40	40.74	34.38	56.00	46.00	-15.26	-11.62
5	2.07031	10.02	32.78	25.16	42.80	35.18	56.00	46.00	-13.20	-10.82
6	3.03516	10.07	31.59	21.08	41.66	31.15	56.00	46.00	-14.34	-14.85

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

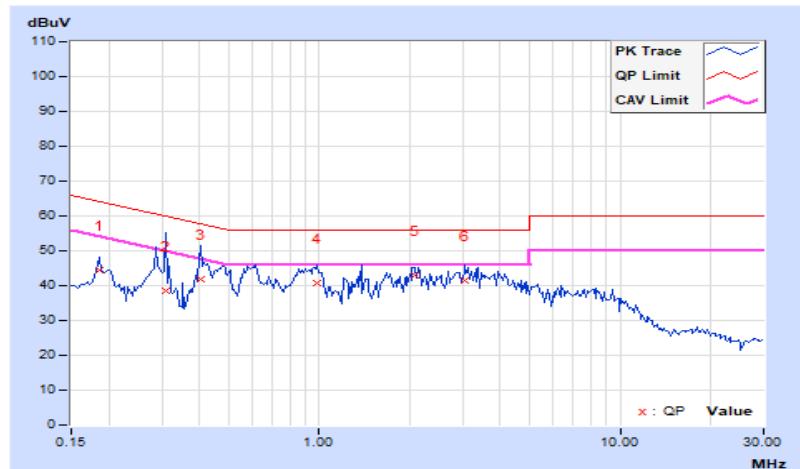


RF Mode	BT GFSK	Channel	CH 0 : 2402 MHz
Frequency Range	150 kHz ~ 30 MHz	Detector Function & Resolution Bandwidth	Quasi-Peak (QP) / Average (AV), 9 kHz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23°C, 71% RH
Tested By	Louis Yang		

Phase Of Power : Neutral (N)										
No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.16172	9.99	27.65	15.84	37.64	25.83	65.38	55.38	-27.74	-29.55
2	0.34922	10.00	21.78	8.17	31.78	18.17	58.98	48.98	-27.20	-30.81
3	0.99766	10.03	29.23	21.47	39.26	31.50	56.00	46.00	-16.74	-14.50
4	1.76172	10.06	28.70	20.71	38.76	30.77	56.00	46.00	-17.24	-15.23
5	3.19531	10.12	28.62	19.23	38.74	29.35	56.00	46.00	-17.26	-16.65
6	7.19922	10.30	20.40	10.43	30.70	20.73	60.00	50.00	-29.30	-29.27

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

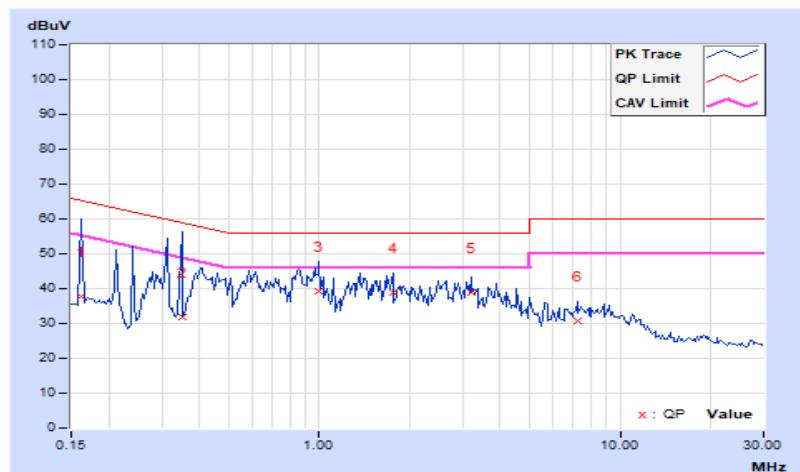


Mode D (USB interface using external antenna)

RF Mode	BT GFSK	Channel	CH 0 : 2402 MHz
Frequency Range	150 kHz ~ 30 MHz	Detector Function & Resolution Bandwidth	Quasi-Peak (QP) / Average (AV), 9 kHz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23°C, 71% RH
Tested By	Louis Yang		

Phase Of Power : Line (L)										
No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.21250	9.93	27.20	17.78	37.13	27.71	63.11	53.11	-25.98	-25.40
2	0.41953	9.94	33.61	26.75	43.55	36.69	57.46	47.46	-13.91	-10.77
3	0.96250	9.98	32.23	24.48	42.21	34.46	56.00	46.00	-13.79	-11.54
4	2.14063	10.03	32.59	25.00	42.62	35.03	56.00	46.00	-13.38	-10.97
5	3.66016	10.10	31.78	20.49	41.88	30.59	56.00	46.00	-14.12	-15.41
6	6.32813	10.26	22.45	15.24	32.71	25.50	60.00	50.00	-27.29	-24.50

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

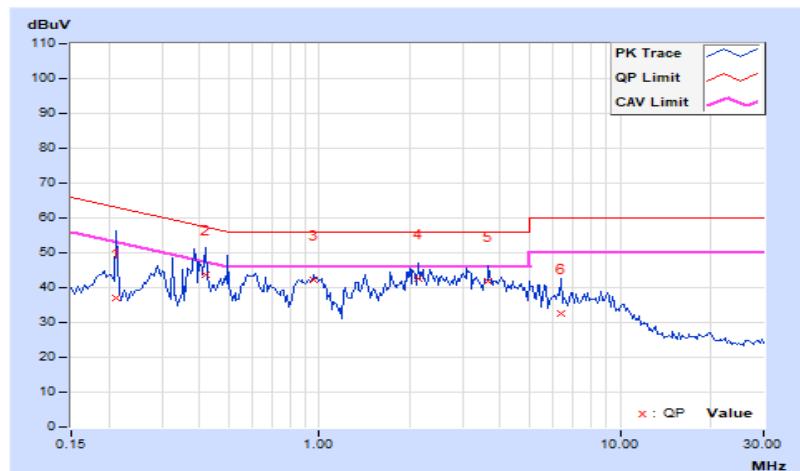

RF Mode	BT GFSK	Channel	CH 0 : 2402 MHz
Frequency Range	150 kHz ~ 30 MHz	Detector Function & Resolution Bandwidth	Quasi-Peak (QP) / Average (AV), 9 kHz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23°C, 71% RH
Tested By	Louis Yang		

Phase Of Power : Neutral (N)										
No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.40781	10.00	34.20	26.11	44.20	36.11	57.69	47.69	-13.49	-11.58
2	0.87656	10.02	27.90	19.96	37.92	29.98	56.00	46.00	-18.08	-16.02
3	1.35938	10.04	27.57	21.86	37.61	31.90	56.00	46.00	-18.39	-14.10
4	2.56250	10.10	29.06	23.71	39.16	33.81	56.00	46.00	-16.84	-12.19
5	4.40625	10.18	24.99	14.24	35.17	24.42	56.00	46.00	-20.83	-21.58
6	8.26563	10.34	20.76	14.24	31.10	24.58	60.00	50.00	-28.90	-25.42

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value



7.8 Unwanted Emissions below 1 GHz


Mode A (SDIO interface using internal antenna)

RF Mode	BT GFSK	Channel	CH 0 : 2402 MHz
Frequency Range	30 MHz ~ 1 GHz	Detector Function & Bandwidth	QP: RB=120kHz, DET=Quasi-Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	20°C, 61% RH
Tested By	Clark Lo		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	30.63	27.5 QP	40.0	-12.5	1.00 H	267	46.5	-19.0
2	195.10	20.8 QP	43.5	-22.7	1.00 H	296	41.6	-20.8
3	242.20	28.8 QP	46.0	-17.2	1.00 H	149	47.9	-19.1
4	428.01	20.8 QP	46.0	-25.2	1.00 H	65	34.6	-13.8
5	477.58	24.4 QP	46.0	-21.6	2.00 H	50	37.0	-12.6
6	717.57	25.8 QP	46.0	-20.2	1.00 H	132	34.0	-8.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30 MHz ~ 1 GHz.
5. The frequency range 9 kHz ~ 30 MHz: all emissions are more than 20 dB below the limit, therefore do not be recorded in this report.

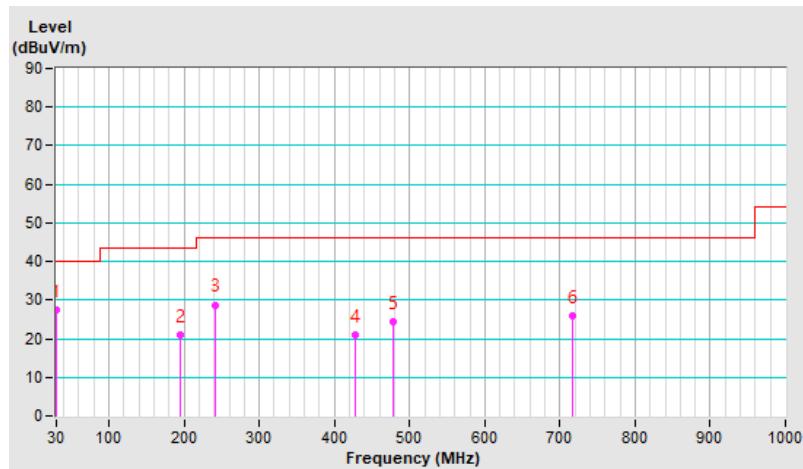


RF Mode	BT GFSK	Channel	CH 0 : 2402 MHz
Frequency Range	30 MHz ~ 1 GHz	Detector Function & Bandwidth	QP: RB=120kHz, DET=Quasi-Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	20°C, 61% RH
Tested By	Clark Lo		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	40.77	29.5 QP	40.0	-10.5	1.00 V	321	47.5	-18.0
2	88.98	20.6 QP	43.5	-22.9	1.00 V	86	44.0	-23.4
3	165.18	15.4 QP	43.5	-28.1	1.00 V	61	33.1	-17.7
4	236.18	23.8 QP	46.0	-22.2	1.00 V	222	43.4	-19.6
5	478.36	21.5 QP	46.0	-24.5	1.00 V	280	34.1	-12.6
6	742.94	24.3 QP	46.0	-21.7	1.00 V	138	31.7	-7.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30 MHz ~ 1 GHz.
5. The frequency range 9 kHz ~ 30 MHz: all emissions are more than 20 dB below the limit, therefore do not be recorded in this report.

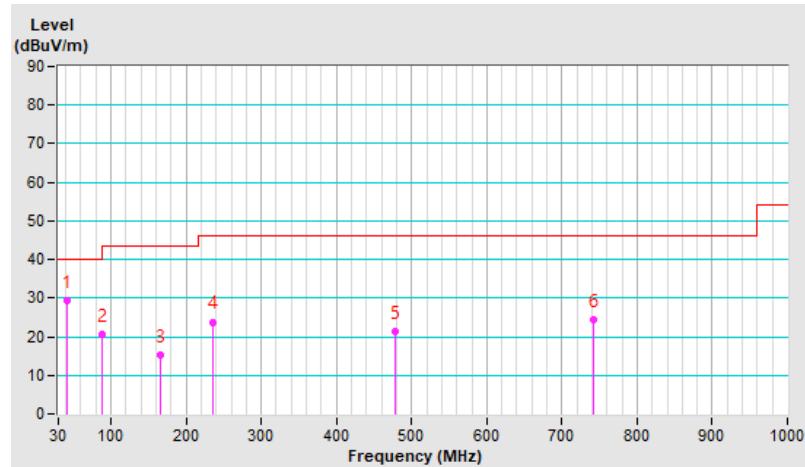

Mode B (SDIO interface using external antenna)


RF Mode	BT GFSK	Channel	CH 0 : 2402 MHz
Frequency Range	30 MHz ~ 1 GHz	Detector Function & Bandwidth	QP: RB=120kHz, DET=Quasi-Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	20°C, 61% RH
Tested By	Clark Lo		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	30.53	26.7 QP	40.0	-13.3	1.00 H	169	45.6	-18.9
2	109.98	16.6 QP	43.5	-26.9	3.00 H	97	37.5	-20.9
3	188.85	22.7 QP	43.5	-20.8	1.50 H	331	43.1	-20.4
4	292.98	31.6 QP	46.0	-14.4	1.00 H	8	48.8	-17.2
5	479.18	25.6 QP	46.0	-20.4	2.00 H	110	38.2	-12.6
6	543.88	25.2 QP	46.0	-20.8	1.50 H	314	36.7	-11.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30 MHz ~ 1 GHz.
5. The frequency range 9 kHz ~ 30 MHz: all emissions are more than 20 dB below the limit, therefore do not be recorded in this report.

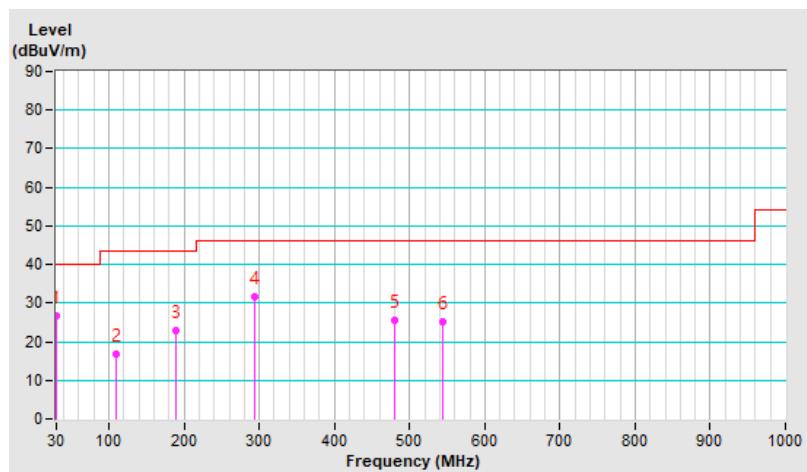


RF Mode	BT GFSK	Channel	CH 0 : 2402 MHz
Frequency Range	30 MHz ~ 1 GHz	Detector Function & Bandwidth	QP: RB=120kHz, DET=Quasi-Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	20°C, 61% RH
Tested By	Clark Lo		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	40.67	29.4 QP	40.0	-10.6	1.00 V	198	47.4	-18.0
2	89.22	20.4 QP	43.5	-23.1	1.50 V	78	43.8	-23.4
3	188.65	17.2 QP	43.5	-26.3	1.00 V	132	37.5	-20.3
4	242.15	24.7 QP	46.0	-21.3	2.00 V	333	43.8	-19.1
5	347.84	19.1 QP	46.0	-26.9	1.50 V	243	35.1	-16.0
6	480.01	22.0 QP	46.0	-24.0	1.00 V	283	34.5	-12.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30 MHz ~ 1 GHz.
5. The frequency range 9 kHz ~ 30 MHz: all emissions are more than 20 dB below the limit, therefore do not be recorded in this report.

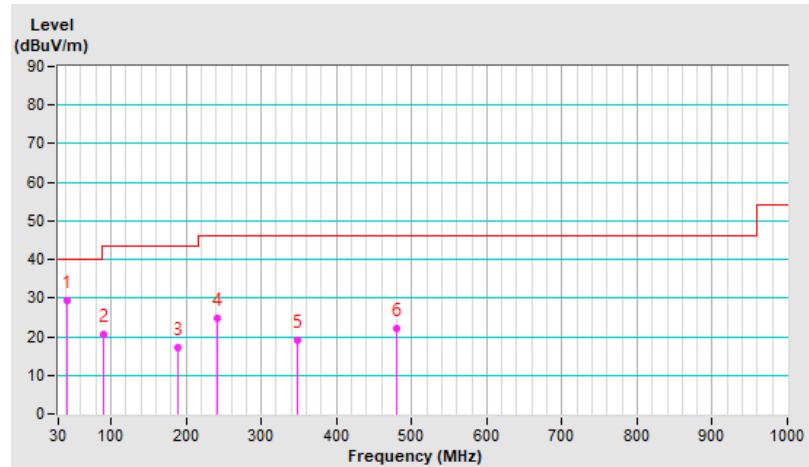

Mode C (USB interface using internal antenna)


RF Mode	BT GFSK	Channel	CH 0 : 2402 MHz
Frequency Range	30 MHz ~ 1 GHz	Detector Function & Bandwidth	QP: RB=120kHz, DET=Quasi-Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	20°C, 61% RH
Tested By	Clark Lo		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	33.93	24.2 QP	40.0	-15.8	1.50 H	267	42.8	-18.6
2	129.28	17.1 QP	43.5	-26.4	1.50 H	91	36.1	-19.0
3	188.85	25.5 QP	43.5	-18.0	2.00 H	326	45.9	-20.4
4	293.03	32.8 QP	46.0	-13.2	1.00 H	349	50.0	-17.2
5	480.01	25.3 QP	46.0	-20.7	2.00 H	103	37.8	-12.5
6	539.37	25.3 QP	46.0	-20.7	1.50 H	304	36.8	-11.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30 MHz ~ 1 GHz.
5. The frequency range 9 kHz ~ 30 MHz: all emissions are more than 20 dB below the limit, therefore do not be recorded in this report.

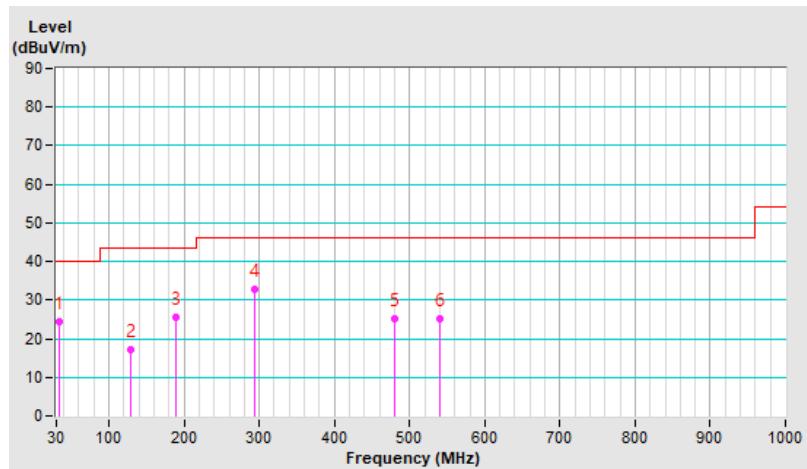


RF Mode	BT GFSK	Channel	CH 0 : 2402 MHz
Frequency Range	30 MHz ~ 1 GHz	Detector Function & Bandwidth	QP: RB=120kHz, DET=Quasi-Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	20°C, 61% RH
Tested By	Clark Lo		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	40.96	30.4 QP	40.0	-9.6	1.00 V	313	48.3	-17.9
2	89.03	20.6 QP	43.5	-22.9	1.50 V	108	44.0	-23.4
3	165.86	16.9 QP	43.5	-26.6	1.00 V	72	34.6	-17.7
4	242.20	24.0 QP	46.0	-22.0	2.00 V	331	43.1	-19.1
5	478.36	20.9 QP	46.0	-25.1	1.00 V	122	33.5	-12.6
6	531.03	21.8 QP	46.0	-24.2	1.00 V	304	33.4	-11.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30 MHz ~ 1 GHz.
5. The frequency range 9 kHz ~ 30 MHz: all emissions are more than 20 dB below the limit, therefore do not be recorded in this report.

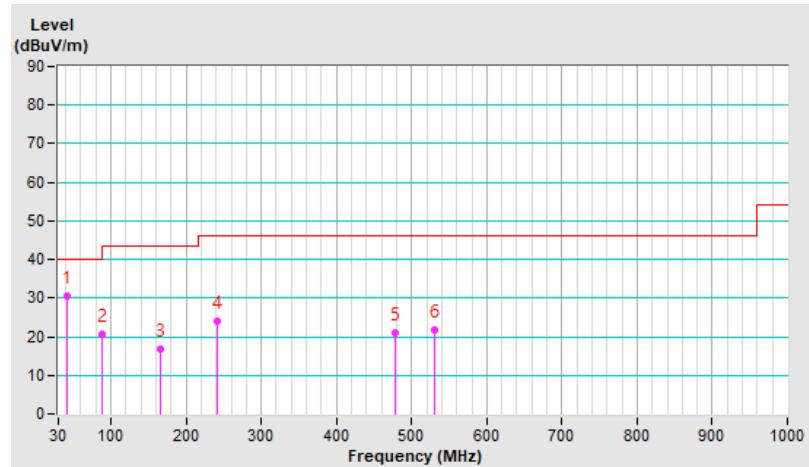


Mode D (USB interface using external antenna)

RF Mode	BT GFSK	Channel	CH 0 : 2402 MHz
Frequency Range	30 MHz ~ 1 GHz	Detector Function & Bandwidth	QP: RB=120kHz, DET=Quasi-Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	20°C, 61% RH
Tested By	Clark Lo		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	30.82	25.8 QP	40.0	-14.2	1.00 H	213	44.8	-19.0
2	129.19	16.8 QP	43.5	-26.7	2.00 H	95	35.8	-19.0
3	188.70	23.5 QP	43.5	-20.0	1.00 H	330	43.9	-20.4
4	293.17	33.5 QP	46.0	-12.5	1.00 H	173	50.7	-17.2
5	477.58	24.7 QP	46.0	-21.3	2.00 H	293	37.3	-12.6
6	545.63	25.4 QP	46.0	-20.6	1.50 H	310	36.8	-11.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30 MHz ~ 1 GHz.
5. The frequency range 9 kHz ~ 30 MHz: all emissions are more than 20 dB below the limit, therefore do not be recorded in this report.

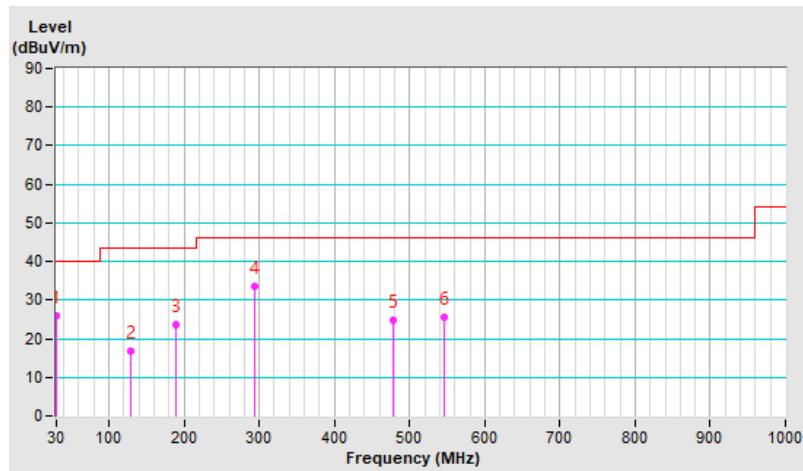


RF Mode	BT GFSK	Channel	CH 0 : 2402 MHz
Frequency Range	30 MHz ~ 1 GHz	Detector Function & Bandwidth	QP: RB=120kHz, DET=Quasi-Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	20°C, 61% RH
Tested By	Clark Lo		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	41.59	30.5 QP	40.0	-9.5	1.00 V	236	48.4	-17.9
2	89.12	20.4 QP	43.5	-23.1	1.50 V	192	43.8	-23.4
3	194.81	20.9 QP	43.5	-22.6	1.00 V	168	41.7	-20.8
4	288.61	27.9 QP	46.0	-18.1	2.00 V	214	45.1	-17.2
5	404.58	20.6 QP	46.0	-25.4	1.50 V	286	35.0	-14.4
6	480.01	22.9 QP	46.0	-23.1	2.00 V	216	35.4	-12.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30 MHz ~ 1 GHz.
5. The frequency range 9 kHz ~ 30 MHz: all emissions are more than 20 dB below the limit, therefore do not be recorded in this report.

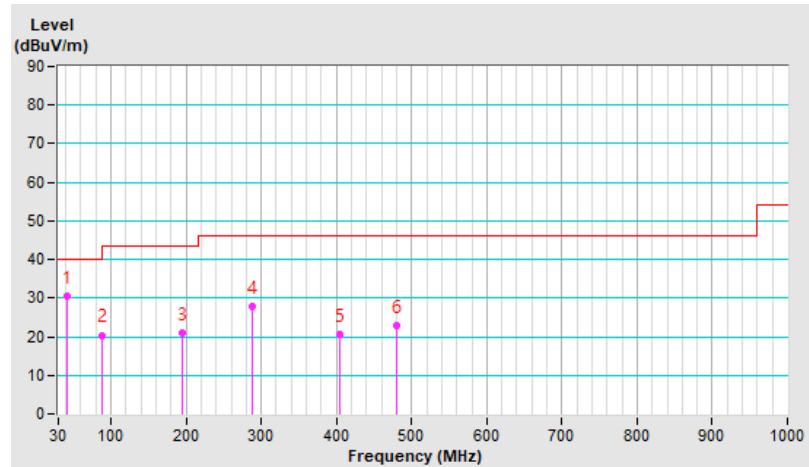

7.9 Unwanted Emissions above 1 GHz

Mode C (USB interface using internal antenna)


RF Mode	BT GFSK	Channel	CH 0 : 2402 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=3 MHz, DET=RMS
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22°C, 69% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2375.50	55.9 PK	74.0	-18.1	2.98 H	143	58.7	-2.8
2	2375.50	44.4 AV	54.0	-9.6	2.98 H	143	47.2	-2.8
3	*2402.00	109.4 PK			2.98 H	143	112.3	-2.9
4	*2402.00	78.8 AV			2.98 H	143	81.7	-2.9
5	4882.00	45.1 PK	74.0	-28.9	2.54 H	180	42.9	2.2
6	4882.00	14.4 AV	54.0	-39.6	2.54 H	180	12.2	2.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. The average value of fundamental and harmonic frequency is: Average = Peak value + 20 log(Duty cycle) Where the duty cycle correction factor is calculated from following formula:

$$20 \log(\text{Duty cycle}) = 20 \log(2.941 \text{ ms} / 100 \text{ ms}) = -30.6 \text{ dB}$$

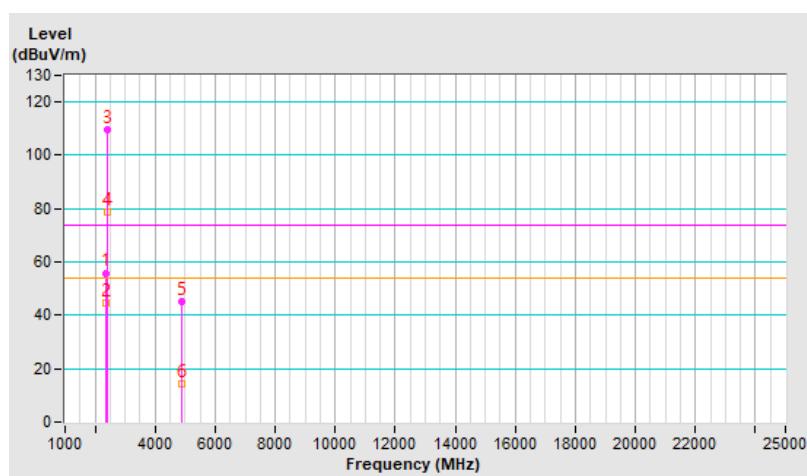


RF Mode	BT GFSK	Channel	CH 0 : 2402 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=3 MHz, DET=RMS
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22°C, 69% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2375.50	55.6 PK	74.0	-18.4	3.75 V	24	58.4	-2.8
2	2375.50	44.3 AV	54.0	-9.7	3.75 V	24	47.1	-2.8
3	*2402.00	107.3 PK			3.75 V	24	110.2	-2.9
4	*2402.00	76.7 AV			3.75 V	24	79.6	-2.9
5	4804.00	41.9 PK	74.0	-32.1	1.01 V	165	39.6	2.3
6	4804.00	11.2 AV	54.0	-42.8	1.01 V	165	8.9	2.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. The average value of fundamental and harmonic frequency is: Average = Peak value + 20 log(Duty cycle) Where the duty cycle correction factor is calculated from following formula:

$$20 \log(\text{Duty cycle}) = 20 \log(2.941 \text{ ms} / 100 \text{ ms}) = -30.6 \text{ dB}$$

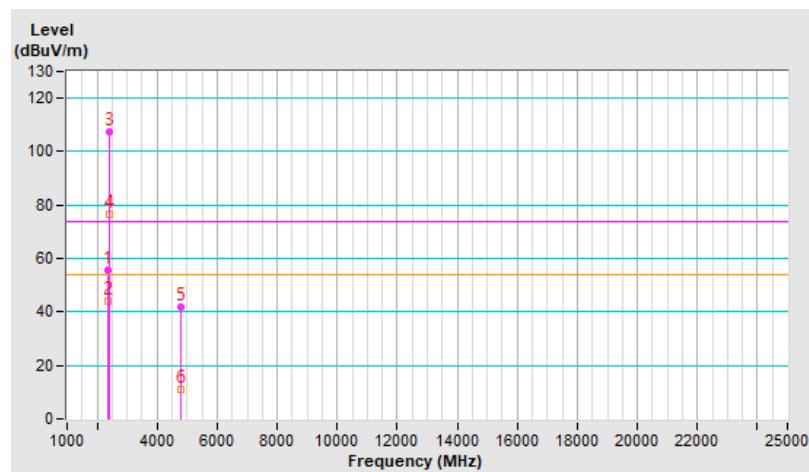


RF Mode	BT GFSK	Channel	CH 39 : 2441 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=3 MHz, DET=RMS
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22°C, 69% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2441.00	106.4 PK			2.85 H	146	109.2	-2.8
2	*2441.00	75.8 AV			2.85 H	146	78.6	-2.8
3	4882.00	44.5 PK	74.0	-29.5	2.56 H	178	42.3	2.2
4	4882.00	13.9 AV	54.0	-40.1	2.56 H	178	11.7	2.2
5	7323.00	48.2 PK	74.0	-25.8	1.59 H	223	40.4	7.8
6	7323.00	17.6 AV	54.0	-36.4	1.59 H	223	9.8	7.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. The average value of fundamental and harmonic frequency is: Average = Peak value + 20 log(Duty cycle) Where the duty cycle correction factor is calculated from following formula:

$$20 \log(\text{Duty cycle}) = 20 \log(2.941 \text{ ms} / 100 \text{ ms}) = -30.6 \text{ dB}$$

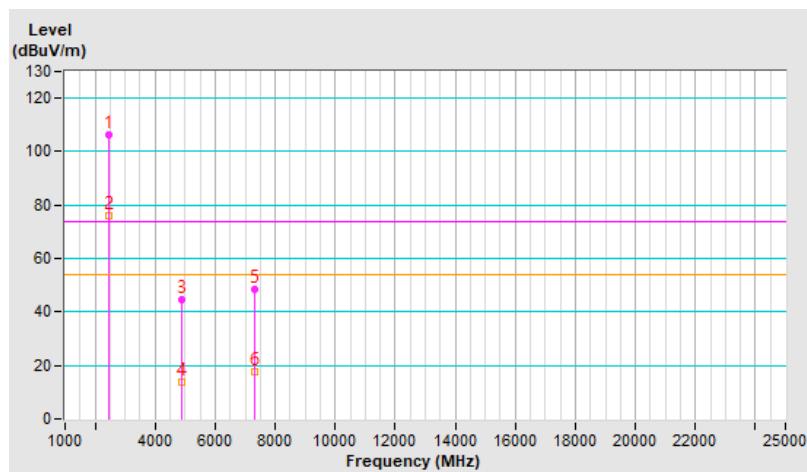


RF Mode	BT GFSK	Channel	CH 39 : 2441 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=3 MHz, DET=RMS
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22°C, 69% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2441.00	104.2 PK			3.62 V	39	107.0	-2.8
2	*2441.00	73.6 AV			3.62 V	39	76.4	-2.8
3	4882.00	41.7 PK	74.0	-32.3	1.00 V	181	39.5	2.2
4	4882.00	11.1 AV	54.0	-42.9	1.00 V	181	8.9	2.2
5	7323.00	45.7 PK	74.0	-28.3	3.89 V	78	37.9	7.8
6	7323.00	15.1 AV	54.0	-38.9	3.89 V	78	7.3	7.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. The average value of fundamental and harmonic frequency is: Average = Peak value + 20 log(Duty cycle) Where the duty cycle correction factor is calculated from following formula:

$$20 \log(\text{Duty cycle}) = 20 \log(2.941 \text{ ms} / 100 \text{ ms}) = -30.6 \text{ dB}$$

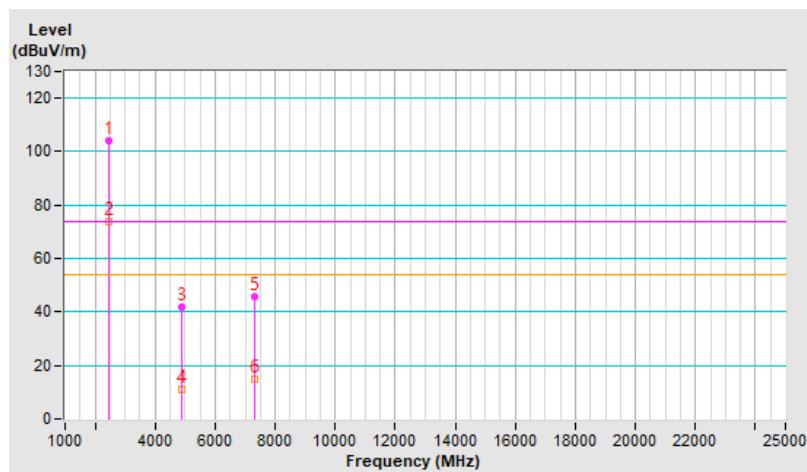


RF Mode	BT GFSK	Channel	CH 78 : 2480 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=3 MHz, DET=RMS
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22°C, 69% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2480.00	109.9 PK			2.58 H	318	112.6	-2.7
2	*2480.00	79.3 AV			2.58 H	318	82.0	-2.7
3	2483.50	56.4 PK	74.0	-17.6	2.58 H	318	59.1	-2.7
4	2483.50	46.2 AV	54.0	-7.8	2.58 H	318	48.9	-2.7
5	4882.00	44.2 PK	74.0	-29.8	2.54 H	171	42.0	2.2
6	4882.00	13.8 AV	54.0	-40.2	2.54 H	171	11.6	2.2
7	7323.00	48.4 PK	74.0	-25.6	1.62 H	219	40.6	7.8
8	7323.00	18.0 AV	54.0	-36.0	1.62 H	219	10.2	7.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. The average value of fundamental and harmonic frequency is: Average = Peak value + 20 log(Duty cycle) Where the duty cycle correction factor is calculated from following formula:
 $20 \log(\text{Duty cycle}) = 20 \log(2.941 \text{ ms} / 100 \text{ ms}) = -30.6 \text{ dB}$

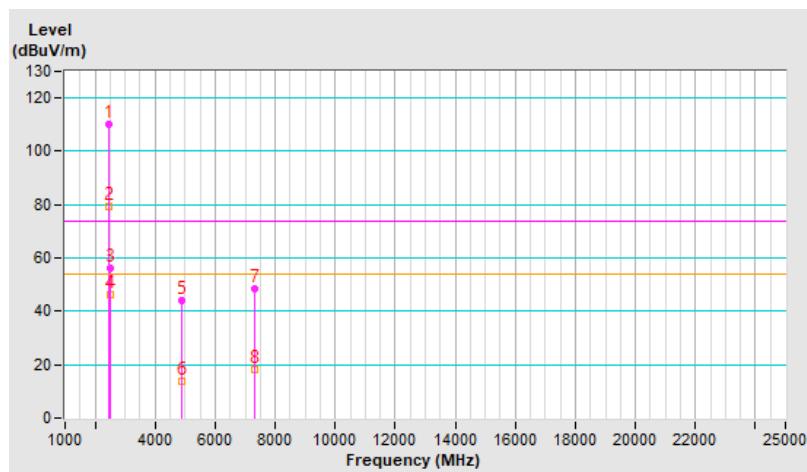


RF Mode	BT GFSK	Channel	CH 78 : 2480 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=3 MHz, DET=RMS
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22°C, 69% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2480.00	105.9 PK			1.00 V	307	108.6	-2.7
2	*2480.00	75.3 AV			1.00 V	307	78.0	-2.7
3	2483.50	56.1 PK	74.0	-17.9	1.00 V	307	58.8	-2.7
4	2483.50	44.7 AV	54.0	-9.3	1.00 V	307	47.4	-2.7
5	4960.00	41.5 PK	74.0	-32.5	1.00 V	173	39.2	2.3
6	4960.00	10.7 AV	54.0	-43.3	1.00 V	173	8.4	2.3
7	7440.00	45.3 PK	74.0	-28.7	3.88 V	70	37.5	7.8
8	7440.00	14.7 AV	54.0	-39.3	3.88 V	70	6.9	7.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. The average value of fundamental and harmonic frequency is: Average = Peak value + 20 log(Duty cycle) Where the duty cycle correction factor is calculated from following formula:
 $20 \log(\text{Duty cycle}) = 20 \log(2.941 \text{ ms} / 100 \text{ ms}) = -30.6 \text{ dB}$

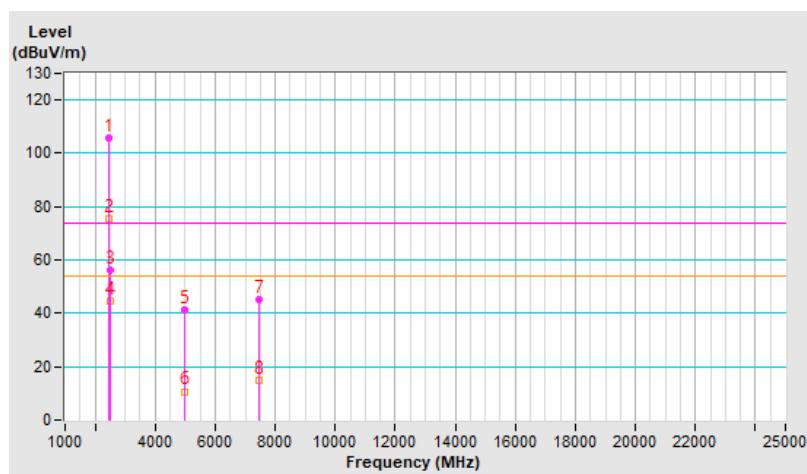


RF Mode	BT 8DPSK	Channel	CH 0 : 2402 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=3 MHz, DET=RMS
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22°C, 69% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	55.2 PK	74.0	-18.8	2.96 H	145	58.0	-2.8
2	2390.00	44.4 AV	54.0	-9.6	2.96 H	145	47.2	-2.8
3	*2402.00	105.8 PK			2.96 H	145	108.7	-2.9
4	*2402.00	75.0 AV			2.96 H	145	77.9	-2.9
5	4804.00	47.3 PK	74.0	-26.7	1.50 H	146	45.0	2.3
6	4804.00	16.5 AV	54.0	-37.5	1.50 H	146	14.2	2.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. The average value of fundamental and harmonic frequency is: Average = Peak value + 20 log(Duty cycle) Where the duty cycle correction factor is calculated from following formula:

$$20 \log(\text{Duty cycle}) = 20 \log(2.898 \text{ ms} / 100 \text{ ms}) = -30.8 \text{ dB}$$

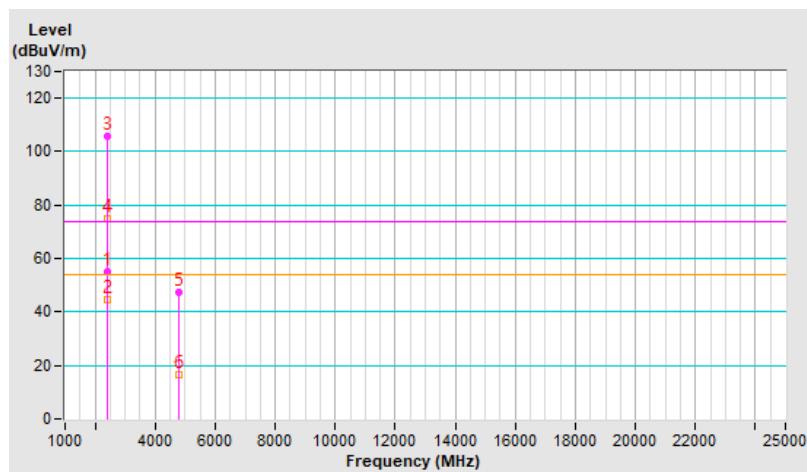


RF Mode	BT 8DPSK	Channel	CH 0 : 2402 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=3 MHz, DET=RMS
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22°C, 69% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	56.9 PK	74.0	-17.1	1.20 V	206	59.7	-2.8
2	2390.00	44.2 AV	54.0	-9.8	1.20 V	206	47.0	-2.8
3	*2402.00	96.9 PK			1.20 V	206	99.8	-2.9
4	*2402.00	66.1 AV			1.20 V	206	69.0	-2.9
5	4804.00	44.2 PK	74.0	-29.8	3.86 V	65	41.9	2.3
6	4804.00	13.4 AV	54.0	-40.6	3.86 V	65	11.1	2.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. The average value of fundamental and harmonic frequency is: Average = Peak value + 20 log(Duty cycle) Where the duty cycle correction factor is calculated from following formula:

$$20 \log(\text{Duty cycle}) = 20 \log(2.898 \text{ ms} / 100 \text{ ms}) = -30.8 \text{ dB}$$

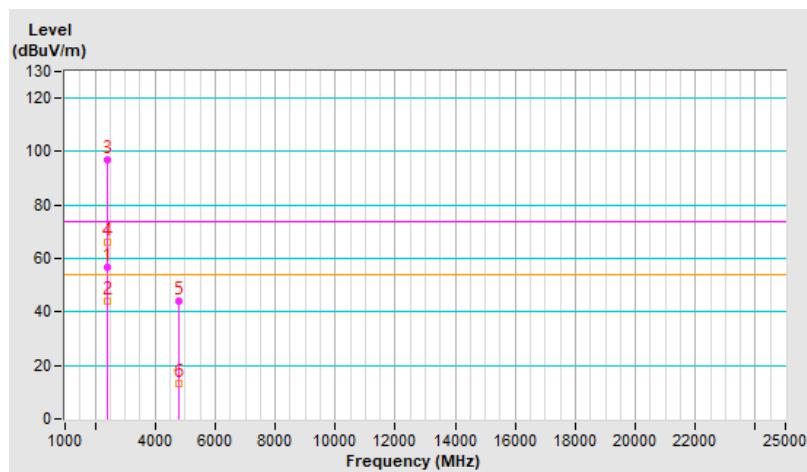


RF Mode	BT 8DPSK	Channel	CH 39 : 2441 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=3 MHz, DET=RMS
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22°C, 69% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2441.00	106.3 PK			1.19 H	145	109.1	-2.8
2	*2441.00	75.5 AV			1.19 H	145	78.3	-2.8
3	4882.00	48.9 PK	74.0	-25.1	1.01 H	145	46.7	2.2
4	4882.00	18.1 AV	54.0	-35.9	1.01 H	145	15.9	2.2
5	7323.00	46.4 PK	74.0	-27.6	1.01 H	153	38.6	7.8
6	7323.00	15.6 AV	54.0	-38.4	1.01 H	153	7.8	7.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. The average value of fundamental and harmonic frequency is: Average = Peak value + 20 log(Duty cycle) Where the duty cycle correction factor is calculated from following formula:

$$20 \log(\text{Duty cycle}) = 20 \log(2.898 \text{ ms} / 100 \text{ ms}) = -30.8 \text{ dB}$$

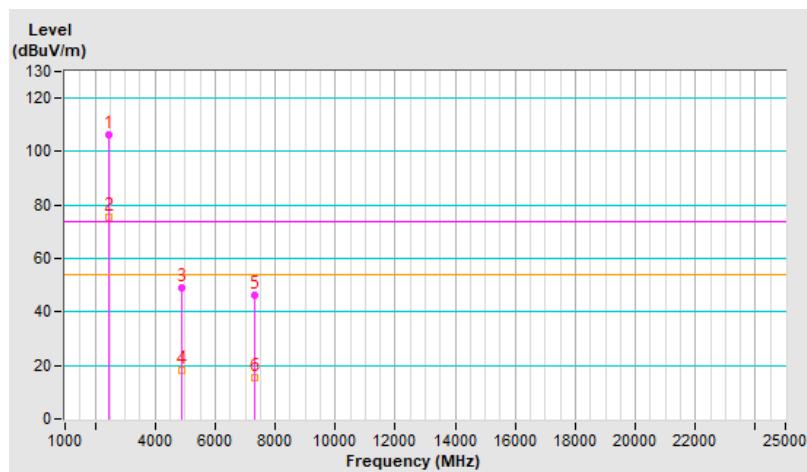


RF Mode	BT 8DPSK	Channel	CH 39 : 2441 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=3 MHz, DET=RMS
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22°C, 69% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2441.00	98.7 PK			1.17 V	236	101.5	-2.8
2	*2441.00	67.9 AV			1.17 V	236	70.7	-2.8
3	4882.00	46.5 PK	74.0	-27.5	3.91 V	70	44.3	2.2
4	4882.00	15.7 AV	54.0	-38.3	3.91 V	70	13.5	2.2
5	7323.00	43.7 PK	74.0	-30.3	1.02 V	359	35.9	7.8
6	7323.00	12.9 AV	54.0	-41.1	1.02 V	359	5.1	7.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. The average value of fundamental and harmonic frequency is: Average = Peak value + 20 log(Duty cycle) Where the duty cycle correction factor is calculated from following formula:

$$20 \log(\text{Duty cycle}) = 20 \log(2.898 \text{ ms} / 100 \text{ ms}) = -30.8 \text{ dB}$$

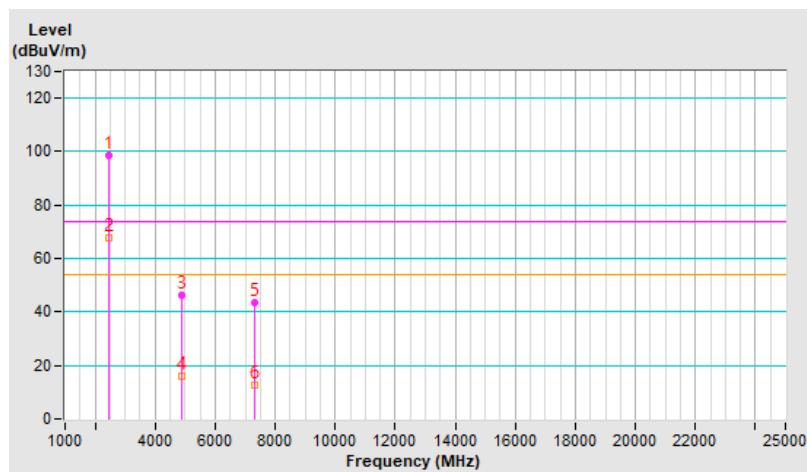


RF Mode	BT 8DPSK	Channel	CH 78 : 2480 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=3 MHz, DET=RMS
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22°C, 69% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2480.00	109.6 PK			1.50 H	312	112.3	-2.7
2	*2480.00	78.8 AV			1.50 H	312	81.5	-2.7
3	2483.50	56.6 PK	74.0	-17.4	1.50 H	312	59.3	-2.7
4	2483.50	45.6 AV	54.0	-8.4	1.50 H	312	48.3	-2.7
5	4960.00	48.7 PK	74.0	-25.3	1.00 H	155	46.4	2.3
6	4960.00	18.2 AV	54.0	-35.8	1.00 H	155	15.9	2.3
7	7440.00	46.6 PK	74.0	-27.4	1.07 H	165	38.8	7.8
8	7440.00	15.6 AV	54.0	-38.4	1.07 H	165	7.8	7.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. The average value of fundamental and harmonic frequency is: Average = Peak value + 20 log(Duty cycle) Where the duty cycle correction factor is calculated from following formula:
 $20 \log(\text{Duty cycle}) = 20 \log(2.898 \text{ ms} / 100 \text{ ms}) = -30.8 \text{ dB}$

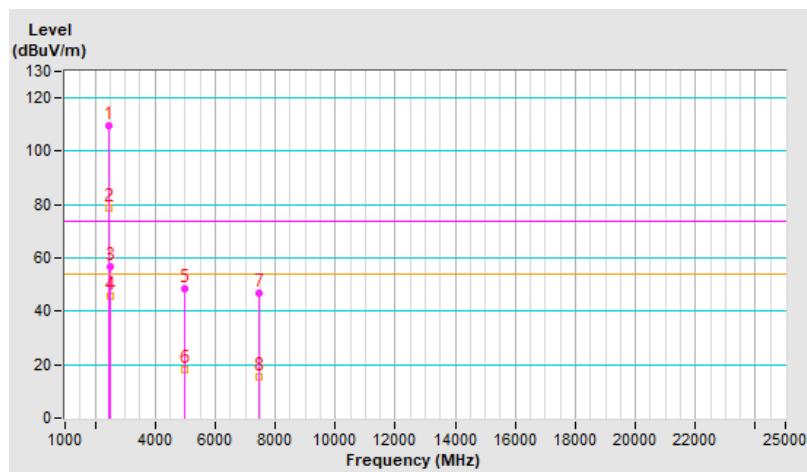


RF Mode	BT 8DPSK	Channel	CH 78 : 2480 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=3 MHz, DET=RMS
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22°C, 69% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2480.00	101.9 PK			1.00 V	278	104.6	-2.7
2	*2480.00	71.1 AV			1.00 V	278	73.8	-2.7
3	2483.50	56.5 PK	74.0	-17.5	1.00 V	278	59.2	-2.7
4	2483.50	44.5 AV	54.0	-9.5	1.00 V	278	47.2	-2.7
5	4960.00	46.1 PK	74.0	-27.9	3.92 V	55	43.8	2.3
6	4960.00	15.4 AV	54.0	-38.6	3.92 V	55	13.1	2.3
7	7440.00	43.9 PK	74.0	-30.1	1.02 V	360	36.1	7.8
8	7440.00	13.3 AV	54.0	-40.7	1.02 V	360	5.5	7.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. The average value of fundamental and harmonic frequency is: Average = Peak value + 20 log(Duty cycle) Where the duty cycle correction factor is calculated from following formula:

$$20 \log(\text{Duty cycle}) = 20 \log(2.898 \text{ ms} / 100 \text{ ms}) = -30.8 \text{ dB}$$

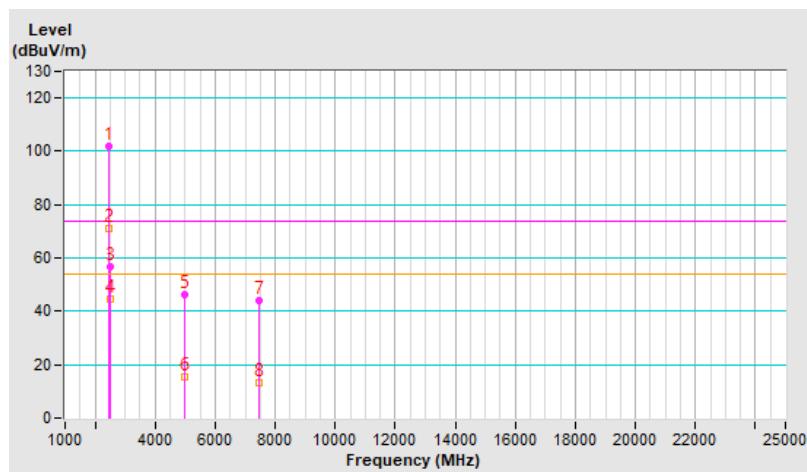

Mode D (USB interface using external antenna)

RF Mode	BT GFSK	Channel	CH 0 : 2402 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=3 MHz, DET=RMS
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	21°C, 69% RH
Tested By	Louis Yang		


Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	55.8 PK	74.0	-18.2	1.02 H	200	58.6	-2.8
2	2390.00	44.5 AV	54.0	-9.5	1.02 H	200	47.3	-2.8
3	*2402.00	101.8 PK			1.02 H	200	104.7	-2.9
4	*2402.00	71.2 AV			1.02 H	200	74.1	-2.9
5	4804.00	42.3 PK	74.0	-31.7	1.00 H	26	40.0	2.3
6	4804.00	11.5 AV	54.0	-42.5	1.00 H	26	9.2	2.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. The average value of fundamental and harmonic frequency is: Average = Peak value + 20 log(Duty cycle) Where the duty cycle correction factor is calculated from following formula:

$$20 \log(\text{Duty cycle}) = 20 \log(2.941 \text{ ms} / 100 \text{ ms}) = -30.6 \text{ dB}$$

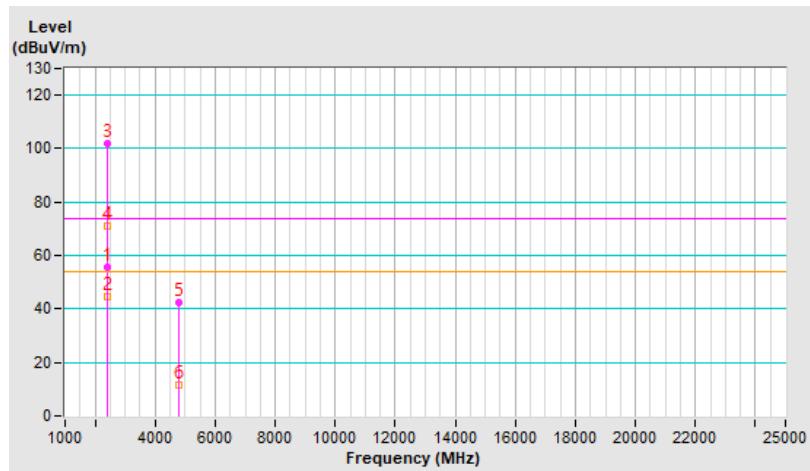


RF Mode	BT GFSK	Channel	CH 0 : 2402 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=3 MHz, DET=RMS
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	21°C, 69% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	55.9 PK	74.0	-18.1	1.21 V	45	58.7	-2.8
2	2390.00	43.8 AV	54.0	-10.2	1.21 V	45	46.6	-2.8
3	*2402.00	106.5 PK			1.21 V	45	109.4	-2.9
4	*2402.00	75.9 AV			1.21 V	45	78.8	-2.9
5	4804.00	43.8 PK	74.0	-30.2	2.38 V	301	41.5	2.3
6	4804.00	12.8 AV	54.0	-41.2	2.38 V	301	10.5	2.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. The average value of fundamental and harmonic frequency is: Average = Peak value + 20 log(Duty cycle) Where the duty cycle correction factor is calculated from following formula:

$$20 \log(\text{Duty cycle}) = 20 \log(2.941 \text{ ms} / 100 \text{ ms}) = -30.6 \text{ dB}$$

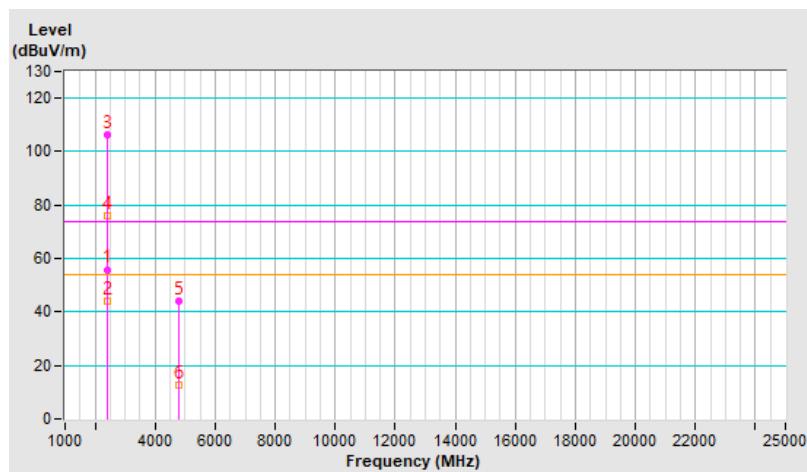


RF Mode	BT GFSK	Channel	CH 39 : 2441 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=3 MHz, DET=RMS
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	21°C, 69% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2441.00	101.4 PK			1.00 H	202	104.2	-2.8
2	*2441.00	70.8 AV			1.00 H	202	73.6	-2.8
3	4882.00	42.8 PK	74.0	-31.2	1.67 H	37	40.6	2.2
4	4882.00	12.2 AV	54.0	-41.8	1.67 H	37	10.0	2.2
5	7323.00	44.8 PK	74.0	-29.2	1.34 H	360	37.0	7.8
6	7323.00	14.2 AV	54.0	-39.8	1.34 H	360	6.4	7.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. The average value of fundamental and harmonic frequency is: Average = Peak value + 20 log(Duty cycle) Where the duty cycle correction factor is calculated from following formula:

$$20 \log(\text{Duty cycle}) = 20 \log(2.941 \text{ ms} / 100 \text{ ms}) = -30.6 \text{ dB}$$

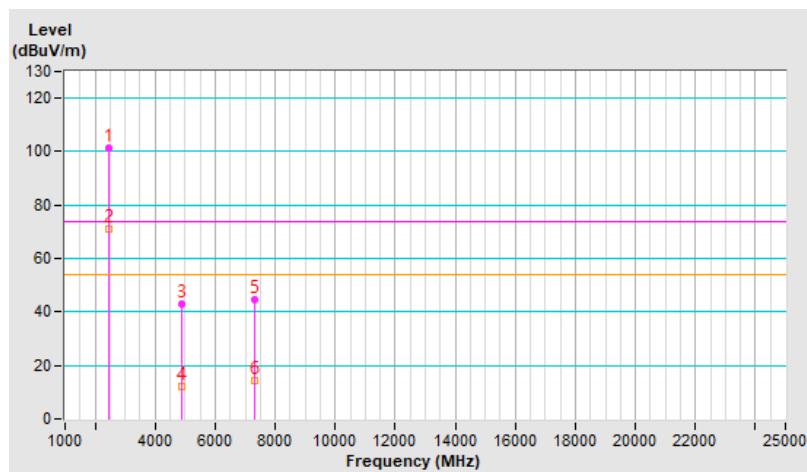


RF Mode	BT GFSK	Channel	CH 39 : 2441 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=3 MHz, DET=RMS
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	21°C, 69% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2441.00	106.1 PK			1.35 V	98	108.9	-2.8
2	*2441.00	75.5 AV			1.35 V	98	78.3	-2.8
3	4882.00	42.4 PK	74.0	-31.6	2.27 V	297	40.2	2.2
4	4882.00	11.8 AV	54.0	-42.2	2.27 V	297	9.6	2.2
5	7323.00	44.5 PK	74.0	-29.5	1.96 V	288	36.7	7.8
6	7323.00	13.9 AV	54.0	-40.1	1.96 V	288	6.1	7.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. The average value of fundamental and harmonic frequency is: Average = Peak value + 20 log(Duty cycle) Where the duty cycle correction factor is calculated from following formula:

$$20 \log(\text{Duty cycle}) = 20 \log(2.941 \text{ ms} / 100 \text{ ms}) = -30.6 \text{ dB}$$

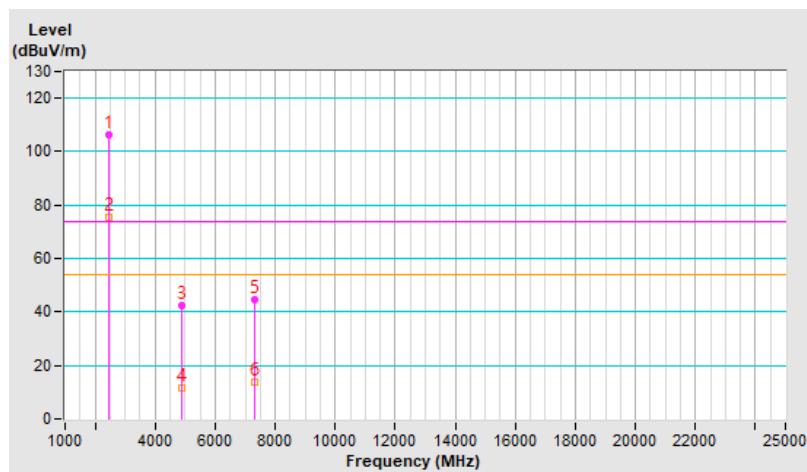


RF Mode	BT GFSK	Channel	CH 78 : 2480 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=3 MHz, DET=RMS
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	21°C, 69% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2480.00	102.7 PK			3.85 H	183	105.4	-2.7
2	*2480.00	72.1 AV			3.85 H	183	74.8	-2.7
3	2483.50	55.2 PK	74.0	-18.8	3.85 H	183	57.9	-2.7
4	2483.50	44.8 AV	54.0	-9.2	3.85 H	183	47.5	-2.7
5	4960.00	42.5 PK	74.0	-31.5	1.00 H	34	40.2	2.3
6	4960.00	11.9 AV	54.0	-42.1	1.00 H	34	9.6	2.3
7	7440.00	47.4 PK	74.0	-26.6	1.00 H	360	39.6	7.8
8	7440.00	16.8 AV	54.0	-37.2	1.00 H	360	9.0	7.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. The average value of fundamental and harmonic frequency is: Average = Peak value + 20 log(Duty cycle) Where the duty cycle correction factor is calculated from following formula:
 $20 \log(\text{Duty cycle}) = 20 \log(2.941 \text{ ms} / 100 \text{ ms}) = -30.6 \text{ dB}$

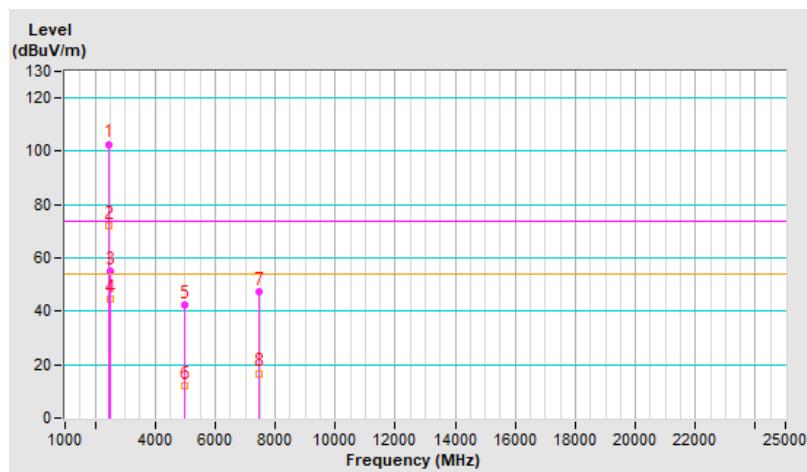


RF Mode	BT GFSK	Channel	CH 78 : 2480 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=3 MHz, DET=RMS
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	21°C, 69% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2480.00	107.2 PK			1.41 V	142	109.9	-2.7
2	*2480.00	76.6 AV			1.41 V	142	79.3	-2.7
3	2483.50	56.5 PK	74.0	-17.5	1.41 V	142	59.2	-2.7
4	2483.50	45.9 AV	54.0	-8.1	1.41 V	142	48.6	-2.7
5	4960.00	43.6 PK	74.0	-30.4	2.36 V	298	41.3	2.3
6	4960.00	13.0 AV	54.0	-41.0	2.36 V	298	10.7	2.3
7	7440.00	47.3 PK	74.0	-26.7	1.65 V	289	39.5	7.8
8	7440.00	16.7 AV	54.0	-37.3	1.65 V	289	8.9	7.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. The average value of fundamental and harmonic frequency is: Average = Peak value + 20 log(Duty cycle) Where the duty cycle correction factor is calculated from following formula:
 $20 \log(\text{Duty cycle}) = 20 \log(2.941 \text{ ms} / 100 \text{ ms}) = -30.6 \text{ dB}$

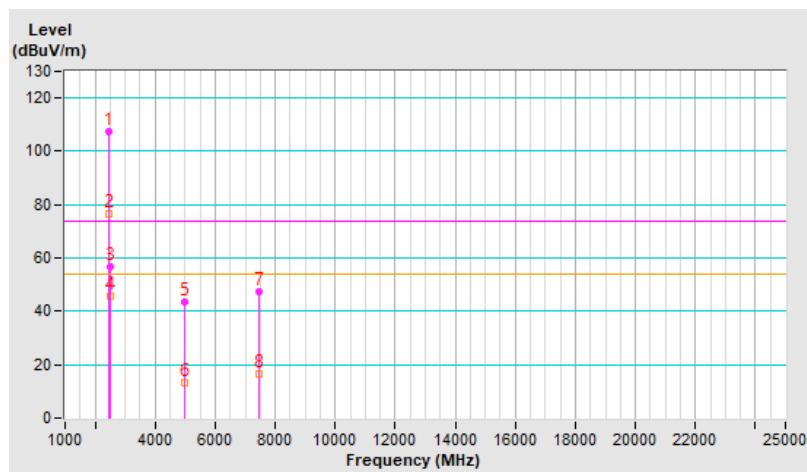


RF Mode	BT 8DPSK	Channel	CH 0 : 2402 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=3 MHz, DET=RMS
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	21°C, 69% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	56.0 PK	74.0	-18.0	1.04 H	201	58.8	-2.8
2	2390.00	44.7 AV	54.0	-9.3	1.04 H	201	47.5	-2.8
3	*2402.00	101.7 PK			1.04 H	201	104.6	-2.9
4	*2402.00	70.9 AV			1.04 H	201	73.8	-2.9
5	4804.00	43.2 PK	74.0	-30.8	1.47 H	331	40.9	2.3
6	4804.00	12.4 AV	54.0	-41.6	1.47 H	331	10.1	2.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. The average value of fundamental and harmonic frequency is: Average = Peak value + 20 log(Duty cycle) Where the duty cycle correction factor is calculated from following formula:

$$20 \log(\text{Duty cycle}) = 20 \log(2.898 \text{ ms} / 100 \text{ ms}) = -30.8 \text{ dB}$$

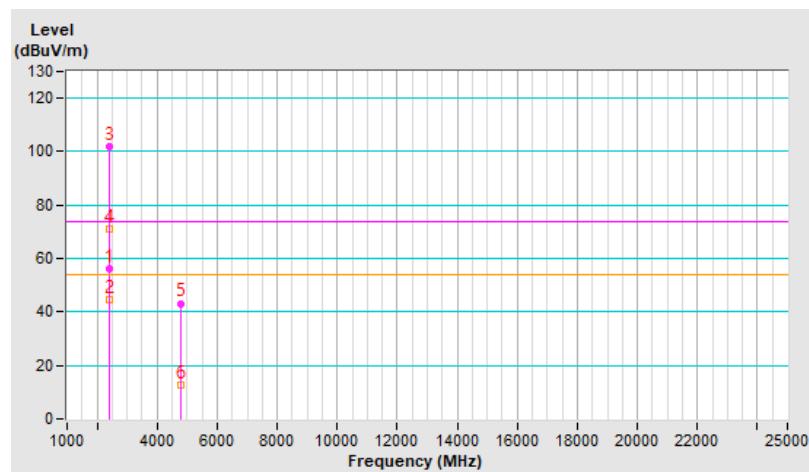


RF Mode	BT 8DPSK	Channel	CH 0 : 2402 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=3 MHz, DET=RMS
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	21°C, 69% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	55.7 PK	74.0	-18.3	1.23 V	44	58.5	-2.8
2	2390.00	44.1 AV	54.0	-9.9	1.23 V	44	46.9	-2.8
3	*2402.00	106.1 PK			1.23 V	44	109.0	-2.9
4	*2402.00	75.3 AV			1.23 V	44	78.2	-2.9
5	4804.00	43.1 PK	74.0	-30.9	1.87 V	322	40.8	2.3
6	4804.00	12.3 AV	54.0	-41.7	1.87 V	322	10.0	2.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. The average value of fundamental and harmonic frequency is: Average = Peak value + 20 log(Duty cycle) Where the duty cycle correction factor is calculated from following formula:

$$20 \log(\text{Duty cycle}) = 20 \log(2.898 \text{ ms} / 100 \text{ ms}) = -30.8 \text{ dB}$$

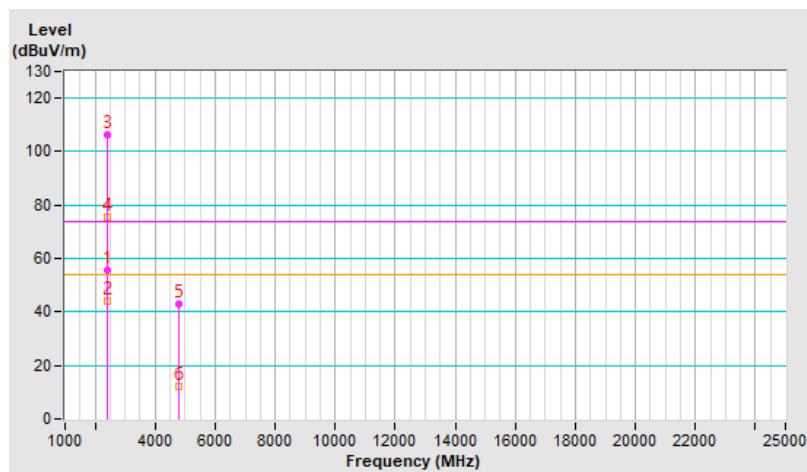


RF Mode	BT 8DPSK	Channel	CH 39 : 2441 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=3 MHz, DET=RMS
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	21°C, 69% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2441.00	101.4 PK			1.04 H	39	104.2	-2.8
2	*2441.00	70.6 AV			1.04 H	39	73.4	-2.8
3	4882.00	44.1 PK	74.0	-29.9	1.50 H	39	41.9	2.2
4	4882.00	13.3 AV	54.0	-40.7	1.50 H	39	11.1	2.2
5	7323.00	47.0 PK	74.0	-27.0	1.50 H	360	39.2	7.8
6	7323.00	16.2 AV	54.0	-37.8	1.50 H	360	8.4	7.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. The average value of fundamental and harmonic frequency is: Average = Peak value + 20 log(Duty cycle) Where the duty cycle correction factor is calculated from following formula:

$$20 \log(\text{Duty cycle}) = 20 \log(2.898 \text{ ms} / 100 \text{ ms}) = -30.8 \text{ dB}$$

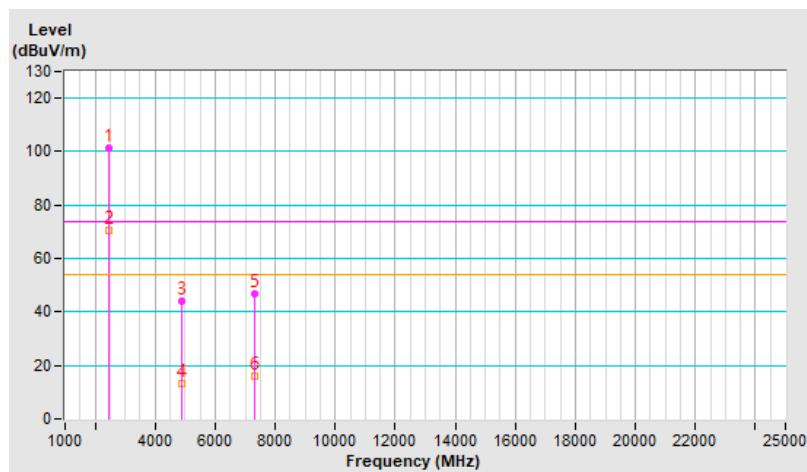


RF Mode	BT 8DPSK	Channel	CH 39 : 2441 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=3 MHz, DET=RMS
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	21°C, 69% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2441.00	105.7 PK			1.34 V	98	108.5	-2.8
2	*2441.00	74.9 AV			1.34 V	98	77.7	-2.8
3	4882.00	43.7 PK	74.0	-30.3	2.36 V	304	41.5	2.2
4	4882.00	12.9 AV	54.0	-41.1	2.36 V	304	10.7	2.2
5	7323.00	46.9 PK	74.0	-27.1	1.91 V	290	39.1	7.8
6	7323.00	16.1 AV	54.0	-37.9	1.91 V	290	8.3	7.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. The average value of fundamental and harmonic frequency is: Average = Peak value + 20 log(Duty cycle) Where the duty cycle correction factor is calculated from following formula:

$$20 \log(\text{Duty cycle}) = 20 \log(2.898 \text{ ms} / 100 \text{ ms}) = -30.8 \text{ dB}$$

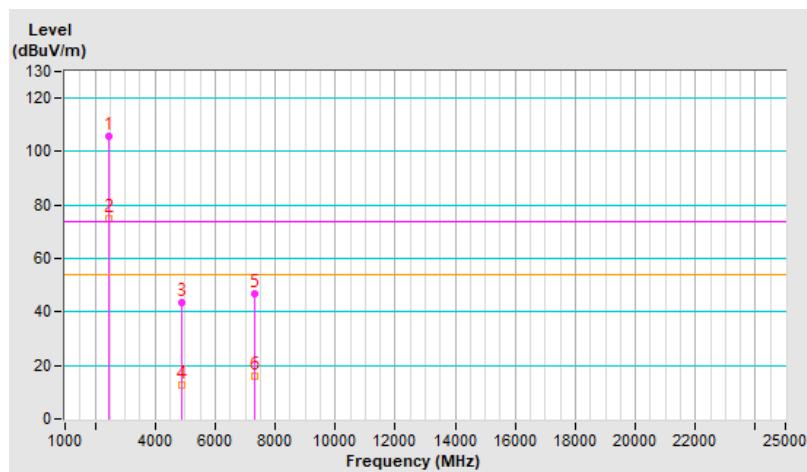


RF Mode	BT 8DPSK	Channel	CH 78 : 2480 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=3 MHz, DET=RMS
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	21°C, 69% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2480.00	100.8 PK			3.83 H	183	103.5	-2.7
2	*2480.00	70.0 AV			3.83 H	183	72.7	-2.7
3	2483.50	55.8 PK	74.0	-18.2	3.83 H	183	58.5	-2.7
4	2483.50	44.6 AV	54.0	-9.4	3.83 H	183	47.3	-2.7
5	4960.00	40.4 PK	74.0	-33.6	1.17 H	34	38.1	2.3
6	4960.00	9.6 AV	54.0	-44.4	1.17 H	34	7.3	2.3
7	7440.00	44.4 PK	74.0	-29.6	1.03 H	360	36.6	7.8
8	7440.00	13.6 AV	54.0	-40.4	1.03 H	360	5.8	7.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. The average value of fundamental and harmonic frequency is: Average = Peak value + 20 log(Duty cycle) Where the duty cycle correction factor is calculated from following formula:
 $20 \log(\text{Duty cycle}) = 20 \log(2.898 \text{ ms} / 100 \text{ ms}) = -30.8 \text{ dB}$

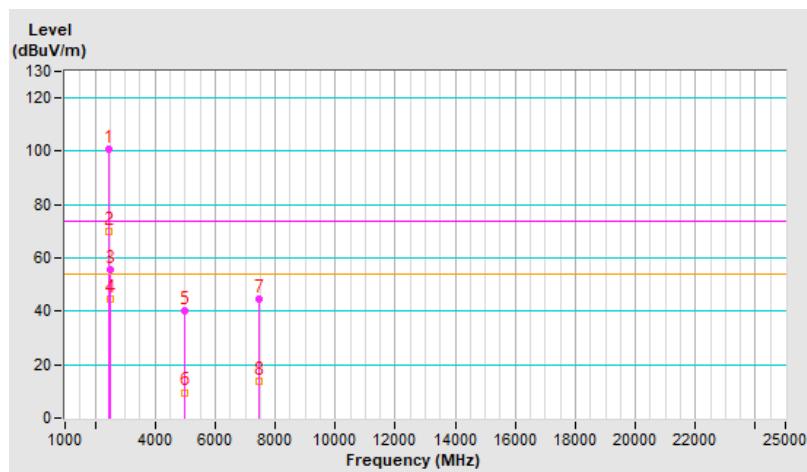


RF Mode	BT 8DPSK	Channel	CH 78 : 2480 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=3 MHz, DET=RMS
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	21°C, 69% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2480.00	105.1 PK			1.40 V	143	107.8	-2.7
2	*2480.00	74.3 AV			1.40 V	143	77.0	-2.7
3	2483.50	55.4 PK	74.0	-18.6	1.40 V	143	58.1	-2.7
4	2483.50	45.0 AV	54.0	-9.0	1.40 V	143	47.7	-2.7
5	4960.00	40.1 PK	74.0	-33.9	1.52 V	297	37.8	2.3
6	4960.00	9.3 AV	54.0	-44.7	1.52 V	297	7.0	2.3
7	7440.00	44.2 PK	74.0	-29.8	2.12 V	315	36.4	7.8
8	7440.00	13.4 AV	54.0	-40.6	2.12 V	315	5.6	7.8


Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. The average value of fundamental and harmonic frequency is: Average = Peak value + 20 log(Duty cycle) Where the duty cycle correction factor is calculated from following formula:
 $20 \log(\text{Duty cycle}) = 20 \log(2.898 \text{ ms} / 100 \text{ ms}) = -30.8 \text{ dB}$

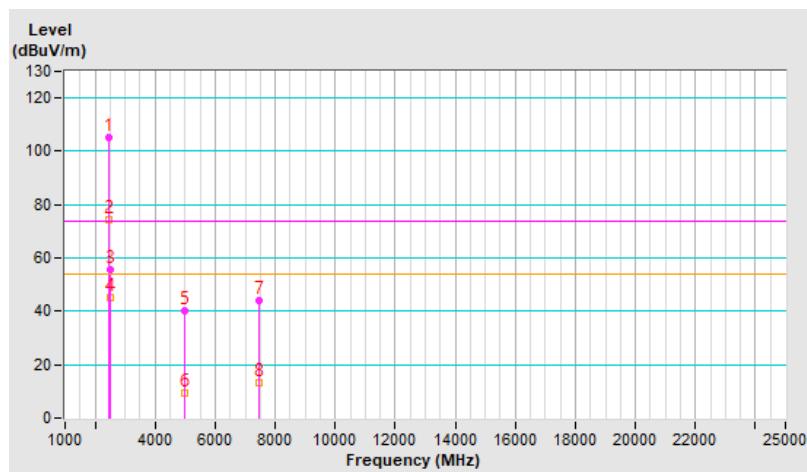


**Plot of Band Edge
Mode C (USB interface using internal antenna)**


Frequency Range	2.31 GHz ~ 2.5 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=3 MHz, DET=RMS
-----------------	--------------------	-------------------------------	---

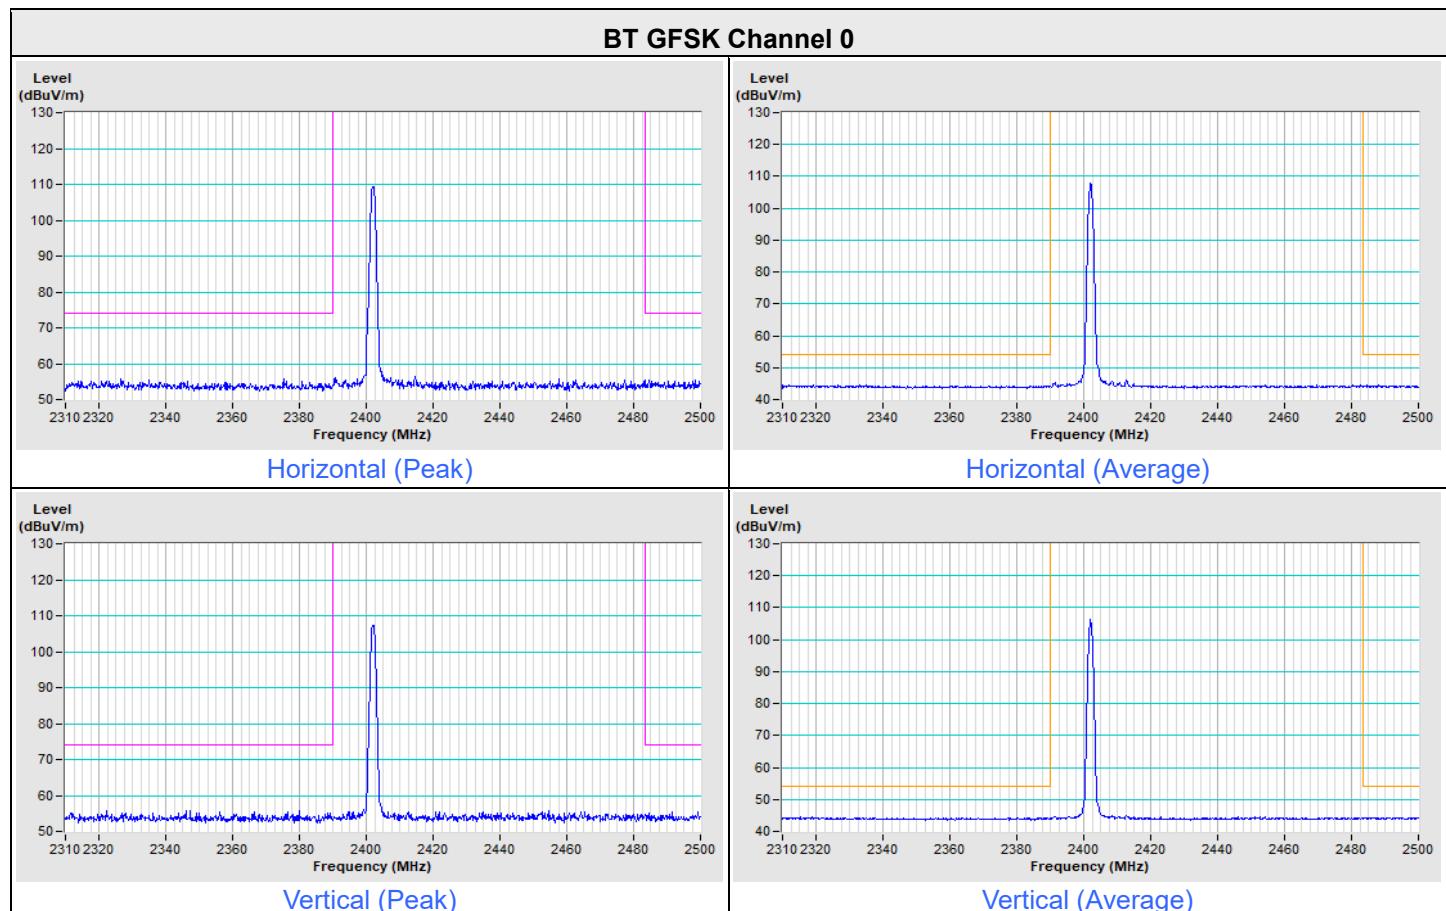


BT GFSK Channel 78

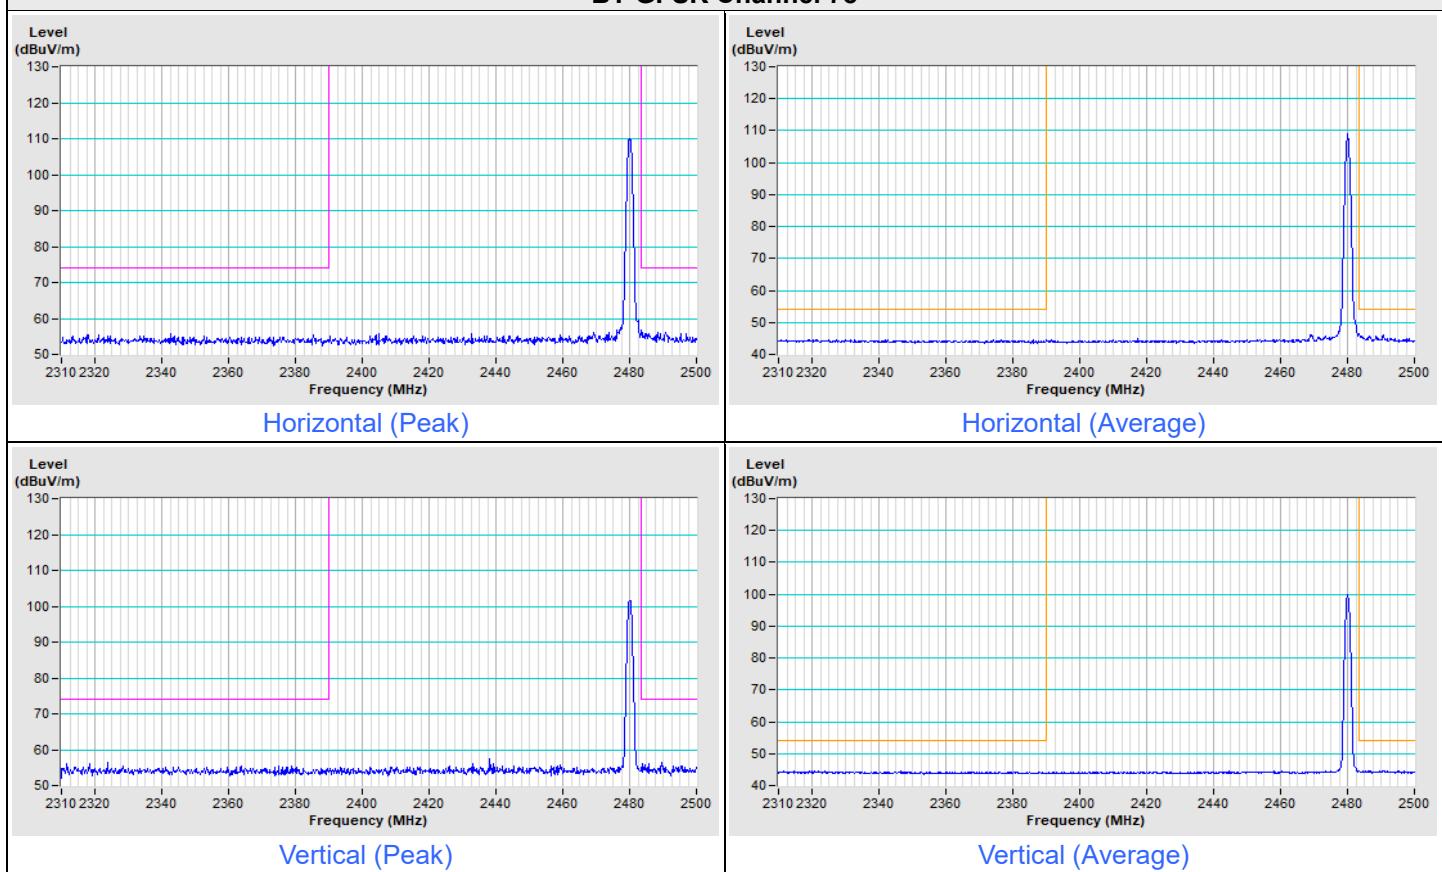

Frequency Range	2.31 GHz ~ 2.5 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=3 MHz, DET=RMS
-----------------	--------------------	-------------------------------	---

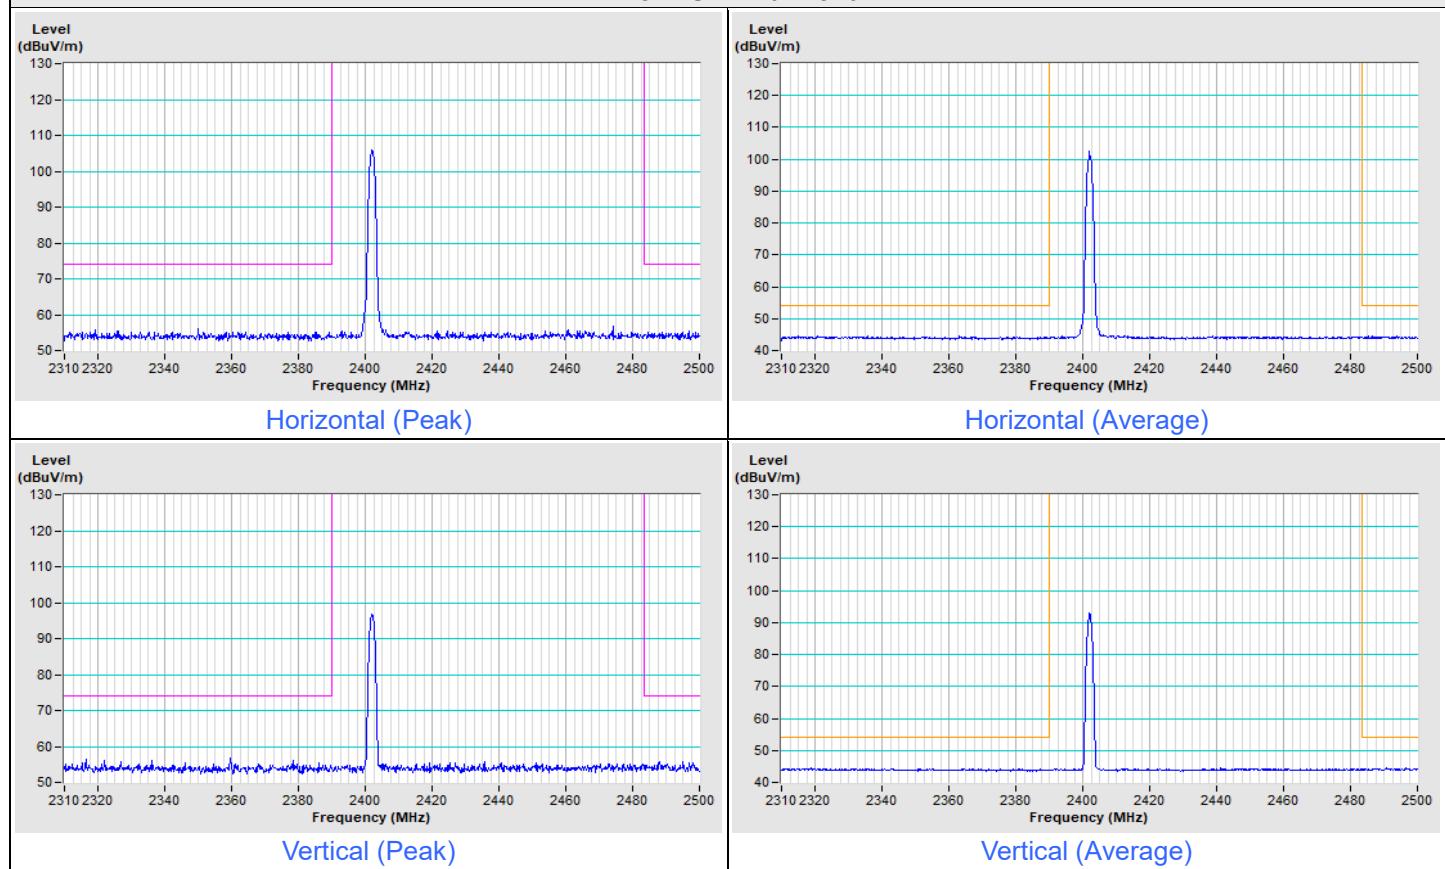
BT 8DPSK Channel 0


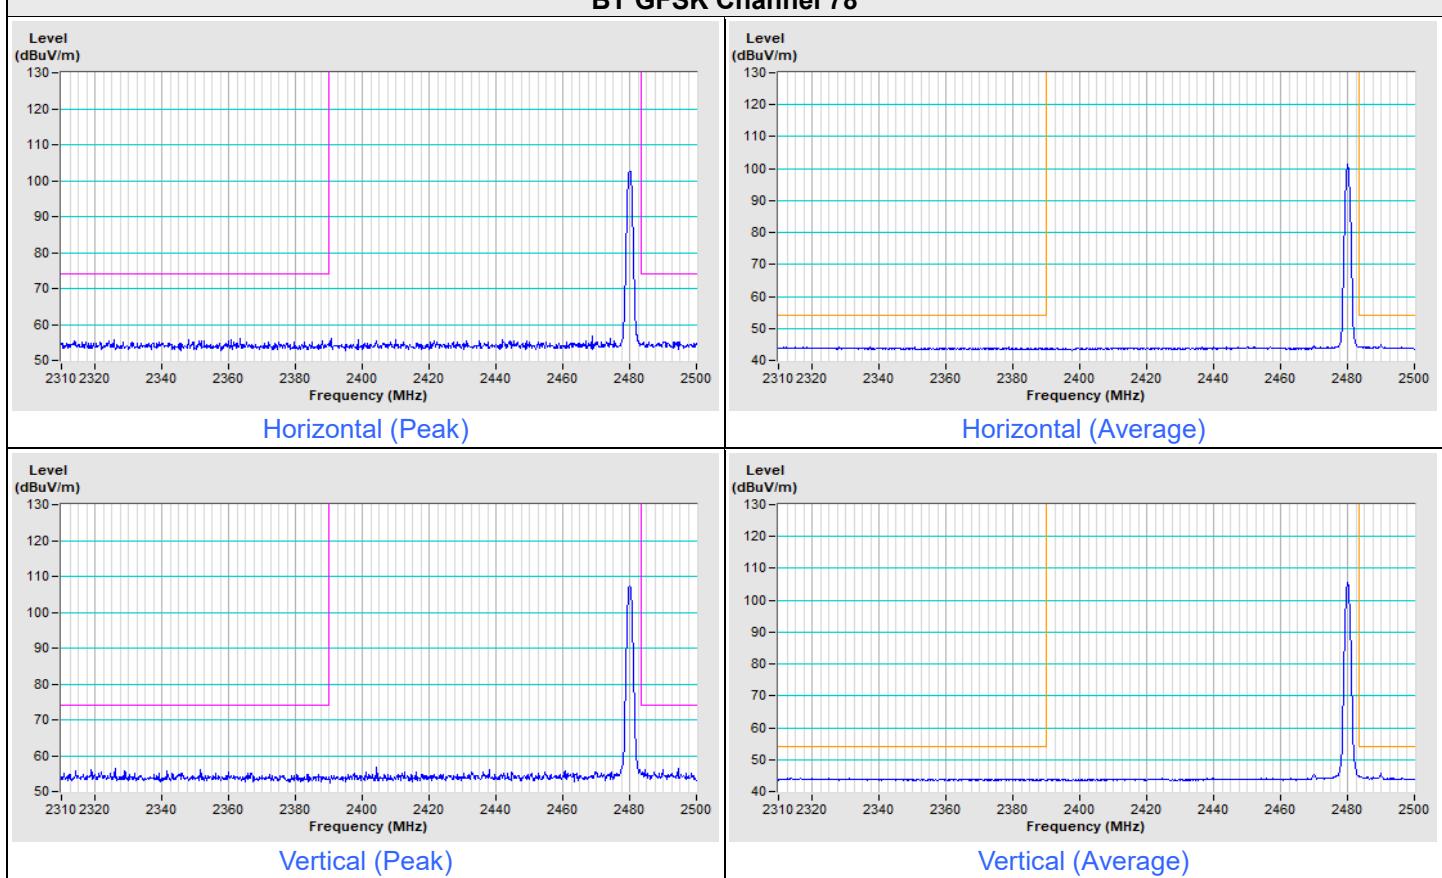
BT 8DPSK Channel 78

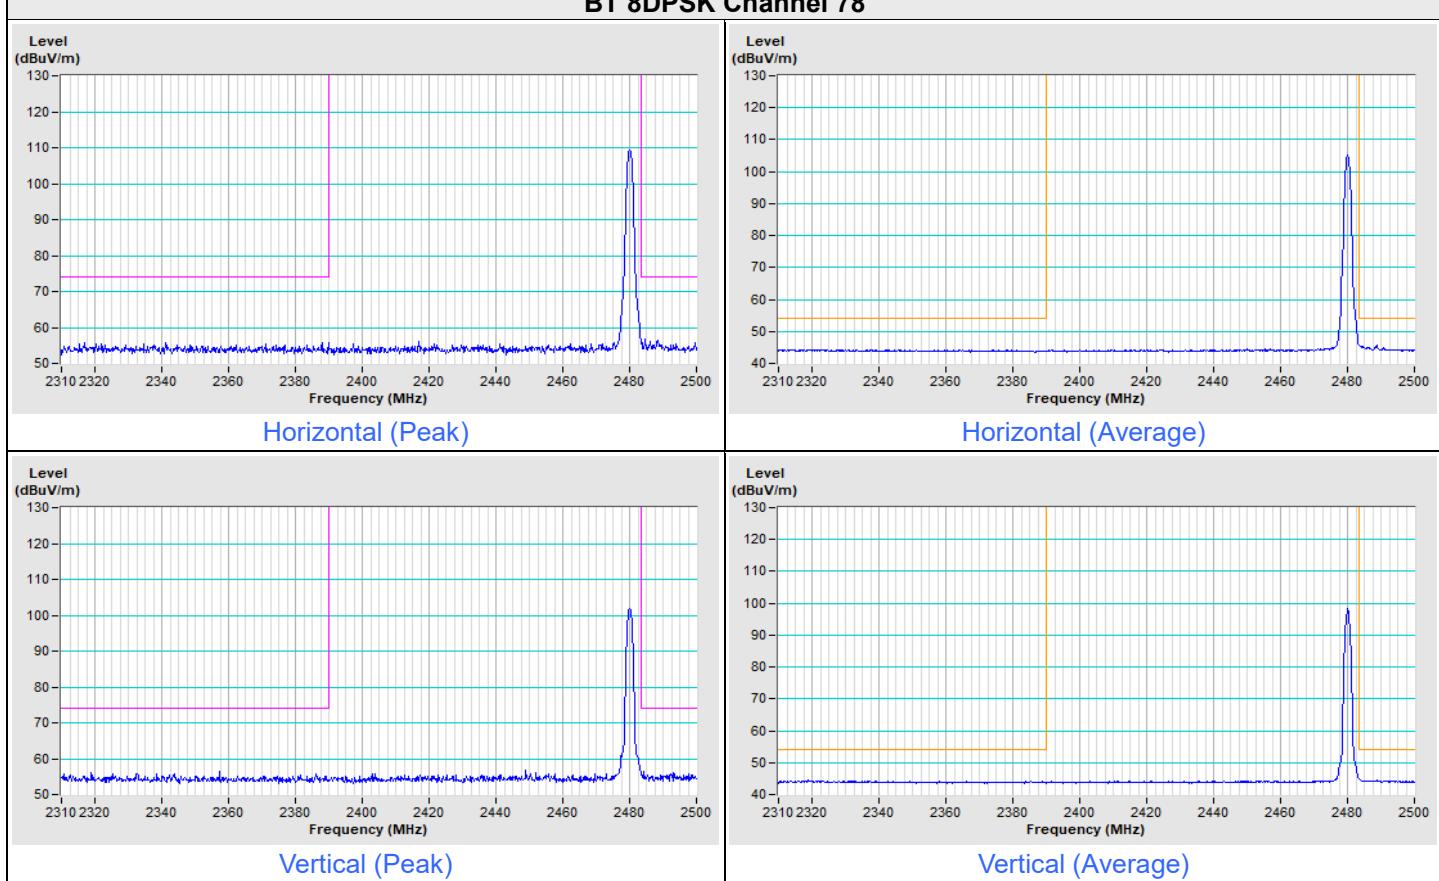


Mode D (USB interface using external antenna)


Frequency Range	2.31 GHz ~ 2.5 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=3 MHz, DET=RMS
-----------------	--------------------	-------------------------------	---

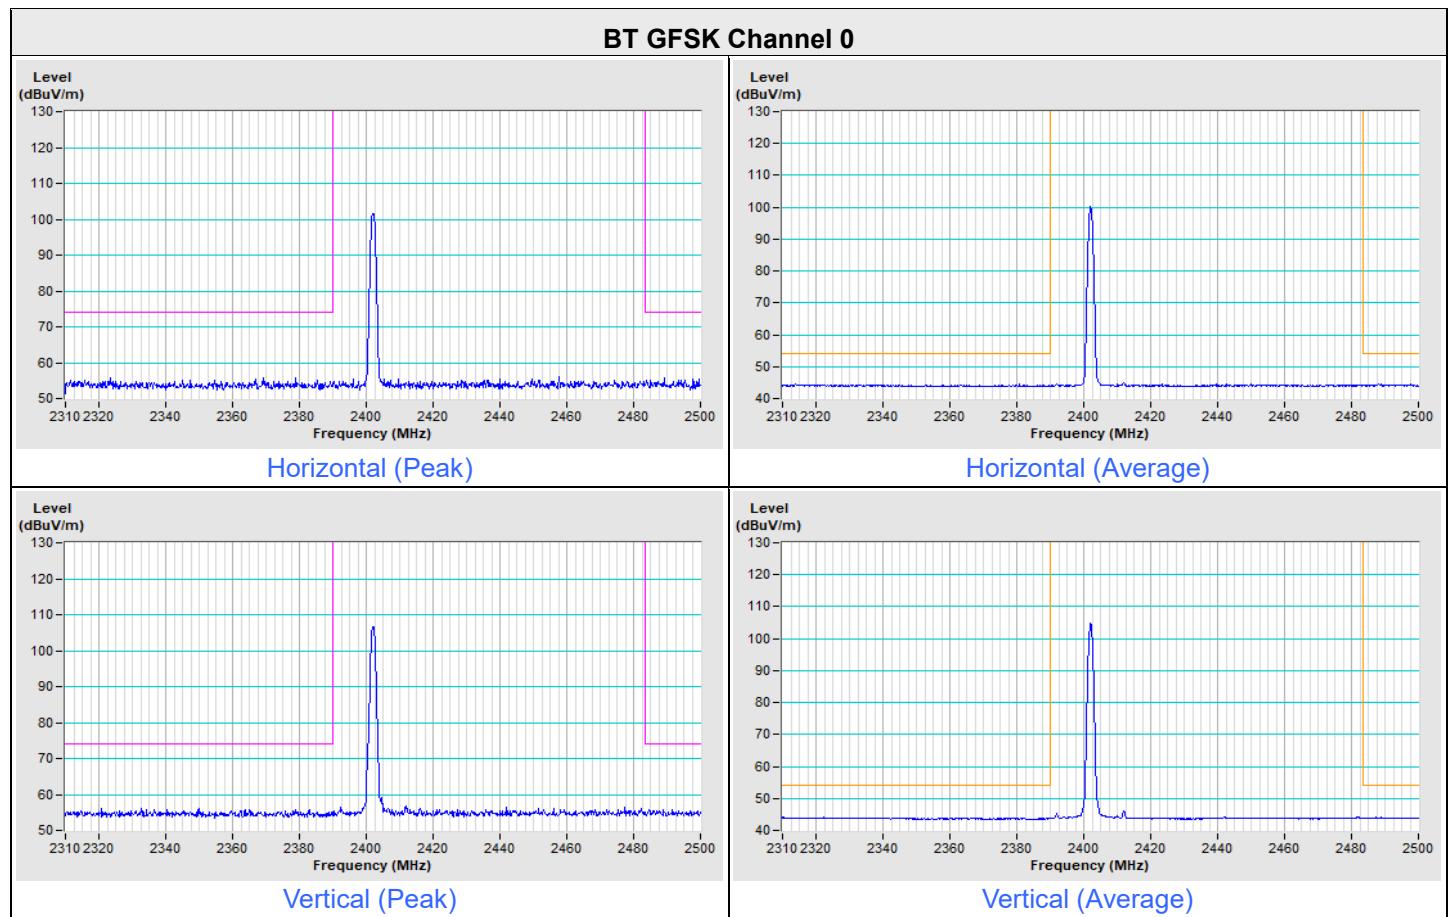

BT GFSK Channel 78


Frequency Range	2.31 GHz ~ 2.5 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=3 MHz, DET=RMS
-----------------	--------------------	-------------------------------	---

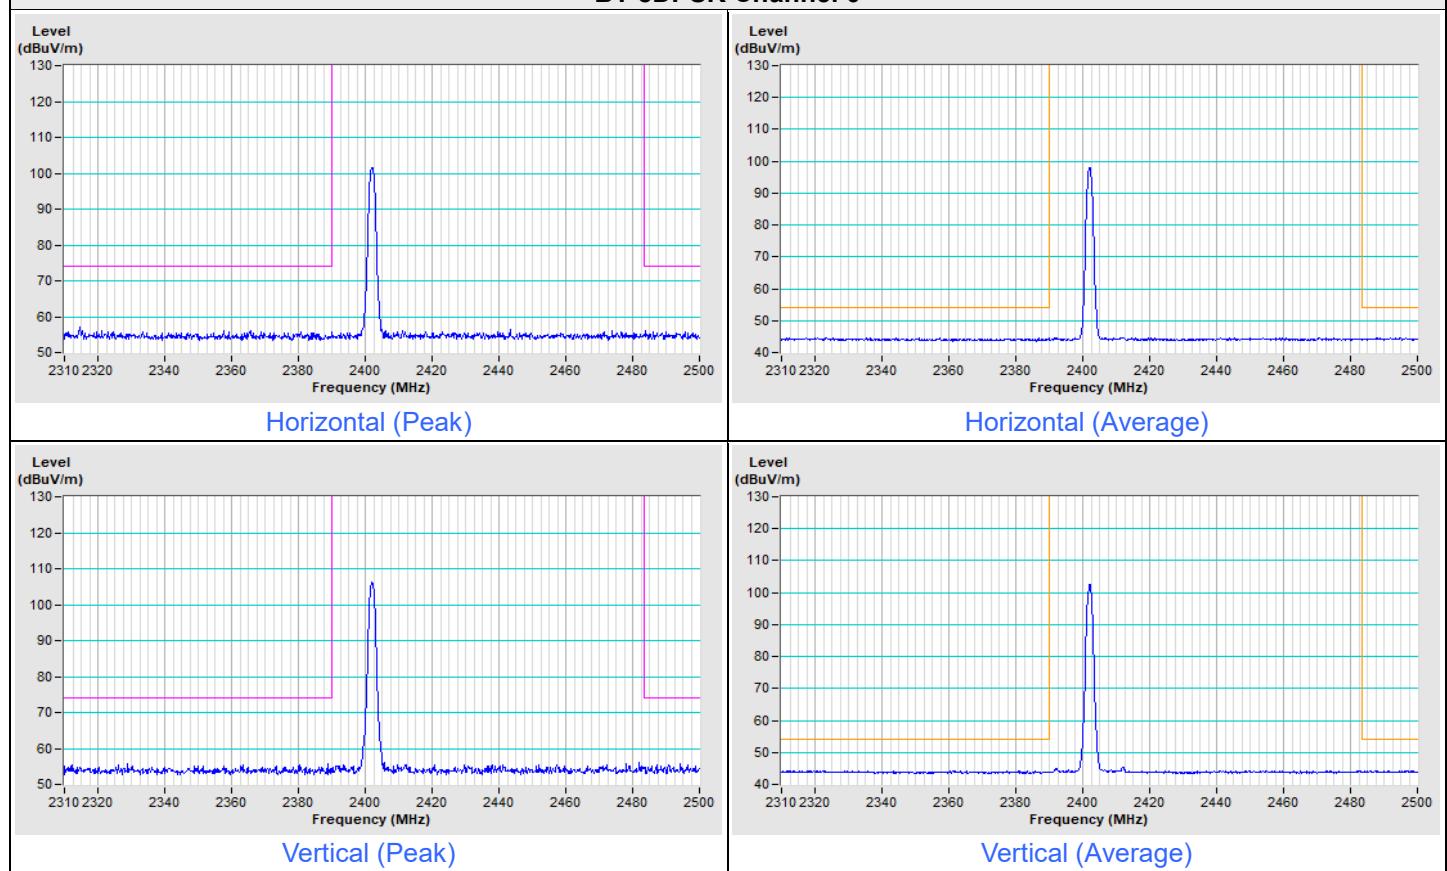BT 8DPSK Channel 0

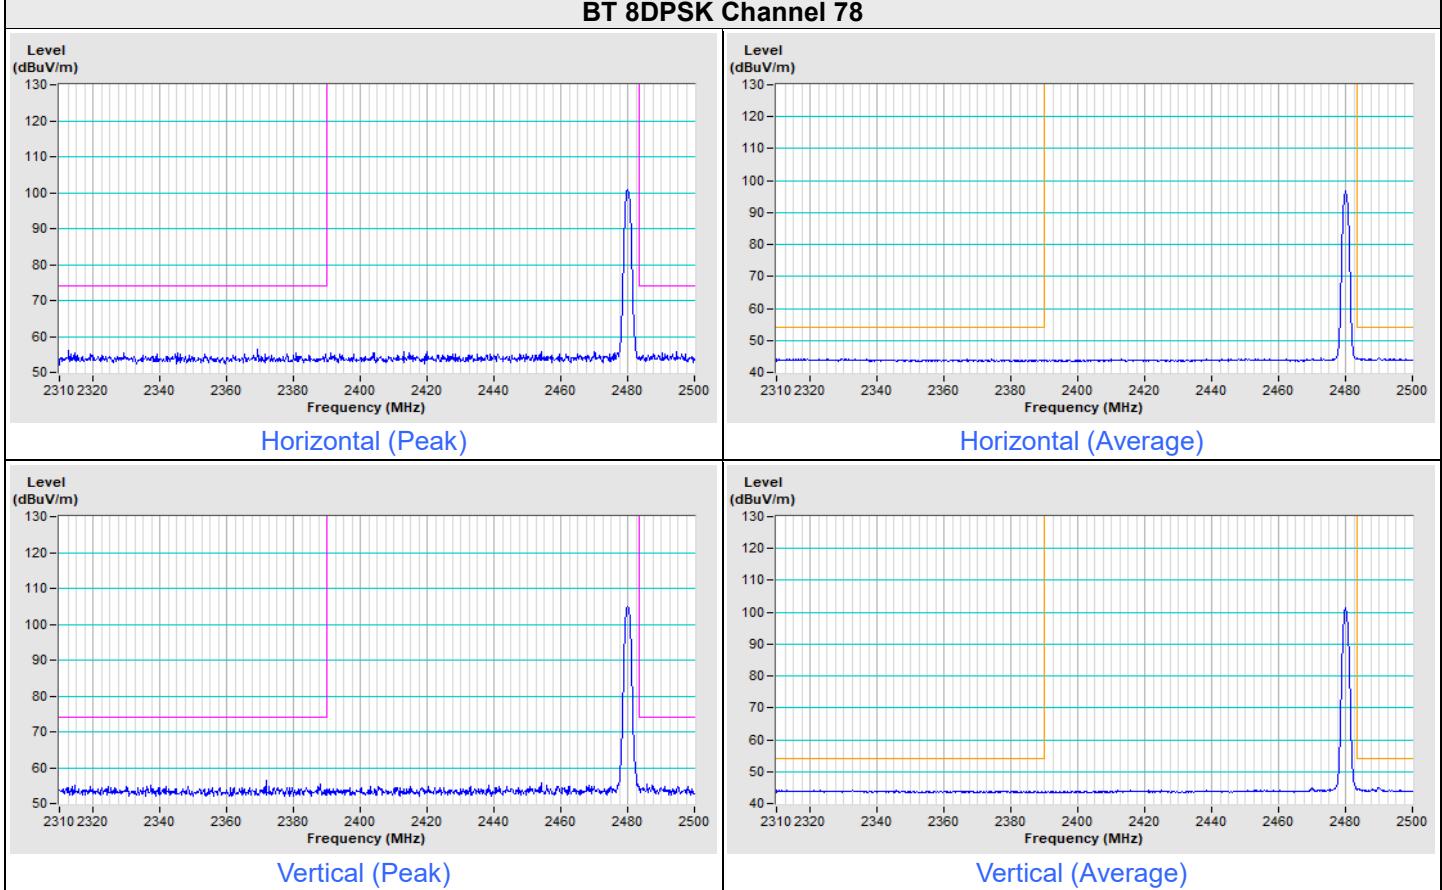
BT 8DPSK Channel 78


8 Pictures of Test Arrangements

Please refer to the attached file (Test Setup Photo)

9 Information of the Testing Laboratories

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are FCC recognized accredited test firms and accredited according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

Lin Kou EMC/RF Lab

Tel: 886-2-26052180

Fax: 886-2-26051924

Hsin Chu EMC/RF/Telecom Lab

Tel: 886-3-6668565

Fax: 886-3-6668323

Hwa Ya EMC/RF/Safety Lab

Tel: 886-3-3183232

Fax: 886-3-3270892

Email: service.adt@bureauveritas.com

Web Site: <http://ee.bureauveritas.com.tw>

The address and road map of all our labs can be found in our web site also.

--- END ---